SONY

DIGITAL VIDEOCASSETTE RECORDER

DSR-2000
DSR-2000P

i.LINK/DV INPUT/OUTPUT BOARD

DSBK-190

REMOTE CONTROL PANEL

DSBK-200

SERVICE MANUAL

Volume 2 1st Edition (Revised 1)

DVCAM™

⚠警告

このマニュアルは，サービス専用です。
お客様が，このマニュアルに記載された設置や保守，点検，修理などを行うと感電や火災，人身事故につながることがあります。
危険をさけるため，サービストレーニングを受けた技術者のみご使用ください。

⚠WARNING

This manual is intended for qualified service personnel only.
To reduce the risk of electric shock, fire or injury, do not perform any servicing other than that contained in the operating instructions unless you are qualified to do so. Refer all servicing to qualified service personnel.

⚠WARNUNG

Die Anleitung ist nur für qualifiziertes Fachpersonal bestimmt.
Alle Wartungsarbeiten dürfen nur von qualifiziertem Fachpersonal ausgeführt werden. Um die Gefahr eines elektrischen Schlages, Feuergefahr und Verletzungen zu vermeiden, sind bei Wartungsarbeiten strikt die Angaben in der Anleitung zu befolgen. Andere als die angegeben Wartungsarbeiten dürfen nur von Personen ausgeführt werden, die eine spezielle Befähigung dazu besitzen.

⚠ AVERTISSEMENT

Ce manual est destiné uniquement aux personnes compétentes en charge de l'entretien. Afin de réduire les risques de décharge électrique, d'incendie ou de blessure n'effectuer que les réparations indiquées dans le mode d'emploi à moins d'être qualifié pour en effectuer d'autres. Pour toute réparation faire appel à une personne compétente uniquement.

目次 / Table of Contents

このマニュアルについて

本書の目的 ..... 5 (J)
関連マニュアル ..... 5 (J)
構成 ..... 6 (J)

Manual Structure

Purpose of this manual ..... 5 (E)
Related manuals ..... 5 (E)
Contents ..... 6 (E)

11. Semiconductor Pin Assignments

12. Spare Parts and Optional Fixtures

12-1. 補修部品注意事項 12-1
12-1. Notes on Repair Parts 12-1
12-2. Exploded Views 12-2
12-3. Electrical Parts Lists 12-37
12-4. Packing Materials and Accessories 12-174
12-5. Optional Fixtures 12-175

13. Block Diagrams

Overall 13-2
CC-83 13-3
CC-84 13-3
CC-85 13-3
CP-341 ..... 13-2, 3
CP-342/342A 13-2
DU-83 13-3
DU-84 ..... 13-2, 3
DU-89 ..... 13-2, 3
DY-15 13-3
KY-452 13-3
KY-452A 13-3
MS-64 13-3
SE-521 13-3

SE-522 13-3
SE-538 13-3
SW-11/11P 13-3
SW-17 13-3
VR-259 13-3
VR-260 13-3
APR-45 13-4
DPR-136 13-6
FU-78P 13-14
FU-78R 13-14
IF-763 13-15
CN-1968 13-15
RP-111 13-16
SV-212 13-21
SY-278 13-24
VPR-62/62P 13-27

14. Board Layouts

APR-45 14-2
CC-83 14-6
CC-84 14-6
CC-85 14-6
CN-1863 14-7
CN-1968 14-7
CN-2021 14-7
CN-2022 14-7
CP-341 14-8
CP-342/342A 14-10
DPR-136 14-12
DU-83 14-14
DU-84 14-16
DU-89 14-18
DU-95 14-20
DY-15 14-21
EX-752 14-22
FU-78P 14-23
FU-78R 14-23
HP-99 14-25
IF-763 14-26
IF-778 14-28
KY-452 14-29

KY-452A 14-29
MB-859 14-32
MS-64 14-34
PTC-100 14-37
RP-111 14-38
SE-521 14-42
SE-522 14-42
SE-525 14-42
SE-538 14-42
SV-212 14-44
SW-11/11P 14-46
SW-17 14-47
SY-278 14-48
VPR-62/62P 14-52
VR-259 14-54
VR-260 14-54

15. Schematic Diagrams

APR-45 15-2
CC-83 15-32
CC-84 15-32
CC-85 15-32
CN-1863 15-33
CN-1968 15-33
CP-341 15-34
CP-342/342A 15-36
DPR-136 15-38
DU-83 15-55
DU-84 15-62
DU-89 15-65
DU-95 15-68
DY-15 15-69
EX-752 15-71
FU-78P 15-73
FU-78R 15-73
HP-99 15-78
IF-763 15-79
IF-778 15-84
KY-452 15-85
KY-452A 15-89
MB-859 15-93

MS-64 15-104
PTC-100 15-105
RP-111 15-106
SE-521 15-125
SE-522 15-125
SE-525 15-125
SE-538 15-125
SV-212 15-126
SW-11/11P 15-138
SW-17 15-141
SY-278 15-142
VPR-62/62P 15-151
VR-259 15-169
VR-260 15-169
Frame Wiring 15-170
    CN-2021 15-174
    CN-2022 15-174

このマニュアルについて

本書の目的

本書は，デジタルビデオカセットレコーダDSR-2000とそのオプション基板であるi.LINK/DV入出力ボードDSBK-190および，リモートコントロールパネルDSBK-200のサービスマニュアルVolume 2です。
本書では，半導体リスト，パーツリスト，ブロックダイヤグラム，マウント図，回路図を記載しています。

関連マニュアル

本機には，この「サービスマニュアルVolume 2」のほかに，下記のマニュアルが用意されています。

- **取扱説明書**
  DSR-2000 (DSR-2000に付属しています)
  部品番号：3-867-754-02
  DSBK-190 (DSBK-190に付属しています)
  部品番号：3-203-674-01
  DSBK-200 (DSBK-200に付属しています)
  部品番号：3-203-675-01
  DSBK-210 (DSBK-210に付属しています)
  部品番号：3-205-213-01 (1)

- **サービスマニュアル　Volume 1 (本機に付属していません)**
  本機の保守に関する情報と，部品交換および調整などのサービスに関する情報を記載しています。
  部品番号：9-955-185-12

- **DSBK-210**
  サービスマニュアル (本機に付属していません)
  DSBK-210の保守に関する情報と，部品交換および調整などのサービス情報を記載しています。
  部品番号：9-955-267-01

- **“Semiconductor Pin Assignments” CD-ROM版（別途用意）**
  この“Semiconductor Pin Assignments” CD-ROM版は，B&Pカンパニーの機器に使用されている半導体を検索することができます。
  このCD-ROMで検索できない半導体は，その半導体が使用されている機種のサービスマニュアルに記載されています。サービスマニュアルには，その機種に使用されているすべての半導体一覧とそのID番号を記載していますので，このCD-ROM版と合わせて使用してください。
  部品番号：9-968-546-XX

構成

本書の構成を把握していただくために，全章の概略を以下に説明します。

Section 11　Semiconductor Pin Assignments
使用半導体の外形および，ICについては概略の機能ブロックや，ピン名称を記載しています。

Section 12　Spare Parts and Optional Fixtures
セットの全サービス部品を記載しています。

Section 13　Block Diagrams
各基板の機能や信号の流れを示すブロック図を記載しています。

Section 14　Board Layouts
全プリント基板のパターンとシンボル図を記載しています。

Section 15　Schematic Diagrams
全プリント基板の回路図を記載しています。

Manual Structure

Purpose of this manual

This manual is the Service Manual Volume 2 for the digital videocassette recorder DSR-2000/2000P, the option boards i.LINK/DV Input/Output Board DSBK-190 and optional Remote Control Panel DSBK-200.
This manual contains the semiconductor pin assingnments, parts lists, block diagrams, board layouts and schematic diagrams.

Related manuals

In addition to this Service Manual Volume 2, the following manuals are provided.

- **Operation Instructions**
  DSR-2000/2000P (Supplied with equipment)
  Part number: 3-867-754-12 (English; for UC, CE)
  3-867-754-22 (French; for UC, CE)
  3-867-754-32 (German; for CE)
  3-867-754-42 (Italian; for CE)

  DSBK-190 (Supplied with Model DSBK-190)
  Part number: 3-203-674-01

  DSBK-200 (Supplied with Model DSBK-200)
  Part number: 3-203-675-01

  DSBK-210 (Supplied with Model DSBK-210)
  Part number: 3-205-213-01 (1)

- **Servive Manual Volume 1 (Not Supplied with equipment)**
  Contains the maintenance information of this equipment and servicing information necessary for parts replacement and adjustments.
  Part number: 9-955-186-12

- **DSBK-210**
  Service Manual (Not Supplied with equipment)
  Contains the maintenance information of the DSBK-210, and servicing information necessary for parts replacement and adjustments.
  Part number: 9-955-268-01

- **"Semiconductor Pin Assignments" CD-ROM (Available on request)**
  This "Semiconductor Pin Assignments" CD-ROM allows you to search for semiconductors used in B&P Company equipment.
  Semiconductors that cannot be searched for on this CD-ROM are listed in the service manual for the corresponding unit. The service manual contains a complete list of all semiconductors and their ID Nos., and thus should be used together with the CD-ROM.
  Part number: 9-968-546-XX

Contents

The following is a summary of all the sections for understanding the contents of this manual.

Section 11 Semiconductor Pin Assignments
Shows the external dimensions of the semiconductors used and describes outlines of the function blocks and pin names of the ICs.

Section 12 Spare Parts and Optional Fixtures
Describes the all service parts of the unit.

Section 13 Block Diagrams
Illustrates the block diagrams which show each board function and signal flow.

Section 14 Board Layouts
Shows the board layouts of all circuit boards.

Section 15 Schematic diagrams
Shows the schematic diagrams of all circuit boards.

Section 11
Semiconductor Pin Assignments

The following describes the semiconductor types used in this unit.
For semiconductors marked with page numbers in the index, refer to the corresponding pages in this section. However, in some cases incompatible types are also listed, therefore, when a part is to be replaced, also refer to the Spare Parts section.
In addition, for semiconductors with ID Nos., refer to the separate CD-ROM titled "Semiconductor Pin Assignments" (Sony Part No. 9-968-546-xx) that allows searching for parts by semiconductor type or ID No.
The semiconductors in the manual or on the CD-ROM are listed by equivalent types. Thus the external view or the index mark indication may differ from the actual type.
Pin assignments and block diagrams are based on the IC manufacturer's data book.

本機に使用されている半導体型名の一覧を下記に示します。
索引中，ページが記載されている半導体は，本章の該当ページを参照してください。ただし，互換性のない型名を併記している場合がありますので，部品を交換するときは，Spare Partsの章を参照してください。
また，ID番号が記載されている半導体は，別途発行の "Semiconductor Pin Assignments" CD-ROM版 (ソニー部品番号：9-968-546-xx)を参照してください。
半導体型名またはID番号から検索ができます。
マニュアルまたはCD-ROMに掲載されている半導体は，それぞれの機能を等価的に表わしたものです。
外観やインデックスマークの表示方法が実物と異なる場合があります。
ピン配置およびブロック図はICメーカーのデータブックに従いました。

DIODE	Page or ID No.
1SR154-400TE-25	DC008-02
1SS187-TE85L	DC001-05
1SS223	DC001-05
1SS300-TE85L	DC001-02
1SS301-TE85L	DC001-03
1SS302	DC001-01
1SS302-TE85L	DC001-01
1SS351-TB	DC001-01
DA204U	DC001-01
DA204UT106	DC001-01
DAN202U	DC001-03
DAN202UT106	DC001-03
DAN217	DC001-01
DAN217-T146	DC001-01
DAP202U	DC001-02
DAP202UT106	DC001-02
DTZ-TT11-3.3B	DC008-04
DTZ5.1B	DC008-04
EC11FS4-TE12L	DC007-01
EC11FS4-TE12L5	DC007-01
FMP1	DC014-01
FMP1-T-148	DC014-01
HSM88WK-TL	DC001-03
IMN10	DC005-01
IMN10T108	DC005-01
KV1470	DC001-13
KV1470TL00	DC001-13
MA141WK	DC001-03
MA740	11-6
MA740-TX	11-6

DIODE	Page or ID No.
MA795-TX	DC001-06
NSQ03A04	DC007-01
NSQ03A04-TE16L	DC007-01
RB160L-40TE25	DC007-01
RB717F	DC001-02
RB717F-T106	DC001-02
RD11ES-B2	DA001-02
RD11ES-T1B2	DA001-02
RD12ES-B2	DA001-02
RD12ES-T1B2	DA001-02
RD2.2M-B	DA001-04
RD2.4M-B	DC001-04
RD2.4M-T1B	DC001-04
RD4.3UH-T1	DC008-04
RD6.2ES-B2	DA001-02
RD6.2ES-T1B	DA001-02
RD7.5ES-B1	DA001-02
RD7.5ES-B3	DA001-02
RD7.5ES-T1B1	DA001-02
RD7.5ES-T1B3	DA001-02
RD9.1ES-T1B1	DA001-02
RD9.1ESB1	DA001-02
RD9.1M-B2	DC001-04
RD9.1M-T1B2	DC001-04
SB007-03CP	DC001-06
SB007-03CP-TB	DC001-06
SB07-03C	DC001-06
SB07-03C-TB	DC001-06
UDZ-TE-17-2.2B	DA001-04
UDZ-TE-17-2.2B	DC008-04
UDZ-TE-17-3.3B	DC008-04
UDZ-TE-17-5.1B	DC008-04

Index

LED	Page or ID No.
CL-150PG-CD	LC001-01
CL-150PG-CD-T	LC001-01
CL-150R-CD	LC001-01
CL-150R-CD-T	LC001-01
CL-150Y-CD	LC001-01
CL-150Y-CD-T	LC001-01
CL-200HR-C-TSL	LC008-04
CL-200HR-C-TUL	LC008-04
CL-200PG-C-TU	LC008-01
CL-200Y-C-TU	LC008-02
GL453	LR052-01
GL453S	LR052-01

TRANSISTOR	Page or ID No.
2SA1162G	TC001-01
2SA1162G-TE85L	TC001-01
2SA1314C-TE12L	TC002-01
2SA1576-R	TC001-01
2SA1576T106R	TC001-01
2SA1611-M5M6	TC001-01
2SA1611T1-M5M6	TC001-01
2SA1813-TL	TC001-01
2SB1115A-T1YQYP	TC002-01
2SB1115A-YQ	TC002-01
2SB624-BV345	TC001-01
2SB624-T1BV3	TC001-01
2SC2712-YG	TC001-02
2SC2712G-TE85L	TC001-02
2SC2873-O	TC002-02
2SC2873O-TE12L	TC002-02
2SC2873Y-TE12L	TC002-02
2SC2873Y-TE12R	TC002-02
2SC2982C-TE12L	TC002-02
2SC3303-Y	TR031-01
2SC3303-Y(TE16L)	TR031-01
2SC3356-K	TC001-02
2SC3356-R24	TC001-02
2SC3356-T1K	TC001-02
2SC3356-T1R24	TC001-02
2SC3392-6-TB	TC001-02
2SC4081T106R	TC001-02
2SC4176-B35	TC001-02
2SC4176-T1B35	TC001-02
2SC4177-L6	TC001-02
2SC4177-T1L5L6	TC001-02
2SC4178-F13	TC001-02
2SC4178-T1F13	TC001-02
2SC4213-B	TC001-02
2SC4213B-TE85L	TC001-02
2SD1615A-GP	TC002-02
2SD1615A-T1GQGP	TC002-02
2SD1623-S	TC002-02
2SD1624-T	TC002-02
2SD1624-T-TD	TC002-02
2SK425-T1X13	TC001-05

TRANSISTOR	Page or ID No.
2SK425-T1X15	TC001-05
2SK425-X13	TC001-05
2SK425-X15	TC001-05
2SK663	TC001-05
2SK852-T1X3	TC001-05
DTA114EUA	TC001-04
DTA114EUA-T106	TC001-04
DTA114TUA-T106	TC001-04
DTA123JUA-T106	TC001-04
DTA144EKA-T146	TC001-04
DTA144EUA-T106	TC001-04
DTC114EUA-T106	TC001-03
DTC123JUA-T106	TC001-03
DTC144EKA	TC001-03
DTC144EKA-T146	TC001-03
DTC144EUA-T106	TC001-03
FMS2	TC008-07
FMS2-T-148	TC008-07
FMS2A-T148	TC008-07
FMW1	TC008-04
FMW1-T-148	TC008-04
FMW2	TC008-16
FMW2-T-148	TC008-16
FMY3	TC008-05
FMY3-T-148	TC008-05
IMZ1	TC005-04
IMZ1T109	TC005-04
PT483F1	TR037-01
PT483F1S	TR037-01
SI4925DY-T1	TC012-02
SI9434DY-T1	TC012-04
SI9936DY	TC012-01
SI9936DY-T1	TC012-01
UMH11	TC005-08
UMH11-TN	TC005-08
UMH2	TC005-08
UMH2-TN	TC005-08
UMY1-TR	TC008-08
UMZ1-TL	TC005-04
UPA801T-T1/FB	TC005-15
XP4401-TXE	TC006-11

IC	Page or ID No.
AK4324-VF-E2	AK4324-VF-E2
AK5352-VF-E2	AK5352-VF-E2
AK6417AM-E2	AK6417AM-E2
AK6440AM-E2	AK6440AM-E2
AN3834S	AN3834S
BA10358F-E2	RC4558
BA6285FP-E2	BA6285FP
CXA1432M	CXA1432M
CXA1432M-T4	CXA1432M
CXA1450M-TH	CXA1450M
CXA1451M	CXA1451M
CXA1451M-TH	CXA1451M
CXA1521M-TH	CXA1521M
CXA1762Q-T4	CXA1762Q
CXA2018Q-T4	CXA2018Q-T4
CXA2023R-T4	CXA2023R-T4
CXA3178M-T4	CX22017
CXA3240TN-T2	CXA3240TN-T2
CXA3241TN-T2	CXA3241TN-T2
CXA8044Q-T4	CXA8044Q
CXB1341R	CXB1341R
CXB1342R	CXB1342R
CXD1171M	CXD1171M
CXD1216M	CXD1216M
CXD1216M-TH	CXD1216M
CXD2193AR-ER	CXD2193AR
CXD2202Q	CXD2202Q
CXD2208Q	CXD2208Q
CXD2302Q-T4	CXD2302Q
CXD2307R-T6	CXD2307R
CXD2309AQ-T6	CXD2309Q-T6
CXD2310AR	CXD2310R
CXD2310AR-T4	CXD2310R
CXD2712R	CXD2712R
CXD2913AQ	CXD2913AQ
CXD3105R-T6	CXD3105R-T6
CXD3106R	CXD3106R
CXD3107R	CXD3107R
CXD3107R-T6	CXD3107R
CXD8161AQ	CXD8161AQ
CXD8176AQ	CXD8176AQ
CXD8243AM	CXD8243M
CXD8243AM-ER	CXD8243M
CXD8280AQ	CXD8280AQ
CXD8281Q	CXD8281Q
CXD8384Q	CXD8384Q
CXD8385Q	CXD8385Q
CXD8386AQ	CXD8386AQ
CXD8517Q	CXD8517Q
CXD8608R	CXD8608R
CXD8621R	CXD8621R
CXD8630R	CXD8630R
CXD8763AR	CXD8763AR
CXD8804Q	CXD8804Q
CXD8953Q	CXD8953Q
CXD8969AR	CXD8969AR
CXD9068BR	CXD9068AR

IC	Page or ID No.
CXD9106R	CXD9106R
CXD9125R	CXD9125R
CXD9129AR	CXD9129R
CXD9129R	CXD9129R
CXP912032-206Q	11-7
CY62256LL-70SNC-T2	CY62256-70SNC-T2
CY7C1021BV33-15ZCT	IDT71V016S20Y-TL
CY7C199-20VC-T2	CY7C199-45PC
HA17431UA	NJM431U
HA17431UA-TL	NJM431U
HD6415108RF10	HD6415108RVF5
HD6437021SC02X	HD6437021C02X
HY57V641620HGT-H	TC59S6416BFTL-10
IDT71V016S15PH-TL	IDT71V016S20Y-TL
IDT71V016S20PHAU-TL	IDT71V016S20Y-TL
IDT71V256SA15PZ-TL	IDT71256L-35TP
L78M09T-TL	L78M05T-FA
LB1857M-TE-L	LB1857M-TE-L
LM1881M	LM1881N
LM1881MX	LM1881N
LM2901M	NJM2901N
LM2940SX-5.0	UA7805UC
LM2990SX-5.0	UA7905UC
M48Z58Y-70MH1TR	M48Z58Y-70MH1TR
M66004M6FP-200D	M66004M6FP200D
M66004M6FP200D	M66004M6FP200D
M66256GP-E2	M66256FP
MB40569PFV-ER	MB40569PFV-ER
MB811641642A-100LFN	TC59S6416BFTL-10
MB811643242A-100FN	MB811643242A-100FN
MB88102PFV-G-BND-ER	MB88102PFV-G-BND-ER
MB88346BPFV	MB88346APF
MB88346BPFV-EF	MB88346APF
MBM29F400BC-70PFTN	MBM29F400TC-90PFTN
MC14053BDTR2	MC74HC4053F
MN47V77ST1	MN47V77ST1
NJM062M	RC4558
NJM062M-TE2	RC4558
NJM062V(TE2)	RC4558
NJM082BM	RC4558
NJM082BM(TE2)	RC4558
NJM2060V(TE2)	XRA10324AF
NJM2068M-D-TE2	RC4558
NJM2267M	NJM2267M(TE2)
NJM2267M(TE2)	NJM2267M(TE2)
NJM2901M-TE2	NJM2901N
NJM2901V(TE2)	NJM2901N
NJM2903M	UA393DC
NJM2903M-TE2	UA393DC
NJM2903V(TE2)	UA393DC
NJM2904V(TE2)	RC4558
NJM324V(TE2)	XRA10324AF
NJM360M	LM360N
NJM360M-TE2	LM360N

Index

IC	Page or ID No.
NJM4556AM	RC4558
NJM4556AM-A-TE2	RC4558
NJM4558M-TE2	RC4558
NJM4558V-TE2	RC4558
NJM4580E	RC4558
NJM4580E(TE2)	RC4558
NJM4580E-D	RC4558
NJM4580E-D-TE2	RC4558
NJM78L05A	UA78L05AWC
NJM79L05A	NJM79L03A
NJU7211U50	S-80250AG-GB
PQ05SZ5U	PQ05SZ11
PQ20VZ5U	PQ20VZ5U
RH5RL50AA-T1	NJU7201U50
S-80250AG-GB-T1	S-80250AG-GB
S-80727SL-AQ-T1	S-80727SL-AQ
S-80742SN-D6-T1	S-80720SN-DH
S-80745SN-D9-T1	S-80720SN-DH
S-81230SG-QB-T1	S-81230SG
S-81350HG-KD	S-81350HG-KD
S-81350HG-KD-T1	S-81350HG-KD
SN74HC377ANS-E20	TC74HC377P
SN74HC377ANSR	TC74HC377P
SN74HCT00ANS-E20	TC74HC00P
SN74HCT00ANSR	TC74HC00P
SN74LS123NS	SN74123N
SN74LS123NSR	SN74123N
SN74LS221DB-E05	SN74221N
SN74LV04APWR	TC74HC04P
SN74LV125APWR	MC74HC125N
SN74LV245ANSR	TC74HC245P
SN74LV245APWR	TC74HC245P
SN74LV541APWR	MC74HC541N
SN74LVC245ANS-E05	TC74HC245P
SN75107ANS-LS	SN75107AN
SN75107ANS-LS-E05	SN75107AN
SN75C1168NS-E05	SN75C1168NS
SSM-2142SR	SSM-2142S
TA7809S	NJM78M05FA
TA78L005AP-TPE6	UA78L05AWC
TA79009S	TA79005S
TA79L005P-TPE6	NJM79L03A
TC4W53FU	TC4W53FU
TC4W53FU(TE12R)	TC4W53FU
TC4W66FU(TE12R)	TC4W66F
TC74HC4052AFT(EL)	MC74HC4052N
TC74HC4053AFT(EL)	MC74HC4053F
TC74VHC00FT(EL)	TC74HC00P
TC74VHC02FT(EL)	TC74HC02P
TC74VHC04FT(EL)	TC74HC04P
TC74VHC08FT(EL)	TC74HC08P
TC74VHC10FT(EL)	TC74HC10P
TC74VHC11FT(EL)	TC74HC11P
TC74VHC123AF(EL)	TC74HC123P
TC74VHC123AFT(EL)	TC74HC123P

IC	Page or ID No.
TC74VHC125F	MC74HC125N
TC74VHC125F(EL)	MC74HC125N
TC74VHC125FT(EL)	MC74HC125N
TC74VHC138F(EL)	TC74HC138P
TC74VHC138FT(EL)	TC74HC138P
TC74VHC14FT(EL)	TC74HC14P
TC74VHC157FT(EL)	TC74HC157P
TC74VHC163FT(EL)	TC74HC163P
TC74VHC164FT(EL)	TC74HC164P
TC74VHC175FT(EL)	TC74HC175P
TC74VHC21FT(EL)	TC74HC21P
TC74VHC245FT(EL)	TC74HC245P
TC74VHC27FT(EL)	TC74HC27P
TC74VHC32FT(EL)	TC74HC32P
TC74VHC541FT(EL)	MC74HC541N
TC74VHC573FT(EL)	TC74HC573F
TC74VHC574FT(EL)	TC74HC574P
TC74VHC74FT(EL)	TC74HC74P
TC74VHC86FT(EL)	TC74HC86P
TC74VHCT04AFT(EL)	TC74HC04P
TC74VHCT08AFT(EL)	TC74HC08P
TC74VHCT244AFT(EL)	TC74HC244P
TC74VHCT245AFT(EL)	TC74HC245P
TC74VHCT541AF(EL)	MC74HC541N
TC74VHCT541AFT(EL)	MC74HC541N
TC74VHCU04FT(EL)	TC74HC04P
TC7S00FU(TE85R)	TC7S00F
TC7S04FU(TE85R)	TC7S04F
TC7S14F	TC7S14FU
TC7S14F(TE85R)	TC7S14FU
TC7S14FU(TE85R)	TC7S14FU
TC7S32FU(TE85R)	TC7S32F
TC7S66F	SC14S66F
TC7S66F(TE85R)	SC14S66F
TC7S66FU	SC14S66F
TC7S66FU(TE85R)	SC14S66F
TC7SET00FU(TE85R)	TC7S00F
TC7SET02FU(TE85R)	TC4S01F
TC7SH00FU-TE85R	TC7S00F
TC7SH04F(TE85R)	TC7S04F
TC7SH04FU	TC7S04F
TC7SH04FU-TE85R	TC7S04F
TC7SH08F-TE85R	TC7S08F
TC7SH08FU-TE85R	TC7S08F
TC7SH32FU-TE85R	TC7S32F
TC7SHU04FU-TE85R	TC7S04F
TC7ST08FU(TE85R)	TC7S08F
TC7W02F	TC7W02F
TC7W02FU(TE12R)	TC7W02F
TC7W04FU	TC7W04F
TC7W04FU(TE12R)	TC7W04F
TC7W08FU	TC7W08F
TC7W08FU(TE12R)	TC7W08F
TC7W14FU(TE12R)	TC7W14FU
TC7W32FU	TC7W32FU
TC7W32FU(TE12R)	TC7W32FU
TC7W53FU(TE12R)	TC4W53FU
TC7W74F(TE12R)	TC7W74FU
TC7W74FU	TC7W74FU

IC	Page or ID No.
TC7W74FU(TE12R)	TC7W74FU
TC7WH157FU(TE12R)	11-6
TC7WH74FU(TR12R)	TC7W74FU
TD62381F	TD62381P
TK15420MTL	LT1253CS8
TL062CPW	RC4558
TL062CPWR	RC4558
TL062CPWR-12	RC4558
TL064CPW	XRA10324AF
TL064CPW-E05	XRA10324AF
TL082CPW-E05	RC4558
TL084CPW-E20	XRA10324AF
TL084CPWR	XRA10324AF
TLC2932IPW-E20	TLC2932IPW
TLC5733AIPM	TLC5733IPM
UPC29L05T	UPC78L15T
UPC4558G2	RC4558
UPD482445LGW-B10-E2	UPD482445LGW
UPD78013FYGC-R20-AB8	UPD78013FYGC-R27-AB8
UPD780204GF-065-3BA	11-8
UPD78P018FGC-AB8	UPD78P018FGC-AB8
UPD82014GD-502-LML	UPD82014GD-502-LML
UPD82094GD-001-LKL	UPD82014GD-502-LML
XC17S40XLSO20C	11-6
XC2S150-5PQ208C	XC2S150-5PQ208CES
XC2S150-5PQ208CES	XC2S150-5PQ208CES
XC2S50-5PQ208CES	XC2S150-5PQ208CES
XCS40-3PQ240C	XCS40-3PQ240C
XCS40XL-4PQ208C	XCS40XL-4PQ208C

OTHER	Page or ID No.
GP2S09-B	MA013-01
PR-11-C	MA020-01
PR-11-C-T	MA020-01
THS124TE85R	MA016-01
TLP814	MR010-09

Diode, IC

DIODE

—TOP VIEW—



MA740
MA740-TX

IC

TC7WH157FU(TE12R) (TOSHIBA)

2-CHANNEL MULTIPLEXER
—TOP VIEW—



INPUTS				OUTPUTS	
$\overline{EN}$	G1	A	B	Y	$\overline{Y}$
1	×	×	×	0	1
0	0	0	×	0	1
0	0	1	×	1	0
0	1	×	0	0	1
0	1	×	1	1	0

0 : LOW LEVEL
1 : HIGH LEVEL
× : DON'T CARE

XC17S40XLSO20C (XILINX)

SERIAL CONFIGURATION PROM
—TOP VIEW—

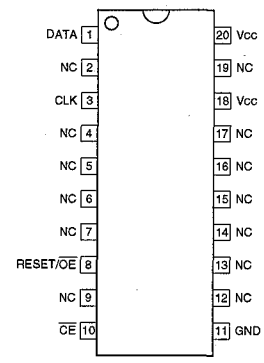

INPUTS
$\overline{CE}$: CHIP ENABLE
CLK : CLOCK
$\overline{OE}$: OUTPUT ENABLE
RESET : RESET

OUTPUT
DATA : DATA

OTHER
NC : NO CONNECTION

CXP912032-206Q (SONY)

16-BIT SINGLE CHIP MICROCOMPUTER
—TOP VIEW—

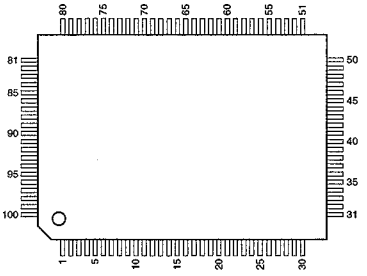

PIN NO.	I/O	SIGNAL	PIN NO.	I/O	SIGNAL	PIN NO.	I/O	SIGNAL	PIN NO.	I/O	SIGNAL
1	O	PB2/PPO010	26	I/O	PE2	51	I	PG6/RFG0	76	I	AN3
2	O	PB3/PPO011	27	I/O	PE3	52	I	PG7/RFG1	77	—	A.GND
3	O	PB4/PPO012	28	I/O	PE4	53	I	PH0/EXI0	78	—	AVREF
4	O	PB5/PPO013	29	I/O	PE5	54	I	PH1/EXI1	79	—	A.Vcc
5	O	PB6/PPO014	30	I/O	PE6	55	I	PH2/SYNC0/PMI	80	I/O	PJ0/AN4/KS8
6	O	PB7/PPO015	31	I/O	PE7	56	I	PH3/SYNC1	81	I/O	PJ1/AN5/KS9
7	I/O	PC0/PPO016	32	I	PF0/EC0/INT0	57	I	PH4/PMSK	82	I/O	PJ2/AN6/KS10
8	I/O	PC1/PPO017	33	I	PF1/EC2/INT1	58	I	PH5/DPG	83	I/O	PJ3/AN7/KS11
9	I/O	PC2/PPO018	34	I	PF2/CS1/NMI/CINT	59	I	PH6/DFG	84	I/O	PJ4/AN8/KS12
10	I/O	PC3/RTO0	35	I	PF3/SI1/INT2	60	I	PH7/CFG	85	I/O	PJ5/AN9/KS13
11	I/O	PC4/RTO1	36	O	PF4/SO1	61	I	CS0	86	I/O	PJ6/AN10/KS14
12	I/O	PC5/RTO2	37	I/O	PF5/SCK1	62	I	SI0	87	I/O	PJ7/AN11/KS15
13	I/O	PC6/RTO3	38	O	PF6/T1	63	O	SO0	88	—	NC
14	I/O	PC7/RTO4	39	O	PF7/T2	64	I/O	SCK0	89	—	Vcc
15	—	GND	40	I/O	RST	65	I/O	PI0/SI2	90	—	GND
16	I/O	PD0/KS0	41	—	GND	66	I/O	PI1/SO2	91	O	PA0/PPO000/PPO100
17	I/O	PD1/KS1	42	—	XTAL	67	I/O	PI2/SCK2	92	O	PA1/PPO001/PPO101
18	I/O	PD2/KS2	43	I	EXTAL	68	I/O	PI3/CS2/PO	93	O	PA2/PPO002/PPO102
19	I/O	PD3/KS3	44	—	Vcc	69	I	PI4/PCK/OSCI	94	O	PA3/PPO003/PPO103
20	I/O	PD4/KS4	45	O	PG0/PWM0	70	I	PI5/OSCO	95	O	PA4/PPO004/PPO104
21	I/O	PD5/KS5	46	O	PG1/PWM1	71	I/O	PI6/XOUT	96	O	PA5/PPO005/PPO105
22	I/O	PD6/KS6	47	O	PG2/PWM2	72	—	GND	97	O	PA6/PPO006/PPO106
23	I/O	PD7/KS7	48	O	PG3/PWM3	73	I	PI7/AN0	98	O	PA7/PPO007/PPO107
24	I/O	PE0	49	O	PG4/DA0	74	I	AN1	99	O	PB0/PPO008/PPO108
25	I/O	PE1	50	O	PG5/DA1	75	I	AN2	100	O	PB1/PPO009/PPO109

INPUTS

A.VREF	: REFERENCE VOLTAGE FOR A/D CONVERTER
AN0 - AN11	: ANALOG INPUT TO A/D CONVERTER
CFG	: CAPSTAN FG INPUT
CINT	: EXTERNAL CAPCHER FOR 16-BIT TIMER/COUNTER
CS0 - CS2	: SERIAL CHIP SELECT
DFG, DPG	: DRUM FG INPUT
EC0, EC2	: EXTERNAL EVENT TO TIMER/COUNTER
EXI0, EXI1	: EXTERNAL INPUT TO FRC CAPCHER UNIT
EXTAL	: CRYSTAL OSCILLATOR FOR SYSTEM CLOCK
INT0 - INT2	: INTERRUPT REQUEST
NMI	: NONMASKABLE INTERRUPT REQUEST
OSCI	: CRYSTAL OSCILLATOR FOR PRE-SCALER CLOCK OSCILLATION
PCK	: PRE-SCALER CLOCK
PF0 - PF3	: PORT F
PG6, PG7	: PORT G
PH0 - PH7	: PORT H
PI4 - PI7	: PORT I
PMI	: PULSE INPUT FOR PULSE PERIODICITY MEASUREMENT
PMSK	: MASK INPUT FOR PULSE PERIODICITY MEASUREMENT
RFG0, RFG1	: REEL FG
SI0 - SI2	: SERIAL DATA
SYNC0, SYNC1	: COMPOSITE SYNC

OUTPUTS

DA0, DA1	: DA GATE PULSE
OSCO	: CRYSTAL OSCILLATOR FOR PRE-SCALER CLOCK OSCILLATION
PA0 - PA7	: PORT A
PB0 - PB7	: PORT B
PC0 - PC7	: PORT C
PF4 - PF7	: PORT F
PG0 - PG5	: PORT G
PO	: PRE-SCALER
PPO000 - PPO018	: PROGRAMMABLE PATTERN GENERATOR
PPO100 - PPO109	: PROGRAMMABLE PATTERN GENERATOR
PTO0 - PTO4	: REALTIME PULLSE
PWM0 - PWM3	: 14-BIT PWM OUTPUT
SO0 - SO2	: SERIAL DATA
T1	: 8-BIT TIMER/COUNTER
T2	: 16-BIT CAPCHER TIMER/COUNTER
XOUT	: CLOCK FROM CLOCK GENERATOR OR PRE-SCALER
XTAL	: CRYSTAL OSCILLATOR

INPUTS/OUTPUTS

PD0 - PD7	: PORT D
PE0 - PE7	: PORT E
PI0 - PI3	: PORT I
PJ0 - PJ7	: PORT J
RST	: SYSTEM RESET
SCK0 - SCK2	: SERIAL CLOCK

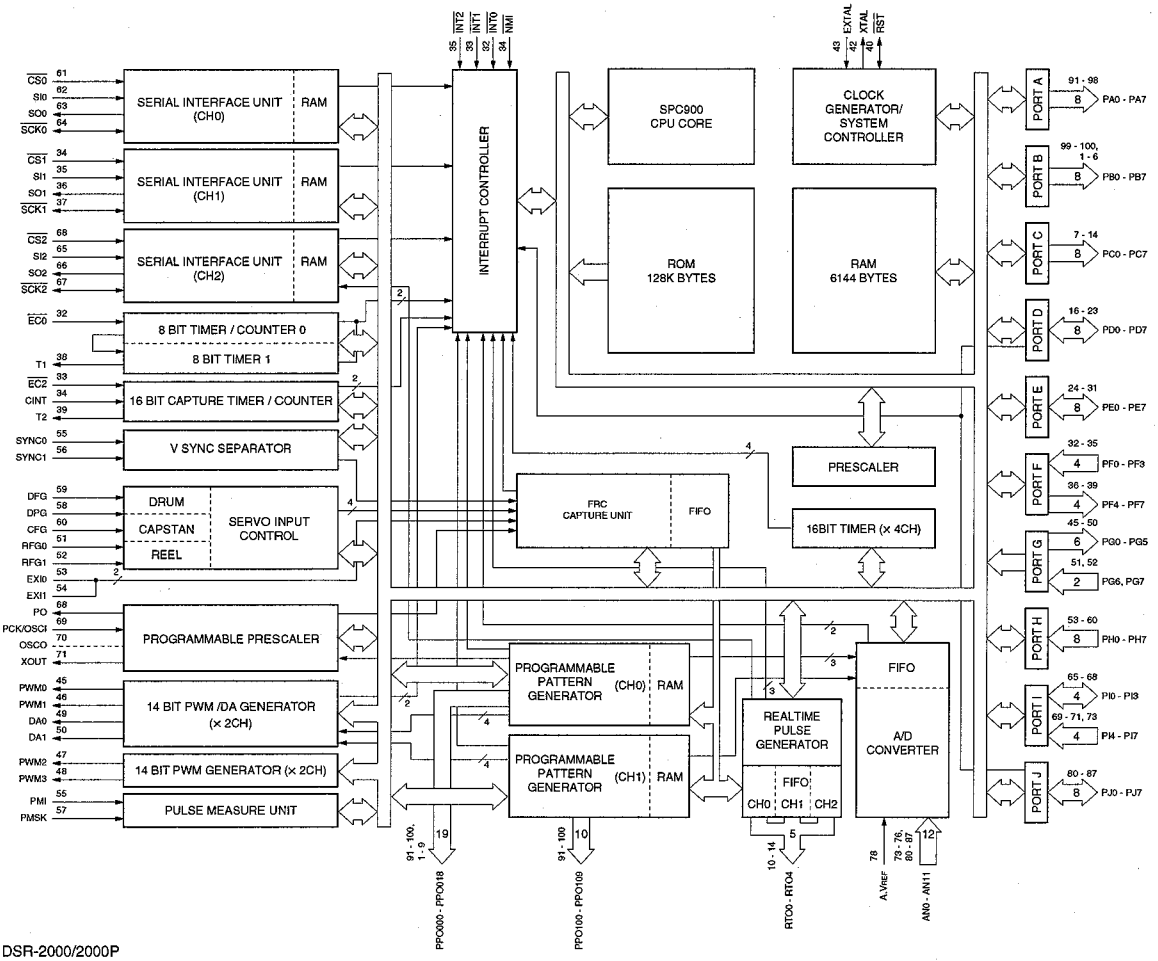

UPD780204GF-065-3BA (NEC)

8-BIT MICROCOMPUTER
—TOP VIEW—

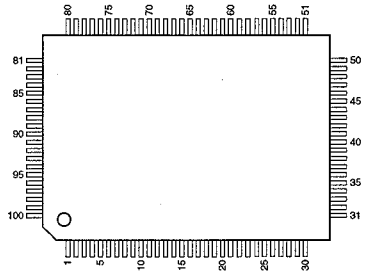

PIN NO.	I/O	SIGNAL	PIN NO.	I/O	SIGNAL	PIN NO.	I/O	SIGNAL	PIN NO.	I/O	SIGNAL
1	—	VCC	26	I/O	P17/ANI7	51	I/O	P123/FIP48	76	O	P92/FIP23
2	I/O	P37	27	I/O	P16/ANI6	52	I/O	P122/FIP47	77	O	P91/FIP22
3	I/O	P36/BUZ	28	I/O	P15/ANI5	53	I/O	P121/FIP46	78	O	P90/FIP21
4	I/O	P35/PCL	29	I/O	P14/ANI4	54	I/O	P120/FIP45	79	—	VLOAD
5	I/O	P34/TI2	30	I/O	P13/ANI3	55	I/O	P117/FIP44	80	O	P87/FIP20
6	I/O	P33/TI1	31	I/O	P12/ANI2	56	I/O	P116/FIP43	81	O	P86/FIP19
7	I/O	P32/TO2	32	I/O	P11/ANI1	57	I/O	P115/FIP42	82	O	P85/FIP18
8	I/O	P31/TO1	33	I/O	P10/ANI0	58	I/O	P114/FIP41	83	O	P84/FIP17
9	I/O	P30/TO0	34	—	A.VCC	59	I/O	P113/FIP40	84	O	P83/FIP16
10	I	RESET	35	I	AVREF	60	I/O	P112/FIP39	85	O	P82/FIP15
11	—	X2	36	I/O	P03/INTP3	61	I/O	P111/FIP38	86	O	P81/FIP14
12	I	X1	37	I/O	P02/INTP2	62	I/O	P110/FIP37	87	O	P80/FIP13
13	—	IC	38	I/O	P01/INTP1	63	I/O	P107/FIP36	88	O	FIP12
14	—	XT2	39	I	P00/INTP0/TI0	64	I/O	P106/FIP35	89	O	FIP11
15	I	P04/XT1	40	—	GND	65	I/O	P105/FIP34	90	O	FIP10
16	—	VCC	41	I/O	P74	66	I/O	P104/FIP33	91	O	FIP9
17	I/O	P27/SCK0	42	I/O	P73	67	I/O	P103/FIP32	92	O	FIP8
18	I/O	P26/SO0/SB1	43	I/O	P72	68	I/O	P102/FIP31	93	O	FIP7
19	I/O	P25/SI0/SB0	44	I/O	P71	69	I/O	P101/FIP30	94	O	FIP6
20	I/O	P24/BUSY	45	I/O	P70	70	I/O	P100/FIP29	95	O	FIP5
21	I/O	P23/STB	46	—	VCC	71	O	P97/FIP28	96	O	FIP4
22	I/O	P22/SCK1	47	I/O	P127/FIP52	72	O	P96/FIP27	97	O	FIP3
23	I/O	P21/SO1	48	I/O	P126/FIP51	73	O	P95/FIP26	98	O	FIP2
24	I/O	P20/SI1	49	I/O	P125/FIP50	74	O	P94/FIP25	99	O	FIP1
25	—	A.GND	50	I/O	P124/FIP49	75	O	P93/FIP24	100	O	FIP0

INPUTS

ANI0 - ANI7	: A/D CONVERTER ANALOG INPUT
AVREF	: A/D CONVERTER REFERENCE VOLTAGE
BUSY	: AUTOMATIC TRANSFER/RECEIVE BUSY INPUT
INTP0 - INTP3	: INTERNAL FROM PERIPHERALS 0 - 3
P00, P04	: PORT 0
RESET	: RESET
SI0, SI1	: SERIAL DATA
TI0 - TI2	: TIMER
X1	: CRYSTAL FOR MAIN SYSTEM CLOCK
XT1	: CRYSTAL FOR SUB SYSTEM CLOCK

OUTPUTS

BUZ	: BUZZER
FIP0 - FIP52	: FLUORESCENT INDICATOR PANEL CONTROLLER/DRIVER
P80 - P87	: PORT 8
P90 - P97	: PORT 9
PCL	: PROGRAMMABLE CLOCK
SO0, SO1	: SERIAL CLOCK
STB	: STROBE
TO0	: TIMER (16-BIT)
TO1, TO2	: TIMER (8-BIT)

INPUTS/OUTPUTS

P01 - P03	: PORT 0
P10 - P17	: PORT 1
P20 - P27	: PORT 2
P30 - P37	: PORT 3
P70 - P74	: PORT 7
P100 - P107	: PORT 10
P110 - P117	: PORT 11
P120 - P127	: PORT 12
SB0, SB1	: SERIAL BUS
SCK0, SCK1	: SERIAL CLOCK

OTHERS

IC	: INTERNAL CONNECTION
VLOAD	: NEGATIVE POWER SUPPLY
X2	: CRYSTAL FOR MAIN SYSTEM CLOCK
XT2	: CRYSTAL FOR SUB SYSTEM CLOCK

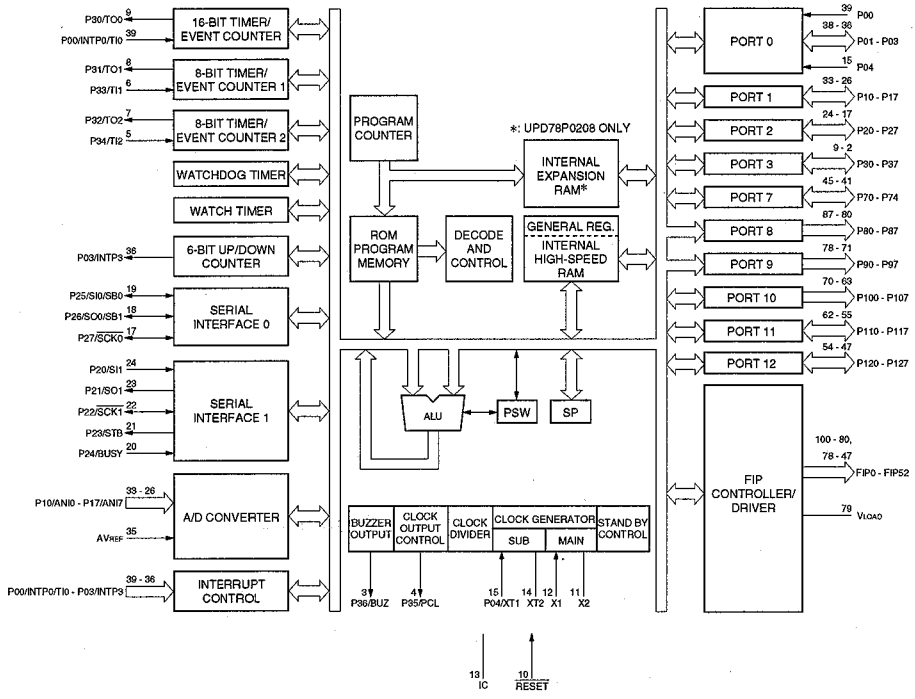

Section 12
Spare Parts and Optional Fixtures

12-1. Notes on Repair Parts

1. Safety Related Components Warning

WARNING

Components marked ⚠ are critical to safe operation. Therefore, specified parts should be used in the case of replacement.

2. Standardization of Parts

Some repair parts supplied by Sony differ from those used for the unit. These are because of parts commonality and improvement.
Parts list has the present standardized repair parts.

3. Stock of Parts

Parts marked with "o" at SP (Supply Code) column of the spare parts list may not be stocked. Therefore, the delivery date will be delayed.

4. Harness

Harnesses with no part number are not registered as spare parts.
In need of repair, get components shown in the list and repair using them.

5. Destination Representation

The part indicated "For J/UC/CE" in the spare parts list is used in the unit written below.

For J: The part is used in a unit for Japan.
For UC: The part is used in a unit for the U.S.A. and Canada.
For CE: The part is used in a unit for regions except the above countries.

12-1. 補修部品注意事項

1. 安全重要部品

⚠警告

⚠印のついた部品は安全性を維持するために重要な部品です。したがって，交換する時は必ず指定の部品を使ってください。

2. 部品の共通化

ソニーから供給する補修用部品は，セットに使われているものと異なることがあります。
これは部品の共通化，改良等によるものです。
部品表には現時点での共通化された補修用部品が記載されています。

3. 部品の在庫

部品表のSP (Supply code) 欄に"o" で示される部品は在庫していないことがあり，納期が長くなることがあります。

4. ハーネス

部品番号の記載されていないハーネスは，サービス部品として登録されていません。
これらは，リストに展開されているコンポーネント部品で補修してください。

5. 仕向区分の表記

部品表中，下記表示のある部品は，その仕向で使用している部品です。

For J: 日本向けモデルに使用
For UC: USAおよびカナダ向けモデルに使用
For CE: 上記以外向けモデルに使用

Panel Block and Switching Regurator

12-2. Exploded Views

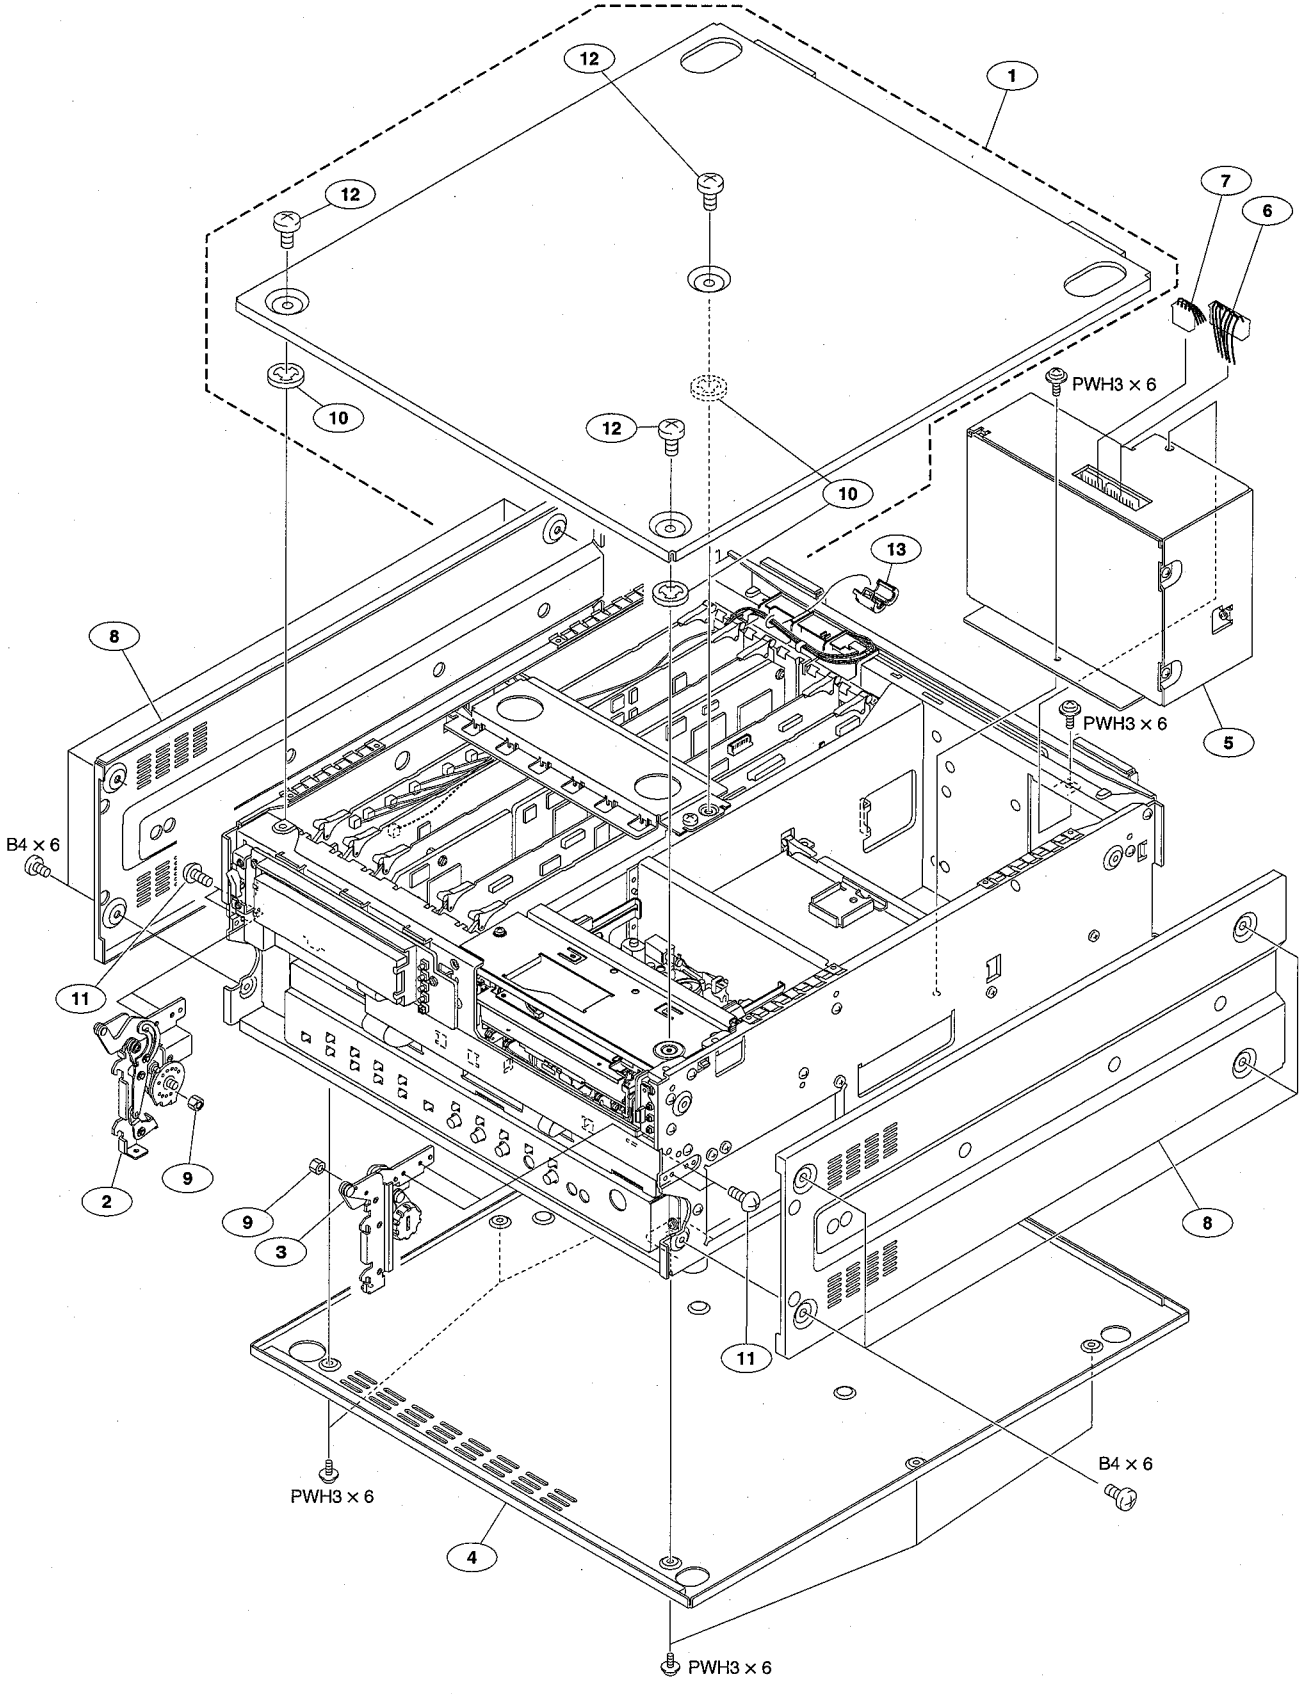

No.	Part No.	SP	Description
1	A-8279-211-C	o	PLATE ASSY,TOP
	A-8279-211-D	o	PLATE ASSY,TOP (for CE)
2	X-3605-650-2	o	HINGE(L) ASSY
3	X-3605-651-2	o	HINGE(R) ASSY
4	X-3605-760-2	o	PLATE ASSY,BOTTM
5	⚠ 1-468-436-12	s	REGULATOR, SWITCHING
6	1-960-087-11	o	HARNESS, SUB (DC POWER 1)
7	1-960-090-11	o	HARNESS, SUB (DC POWER 2)
8	3-623-439-01	o	PLATE,SIDE
9	3-680-316-11	o	NUT (M4), STOPPER
10	3-688-102-01	o	SPACER, M4
11	3-703-108-01	s	SCREW +BV3x6, S TIGHT
12	3-733-690-01	s	SCREW +B4x6
13	1-500-082-11	s	CLAMP, SLEEVE FERRITE (for PAL)

Overall Assembly and Boards

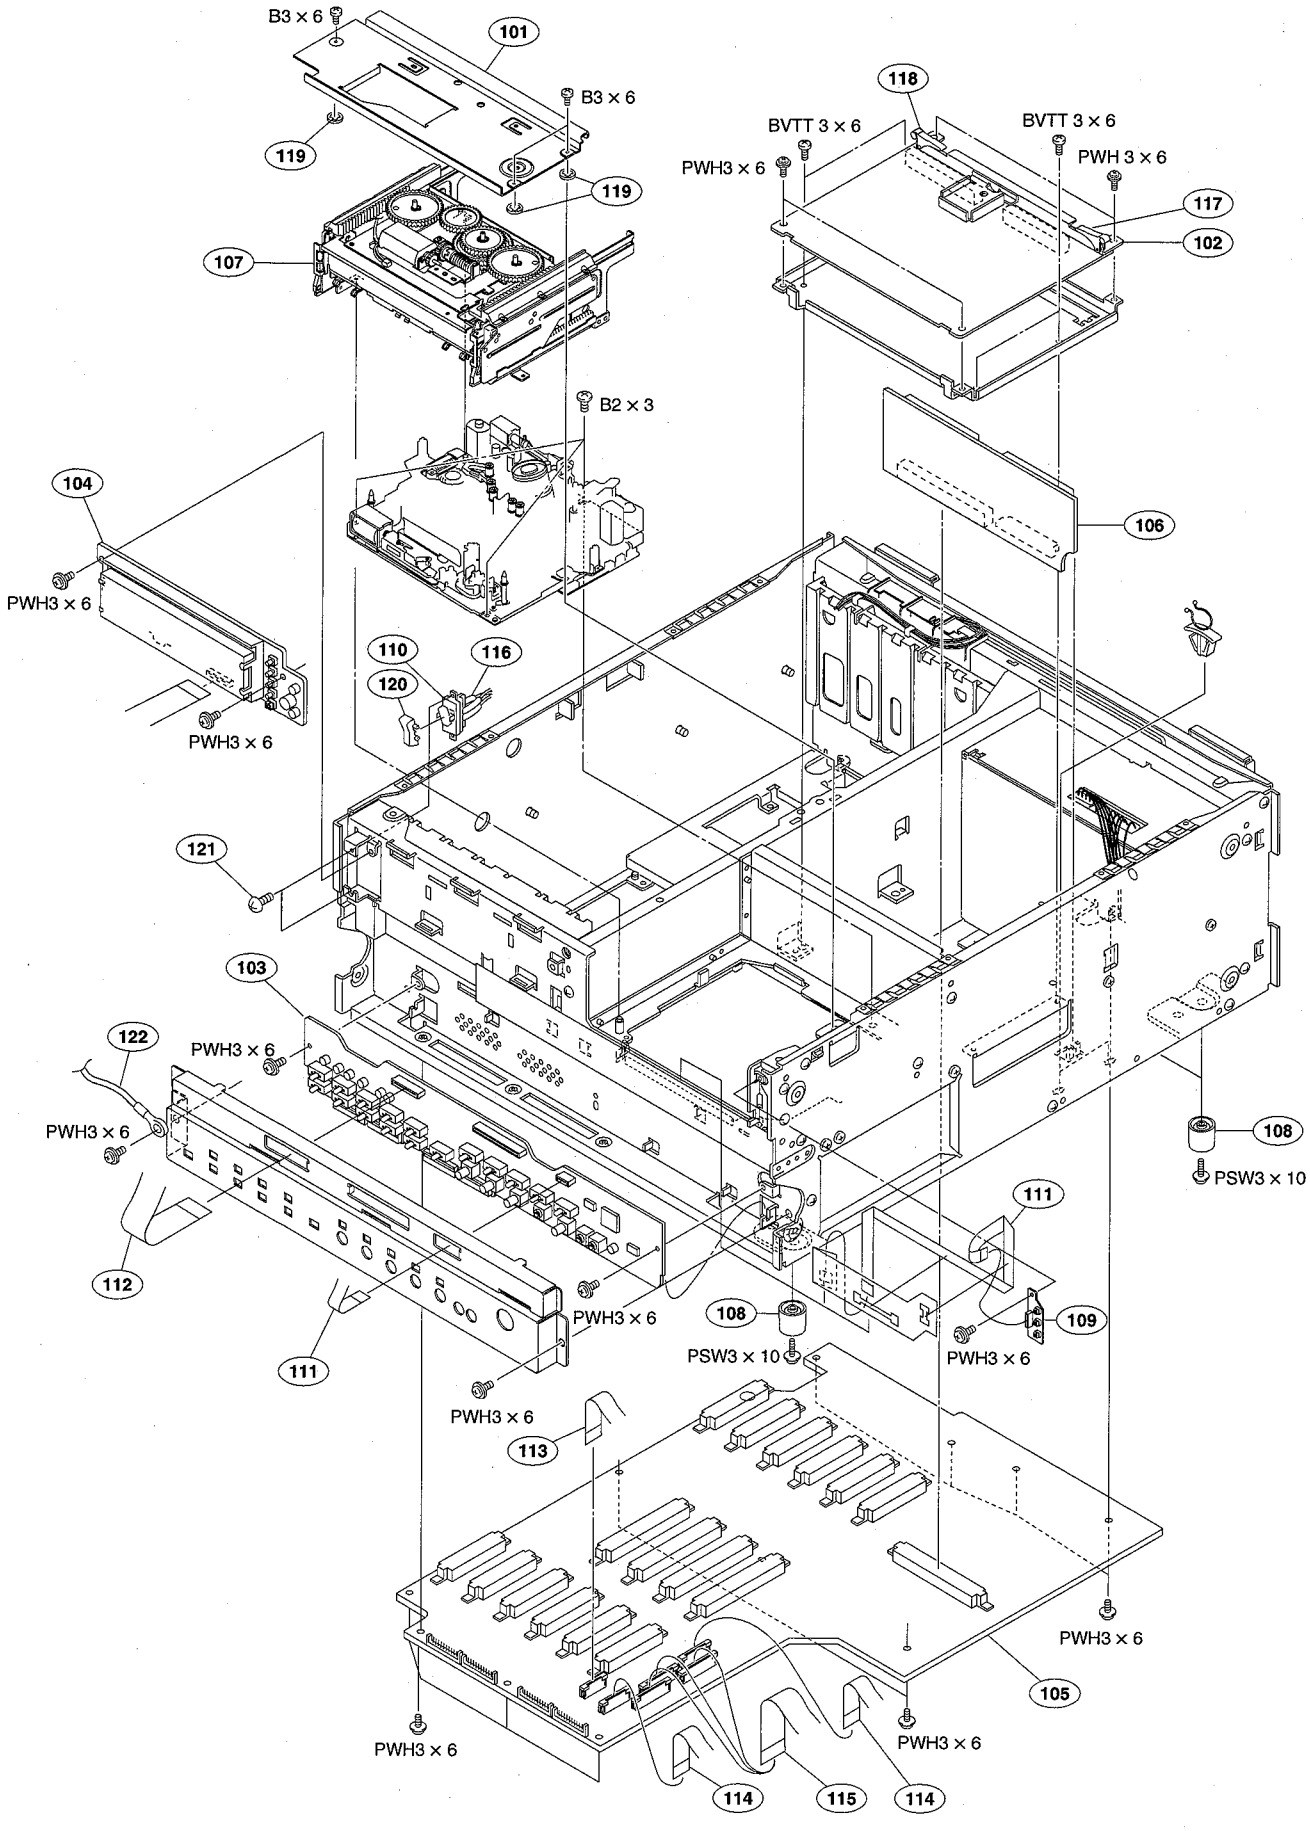

No.	Part No.	SP	Description
101	A-8279-212-B	o	RETAINER ASSY,CASSETTE COMPART
102	A-8323-475-A	s	MOUNTED CIRCUIT BOARD, RP-111
103	A-8323-477-A	o	MOUNTED CIRCUIT BOARD, SW-11(for J,UC)
	A-8323-478-A	o	MOUNTED CIRCUIT BOARD, SW-11P(for CE)
104	A-8323-493-A	o	MOUNTED CIRCUIT BOARD, DY-15
105	A-8323-494-A	o	MOUNTED CIRCUIT BOARD, MB-859
106	A-8323-516-A	o	MOUNTED CIRCUIT BOARD, EX-752
107	A-8324-829-A	s	CASSETTE COMPERTMENT ASSY
108	X-3678-708-3	s	FOOT,ASSY
109	1-675-557-11	o	PRINTED WIRING BOARD, SW-17
110	⚠ 1-762-953-11	s	SWITCH, POWER
111	1-791-706-11	o	WIRE, FLAT TYPE (7CORE)
112	1-791-707-11	o	WIRE, FLAT TYPE (20CORE)
113	1-791-708-11	o	WIRE, FLAT TYPE (18CORE)
114	1-791-709-11	o	WIRE, FLAT TYPE (22CORE)
115	1-791-710-11	o	WIRE, FLAT TYPE (30CORE)
116	1-960-086-11	o	HARNESS, SUB (AC SW)
117	3-179-084-01	s	LEVER(R),PRINTED C.BOARD
118	3-179-085-01	s	LEVER(L),PRINTED C.BOARD
119	3-669-596-01	s	WASHER,2.3
120	3-688-814-31	s	CAP, SWITCH
121	3-703-108-01	s	SCREW +BV3x6, S TIGHT
122	1-960-619-11	o	SUB HARNESS (KYGND) (for CE)
	(Serial No.400301 and higher)		

Card Rack Block

Serial No. 301311- : J
Serial No. 101241- : UC
Serial No. 401551- : CE

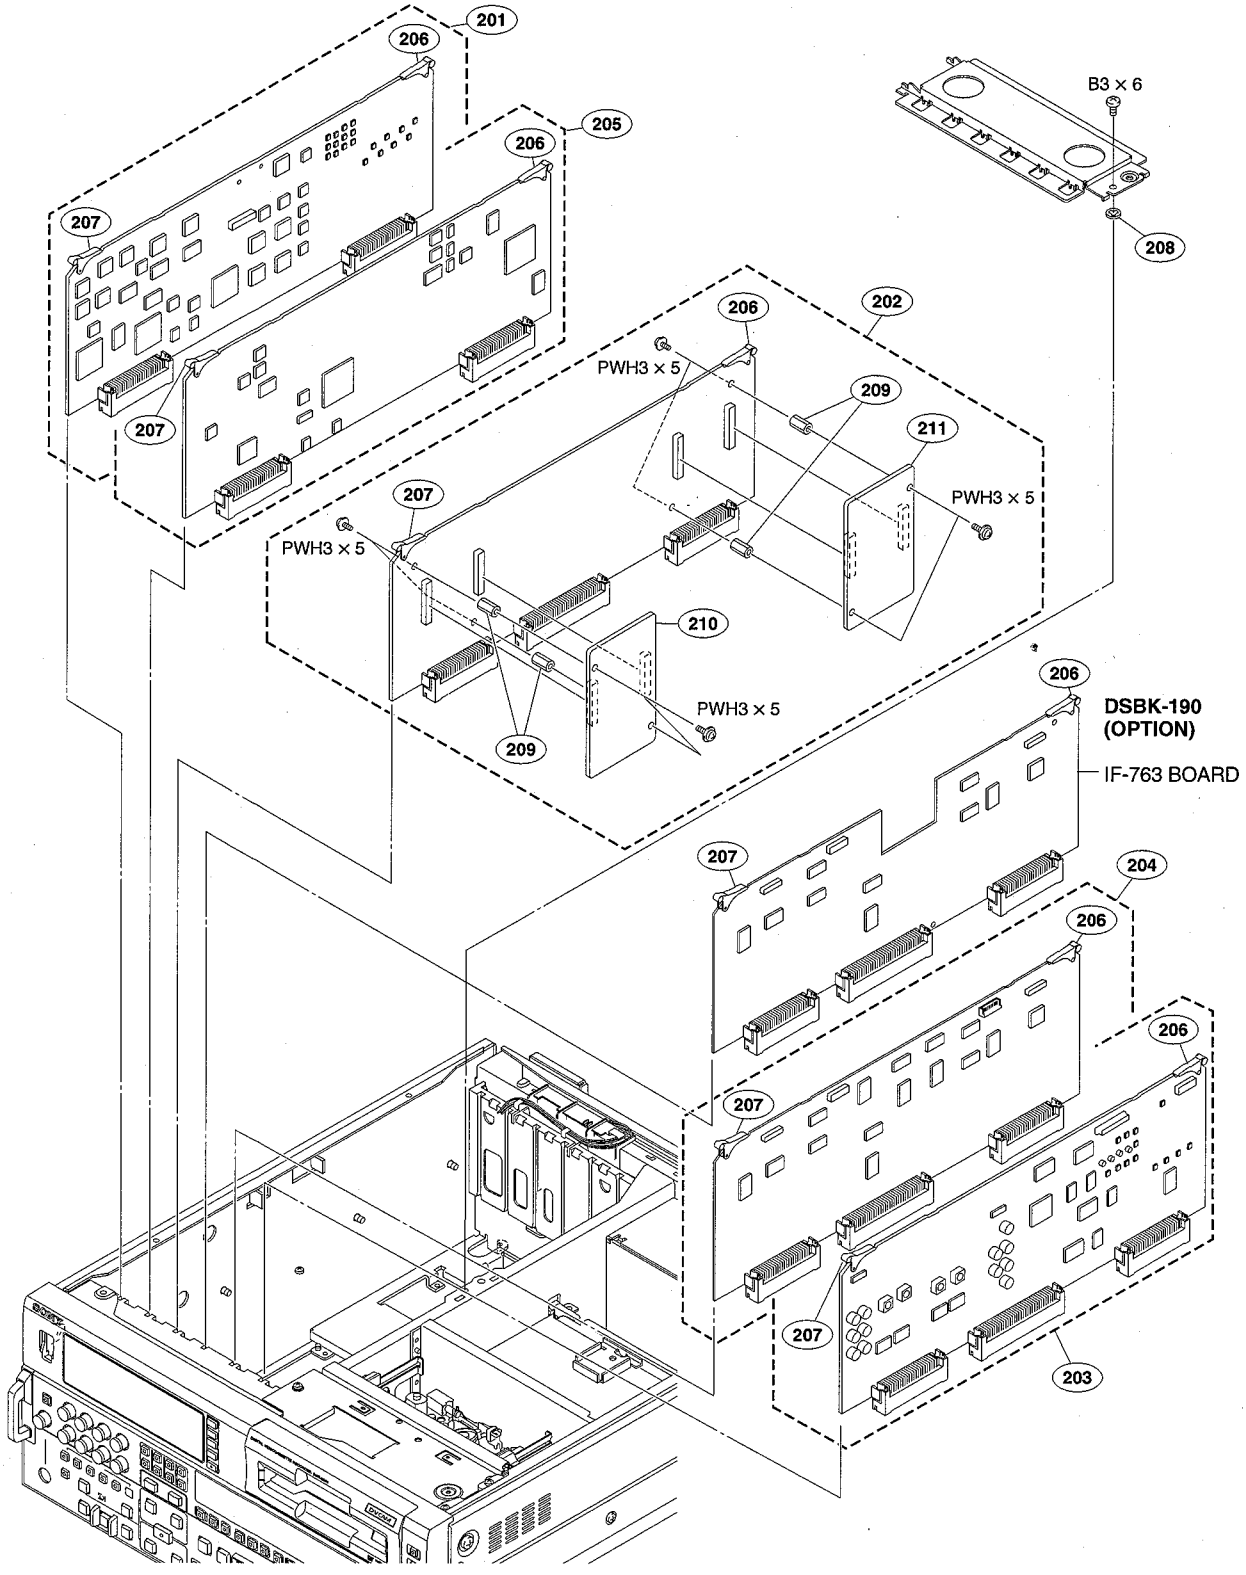

No.	Part No.	SP	Description
201	A-8323-473-B	s	MOUNTED CIRCUIT BOARD, APR-45
202	A-8323-474-B	s	MOUNTED CIRCUIT BOARD, DPR-136
203	A-8323-476-A	o	MOUNTED CIRCUIT BOARD, SV-212
204	A-8323-479-A	s	MOUNTED CIRCUIT BOARD, SY-278
205	A-8323-487-A	s	MOUNTED CIRCUIT BOARD, VPR-62(for J,UC)
	A-8323-488-A	s	MOUNTED CIRCUIT BOARD, VPR-62P(for CE)
206	3-179-084-01	s	LEVER(R),PRINTED C,BOARD
207	3-179-085-01	s	LEVER(L),PRINTED C.BOARD
208	3-669-596-01	s	WASHER,2.3
209	2-280-622-11	o	SUPPORT (M3), HEXAGON
210	A-8326-492-A	o	MOUNTED CIRCUIT BOARD, FU-78R
211	A-8326-493-A	o	MOUNTED CIRCUIT BOARD, FU-78P

Card Rack Block

Serial No. 300001-301310: J
Serial No. 100001-101240: UC
Serial No. 400001-401550: CE

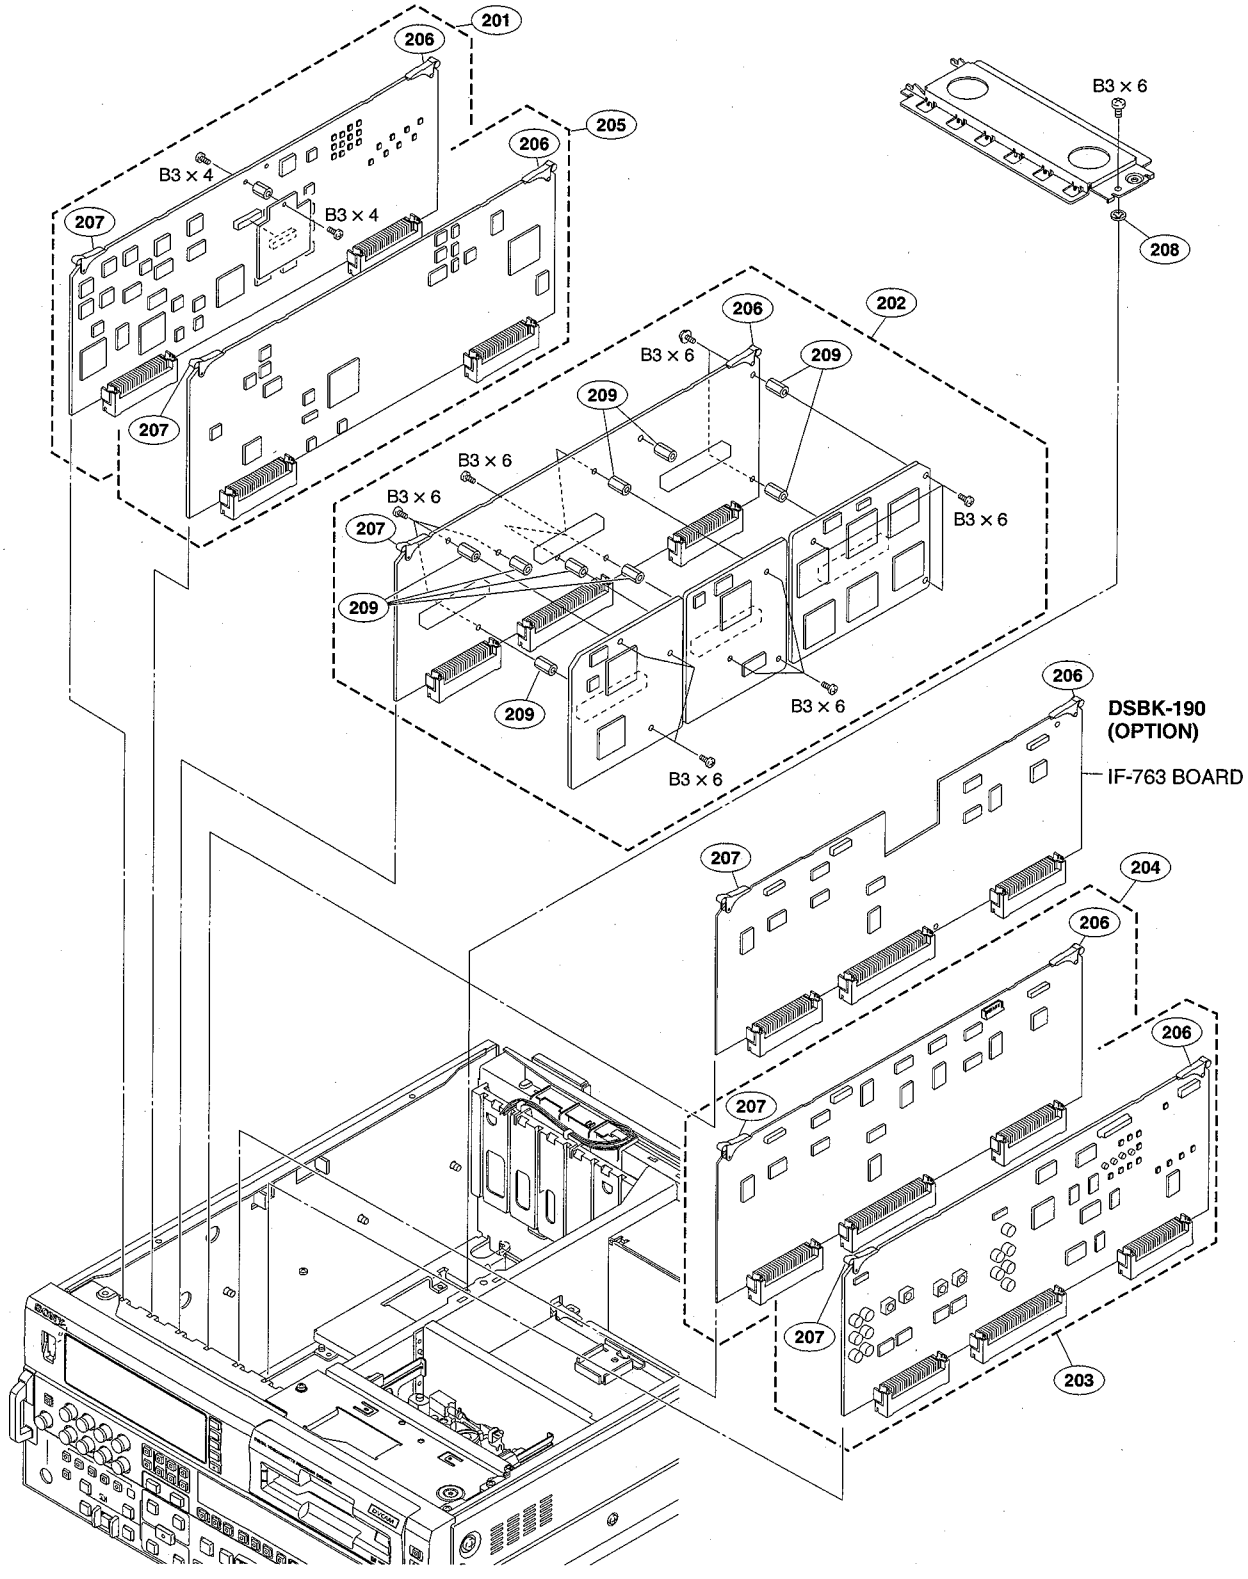

No.	Part No.	SP	Description
201	A-8323-473-A	s	MOUNTED CIRCUIT BOARD, APR-45
202	A-8323-474-A	s	MOUNTED CIRCUIT BOARD, DPR-136
203	A-8323-476-A	o	MOUNTED CIRCUIT BOARD, SV-212
204	A-8323-479-A	s	MOUNTED CIRCUIT BOARD, SY-278
205	A-8323-487-A	s	MOUNTED CIRCUIT BOARD, VPR-62(for J,UC)
	A-8323-488-A	s	MOUNTED CIRCUIT BOARD, VPR-62P(for CE)
206	3-179-084-01	s	LEVER(R),PRINTED C,BOARD
207	3-179-085-01	s	LEVER(L),PRINTED C.BOARD
208	3-669-596-01	s	WASHER,2.3
209	4-360-293-01	o	SPACER,BOSS

Front Panel Assembly

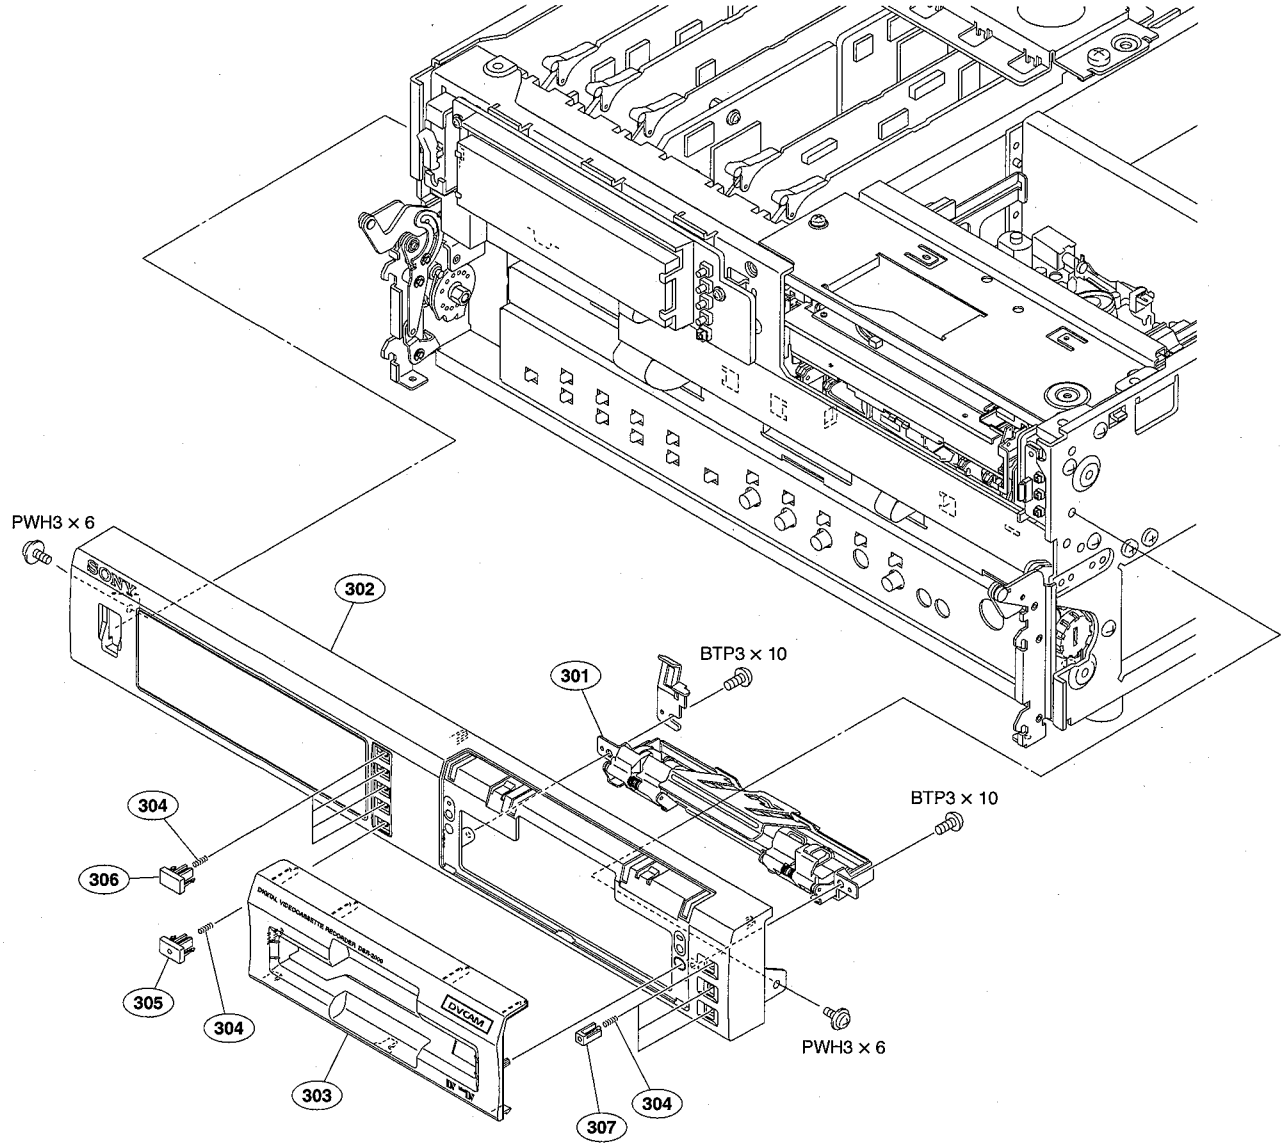

No.	Part No.	SP	Description
301	A-8323-717-E	s	GUIDE ASSY, CASSETTE
302	X-3605-654-6	s	PANEL SUB ASSY,FRONT
303	X-3605-655-4	s	COVER ASSY,FRONT(for J,UC)
	X-3605-658-4	s	COVER P ASSY,FRONT(for CE)
304	3-611-769-01	s	SPRING,COMPRESSION
305	3-623-400-02	s	KEYTOP(5X9),LIFT
306	3-623-402-02	s	TOP 5X9,KEY
307	3-623-404-02	s	TOP 6X6,KEY

Control Panel Assembly

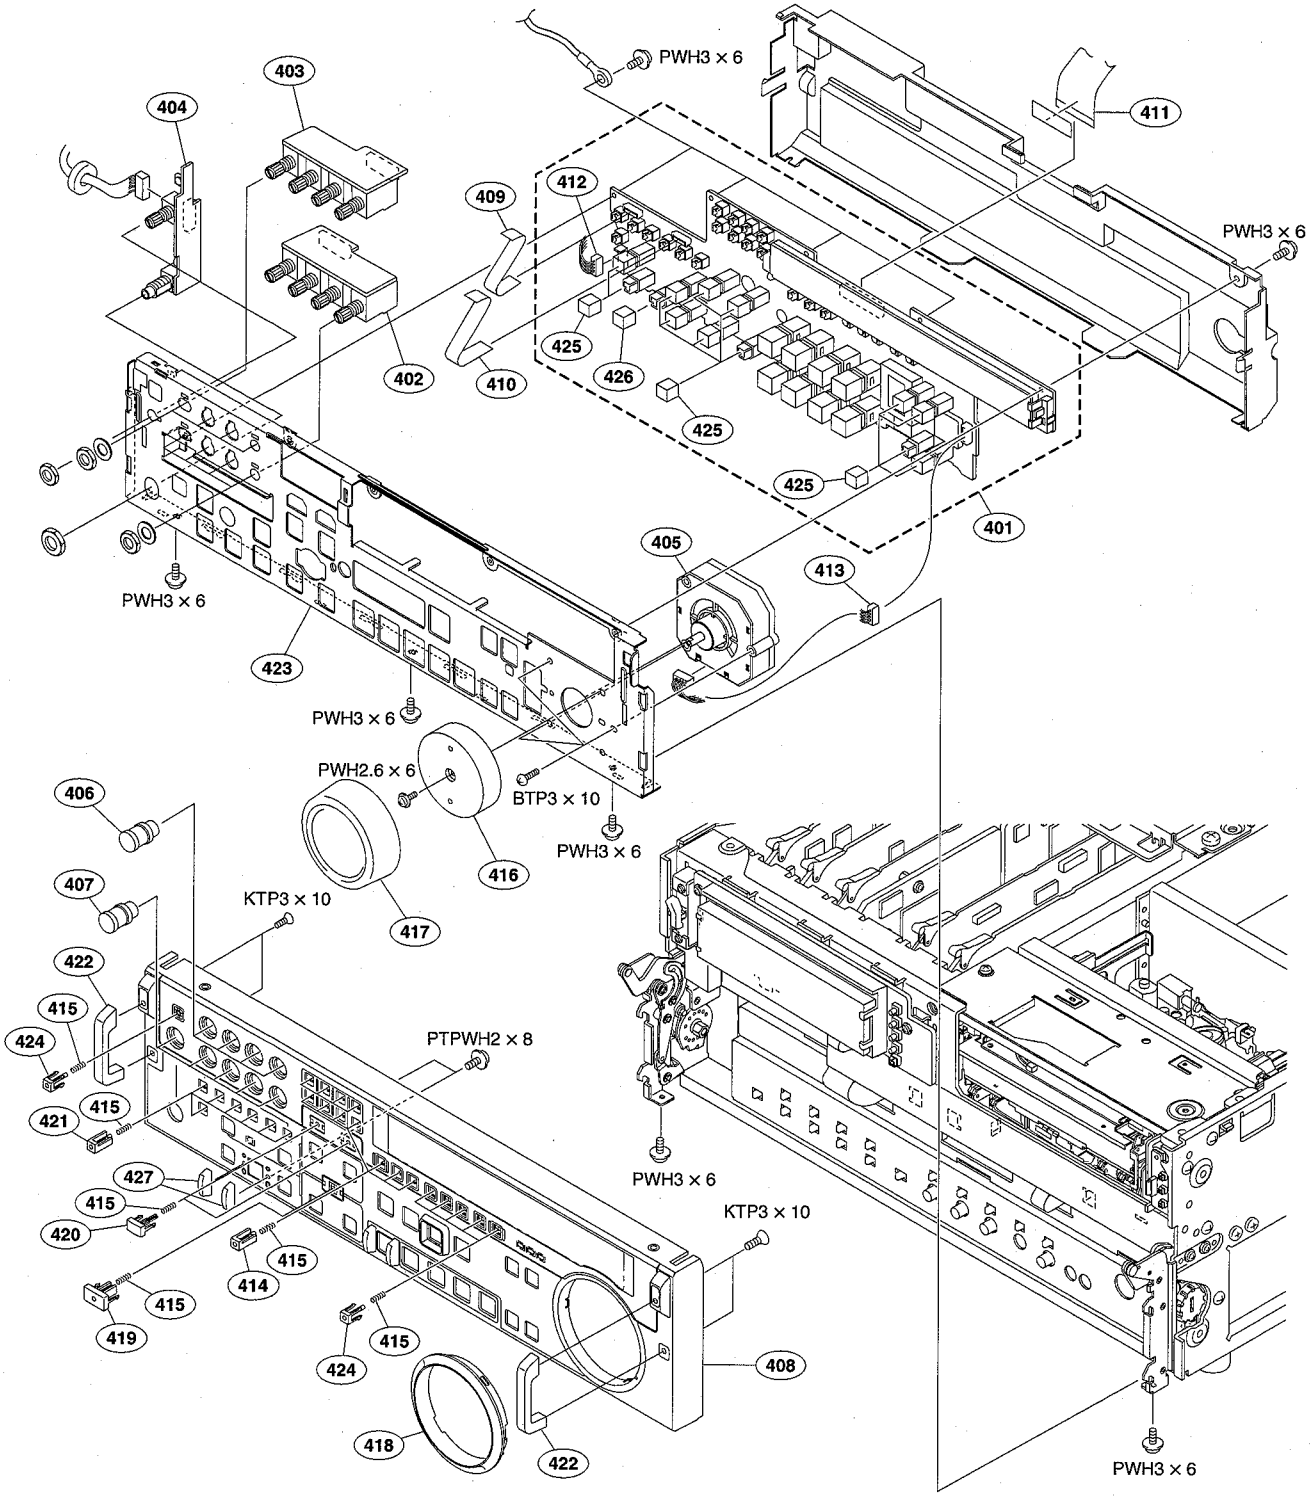

No.	Part No.	SP	Description
401	A-8323-492-A	o	MOUNTED CIRCUIT BOARD, KY-452
402	A-8323-511-A	o	MOUNTED CIRCUIT BOARD, VR-259
403	A-8323-512-A	o	MOUNTED CIRCUIT BOARD, VR-260
404	A-8323-513-A	o	MOUNTED CIRCUIT BOARD, HP-99
405	A-8323-665-C	s	DIAL ASSY, SEARCH
406	X-3167-824-1	o	KNOB ASSY (R), VOL
407	X-3167-825-1	o	KNOB ASSY (P), VOL
408	X-3605-652-8	s	PANEL SUB ASSY,CONTROL
409	1-791-704-11	o	WIRE, FLAT TYPE (6CORE)
410	1-791-705-11	o	WIRE, FLAT TYPE (6CORE)
411	1-791-711-11	o	WIRE, FLAT TYPE (34CORE)
412	1-960-088-11	o	HARNESS, SUB (KYHP)
413	1-960-089-11	o	HARNESS, SUB (KYJOG)
414	3-180-822-05	s	KEY TOP 6X6, USE
415	3-611-769-01	s	SPRING,COMPRESSION
416	3-623-384-02	s	KNOB,DIAL
417	3-623-385-03	s	COVER,DIAL
418	3-623-397-02	o	ESCUTCHEON,DIAL
419	3-623-398-02	s	KEY TOP(9X16)
420	3-623-403-02	s	TOP 7X11,KEY
421	3-623-404-02	s	TOP 6X6,KEY
422	3-623-407-01	s	HANDLE
423	3-623-421-02	o	FRAME,CONTROL
424	3-696-774-02	s	TOP KEY 6X6
425	3-708-877-01	s	CAP
426	3-708-933-01	s	CAP
427	3-717-380-21	o	GUARD, REC

Cassette Compartment Assembly

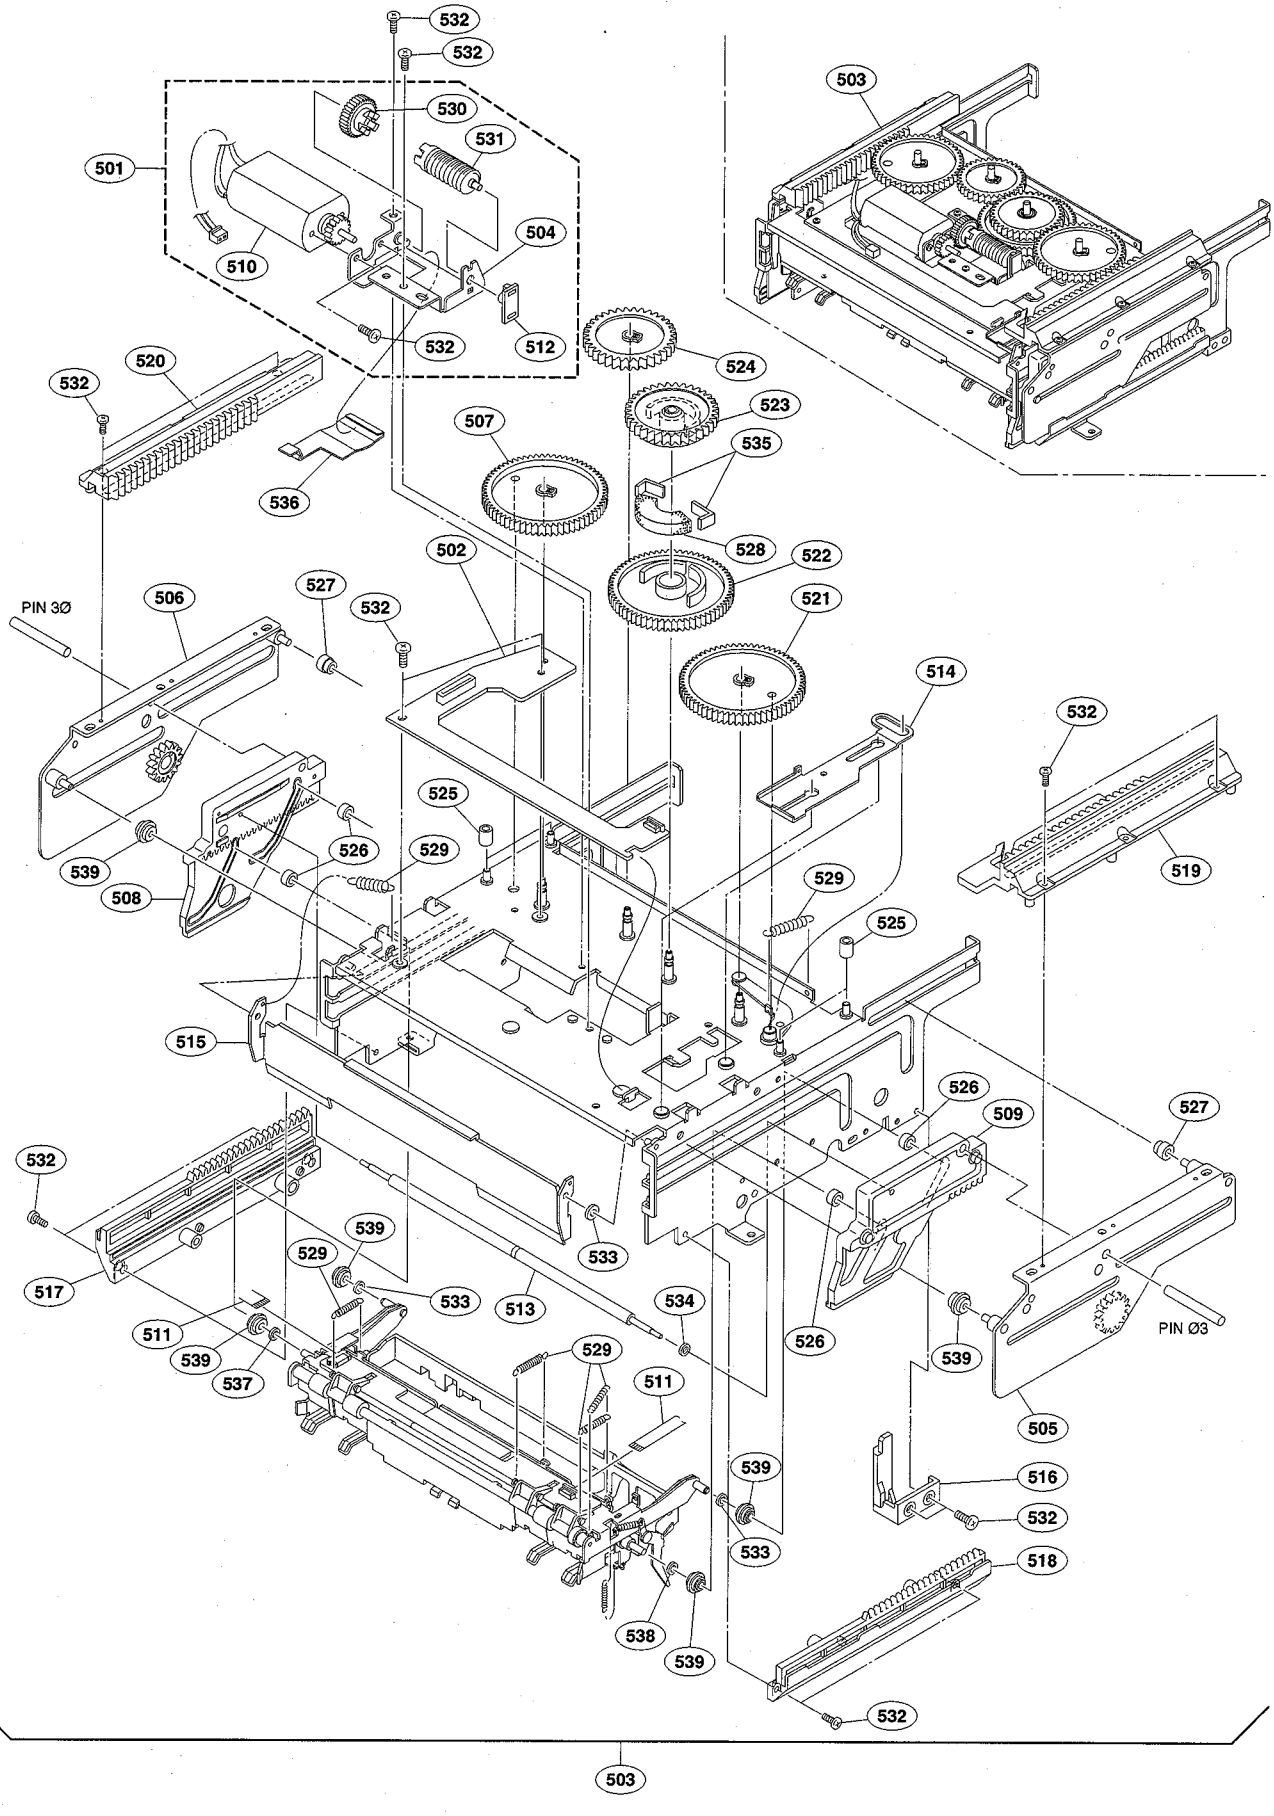

No.	Part No.	SP	Description
501	A-8279-216-C	o	GEAR ASSY,MOTOR
502	A-8323-497-A	o	MOUNTED CIRCUIT BOARD, CC-83
503	A-8324-829-A	s	CASSETTE COMPARTMENT ASSY
504	X-3605-643-2	o	BRACKET ASSY,MOTOR
505	X-3605-645-1	o	PLATE AR ASSY,RACK
506	X-3605-646-1	o	PLATE AL ASSY,RACK
507	X-3605-647-1	o	GEAR(L) ASSY,DRIVING
508	X-3605-648-2	o	RACK BML ASSY
509	X-3605-649-2	o	RACK BMR ASSY
510	X-3605-661-2	s	MOTOR ASSY
511	1-718-102-11	o	FLEXIBLE PRINTED WIRING BOARD, ZZ-1137
512	3-623-426-01	o	BEARING
513	3-623-576-03	o	SHAFT,LIMIT
514	3-623-577-01	o	SLIDER,TS
515	3-623-578-03	o	LID,TS
516	3-623-579-01	o	SLIDER,LID
517	3-623-580-02	o	RACK CL
518	3-623-581-02	o	RACK CR
519	3-623-582-02	o	RACK AR
520	3-623-583-02	o	RACK AL
521	3-623-584-02	o	GEAR(R),DRIVING
522	3-623-585-03	o	WHEEL,WORM
523	3-623-586-02	o	GEAR,LIMITER
524	3-623-587-01	o	GEAR,RELAY
525	3-623-588-01	o	ROLLER,FT
526	3-623-589-01	o	ROLLER ,ST
527	3-623-590-01	o	ROLLER,AP
528	3-623-591-02	o	RUBBER,LIMITER
529	3-623-592-01	s	SPRING,EXTENSION
530	3-623-659-01	o	GEAR B
531	3-623-660-01	o	GEAR,WORM
532	3-624-231-01	s	SCREW M2,SPECIAL
533	3-701-437-21	s	WASHER,PLASTIC (2.1X0.5)
534	3-626-802-01	o	RING (5.5X2.7X1.4),0
535	3-626-803-01	o	PLATE, LIMITER
536	3-625-807-01	o	COVER, G
537	3-701-437-11	s	WASHER
538	3-701-437-21	s	WASHER
539	3-604-535-11	o	ROLLER, FLANGE, C

Gears and SE-521 Board

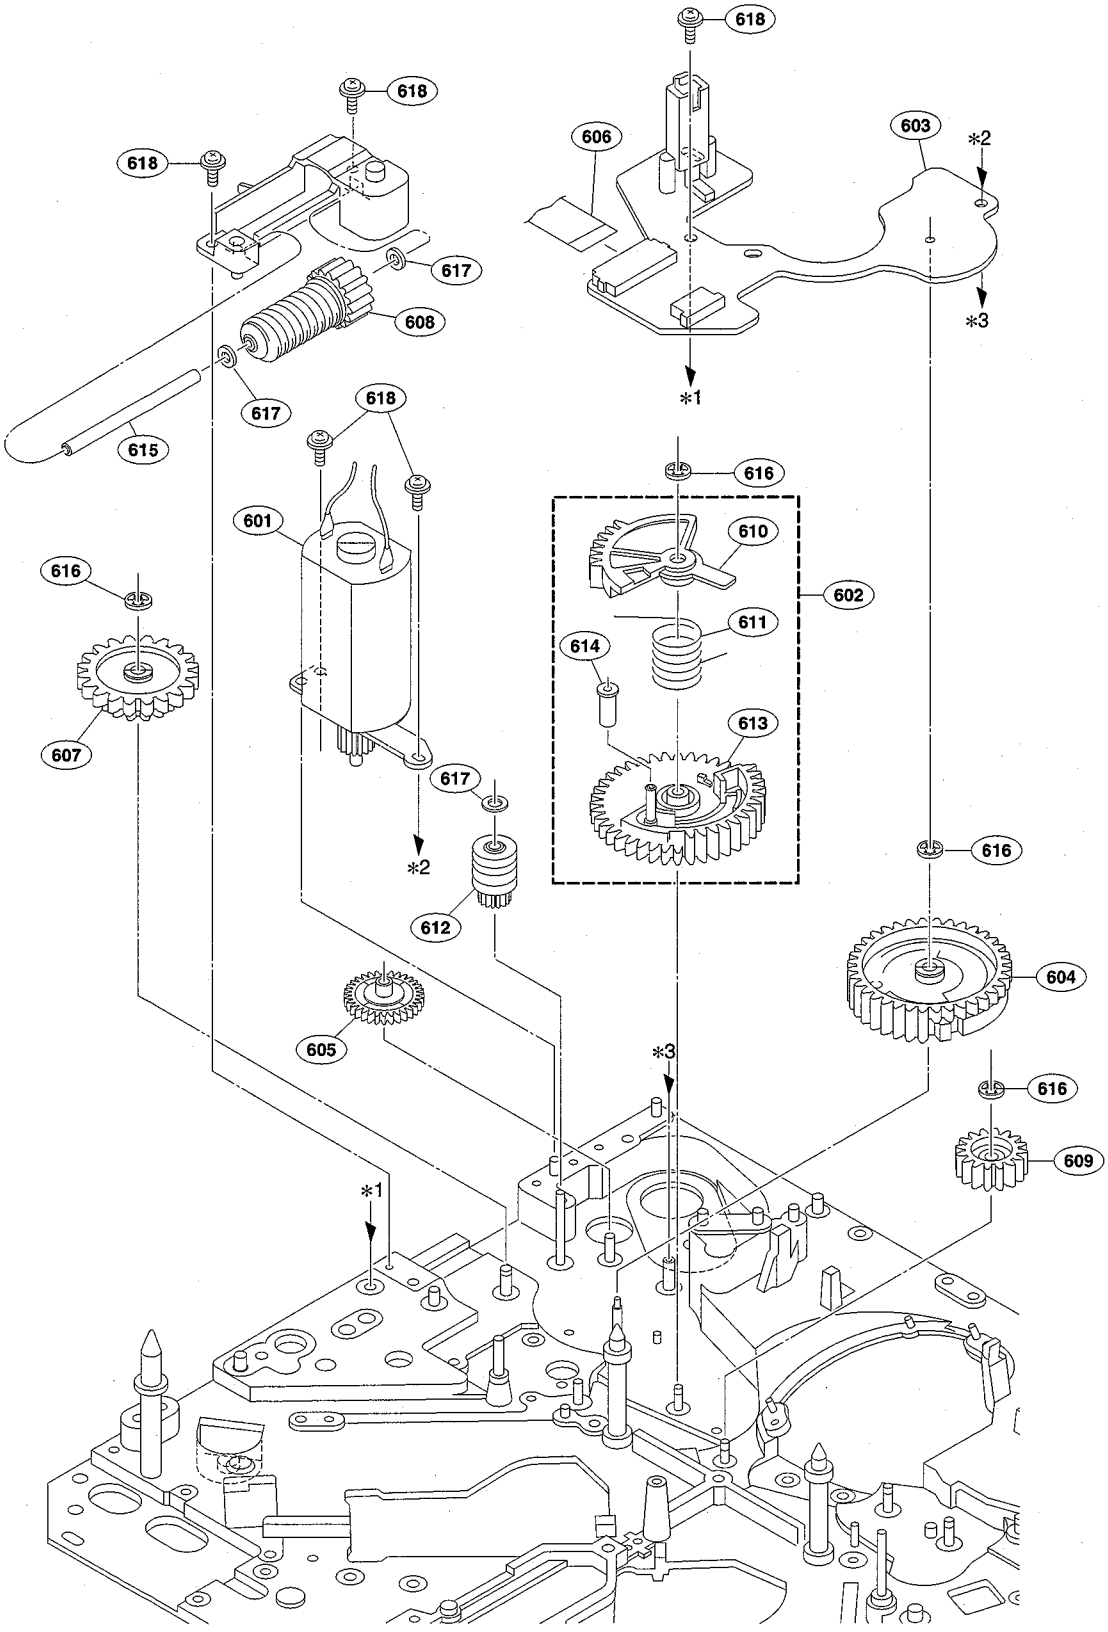

No.	Part No.	SP	Description
601	A-8279-202-B	s	MOTOR ASSY,LD
602	A-8279-205-B	o	GEAR ASSY,NO.3
603	A-8323-518-A	s	MOUNTED CIRCUIT BOARD, SE-521
604	X-3604-970-5	s	GEAR ASSY,MODE
605	X-3605-638-1	o	GEAR ASSY,FG
606	1-791-714-11	o	CABLE, FLEXIBLE FLAT (15CORE)
607	3-614-479-02	o	NO.1 GEAR
608	3-614-481-02	o	WORM(2)
609	3-614-485-01	o	NO.4 GEAR
610	3-614-570-03	o	GEAR,LIMITTER,TR
611	3-614-663-02	s	SPRING,TR LIMITTER
612	3-623-451-01	o	GEAR,WORM,LD
613	3-623-534-02	o	NO.3 GEAR
614	3-623-535-01	o	SLEEVE
615	3-623-702-01	o	SHAFT,WORM
616	3-669-465-01	s	WASHER(1.5), STOPPER
617	3-701-437-01	s	WASHER PLASTIC (2.1X0.14)
618	3-729-013-41	s	SCREW,WASHERHEAD(+P)

Tension Regurator and Head Cleaner Assembly

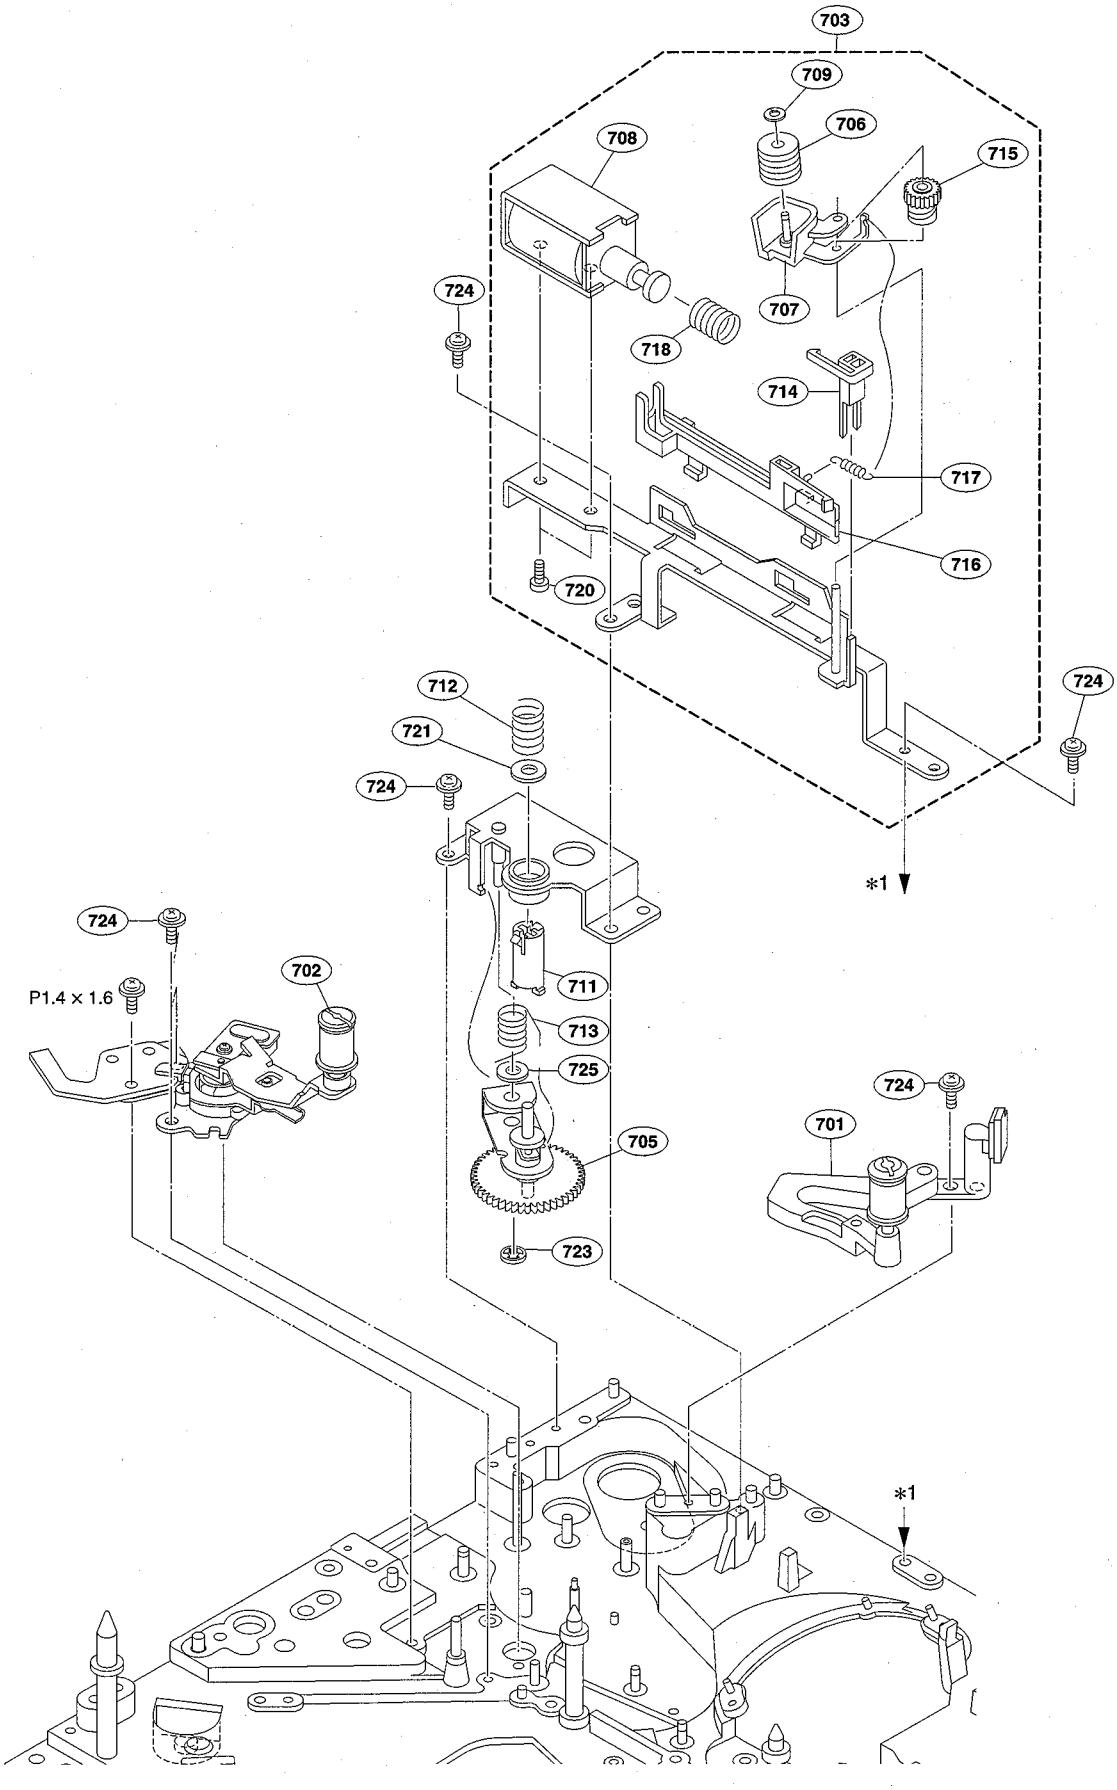

No.	Part No.	SP	Description
701	A-8279-399-C	o	ARM ASSY,TG1
702	A-8323-655-F	s	REGULATOR ASSY, TENSION
703	A-8323-782-B	o	CLEANER ASSY, HEAD
705	X-3605-620-2	o	GEAR ASSY,ME
706	X-3605-665-1	s	ROLLER ASSY,HC
707	X-3605-898-1	s	ARM ASSY,ROLLER
708	1-454-942-31	s	SOLENOID, PLUNGER
709	3-349-859-31	s	WASHER
711	3-623-497-01	o	COVER,ME
712	3-623-498-01	s	SPRING(ME),COMPRESSION
713	3-623-499-02	s	SPRING,ME
714	3-623-771-01	o	HOLDER,CAM,HC
715	3-623-774-01	o	ROLLER,CAM,HC
716	3-623-775-01	o	SLIDER,HC
717	3-623-780-01	o	SPRING,PRESS,HC
718	3-623-781-02	o	SPRING,RELEASE,HC
720	3-669-607-01	s	SCREW, +PSW (SMALL ROUND)2.6
721	3-701-443-11	s	WASHER, PLASTIC (5.2X0.25)
723	3-726-829-01	s	WASHER,STOPPER
724	3-729-013-41	s	SCREW,WASHERHEAD(+P)
725	3-701-439-01	s	WASHER

Drum and Rail Assembly

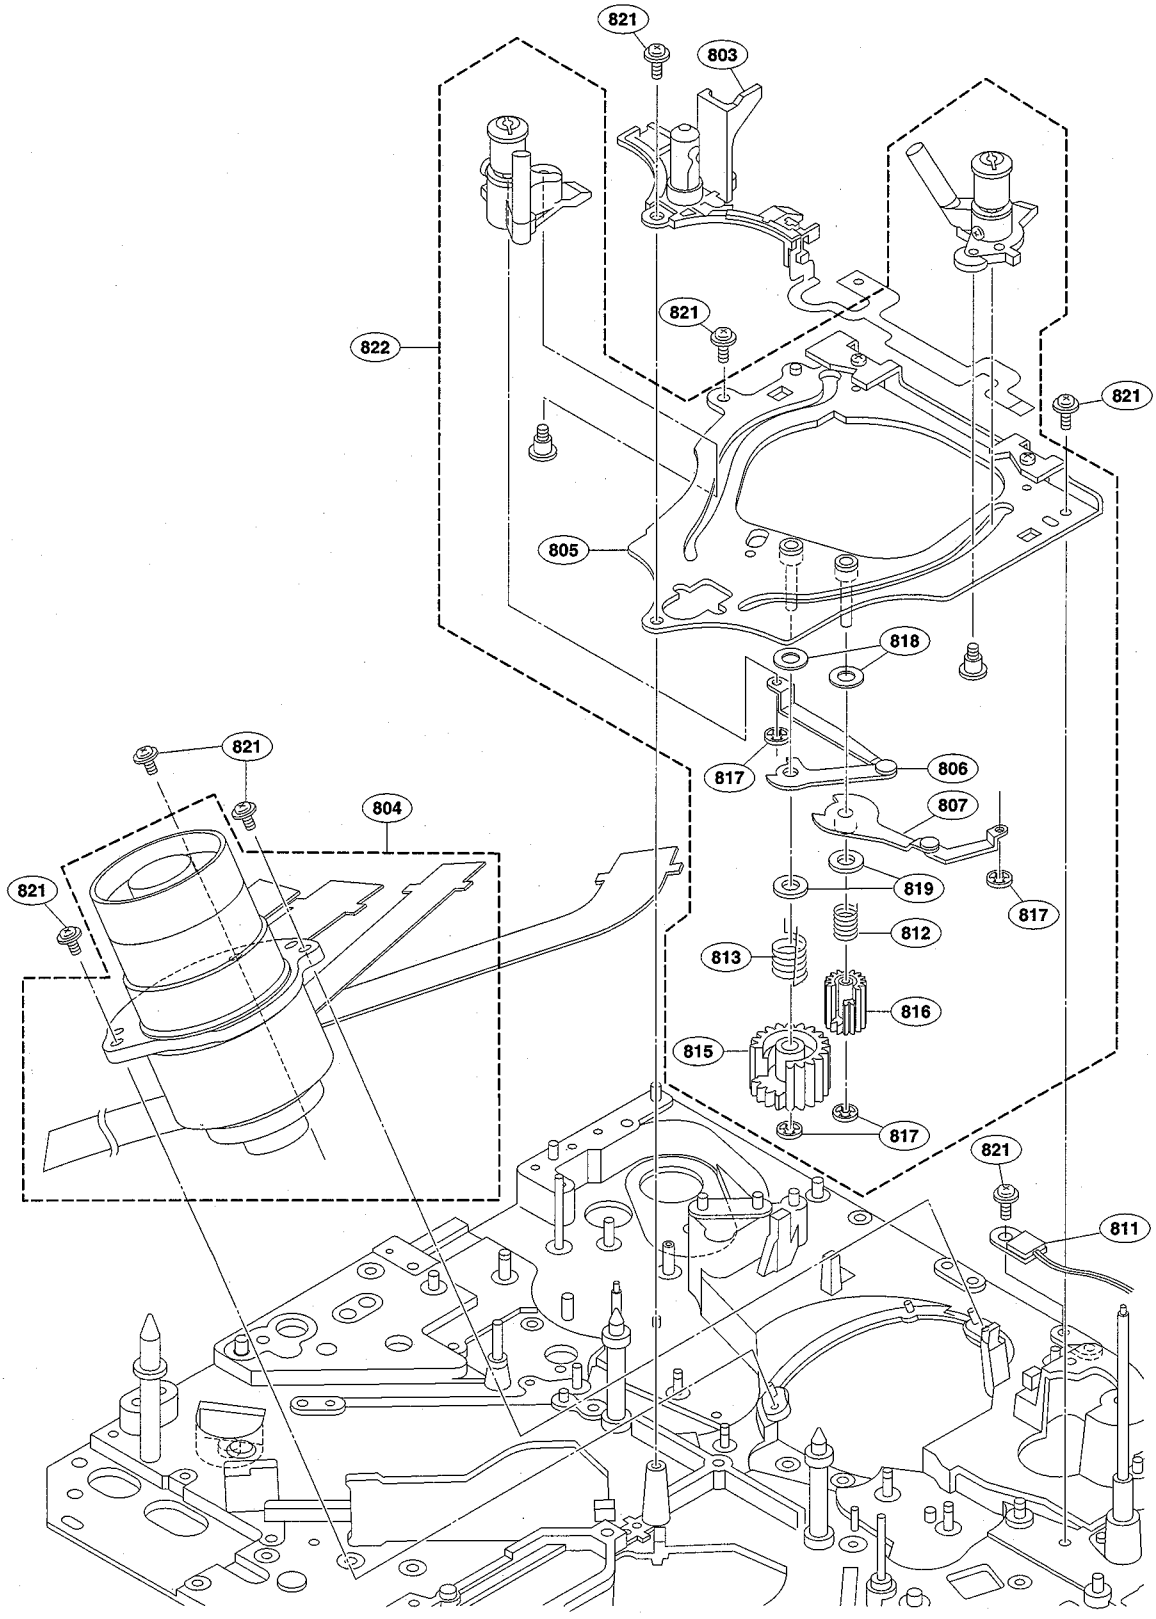

No.	Part No.	SP	Description
803	A-8323-662-A	s	HOLDER ASSY, LED
804	A-8323-775-A	s	DRUM ASSY, DEH-16A-R
805	X-3604-945-3	o	SUB ASSY,RAIL
806	X-3604-946-3	o	LINK ASSY(L),THREADING
807	X-3604-947-2	o	LINK(R)ASSY,THREADING
811	1-803-490-11	s	SENSOR, DEW CONDENSATION
812	3-614-593-01	s	SPRING(R),LD
813	3-614-594-01	s	SPRING(L),LD
814	3-614-602-01	o	SHAFT,RAIL
815	3-614-609-01	o	GEAR(L),THREADING
816	3-614-610-02	o	GEAR(R),THREADING
817	3-669-465-01	s	WASHER(1.5), STOPPER
818	3-701-438-11	s	WASHER PLASTIC (2.6X0.25)
819	3-701-441-21	s	WASHER PLASTIC (4.1X0.5)
821	3-729-013-41	s	SCREW,WASHERHEAD(+P)
822	A-8320-101-C	o	RAIL ASSY

Pinch Solenoid and Pinch Limitter Assembly

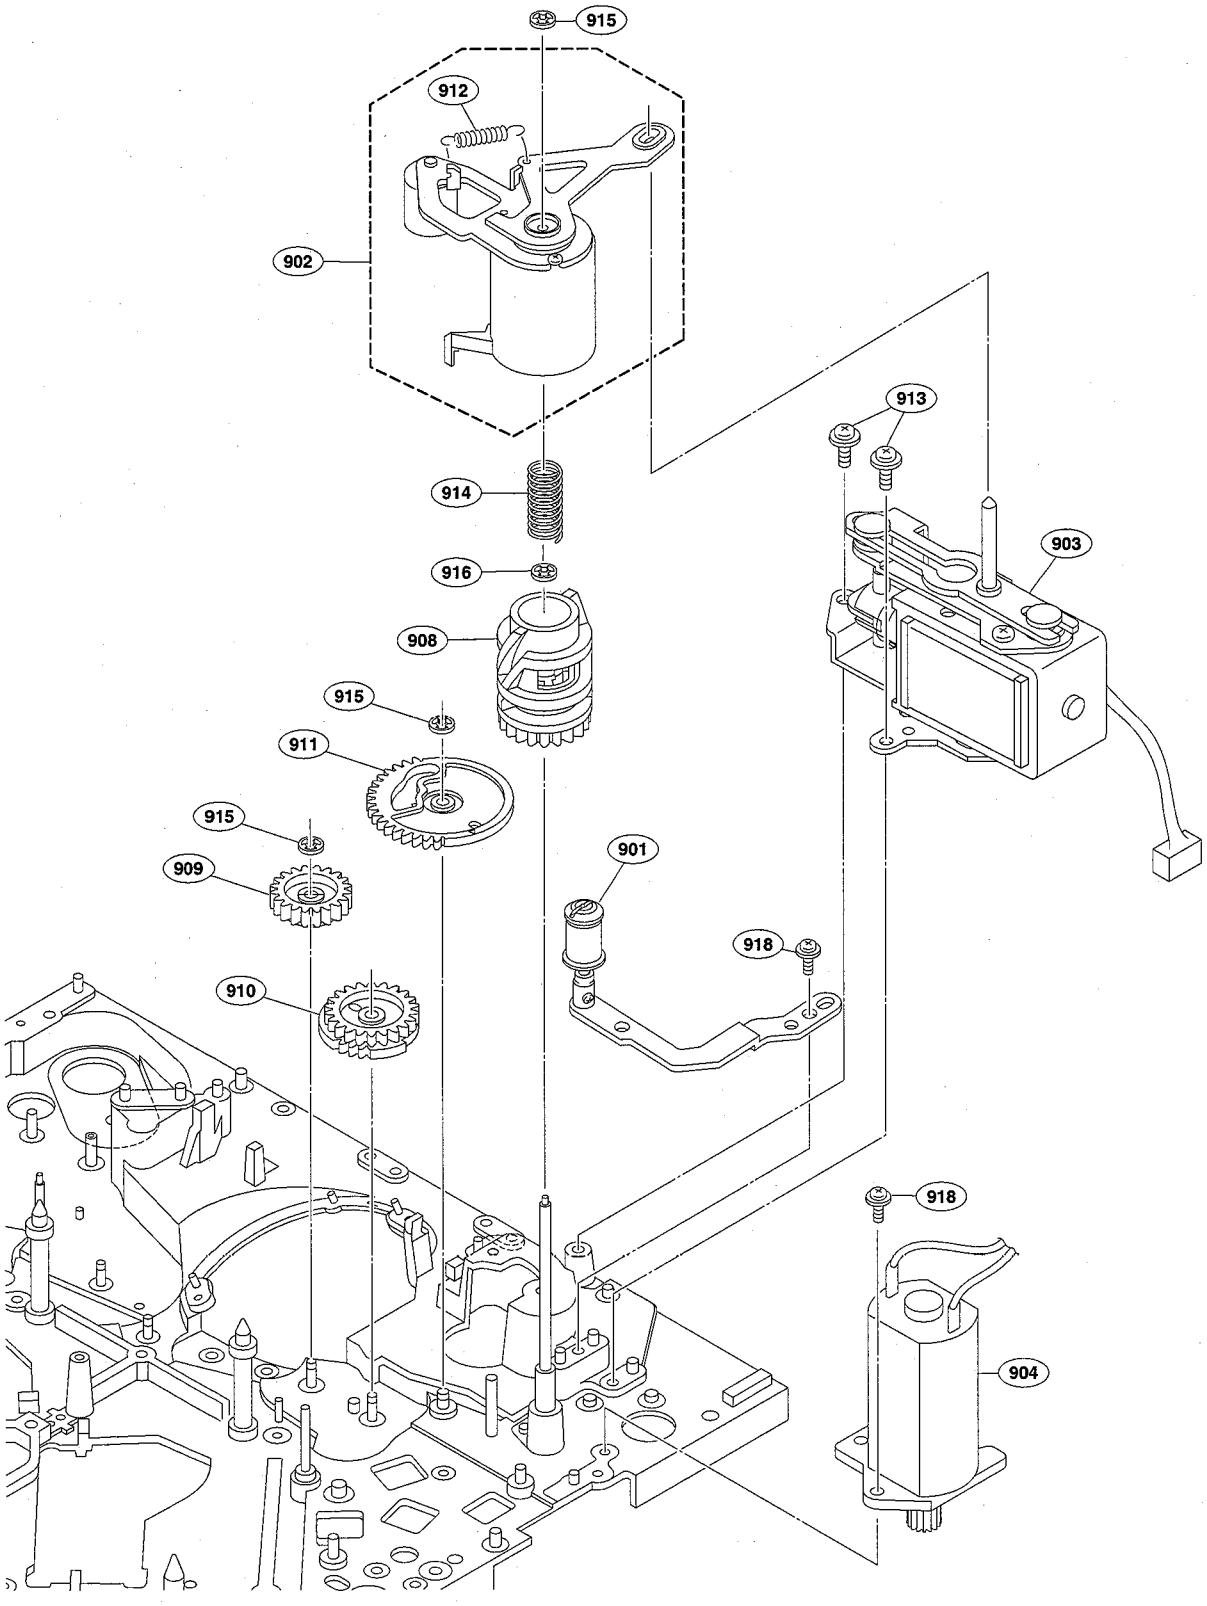

No.	Part No.	SP	Description
901	A-8279-400-B	o	ARM ASSY,TG8
902	A-8279-201-E	s	LIMITTER ASSY,PINCH
903	A-8279-203-B	s	SOLENOID ASSY,PINCH
904	A-8279-204-A	s	MOTOR ASSY,RS
908	3-614-478-01	o	CAM,ELEVATOR
909	3-614-484-01	o	NO.5 GEAR
910	3-614-548-02	o	NO.6 GEAR
911	3-614-661-01	o	NO.7 GEAR
912	3-623-508-01	s	SPRING,PRESS,PINCH
914	3-624-818-01	s	SPRING,PL
915	3-669-465-01	s	WASHER(1.5), STOPPER
916	3-669-596-01	s	WASHER,2.3
918	3-729-013-41	s	SCREW,WASHERHEAD(+P)

MIC Assembly and T Reel, Capstan Motors

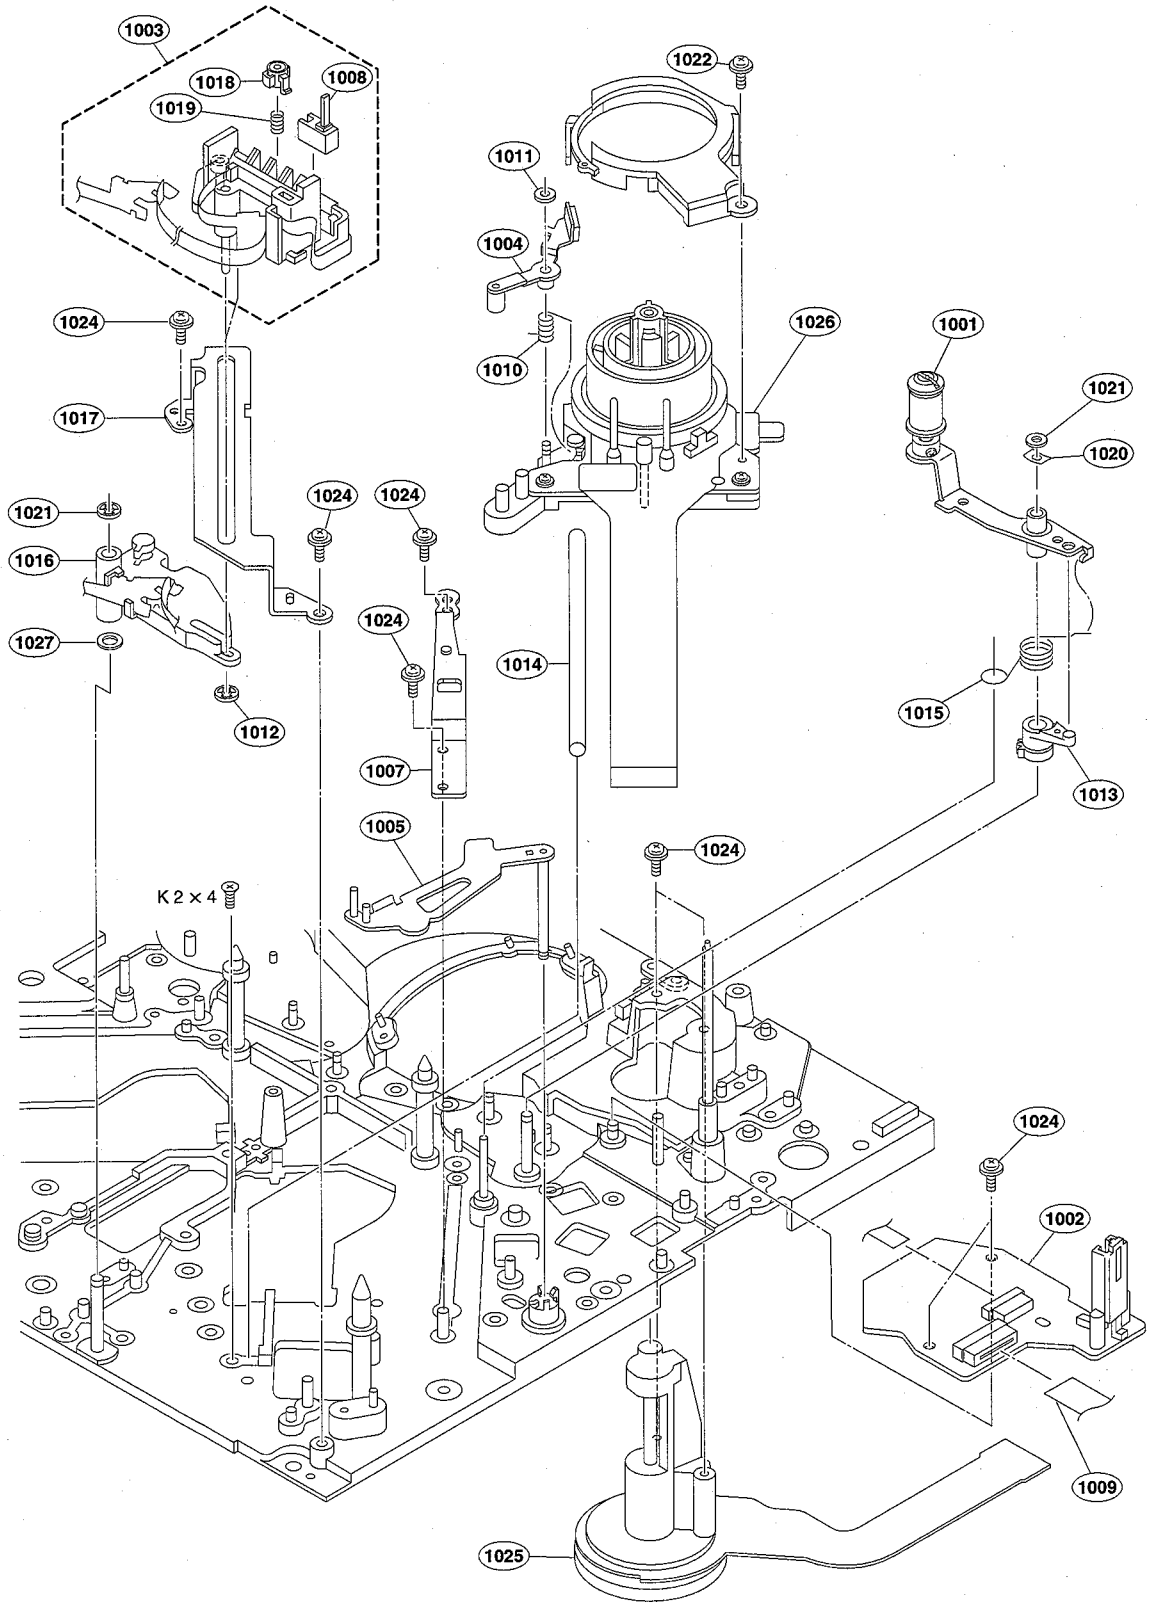

No.	Part No.	SP	Description
1001	A-8279-026-D	o	ARM ASSY,T DRAWER
1002	A-8323-519-A	s	MOUNTED CIRCUIT BOARD, SE-522
1003	A-8323-659-B	s	HOLDER SUB ASSY, MIC
1004	A-8324-480-A	s	ASSY(T), BRAKE
1005	X-3605-630-4	o	STOPPER(M) ASSY, MIC
1007	X-3605-635-1	o	RETAINER(T1) ASSY,RMP
1008	1-762-551-11	s	SWITCH, PUSH
1009	1-791-714-11	o	CABLE, FLEXIBLE FLAT (15CORE)
1010	3-203-453-01	s	SPRING(T), BRAKE
1011	3-321-813-01	s	WASHER, COTTER POLYETHYLENE
1012	3-559-408-11	s	WASHER,POLYETHYLENE,DIA.1.2
1013	3-614-549-03	o	T GEAR
1014	3-623-447-01	o	SHAFT(T),SLID
1015	3-623-455-01	s	SPRING,T
1016	3-623-475-02	o	ARM(1),MIC
1017	3-623-476-02	o	RAIL,MIC
1018	3-623-477-02	o	PLATE,CN PUSH
1019	3-623-478-01	s	SPRING,CN COMPRESSION
1020	3-625-948-01	o	WASHER, SPRING
1021	3-669-465-01	s	WASHER(1.5), STOPPER
1022	3-703-502-31	s	SCREW, M1.4X3
1024	3-729-013-41	s	SCREW,WASHERHEAD(+P)
1025	8-835-619-51	s	MOTOR, DC SCD16A/J-RP
1026	8-835-636-51	s	MOTOR, DC SRD14A/J-RP
1027	3-701-437-01	s	WASHER PLASTIC (2.1X0.14)

RLR Assembly and S Reel Motor

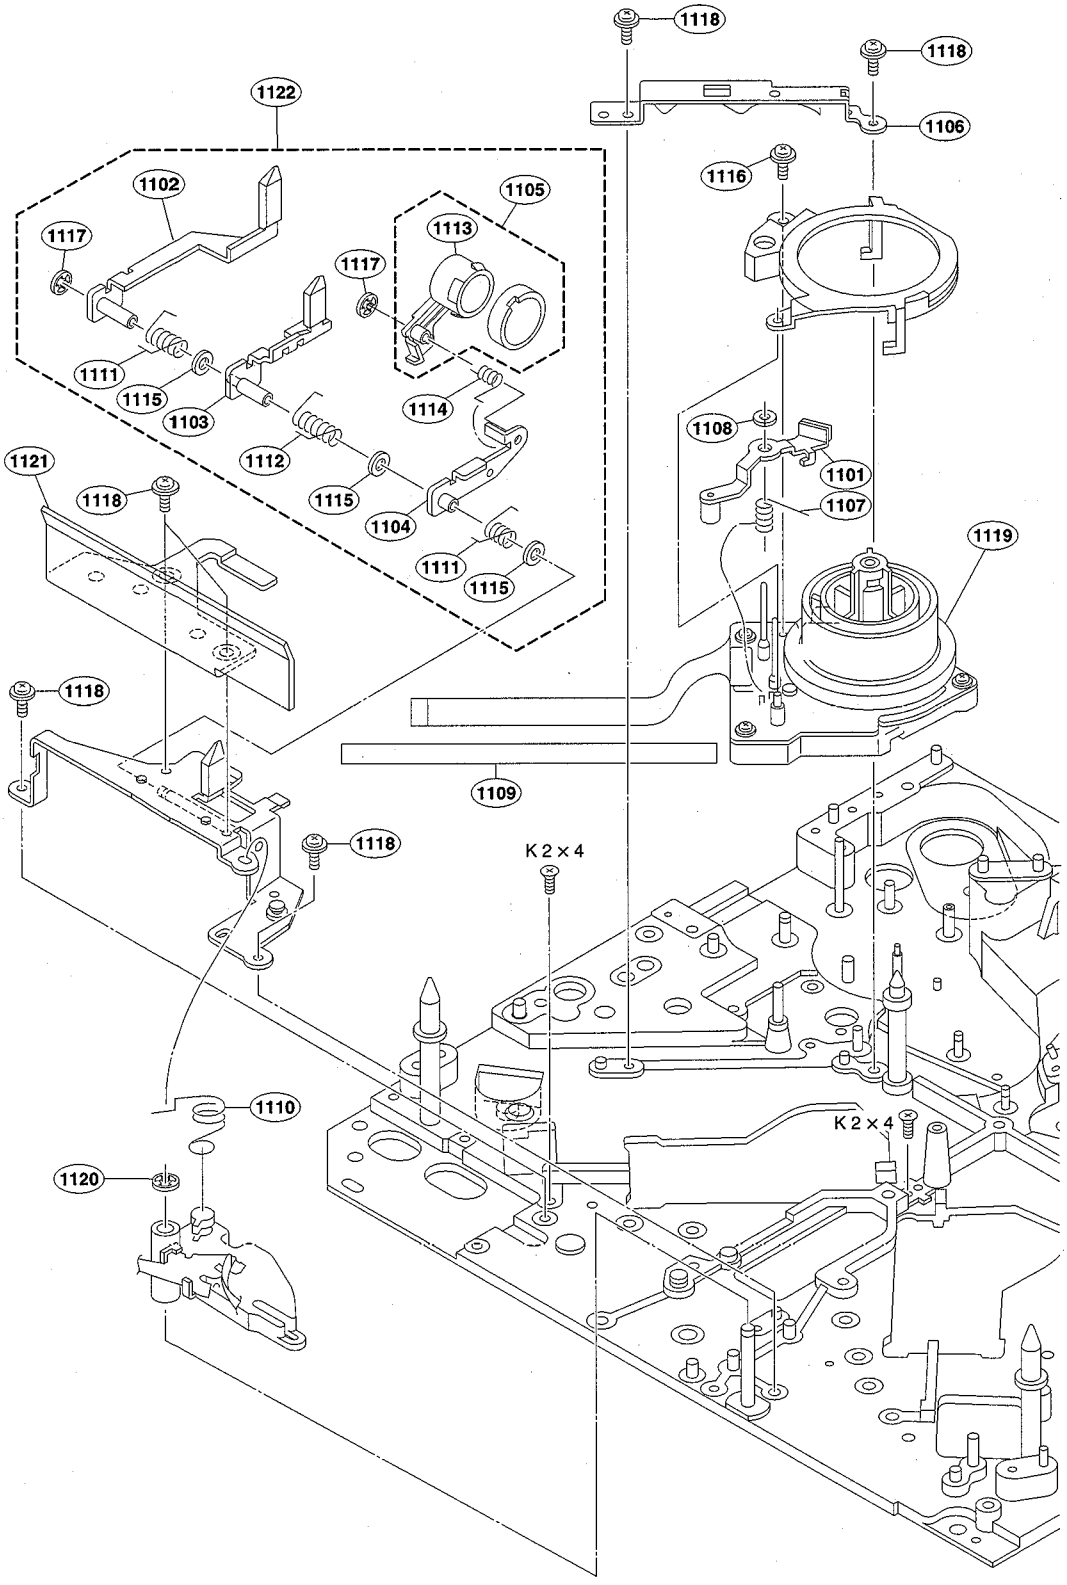

No.	Part No.	SP	Description
1101	A-8324-481-A	s	ASSY(S), BRAKE
1102	X-3605-615-3	o	ARM(S) ASSY,RLR
1103	X-3605-616-5	o	ARM(M) ASSY,RLR
1104	X-3605-617-2	o	ARM ASSY,S PUSH
1105	X-3605-619-4	o	ROLLER ASSY,S
1106	X-3605-633-1	o	RETAINER(S1) ASSY,RMP
1107	3-203-452-01	s	SPRING(S), BRAKE
1108	3-321-813-01	s	WASHER, COTTER POLYETHYLENE
1109	3-623-446-01	o	SHAFT(S),SLID
1110	3-623-450-01	s	SPRING,MIC
1111	3-623-483-01	s	SPRING(S2),RLR
1112	3-623-484-01	s	SPRING(M1),RLR
1113	3-623-495-04	o	HOLDER,S ROLLER
1114	3-623-575-01	s	SPRING,S PUSH
1115	3-701-436-11	s	WASHER (1.6X0.25)
1116	3-703-502-31	s	SCREW, M1.4X3
1117	3-726-829-01	s	WASHER,STOPPER
1118	3-729-013-41	s	SCREW,WASHERHEAD(+P)
1119	8-835-637-51	s	MOTOR, DC SRD15A/J-RP
1120	3-669-465-01	s	WASHER (1.5), STOPPER
1121	3-623-449-03	o	PLATE, L PUSH
1122	A-8323-660-E	o	RLR ASSY

Brake Assembly

Serial No. 301041- : J
Serial No. 100911- : UC
Serial No. 401551- : CE

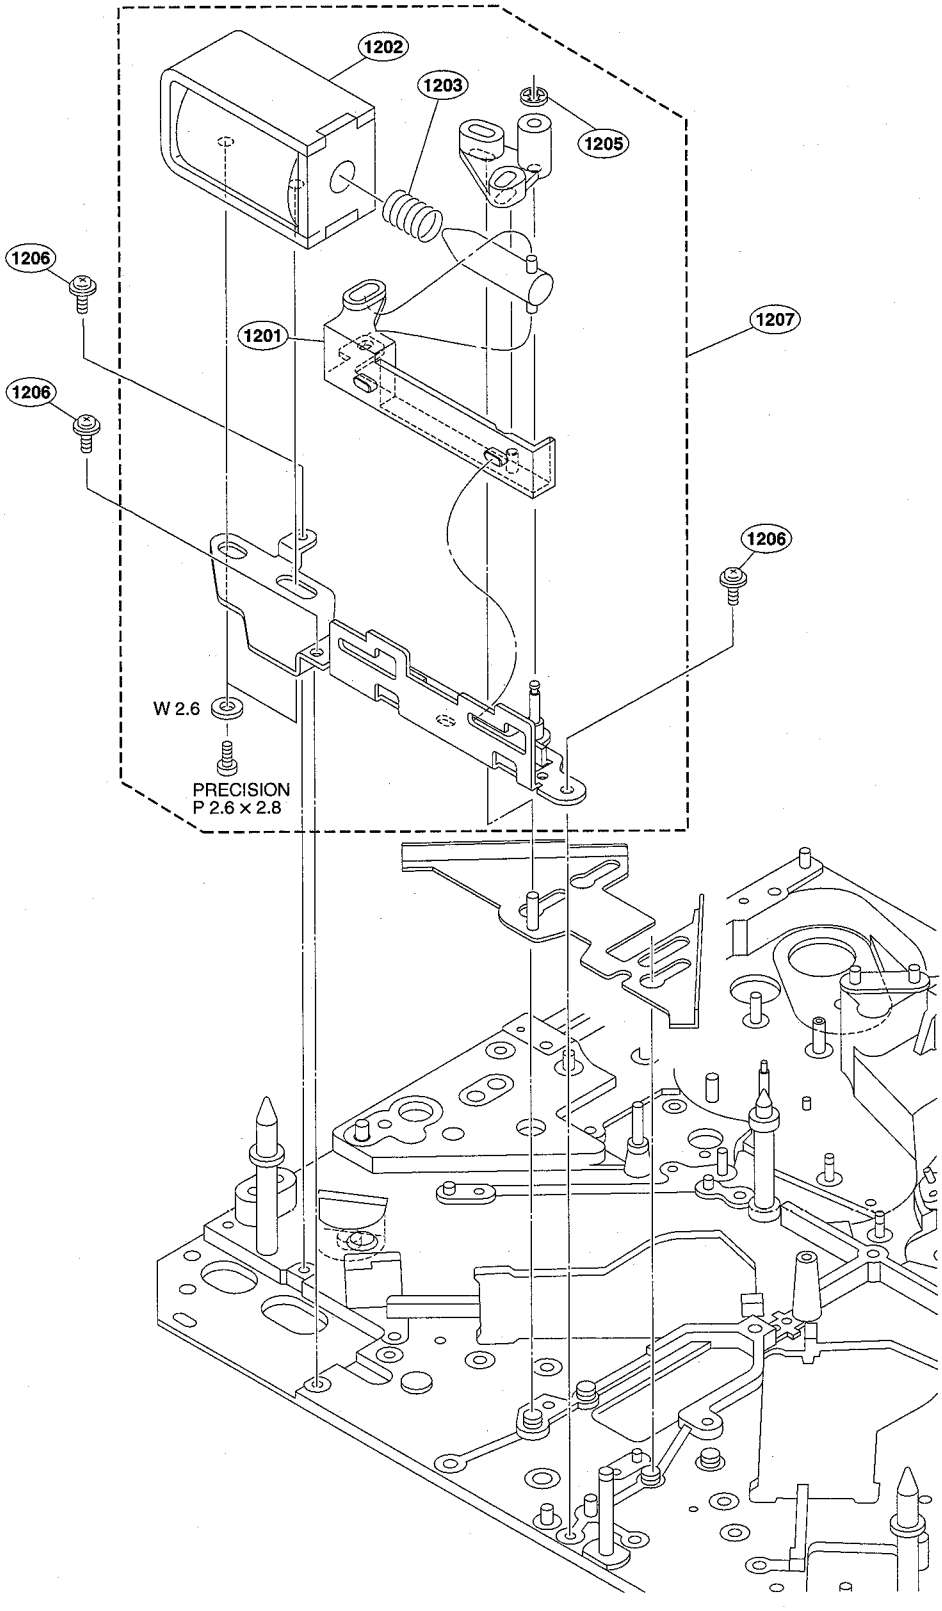

No.	Part No.	SP	Description
1201	3-629-565-01	o	SLIDER, BR
1202	1-454-930-21	s	SOLENOID, PLUNGER
1203	3-623-520-01	s	SPRING,COMPRESSION
1204	3-669-465-01	s	WASHER(1.5), STOPPER
1205	3-726-829-01	s	WASHER,STOPPER
1206	3-729-013-41	s	SCREW,WASHERHEAD(+P)
1207	A-8323-663-C	o	BRAKE ASSY

Brake Assembly

Serial No. 300001-301040: J
Serial No. 100001-100910: UC
Serial No. 400001-401551: CE

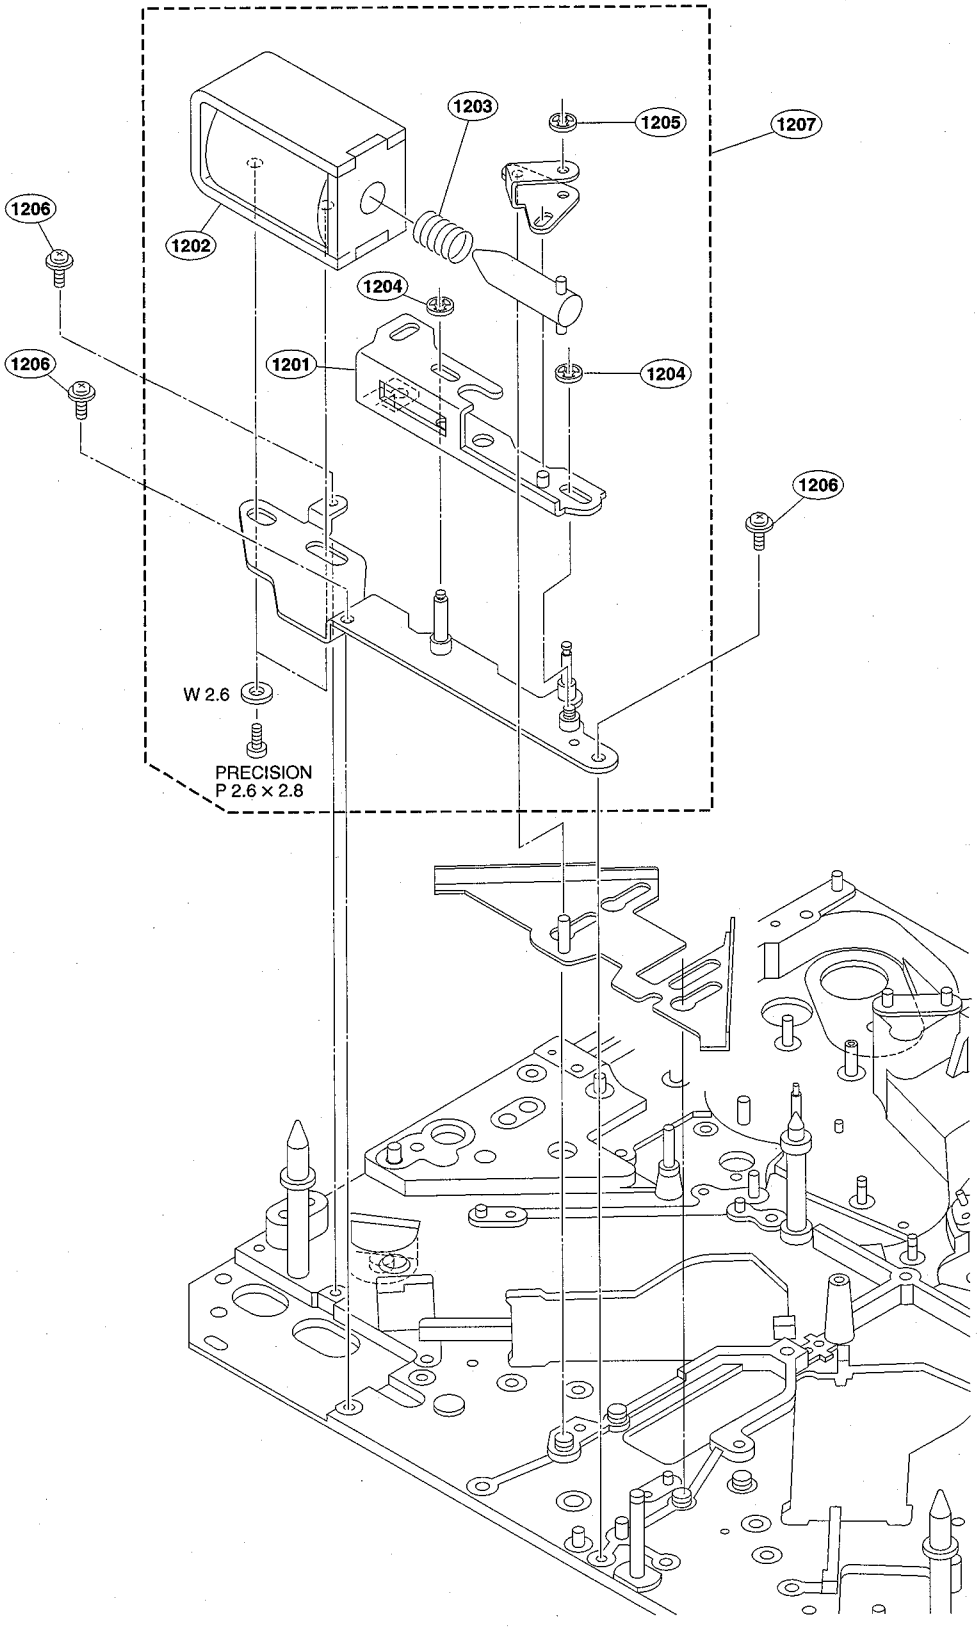

No.	Part No.	SP	Description
1201	X-3605-625-1	o	SLIDER ASSY,BR
1202	1-454-930-11	s	SOLENOID, PLUNGER
1203	3-623-520-01	s	SPRING,COMPRESSION
1204	3-669-465-01	s	WASHER(1.5), STOPPER
1205	3-726-829-01	s	WASHER,STOPPER
1206	3-729-013-41	s	SCREW,WASHERHEAD(+P)
1207	A-8323-663-A	o	BRAKE ASSY

Gears and MIC Drive Assembly

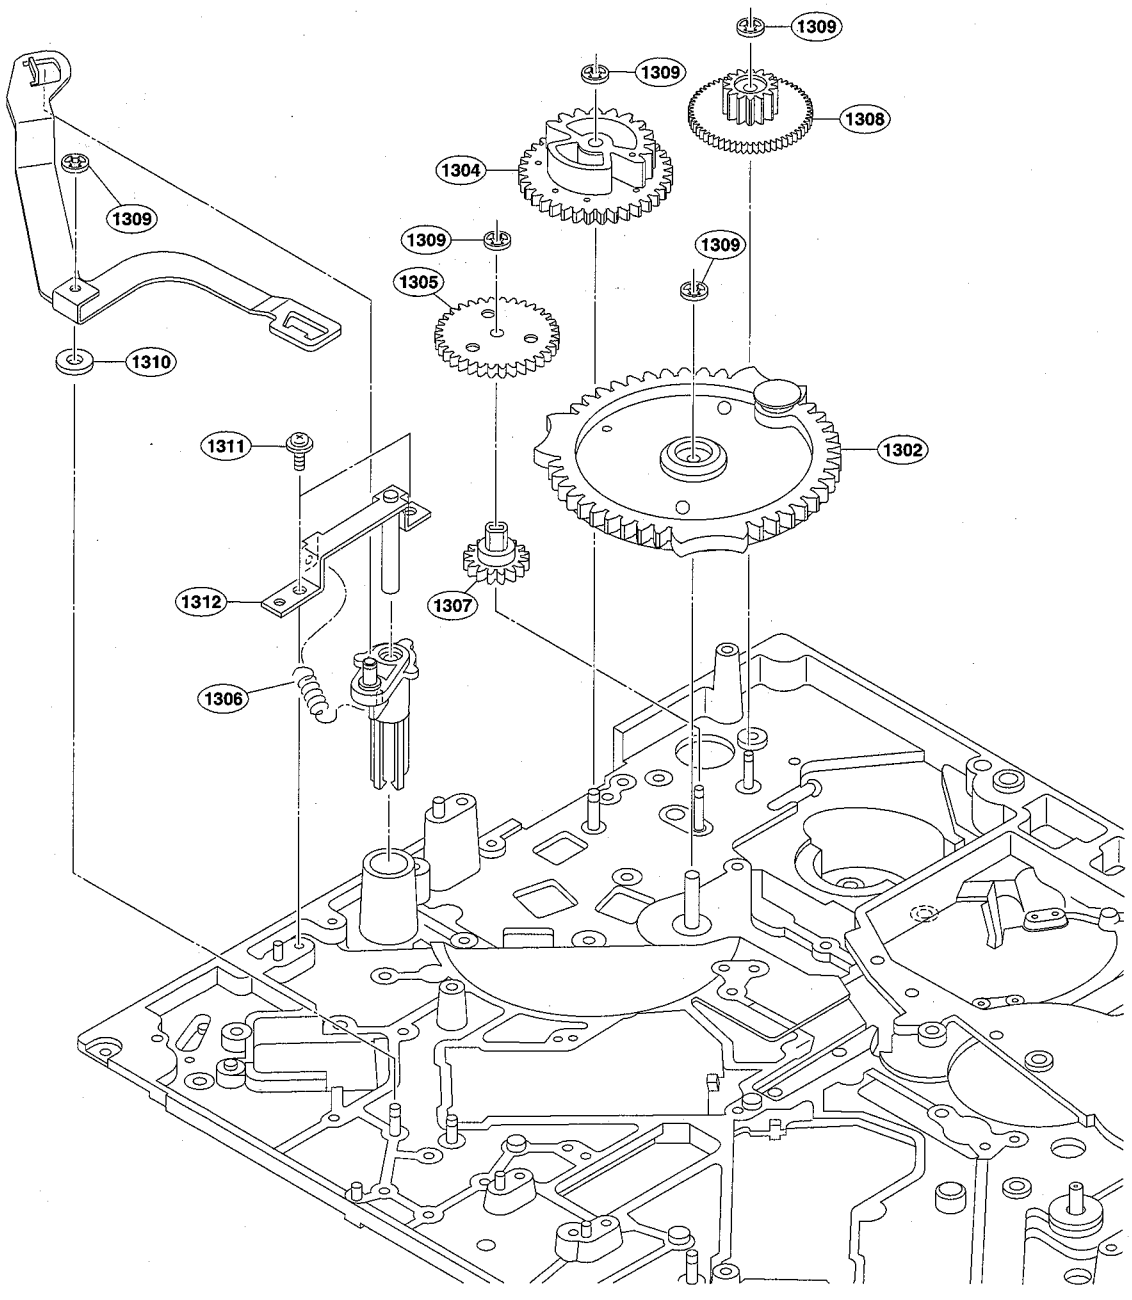

No.	Part No.	SP	Description
1302	X-3605-631-1	o	GEAR ASSY,R SHIFT
1304	X-3605-636-1	o	GEAR(C) ASSY
1305	3-623-444-01	o	GEAR B1
1306	3-623-445-02	s	SPRING(MIC),EXTENSION
1307	3-623-453-01	o	GEAR B
1308	3-623-454-02	o	GEAR A
1309	3-669-465-01	s	WASHER(1.5), STOPPER
1310	3-701-437-01	s	WASHER PLASTIC (2.1X0.14)
1311	3-729-013-41	s	SCREW,WASHERHEAD(+P)
1312	X-3605-639-3	o	HOLDER ASSY, M

M Stopper (T), (S) Assembly

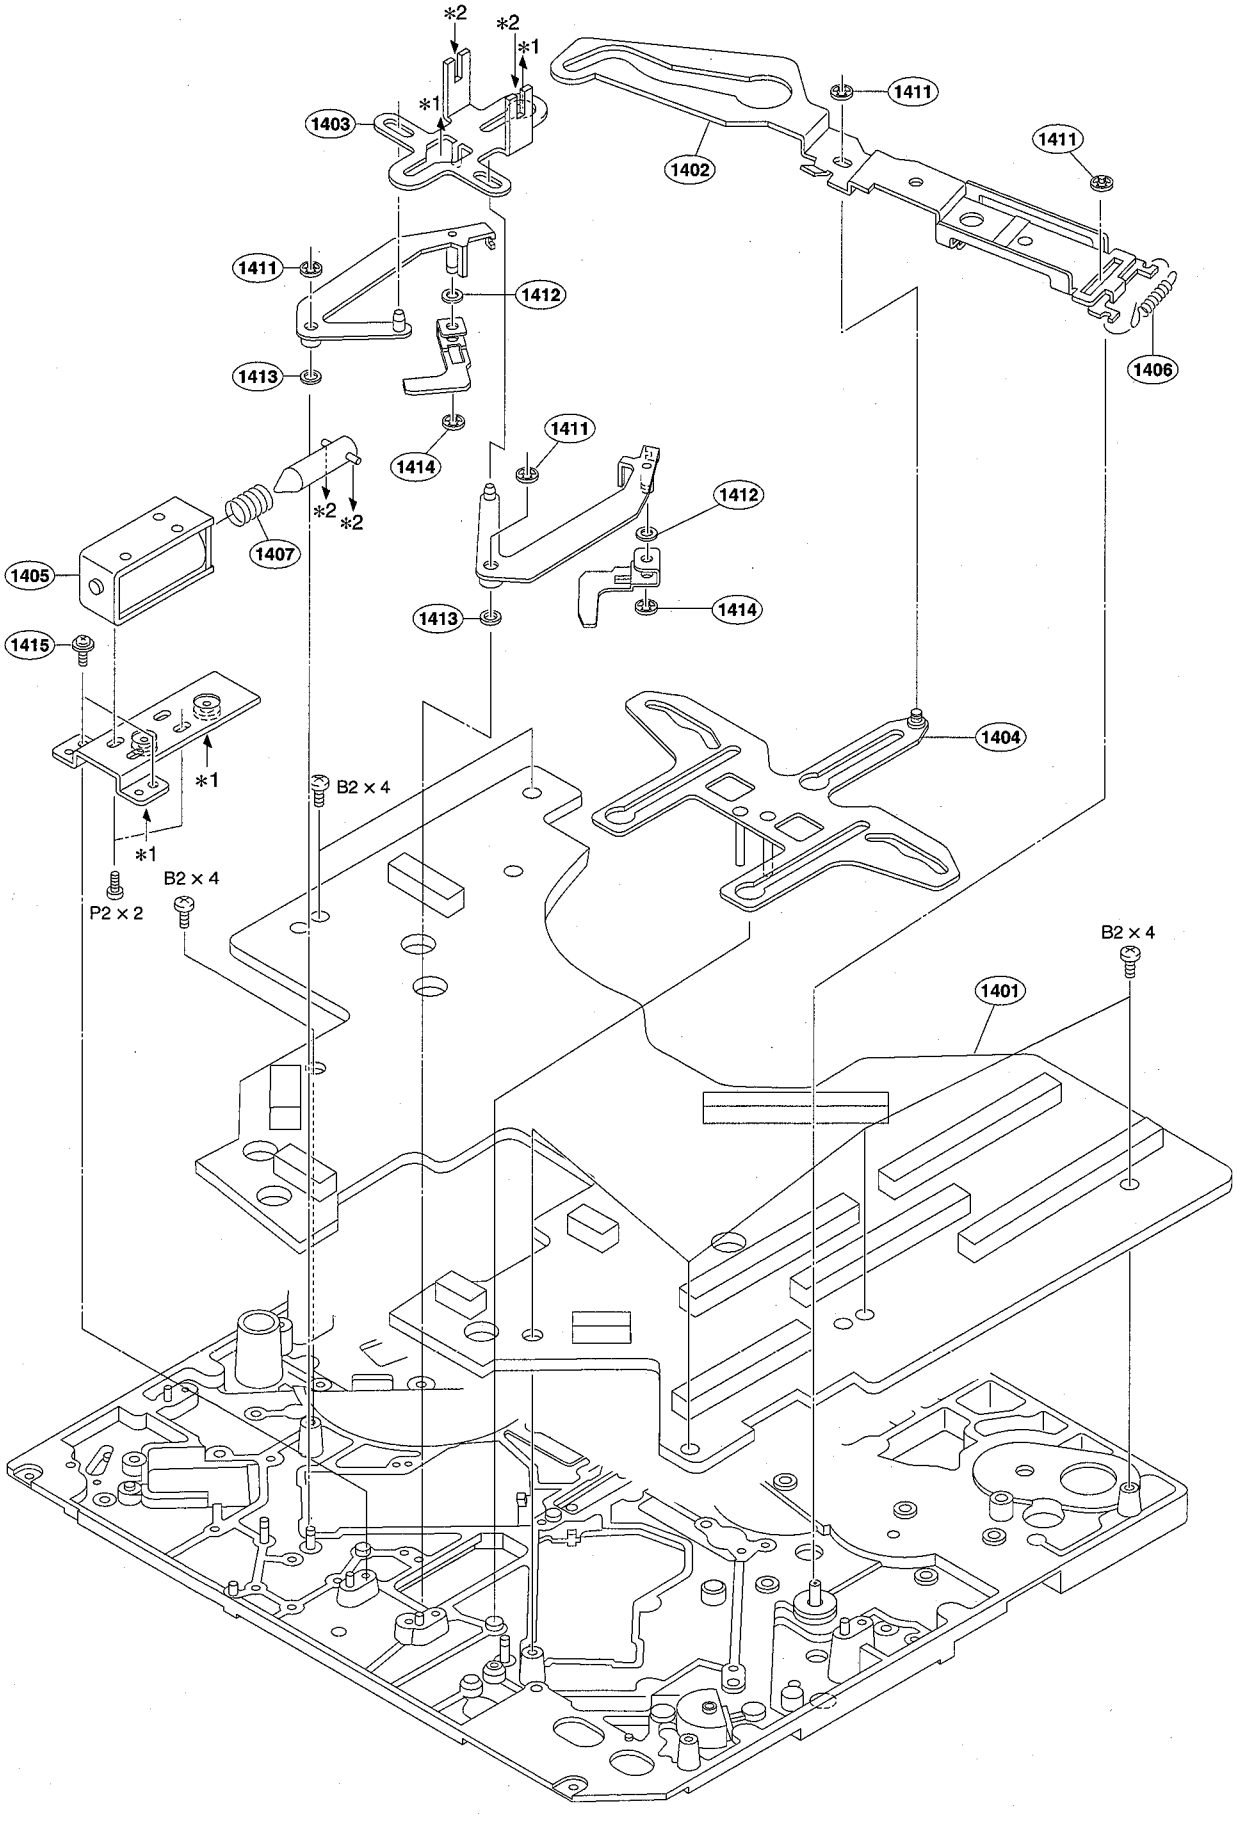

No.	Part No.	SP	Description
1401	A-8323-565-A	o	MOUNTED CIRCUIT BOARD, MS-64
1402	X-3605-610-3	o	ARM(A) ASSY,RS
1403	3-629-490-01	o	SLIDER, MS
1404	X-3605-637-3	o	PLATE(A) ASSY,RS
1405	1-454-932-11	s	SOLENOID, PLUNGER
1406	3-614-541-01	s	SPRING,EXTENSION
1407	3-614-543-01	o	SPRING,COMPRESSION
1411	3-669-465-01	s	WASHER(1.5), STOPPER
1412	3-701-436-01	s	WASHER (1.6)
1413	3-701-437-01	s	WASHER PLASTIC (2.1X0.14)
1414	3-726-829-01	s	WASHER,STOPPER
1415	3-729-013-41	s	SCREW,WASHERHEAD(+P)

Rear Panel Block

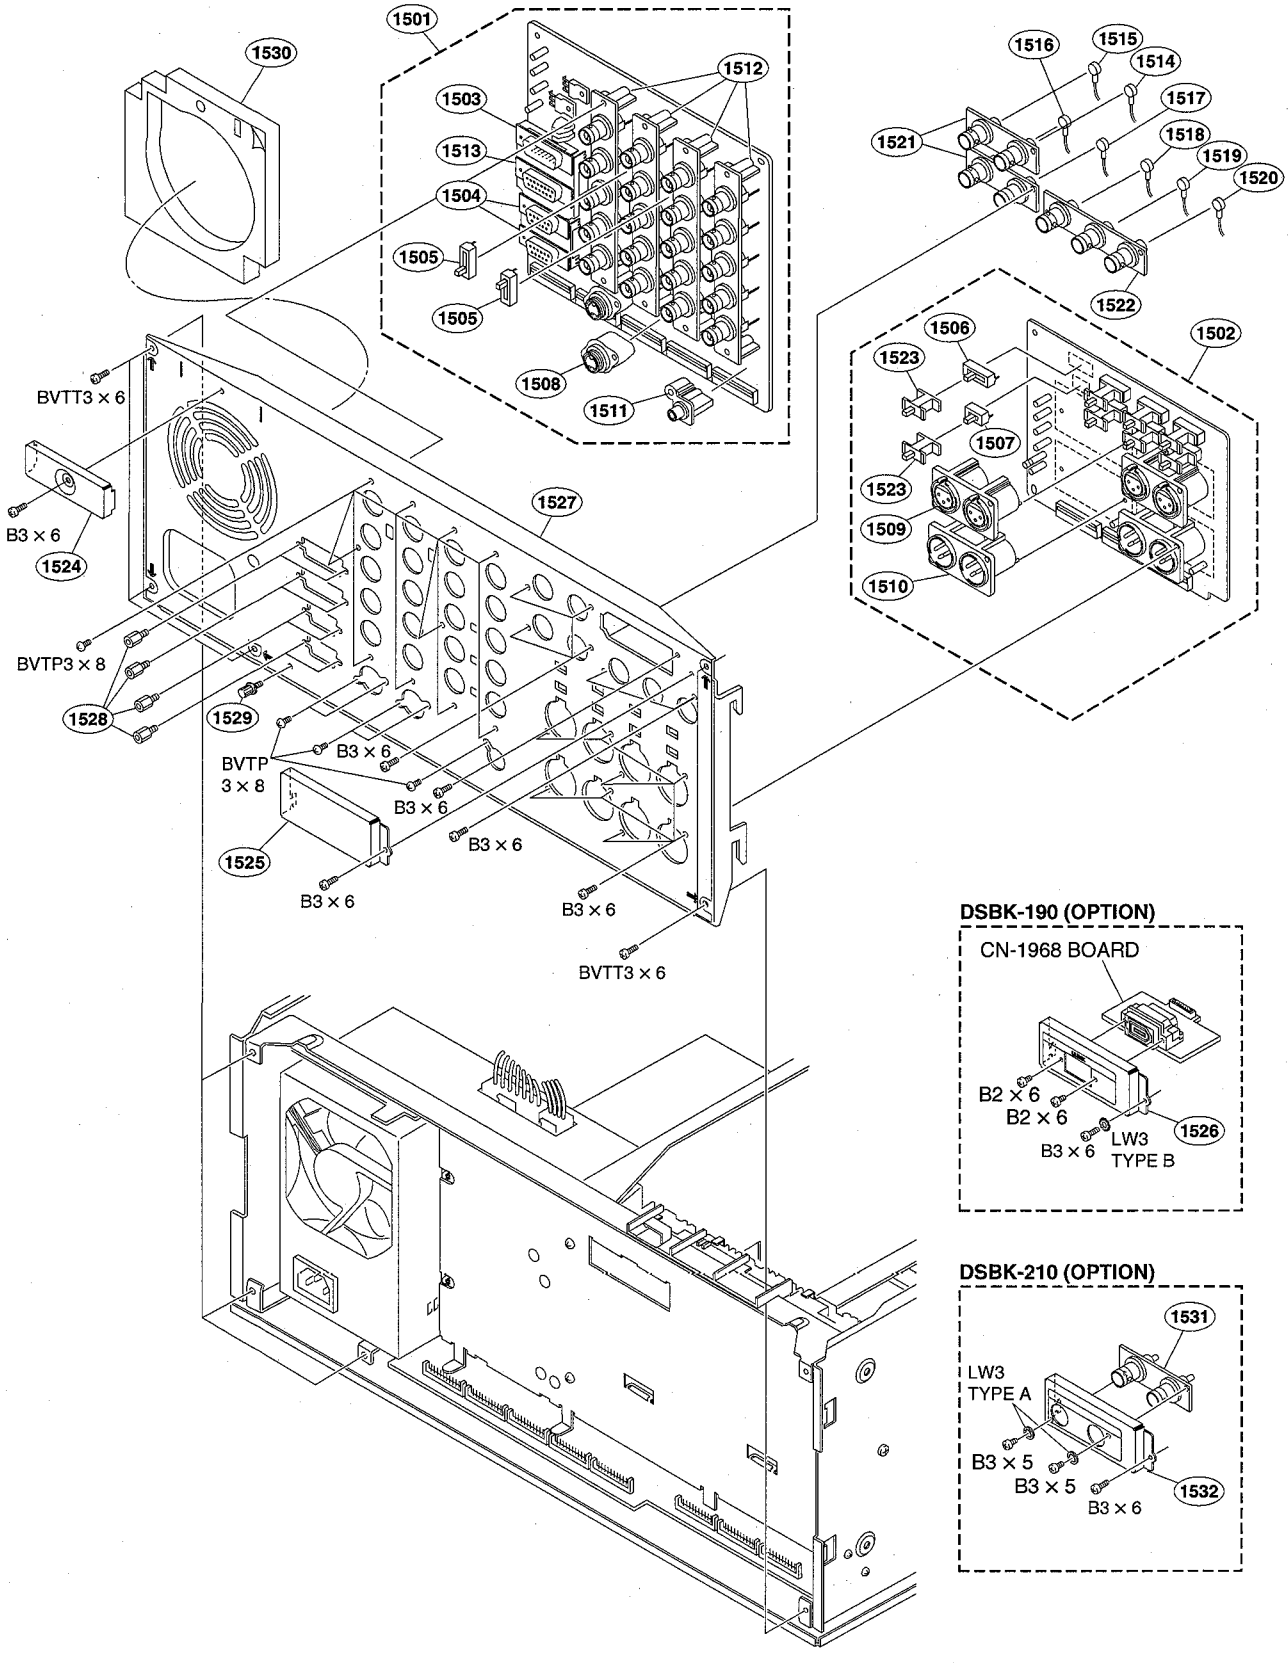

No.	Part No.	SP	Description
1501	A-8323-489-A	o	MOUNTED CIRCUIT BOARD, CP-341
1502	A-8323-490-A	o	MOUNTED CIRCUIT BOARD, CP-342(for UC,CE)
	A-8323-491-A	o	MOUNTED CIRCUIT BOARD, CP-342A(for J)
1503	1-568-674-11	o	CONNECTOR, D-SUB 15P
1504	1-568-676-11	o	CONNECTOR, D-SUB 15P
1505	1-570-157-51	s	SWITCH, SLIDE
1506	1-572-042-11	s	SWITCH, SLIDE (2-4-3)
1507	1-572-992-11	s	SWITCH, SLIDE (2-2-3)
1508	1-573-590-22	s	CONNECTOR, (S)
1509	1-750-785-21	s	CONNECTOR, (XLR TYPE) 3P (for UC,CE)
	1-750-786-21	s	CONNECTOR, (XLR TYPE) 3P (for J)
1510	1-750-786-21	s	CONNECTOR, (XLR TYPE) 3P (for UC,CE)
	1-750-785-21	s	CONNECTOR, (XLR TYPE) 3P (for J)
1511	1-766-596-11	s	JUCK, PIN 1P
1512	1-778-665-11	s	CONNECTOR, BNC (RECEPTACLE)
1513	1-784-599-11	s	CONNECTOR, D-SUB 15P
1514	1-791-715-12	o	CABLE ASSMBLY, COAXIAL
1515	1-791-716-12	o	CABLE ASSMBLY, COAXIAL
1516	1-791-717-11	o	CABLE ASSMBLY, COAXIAL
1517	1-791-718-12	o	CABLE ASSMBLY, COAXIAL
1518	1-791-719-11	o	CABLE ASSMBLY, COAXIAL
1519	1-791-720-11	o	CABLE ASSMBLY, COAXIAL
1520	1-791-721-11	o	CABLE ASSMBLY, COAXIAL
1521	1-793-815-11	o	CONVERTER, COAXIAL CONNECTOR
1522	1-793-816-11	o	CONVERTER, COAXIAL CONNECTOR
1523	3-171-450-01	o	ADAPTER SW
1524	3-623-396-01	o	BRACKET,COVER,TOP
1525	3-623-441-01	o	COVER,OPTION
1526	3-623-441-13	o	COVER,OPTION (DSBK-190)
1527	3-623-653-04	o	PANEL,REAR (for UC)
	3-623-653-14	o	PANEL,REAR (for CE)
	3-623-653-24	o	PANEL,REAR (for J)
1528	3-673-910-31	s	SCREW, CONNECTOR
1529	4-947-010-01	s	SCREW,FEEDER FIXED
1530	3-629-834-01	o	PACKING, DUCT, RADIATION
1531	1-793-815-11	o	CONVERTER, COAXIAL CONNECTOR
1532	3-623-441-23	o	COVER, OPTION (DSBK-210)

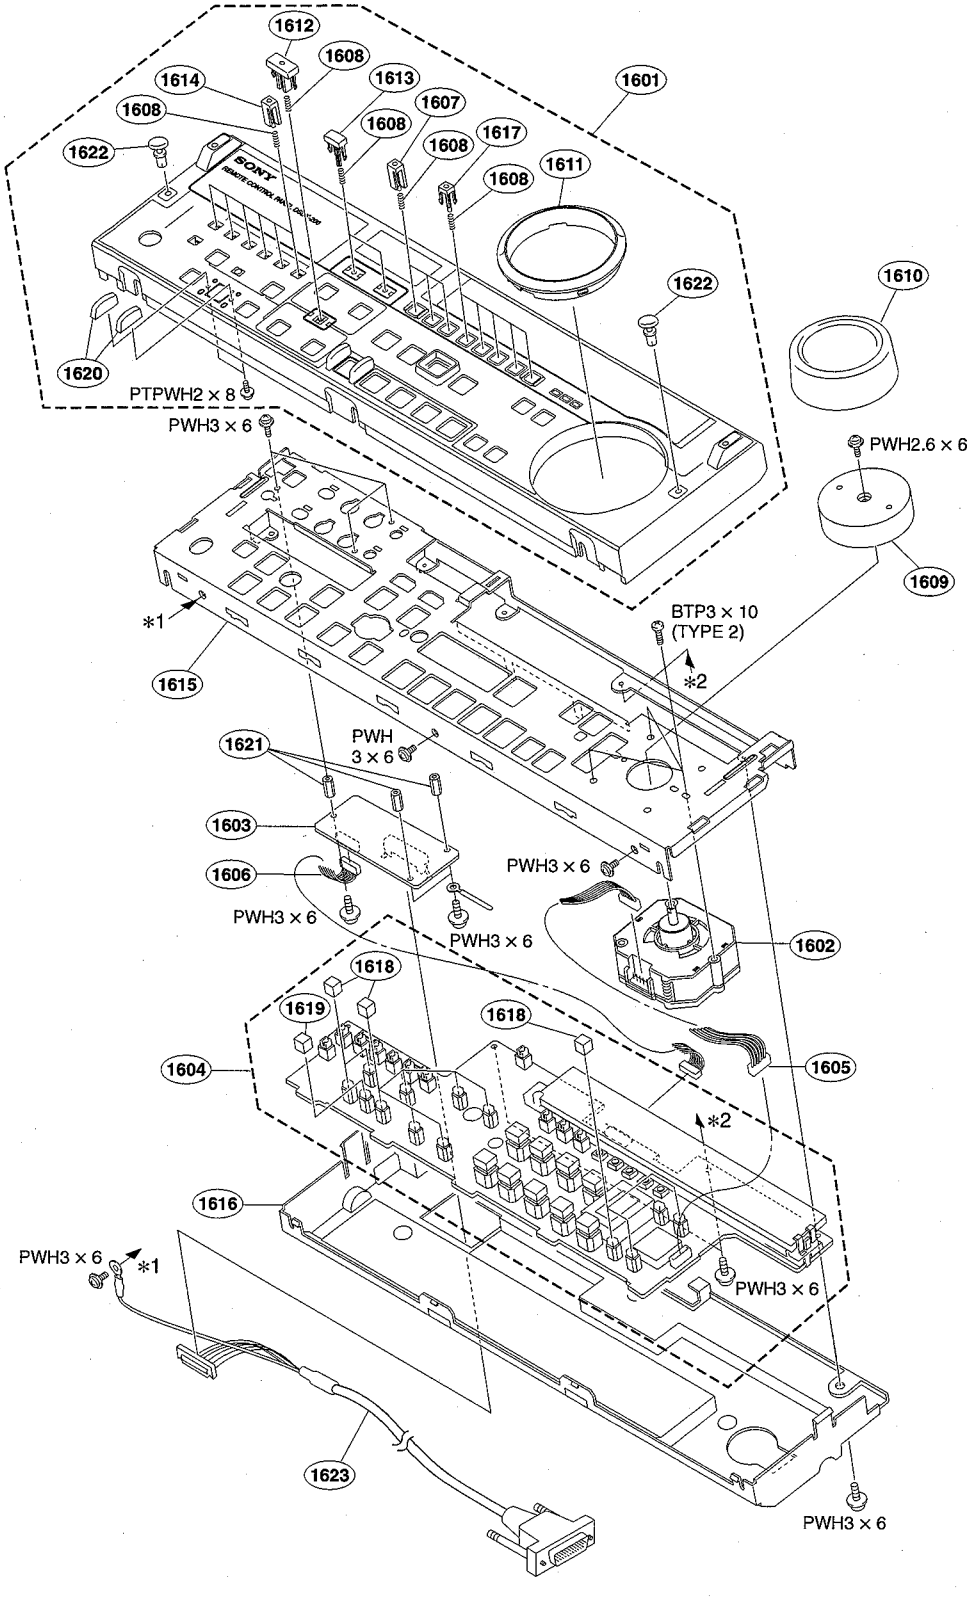
1612
1608
1614
1613
1601
1608
1607
1608
1617
1622
1608
1611
1608
1610
1622
1620
PTPWH2 × 8
PWH3 × 6
PWH2.6 × 6
1609
*1
1615
BTP3 × 10
(TYPE 2)
*2
1621
PWH
3 × 6
1603
1606
PWH3 × 6
PWH3 × 6
PWH3 × 6
1602
1618
1619
1618
1604
1605
*2
1616
PWH3 × 6
*1
PWH3 × 6
1623
PWH3 × 6

No.	Part No.	SP	Description
1601	A-8279-277-D	o	PANEL ASSY, CONTROL
1602	A-8323-665-C	s	DIAL ASSY, SEARCH
1603	A-8324-145-A	o	MOUNTED CIRCUIT BOARD, IF-778
1604	A-8324-694-A	o	MOUNTED CIRCUIT BOARD, KY-452A (for J, SY)
1605	1-960-089-11	o	HARNESS, SUB (KYJOG)
1606	1-960-326-11	o	HARNESS, SUB (KYIF)
1607	3-180-822-05	s	KEY TOP 6x6, USE
1608	3-611-769-01	s	SPRING, COMPRESSION
1609	3-623-384-02	s	KNOB, DIAL
1610	3-623-385-03	s	COVER, DIAL
1611	3-623-397-02	o	ESCUTCHEON, DIAL
1612	3-623-398-02	s	KEY TOP (9x16)
1613	3-623-403-02	s	TOP 7x11, KEY
1614	3-623-404-02	s	TOP 6x6, KEY
1615	3-623-421-02	o	FRAME, CONTROL
1616	3-623-422-12	o	COVER, KY
1617	3-696-774-02	s	TOP KEY 6x6
1618	3-708-877-01	s	CAP
1619	3-708-933-01	s	CAP
1620	3-717-380-21	o	GUARD, REC
1621	4-360-293-00	o	SPACER, BOSS
1622	4-812-134-11	s	RIVET
1623	1-792-642-11	s	CORD, CONNECTION

Screws and Washers

Part No.	SP	Description
7-621-591-00	s	SCREW +K 2X4(EP-FE/ZNBK/CM2)
7-621-772-18	s	SCREW +B M2X4 (EP-FE/CU,NI,CR)
7-623-924-01	s	WASHER,PLASTIC (3X0.5)
7-624-104-04	s	STOP RING,E-2
7-624-105-04	s	RING,E2.3 (STEEL)
7-624-106-04	s	RING,RETAINING,E (3MM)
7-624-108-04	s	RING,RETAINING;E-TYPE 4(STEEL)
7-626-302-21	s	SPRING PIN 2.5X12 (STEEL)
7-627-551-47	s	SCREW +P1.4X1.4(EP-FE/CU,NI,CR
7-627-553-17	s	SCREW +P2X2(EP-FE/CU,NI,CR)
7-627-553-37	s	SCREW +P2X3(EP-FE/CU,NI,CR)
7-627-556-07	s	SCREW +P2.6X2.8(EP-FE/CU,NI,CR
7-627-556-08	s	SCREW +P2.6X2.8(EP-FE/ZNBK/CM2
7-671-155-01	s	STEEL BALL (3 DIA)
7-682-547-04	s	SCREW +B3X6(EP-FE/CU,NI,CR)
7-682-547-09	s	SCREW +B3X6(EP-FE/ZNBK/CM2)
7-682-550-09	s	SCREW +B3X12(EP-FE/ZNBK/CM2)
7-682-560-04	o	SCREW +B4X6(EP-FE/CU,NI,CR)
7-682-902-21	s	SCREW +PWH 2.6X6(EP-FE/ZN/CM2)
7-682-903-11	s	SCREW +PWH 3X6(EP-FE/ZN/CM2)
7-682-903-19	s	SCREW +PWH 3X6(EP-FE/ZNBK/CM2)
7-682-949-01	s	SCREW +PSW 3X10(EP-FE/ZN/CM2)
7-685-105-19	s	SCREW +PTP2X8(EP-FE/ZNBK/CM2)
7-685-247-19	s	SCREW +KTP 3X10(EP-FE/ZNBK/CM2
7-685-547-19	s	SCREW +BTP 3X10(EP-FE/ZNBK/CM2
7-685-646-79	s	SCREW +BVTP 3X8(EP-FE/ZNBK/CM2
7-685-871-01	s	SCREW BVTT 3X6(EP-FE/ZN/CM2)
7-688-002-03	s	WASHER 2.6 (EP-CU/NI)(SMALL)

12-3. Electrical Parts Lists

APR-45 BOARD(DSR-2000/2000P) SUFFIX -14

Ref. No. or Q'ty	Part No.	SP	Description
1pc	A-8323-473-B	s	MOUNTED CIRCUIT BOARD, APR-45
C7	1-126-396-11	s	CAPACITOR,ELECT 47MF/16V(CHIP)
C8	1-126-396-11	s	CAPACITOR,ELECT 47MF/16V(CHIP)
C9	1-126-396-11	s	CAPACITOR,ELECT 47MF/16V(CHIP)
C10	1-126-396-11	s	CAPACITOR,ELECT 47MF/16V(CHIP)
C19	1-162-923-11	s	CAPACITOR,CERAMIC 47PF/50V CH
C20	1-162-923-11	s	CAPACITOR,CERAMIC 47PF/50V CH
C21	1-162-923-11	s	CAPACITOR,CERAMIC 47PF/50V CH
C22	1-162-923-11	s	CAPACITOR,CERAMIC 47PF/50V CH
C43	1-126-395-11	s	CAPACITOR,ELECT 22MF/16V(CHIP)
C44	1-126-395-11	s	CAPACITOR,ELECT 22MF/16V(CHIP)
C45	1-162-927-11	s	CAPACITOR,CERAMIC 100PF/50V CH
C46	1-162-923-11	s	CAPACITOR,CERAMIC 47PF/50V CH
C47	1-162-927-11	s	CAPACITOR,CERAMIC 100PF/50V CH
C48	1-162-923-11	s	CAPACITOR,CERAMIC 47PF/50V CH
C49	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
C50	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
C51	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
C52	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
C53	1-104-851-11	s	CAPACITOR,TANTALUM 10MF/10V
C54	1-104-851-11	s	CAPACITOR,TANTALUM 10MF/10V
C55	1-126-394-11	s	CAPACITOR,ELECT 10MF/16V(CHIP)
C56	1-126-394-11	s	CAPACITOR,ELECT 10MF/16V(CHIP)
C57	1-126-394-11	s	CAPACITOR,ELECT 10MF/16V(CHIP)
C58	1-126-394-11	s	CAPACITOR,ELECT 10MF/16V(CHIP)
C59	1-104-851-11	s	CAPACITOR,TANTALUM 10MF/10V
C60	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
C61	1-162-966-11	s	CAPACITOR,CERAMIC 2200PF/50V B
C62	1-104-851-11	s	CAPACITOR,TANTALUM 10MF/10V
C63	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
C64	1-163-145-00	s	CAPACITOR,CHIP CERAMIC 1500PF
C65	1-163-145-00	s	CAPACITOR,CHIP CERAMIC 1500PF
C66	1-162-966-11	s	CAPACITOR,CERAMIC 2200PF/50V B
C67	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
C68	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
C69	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
C70	1-104-851-11	s	CAPACITOR,TANTALUM 10MF/10V
C107	1-126-396-11	s	CAPACITOR,ELECT 47MF/16V(CHIP)
C108	1-126-396-11	s	CAPACITOR,ELECT 47MF/16V(CHIP)
C109	1-126-396-11	s	CAPACITOR,ELECT 47MF/16V(CHIP)
C110	1-126-396-11	s	CAPACITOR,ELECT 47MF/16V(CHIP)
C119	1-162-923-11	s	CAPACITOR,CERAMIC 47PF/50V CH
C120	1-162-923-11	s	CAPACITOR,CERAMIC 47PF/50V CH
C121	1-162-923-11	s	CAPACITOR,CERAMIC 47PF/50V CH
C122	1-162-923-11	s	CAPACITOR,CERAMIC 47PF/50V CH
C143	1-126-395-11	s	CAPACITOR,ELECT 22MF/16V(CHIP)
C144	1-126-395-11	s	CAPACITOR,ELECT 22MF/16V(CHIP)
C145	1-162-927-11	s	CAPACITOR,CERAMIC 100PF/50V CH
C146	1-162-923-11	s	CAPACITOR,CERAMIC 47PF/50V CH
C147	1-162-927-11	s	CAPACITOR,CERAMIC 100PF/50V CH
C148	1-162-923-11	s	CAPACITOR,CERAMIC 47PF/50V CH
C149	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
C150	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
C151	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
C152	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
C153	1-104-851-11	s	CAPACITOR,TANTALUM 10MF/10V
C154	1-104-851-11	s	CAPACITOR,TANTALUM 10MF/10V
C155	1-126-394-11	s	CAPACITOR,ELECT 10MF/16V(CHIP)

(APR-45 BOARD(DSR-2000/2000P) SUFFIX -14)

Ref. No. or Q'ty	Part No.	SP	Description
C156	1-126-394-11	s	CAPACITOR,ELECT 10MF/16V(CHIP)
C157	1-126-394-11	s	CAPACITOR,ELECT 10MF/16V(CHIP)
C158	1-126-394-11	s	CAPACITOR,ELECT 10MF/16V(CHIP)
C159	1-104-851-11	s	CAPACITOR,TANTALUM 10MF/10V
C160	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
C161	1-162-966-11	s	CAPACITOR,CERAMIC 2200PF/50V B
C162	1-104-851-11	s	CAPACITOR,TANTALUM 10MF/10V
C163	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
C164	1-163-145-00	s	CAPACITOR,CHIP CERAMIC 1500PF
C165	1-163-145-00	s	CAPACITOR,CHIP CERAMIC 1500PF
C166	1-162-966-11	s	CAPACITOR,CERAMIC 2200PF/50V B
C167	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
C168	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
C169	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
C170	1-104-851-11	s	CAPACITOR,TANTALUM 10MF/10V
C201	1-104-851-11	s	CAPACITOR,TANTALUM 10MF/10V
C202	1-104-851-11	s	CAPACITOR,TANTALUM 10MF/10V
C203	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
C204	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
C205	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
C206	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
C207	1-104-851-11	s	CAPACITOR,TANTALUM 10MF/10V
C208	1-104-851-11	s	CAPACITOR,TANTALUM 10MF/10V
C209	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
C210	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
C211	1-126-394-11	s	CAPACITOR,ELECT 10MF/16V(CHIP)
C212	1-126-394-11	s	CAPACITOR,ELECT 10MF/16V(CHIP)
C213	1-126-394-11	s	CAPACITOR,ELECT 10MF/16V(CHIP)
C214	1-126-394-11	s	CAPACITOR,ELECT 10MF/16V(CHIP)
C215	1-126-394-11	s	CAPACITOR,ELECT 10MF/16V(CHIP)
C216	1-126-394-11	s	CAPACITOR,ELECT 10MF/16V(CHIP)
C217	1-126-394-11	s	CAPACITOR,ELECT 10MF/16V(CHIP)
C218	1-126-394-11	s	CAPACITOR,ELECT 10MF/16V(CHIP)
C219	1-162-927-11	s	CAPACITOR,CERAMIC 100PF/50V CH
C220	1-162-927-11	s	CAPACITOR,CERAMIC 100PF/50V CH
C221	1-162-927-11	s	CAPACITOR,CERAMIC 100PF/50V CH
C222	1-162-927-11	s	CAPACITOR,CERAMIC 100PF/50V CH
C223	1-162-927-11	s	CAPACITOR,CERAMIC 100PF/50V CH
C224	1-162-927-11	s	CAPACITOR,CERAMIC 100PF/50V CH
C225	1-162-927-11	s	CAPACITOR,CERAMIC 100PF/50V CH
C226	1-162-927-11	s	CAPACITOR,CERAMIC 100PF/50V CH
C227	1-164-227-11	s	CAPACITOR,CERAMIC 0.022MF/25V
C228	1-164-227-11	s	CAPACITOR,CERAMIC 0.022MF/25V
C229	1-164-227-11	s	CAPACITOR,CERAMIC 0.022MF/25V
C230	1-164-227-11	s	CAPACITOR,CERAMIC 0.022MF/25V
C231	1-164-227-11	s	CAPACITOR,CERAMIC 0.022MF/25V
C232	1-164-227-11	s	CAPACITOR,CERAMIC 0.022MF/25V
C233	1-164-227-11	s	CAPACITOR,CERAMIC 0.022MF/25V
C234	1-164-227-11	s	CAPACITOR,CERAMIC 0.022MF/25V
C243	1-126-395-11	s	CAPACITOR,ELECT 22MF/16V(CHIP)
C244	1-126-395-11	s	CAPACITOR,ELECT 22MF/16V(CHIP)
C245	1-126-395-11	s	CAPACITOR,ELECT 22MF/16V(CHIP)
C246	1-126-395-11	s	CAPACITOR,ELECT 22MF/16V(CHIP)
C247	1-162-927-11	s	CAPACITOR,CERAMIC 100PF/50V CH
C248	1-162-927-11	s	CAPACITOR,CERAMIC 100PF/50V CH
C249	1-162-927-11	s	CAPACITOR,CERAMIC 100PF/50V CH
C250	1-162-927-11	s	CAPACITOR,CERAMIC 100PF/50V CH
C251	1-162-927-11	s	CAPACITOR,CERAMIC 100PF/50V CH
C252	1-162-927-11	s	CAPACITOR,CERAMIC 100PF/50V CH

(APR-45 BOARD(DSR-2000/2000P) SUFFIX -14)

Ref. No. or Q'ty	Part No.	SP	Description
C253	1-162-927-11	s	CAPACITOR,CERAMIC 100PF/50V CH
C254	1-162-927-11	s	CAPACITOR,CERAMIC 100PF/50V CH
C255	1-126-395-11	s	CAPACITOR,ELECT 22MF/16V(CHIP)
C256	1-126-395-11	s	CAPACITOR,ELECT 22MF/16V(CHIP)
C257	1-126-395-11	s	CAPACITOR,ELECT 22MF/16V(CHIP)
C258	1-126-395-11	s	CAPACITOR,ELECT 22MF/16V(CHIP)
C259	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
C260	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
C261	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
C262	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
C263	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
C264	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
C265	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
C266	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
C267	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
C268	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
C269	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
C270	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
C271	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
C272	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
C273	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
C274	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
C303	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
C304	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
C305	1-109-982-11	s	CAPACITOR,CHIP CERAMIC 1MF/10V
C306	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
C307	1-104-851-11	s	CAPACITOR,TANTALUM 10MF/10V
C308	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
C309	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
C310	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
C311	1-162-927-11	s	CAPACITOR,CERAMIC 100PF/50V CH
C312	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
C313	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
C314	1-164-217-11	s	CAPACITOR,CERAMIC 150PF/50V CH
C315	1-164-217-11	s	CAPACITOR,CERAMIC 150PF/50V CH
C316	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
C317	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
C323	1-104-851-11	s	CAPACITOR,TANTALUM 10MF/10V
C324	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
C325	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
C326	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
C327	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
C328	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
C329	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
C330	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
C331	1-162-921-11	s	CAPACITOR,CERAMIC 33PF/50V CH
C333	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
C367	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
C368	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
C369	1-109-982-11	s	CAPACITOR,CHIP CERAMIC 1MF/10V
C370	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
C371	1-104-851-11	s	CAPACITOR,TANTALUM 10MF/10V
C372	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
C373	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
C374	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
C375	1-162-927-11	s	CAPACITOR,CERAMIC 100PF/50V CH
C376	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
C377	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
C378	1-162-927-11	s	CAPACITOR,CERAMIC 100PF/50V CH

(APR-45 BOARD(DSR-2000/2000P) SUFFIX -14)

Ref. No. or Q'ty	Part No.	SP	Description
C379	1-162-927-11	s	CAPACITOR,CERAMIC 100PF/50V CH
C380	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
C381	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
C382	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
C383	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
C401	1-126-396-11	s	CAPACITOR,ELECT 47MF/16V(CHIP)
C402	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
C403	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
C404	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
C405	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
C406	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
C407	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
C408	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
C409	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
C410	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
C411	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
C412	1-126-396-11	s	CAPACITOR,ELECT 47MF/16V(CHIP)
C413	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
C414	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
C415	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
C416	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
C417	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
C418	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
C419	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
C421	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
C422	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
C423	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
C424	1-126-396-11	s	CAPACITOR,ELECT 47MF/16V(CHIP)
C425	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
C426	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
C427	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
C428	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
C429	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
C430	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
C431	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
C432	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
C433	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
C434	1-126-396-11	s	CAPACITOR,ELECT 47MF/16V(CHIP)
C435	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
C436	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
C437	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
C438	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
C439	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
C440	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
C441	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
C443	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
C444	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
C445	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
C447	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
C448	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
C454	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
C455	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
C456	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
C457	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
C458	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
C459	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
C460	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
C464	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
C465	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF

(APR-45 BOARD(DSR-2000/2000P) SUFFIX -14)

Ref. No. or Q'ty	Part No.	SP	Description
C466	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
C467	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
C468	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
C469	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
C473	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
C474	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
C475	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
C476	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
C477	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
C478	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
C479	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
C480	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
C481	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
C519	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
C520	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
C523	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
C524	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
C525	1-126-396-11	s	CAPACITOR,ELECT 47MF/16V(CHIP)
C526	1-126-396-11	s	CAPACITOR,ELECT 47MF/16V(CHIP)
C527	1-128-416-11	s	CAPACITOR ELECT 100MF/16V(105C
C529	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
C536	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
C538	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
C543	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
C601	1-164-227-11	s	CAPACITOR,CERAMIC 0.022MF/25V
C602	1-164-227-11	s	CAPACITOR,CERAMIC 0.022MF/25V
C603	1-126-394-11	s	CAPACITOR,ELECT 10MF/16V(CHIP)
C604	1-126-394-11	s	CAPACITOR,ELECT 10MF/16V(CHIP)
C605	1-104-852-11	s	CAPACITOR,TANTALUM 22MF/10V
C606	1-164-227-11	s	CAPACITOR,CERAMIC 0.022MF/25V
C607	1-164-227-11	s	CAPACITOR,CERAMIC 0.022MF/25V
C608	1-164-227-11	s	CAPACITOR,CERAMIC 0.022MF/25V
C609	1-164-227-11	s	CAPACITOR,CERAMIC 0.022MF/25V
C610	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
C611	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
C612	1-162-970-11	s	CAPACITOR CERAMIC 0.01MF/25V B
C613	1-126-395-11	s	CAPACITOR,ELECT 22MF/16V(CHIP)
C614	1-126-395-11	s	CAPACITOR,ELECT 22MF/16V(CHIP)
C615	1-104-852-11	s	CAPACITOR,TANTALUM 22MF/10V
C651	1-164-315-11	s	CAPACITOR,CERAMIC 470PF/50V CH
C701	1-104-851-11	s	CAPACITOR,TANTALUM 10MF/10V
C702	1-104-851-11	s	CAPACITOR,TANTALUM 10MF/10V
C703	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
C704	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
C705	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
C706	1-104-851-11	s	CAPACITOR,TANTALUM 10MF/10V
C707	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
C708	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
C709	1-104-852-11	s	CAPACITOR,TANTALUM 22MF/10V
C710	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
C711	1-109-982-11	s	CAPACITOR,CHIP CERAMIC 1MF/10V
C712	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
C713	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
C714	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
C715	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
C716	1-104-852-11	s	CAPACITOR,TANTALUM 22MF/10V
C717	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
C718	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
C719	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF

(APR-45 BOARD(DSR-2000/2000P) SUFFIX -14)

Ref. No. or Q'ty	Part No.	SP	Description
C720	1-162-923-11	s	CAPACITOR,CERAMIC 47PF/50V CH
C721	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
C722	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
C723	1-109-982-11	s	CAPACITOR,CHIP CERAMIC 1MF/10V
C724	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
C725	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
C726	1-162-915-11	s	CAPACITOR,CERAMIC 10PF/50V CH
C727	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
C728	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
C729	1-104-851-11	s	CAPACITOR,TANTALUM 10MF/10V
C730	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
C731	1-104-851-11	s	CAPACITOR,TANTALUM 10MF/10V
C732	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
C733	1-104-851-11	s	CAPACITOR,TANTALUM 10MF/10V
C738	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
C739	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
C740	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
C741	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
C742	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
C743	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
C744	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
C751	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
C756	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
C757	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
C758	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
C759	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
C760	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
C761	1-104-851-11	s	CAPACITOR,TANTALUM 10MF/10V
C762	1-104-851-11	s	CAPACITOR,TANTALUM 10MF/10V
C763	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
C764	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
C765	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
C766	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
C767	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
C768	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
C769	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
C770	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
C771	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
C772	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
C773	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
C774	1-162-915-11	s	CAPACITOR,CERAMIC 10PF/50V CH
C775	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
C776	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
C777	1-162-911-11	s	CAPACITOR,CERAMIC 6PF/50V 1608
C778	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
C779	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
C780	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
C781	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
C782	1-104-851-11	s	CAPACITOR,TANTALUM 10MF/10V
C783	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
C784	1-162-907-11	s	CAPACITOR,CERAMIC 2PF/50V(CK)
C786	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
C801	1-126-394-11	s	CAPACITOR,ELECT 10MF/16V(CHIP)
C802	1-126-394-11	s	CAPACITOR,ELECT 10MF/16V(CHIP)
C803	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
C804	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
C805	1-126-395-11	s	CAPACITOR,ELECT 22MF/16V(CHIP)
C806	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
C807	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF

(APR-45 BOARD(DSR-2000/2000P) SUFFIX -14)

Ref. No. or Q'ty	Part No.	SP	Description
C808	1-135-259-11	s	CAPACITOR,TANTALUM 10MF/6.3V
C809	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
C810	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
C811	1-126-395-11	s	CAPACITOR,ELECT 22MF/16V(CHIP)
C812	1-109-982-11	s	CAPACITOR,CHIP CERAMIC 1MF/10V
C813	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
C814	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
C815	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
C816	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
C817	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
C818	1-126-395-11	s	CAPACITOR,ELECT 22MF/16V(CHIP)
C819	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
C820	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
C821	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
C822	1-162-923-11	s	CAPACITOR,CERAMIC 47PF/50V CH
C823	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
C824	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
C825	1-109-982-11	s	CAPACITOR,CHIP CERAMIC 1MF/10V
C826	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
C827	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
C828	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
C829	1-162-915-11	s	CAPACITOR,CERAMIC 10PF/50V CH
C830	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
C831	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
C832	1-126-394-11	s	CAPACITOR,ELECT 10MF/16V(CHIP)
C833	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
C834	1-126-394-11	s	CAPACITOR,ELECT 10MF/16V(CHIP)
C835	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
C836	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
C838	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
C839	1-126-394-11	s	CAPACITOR,ELECT 10MF/16V(CHIP)
C840	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
C841	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
C842	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
C843	1-126-394-11	s	CAPACITOR,ELECT 10MF/16V(CHIP)
C844	1-162-907-11	s	CAPACITOR,CERAMIC 2PF/50V(CK)
C912	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
C913	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
C952	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
C953	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
C1201	1-162-923-11	s	CAPACITOR,CERAMIC 47PF/50V CH
C1202	1-128-416-11	s	CAPACITOR ELECT 100MF/16V(105C
C1203	1-126-396-11	s	CAPACITOR,ELECT 47MF/16V(CHIP)
C1204	1-126-395-11	s	CAPACITOR,ELECT 22MF/16V(CHIP)
C1205	1-128-416-11	s	CAPACITOR ELECT 100MF/16V(105C
C1206	1-104-851-11	s	CAPACITOR,TANTALUM 10MF/10V
C1207	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
C1208	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
C1209	1-104-851-11	s	CAPACITOR,TANTALUM 10MF/10V
C1210	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
C1211	1-126-394-11	s	CAPACITOR,ELECT 10MF/16V(CHIP)
C1212	1-126-394-11	s	CAPACITOR,ELECT 10MF/16V(CHIP)
C1213	1-126-394-11	s	CAPACITOR,ELECT 10MF/16V(CHIP)
C1214	1-126-394-11	s	CAPACITOR,ELECT 10MF/16V(CHIP)
C1215	1-162-927-11	s	CAPACITOR,CERAMIC 100PF/50V CH
C1216	1-162-927-11	s	CAPACITOR,CERAMIC 100PF/50V CH
C1217	1-162-927-11	s	CAPACITOR,CERAMIC 100PF/50V CH
C1218	1-162-927-11	s	CAPACITOR,CERAMIC 100PF/50V CH
C1250	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF

(APR-45 BOARD(DSR-2000/2000P) SUFFIX -14)

Ref. No. or Q'ty	Part No.	SP	Description
C1251	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
C1252	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
C1253	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
C1254	1-126-396-11	s	CAPACITOR,ELECT 47MF/16V(CHIP)
C1255	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
C1256	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
C1257	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
C1258	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
C1259	1-128-964-11	s	CAPACITOR,TANTALUM 100MF/6.3V
C1261	1-126-396-11	s	CAPACITOR,ELECT 47MF/16V(CHIP)
C1262	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
C1263	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
C1264	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
C1265	1-109-982-11	s	CAPACITOR,CHIP CERAMIC 1MF/10V
C1266	1-104-851-11	s	CAPACITOR,TANTALUM 10MF/10V
C1267	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
C1268	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
C1269	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
C1270	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
C1271	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
C1272	1-162-927-11	s	CAPACITOR,CERAMIC 100PF/50V CH
C1273	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
C1274	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
C1275	1-164-217-11	s	CAPACITOR,CERAMIC 150PF/50V CH
C1276	1-164-217-11	s	CAPACITOR,CERAMIC 150PF/50V CH
C1277	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
C1278	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
C1279	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
C1280	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
C1281	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
C1282	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
C1283	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
C1284	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
C1285	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
C1286	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
C1287	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
C1288	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
C1289	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
C1510	1-126-394-11	s	CAPACITOR,ELECT 10MF/16V(CHIP)
C1511	1-126-394-11	s	CAPACITOR,ELECT 10MF/16V(CHIP)
C1512	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
C1513	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
C1514	1-126-395-11	s	CAPACITOR,ELECT 22MF/16V(CHIP)
C1515	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
C1516	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
C1517	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
C1518	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
C1519	1-135-259-11	s	CAPACITOR,TANTALUM 10MF/6.3V
C1520	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
C1521	1-126-394-11	s	CAPACITOR,ELECT 10MF/16V(CHIP)
C1522	1-126-394-11	s	CAPACITOR,ELECT 10MF/16V(CHIP)
C1523	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
C1524	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
C1525	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
C1526	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
C1527	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
C1528	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
C1529	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
C1530	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF

(APR-45 BOARD(DSR-2000/2000P) SUFFIX -14)

Ref. No. or Q'ty	Part No.	SP	Description
C1531	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
C1532	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
C1533	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
C1534	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
C1535	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
C1536	1-162-915-11	s	CAPACITOR,CERAMIC 10PF/50V CH
C1537	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
C1538	1-126-394-11	s	CAPACITOR,ELECT 10MF/16V(CHIP)
C1539	1-162-911-11	s	CAPACITOR,CERAMIC 6PF/50V 1608
C1540	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
C1541	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
C1542	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
C1543	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
C1544	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
C1545	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
C1546	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
C1547	1-126-394-11	s	CAPACITOR,ELECT 10MF/16V(CHIP)
C1548	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
C1549	1-162-907-11	s	CAPACITOR,CERAMIC 2PF/50V(CK)
C1550	1-162-907-11	s	CAPACITOR,CERAMIC 2PF/50V(CK)
C1560	1-126-394-11	s	CAPACITOR,ELECT 10MF/16V(CHIP)
C1561	1-126-394-11	s	CAPACITOR,ELECT 10MF/16V(CHIP)
C1562	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
C1563	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
C1564	1-126-395-11	s	CAPACITOR,ELECT 22MF/16V(CHIP)
C1565	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
C1566	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
C1567	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
C1568	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
C1569	1-135-259-11	s	CAPACITOR,TANTALUM 10MF/6.3V
C1570	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
C1571	1-126-394-11	s	CAPACITOR,ELECT 10MF/16V(CHIP)
C1572	1-126-394-11	s	CAPACITOR,ELECT 10MF/16V(CHIP)
C1573	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
C1574	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
C1575	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
C1576	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
C1577	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
C1578	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
C1579	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
C1580	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
C1581	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
C1582	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
C1583	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
C1584	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
C1585	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
C1586	1-162-915-11	s	CAPACITOR,CERAMIC 10PF/50V CH
C1587	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
C1588	1-126-394-11	s	CAPACITOR,ELECT 10MF/16V(CHIP)
C1589	1-162-911-11	s	CAPACITOR,CERAMIC 6PF/50V 1608
C1590	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
C1591	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
C1592	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
C1593	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
C1594	1-126-394-11	s	CAPACITOR,ELECT 10MF/16V(CHIP)
C1595	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
C1596	1-162-907-11	s	CAPACITOR,CERAMIC 2PF/50V(CK)
C1700	1-128-393-11	s	CAPACITOR,ELECT 100MF/10V
C1701	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF

(APR-45 BOARD(DSR-2000/2000P) SUFFIX -14)

Ref. No. or Q'ty	Part No.	SP	Description	
C1702	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF	
C1703	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF	
C1704	1-126-396-11	s	CAPACITOR,ELECT 47MF/16V(CHIP)	
C1705	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF	
C1706	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF	
C1707	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF	
C1708	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF	
C1709	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF	
C1710	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF	
C1711	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF	
C1712	1-126-396-11	s	CAPACITOR,ELECT 47MF/16V(CHIP)	
C1713	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF	
CN701	1-764-243-11	o	CONNECTOR (COAXIAL)	
CN751	1-764-243-11	o	CONNECTOR (COAXIAL)	
CN801	1-764-243-11	o	CONNECTOR (COAXIAL)	
CN802	1-764-243-11	o	CONNECTOR (COAXIAL)	
CN1501	1-764-243-11	o	CONNECTOR (COAXIAL)	
CN1502	1-764-243-11	o	CONNECTOR (COAXIAL)	
CN1551	1-764-243-11	o	CONNECTOR (COAXIAL)	
CN1700	1-770-677-11	o	CONNECTOR,BOARD TO BOARD 50P	
D2	8-719-941-09	s	DIODE DAP202U	
D3	8-719-941-09	s	DIODE DAP202U	
D57	8-719-951-22	s	DIODE IMN10	
D61	8-719-041-39	s	DIODE KV1470	(5MA)
D102	8-719-941-09	s	DIODE DAP202U	
D103	8-719-941-09	s	DIODE DAP202U	
D301	8-719-041-39	s	DIODE KV1470	(5MA)
D351	8-719-041-39	s	DIODE KV1470	(5MA)
D601	8-719-029-63	s	DIODE RD4.3UH-T1	
D602	8-719-029-63	s	DIODE RD4.3UH-T1	
D603	8-719-029-63	s	DIODE RD4.3UH-T1	
D801	8-719-987-43	s	LED CL-150PG-CD	
D1501	8-719-989-22	s	LED CL-150R-CD	
D1551	8-719-989-22	s	LED CL-150R-CD	
D1700	8-719-987-43	s	LED CL-150PG-CD	
FB701	1-543-644-11	s	BEAD, FERRITE (CHIP)	
FB702	1-543-644-11	s	BEAD, FERRITE (CHIP)	
FB703	1-543-644-11	s	BEAD, FERRITE (CHIP)	
FB751	1-543-644-11	s	BEAD, FERRITE (CHIP)	
FB752	1-543-644-11	s	BEAD, FERRITE (CHIP)	
FB753	1-543-644-11	s	BEAD, FERRITE (CHIP)	
FB754	1-543-644-11	s	BEAD, FERRITE (CHIP)	
FB802	1-543-644-11	s	BEAD, FERRITE (CHIP)	
FB803	1-543-644-11	s	BEAD, FERRITE (CHIP)	
FB805	1-543-644-11	s	BEAD, FERRITE (CHIP)	
FB806	1-543-644-11	s	BEAD, FERRITE (CHIP)	
FB807	1-543-644-11	s	BEAD, FERRITE (CHIP)	
FB808	1-543-644-11	s	BEAD, FERRITE (CHIP)	
FB809	1-543-644-11	s	BEAD, FERRITE (CHIP)	
FB1501	1-543-644-11	s	BEAD, FERRITE (CHIP)	
FB1503	1-543-644-11	s	BEAD, FERRITE (CHIP)	
FB1504	1-543-644-11	s	BEAD, FERRITE (CHIP)	
FB1505	1-543-644-11	s	BEAD, FERRITE (CHIP)	
FB1506	1-543-644-11	s	BEAD, FERRITE (CHIP)	
FB1551	1-543-644-11	s	BEAD, FERRITE (CHIP)	
FB1553	1-543-644-11	s	BEAD, FERRITE (CHIP)	
FB1554	1-543-644-11	s	BEAD, FERRITE (CHIP)	
FB1555	1-543-644-11	s	BEAD, FERRITE (CHIP)	

(APR-45 BOARD(DSR-2000/2000P) SUFFIX -14)

Ref. No. or Q'ty	Part No.	SP	Description
FL901	1-233-674-21	s	FILTER, EMI
FL902	1-233-674-21	s	FILTER, EMI
IC7	8-759-394-76	s	IC NJM2068M-D (TE2)
IC8	8-759-394-76	s	IC NJM2068M-D (TE2)
IC16	8-759-833-99	s	IC MC74HC4052ADTR2
IC17	8-759-833-99	s	IC MC74HC4052ADTR2
IC18	8-759-711-85	s	IC NJM4580E-D
IC19	8-759-711-85	s	IC NJM4580E-D
IC20	8-759-462-08	s	IC AK5352-VF (E2)
IC51	8-759-711-85	s	IC NJM4580E-D
IC55	8-759-711-85	s	IC NJM4580E-D
IC56	8-759-711-85	s	IC NJM4580E-D
IC61	8-759-650-01	s	IC CXD9125R
IC62	6-700-128-01	s	IC XC2S150-5P0208C
IC63	8-759-490-41	s	IC TC74VHCT541AFT(EL)
IC64	8-749-017-21	s	IC SI-3025LS-TL
IC65	8-759-702-02	s	IC NJM062M
IC66	8-759-362-16	s	IC CXD2913AQ
IC67	8-729-039-85	s	IC UPC29L05T
IC68	8-759-082-58	s	IC TC7W08FU
IC69	8-759-426-24	s	IC TC7ST08FU(TE85R)
IC70	8-759-524-50	s	IC TC74VHC541FT(EL)
IC72	8-759-490-41	s	IC TC74VHCT541AFT(EL)
IC73	8-759-490-41	s	IC TC74VHCT541AFT(EL)
IC74	8-759-490-41	s	IC TC74VHCT541AFT(EL)
IC107	8-759-394-76	s	IC NJM2068M-D (TE2)
IC108	8-759-394-76	s	IC NJM2068M-D (TE2)
IC116	8-759-833-99	s	IC MC74HC4052ADTR2
IC117	8-759-833-99	s	IC MC74HC4052ADTR2
IC118	8-759-711-85	s	IC NJM4580E-D
IC119	8-759-711-85	s	IC NJM4580E-D
IC120	8-759-462-08	s	IC AK5352-VF (E2)
IC201	8-759-536-23	s	IC AK4324-VF-E2
IC202	8-759-536-23	s	IC AK4324-VF-E2
IC203	8-759-711-85	s	IC NJM4580E-D
IC204	8-759-711-85	s	IC NJM4580E-D
IC205	8-759-711-85	s	IC NJM4580E-D
IC206	8-759-711-85	s	IC NJM4580E-D
IC207	8-759-833-99	s	IC MC74HC4052ADTR2
IC208	8-759-833-99	s	IC MC74HC4052ADTR2
IC209	8-759-833-99	s	IC MC74HC4052ADTR2
IC210	8-759-833-99	s	IC MC74HC4052ADTR2
IC211	8-759-711-85	s	IC NJM4580E-D
IC212	8-759-711-85	s	IC NJM4580E-D
IC213	8-759-711-85	s	IC NJM4580E-D
IC214	8-759-711-85	s	IC NJM4580E-D
IC215	8-759-833-99	s	IC MC74HC4052ADTR2
IC216	8-759-833-99	s	IC MC74HC4052ADTR2
IC217	8-759-833-99	s	IC MC74HC4052ADTR2
IC218	8-759-833-99	s	IC MC74HC4052ADTR2
IC305	8-759-362-16	s	IC CXD2913AQ
IC306	8-759-702-02	s	IC NJM062M
IC307	8-729-039-85	s	IC UPC29L05T
IC314	8-759-326-71	s	IC CXD8517Q
IC315	8-759-326-71	s	IC CXD8517Q
IC316	8-759-523-84	s	IC TC74VHC14FT (EL)
IC317	8-759-426-24	s	IC TC7ST08FU(TE85R)
IC353	8-759-702-02	s	IC NJM062M

(APR-45 BOARD(DSR-2000/2000P) SUFFIX -14)

Ref. No. or Q'ty	Part No.	SP	Description
IC354	8-759-362-16	s	IC CXD2913AQ
IC355	8-729-039-85	s	IC UPC29L05T
IC356	8-759-524-50	s	IC TC74VHC541FT(EL)
IC357	8-759-490-41	s	IC TC74VHCT541AFT(EL)
IC401	8-759-549-20	s	IC SN74LV541APWR
IC402	8-759-523-94	s	IC TC74VHC32FT(EL)
IC403	8-752-391-87	s	IC CXD2712R
IC405	8-759-573-65	s	IC IDT71V016S20PHAU-TL
IC406	8-752-391-87	s	IC CXD2712R
IC407	8-752-391-87	s	IC CXD2712R
IC409	8-759-573-65	s	IC IDT71V016S20PHAU-TL
IC410	8-752-391-87	s	IC CXD2712R
IC412	8-759-196-96	s	IC TC7SH08FU (TE85R)
IC413	8-759-196-96	s	IC TC7SH08FU (TE85R)
IC414	8-759-196-96	s	IC TC7SH08FU (TE85R)
IC415	8-759-196-96	s	IC TC7SH08FU (TE85R)
IC452	8-759-490-41	s	IC TC74VHCT541AFT(EL)
IC456	8-759-524-50	s	IC TC74VHC541FT(EL)
IC457	8-759-326-71	s	IC CXD8517Q
IC458	8-759-326-71	s	IC CXD8517Q
IC463	8-759-326-71	s	IC CXD8517Q
IC464	8-759-326-71	s	IC CXD8517Q
IC469	8-759-326-71	s	IC CXD8517Q
IC470	8-759-326-71	s	IC CXD8517Q
IC471	8-759-490-41	s	IC TC74VHCT541AFT(EL)
IC472	8-759-549-20	s	IC SN74LV541APWR
IC503	8-759-490-41	s	IC TC74VHCT541AFT(EL)
IC504	8-759-679-36	s	IC TC7WT125FU(TE12R)
IC507	8-759-180-86	s	IC TC7W74F-TE12L
IC510	8-759-669-75	s	IC TLC2932IPWR
IC511	8-759-669-75	s	IC TLC2932IPWR
IC601	8-759-324-03	s	IC HA17431UA(TL)
IC602	8-759-710-78	s	IC NJM082BM
IC603	8-759-710-78	s	IC NJM082BM
IC651	8-759-679-36	s	IC TC7WT125FU(TE12R)
IC701	8-759-259-77	s	IC PQ20VZ5U
IC702	8-752-078-34	s	IC CXB1342R
IC705	8-759-490-41	s	IC TC74VHCT541AFT(EL)
IC706	8-759-524-50	s	IC TC74VHC541FT(EL)
IC707	8-759-524-50	s	IC TC74VHC541FT(EL)
IC708	8-759-524-50	s	IC TC74VHC541FT(EL)
IC709	8-759-271-86	s	IC TC7SH04FU
IC710	8-759-196-96	s	IC TC7SH08FU (TE85R)
IC711	8-759-271-86	s	IC TC7SH04FU
IC712	8-759-447-77	s	IC TC7WH74FU (TE12R)
IC751	8-759-524-50	s	IC TC74VHC541FT(EL)
IC753	8-752-078-32	s	IC CXB1341R
IC754	8-759-524-50	s	IC TC74VHC541FT(EL)
IC801	8-759-324-03	s	IC HA17431UA(TL)
IC802	8-752-078-34	s	IC CXB1342R
IC911	8-759-524-50	s	IC TC74VHC541FT(EL)
IC912	8-759-524-50	s	IC TC74VHC541FT(EL)
IC913	8-759-447-77	s	IC TC7WH74FU (TE12R)
IC914	8-759-547-54	s	IC TC7SET00FU(TE85R)
IC952	8-759-524-50	s	IC TC74VHC541FT(EL)
IC953	8-759-524-50	s	IC TC74VHC541FT(EL)
IC954	8-759-447-77	s	IC TC7WH74FU (TE12R)
IC1201	8-759-536-23	s	IC AK4324-VF-E2
IC1507	8-759-324-03	s	IC HA17431UA(TL)

(APR-45 BOARD(DSR-2000/2000P) SUFFIX -14)

Ref. No. or Q'ty	Part No.	SP	Description
IC1508	8-752-078-32	s	IC CXB1341R
IC1557	8-759-324-03	s	IC HA17431UA(TL)
IC1558	8-752-078-32	s	IC CXB1341R
IC1701	8-759-537-83	s	IC MBM29F400BC-70PFTN
IC1702	8-759-655-86	o	IC XC9536VQ44-DSR2000-DPR-V10
L61	1-414-398-11	s	INDUCTOR (SMD) 10UH
L63	1-414-398-11	s	INDUCTOR (SMD) 10UH
L301	1-414-398-11	s	INDUCTOR (SMD) 10UH
L303	1-414-398-11	s	INDUCTOR (SMD) 10UH
L401	1-414-398-11	s	INDUCTOR (SMD) 10UH
L402	1-414-398-11	s	INDUCTOR (SMD) 10UH
L403	1-414-398-11	s	INDUCTOR (SMD) 10UH
L404	1-414-398-11	s	INDUCTOR (SMD) 10UH
L451	1-412-939-11	s	INDUCTOR 1.0UH (2520)
L452	1-412-939-11	s	INDUCTOR 1.0UH (2520)
L453	1-412-939-11	s	INDUCTOR 1.0UH (2520)
L454	1-412-939-11	s	INDUCTOR 1.0UH (2520)
L455	1-412-939-11	s	INDUCTOR 1.0UH (2520)
L456	1-412-939-11	s	INDUCTOR 1.0UH (2520)
L501	1-414-398-11	s	INDUCTOR (SMD) 10UH
L502	1-414-398-11	s	INDUCTOR (SMD) 10UH
L507	1-414-398-11	s	INDUCTOR (SMD) 10UH
L601	1-424-643-11	s	COIL, CHOKE 10UH
L602	1-424-643-11	s	COIL, CHOKE 10UH
L701	1-410-797-11	s	CHIP INDUCTOR 0.015UH (3225)
L702	1-412-939-11	s	INDUCTOR 1.0UH (2520)
L801	1-410-797-11	s	CHIP INDUCTOR 0.015UH (3225)
L1700	1-414-398-11	s	INDUCTOR (SMD) 10UH
L1701	1-414-398-11	s	INDUCTOR (SMD) 10UH
LV61	1-411-984-11	s	COIL, VARIABLE
LV301	1-411-984-11	s	COIL, VARIABLE
LV351	1-411-984-11	s	COIL, VARIABLE
PS701	1-533-282-21	s	CIRCUIT PROTECTOR 2A (3225)
PS702	1-533-282-21	s	CIRCUIT PROTECTOR 2A (3225)
Q51	8-729-209-07	s	TRANSISTOR 2SC4213-B
Q53	8-729-141-48	s	TRANSISTOR 2SB624-BV345
Q54	8-729-029-14	s	TRANSISTOR DTC144EUA-T106
Q55	8-729-110-92	s	TRANSISTOR 2SK425-X13
Q601	8-729-020-94	s	TRANSISTOR 2SA1314C-TE12L
Q602	8-729-808-42	s	TRANSISTOR 2SD1624-T
Q603	8-729-141-48	s	TRANSISTOR 2SB624-BV345
Q651	8-729-029-14	s	TRANSISTOR DTC144EUA-T106
Q652	8-729-029-14	s	TRANSISTOR DTC144EUA-T106
Q751	8-729-105-68	s	TRANSISTOR 2SC3356-K
Q752	8-729-105-68	s	TRANSISTOR 2SC3356-K
Q753	8-729-105-68	s	TRANSISTOR 2SC3356-K
Q801	8-729-807-51	s	TRANSISTOR 2SD1623-S
Q802	8-729-029-14	s	TRANSISTOR DTC144EUA-T106
Q803	8-729-028-91	s	TRANSISTOR DTA144EUA-T106
Q804	8-729-105-68	s	TRANSISTOR 2SC3356-K
Q805	8-729-105-68	s	TRANSISTOR 2SC3356-K
Q806	8-729-105-68	s	TRANSISTOR 2SC3356-K
Q807	8-729-029-14	s	TRANSISTOR DTC144EUA-T106
Q1501	8-729-807-51	s	TRANSISTOR 2SD1623-S
Q1502	8-729-029-14	s	TRANSISTOR DTC144EUA-T106
Q1503	8-729-028-91	s	TRANSISTOR DTA144EUA-T106
Q1504	8-729-028-91	s	TRANSISTOR DTA144EUA-T106
Q1505	8-729-105-68	s	TRANSISTOR 2SC3356-K

(APR-45 BOARD(DSR-2000/2000P) SUFFIX -14)

Ref. No. or Q'ty	Part No.	SP	Description
Q1506	8-729-105-68	s	TRANSISTOR 2SC3356-K
Q1507	8-729-105-68	s	TRANSISTOR 2SC3356-K
Q1508	8-729-105-68	s	TRANSISTOR 2SC3356-K
Q1551	8-729-807-51	s	TRANSISTOR 2SD1623-S
Q1552	8-729-029-14	s	TRANSISTOR DTC144EUA-T106
Q1553	8-729-028-91	s	TRANSISTOR DTA144EUA-T106
Q1554	8-729-028-91	s	TRANSISTOR DTA144EUA-T106
Q1555	8-729-105-68	s	TRANSISTOR 2SC3356-K
Q1556	8-729-105-68	s	TRANSISTOR 2SC3356-K
Q1557	8-729-105-68	s	TRANSISTOR 2SC3356-K
Q1700	8-729-028-91	s	TRANSISTOR DTA144EUA-T106
Q1701	8-729-029-14	s	TRANSISTOR DTC144EUA-T106
Q1702	8-729-029-14	s	TRANSISTOR DTC144EUA-T106
R1	1-216-864-11	s	CONDUCTOR, CHIP (1608)
R2	1-218-855-11	s	RESISTOR,CHIP 2.2K 1/16W(1608)
R3	1-216-864-11	s	CONDUCTOR, CHIP (1608)
R4	1-218-855-11	s	RESISTOR,CHIP 2.2K 1/16W(1608)
R5	1-218-855-11	s	RESISTOR,CHIP 2.2K 1/16W(1608)
R6	1-218-855-11	s	RESISTOR,CHIP 2.2K 1/16W(1608)
R41	1-218-855-11	s	RESISTOR,CHIP 2.2K 1/16W(1608)
R42	1-218-855-11	s	RESISTOR,CHIP 2.2K 1/16W(1608)
R43	1-218-855-11	s	RESISTOR,CHIP 2.2K 1/16W(1608)
R44	1-218-855-11	s	RESISTOR,CHIP 2.2K 1/16W(1608)
R99	1-218-843-11	s	RESISTOR,CHIP 680 1/16W (1608)
R101	1-216-864-11	s	CONDUCTOR, CHIP (1608)
R103	1-216-864-11	s	CONDUCTOR, CHIP (1608)
R105	1-218-855-11	s	RESISTOR,CHIP 2.2K 1/16W(1608)
R106	1-218-855-11	s	RESISTOR,CHIP 2.2K 1/16W(1608)
R109	1-218-855-11	s	RESISTOR,CHIP 2.2K 1/16W(1608)
R110	1-218-855-11	s	RESISTOR,CHIP 2.2K 1/16W(1608)
R141	1-218-855-11	s	RESISTOR,CHIP 2.2K 1/16W(1608)
R142	1-218-855-11	s	RESISTOR,CHIP 2.2K 1/16W(1608)
R143	1-218-855-11	s	RESISTOR,CHIP 2.2K 1/16W(1608)
R144	1-218-855-11	s	RESISTOR,CHIP 2.2K 1/16W(1608)
R199	1-218-843-11	s	RESISTOR,CHIP 680 1/16W (1608)
R201	1-211-969-11	s	RESISTOR,CHIP 10 1/16W (1608)
R202	1-211-969-11	s	RESISTOR,CHIP 10 1/16W (1608)
R205	1-218-880-11	s	RESISTOR,CHIP 24K 1/16W (1608)
R206	1-218-880-11	s	RESISTOR,CHIP 24K 1/16W (1608)
R207	1-218-880-11	s	RESISTOR,CHIP 24K 1/16W (1608)
R208	1-218-880-11	s	RESISTOR,CHIP 24K 1/16W (1608)
R209	1-218-881-11	s	RESISTOR, CHIP 27K 1/16W(1608)
R210	1-218-881-11	s	RESISTOR, CHIP 27K 1/16W(1608)
R211	1-218-881-11	s	RESISTOR, CHIP 27K 1/16W(1608)
R212	1-218-881-11	s	RESISTOR, CHIP 27K 1/16W(1608)
R213	1-218-880-11	s	RESISTOR,CHIP 24K 1/16W (1608)
R214	1-218-880-11	s	RESISTOR,CHIP 24K 1/16W (1608)
R215	1-218-880-11	s	RESISTOR,CHIP 24K 1/16W (1608)
R216	1-218-880-11	s	RESISTOR,CHIP 24K 1/16W (1608)
R217	1-218-881-11	s	RESISTOR, CHIP 27K 1/16W(1608)
R218	1-218-881-11	s	RESISTOR, CHIP 27K 1/16W(1608)
R219	1-218-881-11	s	RESISTOR, CHIP 27K 1/16W(1608)
R220	1-218-881-11	s	RESISTOR, CHIP 27K 1/16W(1608)
R221	1-216-864-11	s	CONDUCTOR, CHIP (1608)
R222	1-216-864-11	s	CONDUCTOR, CHIP (1608)
R223	1-216-864-11	s	CONDUCTOR, CHIP (1608)
R224	1-216-864-11	s	CONDUCTOR, CHIP (1608)
R225	1-216-864-11	s	CONDUCTOR, CHIP (1608)

(APR-45 BOARD(DSR-2000/2000P) SUFFIX -14)

Ref. No. or Q'ty	Part No.	SP	Description
R226	1-216-864-11	s	CONDUCTOR, CHIP (1608)
R227	1-216-864-11	s	CONDUCTOR, CHIP (1608)
R228	1-216-864-11	s	CONDUCTOR, CHIP (1608)
R229	1-216-864-11	s	CONDUCTOR, CHIP (1608)
R230	1-216-864-11	s	CONDUCTOR, CHIP (1608)
R231	1-216-864-11	s	CONDUCTOR, CHIP (1608)
R232	1-216-864-11	s	CONDUCTOR, CHIP (1608)
R237	1-218-865-11	s	RESISTOR,CHIP 5.6K 1/16W(1608)
R238	1-218-868-11	s	RESISTOR,CHIP 7.5K 1/16W(1608)
R239	1-218-875-11	s	RESISTOR,CHIP 15K 1/16W (1608)
R240	1-218-345-11	s	RESISTOR,CHIP 9.1K 1/16W(1608)
R241	1-218-865-11	s	RESISTOR,CHIP 5.6K 1/16W(1608)
R242	1-218-868-11	s	RESISTOR,CHIP 7.5K 1/16W(1608)
R243	1-218-875-11	s	RESISTOR,CHIP 15K 1/16W (1608)
R244	1-218-345-11	s	RESISTOR,CHIP 9.1K 1/16W(1608)
R245	1-218-865-11	s	RESISTOR,CHIP 5.6K 1/16W(1608)
R246	1-218-868-11	s	RESISTOR,CHIP 7.5K 1/16W(1608)
R247	1-218-875-11	s	RESISTOR,CHIP 15K 1/16W (1608)
R248	1-218-345-11	s	RESISTOR,CHIP 9.1K 1/16W(1608)
R249	1-218-865-11	s	RESISTOR,CHIP 5.6K 1/16W(1608)
R250	1-218-868-11	s	RESISTOR,CHIP 7.5K 1/16W(1608)
R251	1-218-875-11	s	RESISTOR,CHIP 15K 1/16W (1608)
R252	1-218-345-11	s	RESISTOR,CHIP 9.1K 1/16W(1608)
R253	1-218-836-11	s	RESISTOR,CHIP 360 1/16W (1608)
R254	1-216-816-11	s	RESISTOR, CHIP 390 1/16W 1608
R255	1-218-836-11	s	RESISTOR,CHIP 360 1/16W (1608)
R256	1-216-816-11	s	RESISTOR, CHIP 390 1/16W 1608
R257	1-218-836-11	s	RESISTOR,CHIP 360 1/16W (1608)
R258	1-216-816-11	s	RESISTOR, CHIP 390 1/16W 1608
R259	1-218-836-11	s	RESISTOR,CHIP 360 1/16W (1608)
R260	1-216-816-11	s	RESISTOR, CHIP 390 1/16W 1608
R261	1-218-864-11	s	RESISTOR,CHIP 5.1K 1/16W(1608)
R262	1-218-864-11	s	RESISTOR,CHIP 5.1K 1/16W(1608)
R263	1-218-864-11	s	RESISTOR,CHIP 5.1K 1/16W(1608)
R264	1-218-864-11	s	RESISTOR,CHIP 5.1K 1/16W(1608)
R265	1-218-863-11	s	RESISTOR,CHIP 4.7K 1/16W(1608)
R266	1-218-868-11	s	RESISTOR,CHIP 7.5K 1/16W(1608)
R267	1-218-875-11	s	RESISTOR,CHIP 15K 1/16W (1608)
R268	1-218-344-11	s	RESISTOR,CHIP 7.5K 1/16W(1608)
R269	1-218-863-11	s	RESISTOR,CHIP 4.7K 1/16W(1608)
R270	1-218-868-11	s	RESISTOR,CHIP 7.5K 1/16W(1608)
R271	1-218-875-11	s	RESISTOR,CHIP 15K 1/16W (1608)
R272	1-218-344-11	s	RESISTOR,CHIP 7.5K 1/16W(1608)
R273	1-218-863-11	s	RESISTOR,CHIP 4.7K 1/16W(1608)
R274	1-218-868-11	s	RESISTOR,CHIP 7.5K 1/16W(1608)
R275	1-218-875-11	s	RESISTOR,CHIP 15K 1/16W (1608)
R276	1-218-344-11	s	RESISTOR,CHIP 7.5K 1/16W(1608)
R277	1-218-863-11	s	RESISTOR,CHIP 4.7K 1/16W(1608)
R278	1-218-868-11	s	RESISTOR,CHIP 7.5K 1/16W(1608)
R279	1-218-875-11	s	RESISTOR,CHIP 15K 1/16W (1608)
R280	1-218-344-11	s	RESISTOR,CHIP 7.5K 1/16W(1608)
R281	1-211-983-11	s	RESISTOR,CHIP 39 1/16W (1608)
R282	1-216-843-11	s	RESISTOR,CHIP 68K 1/16W (1608)
R283	1-211-983-11	s	RESISTOR,CHIP 39 1/16W (1608)
R284	1-216-843-11	s	RESISTOR,CHIP 68K 1/16W (1608)
R285	1-211-983-11	s	RESISTOR,CHIP 39 1/16W (1608)
R286	1-216-843-11	s	RESISTOR,CHIP 68K 1/16W (1608)
R287	1-211-983-11	s	RESISTOR,CHIP 39 1/16W (1608)
R288	1-216-843-11	s	RESISTOR,CHIP 68K 1/16W (1608)

(APR-45 BOARD(DSR-2000/2000P) SUFFIX -14)

Ref. No. or Q'ty	Part No.	SP	Description
R289	1-218-863-11	s	RESISTOR,CHIP 4.7K 1/16W(1608)
R290	1-218-863-11	s	RESISTOR,CHIP 4.7K 1/16W(1608)
R291	1-218-863-11	s	RESISTOR,CHIP 4.7K 1/16W(1608)
R292	1-218-863-11	s	RESISTOR,CHIP 4.7K 1/16W(1608)
R308	1-218-873-11	s	RESISTOR,CHIP 12K 1/16W (1608)
R309	1-218-875-11	s	RESISTOR,CHIP 15K 1/16W (1608)
R310	1-218-887-11	s	RESISTOR,CHIP 47K 1/16W (1608)
R311	1-218-863-11	s	RESISTOR,CHIP 4.7K 1/16W(1608)
R312	1-218-875-11	s	RESISTOR,CHIP 15K 1/16W (1608)
R313	1-218-887-11	s	RESISTOR,CHIP 47K 1/16W (1608)
R314	1-218-887-11	s	RESISTOR,CHIP 47K 1/16W (1608)
R315	1-218-887-11	s	RESISTOR,CHIP 47K 1/16W (1608)
R316	1-218-887-11	s	RESISTOR,CHIP 47K 1/16W (1608)
R327	1-216-805-11	s	RESISTOR,CHIP 47 1/16W 1608
R328	1-216-805-11	s	RESISTOR,CHIP 47 1/16W 1608
R329	1-216-805-11	s	RESISTOR,CHIP 47 1/16W 1608
R330	1-218-863-11	s	RESISTOR,CHIP 4.7K 1/16W(1608)
R331	1-218-863-11	s	RESISTOR,CHIP 4.7K 1/16W(1608)
R332	1-216-864-11	s	CONDUCTOR, CHIP (1608)
R381	1-216-809-11	s	RESISTOR,CHIP 100 1/16W 1608
R389	1-218-873-11	s	RESISTOR,CHIP 12K 1/16W (1608)
R390	1-218-875-11	s	RESISTOR,CHIP 15K 1/16W (1608)
R391	1-218-887-11	s	RESISTOR,CHIP 47K 1/16W (1608)
R392	1-218-863-11	s	RESISTOR,CHIP 4.7K 1/16W(1608)
R394	1-218-887-11	s	RESISTOR,CHIP 47K 1/16W (1608)
R395	1-218-875-11	s	RESISTOR,CHIP 15K 1/16W (1608)
R396	1-218-887-11	s	RESISTOR,CHIP 47K 1/16W (1608)
R397	1-218-887-11	s	RESISTOR,CHIP 47K 1/16W (1608)
R398	1-218-887-11	s	RESISTOR,CHIP 47K 1/16W (1608)
R401	1-216-833-11	s	RESISTOR,CHIP 10K 1/16W (1608)
R402	1-216-801-11	s	RESISTOR,CHIP 22 1/16W (1608)
R403	1-216-801-11	s	RESISTOR,CHIP 22 1/16W (1608)
R404	1-216-801-11	s	RESISTOR,CHIP 22 1/16W (1608)
R405	1-216-801-11	s	RESISTOR,CHIP 22 1/16W (1608)
R406	1-216-864-11	s	CONDUCTOR, CHIP (1608)
R407	1-216-801-11	s	RESISTOR,CHIP 22 1/16W (1608)
R408	1-216-801-11	s	RESISTOR,CHIP 22 1/16W (1608)
R409	1-216-801-11	s	RESISTOR,CHIP 22 1/16W (1608)
R410	1-216-864-11	s	CONDUCTOR, CHIP (1608)
R411	1-216-864-11	s	CONDUCTOR, CHIP (1608)
R412	1-216-864-11	s	CONDUCTOR, CHIP (1608)
R413	1-216-864-11	s	CONDUCTOR, CHIP (1608)
R414	1-216-801-11	s	RESISTOR,CHIP 22 1/16W (1608)
R415	1-216-845-11	s	RESISTOR,CHIP 100K 1/16W(1608)
R416	1-216-864-11	s	CONDUCTOR, CHIP (1608)
R417	1-216-864-11	s	CONDUCTOR, CHIP (1608)
R418	1-216-845-11	s	RESISTOR,CHIP 100K 1/16W(1608)
R419	1-216-864-11	s	CONDUCTOR, CHIP (1608)
R420	1-216-864-11	s	CONDUCTOR, CHIP (1608)
R421	1-216-864-11	s	CONDUCTOR, CHIP (1608)
R422	1-216-864-11	s	CONDUCTOR, CHIP (1608)
R423	1-216-833-11	s	RESISTOR,CHIP 10K 1/16W (1608)
R424	1-216-845-11	s	RESISTOR,CHIP 100K 1/16W(1608)
R425	1-216-864-11	s	CONDUCTOR, CHIP (1608)
R426	1-216-864-11	s	CONDUCTOR, CHIP (1608)
R427	1-216-845-11	s	RESISTOR,CHIP 100K 1/16W(1608)
R428	1-216-864-11	s	CONDUCTOR, CHIP (1608)
R429	1-216-864-11	s	CONDUCTOR, CHIP (1608)
R430	1-216-864-11	s	CONDUCTOR, CHIP (1608)

(APR-45 BOARD(DSR-2000/2000P) SUFFIX -14)

Ref. No. or Q'ty	Part No.	SP	Description
R431	1-216-864-11	s	CONDUCTOR, CHIP (1608)
R432	1-216-833-11	s	RESISTOR,CHIP 10K 1/16W (1608)
R433	1-216-833-11	s	RESISTOR,CHIP 10K 1/16W (1608)
R434	1-216-801-11	s	RESISTOR,CHIP 22 1/16W (1608)
R435	1-216-801-11	s	RESISTOR,CHIP 22 1/16W (1608)
R436	1-216-864-11	s	CONDUCTOR, CHIP (1608)
R438	1-216-845-11	s	RESISTOR,CHIP 100K 1/16W(1608)
R439	1-216-864-11	s	CONDUCTOR, CHIP (1608)
R440	1-216-864-11	s	CONDUCTOR, CHIP (1608)
R441	1-216-845-11	s	RESISTOR,CHIP 100K 1/16W(1608)
R443	1-216-864-11	s	CONDUCTOR, CHIP (1608)
R444	1-216-864-11	s	CONDUCTOR, CHIP (1608)
R445	1-216-864-11	s	CONDUCTOR, CHIP (1608)
R446	1-216-833-11	s	RESISTOR,CHIP 10K 1/16W (1608)
R447	1-216-845-11	s	RESISTOR,CHIP 100K 1/16W(1608)
R448	1-216-864-11	s	CONDUCTOR, CHIP (1608)
R449	1-216-864-11	s	CONDUCTOR, CHIP (1608)
R450	1-216-845-11	s	RESISTOR,CHIP 100K 1/16W(1608)
R451	1-216-864-11	s	CONDUCTOR, CHIP (1608)
R452	1-216-864-11	s	CONDUCTOR, CHIP (1608)
R453	1-216-864-11	s	CONDUCTOR, CHIP (1608)
R455	1-216-833-11	s	RESISTOR,CHIP 10K 1/16W (1608)
R456	1-216-833-11	s	RESISTOR,CHIP 10K 1/16W (1608)
R457	1-216-801-11	s	RESISTOR,CHIP 22 1/16W (1608)
R458	1-216-801-11	s	RESISTOR,CHIP 22 1/16W (1608)
R459	1-216-801-11	s	RESISTOR,CHIP 22 1/16W (1608)
R460	1-216-801-11	s	RESISTOR,CHIP 22 1/16W (1608)
R461	1-216-801-11	s	RESISTOR,CHIP 22 1/16W (1608)
R462	1-216-801-11	s	RESISTOR,CHIP 22 1/16W (1608)
R463	1-216-801-11	s	RESISTOR,CHIP 22 1/16W (1608)
R464	1-216-801-11	s	RESISTOR,CHIP 22 1/16W (1608)
R465	1-216-801-11	s	RESISTOR,CHIP 22 1/16W (1608)
R466	1-216-801-11	s	RESISTOR,CHIP 22 1/16W (1608)
R472	1-216-864-11	s	CONDUCTOR, CHIP (1608)
R473	1-216-864-11	s	CONDUCTOR, CHIP (1608)
R482	1-216-801-11	s	RESISTOR,CHIP 22 1/16W (1608)
R483	1-216-801-11	s	RESISTOR,CHIP 22 1/16W (1608)
R489	1-216-833-11	s	RESISTOR,CHIP 10K 1/16W (1608)
R490	1-216-833-11	s	RESISTOR,CHIP 10K 1/16W (1608)
R491	1-216-833-11	s	RESISTOR,CHIP 10K 1/16W (1608)
R492	1-216-833-11	s	RESISTOR,CHIP 10K 1/16W (1608)
R493	1-216-833-11	s	RESISTOR,CHIP 10K 1/16W (1608)
R494	1-216-833-11	s	RESISTOR,CHIP 10K 1/16W (1608)
R501	1-216-809-11	s	RESISTOR,CHIP 100 1/16W 1608
R502	1-216-864-11	s	CONDUCTOR, CHIP (1608)
R503	1-216-864-11	s	CONDUCTOR, CHIP (1608)
R504	1-216-797-11	s	RESISTOR,CHIP 10 1/16W 1608
R506	1-216-797-11	s	RESISTOR,CHIP 10 1/16W 1608
R508	1-216-829-11	s	RESISTOR,CHIP 4.7K 1/16W(1608)
R509	1-216-809-11	s	RESISTOR,CHIP 100 1/16W 1608
R510	1-216-809-11	s	RESISTOR,CHIP 100 1/16W 1608
R511	1-216-809-11	s	RESISTOR,CHIP 100 1/16W 1608
R512	1-216-809-11	s	RESISTOR,CHIP 100 1/16W 1608
R514	1-216-864-11	s	CONDUCTOR, CHIP (1608)
R538	1-218-875-11	s	RESISTOR,CHIP 15K 1/16W (1608)
R539	1-218-875-11	s	RESISTOR,CHIP 15K 1/16W (1608)
R546	1-218-853-11	s	RESISTOR,CHIP 1.8K 1/16W(1608)
R547	1-218-834-11	s	RESISTOR,CHIP 300 1/16W (1608)
R548	1-218-853-11	s	RESISTOR,CHIP 1.8K 1/16W(1608)

(APR-45 BOARD(DSR-2000/2000P) SUFFIX -14)

Ref. No. or Q'ty	Part No.	SP	Description
R549	1-218-834-11	s	RESISTOR,CHIP 300 1/16W (1608)
R553	1-216-864-11	s	CONDUCTOR, CHIP (1608)
R554	1-216-864-11	s	CONDUCTOR, CHIP (1608)
R562	1-216-805-11	s	RESISTOR,CHIP 47 1/16W 1608
R563	1-216-805-11	s	RESISTOR,CHIP 47 1/16W 1608
R601	1-218-853-11	s	RESISTOR,CHIP 1.8K 1/16W(1608)
R602	1-218-879-11	s	RESISTOR,CHIP 22K 1/16W (1608)
R603	1-218-879-11	s	RESISTOR,CHIP 22K 1/16W (1608)
R604	1-216-864-11	s	CONDUCTOR, CHIP (1608)
R605	1-218-879-11	s	RESISTOR,CHIP 22K 1/16W (1608)
R606	1-218-879-11	s	RESISTOR,CHIP 22K 1/16W (1608)
R607	1-218-847-11	s	RESISTOR, CHIP 1K 1/16W (1608)
R608	1-218-887-11	s	RESISTOR,CHIP 47K 1/16W (1608)
R609	1-218-887-11	s	RESISTOR,CHIP 47K 1/16W (1608)
R651	1-216-809-11	s	RESISTOR,CHIP 100 1/16W 1608
R652	1-216-809-11	s	RESISTOR,CHIP 100 1/16W 1608
R653	1-216-833-11	s	RESISTOR,CHIP 10K 1/16W (1608)
R654	1-216-833-11	s	RESISTOR,CHIP 10K 1/16W (1608)
R655	1-216-841-11	s	RESISTOR, CHIP 47K 1/16W 1608
R667	1-216-841-11	s	RESISTOR, CHIP 47K 1/16W 1608
R668	1-216-821-11	s	RESISTOR,CHIP 1.0K 1/16W(1608)
R669	1-216-809-11	s	RESISTOR,CHIP 100 1/16W 1608
R670	1-216-809-11	s	RESISTOR,CHIP 100 1/16W 1608
R701	1-218-851-11	s	RESISTOR,CHIP 1.5K 1/16W(1608)
R702	1-218-846-11	s	RESISTOR,CHIP 910 1/16W (1608)
R703	1-216-825-11	s	RESISTOR,CHIP 2.2K 1/16W 1608
R704	1-218-873-11	s	RESISTOR,CHIP 12K 1/16W (1608)
R705	1-216-821-11	s	RESISTOR,CHIP 1.0K 1/16W(1608)
R706	1-216-821-11	s	RESISTOR,CHIP 1.0K 1/16W(1608)
R707	1-211-990-11	s	RESISTOR,CHIP 75 1/16W (1608)
R708	1-216-825-11	s	RESISTOR,CHIP 2.2K 1/16W 1608
R709	1-216-857-11	s	RESISTOR,CHIP 1M 1/16W(1608)
R710	1-216-815-11	s	RESISTOR,CHIP 330 1/16W 1608
R711	1-216-825-11	s	RESISTOR,CHIP 2.2K 1/16W 1608
R712	1-211-990-11	s	RESISTOR,CHIP 75 1/16W (1608)
R713	1-211-990-11	s	RESISTOR,CHIP 75 1/16W (1608)
R714	1-216-821-11	s	RESISTOR,CHIP 1.0K 1/16W(1608)
R715	1-216-809-11	s	RESISTOR,CHIP 100 1/16W 1608
R717	1-216-864-11	s	CONDUCTOR, CHIP (1608)
R718	1-216-809-11	s	RESISTOR,CHIP 100 1/16W 1608
R719	1-216-809-11	s	RESISTOR,CHIP 100 1/16W 1608
R720	1-216-809-11	s	RESISTOR,CHIP 100 1/16W 1608
R721	1-216-801-11	s	RESISTOR,CHIP 22 1/16W (1608)
R722	1-218-823-11	s	RESISTOR,CHIP 100 1/16W (1608)
R723	1-218-823-11	s	RESISTOR,CHIP 100 1/16W (1608)
R724	1-218-823-11	s	RESISTOR,CHIP 100 1/16W (1608)
R725	1-216-801-11	s	RESISTOR,CHIP 22 1/16W (1608)
R726	1-216-864-11	s	CONDUCTOR, CHIP (1608)
R729	1-216-864-11	s	CONDUCTOR, CHIP (1608)
R730	1-211-977-11	s	RESISTOR,CHIP 22 1/16W (1608)
R731	1-216-841-11	s	RESISTOR, CHIP 47K 1/16W 1608
R751	1-216-809-11	s	RESISTOR,CHIP 100 1/16W 1608
R752	1-216-809-11	s	RESISTOR,CHIP 100 1/16W 1608
R753	1-216-809-11	s	RESISTOR,CHIP 100 1/16W 1608
R754	1-216-809-11	s	RESISTOR,CHIP 100 1/16W 1608
R755	1-216-809-11	s	RESISTOR,CHIP 100 1/16W 1608
R756	1-216-809-11	s	RESISTOR,CHIP 100 1/16W 1608
R757	1-216-809-11	s	RESISTOR,CHIP 100 1/16W 1608
R758	1-216-809-11	s	RESISTOR,CHIP 100 1/16W 1608

(APR-45 BOARD(DSR-2000/2000P) SUFFIX -14)

Ref. No. or Q'ty	Part No.	SP	Description
R759	1-216-864-11	s	CONDUCTOR, CHIP (1608)
R760	1-216-864-11	s	CONDUCTOR, CHIP (1608)
R761	1-216-864-11	s	CONDUCTOR, CHIP (1608)
R762	1-216-821-11	s	RESISTOR,CHIP 1.0K 1/16W(1608)
R763	1-216-825-11	s	RESISTOR,CHIP 2.2K 1/16W 1608
R764	1-218-873-11	s	RESISTOR,CHIP 12K 1/16W (1608)
R765	1-218-873-11	s	RESISTOR,CHIP 12K 1/16W (1608)
R766	1-218-873-11	s	RESISTOR,CHIP 12K 1/16W (1608)
R767	1-216-821-11	s	RESISTOR,CHIP 1.0K 1/16W(1608)
R768	1-216-825-11	s	RESISTOR,CHIP 2.2K 1/16W 1608
R769	1-216-825-11	s	RESISTOR,CHIP 2.2K 1/16W 1608
R770	1-218-833-11	s	RESISTOR,CHIP 270 1/16W (1608)
R771	1-218-833-11	s	RESISTOR,CHIP 270 1/16W (1608)
R772	1-216-805-11	s	RESISTOR,CHIP 47 1/16W 1608
R773	1-216-805-11	s	RESISTOR,CHIP 47 1/16W 1608
R774	1-216-821-11	s	RESISTOR,CHIP 1.0K 1/16W(1608)
R775	1-216-820-11	s	RESISTOR, CHIP 820 1/16W 1608
R776	1-208-754-11	s	RESISTOR,CHIP 68 1/10W (2012)
R777	1-218-829-11	s	RESISTOR,CHIP 180 1/16W (1608)
R778	1-211-961-11	s	RESISTOR,CHIP 24 1/10W (2012)
R779	1-211-967-11	s	RESISTOR,CHIP 43 1/10W (2125)
R780	1-208-754-11	s	RESISTOR,CHIP 68 1/10W (2012)
R781	1-211-961-11	s	RESISTOR,CHIP 24 1/10W (2012)
R782	1-208-774-11	s	RESISTOR,CHIP 470 1/10W (2012)
R783	1-216-805-11	s	RESISTOR,CHIP 47 1/16W 1608
R784	1-216-805-11	s	RESISTOR,CHIP 47 1/16W 1608
R785	1-208-762-11	s	RESISTOR,CHIP 150 1/10W (2012)
R786	1-208-754-11	s	RESISTOR,CHIP 68 1/10W (2012)
R787	1-216-821-11	s	RESISTOR,CHIP 1.0K 1/16W(1608)
R788	1-216-801-11	s	RESISTOR,CHIP 22 1/16W (1608)
R789	1-216-801-11	s	RESISTOR,CHIP 22 1/16W (1608)
R790	1-216-864-11	s	CONDUCTOR, CHIP (1608)
R801	1-216-821-11	s	RESISTOR,CHIP 1.0K 1/16W(1608)
R802	1-220-259-11	s	RESISTOR, CHIP 150 1/4W (3225)
R803	1-211-985-11	s	RESISTOR,CHIP 47 1/16W (1608)
R804	1-218-852-11	s	RESISTOR,CHIP 1.6K 1/16W(1608)
R805	1-218-864-11	s	RESISTOR,CHIP 5.1K 1/16W(1608)
R806	1-218-839-11	s	RESISTOR,CHIP 470 1/16W (1608)
R807	1-218-855-11	s	RESISTOR,CHIP 2.2K 1/16W(1608)
R808	1-216-864-11	s	CONDUCTOR, CHIP (1608)
R809	1-218-873-11	s	RESISTOR,CHIP 12K 1/16W (1608)
R810	1-218-847-11	s	RESISTOR, CHIP 1K 1/16W (1608)
R811	1-218-847-11	s	RESISTOR, CHIP 1K 1/16W (1608)
R812	1-211-990-11	s	RESISTOR,CHIP 75 1/16W (1608)
R813	1-218-847-11	s	RESISTOR, CHIP 1K 1/16W (1608)
R814	1-218-831-11	s	RESISTOR, CHIP 220 1/16W(1608)
R815	1-218-855-11	s	RESISTOR,CHIP 2.2K 1/16W(1608)
R816	1-216-864-11	s	CONDUCTOR, CHIP (1608)
R817	1-211-990-11	s	RESISTOR,CHIP 75 1/16W (1608)
R818	1-211-990-11	s	RESISTOR,CHIP 75 1/16W (1608)
R819	1-216-857-11	s	RESISTOR,CHIP 1M 1/16W(1608)
R820	1-218-855-11	s	RESISTOR,CHIP 2.2K 1/16W(1608)
R822	1-211-990-11	s	RESISTOR,CHIP 75 1/16W (1608)
R823	1-211-990-11	s	RESISTOR,CHIP 75 1/16W (1608)
R824	1-216-864-11	s	CONDUCTOR, CHIP (1608)
R825	1-218-847-11	s	RESISTOR, CHIP 1K 1/16W (1608)
R826	1-216-797-11	s	RESISTOR,CHIP 10 1/16W 1608
R827	1-216-797-11	s	RESISTOR,CHIP 10 1/16W 1608
R828	1-216-797-11	s	RESISTOR,CHIP 10 1/16W 1608

(APR-45 BOARD(DSR-2000/2000P) SUFFIX -14)

Ref. No. or Q'ty	Part No.	SP	Description
R829	1-216-797-11	s	RESISTOR,CHIP 10 1/16W 1608
R830	1-216-814-11	s	RESISTOR,CHIP 270 1/16W 1608
R831	1-216-814-11	s	RESISTOR,CHIP 270 1/16W 1608
R832	1-211-961-11	s	RESISTOR,CHIP 24 1/10W (2012)
R833	1-208-754-11	s	RESISTOR,CHIP 68 1/10W (2012)
R834	1-208-754-11	s	RESISTOR,CHIP 68 1/10W (2012)
R835	1-211-961-11	s	RESISTOR,CHIP 24 1/10W (2012)
R836	1-208-755-11	s	RESISTOR,CHIP 75 1/10W (2012)
R837	1-216-805-11	s	RESISTOR,CHIP 47 1/16W 1608
R838	1-208-762-11	s	RESISTOR,CHIP 150 1/10W (2012)
R839	1-208-754-11	s	RESISTOR,CHIP 68 1/10W (2012)
R840	1-216-821-11	s	RESISTOR,CHIP 1.0K 1/16W(1608)
R841	1-216-864-11	s	CONDUCTOR, CHIP (1608)
R842	1-216-805-11	s	RESISTOR,CHIP 47 1/16W 1608
R846	1-216-833-11	s	RESISTOR,CHIP 10K 1/16W (1608)
R848	1-208-778-11	s	RESISTOR,CHIP 680 1/10W (2012)
R913	1-216-801-11	s	RESISTOR,CHIP 22 1/16W (1608)
R953	1-216-864-11	s	CONDUCTOR, CHIP (1608)
R955	1-216-809-11	s	RESISTOR,CHIP 100 1/16W 1608
R956	1-216-809-11	s	RESISTOR,CHIP 100 1/16W 1608
R980	1-216-864-11	s	CONDUCTOR, CHIP (1608)
R1001	1-218-843-11	s	RESISTOR,CHIP 680 1/16W (1608)
R1002	1-218-857-11	s	RESISTOR,CHIP 2.7K 1/16W(1608)
R1003	1-218-857-11	s	RESISTOR,CHIP 2.7K 1/16W(1608)
R1004	1-218-875-11	s	RESISTOR,CHIP 15K 1/16W (1608)
R1005	1-218-875-11	s	RESISTOR,CHIP 15K 1/16W (1608)
R1006	1-218-868-11	s	RESISTOR,CHIP 7.5K 1/16W(1608)
R1007	1-218-717-11	s	RESISTOR,CHIP 11K 1/16W (1608)
R1008	1-218-875-11	s	RESISTOR,CHIP 15K 1/16W (1608)
R1009	1-218-875-11	s	RESISTOR,CHIP 15K 1/16W (1608)
R1010	1-218-868-11	s	RESISTOR,CHIP 7.5K 1/16W(1608)
R1011	1-218-717-11	s	RESISTOR,CHIP 11K 1/16W (1608)
R1012	1-218-861-11	s	RESISTOR,CHIP 3.9K 1/16W(1608)
R1013	1-218-457-11	s	RESISTOR,CHIP 910 1/16W (1608)
R1014	1-218-861-11	s	RESISTOR,CHIP 3.9K 1/16W(1608)
R1015	1-218-457-11	s	RESISTOR,CHIP 910 1/16W (1608)
R1016	1-218-871-11	s	RESISTOR,CHIP 10K 1/16W (1608)
R1017	1-218-871-11	s	RESISTOR,CHIP 10K 1/16W (1608)
R1018	1-218-871-11	s	RESISTOR,CHIP 10K 1/16W (1608)
R1019	1-218-871-11	s	RESISTOR,CHIP 10K 1/16W (1608)
R1020	1-218-871-11	s	RESISTOR,CHIP 10K 1/16W (1608)
R1021	1-218-871-11	s	RESISTOR,CHIP 10K 1/16W (1608)
R1022	1-218-887-11	s	RESISTOR,CHIP 47K 1/16W (1608)
R1023	1-218-882-11	s	RESISTOR, CHIP 30K 1/16W(1608)
R1024	1-218-887-11	s	RESISTOR,CHIP 47K 1/16W (1608)
R1025	1-218-882-11	s	RESISTOR, CHIP 30K 1/16W(1608)
R1026	1-218-887-11	s	RESISTOR,CHIP 47K 1/16W (1608)
R1027	1-218-887-11	s	RESISTOR,CHIP 47K 1/16W (1608)
R1028	1-218-887-11	s	RESISTOR,CHIP 47K 1/16W (1608)
R1029	1-218-887-11	s	RESISTOR,CHIP 47K 1/16W (1608)
R1030	1-218-823-11	s	RESISTOR,CHIP 100 1/16W (1608)
R1031	1-218-823-11	s	RESISTOR,CHIP 100 1/16W (1608)
R1032	1-218-823-11	s	RESISTOR,CHIP 100 1/16W (1608)
R1033	1-218-823-11	s	RESISTOR,CHIP 100 1/16W (1608)
R1034	1-216-864-11	s	CONDUCTOR, CHIP (1608)
R1037	1-216-797-11	s	RESISTOR,CHIP 10 1/16W 1608
R1101	1-218-843-11	s	RESISTOR,CHIP 680 1/16W (1608)
R1102	1-218-857-11	s	RESISTOR,CHIP 2.7K 1/16W(1608)
R1103	1-218-857-11	s	RESISTOR,CHIP 2.7K 1/16W(1608)

(APR-45 BOARD(DSR-2000/2000P) SUFFIX -14)

Ref. No. or Q'ty	Part No.	SP	Description
R1104	1-218-875-11	s	RESISTOR,CHIP 15K 1/16W (1608)
R1105	1-218-875-11	s	RESISTOR,CHIP 15K 1/16W (1608)
R1106	1-218-868-11	s	RESISTOR,CHIP 7.5K 1/16W(1608)
R1107	1-218-717-11	s	RESISTOR,CHIP 11K 1/16W (1608)
R1108	1-218-875-11	s	RESISTOR,CHIP 15K 1/16W (1608)
R1109	1-218-875-11	s	RESISTOR,CHIP 15K 1/16W (1608)
R1110	1-218-868-11	s	RESISTOR,CHIP 7.5K 1/16W(1608)
R1111	1-218-717-11	s	RESISTOR,CHIP 11K 1/16W (1608)
R1112	1-218-861-11	s	RESISTOR,CHIP 3.9K 1/16W(1608)
R1113	1-218-457-11	s	RESISTOR,CHIP 910 1/16W (1608)
R1114	1-218-861-11	s	RESISTOR,CHIP 3.9K 1/16W(1608)
R1115	1-218-457-11	s	RESISTOR,CHIP 910 1/16W (1608)
R1116	1-218-871-11	s	RESISTOR,CHIP 10K 1/16W (1608)
R1117	1-218-871-11	s	RESISTOR,CHIP 10K 1/16W (1608)
R1118	1-218-871-11	s	RESISTOR,CHIP 10K 1/16W (1608)
R1119	1-218-871-11	s	RESISTOR,CHIP 10K 1/16W (1608)
R1120	1-218-871-11	s	RESISTOR,CHIP 10K 1/16W (1608)
R1121	1-218-871-11	s	RESISTOR,CHIP 10K 1/16W (1608)
R1122	1-218-887-11	s	RESISTOR,CHIP 47K 1/16W (1608)
R1123	1-218-882-11	s	RESISTOR, CHIP 30K 1/16W(1608)
R1124	1-218-887-11	s	RESISTOR,CHIP 47K 1/16W (1608)
R1125	1-218-882-11	s	RESISTOR, CHIP 30K 1/16W(1608)
R1126	1-218-887-11	s	RESISTOR,CHIP 47K 1/16W (1608)
R1127	1-218-887-11	s	RESISTOR,CHIP 47K 1/16W (1608)
R1128	1-218-887-11	s	RESISTOR,CHIP 47K 1/16W (1608)
R1129	1-218-887-11	s	RESISTOR,CHIP 47K 1/16W (1608)
R1130	1-218-823-11	s	RESISTOR,CHIP 100 1/16W (1608)
R1131	1-218-823-11	s	RESISTOR,CHIP 100 1/16W (1608)
R1132	1-218-823-11	s	RESISTOR,CHIP 100 1/16W (1608)
R1133	1-218-823-11	s	RESISTOR,CHIP 100 1/16W (1608)
R1134	1-216-864-11	s	CONDUCTOR, CHIP (1608)
R1137	1-216-797-11	s	RESISTOR,CHIP 10 1/16W 1608
R1139	1-218-823-11	s	RESISTOR,CHIP 100 1/16W (1608)
R1140	1-218-823-11	s	RESISTOR,CHIP 100 1/16W (1608)
R1141	1-218-823-11	s	RESISTOR,CHIP 100 1/16W (1608)
R1142	1-216-809-11	s	RESISTOR,CHIP 100 1/16W 1608
R1143	1-218-823-11	s	RESISTOR,CHIP 100 1/16W (1608)
R1144	1-218-823-11	s	RESISTOR,CHIP 100 1/16W (1608)
R1145	1-218-823-11	s	RESISTOR,CHIP 100 1/16W (1608)
R1146	1-216-809-11	s	RESISTOR,CHIP 100 1/16W 1608
R1201	1-211-969-11	s	RESISTOR,CHIP 10 1/16W (1608)
R1203	1-218-880-11	s	RESISTOR,CHIP 24K 1/16W (1608)
R1204	1-218-880-11	s	RESISTOR,CHIP 24K 1/16W (1608)
R1205	1-218-881-11	s	RESISTOR, CHIP 27K 1/16W(1608)
R1206	1-218-881-11	s	RESISTOR, CHIP 27K 1/16W(1608)
R1207	1-218-880-11	s	RESISTOR,CHIP 24K 1/16W (1608)
R1208	1-218-880-11	s	RESISTOR,CHIP 24K 1/16W (1608)
R1209	1-218-881-11	s	RESISTOR, CHIP 27K 1/16W(1608)
R1210	1-218-881-11	s	RESISTOR, CHIP 27K 1/16W(1608)
R1217	1-216-864-11	s	CONDUCTOR, CHIP (1608)
R1219	1-218-864-11	s	RESISTOR,CHIP 5.1K 1/16W(1608)
R1221	1-216-845-11	s	RESISTOR,CHIP 100K 1/16W(1608)
R1222	1-216-817-11	s	RESISTOR,CHIP 470 1/16W 1608
R1223	1-216-828-11	s	RESISTOR, CHIP 3.9K 1/16W 1608
R1225	1-216-809-11	s	RESISTOR,CHIP 100 1/16W 1608
R1226	1-216-813-11	s	RESISTOR, CHIP 220 1/16W 1608
R1227	1-216-813-11	s	RESISTOR, CHIP 220 1/16W 1608
R1229	1-216-813-11	s	RESISTOR, CHIP 220 1/16W 1608
R1230	1-216-828-11	s	RESISTOR, CHIP 3.9K 1/16W 1608

(APR-45 BOARD(DSR-2000/2000P) SUFFIX -14)

Ref. No. or Q'ty	Part No.	SP	Description
R1231	1-218-871-11	s	RESISTOR,CHIP 10K 1/16W (1608)
R1232	1-218-871-11	s	RESISTOR,CHIP 10K 1/16W (1608)
R1251	1-216-797-11	s	RESISTOR,CHIP 10 1/16W 1608
R1252	1-216-864-11	s	CONDUCTOR, CHIP (1608)
R1254	1-216-801-11	s	RESISTOR,CHIP 22 1/16W (1608)
R1255	1-216-801-11	s	RESISTOR,CHIP 22 1/16W (1608)
R1256	1-216-809-11	s	RESISTOR,CHIP 100 1/16W 1608
R1258	1-216-797-11	s	RESISTOR,CHIP 10 1/16W 1608
R1259	1-216-797-11	s	RESISTOR,CHIP 10 1/16W 1608
R1261	1-216-797-11	s	RESISTOR,CHIP 10 1/16W 1608
R1262	1-216-797-11	s	RESISTOR,CHIP 10 1/16W 1608
R1266	1-216-801-11	s	RESISTOR,CHIP 22 1/16W (1608)
R1267	1-216-801-11	s	RESISTOR,CHIP 22 1/16W (1608)
R1268	1-216-801-11	s	RESISTOR,CHIP 22 1/16W (1608)
R1269	1-216-801-11	s	RESISTOR,CHIP 22 1/16W (1608)
R1270	1-216-801-11	s	RESISTOR,CHIP 22 1/16W (1608)
R1271	1-216-809-11	s	RESISTOR,CHIP 100 1/16W 1608
R1273	1-216-838-11	s	RESISTOR CHIP 27K 1/16W(1608)
R1274	1-216-839-11	s	RESISTOR,CHIP 33K 1/16W 1608
R1275	1-216-841-11	s	RESISTOR, CHIP 47K 1/16W 1608
R1276	1-216-829-11	s	RESISTOR,CHIP 4.7K 1/16W(1608)
R1277	1-216-841-11	s	RESISTOR, CHIP 47K 1/16W 1608
R1278	1-216-835-11	s	RESISTOR,CHIP 15K 1/16W
R1279	1-216-841-11	s	RESISTOR, CHIP 47K 1/16W 1608
R1280	1-216-805-11	s	RESISTOR,CHIP 47 1/16W 1608
R1281	1-216-805-11	s	RESISTOR,CHIP 47 1/16W 1608
R1282	1-216-801-11	s	RESISTOR,CHIP 22 1/16W (1608)
R1283	1-216-841-11	s	RESISTOR, CHIP 47K 1/16W 1608
R1284	1-216-841-11	s	RESISTOR, CHIP 47K 1/16W 1608
R1285	1-216-864-11	s	CONDUCTOR, CHIP (1608)
R1286	1-216-797-11	s	RESISTOR,CHIP 10 1/16W 1608
R1287	1-216-797-11	s	RESISTOR,CHIP 10 1/16W 1608
R1290	1-216-797-11	s	RESISTOR,CHIP 10 1/16W 1608
R1291	1-216-797-11	s	RESISTOR,CHIP 10 1/16W 1608
R1292	1-216-797-11	s	RESISTOR,CHIP 10 1/16W 1608
R1294	1-216-801-11	s	RESISTOR,CHIP 22 1/16W (1608)
R1295	1-216-801-11	s	RESISTOR,CHIP 22 1/16W (1608)
R1299	1-216-833-11	s	RESISTOR,CHIP 10K 1/16W (1608)
R1300	1-216-833-11	s	RESISTOR,CHIP 10K 1/16W (1608)
R1301	1-216-833-11	s	RESISTOR,CHIP 10K 1/16W (1608)
R1302	1-216-833-11	s	RESISTOR,CHIP 10K 1/16W (1608)
R1304	1-216-864-11	s	CONDUCTOR, CHIP (1608)
R1354	1-216-801-11	s	RESISTOR,CHIP 22 1/16W (1608)
R1355	1-216-801-11	s	RESISTOR,CHIP 22 1/16W (1608)
R1356	1-216-801-11	s	RESISTOR,CHIP 22 1/16W (1608)
R1358	1-216-801-11	s	RESISTOR,CHIP 22 1/16W (1608)
R1359	1-216-801-11	s	RESISTOR,CHIP 22 1/16W (1608)
R1360	1-216-801-11	s	RESISTOR,CHIP 22 1/16W (1608)
R1402	1-216-801-11	s	RESISTOR,CHIP 22 1/16W (1608)
R1403	1-216-801-11	s	RESISTOR,CHIP 22 1/16W (1608)
R1404	1-216-801-11	s	RESISTOR,CHIP 22 1/16W (1608)
R1405	1-216-801-11	s	RESISTOR,CHIP 22 1/16W (1608)
R1406	1-216-833-11	s	RESISTOR,CHIP 10K 1/16W (1608)
R1407	1-216-845-11	s	RESISTOR,CHIP 100K 1/16W(1608)
R1408	1-216-845-11	s	RESISTOR,CHIP 100K 1/16W(1608)
R1409	1-216-833-11	s	RESISTOR,CHIP 10K 1/16W (1608)
R1410	1-216-845-11	s	RESISTOR,CHIP 100K 1/16W(1608)
R1411	1-216-845-11	s	RESISTOR,CHIP 100K 1/16W(1608)
R1412	1-216-801-11	s	RESISTOR,CHIP 22 1/16W (1608)

(APR-45 BOARD(DSR-2000/2000P) SUFFIX -14)

Ref. No. or Q'ty	Part No.	SP	Description
R1413	1-216-801-11	s	RESISTOR,CHIP 22 1/16W (1608)
R1414	1-216-801-11	s	RESISTOR,CHIP 22 1/16W (1608)
R1415	1-216-801-11	s	RESISTOR,CHIP 22 1/16W (1608)
R1501	1-220-259-11	s	RESISTOR, CHIP 150 1/4W (3225)
R1502	1-211-985-11	s	RESISTOR,CHIP 47 1/16W (1608)
R1503	1-216-821-11	s	RESISTOR,CHIP 1.0K 1/16W(1608)
R1504	1-218-852-11	s	RESISTOR,CHIP 1.6K 1/16W(1608)
R1505	1-218-864-11	s	RESISTOR,CHIP 5.1K 1/16W(1608)
R1506	1-216-817-11	s	RESISTOR,CHIP 470 1/16W 1608
R1507	1-216-864-11	s	CONDUCTOR, CHIP (1608)
R1508	1-218-855-11	s	RESISTOR,CHIP 2.2K 1/16W(1608)
R1509	1-218-873-11	s	RESISTOR,CHIP 12K 1/16W (1608)
R1510	1-218-875-11	s	RESISTOR,CHIP 15K 1/16W (1608)
R1511	1-218-875-11	s	RESISTOR,CHIP 15K 1/16W (1608)
R1512	1-218-847-11	s	RESISTOR, CHIP 1K 1/16W (1608)
R1513	1-218-847-11	s	RESISTOR, CHIP 1K 1/16W (1608)
R1514	1-218-855-11	s	RESISTOR,CHIP 2.2K 1/16W(1608)
R1515	1-218-855-11	s	RESISTOR,CHIP 2.2K 1/16W(1608)
R1516	1-216-864-11	s	CONDUCTOR, CHIP (1608)
R1517	1-211-985-11	s	RESISTOR,CHIP 47 1/16W (1608)
R1518	1-218-847-11	s	RESISTOR, CHIP 1K 1/16W (1608)
R1519	1-216-864-11	s	CONDUCTOR, CHIP (1608)
R1520	1-218-845-11	s	RESISTOR,CHIP 820 1/16W (1608)
R1522	1-218-833-11	s	RESISTOR,CHIP 270 1/16W (1608)
R1523	1-218-833-11	s	RESISTOR,CHIP 270 1/16W (1608)
R1524	1-216-809-11	s	RESISTOR,CHIP 100 1/16W 1608
R1525	1-211-985-11	s	RESISTOR,CHIP 47 1/16W (1608)
R1526	1-208-754-11	s	RESISTOR,CHIP 68 1/10W (2012)
R1527	1-218-829-11	s	RESISTOR,CHIP 180 1/16W (1608)
R1528	1-211-961-11	s	RESISTOR,CHIP 24 1/10W (2012)
R1529	1-211-967-11	s	RESISTOR,CHIP 43 1/10W (2125)
R1530	1-208-754-11	s	RESISTOR,CHIP 68 1/10W (2012)
R1531	1-211-961-11	s	RESISTOR,CHIP 24 1/10W (2012)
R1532	1-208-774-11	s	RESISTOR,CHIP 470 1/10W (2012)
R1533	1-211-985-11	s	RESISTOR,CHIP 47 1/16W (1608)
R1534	1-211-985-11	s	RESISTOR,CHIP 47 1/16W (1608)
R1535	1-211-985-11	s	RESISTOR,CHIP 47 1/16W (1608)
R1536	1-208-762-11	s	RESISTOR,CHIP 150 1/10W (2012)
R1537	1-208-762-11	s	RESISTOR,CHIP 150 1/10W (2012)
R1538	1-216-864-11	s	CONDUCTOR, CHIP (1608)
R1539	1-218-847-11	s	RESISTOR, CHIP 1K 1/16W (1608)
R1540	1-208-754-11	s	RESISTOR,CHIP 68 1/10W (2012)
R1541	1-208-754-11	s	RESISTOR,CHIP 68 1/10W (2012)
R1542	1-218-847-11	s	RESISTOR, CHIP 1K 1/16W (1608)
R1543	1-216-829-11	s	RESISTOR,CHIP 4.7K 1/16W(1608)
R1551	1-220-259-11	s	RESISTOR, CHIP 150 1/4W (3225)
R1552	1-211-985-11	s	RESISTOR,CHIP 47 1/16W (1608)
R1553	1-218-852-11	s	RESISTOR,CHIP 1.6K 1/16W(1608)
R1554	1-218-864-11	s	RESISTOR,CHIP 5.1K 1/16W(1608)
R1555	1-216-817-11	s	RESISTOR,CHIP 470 1/16W 1608
R1556	1-216-864-11	s	CONDUCTOR, CHIP (1608)
R1557	1-218-855-11	s	RESISTOR,CHIP 2.2K 1/16W(1608)
R1558	1-218-873-11	s	RESISTOR,CHIP 12K 1/16W (1608)
R1559	1-218-875-11	s	RESISTOR,CHIP 15K 1/16W (1608)
R1560	1-218-875-11	s	RESISTOR,CHIP 15K 1/16W (1608)
R1561	1-218-847-11	s	RESISTOR, CHIP 1K 1/16W (1608)
R1562	1-218-847-11	s	RESISTOR, CHIP 1K 1/16W (1608)
R1563	1-218-855-11	s	RESISTOR,CHIP 2.2K 1/16W(1608)
R1564	1-218-855-11	s	RESISTOR,CHIP 2.2K 1/16W(1608)

(APR-45 BOARD(DSR-2000/2000P) SUFFIX -14)

Ref. No. or Q'ty	Part No.	SP	Description
R1565	1-216-864-11	s	CONDUCTOR, CHIP (1608)
R1566	1-211-985-11	s	RESISTOR,CHIP 47 1/16W (1608)
R1567	1-218-847-11	s	RESISTOR, CHIP 1K 1/16W (1608)
R1568	1-216-864-11	s	CONDUCTOR, CHIP (1608)
R1569	1-218-845-11	s	RESISTOR,CHIP 820 1/16W (1608)
R1571	1-218-833-11	s	RESISTOR,CHIP 270 1/16W (1608)
R1572	1-218-833-11	s	RESISTOR,CHIP 270 1/16W (1608)
R1573	1-216-809-11	s	RESISTOR,CHIP 100 1/16W 1608
R1574	1-211-985-11	s	RESISTOR,CHIP 47 1/16W (1608)
R1575	1-208-754-11	s	RESISTOR,CHIP 68 1/10W (2012)
R1576	1-218-829-11	s	RESISTOR,CHIP 180 1/16W (1608)
R1577	1-211-961-11	s	RESISTOR,CHIP 24 1/10W (2012)
R1578	1-211-967-11	s	RESISTOR,CHIP 43 1/10W (2125)
R1579	1-208-754-11	s	RESISTOR,CHIP 68 1/10W (2012)
R1580	1-211-961-11	s	RESISTOR,CHIP 24 1/10W (2012)
R1581	1-208-774-11	s	RESISTOR,CHIP 470 1/10W (2012)
R1582	1-211-985-11	s	RESISTOR,CHIP 47 1/16W (1608)
R1583	1-211-985-11	s	RESISTOR,CHIP 47 1/16W (1608)
R1584	1-208-762-11	s	RESISTOR,CHIP 150 1/10W (2012)
R1585	1-216-864-11	s	CONDUCTOR, CHIP (1608)
R1586	1-218-847-11	s	RESISTOR, CHIP 1K 1/16W (1608)
R1587	1-208-754-11	s	RESISTOR,CHIP 68 1/10W (2012)
R1588	1-216-829-11	s	RESISTOR,CHIP 4.7K 1/16W(1608)
R1589	1-216-864-11	s	CONDUCTOR, CHIP (1608)
R1590	1-216-864-11	s	CONDUCTOR, CHIP (1608)
R1700	1-216-833-11	s	RESISTOR,CHIP 10K 1/16W (1608)
R1701	1-216-833-11	s	RESISTOR,CHIP 10K 1/16W (1608)
R1702	1-216-833-11	s	RESISTOR,CHIP 10K 1/16W (1608)
R1703	1-216-833-11	s	RESISTOR,CHIP 10K 1/16W (1608)
R1704	1-216-833-11	s	RESISTOR,CHIP 10K 1/16W (1608)
R1705	1-216-833-11	s	RESISTOR,CHIP 10K 1/16W (1608)
R1706	1-216-833-11	s	RESISTOR,CHIP 10K 1/16W (1608)
R1707	1-208-778-11	s	RESISTOR,CHIP 680 1/10W (2012)
R1715	1-216-864-11	s	CONDUCTOR, CHIP (1608)
R1716	1-216-864-11	s	CONDUCTOR, CHIP (1608)
R1717	1-216-801-11	s	RESISTOR,CHIP 22 1/16W (1608)
R1718	1-216-864-11	s	CONDUCTOR, CHIP (1608)
RB51	1-239-409-11	s	RESISTOR NETWORK 47 (1608)
RB201	1-239-409-11	s	RESISTOR NETWORK 47 (1608)
RB202	1-239-409-11	s	RESISTOR NETWORK 47 (1608)
RB301	1-239-412-11	s	NETWORK, RESISTOR 100 (1608)
RB653	1-239-412-11	s	NETWORK, RESISTOR 100 (1608)
RB701	1-239-412-11	s	NETWORK, RESISTOR 100 (1608)
RB702	1-239-412-11	s	NETWORK, RESISTOR 100 (1608)
RB703	1-239-412-11	s	NETWORK, RESISTOR 100 (1608)
RB704	1-239-412-11	s	NETWORK, RESISTOR 100 (1608)
RB705	1-239-412-11	s	NETWORK, RESISTOR 100 (1608)
RB751	1-239-412-11	s	NETWORK, RESISTOR 100 (1608)
RB752	1-239-412-11	s	NETWORK, RESISTOR 100 (1608)
RB753	1-239-412-11	s	NETWORK, RESISTOR 100 (1608)
RB801	1-239-412-11	s	NETWORK, RESISTOR 100 (1608)
RB802	1-239-412-11	s	NETWORK, RESISTOR 100 (1608)
RB803	1-239-412-11	s	NETWORK, RESISTOR 100 (1608)
RB951	1-239-412-11	s	NETWORK, RESISTOR 100 (1608)
RB953	1-239-412-11	s	NETWORK, RESISTOR 100 (1608)
RB954	1-239-412-11	s	NETWORK, RESISTOR 100 (1608)
RB956	1-239-412-11	s	NETWORK, RESISTOR 100 (1608)
RB957	1-239-412-11	s	NETWORK, RESISTOR 100 (1608)

(APR-45 BOARD(DSR-2000/2000P) SUFFIX -14)

Ref. No. or Q'ty	Part No.	SP	Description
RB1503	1-239-412-11	s	NETWORK, RESISTOR 100 (1608)
RB1504	1-239-412-11	s	NETWORK, RESISTOR 100 (1608)
RB1505	1-239-412-11	s	NETWORK, RESISTOR 100 (1608)
RB1553	1-239-412-11	s	NETWORK, RESISTOR 100 (1608)
RB1554	1-239-412-11	s	NETWORK, RESISTOR 100 (1608)
RB1555	1-239-412-11	s	NETWORK, RESISTOR 100 (1608)
RV1	1-237-034-11	s	RESISTOR,ADJ,CERMET 2K
RV4	1-237-034-11	s	RESISTOR,ADJ,CERMET 2K
RV101	1-237-034-11	s	RESISTOR,ADJ,CERMET 2K
RV104	1-237-034-11	s	RESISTOR,ADJ,CERMET 2K
RV201	1-237-034-11	s	RESISTOR,ADJ,CERMET 2K
RV202	1-237-034-11	s	RESISTOR,ADJ,CERMET 2K
RV203	1-237-034-11	s	RESISTOR,ADJ,CERMET 2K
RV204	1-237-034-11	s	RESISTOR,ADJ,CERMET 2K
RV701	1-237-034-11	s	RESISTOR,ADJ,CERMET 2K
RV751	1-237-034-11	s	RESISTOR,ADJ,CERMET 2K
RV801	1-237-034-11	s	RESISTOR,ADJ,CERMET 2K
RV1501	1-237-034-11	s	RESISTOR,ADJ,CERMET 2K
RV1551	1-237-034-11	s	RESISTOR,ADJ,CERMET 2K
X401	1-781-655-11	s	OSCILLATOR, CRYSTAL

APR-45 BOARD(DSR-2000/2000P) SUFFIX -11, -12

---

*1: Board No. suffix 11
*2: Board No. suffix 12 -

*a: Lot No. 907
*b: Lot No. 908 -
*c: Lot No. 907 - 909
*d: Lot No. 910 -
*e: Lot No. 907 - 912
*f: Lot No. 001 -

Ref. No. or Q'ty	Part No.	SP	Description
1pc	A-8323-473-A	s	MOUNTED CIRCUIT BOARD, APR-45
1pc	3-179-084-01	s	LEVER(R),PRINTED C,BOARD
1pc	3-179-085-01	s	LEVER(L),PRINTED C.BOARD
C7	1-126-396-11	s	CAPACITOR,ELECT 47MF/16V(CHIP)
C8	1-126-396-11	s	CAPACITOR,ELECT 47MF/16V(CHIP)
C9	1-126-396-11	s	CAPACITOR,ELECT 47MF/16V(CHIP)
C10	1-126-396-11	s	CAPACITOR,ELECT 47MF/16V(CHIP)
C19	1-162-923-11	s	CAPACITOR,CERAMIC 47PF/50V CH
C20	1-162-923-11	s	CAPACITOR,CERAMIC 47PF/50V CH
C21	1-162-923-11	s	CAPACITOR,CERAMIC 47PF/50V CH
C22	1-162-923-11	s	CAPACITOR,CERAMIC 47PF/50V CH
C43	1-126-395-11	s	CAPACITOR,ELECT 22MF/16V(CHIP)
C44	1-126-395-11	s	CAPACITOR,ELECT 22MF/16V(CHIP)
C45	1-162-927-11	s	CAPACITOR,CERAMIC 100PF/50V CH
C46	1-162-923-11	s	CAPACITOR,CERAMIC 47PF/50V CH
C47	1-162-927-11	s	CAPACITOR,CERAMIC 100PF/50V CH
C48	1-162-923-11	s	CAPACITOR,CERAMIC 47PF/50V CH
C49	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C50	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C51	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C52	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C53	1-104-851-11	s	CAPACITOR,TANTALUM 10MF/10V
C54	1-104-851-11	s	CAPACITOR,TANTALUM 10MF/10V
C55	1-126-394-11	s	CAPACITOR,ELECT 10MF/16V(CHIP)
C56	1-126-394-11	s	CAPACITOR,ELECT 10MF/16V(CHIP)
C57	1-126-394-11	s	CAPACITOR,ELECT 10MF/16V(CHIP)
C58	1-126-394-11	s	CAPACITOR,ELECT 10MF/16V(CHIP)
C59	1-104-851-11	s	CAPACITOR,TANTALUM 10MF/10V
C60	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C61	1-162-966-11	s	CAPACITOR,CERAMIC 2200PF/50V B
C62	1-104-851-11	s	CAPACITOR,TANTALUM 10MF/10V
C63	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C64	1-163-145-00	s	CAPACITOR,CHIP CERAMIC 1500PF
C65	1-163-145-00	s	CAPACITOR,CHIP CERAMIC 1500PF
C66	1-162-966-11	s	CAPACITOR,CERAMIC 2200PF/50V B
C67	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C68	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C69	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C70	1-104-851-11	s	CAPACITOR,TANTALUM 10MF/10V
C107	1-126-396-11	s	CAPACITOR,ELECT 47MF/16V(CHIP)
C108	1-126-396-11	s	CAPACITOR,ELECT 47MF/16V(CHIP)
C109	1-126-396-11	s	CAPACITOR,ELECT 47MF/16V(CHIP)
C110	1-126-396-11	s	CAPACITOR,ELECT 47MF/16V(CHIP)
C119	1-162-923-11	s	CAPACITOR,CERAMIC 47PF/50V CH
C120	1-162-923-11	s	CAPACITOR,CERAMIC 47PF/50V CH
C121	1-162-923-11	s	CAPACITOR,CERAMIC 47PF/50V CH
C122	1-162-923-11	s	CAPACITOR,CERAMIC 47PF/50V CH
C143	1-126-395-11	s	CAPACITOR,ELECT 22MF/16V(CHIP)

(APR-45 BOARD(DSR-2000/2000P) SUFFIX -11, -12)

Ref. No. or Q'ty	Part No.	SP	Description
C144	1-126-395-11	s	CAPACITOR,ELECT 22MF/16V(CHIP)
C145	1-162-927-11	s	CAPACITOR,CERAMIC 100PF/50V CH
C146	1-162-923-11	s	CAPACITOR,CERAMIC 47PF/50V CH
C147	1-162-927-11	s	CAPACITOR,CERAMIC 100PF/50V CH
C148	1-162-923-11	s	CAPACITOR,CERAMIC 47PF/50V CH
C149	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C150	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C151	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C152	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C153	1-104-851-11	s	CAPACITOR,TANTALUM 10MF/10V
C154	1-104-851-11	s	CAPACITOR,TANTALUM 10MF/10V
C155	1-126-394-11	s	CAPACITOR,ELECT 10MF/16V(CHIP)
C156	1-126-394-11	s	CAPACITOR,ELECT 10MF/16V(CHIP)
C157	1-126-394-11	s	CAPACITOR,ELECT 10MF/16V(CHIP)
C158	1-126-394-11	s	CAPACITOR,ELECT 10MF/16V(CHIP)
C159	1-104-851-11	s	CAPACITOR,TANTALUM 10MF/10V
C160	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C161	1-162-966-11	s	CAPACITOR,CERAMIC 2200PF/50V B
C162	1-104-851-11	s	CAPACITOR,TANTALUM 10MF/10V
C163	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C164	1-163-145-00	s	CAPACITOR,CHIP CERAMIC 1500PF
C165	1-163-145-00	s	CAPACITOR,CHIP CERAMIC 1500PF
C166	1-162-966-11	s	CAPACITOR,CERAMIC 2200PF/50V B
C167	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C168	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C169	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C170	1-104-851-11	s	CAPACITOR,TANTALUM 10MF/10V
C201	1-104-851-11	s	CAPACITOR,TANTALUM 10MF/10V
C202	1-104-851-11	s	CAPACITOR,TANTALUM 10MF/10V
C203	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C204	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C205	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C206	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C207	1-104-851-11	s	CAPACITOR,TANTALUM 10MF/10V
C208	1-104-851-11	s	CAPACITOR,TANTALUM 10MF/10V
C209	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C210	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C211	1-126-394-11	s	CAPACITOR,ELECT 10MF/16V(CHIP)
C212	1-126-394-11	s	CAPACITOR,ELECT 10MF/16V(CHIP)
C213	1-126-394-11	s	CAPACITOR,ELECT 10MF/16V(CHIP)
C214	1-126-394-11	s	CAPACITOR,ELECT 10MF/16V(CHIP)
C215	1-126-394-11	s	CAPACITOR,ELECT 10MF/16V(CHIP)
C216	1-126-394-11	s	CAPACITOR,ELECT 10MF/16V(CHIP)
C217	1-126-394-11	s	CAPACITOR,ELECT 10MF/16V(CHIP)
C218	1-126-394-11	s	CAPACITOR,ELECT 10MF/16V(CHIP)
C219	1-162-927-11	s	CAPACITOR,CERAMIC 100PF/50V CH
C220	1-162-927-11	s	CAPACITOR,CERAMIC 100PF/50V CH
C221	1-162-927-11	s	CAPACITOR,CERAMIC 100PF/50V CH
C222	1-162-927-11	s	CAPACITOR,CERAMIC 100PF/50V CH
C223	1-162-927-11	s	CAPACITOR,CERAMIC 100PF/50V CH
C224	1-162-927-11	s	CAPACITOR,CERAMIC 100PF/50V CH
C225	1-162-927-11	s	CAPACITOR,CERAMIC 100PF/50V CH
C226	1-162-927-11	s	CAPACITOR,CERAMIC 100PF/50V CH
C227	1-164-227-11	s	CAPACITOR,CERAMIC 0.022MF/25V
C228	1-164-227-11	s	CAPACITOR,CERAMIC 0.022MF/25V
C229	1-164-227-11	s	CAPACITOR,CERAMIC 0.022MF/25V
C230	1-164-227-11	s	CAPACITOR,CERAMIC 0.022MF/25V
C231	1-164-227-11	s	CAPACITOR,CERAMIC 0.022MF/25V
C232	1-164-227-11	s	CAPACITOR,CERAMIC 0.022MF/25V

(APR-45 BOARD(DSR-2000/2000P) SUFFIX -11, -12)

Ref. No. or Q'ty	Part No.	SP	Description
C233	1-164-227-11	s	CAPACITOR,CERAMIC 0.022MF/25V
C234	1-164-227-11	s	CAPACITOR,CERAMIC 0.022MF/25V
C243	1-126-395-11	s	CAPACITOR,ELECT 22MF/16V(CHIP)
C244	1-126-395-11	s	CAPACITOR,ELECT 22MF/16V(CHIP)
C245	1-126-395-11	s	CAPACITOR,ELECT 22MF/16V(CHIP)
C246	1-126-395-11	s	CAPACITOR,ELECT 22MF/16V(CHIP)
C247	1-162-927-11	s	CAPACITOR,CERAMIC 100PF/50V CH
C248	1-162-927-11	s	CAPACITOR,CERAMIC 100PF/50V CH
C249	1-162-927-11	s	CAPACITOR,CERAMIC 100PF/50V CH
C250	1-162-927-11	s	CAPACITOR,CERAMIC 100PF/50V CH
C251	1-162-927-11	s	CAPACITOR,CERAMIC 100PF/50V CH
C252	1-162-927-11	s	CAPACITOR,CERAMIC 100PF/50V CH
C253	1-162-927-11	s	CAPACITOR,CERAMIC 100PF/50V CH
C254	1-162-927-11	s	CAPACITOR,CERAMIC 100PF/50V CH
C255	1-126-395-11	s	CAPACITOR,ELECT 22MF/16V(CHIP)
C256	1-126-395-11	s	CAPACITOR,ELECT 22MF/16V(CHIP)
C257	1-126-395-11	s	CAPACITOR,ELECT 22MF/16V(CHIP)
C258	1-126-395-11	s	CAPACITOR,ELECT 22MF/16V(CHIP)
C259	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C260	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C261	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C262	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C263	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C264	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C265	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C266	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C267	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C268	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C269	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C270	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C271	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C272	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C273	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C274	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C301	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
C302	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
C303	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
C304	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
C305	1-109-982-11	s	CAPACITOR,CHIP CERAMIC 1MF/10V
C306	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
C307	1-104-851-11	s	CAPACITOR,TANTALUM 10MF/10V
C308	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
C309	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
C310	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
C311	1-162-927-11	s	CAPACITOR,CERAMIC 100PF/50V CH
C312	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
C313	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
C314	1-164-217-11	s	CAPACITOR,CERAMIC 150PF/50V CH
C315	1-164-217-11	s	CAPACITOR,CERAMIC 150PF/50V CH
C316	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
C317	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
C318	1-109-994-11	s	CAPACTOR, CHIP CERAMIC 2.2MF B
C319	1-109-994-11	s	CAPACTOR, CHIP CERAMIC 2.2MF B
C320	1-162-923-11	s	CAPACITOR,CERAMIC 47PF/50V CH
C321	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
C322	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
C323	1-104-851-11	s	CAPACITOR,TANTALUM 10MF/10V
C324	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
C325	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF

(APR-45 BOARD(DSR-2000/2000P) SUFFIX -11, -12)

Ref. No. or Q'ty	Part No.	SP	Description
C326	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
C327	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
C328	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
C329	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
C330	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
C331	1-162-921-11	s	CAPACITOR,CERAMIC 33PF/50V CH
C332	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
C333	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
C365	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C366	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C367	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C368	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C369	1-109-982-11	s	CAPACITOR,CHIP CERAMIC 1MF/10V
C370	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C371	1-104-851-11	s	CAPACITOR,TANTALUM 10MF/10V
C372	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C373	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C374	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C375	1-162-927-11	s	CAPACITOR,CERAMIC 100PF/50V CH
C376	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C377	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C378	1-162-927-11	s	CAPACITOR,CERAMIC 100PF/50V CH
C379	1-162-927-11	s	CAPACITOR,CERAMIC 100PF/50V CH
C380	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C381	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C382	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C383	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C401	1-126-396-11	s	CAPACITOR,ELECT 47MF/16V(CHIP)
C402	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C403	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C404	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C405	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C406	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C407	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C408	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C409	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C410	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C411	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C412	1-126-396-11	s	CAPACITOR,ELECT 47MF/16V(CHIP)
C413	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C414	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C415	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C416	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C417	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C418	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C419	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C421	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C422	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C423	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C424	1-126-396-11	s	CAPACITOR,ELECT 47MF/16V(CHIP)
C425	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C426	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C427	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C428	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C429	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C430	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C431	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C432	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C433	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F

(APR-45 BOARD(DSR-2000/2000P) SUFFIX -11, -12)

Ref. No. or Q'ty	Part No.	SP	Description
C434	1-126-396-11	s	CAPACITOR,ELECT 47MF/16V(CHIP)
C435	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C436	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C437	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C438	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C439	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C440	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C441	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C443	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C444	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C445	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C446	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
C447	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C448	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C451	1-162-923-11	s	CAPACITOR,CERAMIC 47PF/50V CH
C452	1-109-994-11	s	CAPACTOR, CHIP CERAMIC 2.2MF B
C454	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C455	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C456	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C457	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C458	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C459	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C460	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C461	1-162-923-11	s	CAPACITOR,CERAMIC 47PF/50V CH
C462	1-109-994-11	s	CAPACTOR, CHIP CERAMIC 2.2MF B
C464	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C465	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C466	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C467	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C468	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C469	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C470	1-162-923-11	s	CAPACITOR,CERAMIC 47PF/50V CH
C471	1-109-994-11	s	CAPACTOR, CHIP CERAMIC 2.2MF B
C473	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C474	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C475	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C476	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C477	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C478	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C479	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C480	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
C519	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C520	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C523	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C524	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C525	1-126-396-11	s	CAPACITOR,ELECT 47MF/16V(CHIP)
C526	1-126-396-11	s	CAPACITOR,ELECT 47MF/16V(CHIP)
C527	*2 1-128-416-11	s	CAPACITOR,ELECT 100MF/16V
C528	*2 1-128-416-11	s	CAPACITOR,ELECT 100MF/16V
C532	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C536	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C537	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C538	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C542	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C543	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C544	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
C545	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
C546	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
C547	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF

(APR-45 BOARD(DSR-2000/2000P) SUFFIX -11, -12)

Ref. No. or Q'ty	Part No.	SP	Description
C548	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
C549	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
C550	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
C551	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
C552	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
C553	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
C554	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
C555	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
C556	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
C557	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
C558	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
C559	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
C560	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
C561	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
C562	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
C563	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
C601	1-164-227-11	s	CAPACITOR,CERAMIC 0.022MF/25V
C602	1-164-227-11	s	CAPACITOR,CERAMIC 0.022MF/25V
C603	1-126-394-11	s	CAPACITOR,ELECT 10MF/16V(CHIP)
C604	1-126-394-11	s	CAPACITOR,ELECT 10MF/16V(CHIP)
C605	1-104-852-11	s	CAPACITOR,TANTALUM 22MF/10V
C606	1-164-227-11	s	CAPACITOR,CERAMIC 0.022MF/25V
C607	1-164-227-11	s	CAPACITOR,CERAMIC 0.022MF/25V
C608	1-164-227-11	s	CAPACITOR,CERAMIC 0.022MF/25V
C609	1-164-227-11	s	CAPACITOR,CERAMIC 0.022MF/25V
C610	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C611	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C612	1-162-970-11	s	CAPACITOR CERAMIC 0.01MF/25V B
C613	1-126-395-11	s	CAPACITOR,ELECT 22MF/16V(CHIP)
C614	1-126-395-11	s	CAPACITOR,ELECT 22MF/16V(CHIP)
C615	1-104-852-11	s	CAPACITOR,TANTALUM 22MF/10V
C651	1-164-315-11	s	CAPACITOR,CERAMIC 470PF/50V CH
C652	1-162-915-11	s	CAPACITOR,CERAMIC 10PF/50V CH
C653	1-162-915-11	s	CAPACITOR,CERAMIC 10PF/50V CH
C654	1-104-851-11	s	CAPACITOR,TANTALUM 10MF/10V
C655	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
C656	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C657	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
C658	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
C659	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C660	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
C661	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
C662	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C701	1-104-851-11	s	CAPACITOR,TANTALUM 10MF/10V
C702	1-104-851-11	s	CAPACITOR,TANTALUM 10MF/10V
C703	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C704	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C705	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C706	1-104-851-11	s	CAPACITOR,TANTALUM 10MF/10V
C707	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C708	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C709	1-104-852-11	s	CAPACITOR,TANTALUM 22MF/10V
C710	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C711	1-109-982-11	s	CAPACITOR,CHIP CERAMIC 1MF/10V
C712	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C713	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C714	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C715	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C716	1-104-852-11	s	CAPACITOR,TANTALUM 22MF/10V

(APR-45 BOARD(DSR-2000/2000P) SUFFIX -11, -12)

Ref. No. or Q'ty	Part No.	SP	Description
C717	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C718	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C719	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C720	1-162-923-11	s	CAPACITOR,CERAMIC 47PF/50V CH
C721	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C722	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C723	1-109-982-11	s	CAPACITOR,CHIP CERAMIC 1MF/10V
C724	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C725	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C726	1-162-915-11	s	CAPACITOR,CERAMIC 10PF/50V CH
C727	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C728	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C729	1-104-851-11	s	CAPACITOR,TANTALUM 10MF/10V
C730	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C731	1-104-851-11	s	CAPACITOR,TANTALUM 10MF/10V
C732	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C733	1-104-851-11	s	CAPACITOR,TANTALUM 10MF/10V
C734	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C735	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C736	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C737	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C738	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C739	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C740	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C741	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C742	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C743	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C744	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C751	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C752	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C753	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C754	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C755	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C756	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C757	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C758	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C759	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C760	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C761	1-104-851-11	s	CAPACITOR,TANTALUM 10MF/10V
C762	1-104-851-11	s	CAPACITOR,TANTALUM 10MF/10V
C763	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C764	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C765	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C766	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C767	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C768	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C769	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C770	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C771	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C772	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C773	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C774	1-162-915-11	s	CAPACITOR,CERAMIC 10PF/50V CH
C775	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C776	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C777	1-162-911-11	s	CAPACITOR,CERAMIC 6PF/50V 1608
C778	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C779	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C780	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C781	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F

(APR-45 BOARD(DSR-2000/2000P) SUFFIX -11, -12)

Ref. No. or Q'ty	Part No.	SP	Description
C782	1-104-851-11	s	CAPACITOR,TANTALUM 10MF/10V
C783	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C784	1-162-907-11	s	CAPACITOR,CERAMIC 2PF/50V(CK)
C785	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
C786 *2	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
C801	1-126-394-11	s	CAPACITOR,ELECT 10MF/16V(CHIP)
C802	1-126-394-11	s	CAPACITOR,ELECT 10MF/16V(CHIP)
C803	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
C804	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
C805	1-126-395-11	s	CAPACITOR,ELECT 22MF/16V(CHIP)
C806	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
C807	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
C808	1-135-259-11	s	CAPACITOR TANTALUM 10MF/6.3VF
C809	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
C810	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
C811	1-126-395-11	s	CAPACITOR,ELECT 22MF/16V(CHIP)
C812	1-109-982-11	s	CAPACITOR,CHIP CERAMIC 1MF/10V
C813	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
C814	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
C815	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
C816	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
C817	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
C818	1-126-395-11	s	CAPACITOR,ELECT 22MF/16V(CHIP)
C819	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
C820	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
C821	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
C822	1-162-923-11	s	CAPACITOR,CERAMIC 47PF/50V CH
C823	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
C824	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
C825	1-109-982-11	s	CAPACITOR,CHIP CERAMIC 1MF/10V
C826	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
C827	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
C828	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
C829	1-162-915-11	s	CAPACITOR,CERAMIC 10PF/50V CH
C830	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
C831	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
C832	1-126-394-11	s	CAPACITOR,ELECT 10MF/16V(CHIP)
C833	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
C834	1-126-394-11	s	CAPACITOR,ELECT 10MF/16V(CHIP)
C835	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
C836	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
C838	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
C839	1-126-394-11	s	CAPACITOR,ELECT 10MF/16V(CHIP)
C840	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C841	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C842	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C843	1-126-394-11	s	CAPACITOR,ELECT 10MF/16V(CHIP)
C844	1-162-907-11	s	CAPACITOR,CERAMIC 2PF/50V(CK)
C845	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
C846	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
C847	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
C848	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
C849	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
C850	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
C851	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
C852	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
C853	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
C854	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
C901	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F

(APR-45 BOARD(DSR-2000/2000P) SUFFIX -11, -12)

Ref. No. or Q'ty	Part No.	SP	Description
C902	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
C904	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
C905	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
C906	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
C907	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
C908	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
C909	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
C910	1-115-416-11	s	CAPACITOR,CERAMIC 1000PF/25V
C911	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
C912	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
C913	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
C914	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
C915	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
C916	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
C917	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C952	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
C953	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
C954	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
C957	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
C958	1-115-416-11	s	CAPACITOR,CERAMIC 1000PF/25V
C962	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
C963	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
C964	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
C965	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
C966	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
C1201	1-162-923-11	s	CAPACITOR,CERAMIC 47PF/50V CH
C1202 *2	1-128-416-11	s	CAPACITOR,ELECT 100MF/16V
*1	1-126-933-11	s	CAPACITOR,ELECT 100MF/16V
C1203	1-126-396-11	s	CAPACITOR,ELECT 47MF/16V(CHIP)
C1204	1-126-395-11	s	CAPACITOR,ELECT 22MF/16V(CHIP)
C1205 *2	1-128-416-11	s	CAPACITOR,ELECT 100MF/16V
*1	1-126-933-11	s	CAPACITOR,ELECT 100MF/16V
C1206	1-104-851-11	s	CAPACITOR,TANTALUM 10MF/10V
C1207	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C1208	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C1209	1-104-851-11	s	CAPACITOR,TANTALUM 10MF/10V
C1210	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C1211	1-126-394-11	s	CAPACITOR,ELECT 10MF/16V(CHIP)
C1212	1-126-394-11	s	CAPACITOR,ELECT 10MF/16V(CHIP)
C1213	1-126-394-11	s	CAPACITOR,ELECT 10MF/16V(CHIP)
C1214	1-126-394-11	s	CAPACITOR,ELECT 10MF/16V(CHIP)
C1215	1-162-927-11	s	CAPACITOR,CERAMIC 100PF/50V CH
C1216	1-162-927-11	s	CAPACITOR,CERAMIC 100PF/50V CH
C1217	1-162-927-11	s	CAPACITOR,CERAMIC 100PF/50V CH
C1218	1-162-927-11	s	CAPACITOR,CERAMIC 100PF/50V CH
C1251	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C1252	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C1253	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C1254	1-126-396-11	s	CAPACITOR,ELECT 47MF/16V(CHIP)
C1255	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C1256	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C1257	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C1258 *2	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C1259 *2	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C1260 *2	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C1261	1-126-396-11	s	CAPACITOR,ELECT 47MF/16V(CHIP)
C1262	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C1264	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C1265	1-109-982-11	s	CAPACITOR,CHIP CERAMIC 1MF/10V

(APR-45 BOARD(DSR-2000/2000P) SUFFIX -11, -12)

Ref. No. or Q'ty	Part No.	SP	Description
C1266	1-104-851-11	s	CAPACITOR,TANTALUM 10MF/10V
C1267	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C1268	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C1269	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C1270	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C1271	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C1272	1-162-927-11	s	CAPACITOR,CERAMIC 100PF/50V CH
C1273	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C1274	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C1275	1-164-217-11	s	CAPACITOR,CERAMIC 150PF/50V CH
C1276	1-164-217-11	s	CAPACITOR,CERAMIC 150PF/50V CH
C1277	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C1278	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C1279	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C1282	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
C1283	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
C1284	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
C1285	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
C1286	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
C1287	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
C1288	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
C1501	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
C1502	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
C1503	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
C1504	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
C1505	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
C1506	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
C1507	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
C1508	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
C1509	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
C1510	1-126-394-11	s	CAPACITOR,ELECT 10MF/16V(CHIP)
C1511	1-126-394-11	s	CAPACITOR,ELECT 10MF/16V(CHIP)
C1512	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
C1513	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
C1514	1-126-395-11	s	CAPACITOR,ELECT 22MF/16V(CHIP)
C1515	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
C1516	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
C1517	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
C1518	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
C1519	1-135-259-11	s	CAPACITOR TANTALUM 10MF/6.3VF
C1520	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
C1521	1-126-394-11	s	CAPACITOR,ELECT 10MF/16V(CHIP)
C1522	1-126-394-11	s	CAPACITOR,ELECT 10MF/16V(CHIP)
C1523	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
C1524	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
C1525	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
C1526	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
C1527	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
C1528	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
C1529	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
C1530	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
C1531	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
C1532	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
C1533	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
C1534	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
C1535	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
C1536	1-162-915-11	s	CAPACITOR,CERAMIC 10PF/50V CH
C1537	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
C1538	1-126-394-11	s	CAPACITOR,ELECT 10MF/16V(CHIP)

(APR-45 BOARD(DSR-2000/2000P) SUFFIX -11, -12)

Ref. No. or Q'ty	Part No.	SP	Description
C1539	1-162-911-11	s	CAPACITOR,CERAMIC 6PF/50V 1608
C1540	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
C1541	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
C1542	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
C1543	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
C1544	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
C1545	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
C1546	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
C1547	1-126-394-11	s	CAPACITOR,ELECT 10MF/16V(CHIP)
C1548	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
C1549	1-162-907-11	s	CAPACITOR,CERAMIC 2PF/50V(CK)
C1550	1-162-907-11	s	CAPACITOR,CERAMIC 2PF/50V(CK)
C1551	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
C1552	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
C1553	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
C1554	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
C1555	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
C1556	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
C1557	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
C1558	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
C1559	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
C1560	1-126-394-11	s	CAPACITOR,ELECT 10MF/16V(CHIP)
C1561	1-126-394-11	s	CAPACITOR,ELECT 10MF/16V(CHIP)
C1562	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
C1563	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
C1564	1-126-395-11	s	CAPACITOR,ELECT 22MF/16V(CHIP)
C1565	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
C1566	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
C1567	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
C1568	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
C1569	1-135-259-11	s	CAPACITOR TANTALUM 10MF/6.3VF
C1570	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
C1571	1-126-394-11	s	CAPACITOR,ELECT 10MF/16V(CHIP)
C1572	1-126-394-11	s	CAPACITOR,ELECT 10MF/16V(CHIP)
C1573	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
C1574	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
C1575	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
C1576	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
C1577	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
C1578	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
C1579	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
C1580	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
C1581	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
C1582	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
C1583	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
C1584	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
C1585	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
C1586	1-162-915-11	s	CAPACITOR,CERAMIC 10PF/50V CH
C1587	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
C1588	1-126-394-11	s	CAPACITOR,ELECT 10MF/16V(CHIP)
C1589	1-162-911-11	s	CAPACITOR,CERAMIC 6PF/50V 1608
C1590	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
C1591	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
C1592	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
C1593	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
C1594	1-126-394-11	s	CAPACITOR,ELECT 10MF/16V(CHIP)
C1595	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
C1596	1-162-907-11	s	CAPACITOR,CERAMIC 2PF/50V(CK)

(APR-45 BOARD(DSR-2000/2000P) SUFFIX -11, -12)

Ref. No. or Q'ty	Part No.	SP	Description
CN61 *1	1-770-678-11	o	CONNECTOR, BOARD TO BOARD 50P
CN701	1-764-243-11	o	CONNECTOR (COAXIAL)
CN751	1-764-243-11	o	CONNECTOR (COAXIAL)
CN801	1-764-243-11	o	CONNECTOR (COAXIAL)
CN802	1-764-243-11	o	CONNECTOR (COAXIAL)
CN1501	1-764-243-11	o	CONNECTOR (COAXIAL)
CN1502	1-764-243-11	o	CONNECTOR (COAXIAL)
CN1551	1-764-243-11	o	CONNECTOR (COAXIAL)
D2	8-719-941-09	s	DIODE DAP202U
D3	8-719-941-09	s	DIODE DAP202U
D57	8-719-951-22	s	DIODE IMN10
D61	8-719-041-39	s	DIODE KV1470 (5MA)
D102	8-719-941-09	s	DIODE DAP202U
D103	8-719-941-09	s	DIODE DAP202U
D301	8-719-041-39	s	DIODE KV1470 (5MA)
D351	8-719-041-39	s	DIODE KV1470 (5MA)
D501	8-719-404-35	s	DIODE MA141WK
D502	8-719-024-81	s	DIODE 1SS300-TE85L
D503	8-719-404-35	s	DIODE MA141WK
D504	8-719-024-81	s	DIODE 1SS300-TE85L
D505	8-719-404-35	s	DIODE MA141WK
D506	8-719-024-81	s	DIODE 1SS300-TE85L
D601	8-719-029-63	s	ZENER DIODE RD4.3UH-T1
D602	8-719-029-63	s	ZENER DIODE RD4.3UH-T1
D603	8-719-029-63	s	ZENER DIODE RD4.3UH-T1
D701	8-719-989-22	s	LED CL-150R-CD
D801	8-719-987-43	s	LED CL-150PG-CD
D802	8-719-987-43	s	LED CL-150PG-CD
D803	8-719-987-41	s	LED CL-150Y-CD
D804	8-719-989-22	s	LED CL-150R-CD
D805	8-719-989-22	s	LED CL-150R-CD
D806	8-719-989-22	s	LED CL-150R-CD
D901	8-719-989-22	s	LED CL-150R-CD
D902	8-719-989-22	s	LED CL-150R-CD
D903	8-719-947-01	s	DIODE FMP1
D904	8-719-820-41	s	DIODE 1SS302
D951	8-719-820-41	s	DIODE 1SS302
D1501	8-719-989-22	s	LED CL-150R-CD
D1551	8-719-989-22	s	LED CL-150R-CD
FB501	1-543-644-11	s	BEAD, FERRITE (CHIP)
FB502	1-543-644-11	s	BEAD, FERRITE (CHIP)
FB701	1-543-644-11	s	BEAD, FERRITE (CHIP)
FB702	1-543-644-11	s	BEAD, FERRITE (CHIP)
FB703	1-543-644-11	s	BEAD, FERRITE (CHIP)
FB751	1-543-644-11	s	BEAD, FERRITE (CHIP)
FB752	1-543-644-11	s	BEAD, FERRITE (CHIP)
FB753	1-543-644-11	s	BEAD, FERRITE (CHIP)
FB754	1-543-644-11	s	BEAD, FERRITE (CHIP)
FB802	1-543-644-11	s	BEAD, FERRITE (CHIP)
FB803	1-543-644-11	s	BEAD, FERRITE (CHIP)
FB805	1-543-644-11	s	BEAD, FERRITE (CHIP)
FB806	1-543-644-11	s	BEAD, FERRITE (CHIP)
FB807	1-543-644-11	s	BEAD, FERRITE (CHIP)
FB808	1-543-644-11	s	BEAD, FERRITE (CHIP)
FB809	1-543-644-11	s	BEAD, FERRITE (CHIP)
FB1501	1-543-644-11	s	BEAD, FERRITE (CHIP)
FB1503	1-543-644-11	s	BEAD, FERRITE (CHIP)

(APR-45 BOARD(DSR-2000/2000P) SUFFIX -11, -12)

Ref. No. or Q'ty	Part No.	SP	Description
FB1504	1-543-644-11	s	BEAD, FERRITE (CHIP)
FB1505	1-543-644-11	s	BEAD, FERRITE (CHIP)
FB1506	1-543-644-11	s	BEAD, FERRITE (CHIP)
FB1551	1-543-644-11	s	BEAD, FERRITE (CHIP)
FB1553	1-543-644-11	s	BEAD, FERRITE (CHIP)
FB1554	1-543-644-11	s	BEAD, FERRITE (CHIP)
FB1555	1-543-644-11	s	BEAD, FERRITE (CHIP)
FL901	1-233-674-21	s	FILTER, EMI
FL902	1-233-674-21	s	FILTER, EMI
IC7	8-759-394-76	s	IC NJM2068M-D (TE2)
IC8	8-759-394-76	s	IC NJM2068M-D (TE2)
IC16	8-759-523-01	s	IC TC74HC4052AFT(EL)
IC17	8-759-523-01	s	IC TC74HC4052AFT(EL)
IC18	8-759-711-85	s	IC NJM4580E-D
IC19	8-759-711-85	s	IC NJM4580E-D
IC20	8-759-462-08	s	IC AK5352-VF (E2)
IC51	8-759-711-85	s	IC NJM4580E-D
IC55	8-759-711-85	s	IC NJM4580E-D
IC56	8-759-711-85	s	IC NJM4580E-D
IC61 *2	8-759-650-01	s	IC CXD9125R
IC63	8-759-490-41	s	IC TC74VHCT541AFT(EL)
IC64	8-759-599-17	s	IC XC17S40XLSO20C
IC65	8-759-702-02	s	IC NJM062M
IC66	8-759-362-16	s	IC CXD2913AQ
IC67	8-729-039-85	s	IC UPC29L05T
IC68	8-759-082-58	s	IC TC7W08FU
IC69	8-759-426-24	s	IC TC7ST08FU(TE85R)
IC70 *2	8-759-524-50	s	IC TC74VHC541FT(EL)
IC71 *2	8-759-524-50	s	IC TC74VHC541FT(EL)
IC72	8-759-490-41	s	IC TC74VHCT541AFT(EL)
IC73	8-759-490-41	s	IC TC74VHCT541AFT(EL)
IC74	8-759-490-41	s	IC TC74VHCT541AFT(EL)
IC75 *2	8-759-524-50	s	IC TC74VHC541FT(EL)
IC107	8-759-394-76	s	IC NJM2068M-D (TE2)
IC108	8-759-394-76	s	IC NJM2068M-D (TE2)
IC116	8-759-523-01	s	IC TC74HC4052AFT(EL)
IC117	8-759-523-01	s	IC TC74HC4052AFT(EL)
IC118	8-759-711-85	s	IC NJM4580E-D
IC119	8-759-711-85	s	IC NJM4580E-D
IC120	8-759-462-08	s	IC AK5352-VF (E2)
IC201	8-759-536-23	s	IC AK4324-VF-E2
IC202	8-759-536-23	s	IC AK4324-VF-E2
IC203	8-759-711-85	s	IC NJM4580E-D
IC204	8-759-711-85	s	IC NJM4580E-D
IC205	8-759-711-85	s	IC NJM4580E-D
IC206	8-759-711-85	s	IC NJM4580E-D
IC207	8-759-523-01	s	IC TC74HC4052AFT(EL)
IC208	8-759-523-01	s	IC TC74HC4052AFT(EL)
IC209	8-759-523-01	s	IC TC74HC4052AFT(EL)
IC210	8-759-523-01	s	IC TC74HC4052AFT(EL)
IC211	8-759-711-85	s	IC NJM4580E-D
IC212	8-759-711-85	s	IC NJM4580E-D
IC213	8-759-711-85	s	IC NJM4580E-D
IC214	8-759-711-85	s	IC NJM4580E-D
IC215	8-759-523-01	s	IC TC74HC4052AFT(EL)
IC216	8-759-523-01	s	IC TC74HC4052AFT(EL)
IC217	8-759-523-01	s	IC TC74HC4052AFT(EL)
IC218	8-759-523-01	s	IC TC74HC4052AFT(EL)

(APR-45 BOARD(DSR-2000/2000P) SUFFIX -11, -12)

Ref. No. or Q'ty	Part No.	SP	Description
IC301	8-759-196-96	s	IC TC7SH08FU (TE85R)
IC302	8-759-429-28	s	IC CXD8630R
IC304	8-759-491-46	s	IC TC74VHCT04AFT (EL)
IC305	8-759-362-16	s	IC CXD2913AQ
IC306	8-759-702-02	s	IC NJM062M
IC307	8-729-039-85	s	IC UPC29L05T
IC308	8-759-523-79	s	IC TC74VHC02FT
IC309	8-759-523-95	s	IC TC74VHC74FT(EL)
IC310	8-759-902-88	s	IC SN74LS123NS
IC311	8-759-523-79	s	IC TC74VHC02FT
IC312	8-759-524-19	s	IC TC74VHC164FT(EL)
IC313	8-759-524-19	s	IC TC74VHC164FT(EL)
IC314	8-759-326-71	s	IC CXD8517Q
IC315	8-759-326-71	s	IC CXD8517Q
IC316	8-759-523-84	s	IC TC74VHC14FT (EL)
IC317	8-759-426-24	s	IC TC7ST08FU(TE85R)
IC352	8-759-429-28	s	IC CXD8630R
IC353	8-759-702-02	s	IC NJM062M
IC354	8-759-362-16	s	IC CXD2913AQ
IC355	8-729-039-85	s	IC UPC29L05T
IC356	8-759-524-50	s	IC TC74VHC541FT(EL)
IC357	8-759-490-41	s	IC TC74VHCT541AFT(EL)
IC401	8-759-549-20	s	IC SN74LV541APWR
IC402	8-759-523-94	s	IC TC74VHC32FT(EL)
IC403	8-752-391-87	s	IC CXD2712R
IC405	8-759-645-48	s	IC IDT71V016S15PH-TL
IC406	8-752-391-87	s	IC CXD2712R
IC407	8-752-391-87	s	IC CXD2712R
IC409	8-759-645-48	s	IC IDT71V016S15PH-TL
IC410	8-752-391-87	s	IC CXD2712R
IC411	8-759-490-41	s	IC TC74VHCT541AFT(EL)
IC412	8-759-196-96	s	IC TC7SH08FU (TE85R)
IC413	8-759-196-96	s	IC TC7SH08FU (TE85R)
IC414	8-759-196-96	s	IC TC7SH08FU (TE85R)
IC415	8-759-196-96	s	IC TC7SH08FU (TE85R)
IC451	8-759-523-79	s	IC TC74VHC02FT
IC452	8-759-523-79	s	IC TC74VHC02FT
IC453	8-759-902-88	s	IC SN74LS123NS
IC454	8-759-523-95	s	IC TC74VHC74FT(EL)
IC455	8-759-524-19	s	IC TC74VHC164FT(EL)
IC456	8-759-524-50	s	IC TC74VHC541FT(EL)
IC457	8-759-326-71	s	IC CXD8517Q
IC458	8-759-326-71	s	IC CXD8517Q
IC459	8-759-523-79	s	IC TC74VHC02FT
IC460	8-759-902-88	s	IC SN74LS123NS
IC461	8-759-523-95	s	IC TC74VHC74FT(EL)
IC462	8-759-524-19	s	IC TC74VHC164FT(EL)
IC463	8-759-326-71	s	IC CXD8517Q
IC464	8-759-326-71	s	IC CXD8517Q
IC465	8-759-523-79	s	IC TC74VHC02FT
IC466	8-759-902-88	s	IC SN74LS123NS
IC467	8-759-523-95	s	IC TC74VHC74FT(EL)
IC468	8-759-524-19	s	IC TC74VHC164FT(EL)
IC469	8-759-326-71	s	IC CXD8517Q
IC470	8-759-326-71	s	IC CXD8517Q
IC471	8-759-490-41	s	IC TC74VHCT541AFT(EL)
IC472	8-759-549-20	s	IC SN74LV541APWR
IC501	8-759-549-15	s	IC SN74LV245APWR
IC502	8-759-479-32	s	IC SN75C1168NS (E05)

(APR-45 BOARD(DSR-2000/2000P) SUFFIX -11, -12)

Ref. No. or Q'ty	Part No.	SP	Description
IC503	8-759-523-94	s	IC TC74VHC32FT(EL)
IC504	8-759-185-75	s	IC TC74VHC123AF (EL)
IC505	8-759-590-19	s	IC CXD9068BR
IC506	8-759-481-08	s	IC TC7SET02FU (TE85R)
IC507	8-759-180-84	s	IC TC7W74F
IC508	8-759-426-24	s	IC TC7ST08FU(TE85R)
IC509	8-759-524-18	s	IC TC74VHC163FT(EL)
IC510 *f	8-759-669-75	s	IC TLC2932IPWR
*e	8-759-295-09	s	IC TLC2932IPW
IC511 *f	8-759-669-75	s	IC TLC2932IPWR
*e	8-759-295-09	s	IC TLC2932IPW
IC512	8-759-549-20	s	IC SN74LV541APWR
IC513	8-759-524-18	s	IC TC74VHC163FT(EL)
IC514	8-759-549-20	s	IC SN74LV541APWR
IC515	8-759-447-77	s	IC TC7WH74FU (TR12R)
IC516	8-759-481-08	s	IC TC7SET02FU (TE85R)
IC517	8-759-426-24	s	IC TC7ST08FU(TE85R)
IC518	8-759-524-18	s	IC TC74VHC163FT(EL)
IC519	8-759-524-18	s	IC TC74VHC163FT(EL)
IC520	8-759-447-77	s	IC TC7WH74FU (TR12R)
IC521	8-759-549-20	s	IC SN74LV541APWR
IC522	8-759-549-20	s	IC SN74LV541APWR
IC601	8-759-324-03	s	IC HA17431UA(TL)
IC602	8-759-710-78	s	IC NJM082BM
IC603	8-759-710-78	s	IC NJM082BM
IC651 *d	8-759-664-35	s	IC UPD78011FGC-594
*c	8-759-370-19	o	IC UPD78P018FGC-AB
IC652	8-759-491-51	s	IC TC74VHCT245AFT(EL)
IC653	8-759-524-28	s	IC TC74VHC245FT(EL)
IC654	8-759-524-07	s	IC TC74VHC138FT(EL)
IC655	8-759-524-07	s	IC TC74VHC138FT(EL)
IC656	8-759-393-39	s	IC SN74LVC245ANS (E05)
IC657	8-759-524-51	s	IC TC74VHC573FT (EL)
IC659	8-759-082-59	s	IC TC7W32FU
IC660	8-759-523-81	s	IC TC74VHC08FT(EL)
IC701	8-759-259-77	s	IC PQ20VZ5U
IC702	8-752-078-34	s	IC CXB1342R
IC703	8-759-369-93	s	IC CXD8969AR
IC705	8-759-490-41	s	IC TC74VHCT541AFT(EL)
IC706	8-759-524-50	s	IC TC74VHC541FT(EL)
IC707	8-759-524-50	s	IC TC74VHC541FT(EL)
IC708	8-759-524-50	s	IC TC74VHC541FT(EL)
IC709	8-759-271-86	s	IC TC7SH04FU
IC710	8-759-196-96	s	IC TC7SH08FU (TE85R)
IC711	8-759-271-86	s	IC TC7SH04FU
IC712	8-759-447-77	s	IC TC7WH74FU (TR12R)
IC751	8-759-524-50	s	IC TC74VHC541FT(EL)
IC752	8-759-369-93	s	IC CXD8969AR
IC753	8-752-078-32	s	IC CXB1341R
IC754	8-759-271-86	s	IC TC7SH04FU
IC755 *2	8-759-271-86	s	IC TC7SH04FU
IC801	8-759-324-03	s	IC HA17431UA(TL)
IC802	8-752-078-34	s	IC CXB1342R
IC803	8-759-490-41	s	IC TC74VHCT541AFT(EL)
IC804	8-759-490-41	s	IC TC74VHCT541AFT(EL)
IC805	8-759-271-86	s	IC TC7SH04FU
IC806	8-759-344-84	s	IC CXD8953Q
IC807	8-759-082-57	s	IC TC7W04FU
IC808	8-759-082-57	s	IC TC7W04FU

(APR-45 BOARD(DSR-2000/2000P) SUFFIX -11, -12)

Ref. No. or Q'ty	Part No.	SP	Description
IC901	8-759-523-94	s	IC TC74VHC32FT(EL)
IC902	8-759-524-18	s	IC TC74VHC163FT(EL)
IC903	8-759-242-78	s	IC TC7W02F
IC904	8-759-172-72	s	IC CXD8386AQ
IC905 *b	8-759-196-97	s	IC TC7SH32FU(TE85R)
*a	8-759-271-86	s	IC TC7SH04FU
IC906	8-759-491-46	s	IC TC74VHCT04AFT (EL)
IC907	8-759-289-69	s	IC CXD8280AQ
IC908	8-759-523-97	s	IC TC74VHC123AFT(EL)
IC909	8-759-523-97	s	IC TC74VHC123AFT(EL)
IC910	8-759-523-81	s	IC TC74VHC08FT(EL)
IC911	8-759-524-50	s	IC TC74VHC541FT(EL)
IC912	8-759-524-50	s	IC TC74VHC541FT(EL)
IC913	8-759-277-63	s	IC TC7W14FU (TE12R)
IC914	8-759-196-96	s	IC TC7SH08FU (TE85R)
IC951	8-759-271-86	s	IC TC7SH04FU
IC952	8-759-524-50	s	IC TC74VHC541FT(EL)
IC953	8-759-524-52	s	IC TC74VHC574FT(EL)
IC954	8-759-524-52	s	IC TC74VHC574FT(EL)
IC955	8-759-523-84	s	IC TC74VHC14FT (EL)
IC959	8-759-524-18	s	IC TC74VHC163FT(EL)
IC960	8-759-523-94	s	IC TC74VHC32FT(EL)
IC961	8-759-519-12	s	IC CXD8281Q
IC962	8-759-172-73	s	IC CXD8385Q
IC1201	8-759-536-23	s	IC AK4324-VF-E2
IC1501	8-759-344-84	s	IC CXD8953Q
IC1502	8-759-524-50	s	IC TC74VHC541FT(EL)
IC1503	8-759-524-50	s	IC TC74VHC541FT(EL)
IC1504	8-759-524-50	s	IC TC74VHC541FT(EL)
IC1505	8-759-524-50	s	IC TC74VHC541FT(EL)
IC1506	8-759-058-58	s	IC TC7S04FU-TE85R
IC1507	8-759-324-03	s	IC HA17431UA(TL)
IC1508	8-752-078-32	s	IC CXB1341R
IC1551	8-759-344-84	s	IC CXD8953Q
IC1552	8-759-524-50	s	IC TC74VHC541FT(EL)
IC1553	8-759-524-50	s	IC TC74VHC541FT(EL)
IC1554	8-759-524-50	s	IC TC74VHC541FT(EL)
IC1555	8-759-524-50	s	IC TC74VHC541FT(EL)
IC1556	8-759-058-58	s	IC TC7S04FU-TE85R
IC1557	8-759-324-03	s	IC HA17431UA(TL)
IC1558	8-752-078-32	s	IC CXB1341R
L61	1-414-398-11	s	INDUCTOR (SMD) 10UH
L63	1-414-398-11	s	INDUCTOR (SMD) 10UH
L301	1-414-398-11	s	INDUCTOR (SMD) 10UH
L302	1-414-398-11	s	INDUCTOR (SMD) 10UH
L303	1-414-398-11	s	INDUCTOR (SMD) 10UH
L351	1-414-398-11	s	INDUCTOR (SMD) 10UH
L401	1-414-398-11	s	INDUCTOR (SMD) 10UH
L402	1-414-398-11	s	INDUCTOR (SMD) 10UH
L403	1-414-398-11	s	INDUCTOR (SMD) 10UH
L404	1-414-398-11	s	INDUCTOR (SMD) 10UH
L451	1-412-939-11	s	INDUCTOR 1.0UH (2520)
L452	1-412-939-11	s	INDUCTOR 1.0UH (2520)
L453	1-412-939-11	s	INDUCTOR 1.0UH (2520)
L454	1-412-939-11	s	INDUCTOR 1.0UH (2520)
L455	1-412-939-11	s	INDUCTOR 1.0UH (2520)
L456	1-412-939-11	s	INDUCTOR 1.0UH (2520)
L501	1-414-398-11	s	INDUCTOR (SMD) 10UH
L502	1-414-398-11	s	INDUCTOR (SMD) 10UH

(APR-45 BOARD(DSR-2000/2000P) SUFFIX -11, -12)

Ref. No. or Q'ty	Part No.	SP	Description
L505	1-414-398-11	s	INDUCTOR (SMD) 10UH
L506	1-414-398-11	s	INDUCTOR (SMD) 10UH
L507	1-414-398-11	s	INDUCTOR (SMD) 10UH
L601	1-424-643-11	s	COIL, CHOKE 10UH
L602	1-424-643-11	s	COIL, CHOKE 10UH
L701	1-410-797-11	s	CHIP INDUCTOR 0.015UH (3225)
L702	1-412-939-11	s	INDUCTOR 1.0UH (2520)
L703	1-412-939-11	s	INDUCTOR 1.0UH (2520)
L751	1-412-939-11	s	INDUCTOR 1.0UH (2520)
L801	1-410-797-11	s	CHIP INDUCTOR 0.015UH (3225)
LV61	1-411-984-11	s	COIL, VARIABLE
LV301	1-411-984-11	s	COIL, VARIABLE
LV351	1-411-984-11	s	COIL, VARIABLE
PS701 ⚠	1-533-282-21	s	CIRCUIT PROTECTOR 2A (3225)
PS702 ⚠	1-533-282-21	s	CIRCUIT PROTECTOR 2A (3225)
Q51	8-729-209-07	s	TRANSISTOR 2SC4213-B
Q53	8-729-141-48	s	TRANSISTOR 2SB624-BV345
Q54	8-729-029-14	s	TRANSISTOR DTC144EUA-T106
Q55	8-729-110-92	s	TRANSISTOR 2SK425-X13
Q601	8-729-020-94	s	TRANSISTOR 2SA1314C-TE12L
Q602	8-729-808-42	s	TRANSISTOR 2SD1624-T
Q603	8-729-141-48	s	TRANSISTOR 2SB624-BV345
Q651	8-729-029-14	s	TRANSISTOR DTC144EUA-T106
Q652	8-729-029-14	s	TRANSISTOR DTC144EUA-T106
Q653	8-729-028-91	s	TRANSISTOR DTA144EUA-T106
Q654	8-729-029-14	s	TRANSISTOR DTC144EUA-T106
Q751	8-729-105-68	s	TRANSISTOR 2SC3356-K
Q752	8-729-105-68	s	TRANSISTOR 2SC3356-K
Q753	8-729-105-68	s	TRANSISTOR 2SC3356-K
Q801	8-729-807-51	s	TRANSISTOR 2SD1623-S
Q802	8-729-029-14	s	TRANSISTOR DTC144EUA-T106
Q803	8-729-028-91	s	TRANSISTOR DTA144EUA-T106
Q804	8-729-105-68	s	TRANSISTOR 2SC3356-K
Q805	8-729-105-68	s	TRANSISTOR 2SC3356-K
Q806	8-729-105-68	s	TRANSISTOR 2SC3356-K
Q901	8-729-028-91	s	TRANSISTOR DTA144EUA-T106
Q902	8-729-028-73	s	TRANSISTOR DTA114EUA-T106
Q951	8-729-029-14	s	TRANSISTOR DTC144EUA-T106
Q952	8-729-029-14	s	TRANSISTOR DTC144EUA-T106
Q1501	8-729-807-51	s	TRANSISTOR 2SD1623-S
Q1502	8-729-029-14	s	TRANSISTOR DTC144EUA-T106
Q1503	8-729-028-91	s	TRANSISTOR DTA144EUA-T106
Q1504	8-729-028-91	s	TRANSISTOR DTA144EUA-T106
Q1505	8-729-105-68	s	TRANSISTOR 2SC3356-K
Q1506	8-729-105-68	s	TRANSISTOR 2SC3356-K
Q1507	8-729-105-68	s	TRANSISTOR 2SC3356-K
Q1508	8-729-105-68	s	TRANSISTOR 2SC3356-K
Q1551	8-729-807-51	s	TRANSISTOR 2SD1623-S
Q1552	8-729-029-14	s	TRANSISTOR DTC144EUA-T106
Q1553	8-729-028-91	s	TRANSISTOR DTA144EUA-T106
Q1554	8-729-028-91	s	TRANSISTOR DTA144EUA-T106
Q1555	8-729-105-68	s	TRANSISTOR 2SC3356-K
Q1556	8-729-105-68	s	TRANSISTOR 2SC3356-K
Q1557	8-729-105-68	s	TRANSISTOR 2SC3356-K
R1	1-216-864-11	s	RESISTOR,CHIP 0 1/16W (1608)
R2	1-218-855-11	s	RESISTOR,CHIP 2.2K 1/16W(1608)
R3	1-216-864-11	s	RESISTOR,CHIP 0 1/16W (1608)
R4	1-218-855-11	s	RESISTOR,CHIP 2.2K 1/16W(1608)

(APR-45 BOARD(DSR-2000/2000P) SUFFIX -11, -12)

Ref. No. or Q'ty	Part No.	SP	Description
R5	1-218-855-11	s	RESISTOR,CHIP 2.2K 1/16W(1608)
R6	1-218-855-11	s	RESISTOR,CHIP 2.2K 1/16W(1608)
R41	1-218-855-11	s	RESISTOR,CHIP 2.2K 1/16W(1608)
R42	1-218-855-11	s	RESISTOR,CHIP 2.2K 1/16W(1608)
R43	1-218-855-11	s	RESISTOR,CHIP 2.2K 1/16W(1608)
R44	1-218-855-11	s	RESISTOR,CHIP 2.2K 1/16W(1608)
R99	1-218-843-11	s	RESISTOR,CHIP 680 1/16W (1608)
R101	1-216-864-11	s	RESISTOR,CHIP 0 1/16W (1608)
R103	1-216-864-11	s	RESISTOR,CHIP 0 1/16W (1608)
R105	1-218-855-11	s	RESISTOR,CHIP 2.2K 1/16W(1608)
R106	1-218-855-11	s	RESISTOR,CHIP 2.2K 1/16W(1608)
R109	1-218-855-11	s	RESISTOR,CHIP 2.2K 1/16W(1608)
R110	1-218-855-11	s	RESISTOR,CHIP 2.2K 1/16W(1608)
R141	1-218-855-11	s	RESISTOR,CHIP 2.2K 1/16W(1608)
R142	1-218-855-11	s	RESISTOR,CHIP 2.2K 1/16W(1608)
R143	1-218-855-11	s	RESISTOR,CHIP 2.2K 1/16W(1608)
R144	1-218-855-11	s	RESISTOR,CHIP 2.2K 1/16W(1608)
R199	1-218-843-11	s	RESISTOR,CHIP 680 1/16W (1608)
R201	1-211-969-11	s	RESISTOR,CHIP 10 1/16W (1608)
R202	1-211-969-11	s	RESISTOR,CHIP 10 1/16W (1608)
R205	1-218-880-11	s	RESISTOR,CHIP 24K 1/16W (1608)
R206	1-218-880-11	s	RESISTOR,CHIP 24K 1/16W (1608)
R207	1-218-880-11	s	RESISTOR,CHIP 24K 1/16W (1608)
R208	1-218-880-11	s	RESISTOR,CHIP 24K 1/16W (1608)
R209	1-218-881-11	s	RESISTOR, CHIP 27K 1/16W(1608)
R210	1-218-881-11	s	RESISTOR, CHIP 27K 1/16W(1608)
R211	1-218-881-11	s	RESISTOR, CHIP 27K 1/16W(1608)
R212	1-218-881-11	s	RESISTOR, CHIP 27K 1/16W(1608)
R213	1-218-880-11	s	RESISTOR,CHIP 24K 1/16W (1608)
R214	1-218-880-11	s	RESISTOR,CHIP 24K 1/16W (1608)
R215	1-218-880-11	s	RESISTOR,CHIP 24K 1/16W (1608)
R216	1-218-880-11	s	RESISTOR,CHIP 24K 1/16W (1608)
R217	1-218-881-11	s	RESISTOR, CHIP 27K 1/16W(1608)
R218	1-218-881-11	s	RESISTOR, CHIP 27K 1/16W(1608)
R219	1-218-881-11	s	RESISTOR, CHIP 27K 1/16W(1608)
R220	1-218-881-11	s	RESISTOR, CHIP 27K 1/16W(1608)
R221	1-216-864-11	s	RESISTOR,CHIP 0 1/16W (1608)
R222	1-216-864-11	s	RESISTOR,CHIP 0 1/16W (1608)
R223	1-216-864-11	s	RESISTOR,CHIP 0 1/16W (1608)
R224	1-216-864-11	s	RESISTOR,CHIP 0 1/16W (1608)
R225	1-216-864-11	s	RESISTOR,CHIP 0 1/16W (1608)
R226	1-216-864-11	s	RESISTOR,CHIP 0 1/16W (1608)
R227	1-216-864-11	s	RESISTOR,CHIP 0 1/16W (1608)
R228	1-216-864-11	s	RESISTOR,CHIP 0 1/16W (1608)
R229	1-216-864-11	s	RESISTOR,CHIP 0 1/16W (1608)
R230	1-216-864-11	s	RESISTOR,CHIP 0 1/16W (1608)
R231	1-216-864-11	s	RESISTOR,CHIP 0 1/16W (1608)
R232	1-216-864-11	s	RESISTOR,CHIP 0 1/16W (1608)
R237	1-218-865-11	s	RESISTOR,CHIP 5.6K 1/16W(1608)
R238	1-218-868-11	s	RESISTOR,CHIP 7.5K 1/16W(1608)
R239	1-218-875-11	s	RESISTOR,CHIP 15K 1/16W (1608)
R240	1-218-345-11	s	RESISTOR,CHIP 9.1K 1/16W(1608)
R241	1-218-865-11	s	RESISTOR,CHIP 5.6K 1/16W(1608)
R242	1-218-868-11	s	RESISTOR,CHIP 7.5K 1/16W(1608)
R243	1-218-875-11	s	RESISTOR,CHIP 15K 1/16W (1608)
R244	1-218-345-11	s	RESISTOR,CHIP 9.1K 1/16W(1608)
R245	1-218-865-11	s	RESISTOR,CHIP 5.6K 1/16W(1608)
R246	1-218-868-11	s	RESISTOR,CHIP 7.5K 1/16W(1608)
R247	1-218-875-11	s	RESISTOR,CHIP 15K 1/16W (1608)

(APR-45 BOARD(DSR-2000/2000P) SUFFIX -11, -12)

Ref. No. or Q'ty	Part No.	SP	Description
R248	1-218-345-11	s	RESISTOR,CHIP 9.1K 1/16W(1608)
R249	1-218-865-11	s	RESISTOR,CHIP 5.6K 1/16W(1608)
R250	1-218-868-11	s	RESISTOR,CHIP 7.5K 1/16W(1608)
R251	1-218-875-11	s	RESISTOR,CHIP 15K 1/16W (1608)
R252	1-218-345-11	s	RESISTOR,CHIP 9.1K 1/16W(1608)
R253	1-218-836-11	s	RESISTOR,CHIP 360 1/16W (1608)
R254	1-216-816-11	s	RESISTOR, CHIP 390 1/16W 1608
R255	1-218-836-11	s	RESISTOR,CHIP 360 1/16W (1608)
R256	1-216-816-11	s	RESISTOR, CHIP 390 1/16W 1608
R257	1-218-836-11	s	RESISTOR,CHIP 360 1/16W (1608)
R258	1-216-816-11	s	RESISTOR, CHIP 390 1/16W 1608
R259	1-218-836-11	s	RESISTOR,CHIP 360 1/16W (1608)
R260	1-216-816-11	s	RESISTOR, CHIP 390 1/16W 1608
R261	1-218-864-11	s	RESISTOR,CHIP 5.1K 1/16W(1608)
R262	1-218-864-11	s	RESISTOR,CHIP 5.1K 1/16W(1608)
R263	1-218-864-11	s	RESISTOR,CHIP 5.1K 1/16W(1608)
R264	1-218-864-11	s	RESISTOR,CHIP 5.1K 1/16W(1608)
R265	1-218-863-11	s	RESISTOR,CHIP 4.7K 1/16W(1608)
R266	1-218-868-11	s	RESISTOR,CHIP 7.5K 1/16W(1608)
R267	1-218-875-11	s	RESISTOR,CHIP 15K 1/16W (1608)
R268	1-218-344-11	s	RESISTOR,CHIP 7.5K 1/16W(1608)
R269	1-218-863-11	s	RESISTOR,CHIP 4.7K 1/16W(1608)
R270	1-218-868-11	s	RESISTOR,CHIP 7.5K 1/16W(1608)
R271	1-218-875-11	s	RESISTOR,CHIP 15K 1/16W (1608)
R272	1-218-344-11	s	RESISTOR,CHIP 7.5K 1/16W(1608)
R273	1-218-863-11	s	RESISTOR,CHIP 4.7K 1/16W(1608)
R274	1-218-868-11	s	RESISTOR,CHIP 7.5K 1/16W(1608)
R275	1-218-875-11	s	RESISTOR,CHIP 15K 1/16W (1608)
R276	1-218-344-11	s	RESISTOR,CHIP 7.5K 1/16W(1608)
R277	1-218-863-11	s	RESISTOR,CHIP 4.7K 1/16W(1608)
R278	1-218-868-11	s	RESISTOR,CHIP 7.5K 1/16W(1608)
R279	1-218-875-11	s	RESISTOR,CHIP 15K 1/16W (1608)
R280	1-218-344-11	s	RESISTOR,CHIP 7.5K 1/16W(1608)
R281	1-211-983-11	s	RESISTOR,CHIP 39 1/16W (1608)
R282	1-216-843-11	s	RESISTOR,CHIP 68K 1/16W (1608)
R283	1-211-983-11	s	RESISTOR,CHIP 39 1/16W (1608)
R284	1-216-843-11	s	RESISTOR,CHIP 68K 1/16W (1608)
R285	1-211-983-11	s	RESISTOR,CHIP 39 1/16W (1608)
R286	1-216-843-11	s	RESISTOR,CHIP 68K 1/16W (1608)
R287	1-211-983-11	s	RESISTOR,CHIP 39 1/16W (1608)
R288	1-216-843-11	s	RESISTOR,CHIP 68K 1/16W (1608)
R289	1-218-863-11	s	RESISTOR,CHIP 4.7K 1/16W(1608)
R290	1-218-863-11	s	RESISTOR,CHIP 4.7K 1/16W(1608)
R291	1-218-863-11	s	RESISTOR,CHIP 4.7K 1/16W(1608)
R292	1-218-863-11	s	RESISTOR,CHIP 4.7K 1/16W(1608)
R308	1-218-873-11	s	RESISTOR,CHIP 12K 1/16W (1608)
R309	1-218-875-11	s	RESISTOR,CHIP 15K 1/16W (1608)
R310	1-218-887-11	s	RESISTOR,CHIP 47K 1/16W (1608)
R311	1-218-863-11	s	RESISTOR,CHIP 4.7K 1/16W(1608)
R312	1-218-875-11	s	RESISTOR,CHIP 15K 1/16W (1608)
R313	1-218-887-11	s	RESISTOR,CHIP 47K 1/16W (1608)
R314	1-218-887-11	s	RESISTOR,CHIP 47K 1/16W (1608)
R315	1-218-887-11	s	RESISTOR,CHIP 47K 1/16W (1608)
R316	1-218-887-11	s	RESISTOR,CHIP 47K 1/16W (1608)
R317	1-216-864-11	s	RESISTOR,CHIP 0 1/16W (1608)
R318	1-218-904-11	s	RESISTOR,CHIP 240K 1/16W(1608)
R319	1-218-904-11	s	RESISTOR,CHIP 240K 1/16W(1608)
R320	1-216-821-11	s	RESISTOR,CHIP 1.0K 1/16W(1608)
R321	1-218-879-11	s	RESISTOR,CHIP 22K 1/16W (1608)

(APR-45 BOARD(DSR-2000/2000P) SUFFIX -11, -12)

Ref. No. or Q'ty	Part No.	SP	Description
R322	1-218-879-11	s	RESISTOR,CHIP 22K 1/16W (1608)
R327	1-216-805-11	s	RESISTOR,CHIP 47 1/16W 1608
R328	1-216-805-11	s	RESISTOR,CHIP 47 1/16W 1608
R329	1-216-805-11	s	RESISTOR,CHIP 47 1/16W 1608
R330	1-218-863-11	s	RESISTOR,CHIP 4.7K 1/16W(1608)
R331	1-218-863-11	s	RESISTOR,CHIP 4.7K 1/16W(1608)
*2 R381	1-216-801-11	s	RESISTOR,CHIP 22 1/16W (1608)
R382	1-211-977-11	s	RESISTOR,CHIP 22 1/16W (1608)
R389	1-218-873-11	s	RESISTOR,CHIP 12K 1/16W (1608)
R390	1-218-875-11	s	RESISTOR,CHIP 15K 1/16W (1608)
R391	1-218-887-11	s	RESISTOR,CHIP 47K 1/16W (1608)
R392	1-218-863-11	s	RESISTOR,CHIP 4.7K 1/16W(1608)
R394	1-218-887-11	s	RESISTOR,CHIP 47K 1/16W (1608)
R395	1-218-875-11	s	RESISTOR,CHIP 15K 1/16W (1608)
R396	1-218-887-11	s	RESISTOR,CHIP 47K 1/16W (1608)
R397	1-218-887-11	s	RESISTOR,CHIP 47K 1/16W (1608)
R398	1-218-887-11	s	RESISTOR,CHIP 47K 1/16W (1608)
R401	1-216-833-11	s	RESISTOR,CHIP 10K 1/16W 1608
R402	1-216-801-11	s	RESISTOR,CHIP 22 1/16W 1608
R403	1-216-801-11	s	RESISTOR,CHIP 22 1/16W 1608
R404	1-216-801-11	s	RESISTOR,CHIP 22 1/16W 1608
R405	1-216-801-11	s	RESISTOR,CHIP 22 1/16W 1608
R406	1-216-864-11	s	RESISTOR,CHIP 0 1/16W (1608)
R407	1-216-801-11	s	RESISTOR,CHIP 22 1/16W 1608
R408	1-216-801-11	s	RESISTOR,CHIP 22 1/16W 1608
R409	1-216-801-11	s	RESISTOR,CHIP 22 1/16W 1608
R410	1-216-864-11	s	RESISTOR,CHIP 0 1/16W (1608)
R411	1-216-864-11	s	RESISTOR,CHIP 0 1/16W (1608)
R412	1-216-864-11	s	RESISTOR,CHIP 0 1/16W (1608)
R413	1-216-864-11	s	RESISTOR,CHIP 0 1/16W (1608)
R414	1-216-801-11	s	RESISTOR,CHIP 22 1/16W 1608
R415	1-216-845-11	s	RESISTOR,CHIP 100K 1/16W(1608)
R416	1-216-864-11	s	RESISTOR,CHIP 0 1/16W (1608)
R417	1-216-864-11	s	RESISTOR,CHIP 0 1/16W (1608)
R418	1-216-845-11	s	RESISTOR,CHIP 100K 1/16W(1608)
R419	1-216-864-11	s	RESISTOR,CHIP 0 1/16W (1608)
R420	1-216-864-11	s	RESISTOR,CHIP 0 1/16W (1608)
R421	1-216-864-11	s	RESISTOR,CHIP 0 1/16W (1608)
R422	1-216-864-11	s	RESISTOR,CHIP 0 1/16W (1608)
R423	1-216-833-11	s	RESISTOR,CHIP 10K 1/16W 1608
R424	1-216-845-11	s	RESISTOR,CHIP 100K 1/16W(1608)
R425	1-216-864-11	s	RESISTOR,CHIP 0 1/16W (1608)
R426	1-216-864-11	s	RESISTOR,CHIP 0 1/16W (1608)
R427	1-216-845-11	s	RESISTOR,CHIP 100K 1/16W(1608)
R428	1-216-864-11	s	RESISTOR,CHIP 0 1/16W (1608)
R429	1-216-864-11	s	RESISTOR,CHIP 0 1/16W (1608)
R430	1-216-864-11	s	RESISTOR,CHIP 0 1/16W (1608)
R431	1-216-864-11	s	RESISTOR,CHIP 0 1/16W (1608)
R432	1-216-833-11	s	RESISTOR,CHIP 10K 1/16W 1608
R433	1-216-833-11	s	RESISTOR,CHIP 10K 1/16W 1608
R434	1-216-801-11	s	RESISTOR,CHIP 22 1/16W 1608
R435	1-216-801-11	s	RESISTOR,CHIP 22 1/16W 1608
R436	1-216-864-11	s	RESISTOR,CHIP 0 1/16W (1608)
R437	1-216-864-11	s	RESISTOR,CHIP 0 1/16W (1608)
R438	1-216-845-11	s	RESISTOR,CHIP 100K 1/16W(1608)
R439	1-216-864-11	s	RESISTOR,CHIP 0 1/16W (1608)
R440	1-216-864-11	s	RESISTOR,CHIP 0 1/16W (1608)
R441	1-216-845-11	s	RESISTOR,CHIP 100K 1/16W(1608)
R442	1-216-864-11	s	RESISTOR,CHIP 0 1/16W (1608)

(APR-45 BOARD(DSR-2000/2000P) SUFFIX -11, -12)

Ref. No. or Q'ty	Part No.	SP	Description
R443	1-216-864-11	s	RESISTOR,CHIP 0 1/16W (1608)
R444	1-216-864-11	s	RESISTOR,CHIP 0 1/16W (1608)
R445	1-216-864-11	s	RESISTOR,CHIP 0 1/16W (1608)
R446	1-216-833-11	s	RESISTOR,CHIP 10K 1/16W 1608
R447	1-216-845-11	s	RESISTOR,CHIP 100K 1/16W(1608)
R448	1-216-864-11	s	RESISTOR,CHIP 0 1/16W (1608)
R449	1-216-864-11	s	RESISTOR,CHIP 0 1/16W (1608)
R450	1-216-845-11	s	RESISTOR,CHIP 100K 1/16W(1608)
R451	1-216-864-11	s	RESISTOR,CHIP 0 1/16W (1608)
R452	1-216-864-11	s	RESISTOR,CHIP 0 1/16W (1608)
R453	1-216-864-11	s	RESISTOR,CHIP 0 1/16W (1608)
R454	1-216-864-11	s	RESISTOR,CHIP 0 1/16W (1608)
R455	1-216-833-11	s	RESISTOR,CHIP 10K 1/16W 1608
R456	1-216-833-11	s	RESISTOR,CHIP 10K 1/16W 1608
R457	1-216-801-11	s	RESISTOR,CHIP 22 1/16W 1608
R458	1-216-801-11	s	RESISTOR,CHIP 22 1/16W 1608
R459	1-216-801-11	s	RESISTOR,CHIP 22 1/16W 1608
R460	1-216-801-11	s	RESISTOR,CHIP 22 1/16W 1608
R461	1-216-801-11	s	RESISTOR,CHIP 22 1/16W 1608
R462	1-216-801-11	s	RESISTOR,CHIP 22 1/16W 1608
R463	1-216-801-11	s	RESISTOR,CHIP 22 1/16W 1608
R464	1-216-801-11	s	RESISTOR,CHIP 22 1/16W 1608
R465	1-216-801-11	s	RESISTOR,CHIP 22 1/16W 1608
R466	1-216-801-11	s	RESISTOR,CHIP 22 1/16W 1608
R467	1-216-821-11	s	RESISTOR,CHIP 1.0K 1/16W(1608)
R468	1-216-850-11	s	RESISTOR,CHIP 270K 1/16W 1608
R470	1-216-837-11	s	RESISTOR,CHIP 22K 1/16W 1608
R471	1-216-864-11	s	RESISTOR,CHIP 0 1/16W (1608)
R472	1-216-864-11	s	RESISTOR,CHIP 0 1/16W (1608)
R473	1-216-864-11	s	RESISTOR,CHIP 0 1/16W (1608)
R474	1-216-821-11	s	RESISTOR,CHIP 1.0K 1/16W(1608)
R475	1-216-850-11	s	RESISTOR,CHIP 270K 1/16W 1608
R477	1-216-837-11	s	RESISTOR,CHIP 22K 1/16W 1608
R478	1-216-821-11	s	RESISTOR,CHIP 1.0K 1/16W(1608)
R479	1-216-850-11	s	RESISTOR,CHIP 270K 1/16W 1608
R481	1-216-837-11	s	RESISTOR,CHIP 22K 1/16W 1608
R482	1-216-801-11	s	RESISTOR,CHIP 22 1/16W 1608
R483	1-216-801-11	s	RESISTOR,CHIP 22 1/16W 1608
R484	1-216-833-11	s	RESISTOR,CHIP 10K 1/16W 1608
R485	1-216-833-11	s	RESISTOR,CHIP 10K 1/16W 1608
R486	1-216-833-11	s	RESISTOR,CHIP 10K 1/16W 1608
R489	1-216-833-11	s	RESISTOR,CHIP 10K 1/16W 1608
R490	1-216-833-11	s	RESISTOR,CHIP 10K 1/16W 1608
R491	1-216-833-11	s	RESISTOR,CHIP 10K 1/16W 1608
R492	1-216-833-11	s	RESISTOR,CHIP 10K 1/16W 1608
R493	1-216-833-11	s	RESISTOR,CHIP 10K 1/16W 1608
R494	1-216-833-11	s	RESISTOR,CHIP 10K 1/16W 1608
R501	1-216-809-11	s	RESISTOR,CHIP 100 1/16W 1608
R502	1-216-864-11	s	RESISTOR,CHIP 0 1/16W (1608)
R503	1-216-864-11	s	RESISTOR,CHIP 0 1/16W (1608)
R504	1-216-797-11	s	RESISTOR,CHIP 10 1/16W 1608
R506	1-216-797-11	s	RESISTOR,CHIP 10 1/16W 1608
R508	1-216-829-11	s	RESISTOR, CHIP 4.7K 1/16W 1608
R515	1-216-864-11	s	RESISTOR,CHIP 0 1/16W (1608)
R538	1-218-875-11	s	RESISTOR,CHIP 15K 1/16W (1608)
R539	1-218-875-11	s	RESISTOR,CHIP 15K 1/16W (1608)
R546	1-218-853-11	s	RESISTOR,CHIP 1.8K 1/16W(1608)
R547	1-218-834-11	s	RESISTOR,CHIP 300 1/16W (1608)
R548	1-218-853-11	s	RESISTOR,CHIP 1.8K 1/16W(1608)

(APR-45 BOARD(DSR-2000/2000P) SUFFIX -11, -12)

Ref. No. or Q'ty	Part No.	SP	Description
R549	1-218-834-11	s	RESISTOR,CHIP 300 1/16W (1608)
R553	1-216-864-11	s	RESISTOR,CHIP 0 1/16W (1608)
R554	1-216-864-11	s	RESISTOR,CHIP 0 1/16W (1608)
R560	1-216-809-11	s	RESISTOR,CHIP 100 1/16W 1608
R561	1-216-809-11	s	RESISTOR,CHIP 100 1/16W 1608
R562	1-216-805-11	s	RESISTOR,CHIP 47 1/16W 1608
R563	1-216-805-11	s	RESISTOR,CHIP 47 1/16W 1608
R564	1-216-801-11	s	RESISTOR,CHIP 22 1/16W 1608
R565	1-216-801-11	s	RESISTOR,CHIP 22 1/16W 1608
R566	1-216-864-11	s	RESISTOR,CHIP 0 1/16W (1608)
R567	1-216-864-11	s	RESISTOR,CHIP 0 1/16W (1608)
R568	1-216-864-11	s	RESISTOR,CHIP 0 1/16W (1608)
R569	1-216-864-11	s	RESISTOR,CHIP 0 1/16W (1608)
R572	1-211-977-11	s	RESISTOR,CHIP 22 1/16W (1608)
R573	1-211-977-11	s	RESISTOR,CHIP 22 1/16W (1608)
R574	1-216-845-11	s	RESISTOR,CHIP 100K 1/16W(1608)
R575	1-216-845-11	s	RESISTOR,CHIP 100K 1/16W(1608)
R601	1-218-853-11	s	RESISTOR,CHIP 1.8K 1/16W(1608)
R602	1-218-879-11	s	RESISTOR,CHIP 22K 1/16W (1608)
R603	1-218-879-11	s	RESISTOR,CHIP 22K 1/16W (1608)
R604	1-216-864-11	s	RESISTOR,CHIP 0 1/16W (1608)
R605	1-218-879-11	s	RESISTOR,CHIP 22K 1/16W (1608)
R606	1-218-879-11	s	RESISTOR,CHIP 22K 1/16W (1608)
R607	1-218-847-11	s	RESISTOR, CHIP 1K 1/16W (1608)
R608	1-218-887-11	s	RESISTOR,CHIP 47K 1/16W (1608)
R609	1-218-887-11	s	RESISTOR,CHIP 47K 1/16W (1608)
R651	1-216-809-11	s	RESISTOR,CHIP 100 1/16W 1608
R652	1-216-809-11	s	RESISTOR,CHIP 100 1/16W 1608
R653	1-216-833-11	s	RESISTOR,CHIP 10K 1/16W 1608
R654	1-216-833-11	s	RESISTOR,CHIP 10K 1/16W 1608
R655	1-216-841-11	s	RESISTOR, CHIP 47K 1/16W 1608
R656	1-216-833-11	s	RESISTOR,CHIP 10K 1/16W 1608
R657	1-216-833-11	s	RESISTOR,CHIP 10K 1/16W 1608
R658	1-216-821-11	s	RESISTOR,CHIP 1.0K 1/16W(1608)
R659	1-216-821-11	s	RESISTOR,CHIP 1.0K 1/16W(1608)
R660	1-216-833-11	s	RESISTOR,CHIP 10K 1/16W 1608
R661	1-216-864-11	s	RESISTOR,CHIP 0 1/16W (1608)
R663	1-216-833-11	s	RESISTOR,CHIP 10K 1/16W 1608
R664	1-216-833-11	s	RESISTOR,CHIP 10K 1/16W 1608
R665	1-216-845-11	s	RESISTOR,CHIP 100K 1/16W(1608)
R666	1-216-833-11	s	RESISTOR,CHIP 10K 1/16W 1608
R701	1-218-851-11	s	RESISTOR,CHIP 1.5K 1/16W(1608)
R702	1-218-846-11	s	RESISTOR,CHIP 910 1/16W (1608)
R703	1-216-825-11	s	RESISTOR,CHIP 2.2K 1/16W 1608
R704	1-218-873-11	s	RESISTOR,CHIP 12K 1/16W (1608)
R705	1-216-821-11	s	RESISTOR,CHIP 1.0K 1/16W(1608)
R706	1-216-821-11	s	RESISTOR,CHIP 1.0K 1/16W(1608)
R707	1-211-990-11	s	RESISTOR,CHIP 75 1/16W (1608)
R708	1-216-825-11	s	RESISTOR,CHIP 2.2K 1/16W 1608
R709	1-216-857-11	s	RESISTOR, CHIP 1.0M 1/16W 1608
R710	1-216-815-11	s	RESISTOR,CHIP 330 1/16W 1608
R711	1-216-825-11	s	RESISTOR,CHIP 2.2K 1/16W 1608
R712	1-211-990-11	s	RESISTOR,CHIP 75 1/16W (1608)
R713	1-211-990-11	s	RESISTOR,CHIP 75 1/16W (1608)
R714	1-216-821-11	s	RESISTOR,CHIP 1.0K 1/16W(1608)
R715	1-216-809-11	s	RESISTOR,CHIP 100 1/16W 1608
R716	1-216-821-11	s	RESISTOR,CHIP 1.0K 1/16W(1608)
R717	1-216-864-11	s	RESISTOR,CHIP 0 1/16W (1608)
R718	1-216-809-11	s	RESISTOR,CHIP 100 1/16W 1608

(APR-45 BOARD(DSR-2000/2000P) SUFFIX -11, -12)

Ref. No. or Q'ty	Part No.	SP	Description
R719	1-216-809-11	s	RESISTOR,CHIP 100 1/16W 1608
R720	1-216-809-11	s	RESISTOR,CHIP 100 1/16W 1608
R721	1-216-801-11	s	RESISTOR,CHIP 22 1/16W 1608
R722	1-218-823-11	s	RESISTOR,CHIP 100 1/16W (1608)
R723	1-218-823-11	s	RESISTOR,CHIP 100 1/16W (1608)
R724	1-218-823-11	s	RESISTOR,CHIP 100 1/16W (1608)
R725	1-216-801-11	s	RESISTOR,CHIP 22 1/16W 1608
R726	1-216-864-11	s	RESISTOR,CHIP 0 1/16W (1608)
R727	1-216-801-11	s	RESISTOR,CHIP 22 1/16W 1608
R728	1-216-801-11	s	RESISTOR,CHIP 22 1/16W 1608
R729	1-216-864-11	s	RESISTOR,CHIP 0 1/16W (1608)
R730	1-211-977-11	s	RESISTOR,CHIP 22 1/16W (1608)
R731	1-216-841-11	s	RESISTOR, CHIP 47K 1/16W 1608
R732 *2	1-216-296-91	s	CONDUCTOR,CHIP
R733 *2	1-216-296-91	s	CONDUCTOR,CHIP
R751	1-216-809-11	s	RESISTOR,CHIP 100 1/16W 1608
R752	1-216-809-11	s	RESISTOR,CHIP 100 1/16W 1608
R753	1-216-809-11	s	RESISTOR,CHIP 100 1/16W 1608
R754	1-216-809-11	s	RESISTOR,CHIP 100 1/16W 1608
R755	1-216-809-11	s	RESISTOR,CHIP 100 1/16W 1608
R756	1-216-809-11	s	RESISTOR,CHIP 100 1/16W 1608
R757	1-216-809-11	s	RESISTOR,CHIP 100 1/16W 1608
R758	1-216-809-11	s	RESISTOR,CHIP 100 1/16W 1608
R759	1-216-864-11	s	RESISTOR,CHIP 0 1/16W (1608)
R760	1-216-864-11	s	RESISTOR,CHIP 0 1/16W (1608)
R761	1-216-864-11	s	RESISTOR,CHIP 0 1/16W (1608)
R762	1-216-821-11	s	RESISTOR,CHIP 1.0K 1/16W(1608)
R763	1-216-825-11	s	RESISTOR,CHIP 2.2K 1/16W 1608
R764	1-218-873-11	s	RESISTOR,CHIP 12K 1/16W (1608)
R765	1-218-873-11	s	RESISTOR,CHIP 12K 1/16W (1608)
R766	1-218-873-11	s	RESISTOR,CHIP 12K 1/16W (1608)
R767	1-216-821-11	s	RESISTOR,CHIP 1.0K 1/16W(1608)
R768	1-216-825-11	s	RESISTOR,CHIP 2.2K 1/16W 1608
R769	1-216-825-11	s	RESISTOR,CHIP 2.2K 1/16W 1608
R770	1-218-833-11	s	RESISTOR,CHIP 270 1/16W (1608)
R771	1-218-833-11	s	RESISTOR,CHIP 270 1/16W (1608)
R772	1-216-805-11	s	RESISTOR,CHIP 47 1/16W 1608
R773	1-216-805-11	s	RESISTOR,CHIP 47 1/16W 1608
R774	1-216-821-11	s	RESISTOR,CHIP 1.0K 1/16W(1608)
R775	1-216-820-11	s	RESISTOR, CHIP 820 1/16W 1608
R776	1-208-754-11	s	RESISTOR,CHIP 68 1/10W (2012)
R777	1-218-829-11	s	RESISTOR,CHIP 180 1/16W (1608)
R778	1-211-960-11	s	RESISTOR,CHIP 22 1/10W (2012)
R779	1-211-967-11	s	RESISTOR,CHIP 43 1/10W (2125)
R780	1-208-754-11	s	RESISTOR,CHIP 68 1/10W (2012)
R781	1-211-960-11	s	RESISTOR,CHIP 22 1/10W (2012)
R782	1-208-774-11	s	RESISTOR,CHIP 470 1/10W (2012)
R783	1-216-805-11	s	RESISTOR,CHIP 47 1/16W 1608
R784	1-216-805-11	s	RESISTOR,CHIP 47 1/16W 1608
R785	1-208-762-11	s	RESISTOR,CHIP 150 1/10W (2012)
R786	1-208-754-11	s	RESISTOR,CHIP 68 1/10W (2012)
R787	1-216-821-11	s	RESISTOR,CHIP 1.0K 1/16W(1608)
R788 *2	1-216-801-11	s	RESISTOR,CHIP 22 1/16W 1608
R789 *2	1-216-801-11	s	RESISTOR,CHIP 22 1/16W 1608
R801	1-216-821-11	s	RESISTOR,CHIP 1.0K 1/16W(1608)
R802	1-220-259-11	s	RESISTOR, CHIP 150 1/4W (3225)
R803	1-211-985-11	s	RESISTOR,CHIP 47 1/16W (1608)
R804	1-218-852-11	s	RESISTOR,CHIP 1.6K 1/16W(1608)
R805	1-218-864-11	s	RESISTOR,CHIP 5.1K 1/16W(1608)

(APR-45 BOARD(DSR-2000/2000P) SUFFIX -11, -12)

Ref. No. or Q'ty	Part No.	SP	Description
R806	1-218-839-11	s	RESISTOR,CHIP 470 1/16W (1608)
R807	1-218-855-11	s	RESISTOR,CHIP 2.2K 1/16W(1608)
R808	1-216-864-11	s	RESISTOR,CHIP 0 1/16W (1608)
R809	1-218-873-11	s	RESISTOR,CHIP 12K 1/16W (1608)
R810	1-218-847-11	s	RESISTOR, CHIP 1K 1/16W (1608)
R811	1-218-847-11	s	RESISTOR, CHIP 1K 1/16W (1608)
R812	1-211-990-11	s	RESISTOR,CHIP 75 1/16W (1608)
R813	1-218-847-11	s	RESISTOR, CHIP 1K 1/16W (1608)
R814	1-218-831-11	s	RESISTOR, CHIP 220 1/16W(1608)
R815	1-218-855-11	s	RESISTOR,CHIP 2.2K 1/16W(1608)
R816	1-216-864-11	s	RESISTOR,CHIP 0 1/16W (1608)
R817	1-211-990-11	s	RESISTOR,CHIP 75 1/16W (1608)
R818	1-211-990-11	s	RESISTOR,CHIP 75 1/16W (1608)
R819	1-216-857-11	s	RESISTOR, CHIP 1.0M 1/16W 1608
R820	1-218-855-11	s	RESISTOR,CHIP 2.2K 1/16W(1608)
R822	1-211-990-11	s	RESISTOR,CHIP 75 1/16W (1608)
R823	1-211-990-11	s	RESISTOR,CHIP 75 1/16W (1608)
R824	1-216-864-11	s	RESISTOR,CHIP 0 1/16W (1608)
R825	1-218-847-11	s	RESISTOR, CHIP 1K 1/16W (1608)
R826	1-216-797-11	s	RESISTOR,CHIP 10 1/16W 1608
R827	1-216-797-11	s	RESISTOR,CHIP 10 1/16W 1608
R828	1-216-797-11	s	RESISTOR,CHIP 10 1/16W 1608
R829	1-216-797-11	s	RESISTOR,CHIP 10 1/16W 1608
R830	1-216-814-11	s	RESISTOR,CHIP 270 1/16W 1608
R831	1-216-814-11	s	RESISTOR,CHIP 270 1/16W 1608
R832	1-211-960-11	s	RESISTOR,CHIP 22 1/10W (2012)
R833	1-208-754-11	s	RESISTOR,CHIP 68 1/10W (2012)
R834	1-208-754-11	s	RESISTOR,CHIP 68 1/10W (2012)
R835	1-211-960-11	s	RESISTOR,CHIP 22 1/10W (2012)
R836	1-208-755-11	s	RESISTOR,CHIP 75 1/10W (2012)
R837	1-216-805-11	s	RESISTOR,CHIP 47 1/16W 1608
R838	1-208-762-11	s	RESISTOR,CHIP 150 1/10W (2012)
R839	1-208-754-11	s	RESISTOR,CHIP 68 1/10W (2012)
R840	1-216-821-11	s	RESISTOR,CHIP 1.0K 1/16W(1608)
R841	1-216-809-11	s	RESISTOR,CHIP 100 1/16W 1608
R842	1-216-809-11	s	RESISTOR,CHIP 100 1/16W 1608
R843	1-216-809-11	s	RESISTOR,CHIP 100 1/16W 1608
R846	1-211-985-11	s	RESISTOR,CHIP 47 1/16W (1608)
R847	1-216-864-11	s	RESISTOR,CHIP 0 1/16W (1608)
R848	1-208-778-11	s	RESISTOR,CHIP 680 1/10W (2012)
R849	1-208-778-11	s	RESISTOR,CHIP 680 1/10W (2012)
R850	1-208-778-11	s	RESISTOR,CHIP 680 1/10W (2012)
R851	1-208-778-11	s	RESISTOR,CHIP 680 1/10W (2012)
R852	1-208-778-11	s	RESISTOR,CHIP 680 1/10W (2012)
R853	1-208-778-11	s	RESISTOR,CHIP 680 1/10W (2012)
R902	1-216-833-11	s	RESISTOR,CHIP 10K 1/16W 1608
R903	1-216-805-11	s	RESISTOR,CHIP 47 1/16W 1608
R904	1-216-819-11	s	RESISTOR,CHIP 680 1/16W 1608
R905	1-216-864-11	s	RESISTOR,CHIP 0 1/16W (1608)
R906	1-216-854-11	s	RESISTOR, CHIP 560K 1/16W 1608
R907	1-216-854-11	s	RESISTOR, CHIP 560K 1/16W 1608
R908	1-216-854-11	s	RESISTOR, CHIP 560K 1/16W 1608
R909	1-216-854-11	s	RESISTOR, CHIP 560K 1/16W 1608
R910	1-216-817-11	s	RESISTOR,CHIP 470 1/16W 1608
R911	1-216-851-11	s	RESISTOR,CHIP 330K 1/16W 1608
R913	1-216-801-11	s	RESISTOR,CHIP 22 1/16W 1608
R951	1-216-809-11	s	RESISTOR,CHIP 100 1/16W 1608
R952	1-216-803-11	s	RESISTOR,CHIP 33 1/16W 1608
R953	1-216-864-11	s	RESISTOR,CHIP 0 1/16W (1608)

(APR-45 BOARD(DSR-2000/2000P) SUFFIX -11, -12)

Ref. No. or Q'ty	Part No.	SP	Description
R955	1-216-809-11	s	RESISTOR,CHIP 100 1/16W 1608
R956	1-216-809-11	s	RESISTOR,CHIP 100 1/16W 1608
R959	1-216-809-11	s	RESISTOR,CHIP 100 1/16W 1608
R961	1-216-864-11	s	RESISTOR,CHIP 0 1/16W (1608)
R962	1-216-833-11	s	RESISTOR,CHIP 10K 1/16W 1608
R963	1-216-851-11	s	RESISTOR,CHIP 330K 1/16W 1608
R969	1-216-833-11	s	RESISTOR,CHIP 10K 1/16W 1608
R973	1-216-821-11	s	RESISTOR,CHIP 1.0K 1/16W(1608)
R974	1-216-821-11	s	RESISTOR,CHIP 1.0K 1/16W(1608)
R977	1-216-864-11	s	RESISTOR,CHIP 0 1/16W (1608)
R978	1-216-801-11	s	RESISTOR,CHIP 22 1/16W 1608
R979	1-216-845-11	s	RESISTOR,CHIP 100K 1/16W(1608)
R980 *2	1-216-805-11	s	RESISTOR,CHIP 47 1/16W 1608
R1001	1-218-843-11	s	RESISTOR,CHIP 680 1/16W (1608)
R1002	1-218-857-11	s	RESISTOR,CHIP 2.7K 1/16W(1608)
R1003	1-218-857-11	s	RESISTOR,CHIP 2.7K 1/16W(1608)
R1004	1-218-875-11	s	RESISTOR,CHIP 15K 1/16W (1608)
R1005	1-218-875-11	s	RESISTOR,CHIP 15K 1/16W (1608)
R1006	1-218-868-11	s	RESISTOR,CHIP 7.5K 1/16W(1608)
R1007	1-218-717-11	s	RESISTOR,CHIP 11K 1/16W (1608)
R1008	1-218-875-11	s	RESISTOR,CHIP 15K 1/16W (1608)
R1009	1-218-875-11	s	RESISTOR,CHIP 15K 1/16W (1608)
R1010	1-218-868-11	s	RESISTOR,CHIP 7.5K 1/16W(1608)
R1011	1-218-717-11	s	RESISTOR,CHIP 11K 1/16W (1608)
R1012	1-218-861-11	s	RESISTOR,CHIP 3.9K 1/16W(1608)
R1013	1-218-457-11	s	RESISTOR,CHIP 910 1/16W (1608)
R1014	1-218-861-11	s	RESISTOR,CHIP 3.9K 1/16W(1608)
R1015	1-218-457-11	s	RESISTOR,CHIP 910 1/16W (1608)
R1016	1-218-871-11	s	RESISTOR,CHIP 10K 1/16W (1608)
R1017	1-218-871-11	s	RESISTOR,CHIP 10K 1/16W (1608)
R1018	1-218-871-11	s	RESISTOR,CHIP 10K 1/16W (1608)
R1019	1-218-871-11	s	RESISTOR,CHIP 10K 1/16W (1608)
R1020	1-218-871-11	s	RESISTOR,CHIP 10K 1/16W (1608)
R1021	1-218-871-11	s	RESISTOR,CHIP 10K 1/16W (1608)
R1022	1-218-887-11	s	RESISTOR,CHIP 47K 1/16W (1608)
R1023	1-218-882-11	s	RESISTOR, CHIP 30K 1/16W(1608)
R1024	1-218-887-11	s	RESISTOR,CHIP 47K 1/16W (1608)
R1025	1-218-882-11	s	RESISTOR, CHIP 30K 1/16W(1608)
R1026	1-218-887-11	s	RESISTOR,CHIP 47K 1/16W (1608)
R1027	1-218-887-11	s	RESISTOR,CHIP 47K 1/16W (1608)
R1028	1-218-887-11	s	RESISTOR,CHIP 47K 1/16W (1608)
R1029	1-218-887-11	s	RESISTOR,CHIP 47K 1/16W (1608)
R1030	1-218-823-11	s	RESISTOR,CHIP 100 1/16W (1608)
R1031	1-218-823-11	s	RESISTOR,CHIP 100 1/16W (1608)
R1032	1-218-823-11	s	RESISTOR,CHIP 100 1/16W (1608)
R1033	1-218-823-11	s	RESISTOR,CHIP 100 1/16W (1608)
R1034	1-216-864-11	s	RESISTOR,CHIP 0 1/16W (1608)
R1037	1-216-797-11	s	RESISTOR,CHIP 10 1/16W 1608
R1101	1-218-843-11	s	RESISTOR,CHIP 680 1/16W (1608)
R1102	1-218-857-11	s	RESISTOR,CHIP 2.7K 1/16W(1608)
R1103	1-218-857-11	s	RESISTOR,CHIP 2.7K 1/16W(1608)
R1104	1-218-875-11	s	RESISTOR,CHIP 15K 1/16W (1608)
R1105	1-218-875-11	s	RESISTOR,CHIP 15K 1/16W (1608)
R1106	1-218-868-11	s	RESISTOR,CHIP 7.5K 1/16W(1608)
R1107	1-218-717-11	s	RESISTOR,CHIP 11K 1/16W (1608)
R1108	1-218-875-11	s	RESISTOR,CHIP 15K 1/16W (1608)
R1109	1-218-875-11	s	RESISTOR,CHIP 15K 1/16W (1608)
R1110	1-218-868-11	s	RESISTOR,CHIP 7.5K 1/16W(1608)
R1111	1-218-717-11	s	RESISTOR,CHIP 11K 1/16W (1608)

(APR-45 BOARD(DSR-2000/2000P) SUFFIX -11, -12)

Ref. No. or Q'ty	Part No.	SP	Description
R1112	1-218-861-11	s	RESISTOR,CHIP 3.9K 1/16W(1608)
R1113	1-218-457-11	s	RESISTOR,CHIP 910 1/16W (1608)
R1114	1-218-861-11	s	RESISTOR,CHIP 3.9K 1/16W(1608)
R1115	1-218-457-11	s	RESISTOR,CHIP 910 1/16W (1608)
R1116	1-218-871-11	s	RESISTOR,CHIP 10K 1/16W (1608)
R1117	1-218-871-11	s	RESISTOR,CHIP 10K 1/16W (1608)
R1118	1-218-871-11	s	RESISTOR,CHIP 10K 1/16W (1608)
R1119	1-218-871-11	s	RESISTOR,CHIP 10K 1/16W (1608)
R1120	1-218-871-11	s	RESISTOR,CHIP 10K 1/16W (1608)
R1121	1-218-871-11	s	RESISTOR,CHIP 10K 1/16W (1608)
R1122	1-218-887-11	s	RESISTOR,CHIP 47K 1/16W (1608)
R1123	1-218-882-11	s	RESISTOR, CHIP 30K 1/16W(1608)
R1124	1-218-887-11	s	RESISTOR,CHIP 47K 1/16W (1608)
R1125	1-218-882-11	s	RESISTOR, CHIP 30K 1/16W(1608)
R1126	1-218-887-11	s	RESISTOR,CHIP 47K 1/16W (1608)
R1127	1-218-887-11	s	RESISTOR,CHIP 47K 1/16W (1608)
R1128	1-218-887-11	s	RESISTOR,CHIP 47K 1/16W (1608)
R1129	1-218-887-11	s	RESISTOR,CHIP 47K 1/16W (1608)
R1130	1-218-823-11	s	RESISTOR,CHIP 100 1/16W (1608)
R1131	1-218-823-11	s	RESISTOR,CHIP 100 1/16W (1608)
R1132	1-218-823-11	s	RESISTOR,CHIP 100 1/16W (1608)
R1133	1-218-823-11	s	RESISTOR,CHIP 100 1/16W (1608)
R1134	1-216-864-11	s	RESISTOR,CHIP 0 1/16W (1608)
R1137	1-216-797-11	s	RESISTOR,CHIP 10 1/16W 1608
R1139	1-218-823-11	s	RESISTOR,CHIP 100 1/16W (1608)
R1140	1-218-823-11	s	RESISTOR,CHIP 100 1/16W (1608)
R1141	1-218-823-11	s	RESISTOR,CHIP 100 1/16W (1608)
R1142	1-216-809-11	s	RESISTOR,CHIP 100 1/16W 1608
R1143	1-218-823-11	s	RESISTOR,CHIP 100 1/16W (1608)
R1144	1-218-823-11	s	RESISTOR,CHIP 100 1/16W (1608)
R1145	1-218-823-11	s	RESISTOR,CHIP 100 1/16W (1608)
R1146	1-216-809-11	s	RESISTOR,CHIP 100 1/16W 1608
R1201	1-211-969-11	s	RESISTOR,CHIP 10 1/16W (1608)
R1203	1-218-880-11	s	RESISTOR,CHIP 24K 1/16W (1608)
R1204	1-218-880-11	s	RESISTOR,CHIP 24K 1/16W (1608)
R1205	1-218-881-11	s	RESISTOR, CHIP 27K 1/16W(1608)
R1206	1-218-881-11	s	RESISTOR, CHIP 27K 1/16W(1608)
R1207	1-218-880-11	s	RESISTOR,CHIP 24K 1/16W (1608)
R1208	1-218-880-11	s	RESISTOR,CHIP 24K 1/16W (1608)
R1209	1-218-881-11	s	RESISTOR, CHIP 27K 1/16W(1608)
R1210	1-218-881-11	s	RESISTOR, CHIP 27K 1/16W(1608)
R1217	1-216-864-11	s	RESISTOR,CHIP 0 1/16W (1608)
R1219	1-218-864-11	s	RESISTOR,CHIP 5.1K 1/16W(1608)
R1221	1-216-845-11	s	RESISTOR,CHIP 100K 1/16W(1608)
R1222	1-216-817-11	s	RESISTOR,CHIP 470 1/16W 1608
R1223	1-216-828-11	s	RESISTOR, CHIP 3.9K 1/16W 1608
R1225	1-216-809-11	s	RESISTOR,CHIP 100 1/16W 1608
R1226	1-216-813-11	s	RESISTOR, CHIP 220 1/16W 1608
R1227	1-216-813-11	s	RESISTOR, CHIP 220 1/16W 1608
R1229	1-216-813-11	s	RESISTOR, CHIP 220 1/16W 1608
R1230	1-216-828-11	s	RESISTOR, CHIP 3.9K 1/16W 1608
R1231	1-218-871-11	s	RESISTOR,CHIP 10K 1/16W (1608)
R1232	1-218-871-11	s	RESISTOR,CHIP 10K 1/16W (1608)
R1251	1-216-797-11	s	RESISTOR,CHIP 10 1/16W 1608
R1252	1-216-833-11	s	RESISTOR,CHIP 10K 1/16W 1608
R1253	1-216-797-11	s	RESISTOR,CHIP 10 1/16W 1608
R1254	1-216-801-11	s	RESISTOR,CHIP 22 1/16W 1608
R1255	1-216-801-11	s	RESISTOR,CHIP 22 1/16W 1608
R1256	1-216-809-11	s	RESISTOR,CHIP 100 1/16W 1608

(APR-45 BOARD(DSR-2000/2000P) SUFFIX -11, -12)

Ref. No. or Q'ty	Part No.	SP	Description
R1257	1-216-797-11	s	RESISTOR,CHIP 10 1/16W 1608
R1258	1-216-797-11	s	RESISTOR,CHIP 10 1/16W 1608
R1259	1-216-797-11	s	RESISTOR,CHIP 10 1/16W 1608
R1260	1-216-797-11	s	RESISTOR,CHIP 10 1/16W 1608
R1261	1-216-797-11	s	RESISTOR,CHIP 10 1/16W 1608
R1262	1-216-797-11	s	RESISTOR,CHIP 10 1/16W 1608
R1263	1-216-797-11	s	RESISTOR,CHIP 10 1/16W 1608
R1264	1-216-797-11	s	RESISTOR,CHIP 10 1/16W 1608
R1265	1-216-797-11	s	RESISTOR,CHIP 10 1/16W 1608
R1266	1-216-801-11	s	RESISTOR,CHIP 22 1/16W 1608
R1267	1-216-801-11	s	RESISTOR,CHIP 22 1/16W 1608
R1268	1-216-801-11	s	RESISTOR,CHIP 22 1/16W 1608
R1269	1-216-801-11	s	RESISTOR,CHIP 22 1/16W 1608
R1270	1-216-801-11	s	RESISTOR,CHIP 22 1/16W 1608
R1271	1-216-809-11	s	RESISTOR,CHIP 100 1/16W 1608
R1272	1-216-797-11	s	RESISTOR,CHIP 10 1/16W 1608
R1273	1-216-838-11	s	RESISTOR CHIP 27K 1/16W(1608)
R1274	1-216-839-11	s	RESISTOR,CHIP 33K 1/16W 1608
R1275	1-216-841-11	s	RESISTOR, CHIP 47K 1/16W 1608
R1276	1-216-829-11	s	RESISTOR, CHIP 4.7K 1/16W 1608
R1277	1-216-841-11	s	RESISTOR, CHIP 47K 1/16W 1608
R1278	1-216-835-11	s	RESISTOR,CHIP 15K 1/16W
R1279	1-216-841-11	s	RESISTOR, CHIP 47K 1/16W 1608
R1280	1-216-805-11	s	RESISTOR,CHIP 47 1/16W 1608
R1281	1-216-805-11	s	RESISTOR,CHIP 47 1/16W 1608
R1282	1-216-801-11	s	RESISTOR,CHIP 22 1/16W 1608
R1283	1-216-841-11	s	RESISTOR, CHIP 47K 1/16W 1608
R1284	1-216-841-11	s	RESISTOR, CHIP 47K 1/16W 1608
R1285	1-216-864-11	s	RESISTOR,CHIP 0 1/16W (1608)
R1286	1-216-797-11	s	RESISTOR,CHIP 10 1/16W 1608
R1287	1-216-797-11	s	RESISTOR,CHIP 10 1/16W 1608
R1288	1-216-797-11	s	RESISTOR,CHIP 10 1/16W 1608
R1289	1-216-797-11	s	RESISTOR,CHIP 10 1/16W 1608
R1290	1-216-797-11	s	RESISTOR,CHIP 10 1/16W 1608
R1291	1-216-797-11	s	RESISTOR,CHIP 10 1/16W 1608
R1292	1-216-797-11	s	RESISTOR,CHIP 10 1/16W 1608
R1293	1-216-797-11	s	RESISTOR,CHIP 10 1/16W 1608
R1294	1-216-801-11	s	RESISTOR,CHIP 22 1/16W 1608
R1295	1-216-801-11	s	RESISTOR,CHIP 22 1/16W 1608
R1296	1-216-797-11	s	RESISTOR,CHIP 10 1/16W 1608
R1297	1-216-797-11	s	RESISTOR,CHIP 10 1/16W 1608
R1298 *2	1-216-864-11	s	RESISTOR,CHIP 0 1/16W (1608)
R1299	1-216-833-11	s	RESISTOR,CHIP 10K 1/16W 1608
R1300	1-216-833-11	s	RESISTOR,CHIP 10K 1/16W 1608
R1301	1-216-833-11	s	RESISTOR,CHIP 10K 1/16W 1608
R1302	1-216-833-11	s	RESISTOR,CHIP 10K 1/16W 1608
R1303	1-216-797-11	s	RESISTOR,CHIP 10 1/16W 1608
R1304	1-216-833-11	s	RESISTOR,CHIP 10K 1/16W 1608
R1305	1-216-833-11	s	RESISTOR,CHIP 10K 1/16W 1608
R1306	1-216-833-11	s	RESISTOR,CHIP 10K 1/16W 1608
R1354	1-216-801-11	s	RESISTOR,CHIP 22 1/16W 1608
R1355	1-216-801-11	s	RESISTOR,CHIP 22 1/16W 1608
R1356	1-216-801-11	s	RESISTOR,CHIP 22 1/16W 1608
R1357	1-216-801-11	s	RESISTOR,CHIP 22 1/16W 1608
R1358	1-216-801-11	s	RESISTOR,CHIP 22 1/16W 1608
R1359	1-216-801-11	s	RESISTOR,CHIP 22 1/16W 1608
R1360	1-216-801-11	s	RESISTOR,CHIP 22 1/16W 1608
R1361	1-216-801-11	s	RESISTOR,CHIP 22 1/16W 1608
R1401	1-216-864-11	s	RESISTOR,CHIP 0 1/16W (1608)

(APR-45 BOARD(DSR-2000/2000P) SUFFIX -11, -12)

Ref. No. or Q'ty	Part No.	SP	Description
R1402	1-216-801-11	s	RESISTOR,CHIP 22 1/16W 1608
R1403	1-216-801-11	s	RESISTOR,CHIP 22 1/16W 1608
R1404	1-216-801-11	s	RESISTOR,CHIP 22 1/16W 1608
R1405	1-216-801-11	s	RESISTOR,CHIP 22 1/16W 1608
R1406	1-216-833-11	s	RESISTOR,CHIP 10K 1/16W 1608
R1407	1-216-845-11	s	RESISTOR,CHIP 100K 1/16W(1608)
R1408	1-216-845-11	s	RESISTOR,CHIP 100K 1/16W(1608)
R1409	1-216-833-11	s	RESISTOR,CHIP 10K 1/16W 1608
R1410	1-216-845-11	s	RESISTOR,CHIP 100K 1/16W(1608)
R1411	1-216-845-11	s	RESISTOR,CHIP 100K 1/16W(1608)
R1412	1-216-801-11	s	RESISTOR,CHIP 22 1/16W 1608
R1413	1-216-801-11	s	RESISTOR,CHIP 22 1/16W 1608
R1414	1-216-801-11	s	RESISTOR,CHIP 22 1/16W 1608
R1415 *2	1-216-801-11	s	RESISTOR,CHIP 22 1/16W 1608
R1501	1-220-259-11	s	RESISTOR, CHIP 150 1/4W (3225)
R1502	1-211-985-11	s	RESISTOR,CHIP 47 1/16W (1608)
R1503	1-216-821-11	s	RESISTOR,CHIP 1.0K 1/16W(1608)
R1504	1-218-852-11	s	RESISTOR,CHIP 1.6K 1/16W(1608)
R1505	1-218-864-11	s	RESISTOR,CHIP 5.1K 1/16W(1608)
R1506	1-216-817-11	s	RESISTOR,CHIP 470 1/16W 1608
R1507	1-216-864-11	s	RESISTOR,CHIP 0 1/16W (1608)
R1508	1-218-855-11	s	RESISTOR,CHIP 2.2K 1/16W(1608)
R1509	1-218-873-11	s	RESISTOR,CHIP 12K 1/16W (1608)
R1510	1-218-875-11	s	RESISTOR,CHIP 15K 1/16W (1608)
R1511	1-218-875-11	s	RESISTOR,CHIP 15K 1/16W (1608)
R1512	1-218-847-11	s	RESISTOR, CHIP 1K 1/16W (1608)
R1513	1-218-847-11	s	RESISTOR, CHIP 1K 1/16W (1608)
R1514	1-218-855-11	s	RESISTOR,CHIP 2.2K 1/16W(1608)
R1515	1-218-855-11	s	RESISTOR,CHIP 2.2K 1/16W(1608)
R1516	1-216-864-11	s	RESISTOR,CHIP 0 1/16W (1608)
R1517	1-211-985-11	s	RESISTOR,CHIP 47 1/16W (1608)
R1518	1-218-847-11	s	RESISTOR, CHIP 1K 1/16W (1608)
R1519	1-216-864-11	s	RESISTOR,CHIP 0 1/16W (1608)
R1520	1-218-845-11	s	RESISTOR,CHIP 820 1/16W (1608)
R1522	1-218-833-11	s	RESISTOR,CHIP 270 1/16W (1608)
R1523	1-218-833-11	s	RESISTOR,CHIP 270 1/16W (1608)
R1524	1-216-809-11	s	RESISTOR,CHIP 100 1/16W 1608
R1525	1-211-985-11	s	RESISTOR,CHIP 47 1/16W (1608)
R1526	1-208-754-11	s	RESISTOR,CHIP 68 1/10W (2012)
R1527	1-218-829-11	s	RESISTOR,CHIP 180 1/16W (1608)
R1528	1-211-960-11	s	RESISTOR,CHIP 22 1/10W (2012)
R1529	1-211-967-11	s	RESISTOR,CHIP 43 1/10W (2125)
R1530	1-208-754-11	s	RESISTOR,CHIP 68 1/10W (2012)
R1531	1-211-960-11	s	RESISTOR,CHIP 22 1/10W (2012)
R1532	1-208-774-11	s	RESISTOR,CHIP 470 1/10W (2012)
R1533	1-211-985-11	s	RESISTOR,CHIP 47 1/16W (1608)
R1534	1-211-985-11	s	RESISTOR,CHIP 47 1/16W (1608)
R1535	1-211-985-11	s	RESISTOR,CHIP 47 1/16W (1608)
R1536	1-208-762-11	s	RESISTOR,CHIP 150 1/10W (2012)
R1537	1-208-762-11	s	RESISTOR,CHIP 150 1/10W (2012)
R1538	1-216-864-11	s	RESISTOR,CHIP 0 1/16W (1608)
R1539	1-218-847-11	s	RESISTOR,CHIP 1K 1/16W (1608)
R1540	1-208-754-11	s	RESISTOR,CHIP 68 1/10W (2012)
R1541	1-208-754-11	s	RESISTOR,CHIP 68 1/10W (2012)
R1542	1-218-847-11	s	RESISTOR,CHIP 1K 1/16W (1608)
R1543 *2	1-216-829-11	s	RESISTOR,CHIP 4.7K 1/16W (1608)
*1	1-249-425-11	s	RES,CARBON 4.7K 1/4W SMALL
R1551	1-220-259-11	s	RESISTOR, CHIP 150 1/4W (3225)
R1552	1-211-985-11	s	RESISTOR,CHIP 47 1/16W (1608)

(APR-45 BOARD(DSR-2000/2000P) SUFFIX -11, -12)

Ref. No. or Q'ty	Part No.	SP	Description
R1553	1-218-852-11	s	RESISTOR,CHIP 1.6K 1/16W(1608)
R1554	1-218-864-11	s	RESISTOR,CHIP 5.1K 1/16W(1608)
R1555	1-216-817-11	s	RESISTOR,CHIP 470 1/16W 1608
R1556	1-216-864-11	s	RESISTOR,CHIP 0 1/16W (1608)
R1557	1-218-855-11	s	RESISTOR,CHIP 2.2K 1/16W(1608)
R1558	1-218-873-11	s	RESISTOR,CHIP 12K 1/16W (1608)
R1559	1-218-875-11	s	RESISTOR,CHIP 15K 1/16W (1608)
R1560	1-218-875-11	s	RESISTOR,CHIP 15K 1/16W (1608)
R1561	1-218-847-11	s	RESISTOR, CHIP 1K 1/16W (1608)
R1562	1-218-847-11	s	RESISTOR, CHIP 1K 1/16W (1608)
R1563	1-218-855-11	s	RESISTOR,CHIP 2.2K 1/16W(1608)
R1564	1-218-855-11	s	RESISTOR,CHIP 2.2K 1/16W(1608)
R1565	1-216-864-11	s	RESISTOR,CHIP 0 1/16W (1608)
R1566	1-211-985-11	s	RESISTOR,CHIP 47 1/16W (1608)
R1567	1-218-847-11	s	RESISTOR, CHIP 1K 1/16W (1608)
R1568	1-216-864-11	s	RESISTOR,CHIP 0 1/16W (1608)
R1569	1-218-845-11	s	RESISTOR,CHIP 820 1/16W (1608)
R1571	1-218-833-11	s	RESISTOR,CHIP 270 1/16W (1608)
R1572	1-218-833-11	s	RESISTOR,CHIP 270 1/16W (1608)
R1573	1-216-809-11	s	RESISTOR,CHIP 100 1/16W 1608
R1574	1-211-985-11	s	RESISTOR,CHIP 47 1/16W (1608)
R1575	1-208-754-11	s	RESISTOR,CHIP 68 1/10W (2012)
R1576	1-218-829-11	s	RESISTOR,CHIP 180 1/16W (1608)
R1577	1-211-960-11	s	RESISTOR,CHIP 22 1/10W (2012)
R1578	1-211-967-11	s	RESISTOR,CHIP 43 1/10W (2125)
R1579	1-208-754-11	s	RESISTOR,CHIP 68 1/10W (2012)
R1580	1-211-960-11	s	RESISTOR,CHIP 22 1/10W (2012)
R1581	1-208-774-11	s	RESISTOR,CHIP 470 1/10W (2012)
R1582	1-211-985-11	s	RESISTOR,CHIP 47 1/16W (1608)
R1583	1-211-985-11	s	RESISTOR,CHIP 47 1/16W (1608)
R1584	1-208-762-11	s	RESISTOR,CHIP 150 1/10W (2012)
R1585	1-216-864-11	s	RESISTOR,CHIP 0 1/16W (1608)
R1586	1-218-847-11	s	RESISTOR,CHIP 1K 1/16W (1608)
R1587	1-208-754-11	s	RESISTOR,CHIP 68 1/10W (2012)
R1588 *2	1-216-829-11	s	RESISTOR,CHIP 4.7K 1/16W 1608
RB51	1-239-409-11	s	RESISTOR NETWORK 47 (1608)
RB201	1-239-409-11	s	RESISTOR NETWORK 47 (1608)
RB202	1-239-409-11	s	RESISTOR NETWORK 47 (1608)
RB301	1-239-412-11	s	NETWORK, RESISTOR 100 (1608)
RB501	1-239-998-11	s	RESISTOR,CHIP NETWORK 100
RB502	1-239-998-11	s	RESISTOR, CHIP NETWORK 100
RB651	1-239-389-11	s	RESISTOR,NETWORK 47K (1608)
RB652	1-236-904-11	s	RESISTOR NETWORK 1K (1608)
RB653	1-239-412-11	s	NETWORK, RESISTOR 100 (1608)
RB701	1-239-412-11	s	NETWORK, RESISTOR 100 (1608)
RB702	1-239-412-11	s	NETWORK, RESISTOR 100 (1608)
RB703	1-239-412-11	s	NETWORK, RESISTOR 100 (1608)
RB704	1-239-412-11	s	NETWORK, RESISTOR 100 (1608)
RB705	1-239-412-11	s	NETWORK, RESISTOR 100 (1608)
RB751	1-239-412-11	s	NETWORK, RESISTOR 100 (1608)
RB752	1-239-412-11	s	NETWORK, RESISTOR 100 (1608)
RB753	1-239-412-11	s	NETWORK, RESISTOR 100 (1608)
RB801	1-239-409-11	s	RESISTOR NETWORK 47 (1608)
RB802	1-239-412-11	s	NETWORK, RESISTOR 100 (1608)
RB803	1-239-412-11	s	NETWORK, RESISTOR 100 (1608)
RB804	1-239-309-11	s	RESISTOR ARRAY,CHIP 100K
RB805	1-239-309-11	s	RESISTOR ARRAY,CHIP 100K
RB951	1-239-412-11	s	NETWORK, RESISTOR 100 (1608)
RB952	1-239-412-11	s	NETWORK, RESISTOR 100 (1608)

(APR-45 BOARD(DSR-2000/2000P) SUFFIX -11, -12)

Ref. No. or Q'ty	Part No.	SP	Description
RB953	1-239-412-11	s	NETWORK, RESISTOR 100 (1608)
RB954	1-239-412-11	s	NETWORK, RESISTOR 100 (1608)
RB956	1-239-412-11	s	NETWORK, RESISTOR 100 (1608)
RB957	1-239-412-11	s	NETWORK, RESISTOR 100 (1608)
RB958	1-239-412-11	s	NETWORK, RESISTOR 100 (1608)
RB959	1-239-412-11	s	NETWORK, RESISTOR 100 (1608)
RB960	1-239-412-11	s	NETWORK, RESISTOR 100 (1608)
RB961	1-233-936-11	s	RESISTOR,NETWORK 10 (1608)
RB962	1-233-936-11	s	RESISTOR,NETWORK 10 (1608)
RB963	1-233-936-11	s	RESISTOR,NETWORK 10 (1608)
RB1501	1-239-309-11	s	RESISTOR ARRAY,CHIP 100K
RB1502	1-239-309-11	s	RESISTOR ARRAY,CHIP 100K
RB1503	1-239-412-11	s	NETWORK, RESISTOR 100 (1608)
RB1504	1-239-412-11	s	NETWORK, RESISTOR 100 (1608)
RB1505	1-239-412-11	s	NETWORK, RESISTOR 100 (1608)
RB1551	1-239-309-11	s	RESISTOR ARRAY,CHIP 100K
RB1552	1-239-309-11	s	RESISTOR ARRAY,CHIP 100K
RB1553	1-239-412-11	s	NETWORK, RESISTOR 100 (1608)
RB1554	1-239-412-11	s	NETWORK, RESISTOR 100 (1608)
RB1555	1-239-412-11	s	NETWORK, RESISTOR 100 (1608)
RV1	1-237-034-11	s	RESISTOR,ADJ,CERMET 2K
RV4	1-237-034-11	s	RESISTOR,ADJ,CERMET 2K
RV101	1-237-034-11	s	RESISTOR,ADJ,CERMET 2K
RV104	1-237-034-11	s	RESISTOR,ADJ,CERMET 2K
RV201	1-237-034-11	s	RESISTOR,ADJ,CERMET 2K
RV202	1-237-034-11	s	RESISTOR,ADJ,CERMET 2K
RV203	1-237-034-11	s	RESISTOR,ADJ,CERMET 2K
RV204	1-237-034-11	s	RESISTOR,ADJ,CERMET 2K
RV701	1-237-034-11	s	RESISTOR,ADJ,CERMET 2K
RV751	1-237-034-11	s	RESISTOR,ADJ,CERMET 2K
RV801	1-237-034-11	s	RESISTOR,ADJ,CERMET 2K
RV1501	1-237-034-11	s	RESISTOR,ADJ,CERMET 2K
RV1551	1-237-034-11	s	RESISTOR,ADJ,CERMET 2K
X401	1-781-655-11	s	OSCILLATOR, CRYSTAL
X651	1-767-464-11	s	VIBRATOR, CRYSTAL

CC-83 BOARD(DSR-2000/2000P)

Ref. No. or Q'ty	Part No.	SP	Description
1pc	A-8323-497-A	o	MOUNTED CIRCUIT BOARD, CC-83
C1	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
CN1	1-770-300-21	o	HOUSING, CONNECTOR 18P
CN2	1-793-720-11	o	CONNECTOR, FFC/FPC (ZIF) 10P
CN3	1-695-479-11	o	PIN, CONNECTOR (PC BOARD) 2P
PH1	8-719-988-15	s	PHOTO REFRECTOR PR-11-C
PH2	8-719-988-15	s	PHOTO REFRECTOR PR-11-C
PH3	8-719-988-15	s	PHOTO REFRECTOR PR-11-C

CC-84 BOARD(DSR-2000/2000P)

Ref. No. or Q'ty	Part No.	SP	Description
CN4	1-785-508-11	o	CONNECTOR, FFC/FPC (ZIF) 10P
R1	1-216-825-11	s	RESISTOR,CHIP 2.2K 1/16W 1608
R2	1-216-833-11	s	RESISTOR,CHIP 10K 1/16W 1608
R3	1-216-825-11	s	RESISTOR,CHIP 2.2K 1/16W 1608
R4	1-216-833-11	s	RESISTOR,CHIP 10K 1/16W 1608
R5	1-216-825-11	s	RESISTOR,CHIP 2.2K 1/16W 1608
R6	1-216-833-11	s	RESISTOR,CHIP 10K 1/16W 1608

CC-85 BOARD(DSR-2000/2000P)

Ref. No. or Q'ty	Part No.	SP	Description
PH1	8-719-988-15	s	PHOTO REFRECTOR PR-11-C
PH2	8-719-988-15	s	PHOTO REFRECTOR PR-11-C
PH3	8-719-988-15	s	PHOTO REFRECTOR PR-11-C
PH4	8-719-988-15	s	PHOTO REFRECTOR PR-11-C
R1	1-216-821-11	s	RESISTOR,CHIP 1.0K 1/16W(1608)
R2	1-216-818-11	s	RESISTOR, CHIP 560 1/16W 1608

CN-1968 BOARD(DSBK-190)

Ref. No. or Q'ty	Part No.	SP	Description
1pc	3-623-441-13	o	COVER,OPTION
2pcs	7-621-772-20	s	SCREW +B 2X5(EP-FE/ZNBK/CM2)
1pc	7-621-771-06	s	SCREW +B2X5(EP-FE/CU,NI,CR)
CN1	1-793-304-12	s	SQUARE-BUILT CONNECTOR(1394)
CN2	1-573-806-21	s	PIN,CONNECTOR (6P)(SMD)(1.5MM)

CP-341 BOARD(DSR-2000/2000P)

---

*1: Board No. suffix 12 -

Ref. No. or Q'ty	Part No.	SP	Description
1pc	A-8323-489-A	o	MOUNTED CIRCUIT BOARD, CP-341
C107	1-126-933-11	s	CAPACITOR,ELECT 100MF/16V
C108	1-126-933-11	s	CAPACITOR,ELECT 100MF/16V
C110	1-163-809-11	s	CAPACITOR,CHIP CERAMIC 0.047MF
C111	1-163-809-11	s	CAPACITOR,CHIP CERAMIC 0.047MF
C112	1-126-964-11	s	CAPACITOR, ELECT 10MF/50V
C113	1-163-809-11	s	CAPACITOR,CHIP CERAMIC 0.047MF
C115	1-163-809-11	s	CAPACITOR,CHIP CERAMIC 0.047MF
C116	1-163-809-11	s	CAPACITOR,CHIP CERAMIC 0.047MF
C117	1-163-809-11	s	CAPACITOR,CHIP CERAMIC 0.047MF
C118	1-104-664-11	s	CAPACITOR, ELECT 47MF/25V
C119	1-104-664-11	s	CAPACITOR, ELECT 47MF/25V
C121	1-163-809-11	s	CAPACITOR,CHIP CERAMIC 0.047MF
C201	1-163-809-11	s	CAPACITOR,CHIP CERAMIC 0.047MF
C202	1-104-664-11	s	CAPACITOR, ELECT 47MF/25V
C203	1-163-809-11	s	CAPACITOR,CHIP CERAMIC 0.047MF
C204	1-104-664-11	s	CAPACITOR, ELECT 47MF/25V
C205	1-126-948-11	s	CAPACITOR,ELECT 100MF/35V
C206	1-163-038-91	s	CAPACITOR, CERAMIC 0.1MF/25V
C207 *1	1-163-809-11	s	CAPACITOR,CHIP CERAMIC 0.047MF
C301	1-163-275-11	s	CAPACITOR CERAMIC 1000PF/50V
C302	1-163-275-11	s	CAPACITOR CERAMIC 1000PF/50V
C303	1-104-760-11	s	CAPACITOR CERAMIC 0.047MF/50V
C304	1-104-760-11	s	CAPACITOR CERAMIC 0.047MF/50V
C307	1-115-339-11	s	CAPACITOR,CERAMIC 0.1MF/50V
C308	1-115-339-11	s	CAPACITOR,CERAMIC 0.1MF/50V
C309	1-163-220-11	s	CAPACITOR, CHIP CERAMIC 3.0PF
C310	1-163-220-11	s	CAPACITOR, CHIP CERAMIC 3.0PF
C311	1-163-113-00	s	CAPACITOR,CHIP CERAMIC 68PF/50
C312	1-163-113-00	s	CAPACITOR,CHIP CERAMIC 68PF/50
C313	1-109-982-11	s	CAPACITOR,CHIP CERAMIC 1MF/10V
C314	1-109-982-11	s	CAPACITOR,CHIP CERAMIC 1MF/10V
C315	1-126-964-11	s	CAPACITOR, ELECT 10MF/50V
C316	1-126-964-11	s	CAPACITOR, ELECT 10MF/50V
C317	1-115-339-11	s	CAPACITOR,CERAMIC 0.1MF/50V
C318	1-115-339-11	s	CAPACITOR,CERAMIC 0.1MF/50V
C319	1-109-982-11	s	CAPACITOR,CHIP CERAMIC 1MF/10V
C320	1-115-339-11	s	CAPACITOR,CERAMIC 0.1MF/50V
C321	1-109-982-11	s	CAPACITOR,CHIP CERAMIC 1MF/10V
C322	1-115-339-11	s	CAPACITOR,CERAMIC 0.1MF/50V
C323	1-126-966-11	s	CAPACITOR,ELECT 33MF/50V
C324	1-126-966-11	s	CAPACITOR,ELECT 33MF/50V
C325	1-115-339-11	s	CAPACITOR,CERAMIC 0.1MF/50V
CN1	1-778-665-11	s	CONNECTOR, BNC (RECEPTACLE)
CN2	1-778-665-11	s	CONNECTOR, BNC (RECEPTACLE)
CN3	1-778-665-11	s	CONNECTOR, BNC (RECEPTACLE)
CN4	1-778-665-11	s	CONNECTOR, BNC (RECEPTACLE)
CN5	1-573-590-22	s	CONNECTOR, (S) TERMINAL 4P
CN6	1-573-590-22	s	CONNECTOR, (S) TERMINAL 4P
CN7	1-766-596-11	s	JACK, PIN 1P
CN8	1-568-674-11	o	CONNECTOR,D-SUB 15P
CN9	1-784-599-11	o	CONNECTOR, D-SUB 15P
CN10	1-568-676-11	o	CONNECTOR,D-SUB 9P
CN11	1-568-676-11	o	CONNECTOR,D-SUB 9P
CN601	1-691-739-11	o	CONNECTOR,BOARD TO BOARD 14P

(CP-341 BOARD(DSR-2000/2000P))

Ref. No. or Q'ty	Part No.	SP	Description
CN602	1-691-739-11	o	CONNECTOR,BOARD TO BOARD 14P
CN603	1-691-739-11	o	CONNECTOR,BOARD TO BOARD 14P
CN604	1-691-739-11	o	CONNECTOR,BOARD TO BOARD 14P
CN605	1-691-739-11	o	CONNECTOR,BOARD TO BOARD 14P
D103	8-719-024-81	s	DIODE 1SS300-TE85L
D301	8-719-941-23	s	DIODE DA204U
D302	8-719-941-23	s	DIODE DA204U
D303	8-719-941-23	s	DIODE DA204U
D304	8-719-941-23	s	DIODE DA204U
FL101	1-239-896-12	s	FILTER, EMI (SMD)
FL102	1-239-896-12	s	FILTER, EMI (SMD)
FL103	1-239-896-12	s	FILTER, EMI (SMD)
FL104	1-239-896-12	s	FILTER, EMI (SMD)
FL105	1-239-896-12	s	FILTER, EMI (SMD)
FL106	1-239-895-11	s	FILTER, EMI (SMD)
FL107	1-239-896-12	s	FILTER, EMI (SMD)
FL108	1-239-896-12	s	FILTER, EMI (SMD)
FL109	1-239-896-12	s	FILTER, EMI (SMD)
FL110	1-239-896-12	s	FILTER, EMI (SMD)
FL111	1-239-896-12	s	FILTER, EMI (SMD)
FL112	1-239-896-12	s	FILTER, EMI (SMD)
FL113	1-239-896-12	s	FILTER, EMI (SMD)
FL114	1-239-896-12	s	FILTER, EMI (SMD)
FL115	1-239-896-12	s	FILTER, EMI (SMD)
FL116	1-239-895-11	s	FILTER, EMI (SMD)
FL117	1-239-895-11	s	FILTER, EMI (SMD)
FL201	1-239-896-12	s	FILTER, EMI (SMD)
FL202	1-239-896-12	s	FILTER, EMI (SMD)
FL203	1-239-896-12	s	FILTER, EMI (SMD)
FL204	1-239-896-12	s	FILTER, EMI (SMD)
FL205	1-239-896-12	s	FILTER, EMI (SMD)
FL206	1-239-896-12	s	FILTER, EMI (SMD)
FL207	1-239-896-12	s	FILTER, EMI (SMD)
FL208	1-239-896-12	s	FILTER, EMI (SMD)
FL209	1-239-896-12	s	FILTER, EMI (SMD)
FL210	1-239-896-12	s	FILTER, EMI (SMD)
FL211	1-239-896-12	s	FILTER, EMI (SMD)
FL212 *1	1-239-896-12	s	FILTER, EMI (SMD)
FL213 *1	1-239-896-12	s	FILTER, EMI (SMD)
FL214 *1	1-239-896-12	s	FILTER, EMI (SMD)
FL215 *1	1-239-896-12	s	FILTER, EMI (SMD)
FL216 *1	1-239-896-12	s	FILTER, EMI (SMD)
FL217 *1	1-239-896-12	s	FILTER, EMI (SMD)
FL218 *1	1-239-896-12	s	FILTER, EMI (SMD)
IC102	8-759-708-05	s	IC NJM78L05A
IC103	8-759-700-65	s	IC NJM79L05A
IC201	8-759-245-82	s	IC TA79009S
IC202	8-759-701-59	s	IC NJM78M09FA
IC301	8-759-055-67	s	IC SN75107ANS-LS
IC302	8-759-268-96	s	IC SN74HCT00ANS (E20)
IC304	8-759-177-02	s	IC NJM2267M
IC305	8-759-177-02	s	IC NJM2267M
L301	1-412-279-31	s	CHIP INDUCTOR 270UH (3225)
L302	1-412-279-31	s	CHIP INDUCTOR 270UH (3225)
L303	1-410-378-11	s	INDUCTOR,CHIP 5.6UH (3225)
L304	1-410-378-11	s	INDUCTOR,CHIP 5.6UH (3225)
L305	1-410-377-31	s	INDUCTOR,CHIP 4.7UH (3225)
L306	1-410-377-31	s	INDUCTOR,CHIP 4.7UH (3225)

(CP-341 BOARD(DSR-2000/2000P))

Ref. No. or Q'ty	Part No.	SP	Description
L307	1-410-377-31	s	INDUCTOR,CHIP 4.7UH (3225)
L308	1-410-377-31	s	INDUCTOR,CHIP 4.7UH (3225)
LF201	1-233-510-11	o	FILTER, DC LINE
Q101	8-729-117-32	s	TRANSISTOR 2SC4177
Q102	8-729-907-46	s	TRANSISTOR IMZ1
Q103	8-729-904-41	s	TRANSISTOR FMY3
R115	1-208-755-11	s	RESISTOR,CHIP 75 1/10W (2012)
R116	1-208-755-11	s	RESISTOR,CHIP 75 1/10W (2012)
R119	1-208-810-11	s	RESISTOR,CHIP 15K 1/10W (2012)
R120	1-208-810-11	s	RESISTOR,CHIP 15K 1/10W (2012)
R121	1-208-758-11	s	RESISTOR,CHIP 100 1/10W (2012)
R122	1-208-758-11	s	RESISTOR,CHIP 100 1/10W (2012)
R123	1-208-756-11	s	RESISTOR,CHIP 82 1/10W (2012)
R124	1-208-756-11	s	RESISTOR,CHIP 82 1/10W (2012)
R125	1-208-814-11	s	RESISTOR,CHIP 22K 1/10W (2012)
R126	1-208-778-11	s	RESISTOR,CHIP 680 1/10W (2012)
R127	1-208-802-11	s	RESISTOR,CHIP 6.8K 1/10W(2012)
R128	1-211-960-11	s	RESISTOR,CHIP 22 1/10W (2012)
R129	1-208-812-11	s	RESISTOR,CHIP 18K 1/10W (2012)
R130	1-208-756-11	s	RESISTOR,CHIP 82 1/10W (2012)
R131	1-208-756-11	s	RESISTOR,CHIP 82 1/10W (2012)
R132	1-208-756-11	s	RESISTOR,CHIP 82 1/10W (2012)
R133	1-208-792-11	s	RESISTOR,CHIP 2.7K 1/10W(2012)
R134	1-208-778-11	s	RESISTOR,CHIP 680 1/10W (2012)
R135	1-211-960-11	s	RESISTOR,CHIP 22 1/10W (2012)
R301	1-208-752-11	s	RESISTOR,CHIP 56 1/10W (2012)
R302	1-208-752-11	s	RESISTOR,CHIP 56 1/10W (2012)
R303	1-208-755-11	s	RESISTOR,CHIP 75 1/10W (2012)
R304	1-208-755-11	s	RESISTOR,CHIP 75 1/10W (2012)
R305	1-211-963-11	s	RESISTOR,CHIP 30 1/10W (2012)
R306	1-211-963-11	s	RESISTOR,CHIP 30 1/10W (2012)
R307	1-208-764-11	s	RESISTOR,CHIP 180 1/10W (2012)
R308	1-208-764-11	s	RESISTOR,CHIP 180 1/10W (2012)
R309	1-208-758-11	s	RESISTOR,CHIP 100 1/10W (2012)
R310	1-208-758-11	s	RESISTOR,CHIP 100 1/10W (2012)
R311	1-208-769-11	s	RESISTOR,CHIP 300 1/10W (2012)
R312	1-208-769-11	s	RESISTOR,CHIP 300 1/10W (2012)
R313	1-208-758-11	s	RESISTOR,CHIP 100 1/10W (2012)
R314	1-208-758-11	s	RESISTOR,CHIP 100 1/10W (2012)
R315	1-208-758-11	s	RESISTOR,CHIP 100 1/10W (2012)
R316	1-208-758-11	s	RESISTOR,CHIP 100 1/10W (2012)
R317	1-211-960-11	s	RESISTOR,CHIP 22 1/10W (2012)
R318	1-211-960-11	s	RESISTOR,CHIP 22 1/10W (2012)
R319	1-216-603-11	s	RESISTOR,CHIP 10 1/10W(2012)
R320	1-216-603-11	s	RESISTOR,CHIP 10 1/10W(2012)
R321	1-208-782-11	s	RESISTOR,CHIP 1K 1/10W (2012)
R322	1-208-782-11	s	RESISTOR,CHIP 1K 1/10W (2012)
R323	1-208-783-11	s	RESISTOR,CHIP 1.1K 1/10W(2012)
R324	1-208-783-11	s	RESISTOR,CHIP 1.1K 1/10W(2012)
R325	1-208-780-11	s	RESISTOR,CHIP 820 1/10W (2012)
R326	1-208-780-11	s	RESISTOR,CHIP 820 1/10W (2012)
R327	1-208-773-11	s	RESISTOR,CHIP 430 1/10W (2012)
R328	1-208-773-11	s	RESISTOR,CHIP 430 1/10W (2012)
R329	1-208-782-11	s	RESISTOR,CHIP 1K 1/10W (2012)
R330	1-208-782-11	s	RESISTOR,CHIP 1K 1/10W (2012)
R331	1-208-755-11	s	RESISTOR,CHIP 75 1/10W (2012)
R332	1-208-755-11	s	RESISTOR,CHIP 75 1/10W (2012)

(CP-341 BOARD(DSR-2000/2000P))

Ref. No. or Q'ty	Part No.	SP	Description
S101	1-570-157-51	s	SWITCH,SLIDE (1-1-3)
S102	1-570-157-51	s	SWITCH,SLIDE (1-1-3)
THP201	1-803-314-11	s	THERMISTOR, POSITIVE

CP-342 BOARD(DSR-2000/2000P(UC/CE))

---

*1: Board No. suffix 11
*2: Board No. suffix 12 -

Ref. No. or Q'ty	Part No.	SP	Description
1pc	A-8323-490-A	o	MOUNTED CIRCUIT BOARD, CP-342
C1	1-163-133-00	s	CAPACITOR,CHIP CERAMIC 470PF
C2	1-163-133-00	s	CAPACITOR,CHIP CERAMIC 470PF
C3	1-163-133-00	s	CAPACITOR,CHIP CERAMIC 470PF
C4	1-163-133-00	s	CAPACITOR,CHIP CERAMIC 470PF
C5	1-163-133-00	s	CAPACITOR,CHIP CERAMIC 470PF
C6	1-163-133-00	s	CAPACITOR,CHIP CERAMIC 470PF
C7	1-163-133-00	s	CAPACITOR,CHIP CERAMIC 470PF
C8	1-163-133-00	s	CAPACITOR,CHIP CERAMIC 470PF
C13	1-163-133-00	s	CAPACITOR,CHIP CERAMIC 470PF
C14	1-163-133-00	s	CAPACITOR,CHIP CERAMIC 470PF
C15	1-163-133-00	s	CAPACITOR,CHIP CERAMIC 470PF
C16	1-163-133-00	s	CAPACITOR,CHIP CERAMIC 470PF
C17	1-163-133-00	s	CAPACITOR,CHIP CERAMIC 470PF
C18	1-163-133-00	s	CAPACITOR,CHIP CERAMIC 470PF
C19	1-163-133-00	s	CAPACITOR,CHIP CERAMIC 470PF
C20	1-163-133-00	s	CAPACITOR,CHIP CERAMIC 470PF
C21	1-126-964-11	s	CAPACITOR, ELECT 10MF/50V
C22	1-126-964-11	s	CAPACITOR, ELECT 10MF/50V
C23	1-126-964-11	s	CAPACITOR, ELECT 10MF/50V
C24	1-126-964-11	s	CAPACITOR, ELECT 10MF/50V
C25	1-126-964-11	s	CAPACITOR, ELECT 10MF/50V
C26	1-126-964-11	s	CAPACITOR, ELECT 10MF/50V
C27	1-126-964-11	s	CAPACITOR, ELECT 10MF/50V
C28	1-126-964-11	s	CAPACITOR, ELECT 10MF/50V
C29	1-163-243-11	s	CAPACITOR CHIP CERAMIC 47PF/50
C30	1-163-243-11	s	CAPACITOR CHIP CERAMIC 47PF/50
C31	1-163-243-11	s	CAPACITOR CHIP CERAMIC 47PF/50
C32	1-163-243-11	s	CAPACITOR CHIP CERAMIC 47PF/50
C33	1-163-243-11	s	CAPACITOR CHIP CERAMIC 47PF/50
C34	1-163-243-11	s	CAPACITOR CHIP CERAMIC 47PF/50
C35	1-163-243-11	s	CAPACITOR CHIP CERAMIC 47PF/50
C36	1-163-243-11	s	CAPACITOR CHIP CERAMIC 47PF/50
C37	1-163-037-11	s	CAPACITOR,CHIP CERAMIC 0.022MF
C38	1-163-037-11	s	CAPACITOR,CHIP CERAMIC 0.022MF
C39	1-163-037-11	s	CAPACITOR,CHIP CERAMIC 0.022MF
C40	1-163-037-11	s	CAPACITOR,CHIP CERAMIC 0.022MF
C41	1-126-933-11	s	CAPACITOR,ELECT 100MF/16V
C42	1-126-933-11	s	CAPACITOR,ELECT 100MF/16V
C43	1-126-933-11	s	CAPACITOR,ELECT 100MF/16V
C44	1-126-933-11	s	CAPACITOR,ELECT 100MF/16V
C45	1-126-933-11	s	CAPACITOR,ELECT 100MF/16V
C46	1-126-933-11	s	CAPACITOR,ELECT 100MF/16V
C47	1-126-933-11	s	CAPACITOR,ELECT 100MF/16V
C48	1-126-933-11	s	CAPACITOR,ELECT 100MF/16V
C201	1-126-933-11	s	CAPACITOR,ELECT 100MF/16V
C202	1-126-933-11	s	CAPACITOR,ELECT 100MF/16V
C203	1-126-933-11	s	CAPACITOR,ELECT 100MF/16V
C204	1-163-243-11	s	CAPACITOR CHIP CERAMIC 47PF/50
C205	1-163-243-11	s	CAPACITOR CHIP CERAMIC 47PF/50
C206	1-163-243-11	s	CAPACITOR CHIP CERAMIC 47PF/50
C207	1-163-243-11	s	CAPACITOR CHIP CERAMIC 47PF/50
C208	1-163-243-11	s	CAPACITOR CHIP CERAMIC 47PF/50
C209	1-163-243-11	s	CAPACITOR CHIP CERAMIC 47PF/50
C210	1-163-243-11	s	CAPACITOR CHIP CERAMIC 47PF/50

(CP-342 BOARD(DSR-2000/2000P(UC/CE)))

Ref. No. or Q'ty	Part No.	SP	Description
C211	1-163-243-11	s	CAPACITOR CHIP CERAMIC 47PF/50
C212	1-163-251-11	s	CAPACITOR CERAMIC 100PF/50V
C213	1-163-251-11	s	CAPACITOR CERAMIC 100PF/50V
C214	1-163-251-11	s	CAPACITOR CERAMIC 100PF/50V
C215	1-163-251-11	s	CAPACITOR CERAMIC 100PF/50V
C216	1-126-934-11	s	CAPACITOR,ELECT 220MF/16V
C217	1-126-934-11	s	CAPACITOR,ELECT 220MF/16V
C218	1-126-934-11	s	CAPACITOR,ELECT 220MF/16V
C219	1-126-934-11	s	CAPACITOR,ELECT 220MF/16V
C220	1-126-934-11	s	CAPACITOR,ELECT 220MF/16V
C221	1-126-934-11	s	CAPACITOR,ELECT 220MF/16V
C222	1-126-934-11	s	CAPACITOR,ELECT 220MF/16V
C223	1-126-934-11	s	CAPACITOR,ELECT 220MF/16V
CN1	1-750-786-21	s	CONNECTOR (XLR TYPE) 3P
CN2	1-750-786-21	s	CONNECTOR (XLR TYPE) 3P
CN3	1-750-785-21	s	CONNECTOR (XLR TYPE) 3P
CN4	1-750-785-21	s	CONNECTOR (XLR TYPE) 3P
CN606	1-691-739-11	o	CONNECTOR,BOARD TO BOARD 14P
CN607	1-691-739-11	o	CONNECTOR,BOARD TO BOARD 14P
CN608	1-691-739-11	o	CONNECTOR,BOARD TO BOARD 14P
D1	8-719-820-41	s	DIODE 1SS302
D2	8-719-820-41	s	DIODE 1SS302
D3	8-719-820-41	s	DIODE 1SS302
D4	8-719-820-41	s	DIODE 1SS302
D5	8-719-820-41	s	DIODE 1SS302
D6	8-719-820-41	s	DIODE 1SS302
D7	8-719-820-41	s	DIODE 1SS302
D8	8-719-820-41	s	DIODE 1SS302
D202	8-719-820-41	s	DIODE 1SS302
D203	8-719-820-41	s	DIODE 1SS302
D204	8-719-820-41	s	DIODE 1SS302
D205	8-719-820-41	s	DIODE 1SS302
D206	8-719-820-41	s	DIODE 1SS302
D207	8-719-820-41	s	DIODE 1SS302
D208	8-719-820-41	s	DIODE 1SS302
D209	8-719-820-41	s	DIODE 1SS302
D210	8-719-820-41	s	DIODE 1SS302
D211	8-719-820-41	s	DIODE 1SS302
FL201	1-239-895-11	s	FILTER, EMI (SMD)
FL202	1-239-895-11	s	FILTER, EMI (SMD)
FL203	1-239-895-11	s	FILTER, EMI (SMD)
FL204	1-239-895-11	s	FILTER, EMI (SMD)
FL205	1-239-895-11	s	FILTER, EMI (SMD)
FL206	1-239-895-11	s	FILTER, EMI (SMD)
FL207	1-239-895-11	s	FILTER, EMI (SMD)
FL208	1-239-895-11	s	FILTER, EMI (SMD)
IC1	*2 8-759-835-17	s	IC NJM4580E (TE2)
	*1 8-759-711-82	s	IC NJM4580E
IC2	*2 8-759-835-17	s	IC NJM4580E (TE2)
	*1 8-759-711-82	s	IC NJM4580E
IC3	*2 8-759-835-17	s	IC NJM4580E (TE2)
	*1 8-759-711-82	s	IC NJM4580E
IC4	*2 8-759-835-17	s	IC NJM4580E (TE2)
	*1 8-759-711-82	s	IC NJM4580E
IC201	8-759-281-24	s	IC SSM-2142S (R)
IC202	8-759-281-24	s	IC SSM-2142S (R)
IC203	8-759-281-24	s	IC SSM-2142S (R)
IC204	8-759-281-24	s	IC SSM-2142S (R)

(CP-342 BOARD(DSR-2000/2000P(UC/CE)))

Ref. No. or Q'ty	Part No.	SP	Description
IC205 *2	8-759-835-17	s	IC NJM4580E (TE2)
*1	8-759-711-82	s	IC NJM4580E
IC206 *2	8-759-835-17	s	IC NJM4580E (TE2)
*1	8-759-711-82	s	IC NJM4580E
L1	1-410-380-31	s	INDUCTOR,CHIP 8.2UH (3225)
L2	1-410-380-31	s	INDUCTOR,CHIP 8.2UH (3225)
L3	1-410-380-31	s	INDUCTOR,CHIP 8.2UH (3225)
L4	1-410-380-31	s	INDUCTOR,CHIP 8.2UH (3225)
L5	1-410-380-31	s	INDUCTOR,CHIP 8.2UH (3225)
L6	1-410-380-31	s	INDUCTOR,CHIP 8.2UH (3225)
L7	1-410-380-31	s	INDUCTOR,CHIP 8.2UH (3225)
L8	1-410-380-31	s	INDUCTOR,CHIP 8.2UH (3225)
L201	1-414-398-11	s	INDUCTOR (SMD) 10UH
L202	1-414-398-11	s	INDUCTOR (SMD) 10UH
L203	1-414-398-11	s	INDUCTOR (SMD) 10UH
L204	1-414-398-11	s	INDUCTOR (SMD) 10UH
L205	1-414-398-11	s	INDUCTOR (SMD) 10UH
L206	1-414-398-11	s	INDUCTOR (SMD) 10UH
Q1	8-729-020-93	s	TRANSISTOR 2SC2982C-TE12L
Q2	8-729-106-60	s	TRANSISTOR 2SB1115A
Q3	8-729-020-93	s	TRANSISTOR 2SC2982C-TE12L
Q4	8-729-106-60	s	TRANSISTOR 2SB1115A
Q201	8-729-029-14	s	TRANSISTOR DTC144EUA-T106
Q202	8-729-110-92	s	TRANSISTOR 2SK425-X13
Q203	8-729-209-07	s	TRANSISTOR 2SC4213-B
Q204	8-729-209-07	s	TRANSISTOR 2SC4213-B
Q205	8-729-209-07	s	TRANSISTOR 2SC4213-B
Q206	8-729-209-07	s	TRANSISTOR 2SC4213-B
Q207	8-729-141-48	s	TRANSISTOR 2SB624-BV345
Q208	8-729-110-94	s	TRANSISTOR 2SK425-X15 (0.2W)
Q209	8-729-110-94	s	TRANSISTOR 2SK425-X15 (0.2W)
Q210	8-729-110-94	s	TRANSISTOR 2SK425-X15 (0.2W)
Q211	8-729-110-94	s	TRANSISTOR 2SK425-X15 (0.2W)
Q212	8-729-209-07	s	TRANSISTOR 2SC4213-B
Q213	8-729-209-07	s	TRANSISTOR 2SC4213-B
Q214	8-729-209-07	s	TRANSISTOR 2SC4213-B
Q215	8-729-209-07	s	TRANSISTOR 2SC4213-B
Q216	8-729-209-07	s	TRANSISTOR 2SC4213-B
Q217	8-729-209-07	s	TRANSISTOR 2SC4213-B
Q218	8-729-209-07	s	TRANSISTOR 2SC4213-B
Q219	8-729-209-07	s	TRANSISTOR 2SC4213-B
R5	1-216-295-91	s	RESISTOR, CHIP 0 (1/10W)
R6	1-216-295-91	s	RESISTOR, CHIP 0 (1/10W)
R7	1-216-295-91	s	RESISTOR, CHIP 0 (1/10W)
R8	1-216-295-91	s	RESISTOR, CHIP 0 (1/10W)
R10	1-216-295-91	s	RESISTOR, CHIP 0 (1/10W)
R12	1-216-295-91	s	RESISTOR, CHIP 0 (1/10W)
R14	1-216-295-91	s	RESISTOR, CHIP 0 (1/10W)
R16	1-216-295-91	s	RESISTOR, CHIP 0 (1/10W)
R17	1-208-760-11	s	RESISTOR,CHIP 120 1/10W (2012)
R18	1-208-760-11	s	RESISTOR,CHIP 120 1/10W (2012)
R19	1-208-760-11	s	RESISTOR,CHIP 120 1/10W (2012)
R20	1-208-760-11	s	RESISTOR,CHIP 120 1/10W (2012)
R21	1-208-777-11	s	RESISTOR,CHIP 620 1/10W (2012)
R22	1-208-777-11	s	RESISTOR,CHIP 620 1/10W (2012)
R23	1-208-777-11	s	RESISTOR,CHIP 620 1/10W (2012)
R24	1-208-777-11	s	RESISTOR,CHIP 620 1/10W (2012)
R25	1-208-800-11	s	RESISTOR,CHIP 5.6K 1/10W(2012)

(CP-342 BOARD(DSR-2000/2000P(UC/CE)))

Ref. No. or Q'ty	Part No.	SP	Description
R26	1-208-800-11	s	RESISTOR,CHIP 5.6K 1/10W(2012)
R27	1-208-800-11	s	RESISTOR,CHIP 5.6K 1/10W(2012)
R28	1-208-800-11	s	RESISTOR,CHIP 5.6K 1/10W(2012)
R29	1-208-800-11	s	RESISTOR,CHIP 5.6K 1/10W(2012)
R30	1-208-800-11	s	RESISTOR,CHIP 5.6K 1/10W(2012)
R31	1-208-800-11	s	RESISTOR,CHIP 5.6K 1/10W(2012)
R32	1-208-800-11	s	RESISTOR,CHIP 5.6K 1/10W(2012)
R33	1-216-295-91	s	RESISTOR, CHIP 0 (1/10W)
R34	1-216-295-91	s	RESISTOR, CHIP 0 (1/10W)
R35	1-216-295-91	s	RESISTOR, CHIP 0 (1/10W)
R36	1-216-295-91	s	RESISTOR, CHIP 0 (1/10W)
R37	1-216-295-91	s	RESISTOR, CHIP 0 (1/10W)
R38	1-216-295-91	s	RESISTOR, CHIP 0 (1/10W)
R39	1-216-295-91	s	RESISTOR, CHIP 0 (1/10W)
R40	1-216-295-91	s	RESISTOR, CHIP 0 (1/10W)
R41	1-208-778-11	s	RESISTOR,CHIP 680 1/10W (2012)
R42	1-208-778-11	s	RESISTOR,CHIP 680 1/10W (2012)
R43	1-208-778-11	s	RESISTOR,CHIP 680 1/10W (2012)
R44	1-208-778-11	s	RESISTOR,CHIP 680 1/10W (2012)
R45	1-208-778-11	s	RESISTOR,CHIP 680 1/10W (2012)
R46	1-208-778-11	s	RESISTOR,CHIP 680 1/10W (2012)
R47	1-208-778-11	s	RESISTOR,CHIP 680 1/10W (2012)
R48	1-208-778-11	s	RESISTOR,CHIP 680 1/10W (2012)
R49	1-208-764-11	s	RESISTOR,CHIP 180 1/10W (2012)
R50	1-208-764-11	s	RESISTOR,CHIP 180 1/10W (2012)
R51	1-208-764-11	s	RESISTOR,CHIP 180 1/10W (2012)
R52	1-208-764-11	s	RESISTOR,CHIP 180 1/10W (2012)
R53	1-208-764-11	s	RESISTOR,CHIP 180 1/10W (2012)
R54	1-208-764-11	s	RESISTOR,CHIP 180 1/10W (2012)
R55	1-208-764-11	s	RESISTOR,CHIP 180 1/10W (2012)
R56	1-208-764-11	s	RESISTOR,CHIP 180 1/10W (2012)
R57	1-211-963-11	s	RESISTOR,CHIP 30 1/10W (2012)
R58	1-211-963-11	s	RESISTOR,CHIP 30 1/10W (2012)
R59	1-211-963-11	s	RESISTOR,CHIP 30 1/10W (2012)
R60	1-211-963-11	s	RESISTOR,CHIP 30 1/10W (2012)
R61	1-211-963-11	s	RESISTOR,CHIP 30 1/10W (2012)
R62	1-211-963-11	s	RESISTOR,CHIP 30 1/10W (2012)
R63	1-211-963-11	s	RESISTOR,CHIP 30 1/10W (2012)
R64	1-211-963-11	s	RESISTOR,CHIP 30 1/10W (2012)
R65	1-211-959-11	s	RESISTOR,CHIP 20 1/10W (2125)
R66	1-208-768-11	s	RESISTOR,CHIP 270 1/10W (2012)
R67	1-208-768-11	s	RESISTOR,CHIP 270 1/10W (2012)
R68	1-211-959-11	s	RESISTOR,CHIP 20 1/10W (2125)
R69	1-211-959-11	s	RESISTOR,CHIP 20 1/10W (2125)
R70	1-208-768-11	s	RESISTOR,CHIP 270 1/10W (2012)
R71	1-208-768-11	s	RESISTOR,CHIP 270 1/10W (2012)
R72	1-211-959-11	s	RESISTOR,CHIP 20 1/10W (2125)
R73	1-211-959-11	s	RESISTOR,CHIP 20 1/10W (2125)
R74	1-208-768-11	s	RESISTOR,CHIP 270 1/10W (2012)
R75	1-208-768-11	s	RESISTOR,CHIP 270 1/10W (2012)
R76	1-211-959-11	s	RESISTOR,CHIP 20 1/10W (2125)
R77	1-211-959-11	s	RESISTOR,CHIP 20 1/10W (2125)
R78	1-208-768-11	s	RESISTOR,CHIP 270 1/10W (2012)
R79	1-208-768-11	s	RESISTOR,CHIP 270 1/10W (2012)
R80	1-211-959-11	s	RESISTOR,CHIP 20 1/10W (2125)
R81	1-208-830-11	s	RESISTOR,CHIP 100K 1/10W(2012)
R82	1-208-830-11	s	RESISTOR,CHIP 100K 1/10W(2012)
R83	1-208-830-11	s	RESISTOR,CHIP 100K 1/10W(2012)
R84	1-208-830-11	s	RESISTOR,CHIP 100K 1/10W(2012)

(CP-342 BOARD(DSR-2000/2000P(UC/CE)))

Ref. No. or Q'ty	Part No.	SP	Description
R85	1-208-796-11	s	RESISTOR,CHIP 3.9K 1/10W(2012)
R86	1-216-063-91	s	RESISTOR,CHIP 3.9K 1/10W(2125)
R87	1-216-063-91	s	RESISTOR,CHIP 3.9K 1/10W(2125)
R88	1-208-796-11	s	RESISTOR,CHIP 3.9K 1/10W(2012)
R89	1-208-818-11	s	RESISTOR,CHIP 33K 1/10W (2012)
R90	1-208-818-11	s	RESISTOR,CHIP 33K 1/10W (2012)
R91	1-208-818-11	s	RESISTOR,CHIP 33K 1/10W (2012)
R92	1-208-818-11	s	RESISTOR,CHIP 33K 1/10W (2012)
R93	1-208-818-11	s	RESISTOR,CHIP 33K 1/10W (2012)
R94	1-208-818-11	s	RESISTOR,CHIP 33K 1/10W (2012)
R95	1-208-818-11	s	RESISTOR,CHIP 33K 1/10W (2012)
R96	1-208-818-11	s	RESISTOR,CHIP 33K 1/10W (2012)
R97	1-208-794-11	s	RESISTOR,CHIP 3.3K 1/10W(2012)
R98	1-208-794-11	s	RESISTOR,CHIP 3.3K 1/10W(2012)
R99	1-208-794-11	s	RESISTOR,CHIP 3.3K 1/10W(2012)
R100	1-208-794-11	s	RESISTOR,CHIP 3.3K 1/10W(2012)
R101	1-208-794-11	s	RESISTOR,CHIP 3.3K 1/10W(2012)
R102	1-208-794-11	s	RESISTOR,CHIP 3.3K 1/10W(2012)
R103	1-208-794-11	s	RESISTOR,CHIP 3.3K 1/10W(2012)
R104	1-208-794-11	s	RESISTOR,CHIP 3.3K 1/10W(2012)
R105	1-216-295-91	s	RESISTOR, CHIP 0 (1/10W)
R106	1-216-295-91	s	RESISTOR, CHIP 0 (1/10W)
R107	1-216-295-91	s	RESISTOR, CHIP 0 (1/10W)
R108	1-216-295-91	s	RESISTOR, CHIP 0 (1/10W)
R109	1-216-295-91	s	RESISTOR, CHIP 0 (1/10W)
R110	1-216-295-91	s	RESISTOR, CHIP 0 (1/10W)
R111	1-216-295-91	s	RESISTOR, CHIP 0 (1/10W)
R112	1-216-295-91	s	RESISTOR, CHIP 0 (1/10W)
R113	1-208-784-11	s	RESISTOR,CHIP 1.2K 1/10W(2012)
R114	1-208-784-11	s	RESISTOR,CHIP 1.2K 1/10W(2012)
R115	1-208-784-11	s	RESISTOR,CHIP 1.2K 1/10W(2012)
R116	1-208-784-11	s	RESISTOR,CHIP 1.2K 1/10W(2012)
R201	1-216-041-00	s	RESISTOR, CHIP 470 1/10W(2012)
R202	1-208-769-11	s	RESISTOR,CHIP 300 1/10W (2012)
R203	1-208-769-11	s	RESISTOR,CHIP 300 1/10W (2012)
R204	1-208-769-11	s	RESISTOR,CHIP 300 1/10W (2012)
R205	1-208-769-11	s	RESISTOR,CHIP 300 1/10W (2012)
R206	1-216-025-91	s	RESISTOR,CHIP 100 1/10W(2125)
R207	1-208-795-11	s	RESISTOR,CHIP 3.6K 1/10W(2125)
R208	1-208-795-11	s	RESISTOR,CHIP 3.6K 1/10W(2125)
R209	1-208-795-11	s	RESISTOR,CHIP 3.6K 1/10W(2125)
R210	1-208-795-11	s	RESISTOR,CHIP 3.6K 1/10W(2125)
R211	1-208-796-11	s	RESISTOR,CHIP 3.9K 1/10W(2012)
R212	1-208-796-11	s	RESISTOR,CHIP 3.9K 1/10W(2012)
R213	1-208-796-11	s	RESISTOR,CHIP 3.9K 1/10W(2012)
R214	1-208-796-11	s	RESISTOR,CHIP 3.9K 1/10W(2012)
R215	1-208-796-11	s	RESISTOR,CHIP 3.9K 1/10W(2012)
R216	1-208-796-11	s	RESISTOR,CHIP 3.9K 1/10W(2012)
R217	1-208-796-11	s	RESISTOR,CHIP 3.9K 1/10W(2012)
R218	1-208-796-11	s	RESISTOR,CHIP 3.9K 1/10W(2012)
R219	1-216-063-91	s	RESISTOR,CHIP 3.9K 1/10W(2125)
R220	1-208-807-11	s	RESISTOR,CHIP 11K 1/10W (2125)
R221	1-208-807-11	s	RESISTOR,CHIP 11K 1/10W (2125)
R222	1-208-807-11	s	RESISTOR,CHIP 11K 1/10W (2125)
R223	1-208-807-11	s	RESISTOR,CHIP 11K 1/10W (2125)
R224	1-208-807-11	s	RESISTOR,CHIP 11K 1/10W (2125)
R225	1-208-807-11	s	RESISTOR,CHIP 11K 1/10W (2125)
R226	1-208-807-11	s	RESISTOR,CHIP 11K 1/10W (2125)
R227	1-208-807-11	s	RESISTOR,CHIP 11K 1/10W (2125)

(CP-342 BOARD(DSR-2000/2000P(UC/CE)))

Ref. No. or Q'ty	Part No.	SP	Description
R228	1-216-013-00	s	RESISTOR,CHIP 33 1/10W(2012)
R229	1-216-013-00	s	RESISTOR,CHIP 33 1/10W(2012)
R230	1-216-013-00	s	RESISTOR,CHIP 33 1/10W(2012)
R231	1-216-013-00	s	RESISTOR,CHIP 33 1/10W(2012)
R232	1-216-013-00	s	RESISTOR,CHIP 33 1/10W(2012)
R233	1-216-013-00	s	RESISTOR,CHIP 33 1/10W(2012)
R234	1-216-013-00	s	RESISTOR,CHIP 33 1/10W(2012)
R235	1-216-013-00	s	RESISTOR,CHIP 33 1/10W(2012)
R236	1-208-806-11	s	RESISTOR,CHIP 10K 1/10W (2012)
R237	1-208-806-11	s	RESISTOR,CHIP 10K 1/10W (2012)
R238	1-208-806-11	s	RESISTOR,CHIP 10K 1/10W (2012)
R239	1-208-806-11	s	RESISTOR,CHIP 10K 1/10W (2012)
R240	1-208-806-11	s	RESISTOR,CHIP 10K 1/10W (2012)
R241	1-208-806-11	s	RESISTOR,CHIP 10K 1/10W (2012)
R242	1-208-806-11	s	RESISTOR,CHIP 10K 1/10W (2012)
R243	1-208-806-11	s	RESISTOR,CHIP 10K 1/10W (2012)
R244	1-216-295-91	s	RESISTOR, CHIP 0 (1/10W)
R246	1-216-295-91	s	RESISTOR, CHIP 0 (1/10W)
R248	1-216-295-91	s	RESISTOR, CHIP 0 (1/10W)
R250	1-216-295-91	s	RESISTOR, CHIP 0 (1/10W)
R256	1-216-295-91	s	RESISTOR, CHIP 0 (1/10W)
R257	1-216-295-91	s	RESISTOR, CHIP 0 (1/10W)
R258	1-216-295-91	s	RESISTOR, CHIP 0 (1/10W)
R259	1-216-295-91	s	RESISTOR, CHIP 0 (1/10W)
S1	1-572-042-11	s	SWITCH,SLIDE (2-4-3)
S2	1-572-042-11	s	SWITCH,SLIDE (2-4-3)
S3	1-572-042-11	s	SWITCH,SLIDE (2-4-3)
S4	1-572-042-11	s	SWITCH,SLIDE (2-4-3)
S5	1-572-992-11	s	SWITCH, SLIDE (2-2-3)
S6	1-572-992-11	s	SWITCH, SLIDE (2-2-3)
S7	1-572-992-11	s	SWITCH, SLIDE (2-2-3)
S8	1-572-992-11	s	SWITCH, SLIDE (2-2-3)

CP-342A BOARD(DSR-2000(J))
---

*1: Board No. suffix 11
*2: Board No. suffix 12 -

Ref. No. or Q'ty	Part No.	SP	Description
1pc	A-8323-491-A	o	MOUNTED CIRCUIT BOARD,CP-342A
C5	1-163-133-00	s	CAPACITOR,CHIP CERAMIC 470PF
C6	1-163-133-00	s	CAPACITOR,CHIP CERAMIC 470PF
C7	1-163-133-00	s	CAPACITOR,CHIP CERAMIC 470PF
C8	1-163-133-00	s	CAPACITOR,CHIP CERAMIC 470PF
C9	1-163-133-00	s	CAPACITOR,CHIP CERAMIC 470PF
C10	1-163-133-00	s	CAPACITOR,CHIP CERAMIC 470PF
C11	1-163-133-00	s	CAPACITOR,CHIP CERAMIC 470PF
C12	1-163-133-00	s	CAPACITOR,CHIP CERAMIC 470PF
C13	1-163-133-00	s	CAPACITOR,CHIP CERAMIC 470PF
C14	1-163-133-00	s	CAPACITOR,CHIP CERAMIC 470PF
C15	1-163-133-00	s	CAPACITOR,CHIP CERAMIC 470PF
C16	1-163-133-00	s	CAPACITOR,CHIP CERAMIC 470PF
C17	1-163-133-00	s	CAPACITOR,CHIP CERAMIC 470PF
C18	1-163-133-00	s	CAPACITOR,CHIP CERAMIC 470PF
C19	1-163-133-00	s	CAPACITOR,CHIP CERAMIC 470PF
C20	1-163-133-00	s	CAPACITOR,CHIP CERAMIC 470PF
C21	1-126-964-11	s	CAPACITOR, ELECT 10MF/50V
C22	1-126-964-11	s	CAPACITOR, ELECT 10MF/50V
C23	1-126-964-11	s	CAPACITOR, ELECT 10MF/50V
C24	1-126-964-11	s	CAPACITOR, ELECT 10MF/50V
C25	1-126-964-11	s	CAPACITOR, ELECT 10MF/50V
C26	1-126-964-11	s	CAPACITOR, ELECT 10MF/50V
C27	1-126-964-11	s	CAPACITOR, ELECT 10MF/50V
C28	1-126-964-11	s	CAPACITOR, ELECT 10MF/50V
C29	1-163-243-11	s	CAPACITOR CHIP CERAMIC 47PF/50
C30	1-163-243-11	s	CAPACITOR CHIP CERAMIC 47PF/50
C31	1-163-243-11	s	CAPACITOR CHIP CERAMIC 47PF/50
C32	1-163-243-11	s	CAPACITOR CHIP CERAMIC 47PF/50
C33	1-163-243-11	s	CAPACITOR CHIP CERAMIC 47PF/50
C34	1-163-243-11	s	CAPACITOR CHIP CERAMIC 47PF/50
C35	1-163-243-11	s	CAPACITOR CHIP CERAMIC 47PF/50
C36	1-163-243-11	s	CAPACITOR CHIP CERAMIC 47PF/50
C37	1-163-037-11	s	CAPACITOR,CHIP CERAMIC 0.022MF
C38	1-163-037-11	s	CAPACITOR,CHIP CERAMIC 0.022MF
C39	1-163-037-11	s	CAPACITOR,CHIP CERAMIC 0.022MF
C40	1-163-037-11	s	CAPACITOR,CHIP CERAMIC 0.022MF
C41	1-126-933-11	s	CAPACITOR,ELECT 100MF/16V
C42	1-126-933-11	s	CAPACITOR,ELECT 100MF/16V
C43	1-126-933-11	s	CAPACITOR,ELECT 100MF/16V
C44	1-126-933-11	s	CAPACITOR,ELECT 100MF/16V
C45	1-126-933-11	s	CAPACITOR,ELECT 100MF/16V
C46	1-126-933-11	s	CAPACITOR,ELECT 100MF/16V
C47	1-126-933-11	s	CAPACITOR,ELECT 100MF/16V
C48	1-126-933-11	s	CAPACITOR,ELECT 100MF/16V
C201	1-126-933-11	s	CAPACITOR,ELECT 100MF/16V
C202	1-126-933-11	s	CAPACITOR,ELECT 100MF/16V
C203	1-126-933-11	s	CAPACITOR,ELECT 100MF/16V
C204	1-163-243-11	s	CAPACITOR CHIP CERAMIC 47PF/50
C205	1-163-243-11	s	CAPACITOR CHIP CERAMIC 47PF/50
C206	1-163-243-11	s	CAPACITOR CHIP CERAMIC 47PF/50
C207	1-163-243-11	s	CAPACITOR CHIP CERAMIC 47PF/50
C208	1-163-243-11	s	CAPACITOR CHIP CERAMIC 47PF/50
C209	1-163-243-11	s	CAPACITOR CHIP CERAMIC 47PF/50
C210	1-163-243-11	s	CAPACITOR CHIP CERAMIC 47PF/50

Ref. No. or Q'ty	Part No.	SP	Description
C211	1-163-243-11	s	CAPACITOR CHIP CERAMIC 47PF/50
C212	1-163-251-11	s	CAPACITOR CERAMIC 100PF/50V
C213	1-163-251-11	s	CAPACITOR CERAMIC 100PF/50V
C214	1-163-251-11	s	CAPACITOR CERAMIC 100PF/50V
C215	1-163-251-11	s	CAPACITOR CERAMIC 100PF/50V
C216	1-126-934-11	s	CAPACITOR,ELECT 220MF/16V
C217	1-126-934-11	s	CAPACITOR,ELECT 220MF/16V
C218	1-126-934-11	s	CAPACITOR,ELECT 220MF/16V
C219	1-126-934-11	s	CAPACITOR,ELECT 220MF/16V
C220	1-126-934-11	s	CAPACITOR,ELECT 220MF/16V
C221	1-126-934-11	s	CAPACITOR,ELECT 220MF/16V
C222	1-126-934-11	s	CAPACITOR,ELECT 220MF/16V
C223	1-126-934-11	s	CAPACITOR,ELECT 220MF/16V
CN1	1-750-785-21	s	CONNECTOR (XLR TYPE) 3P
CN2	1-750-785-21	s	CONNECTOR (XLR TYPE) 3P
CN3	1-750-786-21	s	CONNECTOR (XLR TYPE) 3P
CN4	1-750-786-21	s	CONNECTOR (XLR TYPE) 3P
CN606	1-691-739-11	o	CONNECTOR,BOARD TO BOARD 14P
CN607	1-691-739-11	o	CONNECTOR,BOARD TO BOARD 14P
CN608	1-691-739-11	o	CONNECTOR,BOARD TO BOARD 14P
D1	8-719-820-41	s	DIODE 1SS302
D2	8-719-820-41	s	DIODE 1SS302
D3	8-719-820-41	s	DIODE 1SS302
D4	8-719-820-41	s	DIODE 1SS302
D5	8-719-820-41	s	DIODE 1SS302
D6	8-719-820-41	s	DIODE 1SS302
D7	8-719-820-41	s	DIODE 1SS302
D8	8-719-820-41	s	DIODE 1SS302
D202	8-719-820-41	s	DIODE 1SS302
D203	8-719-820-41	s	DIODE 1SS302
D204	8-719-820-41	s	DIODE 1SS302
D205	8-719-820-41	s	DIODE 1SS302
D206	8-719-820-41	s	DIODE 1SS302
D207	8-719-820-41	s	DIODE 1SS302
D208	8-719-820-41	s	DIODE 1SS302
D209	8-719-820-41	s	DIODE 1SS302
D210	8-719-820-41	s	DIODE 1SS302
D211	8-719-820-41	s	DIODE 1SS302
FL201	1-239-895-11	s	FILTER, EMI (SMD)
FL202	1-239-895-11	s	FILTER, EMI (SMD)
FL203	1-239-895-11	s	FILTER, EMI (SMD)
FL204	1-239-895-11	s	FILTER, EMI (SMD)
FL205	1-239-895-11	s	FILTER, EMI (SMD)
FL206	1-239-895-11	s	FILTER, EMI (SMD)
FL207	1-239-895-11	s	FILTER, EMI (SMD)
FL208	1-239-895-11	s	FILTER, EMI (SMD)
IC1	*2 8-759-835-17	s	IC NJM4580E (TE2)
	*1 8-759-711-82	s	IC NJM4580E
IC2	*2 8-759-835-17	s	IC NJM4580E (TE2)
	*1 8-759-711-82	s	IC NJM4580E
IC3	*2 8-759-835-17	s	IC NJM4580E (TE2)
	*1 8-759-711-82	s	IC NJM4580E
IC4	*2 8-759-835-17	s	IC NJM4580E (TE2)
	*1 8-759-711-82	s	IC NJM4580E
IC201	8-759-281-24	s	IC SSM-2142S (R)
IC202	8-759-281-24	s	IC SSM-2142S (R)
IC203	8-759-281-24	s	IC SSM-2142S (R)
IC204	8-759-281-24	s	IC SSM-2142S (R)

(CP-342A BOARD(DSR-2000(J)))

Ref. No. or Q'ty	Part No.	SP	Description
IC205 *2	8-759-835-17	s	IC NJM4580E (TE2)
*1	8-759-711-82	s	IC NJM4580E
IC206 *2	8-759-835-17	s	IC NJM4580E (TE2)
*1	8-759-711-82	s	IC NJM4580E
L1	1-410-380-31	s	INDUCTOR,CHIP 8.2UH (3225)
L2	1-410-380-31	s	INDUCTOR,CHIP 8.2UH (3225)
L3	1-410-380-31	s	INDUCTOR,CHIP 8.2UH (3225)
L4	1-410-380-31	s	INDUCTOR,CHIP 8.2UH (3225)
L5	1-410-380-31	s	INDUCTOR,CHIP 8.2UH (3225)
L6	1-410-380-31	s	INDUCTOR,CHIP 8.2UH (3225)
L7	1-410-380-31	s	INDUCTOR,CHIP 8.2UH (3225)
L8	1-410-380-31	s	INDUCTOR,CHIP 8.2UH (3225)
L201	1-414-398-11	s	INDUCTOR (SMD) 10UH
L202	1-414-398-11	s	INDUCTOR (SMD) 10UH
L203	1-414-398-11	s	INDUCTOR (SMD) 10UH
L204	1-414-398-11	s	INDUCTOR (SMD) 10UH
L205	1-414-398-11	s	INDUCTOR (SMD) 10UH
L206	1-414-398-11	s	INDUCTOR (SMD) 10UH
Q1	8-729-020-93	s	TRANSISTOR 2SC2982C-TE12L
Q2	8-729-106-60	s	TRANSISTOR 2SB1115A
Q3	8-729-020-93	s	TRANSISTOR 2SC2982C-TE12L
Q4	8-729-106-60	s	TRANSISTOR 2SB1115A
Q201	8-729-029-14	s	TRANSISTOR DTC144EUA-T106
Q202	8-729-110-92	s	TRANSISTOR 2SK425-X13
Q203	8-729-209-07	s	TRANSISTOR 2SC4213-B
Q204	8-729-209-07	s	TRANSISTOR 2SC4213-B
Q205	8-729-209-07	s	TRANSISTOR 2SC4213-B
Q206	8-729-209-07	s	TRANSISTOR 2SC4213-B
Q207	8-729-141-48	s	TRANSISTOR 2SB624-BV345
Q208	8-729-110-94	s	TRANSISTOR 2SK425-X15 (0.2W)
Q209	8-729-110-94	s	TRANSISTOR 2SK425-X15 (0.2W)
Q210	8-729-110-94	s	TRANSISTOR 2SK425-X15 (0.2W)
Q211	8-729-110-94	s	TRANSISTOR 2SK425-X15 (0.2W)
Q212	8-729-209-07	s	TRANSISTOR 2SC4213-B
Q213	8-729-209-07	s	TRANSISTOR 2SC4213-B
Q214	8-729-209-07	s	TRANSISTOR 2SC4213-B
Q215	8-729-209-07	s	TRANSISTOR 2SC4213-B
Q216	8-729-209-07	s	TRANSISTOR 2SC4213-B
Q217	8-729-209-07	s	TRANSISTOR 2SC4213-B
Q218	8-729-209-07	s	TRANSISTOR 2SC4213-B
Q219	8-729-209-07	s	TRANSISTOR 2SC4213-B
R1	1-216-295-91	s	RESISTOR, CHIP 0 (1/10W)
R2	1-216-295-91	s	RESISTOR, CHIP 0 (1/10W)
R3	1-216-295-91	s	RESISTOR, CHIP 0 (1/10W)
R4	1-216-295-91	s	RESISTOR, CHIP 0 (1/10W)
R9	1-216-295-91	s	RESISTOR, CHIP 0 (1/10W)
R11	1-216-295-91	s	RESISTOR, CHIP 0 (1/10W)
R13	1-216-295-91	s	RESISTOR, CHIP 0 (1/10W)
R15	1-216-295-91	s	RESISTOR, CHIP 0 (1/10W)
R17	1-208-760-11	s	RESISTOR,CHIP 120 1/10W (2012)
R18	1-208-760-11	s	RESISTOR,CHIP 120 1/10W (2012)
R19	1-208-760-11	s	RESISTOR,CHIP 120 1/10W (2012)
R20	1-208-760-11	s	RESISTOR,CHIP 120 1/10W (2012)
R21	1-208-777-11	s	RESISTOR,CHIP 620 1/10W (2012)
R22	1-208-777-11	s	RESISTOR,CHIP 620 1/10W (2012)
R23	1-208-777-11	s	RESISTOR,CHIP 620 1/10W (2012)
R24	1-208-777-11	s	RESISTOR,CHIP 620 1/10W (2012)
R25	1-208-800-11	s	RESISTOR,CHIP 5.6K 1/10W(2012)

(CP-342A BOARD(DSR-2000(J)))

Ref. No. or Q'ty	Part No.	SP	Description
R26	1-208-800-11	s	RESISTOR,CHIP 5.6K 1/10W(2012)
R27	1-208-800-11	s	RESISTOR,CHIP 5.6K 1/10W(2012)
R28	1-208-800-11	s	RESISTOR,CHIP 5.6K 1/10W(2012)
R29	1-208-800-11	s	RESISTOR,CHIP 5.6K 1/10W(2012)
R30	1-208-800-11	s	RESISTOR,CHIP 5.6K 1/10W(2012)
R31	1-208-800-11	s	RESISTOR,CHIP 5.6K 1/10W(2012)
R32	1-208-800-11	s	RESISTOR,CHIP 5.6K 1/10W(2012)
R33	1-216-295-91	s	RESISTOR, CHIP 0 (1/10W)
R34	1-216-295-91	s	RESISTOR, CHIP 0 (1/10W)
R35	1-216-295-91	s	RESISTOR, CHIP 0 (1/10W)
R36	1-216-295-91	s	RESISTOR, CHIP 0 (1/10W)
R37	1-216-295-91	s	RESISTOR, CHIP 0 (1/10W)
R38	1-216-295-91	s	RESISTOR, CHIP 0 (1/10W)
R39	1-216-295-91	s	RESISTOR, CHIP 0 (1/10W)
R40	1-216-295-91	s	RESISTOR, CHIP 0 (1/10W)
R41	1-208-778-11	s	RESISTOR,CHIP 680 1/10W (2012)
R42	1-208-778-11	s	RESISTOR,CHIP 680 1/10W (2012)
R43	1-208-778-11	s	RESISTOR,CHIP 680 1/10W (2012)
R44	1-208-778-11	s	RESISTOR,CHIP 680 1/10W (2012)
R45	1-208-778-11	s	RESISTOR,CHIP 680 1/10W (2012)
R46	1-208-778-11	s	RESISTOR,CHIP 680 1/10W (2012)
R47	1-208-778-11	s	RESISTOR,CHIP 680 1/10W (2012)
R48	1-208-778-11	s	RESISTOR,CHIP 680 1/10W (2012)
R49	1-208-764-11	s	RESISTOR,CHIP 180 1/10W (2012)
R50	1-208-764-11	s	RESISTOR,CHIP 180 1/10W (2012)
R51	1-208-764-11	s	RESISTOR,CHIP 180 1/10W (2012)
R52	1-208-764-11	s	RESISTOR,CHIP 180 1/10W (2012)
R53	1-208-764-11	s	RESISTOR,CHIP 180 1/10W (2012)
R54	1-208-764-11	s	RESISTOR,CHIP 180 1/10W (2012)
R55	1-208-764-11	s	RESISTOR,CHIP 180 1/10W (2012)
R56	1-208-764-11	s	RESISTOR,CHIP 180 1/10W (2012)
R57	1-211-963-11	s	RESISTOR,CHIP 30 1/10W (2012)
R58	1-211-963-11	s	RESISTOR,CHIP 30 1/10W (2012)
R59	1-211-963-11	s	RESISTOR,CHIP 30 1/10W (2012)
R60	1-211-963-11	s	RESISTOR,CHIP 30 1/10W (2012)
R61	1-211-963-11	s	RESISTOR,CHIP 30 1/10W (2012)
R62	1-211-963-11	s	RESISTOR,CHIP 30 1/10W (2012)
R63	1-211-963-11	s	RESISTOR,CHIP 30 1/10W (2012)
R64	1-211-963-11	s	RESISTOR,CHIP 30 1/10W (2012)
R65	1-211-959-11	s	RESISTOR,CHIP 20 1/10W (2125)
R66	1-208-768-11	s	RESISTOR,CHIP 270 1/10W (2012)
R67	1-208-768-11	s	RESISTOR,CHIP 270 1/10W (2012)
R68	1-211-959-11	s	RESISTOR,CHIP 20 1/10W (2125)
R69	1-211-959-11	s	RESISTOR,CHIP 20 1/10W (2125)
R70	1-208-768-11	s	RESISTOR,CHIP 270 1/10W (2012)
R71	1-208-768-11	s	RESISTOR,CHIP 270 1/10W (2012)
R72	1-211-959-11	s	RESISTOR,CHIP 20 1/10W (2125)
R73	1-211-959-11	s	RESISTOR,CHIP 20 1/10W (2125)
R74	1-208-768-11	s	RESISTOR,CHIP 270 1/10W (2012)
R75	1-208-768-11	s	RESISTOR,CHIP 270 1/10W (2012)
R76	1-211-959-11	s	RESISTOR,CHIP 20 1/10W (2125)
R77	1-211-959-11	s	RESISTOR,CHIP 20 1/10W (2125)
R78	1-208-768-11	s	RESISTOR,CHIP 270 1/10W (2012)
R79	1-208-768-11	s	RESISTOR,CHIP 270 1/10W (2012)
R80	1-211-959-11	s	RESISTOR,CHIP 20 1/10W (2125)
R81	1-208-830-11	s	RESISTOR,CHIP 100K 1/10W(2012)
R82	1-208-830-11	s	RESISTOR,CHIP 100K 1/10W(2012)
R83	1-208-830-11	s	RESISTOR,CHIP 100K 1/10W(2012)
R84	1-208-830-11	s	RESISTOR,CHIP 100K 1/10W(2012)

(CP-342A BOARD(DSR-2000(J)))

Ref. No. or Q'ty	Part No.	SP	Description
R85	1-208-796-11	s	RESISTOR,CHIP 3.9K 1/10W(2012)
R86	1-216-063-91	s	RESISTOR,CHIP 3.9K 1/10W(2125)
R87	1-216-063-91	s	RESISTOR,CHIP 3.9K 1/10W(2125)
R88	1-208-796-11	s	RESISTOR,CHIP 3.9K 1/10W(2012)
R89	1-208-818-11	s	RESISTOR,CHIP 33K 1/10W (2012)
R90	1-208-818-11	s	RESISTOR,CHIP 33K 1/10W (2012)
R91	1-208-818-11	s	RESISTOR,CHIP 33K 1/10W (2012)
R92	1-208-818-11	s	RESISTOR,CHIP 33K 1/10W (2012)
R93	1-208-818-11	s	RESISTOR,CHIP 33K 1/10W (2012)
R94	1-208-818-11	s	RESISTOR,CHIP 33K 1/10W (2012)
R95	1-208-818-11	s	RESISTOR,CHIP 33K 1/10W (2012)
R96	1-208-818-11	s	RESISTOR,CHIP 33K 1/10W (2012)
R97	1-208-794-11	s	RESISTOR,CHIP 3.3K 1/10W(2012)
R98	1-208-794-11	s	RESISTOR,CHIP 3.3K 1/10W(2012)
R99	1-208-794-11	s	RESISTOR,CHIP 3.3K 1/10W(2012)
R100	1-208-794-11	s	RESISTOR,CHIP 3.3K 1/10W(2012)
R101	1-208-794-11	s	RESISTOR,CHIP 3.3K 1/10W(2012)
R102	1-208-794-11	s	RESISTOR,CHIP 3.3K 1/10W(2012)
R103	1-208-794-11	s	RESISTOR,CHIP 3.3K 1/10W(2012)
R104	1-208-794-11	s	RESISTOR,CHIP 3.3K 1/10W(2012)
R105	1-216-295-91	s	RESISTOR, CHIP 0 (1/10W)
R106	1-216-295-91	s	RESISTOR, CHIP 0 (1/10W)
R107	1-216-295-91	s	RESISTOR, CHIP 0 (1/10W)
R108	1-216-295-91	s	RESISTOR, CHIP 0 (1/10W)
R109	1-216-295-91	s	RESISTOR, CHIP 0 (1/10W)
R110	1-216-295-91	s	RESISTOR, CHIP 0 (1/10W)
R111	1-216-295-91	s	RESISTOR, CHIP 0 (1/10W)
R112	1-216-295-91	s	RESISTOR, CHIP 0 (1/10W)
R113	1-208-784-11	s	RESISTOR,CHIP 1.2K 1/10W(2012)
R114	1-208-784-11	s	RESISTOR,CHIP 1.2K 1/10W(2012)
R115	1-208-784-11	s	RESISTOR,CHIP 1.2K 1/10W(2012)
R116	1-208-784-11	s	RESISTOR,CHIP 1.2K 1/10W(2012)
R201	1-216-041-00	s	RESISTOR, CHIP 470 1/10W(2012)
R202	1-208-769-11	s	RESISTOR,CHIP 300 1/10W (2012)
R203	1-208-769-11	s	RESISTOR,CHIP 300 1/10W (2012)
R204	1-208-769-11	s	RESISTOR,CHIP 300 1/10W (2012)
R205	1-208-769-11	s	RESISTOR,CHIP 300 1/10W (2012)
R206	1-216-025-91	s	RESISTOR,CHIP 100 1/10W(2125)
R207	1-208-795-11	s	RESISTOR,CHIP 3.6K 1/10W(2125)
R208	1-208-795-11	s	RESISTOR,CHIP 3.6K 1/10W(2125)
R209	1-208-795-11	s	RESISTOR,CHIP 3.6K 1/10W(2125)
R210	1-208-795-11	s	RESISTOR,CHIP 3.6K 1/10W(2125)
R211	1-208-796-11	s	RESISTOR,CHIP 3.9K 1/10W(2012)
R212	1-208-796-11	s	RESISTOR,CHIP 3.9K 1/10W(2012)
R213	1-208-796-11	s	RESISTOR,CHIP 3.9K 1/10W(2012)
R214	1-208-796-11	s	RESISTOR,CHIP 3.9K 1/10W(2012)
R215	1-208-796-11	s	RESISTOR,CHIP 3.9K 1/10W(2012)
R216	1-208-796-11	s	RESISTOR,CHIP 3.9K 1/10W(2012)
R217	1-208-796-11	s	RESISTOR,CHIP 3.9K 1/10W(2012)
R218	1-208-796-11	s	RESISTOR,CHIP 3.9K 1/10W(2012)
R219	1-216-063-91	s	RESISTOR,CHIP 3.9K 1/10W(2125)
R220	1-208-807-11	s	RESISTOR,CHIP 11K 1/10W (2125)
R221	1-208-807-11	s	RESISTOR,CHIP 11K 1/10W (2125)
R222	1-208-807-11	s	RESISTOR,CHIP 11K 1/10W (2125)
R223	1-208-807-11	s	RESISTOR,CHIP 11K 1/10W (2125)
R224	1-208-807-11	s	RESISTOR,CHIP 11K 1/10W (2125)
R225	1-208-807-11	s	RESISTOR,CHIP 11K 1/10W (2125)
R226	1-208-807-11	s	RESISTOR,CHIP 11K 1/10W (2125)
R227	1-208-807-11	s	RESISTOR,CHIP 11K 1/10W (2125)

(CP-342A BOARD(DSR-2000(J)))

Ref. No. or Q'ty	Part No.	SP	Description
R228	1-216-013-00	s	RESISTOR,CHIP 33 1/10W(2012)
R229	1-216-013-00	s	RESISTOR,CHIP 33 1/10W(2012)
R230	1-216-013-00	s	RESISTOR,CHIP 33 1/10W(2012)
R231	1-216-013-00	s	RESISTOR,CHIP 33 1/10W(2012)
R232	1-216-013-00	s	RESISTOR,CHIP 33 1/10W(2012)
R233	1-216-013-00	s	RESISTOR,CHIP 33 1/10W(2012)
R234	1-216-013-00	s	RESISTOR,CHIP 33 1/10W(2012)
R235	1-216-013-00	s	RESISTOR,CHIP 33 1/10W(2012)
R236	1-208-806-11	s	RESISTOR,CHIP 10K 1/10W (2012)
R237	1-208-806-11	s	RESISTOR,CHIP 10K 1/10W (2012)
R238	1-208-806-11	s	RESISTOR,CHIP 10K 1/10W (2012)
R239	1-208-806-11	s	RESISTOR,CHIP 10K 1/10W (2012)
R240	1-208-806-11	s	RESISTOR,CHIP 10K 1/10W (2012)
R241	1-208-806-11	s	RESISTOR,CHIP 10K 1/10W (2012)
R242	1-208-806-11	s	RESISTOR,CHIP 10K 1/10W (2012)
R243	1-208-806-11	s	RESISTOR,CHIP 10K 1/10W (2012)
R245	1-216-295-91	s	RESISTOR, CHIP 0 (1/10W)
R247	1-216-295-91	s	RESISTOR, CHIP 0 (1/10W)
R249	1-216-295-91	s	RESISTOR, CHIP 0 (1/10W)
R251	1-216-295-91	s	RESISTOR, CHIP 0 (1/10W)
R252	1-216-295-91	s	RESISTOR, CHIP 0 (1/10W)
R253	1-216-295-91	s	RESISTOR, CHIP 0 (1/10W)
R254	1-216-295-91	s	RESISTOR, CHIP 0 (1/10W)
R255	1-216-295-91	s	RESISTOR, CHIP 0 (1/10W)
S1	1-572-042-11	s	SWITCH,SLIDE (2-4-3)
S2	1-572-042-11	s	SWITCH,SLIDE (2-4-3)
S3	1-572-042-11	s	SWITCH,SLIDE (2-4-3)
S4	1-572-042-11	s	SWITCH,SLIDE (2-4-3)
S5	1-572-992-11	s	SWITCH, SLIDE (2-2-3)
S6	1-572-992-11	s	SWITCH, SLIDE (2-2-3)
S7	1-572-992-11	s	SWITCH, SLIDE (2-2-3)
S8	1-572-992-11	s	SWITCH, SLIDE (2-2-3)

DPR-136 BOARD(DSR-2000/2000P) SUFFIX -16

Ref. No. or Q'ty	Part No.	SP	Description
1pc	A-8323-474-B	s	MOUNTED CIRCUIT BOARD, DPR-136
C1	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C2	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C3	1-126-394-11	s	CAPACITOR,ELECT 10MF/16V(CHIP)
C4	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C5	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C70	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C71	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C72	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C73	1-126-394-11	s	CAPACITOR,ELECT 10MF/16V(CHIP)
C74	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C75	1-126-394-11	s	CAPACITOR,ELECT 10MF/16V(CHIP)
C76	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C77	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C100	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C101	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C102	1-126-394-11	s	CAPACITOR,ELECT 10MF/16V(CHIP)
C103	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C104	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C105	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C106	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C107	1-126-394-11	s	CAPACITOR,ELECT 10MF/16V(CHIP)
C108	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C109	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C200	1-128-394-11	s	CAPACITOR,ELECT 220MF/10V
C201	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C202	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C203	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C204	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C205	1-126-392-11	s	CAPACITOR,CHIP ELECT100MF/6.3V
C206	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C207	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C208	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C209	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C210	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C211	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C250	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C251	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C252	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C253	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C254	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C255	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C256	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C257	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C258	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C259	1-126-394-11	s	CAPACITOR,ELECT 10MF/16V(CHIP)
C260	1-126-394-11	s	CAPACITOR,ELECT 10MF/16V(CHIP)
C300	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C301	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C302	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C303	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C304	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C305	1-126-394-11	s	CAPACITOR,ELECT 10MF/16V(CHIP)
C306	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C307	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C352	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C353	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C354	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F

(DPR-136 BOARD(DSR-2000/2000P) SUFFIX -16)

Ref. No. or Q'ty	Part No.	SP	Description
C355	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C356	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C357	1-126-394-11	s	CAPACITOR,ELECT 10MF/16V(CHIP)
C358	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C359	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C400	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C401	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C402	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C403	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C404	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C405	1-126-394-11	s	CAPACITOR,ELECT 10MF/16V(CHIP)
C406	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C407	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C408	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C500	1-162-917-11	s	CAPACITOR,CERAMIC 15PF/50V CH
C501	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C502	1-162-917-11	s	CAPACITOR,CERAMIC 15PF/50V CH
C503	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C504	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C505	1-126-394-11	s	CAPACITOR,ELECT 10MF/16V(CHIP)
C506	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C507	1-126-394-11	s	CAPACITOR,ELECT 10MF/16V(CHIP)
C508	1-162-964-11	s	CAPACITOR,CERAMIC 1000PF/50V B
C509	1-162-964-11	s	CAPACITOR,CERAMIC 1000PF/50V B
C510	1-162-964-11	s	CAPACITOR,CERAMIC 1000PF/50V B
C511	1-165-176-11	s	CAPACITOR,CERAMIC 47000PF/16V
C512	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C513	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C514	1-164-505-11	s	CAPACITOR,CHIP CERAMIC 2.2MF
C515	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C516	1-126-394-11	s	CAPACITOR,ELECT 10MF/16V(CHIP)
C517	1-162-927-11	s	CAPACITOR,CERAMIC 100PF/50V CH
C518	1-162-964-11	s	CAPACITOR,CERAMIC 1000PF/50V B
C519	1-162-964-11	s	CAPACITOR,CERAMIC 1000PF/50V B
C520	1-162-964-11	s	CAPACITOR,CERAMIC 1000PF/50V B
C521	1-165-176-11	s	CAPACITOR,CERAMIC 47000PF/16V
C522	1-164-505-11	s	CAPACITOR,CHIP CERAMIC 2.2MF
C523	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C524	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C525	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C526	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C527	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C528	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C529	1-126-394-11	s	CAPACITOR,ELECT 10MF/16V(CHIP)
C530	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C531	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C532	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C533	1-126-394-11	s	CAPACITOR,ELECT 10MF/16V(CHIP)
C534	1-115-156-11	s	CAPACITOR,CERAMIC 1MF/10V(1608
C535	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C536	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C537	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C538	1-162-927-11	s	CAPACITOR,CERAMIC 100PF/50V CH
C539	1-126-394-11	s	CAPACITOR,ELECT 10MF/16V(CHIP)
C540	1-164-217-11	s	CAPACITOR,CERAMIC 150PF/50V CH
C541	1-164-217-11	s	CAPACITOR,CERAMIC 150PF/50V CH
C542	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C543	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C544	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F

(DPR-136 BOARD(DSR-2000/2000P) SUFFIX -16)

Ref. No. or Q'ty	Part No.	SP	Description
C545	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C546	1-126-394-11	s	CAPACITOR,ELECT 10MF/16V(CHIP)
C547	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C548	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C549	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C550	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C551	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C552	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C553	1-126-394-11	s	CAPACITOR,ELECT 10MF/16V(CHIP)
C554	1-126-394-11	s	CAPACITOR,ELECT 10MF/16V(CHIP)
C555	1-115-156-11	s	CAPACITOR,CERAMIC 1MF/10V(1608
C556	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C557	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C558	1-162-927-11	s	CAPACITOR,CERAMIC 100PF/50V CH
C559	1-164-217-11	s	CAPACITOR,CERAMIC 150PF/50V CH
C560	1-164-217-11	s	CAPACITOR,CERAMIC 150PF/50V CH
C561	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C562	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C563	1-162-964-11	s	CAPACITOR,CERAMIC 1000PF/50V B
C564	1-162-927-11	s	CAPACITOR,CERAMIC 100PF/50V CH
C565	1-162-964-11	s	CAPACITOR,CERAMIC 1000PF/50V B
C566	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C567	1-162-964-11	s	CAPACITOR,CERAMIC 1000PF/50V B
C568	1-165-176-11	s	CAPACITOR,CERAMIC 47000PF/16V
C569	1-164-505-11	s	CAPACITOR,CHIP CERAMIC 2.2MF
C570	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C571	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C572	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C573	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C574	1-126-394-11	s	CAPACITOR,ELECT 10MF/16V(CHIP)
C600	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C601	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C602	1-164-230-11	s	CAPACITOR,CERAMIC 220PF/50V
C603	1-164-230-11	s	CAPACITOR,CERAMIC 220PF/50V
C604	1-164-230-11	s	CAPACITOR,CERAMIC 220PF/50V
C605	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C606	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C607	1-164-230-11	s	CAPACITOR,CERAMIC 220PF/50V
C608	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C609	1-126-392-11	s	CAPACITOR,CHIP ELECT100MF/6.3V
C610	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C611	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C612	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C613	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C614	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C615	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C616	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C617	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C618	1-126-394-11	s	CAPACITOR,ELECT 10MF/16V(CHIP)
C619	1-126-392-11	s	CAPACITOR,CHIP ELECT100MF/6.3V
C620	1-126-392-11	s	CAPACITOR,CHIP ELECT100MF/6.3V
C621	1-126-392-11	s	CAPACITOR,CHIP ELECT100MF/6.3V
C622	1-126-392-11	s	CAPACITOR,CHIP ELECT100MF/6.3V
C623	1-126-394-11	s	CAPACITOR,ELECT 10MF/16V(CHIP)
C624	1-126-394-11	s	CAPACITOR,ELECT 10MF/16V(CHIP)
C625	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C626	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C627	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C628	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F

(DPR-136 BOARD(DSR-2000/2000P) SUFFIX -16)

Ref. No. or Q'ty	Part No.	SP	Description
C629	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C630	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C631	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C632	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C633	1-126-394-11	s	CAPACITOR,ELECT 10MF/16V(CHIP)
C634	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C650	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C651	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C652	1-128-394-11	s	CAPACITOR,ELECT 220MF/10V
C653	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C654	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C655	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C656	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C657	1-126-392-11	s	CAPACITOR,CHIP ELECT100MF/6.3V
C658	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C659	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C660	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C661	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C662	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C663	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C700	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C701	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C702	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C703	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C704	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C705	1-126-392-11	s	CAPACITOR,CHIP ELECT100MF/6.3V
C706	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C707	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C708	1-128-394-11	s	CAPACITOR,ELECT 220MF/10V
C709	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C710	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C711	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C712	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C713	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C714	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C715	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C716	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C717	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
CN106	1-778-262-12	o	CONNECTOR, BOARD TO BOARD 148P
CN450	1-778-003-11	o	CONNECTOR, BOARD TO BOARD 80P
CN451	1-778-003-11	o	CONNECTOR, BOARD TO BOARD 80P
CN600	1-580-789-21	o	PIN,CONNECTOR (SMD) 6P
CN601	1-760-388-11	o	CONNECTOR PIN (SMD) 9 PIN
CN602	1-760-388-11	o	CONNECTOR PIN (SMD) 9 PIN
CN603	1-770-677-11	o	CONNECTOR,BOARD TO BOARD 50P
CN604	1-770-677-11	o	CONNECTOR,BOARD TO BOARD 50P
D500	8-719-041-39	s	DIODE KV1470 (5MA)
D501	8-719-027-95	s	DIODE HSM88WK
D502	8-719-041-39	s	DIODE KV1470 (5MA)
D503	8-719-027-95	s	DIODE HSM88WK
D504	8-719-041-39	s	DIODE KV1470 (5MA)
D505	8-719-041-39	s	DIODE KV1470 (5MA)
D508	8-719-041-39	s	DIODE KV1470 (5MA)
D509	8-719-027-95	s	DIODE HSM88WK
IC1	8-759-663-14	s	IC CXD9129AR
IC100	8-759-679-78	s	IC CXD9127R
IC101	8-759-679-78	s	IC CXD9127R
IC250	8-759-549-15	s	IC SN74LV245APWR

(DPR-136 BOARD(DSR-2000/2000P) SUFFIX -16)

Ref. No. or Q'ty	Part No.	SP	Description
IC251	8-759-549-15	s	IC SN74LV245APWR
IC252	8-759-647-49	s	IC AL422B-TEL
IC253	8-759-647-49	s	IC AL422B-TEL
IC254	8-759-490-41	s	IC TC74VHCT541AFT(EL)
IC255	8-759-549-15	s	IC SN74LV245APWR
IC256	8-759-490-41	s	IC TC74VHCT541AFT(EL)
IC257	8-759-549-15	s	IC SN74LV245APWR
IC258	8-759-549-15	s	IC SN74LV245APWR
IC300	8-759-474-69	s	IC UPD82094GD-001-LKL
IC301	8-759-337-30	s	IC UPD482445LGW-B10-E2
IC350	8-759-474-69	s	IC UPD82094GD-001-LKL
IC351	8-759-337-30	s	IC UPD482445LGW-B10-E2
IC400	8-759-474-69	s	IC UPD82094GD-001-LKL
IC401	8-759-337-30	s	IC UPD482445LGW-B10-E2
IC402	8-759-549-15	s	IC SN74LV245APWR
IC500	8-759-549-15	s	IC SN74LV245APWR
IC501	8-759-490-41	s	IC TC74VHCT541AFT(EL)
IC502	8-759-549-15	s	IC SN74LV245APWR
IC503	8-759-490-41	s	IC TC74VHCT541AFT(EL)
IC504	8-759-362-16	s	IC CXD2913AQ
IC505	8-752-378-75	s	IC CXD3106R
IC506	8-729-039-85	s	IC UPC29L05T
IC507	8-759-702-02	s	IC NJM062M
IC508	8-759-362-16	s	IC CXD2913AQ
IC509	8-759-490-41	s	IC TC74VHCT541AFT(EL)
IC510	8-759-490-41	s	IC TC74VHCT541AFT(EL)
IC511	8-729-039-85	s	IC UPC29L05T
IC512	8-759-702-02	s	IC NJM062M
IC513	8-752-378-75	s	IC CXD3106R
IC514	8-759-271-88	s	IC TC7SHU04FU
IC515	8-759-196-96	s	IC TC7SH08FU (TE85R)
IC516	8-759-196-96	s	IC TC7SH08FU (TE85R)
IC517	8-759-549-15	s	IC SN74LV245APWR
IC518	8-759-271-86	s	IC TC7SH04FU
IC519	8-759-546-74	s	IC TC7WH157FU(TE12R)
IC520	8-759-271-86	s	IC TC7SH04FU
IC600	8-759-549-15	s	IC SN74LV245APWR
IC601	8-759-549-15	s	IC SN74LV245APWR
IC602	8-759-549-15	s	IC SN74LV245APWR
IC603	8-759-549-15	s	IC SN74LV245APWR
IC604	8-759-549-15	s	IC SN74LV245APWR
IC605	8-759-549-15	s	IC SN74LV245APWR
IC606	8-759-537-83	s	IC MBM29F400BC-70PFTN
IC607	8-759-655-86	o	IC XC9536VQ44-DSR2000-DPR-V10
IC608	8-759-537-83	s	IC MBM29F400BC-70PFTN
IC609	8-759-655-86	o	IC XC9536VQ44-DSR2000-DPR-V10
IC650	8-759-837-54	s	IC HY57V641620HGT-H
IC700	8-759-549-15	s	IC SN74LV245APWR
IC701	8-759-549-15	s	IC SN74LV245APWR
IC702	8-759-549-15	s	IC SN74LV245APWR
IC703	8-749-017-21	s	IC SI-3025LS-TL
IC705	8-759-837-54	s	IC HY57V641620HGT-H
L1	1-414-398-11	s	INDUCTOR (SMD) 10UH
L70	1-414-398-11	s	INDUCTOR (SMD) 10UH
L71	1-414-398-11	s	INDUCTOR (SMD) 10UH
L100	1-414-398-11	s	INDUCTOR (SMD) 10UH
L101	1-414-398-11	s	INDUCTOR (SMD) 10UH
L200	1-414-398-11	s	INDUCTOR (SMD) 10UH

(DPR-136 BOARD(DSR-2000/2000P) SUFFIX -16)

Ref. No. or Q'ty	Part No.	SP	Description
L250	1-414-398-11	s	INDUCTOR (SMD) 10UH
L251	1-414-398-11	s	INDUCTOR (SMD) 10UH
L300	1-414-398-11	s	INDUCTOR (SMD) 10UH
L350	1-414-398-11	s	INDUCTOR (SMD) 10UH
L400	1-414-398-11	s	INDUCTOR (SMD) 10UH
L500	1-414-398-11	s	INDUCTOR (SMD) 10UH
L501	1-414-398-11	s	INDUCTOR (SMD) 10UH
L502	1-412-182-11	s	MICRO INDUCTOR 5.6UH
L503	1-412-173-11	s	MICRO INDUCTOR 0.82UH
L504	1-414-398-11	s	INDUCTOR (SMD) 10UH
L505	1-414-398-11	s	INDUCTOR (SMD) 10UH
L507	1-412-173-11	s	MICRO INDUCTOR 0.82UH
L508	1-414-398-11	s	INDUCTOR (SMD) 10UH
L509	1-414-398-11	s	INDUCTOR (SMD) 10UH
L600	1-414-398-11	s	INDUCTOR (SMD) 10UH
L601	1-414-398-11	s	INDUCTOR (SMD) 10UH
L602	1-414-398-11	s	INDUCTOR (SMD) 10UH
L650	1-414-398-11	s	INDUCTOR (SMD) 10UH
L700	1-414-398-11	s	INDUCTOR (SMD) 10UH
LV500	1-411-984-11	s	COIL, VARIABLE
LV501	1-411-984-11	s	COIL, VARIABLE
PS600	1-533-282-21	s	CIRCUIT PROTECTOR 2A (3225)
PS601	1-533-282-21	s	CIRCUIT PROTECTOR 2A (3225)
PS602	1-533-282-21	s	CIRCUIT PROTECTOR 2A (3225)
PS603	1-533-282-21	s	CIRCUIT PROTECTOR 2A (3225)
PS604	1-533-282-21	s	CIRCUIT PROTECTOR 2A (3225)
PS605	1-533-282-21	s	CIRCUIT PROTECTOR 2A (3225)
Q600	8-729-117-32	s	TRANSISTOR 2SC4177
Q601	8-729-117-32	s	TRANSISTOR 2SC4177
Q602	8-729-029-14	s	TRANSISTOR DTC144EUA-T106
Q603	8-729-029-14	s	TRANSISTOR DTC144EUA-T106
Q604	8-729-029-14	s	TRANSISTOR DTC144EUA-T106
Q605	8-729-029-14	s	TRANSISTOR DTC144EUA-T106
Q606	8-729-029-14	s	TRANSISTOR DTC144EUA-T106
Q607	8-729-029-14	s	TRANSISTOR DTC144EUA-T106
Q608	8-729-029-14	s	TRANSISTOR DTC144EUA-T106
R1	1-216-801-11	s	RESISTOR,CHIP 22 1/16W (1608)
R2	1-216-801-11	s	RESISTOR,CHIP 22 1/16W (1608)
R3	1-216-801-11	s	RESISTOR,CHIP 22 1/16W (1608)
R4	1-216-801-11	s	RESISTOR,CHIP 22 1/16W (1608)
R5	1-216-801-11	s	RESISTOR,CHIP 22 1/16W (1608)
R6	1-216-801-11	s	RESISTOR,CHIP 22 1/16W (1608)
R7	1-216-809-11	s	RESISTOR,CHIP 100 1/16W 1608
R8	1-216-801-11	s	RESISTOR,CHIP 22 1/16W (1608)
R9	1-216-809-11	s	RESISTOR,CHIP 100 1/16W 1608
R10	1-216-801-11	s	RESISTOR,CHIP 22 1/16W (1608)
R11	1-216-809-11	s	RESISTOR,CHIP 100 1/16W 1608
R12	1-216-809-11	s	RESISTOR,CHIP 100 1/16W 1608
R13	1-216-809-11	s	RESISTOR,CHIP 100 1/16W 1608
R14	1-216-809-11	s	RESISTOR,CHIP 100 1/16W 1608
R15	1-216-809-11	s	RESISTOR,CHIP 100 1/16W 1608
R16	1-216-809-11	s	RESISTOR,CHIP 100 1/16W 1608
R17	1-216-809-11	s	RESISTOR,CHIP 100 1/16W 1608
R18	1-216-809-11	s	RESISTOR,CHIP 100 1/16W 1608
R19	1-216-809-11	s	RESISTOR,CHIP 100 1/16W 1608
R20	1-216-809-11	s	RESISTOR,CHIP 100 1/16W 1608
R21	1-216-809-11	s	RESISTOR,CHIP 100 1/16W 1608

(DPR-136 BOARD(DSR-2000/2000P) SUFFIX -16)

Ref. No. or Q'ty	Part No.	SP	Description
R22	1-216-809-11	s	RESISTOR,CHIP 100 1/16W 1608
R23	1-216-809-11	s	RESISTOR,CHIP 100 1/16W 1608
R24	1-216-809-11	s	RESISTOR,CHIP 100 1/16W 1608
R25	1-216-809-11	s	RESISTOR,CHIP 100 1/16W 1608
R26	1-216-809-11	s	RESISTOR,CHIP 100 1/16W 1608
R27	1-216-809-11	s	RESISTOR,CHIP 100 1/16W 1608
R28	1-216-809-11	s	RESISTOR,CHIP 100 1/16W 1608
R29	1-216-809-11	s	RESISTOR,CHIP 100 1/16W 1608
R30	1-216-809-11	s	RESISTOR,CHIP 100 1/16W 1608
R31	1-216-809-11	s	RESISTOR,CHIP 100 1/16W 1608
R32	1-216-809-11	s	RESISTOR,CHIP 100 1/16W 1608
R33	1-216-809-11	s	RESISTOR,CHIP 100 1/16W 1608
R34	1-216-809-11	s	RESISTOR,CHIP 100 1/16W 1608
R35	1-216-809-11	s	RESISTOR,CHIP 100 1/16W 1608
R36	1-216-809-11	s	RESISTOR,CHIP 100 1/16W 1608
R37	1-216-809-11	s	RESISTOR,CHIP 100 1/16W 1608
R38	1-216-809-11	s	RESISTOR,CHIP 100 1/16W 1608
R39	1-216-845-11	s	RESISTOR,CHIP 100K 1/16W(1608)
R40	1-216-801-11	s	RESISTOR,CHIP 22 1/16W (1608)
R41	1-216-801-11	s	RESISTOR,CHIP 22 1/16W (1608)
R42	1-216-801-11	s	RESISTOR,CHIP 22 1/16W (1608)
R43	1-216-801-11	s	RESISTOR,CHIP 22 1/16W (1608)
R44	1-216-801-11	s	RESISTOR,CHIP 22 1/16W (1608)
R45	1-216-801-11	s	RESISTOR,CHIP 22 1/16W (1608)
R46	1-216-801-11	s	RESISTOR,CHIP 22 1/16W (1608)
R47	1-216-801-11	s	RESISTOR,CHIP 22 1/16W (1608)
R48	1-216-801-11	s	RESISTOR,CHIP 22 1/16W (1608)
R49	1-216-801-11	s	RESISTOR,CHIP 22 1/16W (1608)
R50	1-216-801-11	s	RESISTOR,CHIP 22 1/16W (1608)
R51	1-216-801-11	s	RESISTOR,CHIP 22 1/16W (1608)
R52	1-216-801-11	s	RESISTOR,CHIP 22 1/16W (1608)
R53	1-216-801-11	s	RESISTOR,CHIP 22 1/16W (1608)
R54	1-216-801-11	s	RESISTOR,CHIP 22 1/16W (1608)
R55	1-216-801-11	s	RESISTOR,CHIP 22 1/16W (1608)
R56	1-216-801-11	s	RESISTOR,CHIP 22 1/16W (1608)
R57	1-216-801-11	s	RESISTOR,CHIP 22 1/16W (1608)
R58	1-216-809-11	s	RESISTOR,CHIP 100 1/16W 1608
R59	1-216-809-11	s	RESISTOR,CHIP 100 1/16W 1608
R60	1-216-809-11	s	RESISTOR,CHIP 100 1/16W 1608
R61	1-216-809-11	s	RESISTOR,CHIP 100 1/16W 1608
R62	1-216-809-11	s	RESISTOR,CHIP 100 1/16W 1608
R70	1-216-809-11	s	RESISTOR,CHIP 100 1/16W 1608
R71	1-216-809-11	s	RESISTOR,CHIP 100 1/16W 1608
R72	1-216-864-11	s	CONDUCTOR, CHIP (1608)
R73	1-216-864-11	s	CONDUCTOR, CHIP (1608)
R100	1-216-845-11	s	RESISTOR,CHIP 100K 1/16W(1608)
R101	1-216-845-11	s	RESISTOR,CHIP 100K 1/16W(1608)
R155	1-216-864-11	s	CONDUCTOR, CHIP (1608)
R172	1-216-845-11	s	RESISTOR,CHIP 100K 1/16W(1608)
R173	1-216-845-11	s	RESISTOR,CHIP 100K 1/16W(1608)
R200	1-216-809-11	s	RESISTOR,CHIP 100 1/16W 1608
R201	1-216-809-11	s	RESISTOR,CHIP 100 1/16W 1608
R202	1-216-809-11	s	RESISTOR,CHIP 100 1/16W 1608
R203	1-216-809-11	s	RESISTOR,CHIP 100 1/16W 1608
R204	1-216-809-11	s	RESISTOR,CHIP 100 1/16W 1608
R205	1-216-809-11	s	RESISTOR,CHIP 100 1/16W 1608
R206	1-216-809-11	s	RESISTOR,CHIP 100 1/16W 1608
R207	1-216-833-11	s	RESISTOR,CHIP 10K 1/16W (1608)
R208	1-216-864-11	s	CONDUCTOR, CHIP (1608)

(DPR-136 BOARD(DSR-2000/2000P) SUFFIX -16)

Ref. No. or Q'ty	Part No.	SP	Description
R209	1-216-864-11	s	CONDUCTOR, CHIP (1608)
R210	1-216-864-11	s	CONDUCTOR, CHIP (1608)
R212	1-216-845-11	s	RESISTOR,CHIP 100K 1/16W(1608)
R213	1-216-845-11	s	RESISTOR,CHIP 100K 1/16W(1608)
R214	1-216-845-11	s	RESISTOR,CHIP 100K 1/16W(1608)
R215	1-216-845-11	s	RESISTOR,CHIP 100K 1/16W(1608)
R250	1-216-809-11	s	RESISTOR,CHIP 100 1/16W 1608
R251	1-216-809-11	s	RESISTOR,CHIP 100 1/16W 1608
R252	1-216-809-11	s	RESISTOR,CHIP 100 1/16W 1608
R253	1-216-809-11	s	RESISTOR,CHIP 100 1/16W 1608
R254	1-216-809-11	s	RESISTOR,CHIP 100 1/16W 1608
R255	1-216-809-11	s	RESISTOR,CHIP 100 1/16W 1608
R256	1-216-809-11	s	RESISTOR,CHIP 100 1/16W 1608
R257	1-216-809-11	s	RESISTOR,CHIP 100 1/16W 1608
R258	1-216-809-11	s	RESISTOR,CHIP 100 1/16W 1608
R259	1-216-809-11	s	RESISTOR,CHIP 100 1/16W 1608
R260	1-216-833-11	s	RESISTOR,CHIP 10K 1/16W (1608)
R261	1-216-809-11	s	RESISTOR,CHIP 100 1/16W 1608
R262	1-216-809-11	s	RESISTOR,CHIP 100 1/16W 1608
R263	1-216-809-11	s	RESISTOR,CHIP 100 1/16W 1608
R264	1-216-809-11	s	RESISTOR,CHIP 100 1/16W 1608
R265	1-216-809-11	s	RESISTOR,CHIP 100 1/16W 1608
R266	1-216-809-11	s	RESISTOR,CHIP 100 1/16W 1608
R267	1-216-809-11	s	RESISTOR,CHIP 100 1/16W 1608
R268	1-216-809-11	s	RESISTOR,CHIP 100 1/16W 1608
R269	1-216-809-11	s	RESISTOR,CHIP 100 1/16W 1608
R270	1-216-809-11	s	RESISTOR,CHIP 100 1/16W 1608
R271	1-216-809-11	s	RESISTOR,CHIP 100 1/16W 1608
R272	1-216-809-11	s	RESISTOR,CHIP 100 1/16W 1608
R273	1-216-809-11	s	RESISTOR,CHIP 100 1/16W 1608
R274	1-216-809-11	s	RESISTOR,CHIP 100 1/16W 1608
R275	1-216-864-11	s	CONDUCTOR, CHIP (1608)
R276	1-216-864-11	s	CONDUCTOR, CHIP (1608)
R277	1-216-805-11	s	RESISTOR,CHIP 47 1/16W 1608
R278	1-216-801-11	s	RESISTOR,CHIP 22 1/16W (1608)
R279	1-216-801-11	s	RESISTOR,CHIP 22 1/16W (1608)
R280	1-216-801-11	s	RESISTOR,CHIP 22 1/16W (1608)
R281	1-216-801-11	s	RESISTOR,CHIP 22 1/16W (1608)
R282	1-216-801-11	s	RESISTOR,CHIP 22 1/16W (1608)
R283	1-216-801-11	s	RESISTOR,CHIP 22 1/16W (1608)
R284	1-216-801-11	s	RESISTOR,CHIP 22 1/16W (1608)
R285	1-216-801-11	s	RESISTOR,CHIP 22 1/16W (1608)
R286	1-216-801-11	s	RESISTOR,CHIP 22 1/16W (1608)
R287	1-216-801-11	s	RESISTOR,CHIP 22 1/16W (1608)
R288	1-216-801-11	s	RESISTOR,CHIP 22 1/16W (1608)
R289	1-216-864-11	s	CONDUCTOR, CHIP (1608)
R290	1-216-864-11	s	CONDUCTOR, CHIP (1608)
R300	1-216-809-11	s	RESISTOR,CHIP 100 1/16W 1608
R301	1-216-809-11	s	RESISTOR,CHIP 100 1/16W 1608
R302	1-216-809-11	s	RESISTOR,CHIP 100 1/16W 1608
R303	1-216-864-11	s	CONDUCTOR, CHIP (1608)
R304	1-216-845-11	s	RESISTOR,CHIP 100K 1/16W(1608)
R305	1-216-845-11	s	RESISTOR,CHIP 100K 1/16W(1608)
R306	1-216-864-11	s	CONDUCTOR, CHIP (1608)
R307	1-216-809-11	s	RESISTOR,CHIP 100 1/16W 1608
R308	1-216-809-11	s	RESISTOR,CHIP 100 1/16W 1608
R309	1-216-809-11	s	RESISTOR,CHIP 100 1/16W 1608
R310	1-216-809-11	s	RESISTOR,CHIP 100 1/16W 1608
R311	1-216-809-11	s	RESISTOR,CHIP 100 1/16W 1608

(DPR-136 BOARD(DSR-2000/2000P) SUFFIX -16)

Ref. No. or Q'ty	Part No.	SP	Description
R312	1-216-809-11	s	RESISTOR,CHIP 100 1/16W 1608
R350	1-216-809-11	s	RESISTOR,CHIP 100 1/16W 1608
R351	1-216-809-11	s	RESISTOR,CHIP 100 1/16W 1608
R352	1-216-809-11	s	RESISTOR,CHIP 100 1/16W 1608
R353	1-216-801-11	s	RESISTOR,CHIP 22 1/16W (1608)
R354	1-216-801-11	s	RESISTOR,CHIP 22 1/16W (1608)
R355	1-216-801-11	s	RESISTOR,CHIP 22 1/16W (1608)
R356	1-216-801-11	s	RESISTOR,CHIP 22 1/16W (1608)
R357	1-216-801-11	s	RESISTOR,CHIP 22 1/16W (1608)
R358	1-216-801-11	s	RESISTOR,CHIP 22 1/16W (1608)
R359	1-216-801-11	s	RESISTOR,CHIP 22 1/16W (1608)
R360	1-216-801-11	s	RESISTOR,CHIP 22 1/16W (1608)
R361	1-216-801-11	s	RESISTOR,CHIP 22 1/16W (1608)
R362	1-216-801-11	s	RESISTOR,CHIP 22 1/16W (1608)
R363	1-216-801-11	s	RESISTOR,CHIP 22 1/16W (1608)
R364	1-216-809-11	s	RESISTOR,CHIP 100 1/16W 1608
R365	1-216-809-11	s	RESISTOR,CHIP 100 1/16W 1608
R366	1-216-809-11	s	RESISTOR,CHIP 100 1/16W 1608
R367	1-216-845-11	s	RESISTOR,CHIP 100K 1/16W(1608)
R368	1-216-845-11	s	RESISTOR,CHIP 100K 1/16W(1608)
R369	1-216-864-11	s	CONDUCTOR, CHIP (1608)
R400	1-216-845-11	s	RESISTOR,CHIP 100K 1/16W(1608)
R401	1-216-845-11	s	RESISTOR,CHIP 100K 1/16W(1608)
R402	1-216-864-11	s	CONDUCTOR, CHIP (1608)
R404	1-216-809-11	s	RESISTOR,CHIP 100 1/16W 1608
R405	1-216-809-11	s	RESISTOR,CHIP 100 1/16W 1608
R406	1-216-864-11	s	CONDUCTOR, CHIP (1608)
R407	1-216-864-11	s	CONDUCTOR, CHIP (1608)
R408	1-216-864-11	s	CONDUCTOR, CHIP (1608)
R411	1-216-864-11	s	CONDUCTOR, CHIP (1608)
R412	1-216-864-11	s	CONDUCTOR, CHIP (1608)
R413	1-216-864-11	s	CONDUCTOR, CHIP (1608)
R454	1-216-864-11	s	CONDUCTOR, CHIP (1608)
R460	1-216-845-11	s	RESISTOR,CHIP 100K 1/16W(1608)
R461	1-216-845-11	s	RESISTOR,CHIP 100K 1/16W(1608)
R501	1-216-864-11	s	CONDUCTOR, CHIP (1608)
R502	1-216-833-11	s	RESISTOR,CHIP 10K 1/16W (1608)
R503	1-216-833-11	s	RESISTOR,CHIP 10K 1/16W (1608)
R504	1-216-829-11	s	RESISTOR,CHIP 4.7K 1/16W(1608)
R505	1-216-805-11	s	RESISTOR,CHIP 47 1/16W 1608
R506	1-216-815-11	s	RESISTOR,CHIP 330 1/16W 1608
R507	1-216-833-11	s	RESISTOR,CHIP 10K 1/16W (1608)
R508	1-216-833-11	s	RESISTOR,CHIP 10K 1/16W (1608)
R509	1-216-829-11	s	RESISTOR,CHIP 4.7K 1/16W(1608)
R510	1-216-805-11	s	RESISTOR,CHIP 47 1/16W 1608
R511	1-216-864-11	s	CONDUCTOR, CHIP (1608)
R512	1-216-845-11	s	RESISTOR,CHIP 100K 1/16W(1608)
R513	1-216-817-11	s	RESISTOR,CHIP 470 1/16W 1608
R514	1-216-845-11	s	RESISTOR,CHIP 100K 1/16W(1608)
R515	1-216-864-11	s	CONDUCTOR, CHIP (1608)
R516	1-216-853-11	s	RESISTOR,CHIP 470K 1/16W(1608)
R517	1-216-838-11	s	RESISTOR CHIP 27K 1/16W(1608)
R518	1-216-839-11	s	RESISTOR,CHIP 33K 1/16W 1608
R519	1-216-841-11	s	RESISTOR, CHIP 47K 1/16W 1608
R520	1-216-864-11	s	CONDUCTOR, CHIP (1608)
R521	1-216-841-11	s	RESISTOR, CHIP 47K 1/16W 1608
R522	1-216-841-11	s	RESISTOR, CHIP 47K 1/16W 1608
R524	1-216-835-11	s	RESISTOR,CHIP 15K 1/16W
R525	1-216-841-11	s	RESISTOR, CHIP 47K 1/16W 1608

(DPR-136 BOARD(DSR-2000/2000P) SUFFIX -16)

Ref. No. or Q'ty	Part No.	SP	Description
R526	1-216-809-11	s	RESISTOR,CHIP 100 1/16W 1608
R527	1-216-809-11	s	RESISTOR,CHIP 100 1/16W 1608
R528	1-216-809-11	s	RESISTOR,CHIP 100 1/16W 1608
R529	1-216-853-11	s	RESISTOR,CHIP 470K 1/16W(1608)
R530	1-216-838-11	s	RESISTOR CHIP 27K 1/16W(1608)
R531	1-216-839-11	s	RESISTOR,CHIP 33K 1/16W 1608
R532	1-216-841-11	s	RESISTOR, CHIP 47K 1/16W 1608
R533	1-216-864-11	s	CONDUCTOR, CHIP (1608)
R534	1-216-841-11	s	RESISTOR, CHIP 47K 1/16W 1608
R535	1-216-841-11	s	RESISTOR, CHIP 47K 1/16W 1608
R537	1-216-835-11	s	RESISTOR,CHIP 15K 1/16W
R538	1-216-841-11	s	RESISTOR, CHIP 47K 1/16W 1608
R539	1-216-864-11	s	CONDUCTOR, CHIP (1608)
R540	1-216-864-11	s	CONDUCTOR, CHIP (1608)
R541	1-216-864-11	s	CONDUCTOR, CHIP (1608)
R543	1-216-864-11	s	CONDUCTOR, CHIP (1608)
R544	1-216-833-11	s	RESISTOR,CHIP 10K 1/16W (1608)
R545	1-216-833-11	s	RESISTOR,CHIP 10K 1/16W (1608)
R546	1-216-829-11	s	RESISTOR,CHIP 4.7K 1/16W(1608)
R547	1-216-805-11	s	RESISTOR,CHIP 47 1/16W 1608
R548	1-216-817-11	s	RESISTOR,CHIP 470 1/16W 1608
R549	1-216-845-11	s	RESISTOR,CHIP 100K 1/16W(1608)
R550	1-216-864-11	s	CONDUCTOR, CHIP (1608)
R551	1-216-845-11	s	RESISTOR,CHIP 100K 1/16W(1608)
R552	1-216-864-11	s	CONDUCTOR, CHIP (1608)
R553	1-216-809-11	s	RESISTOR,CHIP 100 1/16W 1608
R554	1-216-809-11	s	RESISTOR,CHIP 100 1/16W 1608
R555	1-216-857-11	s	RESISTOR,CHIP 1M 1/16W(1608)
R556	1-216-809-11	s	RESISTOR,CHIP 100 1/16W 1608
R558	1-216-864-11	s	CONDUCTOR, CHIP (1608)
R559	1-216-857-11	s	RESISTOR,CHIP 1M 1/16W(1608)
R560	1-216-857-11	s	RESISTOR,CHIP 1M 1/16W(1608)
R600	1-216-809-11	s	RESISTOR,CHIP 100 1/16W 1608
R601	1-216-809-11	s	RESISTOR,CHIP 100 1/16W 1608
R602	1-216-833-11	s	RESISTOR,CHIP 10K 1/16W (1608)
R603	1-216-845-11	s	RESISTOR,CHIP 100K 1/16W(1608)
R604	1-216-833-11	s	RESISTOR,CHIP 10K 1/16W (1608)
R605	1-216-833-11	s	RESISTOR,CHIP 10K 1/16W (1608)
R606	1-216-845-11	s	RESISTOR,CHIP 100K 1/16W(1608)
R607	1-216-833-11	s	RESISTOR,CHIP 10K 1/16W (1608)
R608	1-216-833-11	s	RESISTOR,CHIP 10K 1/16W (1608)
R609	1-216-833-11	s	RESISTOR,CHIP 10K 1/16W (1608)
R610	1-216-845-11	s	RESISTOR,CHIP 100K 1/16W(1608)
R611	1-216-845-11	s	RESISTOR,CHIP 100K 1/16W(1608)
R612	1-216-833-11	s	RESISTOR,CHIP 10K 1/16W (1608)
R613	1-216-833-11	s	RESISTOR,CHIP 10K 1/16W (1608)
R614	1-216-833-11	s	RESISTOR,CHIP 10K 1/16W (1608)
R615	1-216-833-11	s	RESISTOR,CHIP 10K 1/16W (1608)
R616	1-216-833-11	s	RESISTOR,CHIP 10K 1/16W (1608)
R617	1-216-833-11	s	RESISTOR,CHIP 10K 1/16W (1608)
R618	1-216-833-11	s	RESISTOR,CHIP 10K 1/16W (1608)
R619	1-216-833-11	s	RESISTOR,CHIP 10K 1/16W (1608)
R650	1-216-864-11	s	CONDUCTOR, CHIP (1608)
R651	1-216-864-11	s	CONDUCTOR, CHIP (1608)
R652	1-216-833-11	s	RESISTOR,CHIP 10K 1/16W (1608)
R653	1-216-845-11	s	RESISTOR,CHIP 100K 1/16W(1608)
R654	1-216-864-11	s	CONDUCTOR, CHIP (1608)
R655	1-216-864-11	s	CONDUCTOR, CHIP (1608)
R656	1-216-864-11	s	CONDUCTOR, CHIP (1608)

(DPR-136 BOARD(DSR-2000/2000P) SUFFIX -16)

Ref. No. or Q'ty	Part No.	SP	Description
R657	1-216-864-11	s	CONDUCTOR, CHIP (1608)
R700	1-216-809-11	s	RESISTOR,CHIP 100 1/16W 1608
R701	1-216-801-11	s	RESISTOR,CHIP 22 1/16W (1608)
R702	1-216-801-11	s	RESISTOR,CHIP 22 1/16W (1608)
R703	1-216-801-11	s	RESISTOR,CHIP 22 1/16W (1608)
R704	1-216-801-11	s	RESISTOR,CHIP 22 1/16W (1608)
R705	1-216-801-11	s	RESISTOR,CHIP 22 1/16W (1608)
R706	1-216-801-11	s	RESISTOR,CHIP 22 1/16W (1608)
R707	1-216-801-11	s	RESISTOR,CHIP 22 1/16W (1608)
R708	1-216-801-11	s	RESISTOR,CHIP 22 1/16W (1608)
R709	1-216-801-11	s	RESISTOR,CHIP 22 1/16W (1608)
R710	1-216-801-11	s	RESISTOR,CHIP 22 1/16W (1608)
R711	1-216-801-11	s	RESISTOR,CHIP 22 1/16W (1608)
R712	1-216-845-11	s	RESISTOR,CHIP 100K 1/16W(1608)
R713	1-216-833-11	s	RESISTOR,CHIP 10K 1/16W (1608)
R714	1-216-864-11	s	CONDUCTOR, CHIP (1608)
R715	1-216-864-11	s	CONDUCTOR, CHIP (1608)
R716	1-216-864-11	s	CONDUCTOR, CHIP (1608)
R800	1-216-809-11	s	RESISTOR,CHIP 100 1/16W 1608
R801	1-216-809-11	s	RESISTOR,CHIP 100 1/16W 1608
R802	1-216-809-11	s	RESISTOR,CHIP 100 1/16W 1608
R803	1-216-809-11	s	RESISTOR,CHIP 100 1/16W 1608
R804	1-216-809-11	s	RESISTOR,CHIP 100 1/16W 1608
R805	1-216-809-11	s	RESISTOR,CHIP 100 1/16W 1608
R806	1-216-809-11	s	RESISTOR,CHIP 100 1/16W 1608
R807	1-216-809-11	s	RESISTOR,CHIP 100 1/16W 1608
R808	1-216-809-11	s	RESISTOR,CHIP 100 1/16W 1608
R809	1-216-809-11	s	RESISTOR,CHIP 100 1/16W 1608
R810	1-216-809-11	s	RESISTOR,CHIP 100 1/16W 1608
R811	1-216-809-11	s	RESISTOR,CHIP 100 1/16W 1608
R812	1-216-809-11	s	RESISTOR,CHIP 100 1/16W 1608
R813	1-216-809-11	s	RESISTOR,CHIP 100 1/16W 1608
R814	1-216-809-11	s	RESISTOR,CHIP 100 1/16W 1608
R815	1-216-809-11	s	RESISTOR,CHIP 100 1/16W 1608
R816	1-216-809-11	s	RESISTOR,CHIP 100 1/16W 1608
R817	1-216-809-11	s	RESISTOR,CHIP 100 1/16W 1608
R818	1-216-809-11	s	RESISTOR,CHIP 100 1/16W 1608
R819	1-216-809-11	s	RESISTOR,CHIP 100 1/16W 1608
R820	1-216-809-11	s	RESISTOR,CHIP 100 1/16W 1608
R821	1-216-809-11	s	RESISTOR,CHIP 100 1/16W 1608
R822	1-216-809-11	s	RESISTOR,CHIP 100 1/16W 1608
R823	1-216-809-11	s	RESISTOR,CHIP 100 1/16W 1608
R824	1-216-809-11	s	RESISTOR,CHIP 100 1/16W 1608
R825	1-216-809-11	s	RESISTOR,CHIP 100 1/16W 1608
R826	1-216-809-11	s	RESISTOR,CHIP 100 1/16W 1608
R827	1-216-809-11	s	RESISTOR,CHIP 100 1/16W 1608
R828	1-216-809-11	s	RESISTOR,CHIP 100 1/16W 1608
R829	1-216-809-11	s	RESISTOR,CHIP 100 1/16W 1608
R830	1-216-809-11	s	RESISTOR,CHIP 100 1/16W 1608
R831	1-216-809-11	s	RESISTOR,CHIP 100 1/16W 1608
R832	1-216-833-11	s	RESISTOR,CHIP 10K 1/16W (1608)
R833	1-216-809-11	s	RESISTOR,CHIP 100 1/16W 1608
R834	1-216-809-11	s	RESISTOR,CHIP 100 1/16W 1608
R835	1-216-809-11	s	RESISTOR,CHIP 100 1/16W 1608
R836	1-216-809-11	s	RESISTOR,CHIP 100 1/16W 1608
R837	1-216-809-11	s	RESISTOR,CHIP 100 1/16W 1608
R838	1-216-809-11	s	RESISTOR,CHIP 100 1/16W 1608
R839	1-216-809-11	s	RESISTOR,CHIP 100 1/16W 1608
R840	1-216-809-11	s	RESISTOR,CHIP 100 1/16W 1608

(DPR-136 BOARD(DSR-2000/2000P) SUFFIX -16)

Ref. No. or Q'ty	Part No.	SP	Description
R841	1-216-809-11	s	RESISTOR,CHIP 100 1/16W 1608
R842	1-216-809-11	s	RESISTOR,CHIP 100 1/16W 1608
R843	1-216-809-11	s	RESISTOR,CHIP 100 1/16W 1608
R844	1-216-801-11	s	RESISTOR,CHIP 22 1/16W (1608)
R845	1-216-801-11	s	RESISTOR,CHIP 22 1/16W (1608)
R847	1-216-801-11	s	RESISTOR,CHIP 22 1/16W (1608)
R848	1-216-801-11	s	RESISTOR,CHIP 22 1/16W (1608)
R849	1-216-801-11	s	RESISTOR,CHIP 22 1/16W (1608)
R850	1-216-801-11	s	RESISTOR,CHIP 22 1/16W (1608)
R851	1-216-801-11	s	RESISTOR,CHIP 22 1/16W (1608)
R852	1-216-801-11	s	RESISTOR,CHIP 22 1/16W (1608)
R853	1-216-801-11	s	RESISTOR,CHIP 22 1/16W (1608)
R854	1-216-801-11	s	RESISTOR,CHIP 22 1/16W (1608)
R855	1-216-864-11	s	CONDUCTOR, CHIP (1608)
X500	1-767-449-11	s	VIBRATOR, CRYSTAL

DPR-136 BOARD(DSR-2000/2000P) SUFFIX -11 through -14

---

*1: Board No. suffix 12
*2: Board No. suffix 12 - 13
*3: Board No. suffix 13
*4: Board No. suffix 13 -
*5: Board No. suffix 14 -

*a: Lot No. 907 - 910
*b: Lot No. 911 -
*c: Lot No. 0C3 -

Ref. No. or Q'ty	Part No.	SP	Description
1pc	A-8323-474-A	s	MOUNTED CIRCUIT BOARD, DPR-136
9pcs	4-360-293-00	o	SPACER,BOSS
18pcs	7-682-547-04	s	SCREW +B3X6(EP-FE/CU,NI,CR)
1pc	3-179-084-01	s	LEVER(R),PRINTED C,BOARD
1pc	3-179-085-01	s	LEVER(L),PRINTED C.BOARD
C1	1-163-038-91	s	CAPACITOR, CERAMIC 0.1MF/25V
C2	1-163-038-91	s	CAPACITOR, CERAMIC 0.1MF/25V
C3	1-126-394-11	s	CAPACITOR,ELECT 10MF/16V(CHIP)
C4	1-163-038-91	s	CAPACITOR, CERAMIC 0.1MF/25V
C5	1-163-038-91	s	CAPACITOR, CERAMIC 0.1MF/25V
C6	1-163-038-91	s	CAPACITOR, CERAMIC 0.1MF/25V
C7	1-163-038-91	s	CAPACITOR, CERAMIC 0.1MF/25V
C8	1-163-038-91	s	CAPACITOR, CERAMIC 0.1MF/25V
C70	1-163-038-91	s	CAPACITOR, CERAMIC 0.1MF/25V
C71	1-163-038-91	s	CAPACITOR, CERAMIC 0.1MF/25V
C72	1-163-038-91	s	CAPACITOR, CERAMIC 0.1MF/25V
C73	1-126-394-11	s	CAPACITOR,ELECT 10MF/16V(CHIP)
C74	1-163-038-91	s	CAPACITOR, CERAMIC 0.1MF/25V
C75	1-126-394-11	s	CAPACITOR,ELECT 10MF/16V(CHIP)
C76	1-163-038-91	s	CAPACITOR, CERAMIC 0.1MF/25V
C77	1-163-038-91	s	CAPACITOR, CERAMIC 0.1MF/25V
C100	1-163-038-91	s	CAPACITOR, CERAMIC 0.1MF/25V
C101	1-163-038-91	s	CAPACITOR, CERAMIC 0.1MF/25V
C102	1-126-394-11	s	CAPACITOR,ELECT 10MF/16V(CHIP)
C103	1-163-038-91	s	CAPACITOR, CERAMIC 0.1MF/25V
C104	1-163-038-91	s	CAPACITOR, CERAMIC 0.1MF/25V
C105	1-163-038-91	s	CAPACITOR, CERAMIC 0.1MF/25V
C106	1-163-038-91	s	CAPACITOR, CERAMIC 0.1MF/25V
C107	1-126-394-11	s	CAPACITOR,ELECT 10MF/16V(CHIP)
C108	1-163-038-91	s	CAPACITOR, CERAMIC 0.1MF/25V
C109	1-163-038-91	s	CAPACITOR, CERAMIC 0.1MF/25V
C200	1-163-038-91	s	CAPACITOR, CERAMIC 0.1MF/25V
C201	1-163-038-91	s	CAPACITOR, CERAMIC 0.1MF/25V
C202	1-163-038-91	s	CAPACITOR, CERAMIC 0.1MF/25V
C203	1-163-038-91	s	CAPACITOR, CERAMIC 0.1MF/25V
C204	1-163-038-91	s	CAPACITOR, CERAMIC 0.1MF/25V
C205	1-163-038-91	s	CAPACITOR, CERAMIC 0.1MF/25V
C206	1-163-038-91	s	CAPACITOR, CERAMIC 0.1MF/25V
C207	1-163-038-91	s	CAPACITOR, CERAMIC 0.1MF/25V
C208	1-163-038-91	s	CAPACITOR, CERAMIC 0.1MF/25V
C209	1-163-038-91	s	CAPACITOR, CERAMIC 0.1MF/25V
C210	1-163-038-91	s	CAPACITOR, CERAMIC 0.1MF/25V
C211	1-163-038-91	s	CAPACITOR, CERAMIC 0.1MF/25V
C212	1-163-038-91	s	CAPACITOR, CERAMIC 0.1MF/25V
C213	1-163-038-91	s	CAPACITOR, CERAMIC 0.1MF/25V
C214	1-163-038-91	s	CAPACITOR, CERAMIC 0.1MF/25V
C215	1-163-038-91	s	CAPACITOR, CERAMIC 0.1MF/25V
C216	1-163-038-91	s	CAPACITOR, CERAMIC 0.1MF/25V
C217	1-126-394-11	s	CAPACITOR,ELECT 10MF/16V(CHIP)
C250	1-163-038-91	s	CAPACITOR, CERAMIC 0.1MF/25V

(DPR-136 BOARD(DSR-2000/2000P) SUFFIX -11 through -14)

Ref. No. or Q'ty	Part No.	SP	Description
C251	1-163-038-91	s	CAPACITOR, CERAMIC 0.1MF/25V
C252	1-163-038-91	s	CAPACITOR, CERAMIC 0.1MF/25V
C253	1-163-038-91	s	CAPACITOR, CERAMIC 0.1MF/25V
C254	1-163-038-91	s	CAPACITOR, CERAMIC 0.1MF/25V
C255	1-163-038-91	s	CAPACITOR, CERAMIC 0.1MF/25V
C256	1-163-038-91	s	CAPACITOR, CERAMIC 0.1MF/25V
C257	1-126-394-11	s	CAPACITOR,ELECT 10MF/16V(CHIP)
C258	1-163-038-91	s	CAPACITOR, CERAMIC 0.1MF/25V
C259	1-163-038-91	s	CAPACITOR, CERAMIC 0.1MF/25V
C260	1-163-038-91	s	CAPACITOR, CERAMIC 0.1MF/25V
C261	1-163-038-91	s	CAPACITOR, CERAMIC 0.1MF/25V
C262	1-163-038-91	s	CAPACITOR, CERAMIC 0.1MF/25V
C263	1-163-038-91	s	CAPACITOR, CERAMIC 0.1MF/25V
C264	1-126-394-11	s	CAPACITOR,ELECT 10MF/16V(CHIP)
C265	1-163-038-91	s	CAPACITOR, CERAMIC 0.1MF/25V
C266	1-163-038-91	s	CAPACITOR, CERAMIC 0.1MF/25V
C267	1-163-038-91	s	CAPACITOR, CERAMIC 0.1MF/25V
C268	1-163-038-91	s	CAPACITOR, CERAMIC 0.1MF/25V
C269	1-163-038-91	s	CAPACITOR, CERAMIC 0.1MF/25V
C270	1-163-038-91	s	CAPACITOR, CERAMIC 0.1MF/25V
C271	1-126-394-11	s	CAPACITOR,ELECT 10MF/16V(CHIP)
C300	1-163-038-91	s	CAPACITOR, CERAMIC 0.1MF/25V
C301	1-163-038-91	s	CAPACITOR, CERAMIC 0.1MF/25V
C302	1-163-038-91	s	CAPACITOR, CERAMIC 0.1MF/25V
C303	1-163-038-91	s	CAPACITOR, CERAMIC 0.1MF/25V
C304	1-163-038-91	s	CAPACITOR, CERAMIC 0.1MF/25V
C305	1-126-394-11	s	CAPACITOR,ELECT 10MF/16V(CHIP)
C306	1-163-038-91	s	CAPACITOR, CERAMIC 0.1MF/25V
C307	1-163-038-91	s	CAPACITOR, CERAMIC 0.1MF/25V
C350	1-163-038-91	s	CAPACITOR, CERAMIC 0.1MF/25V
C351	1-163-038-91	s	CAPACITOR, CERAMIC 0.1MF/25V
C352	1-163-038-91	s	CAPACITOR, CERAMIC 0.1MF/25V
C353	1-163-038-91	s	CAPACITOR, CERAMIC 0.1MF/25V
C354	1-163-038-91	s	CAPACITOR, CERAMIC 0.1MF/25V
C355	1-163-038-91	s	CAPACITOR, CERAMIC 0.1MF/25V
C356	1-163-038-91	s	CAPACITOR, CERAMIC 0.1MF/25V
C357	1-126-394-11	s	CAPACITOR,ELECT 10MF/16V(CHIP)
C358	1-163-038-91	s	CAPACITOR, CERAMIC 0.1MF/25V
C359	1-163-038-91	s	CAPACITOR, CERAMIC 0.1MF/25V
C400	1-163-038-91	s	CAPACITOR, CERAMIC 0.1MF/25V
C401	1-163-038-91	s	CAPACITOR, CERAMIC 0.1MF/25V
C402	1-163-038-91	s	CAPACITOR, CERAMIC 0.1MF/25V
C403	1-163-038-91	s	CAPACITOR, CERAMIC 0.1MF/25V
C404	1-163-038-91	s	CAPACITOR, CERAMIC 0.1MF/25V
C405	1-126-394-11	s	CAPACITOR,ELECT 10MF/16V(CHIP)
C406	1-163-038-91	s	CAPACITOR, CERAMIC 0.1MF/25V
C407	1-163-038-91	s	CAPACITOR, CERAMIC 0.1MF/25V
C408 *4	1-163-038-91	s	CAPACITOR, CERAMIC 0.1MF/25V
C450	1-163-038-91	s	CAPACITOR, CERAMIC 0.1MF/25V
C451	1-163-038-91	s	CAPACITOR, CERAMIC 0.1MF/25V
C452	1-163-038-91	s	CAPACITOR, CERAMIC 0.1MF/25V
C453	1-163-038-91	s	CAPACITOR, CERAMIC 0.1MF/25V
C454	1-163-038-91	s	CAPACITOR, CERAMIC 0.1MF/25V
C455	1-163-038-91	s	CAPACITOR, CERAMIC 0.1MF/25V
C456	1-163-038-91	s	CAPACITOR, CERAMIC 0.1MF/25V
C457	1-163-038-91	s	CAPACITOR, CERAMIC 0.1MF/25V
C458	1-163-038-91	s	CAPACITOR, CERAMIC 0.1MF/25V
C459	1-163-038-91	s	CAPACITOR, CERAMIC 0.1MF/25V
C460	1-163-038-91	s	CAPACITOR, CERAMIC 0.1MF/25V

(DPR-136 BOARD(DSR-2000/2000P) SUFFIX -11 through -14)

Ref. No. or Q'ty	Part No.	SP	Description
C461	1-163-038-91	s	CAPACITOR, CERAMIC 0.1MF/25V
C462	1-163-038-91	s	CAPACITOR, CERAMIC 0.1MF/25V
C463	1-163-038-91	s	CAPACITOR, CERAMIC 0.1MF/25V
C464	1-163-038-91	s	CAPACITOR, CERAMIC 0.1MF/25V
C465	1-163-038-91	s	CAPACITOR, CERAMIC 0.1MF/25V
C466	1-163-038-91	s	CAPACITOR, CERAMIC 0.1MF/25V
C467	1-163-038-91	s	CAPACITOR, CERAMIC 0.1MF/25V
C468	1-163-038-91	s	CAPACITOR, CERAMIC 0.1MF/25V
C469	1-163-038-91	s	CAPACITOR, CERAMIC 0.1MF/25V
C470	1-163-038-91	s	CAPACITOR, CERAMIC 0.1MF/25V
C471	1-163-038-91	s	CAPACITOR, CERAMIC 0.1MF/25V
C472	1-163-038-91	s	CAPACITOR, CERAMIC 0.1MF/25V
C473	1-126-392-11	s	CAPACITOR,CHIP ELECT100MF/6.3V
C474	1-163-038-91	s	CAPACITOR, CERAMIC 0.1MF/25V
C475	1-163-038-91	s	CAPACITOR, CERAMIC 0.1MF/25V
C500	1-163-038-91	s	CAPACITOR, CERAMIC 0.1MF/25V
C501	1-163-038-91	s	CAPACITOR, CERAMIC 0.1MF/25V
C502	1-163-038-91	s	CAPACITOR, CERAMIC 0.1MF/25V
C503	1-163-009-11	s	CAPACITOR,CERAMIC 1000PF/50V
C504	1-163-009-11	s	CAPACITOR,CERAMIC 1000PF/50V
C505	1-163-038-91	s	CAPACITOR, CERAMIC 0.1MF/25V
C506	1-163-009-11	s	CAPACITOR,CERAMIC 1000PF/50V
C507	1-104-760-11	s	CAPACITOR CERAMIC 0.047MF/50V
C508	1-164-505-11	s	CAPACITOR,CHIP CERAMIC 2.2MF
C509	1-163-009-11	s	CAPACITOR,CERAMIC 1000PF/50V
C510	1-163-009-11	s	CAPACITOR,CERAMIC 1000PF/50V
C511	1-163-009-11	s	CAPACITOR,CERAMIC 1000PF/50V
C512	1-104-760-11	s	CAPACITOR CERAMIC 0.047MF/50V
C513	1-164-505-11	s	CAPACITOR,CHIP CERAMIC 2.2MF
C514	*4 1-163-038-91	s	CAPACITOR, CERAMIC 0.1MF/25V
C515	1-163-038-91	s	CAPACITOR, CERAMIC 0.1MF/25V
C516	1-163-038-91	s	CAPACITOR, CERAMIC 0.1MF/25V
C517	1-163-038-91	s	CAPACITOR, CERAMIC 0.1MF/25V
C518	1-163-038-91	s	CAPACITOR, CERAMIC 0.1MF/25V
C519	1-163-038-91	s	CAPACITOR, CERAMIC 0.1MF/25V
C520	1-163-038-91	s	CAPACITOR, CERAMIC 0.1MF/25V
C521	1-126-394-11	s	CAPACITOR,ELECT 10MF/16V(CHIP)
C522	1-164-346-11	s	CAPACITOR CHIP CERAMIC 1MF/16V
C523	1-163-038-91	s	CAPACITOR, CERAMIC 0.1MF/25V
C524	1-163-038-91	s	CAPACITOR, CERAMIC 0.1MF/25V
C525	1-163-251-11	s	CAPACITOR CERAMIC 100PF/50V
C526	1-163-255-91	s	CAPACITOR,CHIP CERAMIC 150PF
C527	1-163-255-91	s	CAPACITOR,CHIP CERAMIC 150PF
C528	1-163-038-91	s	CAPACITOR, CERAMIC 0.1MF/25V
C529	1-163-038-91	s	CAPACITOR, CERAMIC 0.1MF/25V
C530	1-163-038-91	s	CAPACITOR, CERAMIC 0.1MF/25V
C531	1-163-038-91	s	CAPACITOR, CERAMIC 0.1MF/25V
C532	1-163-038-91	s	CAPACITOR, CERAMIC 0.1MF/25V
C533	1-163-038-91	s	CAPACITOR, CERAMIC 0.1MF/25V
C534	1-163-038-91	s	CAPACITOR, CERAMIC 0.1MF/25V
C535	1-163-038-91	s	CAPACITOR, CERAMIC 0.1MF/25V
C536	1-163-038-91	s	CAPACITOR, CERAMIC 0.1MF/25V
C537	1-163-038-91	s	CAPACITOR, CERAMIC 0.1MF/25V
C538	1-163-038-91	s	CAPACITOR, CERAMIC 0.1MF/25V
C539	1-163-038-91	s	CAPACITOR, CERAMIC 0.1MF/25V
C540	1-163-038-91	s	CAPACITOR, CERAMIC 0.1MF/25V
C541	1-163-038-91	s	CAPACITOR, CERAMIC 0.1MF/25V
C542	1-126-394-11	s	CAPACITOR,ELECT 10MF/16V(CHIP)
C543	1-164-346-11	s	CAPACITOR CHIP CERAMIC 1MF/16V

(DPR-136 BOARD(DSR-2000/2000P) SUFFIX -11 through -14)

Ref. No. or Q'ty	Part No.	SP	Description
C544	1-163-038-91	s	CAPACITOR, CERAMIC 0.1MF/25V
C545	1-163-038-91	s	CAPACITOR, CERAMIC 0.1MF/25V
C546	1-163-251-11	s	CAPACITOR CERAMIC 100PF/50V
C547	1-163-255-91	s	CAPACITOR,CHIP CERAMIC 150PF
C548	1-163-255-91	s	CAPACITOR,CHIP CERAMIC 150PF
C549	1-163-038-91	s	CAPACITOR, CERAMIC 0.1MF/25V
C550	1-163-038-91	s	CAPACITOR, CERAMIC 0.1MF/25V
C551	*1 1-163-009-11	s	CAPACITOR,CERAMIC 1000PF/50V
C552	*1 1-163-009-11	s	CAPACITOR,CERAMIC 1000PF/50V
C553	*1 1-163-009-11	s	CAPACITOR,CERAMIC 1000PF/50V
C554	*1 1-104-760-11	s	CAPACITOR CERAMIC 0.047MF/50V
C555	*1 1-164-505-11	s	CAPACITOR,CHIP CERAMIC 2.2MF
C556	1-163-009-11	s	CAPACITOR,CERAMIC 1000PF/50V
C557	1-163-009-11	s	CAPACITOR,CERAMIC 1000PF/50V
C558	1-163-009-11	s	CAPACITOR,CERAMIC 1000PF/50V
C559	1-104-760-11	s	CAPACITOR CERAMIC 0.047MF/50V
C560	1-164-505-11	s	CAPACITOR,CHIP CERAMIC 2.2MF
C562	1-163-038-91	s	CAPACITOR, CERAMIC 0.1MF/25V
C563	1-163-038-91	s	CAPACITOR, CERAMIC 0.1MF/25V
C564	1-163-038-91	s	CAPACITOR, CERAMIC 0.1MF/25V
C565	1-163-038-91	s	CAPACITOR, CERAMIC 0.1MF/25V
C566	1-163-231-11	s	CAPACITOR,CHIP CERAMIC15PF/50V
C567	1-163-231-11	s	CAPACITOR,CHIP CERAMIC15PF/50V
C568	1-163-038-91	s	CAPACITOR, CERAMIC 0.1MF/25V
C569	1-126-394-11	s	CAPACITOR,ELECT 10MF/16V(CHIP)
C570	1-163-038-91	s	CAPACITOR, CERAMIC 0.1MF/25V
C571	1-163-038-91	s	CAPACITOR, CERAMIC 0.1MF/25V
C572	1-163-259-91	s	CAPACITOR,CHIP CERAMIC 220PF
C573	1-163-259-91	s	CAPACITOR,CHIP CERAMIC 220PF
C574	1-163-259-91	s	CAPACITOR,CHIP CERAMIC 220PF
C575	1-163-038-91	s	CAPACITOR, CERAMIC 0.1MF/25V
C576	1-163-038-91	s	CAPACITOR, CERAMIC 0.1MF/25V
C577	1-163-259-91	s	CAPACITOR,CHIP CERAMIC 220PF
C578	1-163-038-91	s	CAPACITOR, CERAMIC 0.1MF/25V
C579	1-163-038-91	s	CAPACITOR, CERAMIC 0.1MF/25V
C580	1-163-038-91	s	CAPACITOR, CERAMIC 0.1MF/25V
C581	1-126-392-11	s	CAPACITOR,CHIP ELECT100MF/6.3V
C582	1-126-392-11	s	CAPACITOR,CHIP ELECT100MF/6.3V
C583	1-126-392-11	s	CAPACITOR,CHIP ELECT100MF/6.3V
C584	1-126-392-11	s	CAPACITOR,CHIP ELECT100MF/6.3V
C585	1-126-394-11	s	CAPACITOR,ELECT 10MF/16V(CHIP)
C586	1-126-394-11	s	CAPACITOR,ELECT 10MF/16V(CHIP)
C587	1-163-038-91	s	CAPACITOR, CERAMIC 0.1MF/25V
C588	1-163-038-91	s	CAPACITOR, CERAMIC 0.1MF/25V
C589	1-163-038-91	s	CAPACITOR, CERAMIC 0.1MF/25V
C590	1-163-038-91	s	CAPACITOR, CERAMIC 0.1MF/25V
C591	1-163-038-91	s	CAPACITOR, CERAMIC 0.1MF/25V
C592	1-163-038-91	s	CAPACITOR, CERAMIC 0.1MF/25V
C593	1-163-038-91	s	CAPACITOR, CERAMIC 0.1MF/25V
C594	1-163-038-91	s	CAPACITOR, CERAMIC 0.1MF/25V
C595	1-126-392-11	s	CAPACITOR,CHIP ELECT100MF/6.3V
C596	1-126-394-11	s	CAPACITOR,ELECT 10MF/16V(CHIP)
C600	1-163-038-91	s	CAPACITOR, CERAMIC 0.1MF/25V
C601	1-163-038-91	s	CAPACITOR, CERAMIC 0.1MF/25V
C602	1-163-038-91	s	CAPACITOR, CERAMIC 0.1MF/25V
C603	1-163-038-91	s	CAPACITOR, CERAMIC 0.1MF/25V
C604	1-163-038-91	s	CAPACITOR, CERAMIC 0.1MF/25V
C605	1-163-038-91	s	CAPACITOR, CERAMIC 0.1MF/25V
C606	1-163-038-91	s	CAPACITOR, CERAMIC 0.1MF/25V

(DPR-136 BOARD(DSR-2000/2000P) SUFFIX -11 through -14)

Ref. No. or Q'ty	Part No.	SP	Description
C607	1-163-038-91	s	CAPACITOR, CERAMIC 0.1MF/25V
C608	1-163-038-91	s	CAPACITOR, CERAMIC 0.1MF/25V
C609	1-126-394-11	s	CAPACITOR,ELECT 10MF/16V(CHIP)
C610	1-163-038-91	s	CAPACITOR, CERAMIC 0.1MF/25V
C611	1-163-038-91	s	CAPACITOR, CERAMIC 0.1MF/25V
C612	1-163-038-91	s	CAPACITOR, CERAMIC 0.1MF/25V
C613	1-163-038-91	s	CAPACITOR, CERAMIC 0.1MF/25V
C614	1-163-038-91	s	CAPACITOR, CERAMIC 0.1MF/25V
C615	1-163-038-91	s	CAPACITOR, CERAMIC 0.1MF/25V
C616	1-163-038-91	s	CAPACITOR, CERAMIC 0.1MF/25V
C617	1-163-038-91	s	CAPACITOR, CERAMIC 0.1MF/25V
C618	1-163-038-91	s	CAPACITOR, CERAMIC 0.1MF/25V
C619	1-126-394-11	s	CAPACITOR,ELECT 10MF/16V(CHIP)
C650	1-163-038-91	s	CAPACITOR, CERAMIC 0.1MF/25V
C651	1-163-038-91	s	CAPACITOR, CERAMIC 0.1MF/25V
C652	1-163-038-91	s	CAPACITOR, CERAMIC 0.1MF/25V
C653	1-163-038-91	s	CAPACITOR, CERAMIC 0.1MF/25V
C654	1-163-038-91	s	CAPACITOR, CERAMIC 0.1MF/25V
C655	1-163-038-91	s	CAPACITOR, CERAMIC 0.1MF/25V
C656	1-163-038-91	s	CAPACITOR, CERAMIC 0.1MF/25V
C657	1-163-038-91	s	CAPACITOR, CERAMIC 0.1MF/25V
C658	1-163-038-91	s	CAPACITOR, CERAMIC 0.1MF/25V
C659	1-163-038-91	s	CAPACITOR, CERAMIC 0.1MF/25V
C660	1-126-392-11	s	CAPACITOR,CHIP ELECT100MF/6.3V
C661	1-163-038-91	s	CAPACITOR, CERAMIC 0.1MF/25V
C662	1-163-038-91	s	CAPACITOR, CERAMIC 0.1MF/25V
C700	1-163-038-91	s	CAPACITOR, CERAMIC 0.1MF/25V
C701	1-163-038-91	s	CAPACITOR, CERAMIC 0.1MF/25V
C702	1-163-038-91	s	CAPACITOR, CERAMIC 0.1MF/25V
C703	1-126-392-11	s	CAPACITOR,CHIP ELECT100MF/6.3V
C704	1-163-038-91	s	CAPACITOR, CERAMIC 0.1MF/25V
C705	1-163-038-91	s	CAPACITOR, CERAMIC 0.1MF/25V
C706	1-163-038-91	s	CAPACITOR, CERAMIC 0.1MF/25V
C707	1-163-038-91	s	CAPACITOR, CERAMIC 0.1MF/25V
C708	1-163-038-91	s	CAPACITOR, CERAMIC 0.1MF/25V
C709	1-126-392-11	s	CAPACITOR,CHIP ELECT100MF/6.3V
C710	1-163-038-91	s	CAPACITOR, CERAMIC 0.1MF/25V
C711	1-163-038-91	s	CAPACITOR, CERAMIC 0.1MF/25V
C750	1-163-038-91	s	CAPACITOR, CERAMIC 0.1MF/25V
C751	1-163-038-91	s	CAPACITOR, CERAMIC 0.1MF/25V
C752	1-163-038-91	s	CAPACITOR, CERAMIC 0.1MF/25V
C753	1-126-392-11	s	CAPACITOR,CHIP ELECT100MF/6.3V
C754	1-163-038-91	s	CAPACITOR, CERAMIC 0.1MF/25V
C755	1-163-038-91	s	CAPACITOR, CERAMIC 0.1MF/25V
C756	1-163-038-91	s	CAPACITOR, CERAMIC 0.1MF/25V
C757	1-163-038-91	s	CAPACITOR, CERAMIC 0.1MF/25V
C758	1-163-038-91	s	CAPACITOR, CERAMIC 0.1MF/25V
C759	1-126-392-11	s	CAPACITOR,CHIP ELECT100MF/6.3V
C760	1-163-038-91	s	CAPACITOR, CERAMIC 0.1MF/25V
C761	1-163-038-91	s	CAPACITOR, CERAMIC 0.1MF/25V
C850	1-126-394-11	s	CAPACITOR,ELECT 10MF/16V(CHIP)
C851	1-126-394-11	s	CAPACITOR,ELECT 10MF/16V(CHIP)
C852	1-126-394-11	s	CAPACITOR,ELECT 10MF/16V(CHIP)
C853	1-126-394-11	s	CAPACITOR,ELECT 10MF/16V(CHIP)
C854	1-126-394-11	s	CAPACITOR,ELECT 10MF/16V(CHIP)
C855	1-126-394-11	s	CAPACITOR,ELECT 10MF/16V(CHIP)
C856 *4	1-163-251-11	s	CAPACITOR, CERAMIC 100PF/50V
C857 *4	1-163-251-11	s	CAPACITOR, CERAMIC 100PF/50V
C858 *4	1-163-038-91	s	CAPACITOR, CERAMIC 0.1MF/25V

(DPR-136 BOARD(DSR-2000/2000P) SUFFIX -11 through -14)

Ref. No. or Q'ty	Part No.	SP	Description
C859 *5	1-163-038-91	s	CAPACITOR, CERAMIC 0.1MF/25V
C860 *5	1-126-394-11	s	CAPACITOR,ELECT 10MF/16V(CHIP)
C900 *4	1-163-038-91	s	CAPACITOR, CERAMIC 0.1MF/25V
C901 *4	1-163-038-91	s	CAPACITOR, CERAMIC 0.1MF/25V
C902 *4	1-163-038-91	s	CAPACITOR, CERAMIC 0.1MF/25V
C903 *4	1-163-038-91	s	CAPACITOR, CERAMIC 0.1MF/25V
C904 *4	1-163-038-91	s	CAPACITOR, CERAMIC 0.1MF/25V
C905 *4	1-163-038-91	s	CAPACITOR, CERAMIC 0.1MF/25V
CN106	1-778-262-12	o	CONNECTOR, BOARD TO BOARD 148P
CN570	1-580-789-21	o	PIN,CONNECTOR (SMD)
CN571	1-760-388-11	o	CONNECTOR PIN (SMD)
CN572	1-760-388-11	o	CONNECTOR PIN (SMD)
CN573	1-770-677-11	o	CONNECTOR,BOARD TO BOARD 50P
D500	8-719-041-39	s	DIODE KV1470 (5MA)
D501	8-719-027-95	s	DIODE HSM88WK
D502	8-719-041-39	s	DIODE KV1470 (5MA)
D503	8-719-027-95	s	DIODE HSM88WK
D504	8-719-041-39	s	DIODE KV1470 (5MA)
D505	8-719-041-39	s	DIODE KV1470 (5MA)
D506 *1	8-719-041-39	s	DIODE KV1470 (5MA)
D507 *1	8-719-027-95	s	DIODE HSM88WK
D508	8-719-041-39	s	DIODE KV1470 (5MA)
D509	8-719-027-95	s	DIODE HSM88WK
E800 *4	1-535-877-22	o	CHIP, CHECKER
E801 *4	1-535-877-22	o	CHIP, CHECKER
E802 *4	1-535-877-22	o	CHIP, CHECKER
E803 *4	1-535-877-22	o	CHIP, CHECKER
E804 *4	1-535-877-22	o	CHIP, CHECKER
IC1	8-759-663-14	s	IC CXD9129AR
IC100 *5	8-759-679-78	s	IC CXD9127R
IC101 *5	8-759-679-78	s	IC CXD9127R
IC200	8-759-426-26	s	IC CXD8608R
IC201	8-759-426-26	s	IC CXD8608R
IC202	8-759-426-26	s	IC CXD8608R
IC203	8-759-426-26	s	IC CXD8608R
IC250	8-759-548-77	s	IC SN74LV245ANSR
IC251	8-759-567-07	s	IC CXD8763AR
IC252	8-759-548-77	s	IC SN74LV245ANSR
IC253	8-759-422-80	s	IC MN47V77ST1
IC254	8-759-422-80	s	IC MN47V77ST1
IC255	8-759-567-07	s	IC CXD8763AR
IC256	8-759-491-41	s	IC TC74VHCT541AF(EL)
IC257	8-759-548-77	s	IC SN74LV245ANSR
IC258	8-759-491-41	s	IC TC74VHCT541AF(EL)
IC259	8-759-548-77	s	IC SN74LV245ANSR
IC260	8-759-548-77	s	IC SN74LV245ANSR
IC300	8-759-525-63	s	IC UPD82014GD-502-LML
IC301	8-759-433-17	s	IC UPD482445LG4-B10-9MH-E2-HDC
IC350	8-759-525-63	s	IC UPD82014GD-502-LML
IC353	8-759-433-17	s	IC UPD482445LG4-B10-9MH-E2-HDC
IC400	8-759-525-63	s	IC UPD82014GD-502-LML
IC401	8-759-433-17	s	IC UPD482445LG4-B10-9MH-E2-HDC
IC402 *4	8-759-548-77	s	IC SN74LV245ANSR
IC450	8-759-426-26	s	IC CXD8608R
IC451	8-759-548-77	s	IC SN74LV245ANSR
IC452	8-759-548-77	s	IC SN74LV245ANSR
IC453	8-759-426-26	s	IC CXD8608R
IC454	8-759-548-77	s	IC SN74LV245ANSR

(DPR-136 BOARD(DSR-2000/2000P) SUFFIX -11 through -14)

Ref. No. or Q'ty	Part No.	SP	Description
IC455	8-759-548-77	s	IC SN74LV245ANSR
IC456	8-759-426-26	s	IC CXD8608R
IC457	8-759-548-77	s	IC SN74LV245ANSR
IC458	8-759-548-77	s	IC SN74LV245ANSR
IC459	8-759-426-26	s	IC CXD8608R
IC460	8-759-548-77	s	IC SN74LV245ANSR
IC461	8-759-548-77	s	IC SN74LV245ANSR
IC500	8-759-548-77	s	IC SN74LV245ANSR
IC501	8-759-491-41	s	IC TC74VHCT541AF(EL)
IC502	8-759-548-77	s	IC SN74LV245ANSR
IC503	8-759-491-41	s	IC TC74VHCT541AF(EL)
IC504	8-759-362-16	s	IC CXD2913AQ
IC505	8-752-378-75	s	IC CXD3106R
IC506	8-729-039-85	s	IC UPC29L05T
IC507	8-759-702-02	s	IC NJM062M
IC508	8-759-362-16	s	IC CXD2913AQ
IC509	8-759-491-41	s	IC TC74VHCT541AF(EL)
IC510	8-759-491-41	s	IC TC74VHCT541AF(EL)
IC511	8-729-039-85	s	IC UPC29L05T
IC512	8-759-702-02	s	IC NJM062M
IC513	8-752-378-75	s	IC CXD3106R
IC514	8-759-271-88	s	IC TC7SHU04FU
IC515 *4	8-759-196-96	s	IC TC7SH08FU-TE85R
IC516 *4	8-759-196-96	s	IC TC7SH08FU-TE85R
IC517 *5	8-759-548-77	s	IC SN74LV245ANSR
IC570	8-759-548-77	s	IC SN74LV245ANSR
IC571	8-759-548-77	s	IC SN74LV245ANSR
IC572	8-759-548-77	s	IC SN74LV245ANSR
IC573	8-759-548-77	s	IC SN74LV245ANSR
IC574	8-759-548-77	s	IC SN74LV245ANSR
IC575	8-759-548-77	s	IC SN74LV245ANSR
IC576	8-759-548-77	s	IC SN74LV245ANSR
IC577	8-759-537-83	s	IC MBM29F400BC-70PFTN
IC578	8-759-655-86	o	IC XC9536VQ44-DSR2000-DPR-V10
IC600	8-752-379-31	s	IC CXD3107R
IC601	8-752-379-31	s	IC CXD3107R
IC602	8-752-379-31	s	IC CXD3107R
IC603	8-752-379-31	s	IC CXD3107R
IC650	8-759-589-36	s	IC MB81F641642C-103LFN-B
IC651	8-759-548-77	s	IC SN74LV245ANSR
IC652	8-759-548-77	s	IC SN74LV245ANSR
IC653	8-759-548-77	s	IC SN74LV245ANSR
IC654	8-759-589-36	s	IC MB81F641642C-103LFN-B
L1	1-414-398-11	s	INDUCTOR (SMD) 10UH
L70	1-414-398-11	s	INDUCTOR (SMD) 10UH
L71	1-414-398-11	s	INDUCTOR (SMD) 10UH
L100	1-414-398-11	s	INDUCTOR (SMD) 10UH
L101	1-414-398-11	s	INDUCTOR (SMD) 10UH
L200	1-414-398-11	s	INDUCTOR (SMD) 10UH
L250	1-414-398-11	s	INDUCTOR (SMD) 10UH
L251	1-414-398-11	s	INDUCTOR (SMD) 10UH
L252	1-414-398-11	s	INDUCTOR (SMD) 10UH
L300	1-414-398-11	s	INDUCTOR (SMD) 10UH
L350	1-414-398-11	s	INDUCTOR (SMD) 10UH
L400	1-414-398-11	s	INDUCTOR (SMD) 10UH
L450	1-414-398-11	s	INDUCTOR (SMD) 10UH
L500	1-414-398-11	s	INDUCTOR (SMD) 10UH
L501	1-414-398-11	s	INDUCTOR (SMD) 10UH
L502	1-412-182-11	s	MICRO INDUCTOR 5.6UH

(DPR-136 BOARD(DSR-2000/2000P) SUFFIX -11 through -14)

Ref. No. or Q'ty	Part No.	SP	Description
L503	1-412-173-11	s	MICRO INDUCTOR 0.82UH
L504	1-414-398-11	s	INDUCTOR (SMD) 10UH
L505	1-414-398-11	s	INDUCTOR (SMD) 10UH
L506 *1	1-412-182-11	s	MICRO INDUCTOR 5.6UH
L507	1-412-173-11	s	MICRO INDUCTOR 0.82UH
L508	1-414-398-11	s	INDUCTOR (SMD) 10UH
L509	1-414-398-11	s	INDUCTOR (SMD) 10UH
L571	1-414-398-11	s	INDUCTOR (SMD) 10UH
L572	1-414-398-11	s	INDUCTOR (SMD) 10UH
L600	1-414-398-11	s	INDUCTOR (SMD) 10UH
L601	1-414-398-11	s	INDUCTOR (SMD) 10UH
L650	1-414-398-11	s	INDUCTOR (SMD) 10UH
L700	1-414-398-11	s	INDUCTOR (SMD) 10UH
L701	1-414-398-11	s	INDUCTOR (SMD) 10UH
L750	1-414-398-11	s	INDUCTOR (SMD) 10UH
L751	1-414-398-11	s	INDUCTOR (SMD) 10UH
LV500	1-411-984-11	s	COIL, VARIABLE
LV501	1-411-984-11	s	COIL, VARIABLE
PS570 ⚠	1-533-282-21	s	CIRCUIT PROTECTOR 2A (3225)
PS571 ⚠	1-533-282-21	s	CIRCUIT PROTECTOR 2A (3225)
PS572 ⚠	1-533-282-21	s	CIRCUIT PROTECTOR 2A (3225)
PS573 ⚠	1-533-282-21	s	CIRCUIT PROTECTOR 2A (3225)
PS574 ⚠	1-533-282-21	s	CIRCUIT PROTECTOR 2A (3225)
PS575 ⚠	1-533-282-21	s	CIRCUIT PROTECTOR 2A (3225)
Q570	8-729-029-14	s	TRANSISTOR DTC144EUA-T106
Q571	8-729-117-32	s	TRANSISTOR 2SC4177
Q572	8-729-117-32	s	TRANSISTOR 2SC4177
Q573	8-729-029-14	s	TRANSISTOR DTC144EUA-T106
Q574 *2	8-729-029-14	s	TRANSISTOR DTC144EUA-T106
Q575	8-729-029-14	s	TRANSISTOR DTC144EUA-T106
Q576	8-729-029-14	s	TRANSISTOR DTC144EUA-T106
Q577	8-729-029-14	s	TRANSISTOR DTC144EUA-T106
Q578	8-729-029-14	s	TRANSISTOR DTC144EUA-T106
Q579	8-729-029-14	s	TRANSISTOR DTC144EUA-T106
Q580 *2	8-729-029-14	s	TRANSISTOR DTC144EUA-T106
Q581	8-729-029-14	s	TRANSISTOR DTC144EUA-T106
Q582	8-729-029-14	s	TRANSISTOR DTC144EUA-T106
Q583	8-729-029-14	s	TRANSISTOR DTC144EUA-T106
R1	1-216-025-91	s	RESISTOR,CHIP 100 1/10W(2125)
R2	1-216-025-91	s	RESISTOR,CHIP 100 1/10W(2125)
R3	1-216-025-91	s	RESISTOR,CHIP 100 1/10W(2125)
R4	1-216-025-91	s	RESISTOR,CHIP 100 1/10W(2125)
R5	1-216-025-91	s	RESISTOR,CHIP 100 1/10W(2125)
R6	1-216-025-91	s	RESISTOR,CHIP 100 1/10W(2125)
R7	1-216-025-91	s	RESISTOR,CHIP 100 1/10W(2125)
R8	1-216-025-91	s	RESISTOR,CHIP 100 1/10W(2125)
R9	1-216-025-91	s	RESISTOR,CHIP 100 1/10W(2125)
R10	1-216-009-00	s	RESISTOR,CHIP 22 1/10W(2125)
R11	1-216-009-00	s	RESISTOR,CHIP 22 1/10W(2125)
R12	1-216-009-00	s	RESISTOR,CHIP 22 1/10W(2125)
R13	1-216-009-00	s	RESISTOR,CHIP 22 1/10W(2125)
R14	1-216-009-00	s	RESISTOR,CHIP 22 1/10W(2125)
R15	1-216-009-00	s	RESISTOR,CHIP 22 1/10W(2125)
R16	1-216-009-00	s	RESISTOR,CHIP 22 1/10W(2125)
R17	1-216-025-91	s	RESISTOR,CHIP 100 1/10W(2125)
R18	1-216-009-00	s	RESISTOR,CHIP 22 1/10W(2125)

(DPR-136 BOARD(DSR-2000/2000P) SUFFIX -11 through -14)

Ref. No. or Q'ty	Part No.	SP	Description
R19	1-216-025-91	s	RESISTOR,CHIP 100 1/10W(2125)
R20	1-216-025-91	s	RESISTOR,CHIP 100 1/10W(2125)
R21	1-216-025-91	s	RESISTOR,CHIP 100 1/10W(2125)
R22	1-216-025-91	s	RESISTOR,CHIP 100 1/10W(2125)
R23	1-216-025-91	s	RESISTOR,CHIP 100 1/10W(2125)
R24	1-216-025-91	s	RESISTOR,CHIP 100 1/10W(2125)
R25	1-216-025-91	s	RESISTOR,CHIP 100 1/10W(2125)
R26	1-216-025-91	s	RESISTOR,CHIP 100 1/10W(2125)
R27	1-216-025-91	s	RESISTOR,CHIP 100 1/10W(2125)
R28	1-216-025-91	s	RESISTOR,CHIP 100 1/10W(2125)
R29	1-216-025-91	s	RESISTOR,CHIP 100 1/10W(2125)
R30	1-216-025-91	s	RESISTOR,CHIP 100 1/10W(2125)
R31	1-216-025-91	s	RESISTOR,CHIP 100 1/10W(2125)
R32	1-216-025-91	s	RESISTOR,CHIP 100 1/10W(2125)
R33	1-216-025-91	s	RESISTOR,CHIP 100 1/10W(2125)
R34	1-216-025-91	s	RESISTOR,CHIP 100 1/10W(2125)
R35	1-216-025-91	s	RESISTOR,CHIP 100 1/10W(2125)
R36	1-216-025-91	s	RESISTOR,CHIP 100 1/10W(2125)
R37	1-216-009-00	s	RESISTOR,CHIP 22 1/10W(2125)
R38	1-216-025-91	s	RESISTOR,CHIP 100 1/10W(2125)
R39	1-216-025-91	s	RESISTOR,CHIP 100 1/10W(2125)
R40	1-216-097-91	s	RESISTOR,CHIP 100K 1/10W(2012)
R57	1-216-025-91	s	RESISTOR,CHIP 100 1/10W(2125)
R58	1-216-025-91	s	RESISTOR,CHIP 100 1/10W(2125)
R59	1-216-025-91	s	RESISTOR,CHIP 100 1/10W(2125)
R60	1-216-025-91	s	RESISTOR,CHIP 100 1/10W(2125)
R61	1-216-009-00	s	RESISTOR,CHIP 22 1/10W(2125)
R62	1-216-025-91	s	RESISTOR,CHIP 100 1/10W(2125)
R63	1-216-295-91	s	RESISTOR,CHIP 0 (1/10W)
R64	1-216-295-91	s	RESISTOR,CHIP 0 (1/10W)
R65	1-216-295-91	s	RESISTOR,CHIP 0 (1/10W)
R66	1-216-295-91	s	RESISTOR,CHIP 0 (1/10W)
R67	1-216-295-91	s	RESISTOR,CHIP 0 (1/10W)
R68	1-216-295-91	s	RESISTOR,CHIP 0 (1/10W)
R69	1-216-295-91	s	RESISTOR,CHIP 0 (1/10W)
R70	1-216-295-91	s	RESISTOR,CHIP 0 (1/10W)
R71	1-216-295-91	s	RESISTOR,CHIP 0 (1/10W)
R74	1-216-295-91	s	RESISTOR,CHIP 0 (1/10W)
R75	1-216-009-00	s	RESISTOR,CHIP 22 1/10W(2125)
R76	1-216-009-00	s	RESISTOR,CHIP 22 1/10W(2125)
R77	1-216-009-00	s	RESISTOR,CHIP 22 1/10W(2125)
R78	1-216-009-00	s	RESISTOR,CHIP 22 1/10W(2125)
R79	1-216-009-00	s	RESISTOR,CHIP 22 1/10W(2125)
R80	1-216-009-00	s	RESISTOR,CHIP 22 1/10W(2125)
R81	1-216-009-00	s	RESISTOR,CHIP 22 1/10W(2125)
R82	1-216-009-00	s	RESISTOR,CHIP 22 1/10W(2125)
R83	1-216-009-00	s	RESISTOR,CHIP 22 1/10W(2125)
R84	1-216-009-00	s	RESISTOR,CHIP 22 1/10W(2125)
R85	1-216-009-00	s	RESISTOR,CHIP 22 1/10W(2125)
R86	1-216-009-00	s	RESISTOR,CHIP 22 1/10W(2125)
R87	1-216-009-00	s	RESISTOR,CHIP 22 1/10W(2125)
R88	1-216-009-00	s	RESISTOR,CHIP 22 1/10W(2125)
R89	1-216-009-00	s	RESISTOR,CHIP 22 1/10W(2125)
R90	1-216-009-00	s	RESISTOR,CHIP 22 1/10W(2125)
R92	1-216-295-91	s	RESISTOR,CHIP 0 (1/10W)
R93 *4	1-216-295-91	s	RESISTOR,CHIP 0 (1/10W)
R95	1-216-025-91	s	RESISTOR,CHIP 100 1/10W(2125)
R96	1-216-025-91	s	RESISTOR,CHIP 100 1/10W(2125)
R97 *4	1-216-295-91	s	RESISTOR,CHIP 0 (1/10W)

(DPR-136 BOARD(DSR-2000/2000P) SUFFIX -11 through -14)

Ref. No. or Q'ty	Part No.	SP	Description
R98 *4	1-216-295-91	s	RESISTOR,CHIP 0 (1/10W)
R100	1-216-097-91	s	RESISTOR,CHIP 100K 1/10W(2012)
R101	1-216-097-91	s	RESISTOR,CHIP 100K 1/10W(2012)
R102 *3	1-216-017-91	s	RESISTOR,CHIP 47 1/10W(2012)
*1	1-216-009-00	s	RESISTOR,CHIP 22 1/10W(2125)
R103 *2	1-216-009-00	s	RESISTOR,CHIP 22 1/10W(2125)
R104 *2	1-216-295-91	s	RESISTOR,CHIP 0 (1/10W)
R105 *2	1-216-295-91	s	RESISTOR,CHIP 0 (1/10W)
R106 *3	1-216-025-91	s	RESISTOR,CHIP 100 1/10W(2125)
*1	1-216-295-91	s	RESISTOR,CHIP 0 (1/10W)
R107 *2	1-216-295-91	s	RESISTOR,CHIP 0 (1/10W)
R108 *2	1-216-295-91	s	RESISTOR,CHIP 0 (1/10W)
R109 *2	1-216-295-91	s	RESISTOR,CHIP 0 (1/10W)
R150	1-216-295-91	s	RESISTOR,CHIP 0 (1/10W)
R151	1-216-295-91	s	RESISTOR,CHIP 0 (1/10W)
R152	1-216-295-91	s	RESISTOR,CHIP 0 (1/10W)
R153	1-216-295-91	s	RESISTOR,CHIP 0 (1/10W)
R154	1-216-009-00	s	RESISTOR,CHIP 22 1/10W(2125)
R155 *b	1-216-009-00	s	RESISTOR,CHIP 22 1/10W(2125)
*a	1-216-025-91	s	RESISTOR,CHIP 100 1/10W(2125)
R156	1-216-009-00	s	RESISTOR,CHIP 22 1/10W(2125)
R200	1-216-295-91	s	RESISTOR,CHIP 0 (1/10W)
R240	1-216-009-00	s	RESISTOR,CHIP 22 1/10W(2125)
R241	1-216-009-00	s	RESISTOR,CHIP 22 1/10W(2125)
R242	1-216-009-00	s	RESISTOR,CHIP 22 1/10W(2125)
R243	1-216-009-00	s	RESISTOR,CHIP 22 1/10W(2125)
R244	1-216-009-00	s	RESISTOR,CHIP 22 1/10W(2125)
R245	1-216-009-00	s	RESISTOR,CHIP 22 1/10W(2125)
R246	1-216-009-00	s	RESISTOR,CHIP 22 1/10W(2125)
R247	1-216-009-00	s	RESISTOR,CHIP 22 1/10W(2125)
R248	1-216-009-00	s	RESISTOR,CHIP 22 1/10W(2125)
R249 *4	1-216-017-91	s	RESISTOR,CHIP 47 1/10W(2012)
R250	1-216-295-91	s	RESISTOR,CHIP 0 (1/10W)
R251	1-216-295-91	s	RESISTOR,CHIP 0 (1/10W)
R252	1-216-295-91	s	RESISTOR,CHIP 0 (1/10W)
R253	1-216-295-91	s	RESISTOR,CHIP 0 (1/10W)
R254	1-216-295-91	s	RESISTOR,CHIP 0 (1/10W)
R255	1-216-295-91	s	RESISTOR,CHIP 0 (1/10W)
R256	1-216-295-91	s	RESISTOR,CHIP 0 (1/10W)
R257	1-216-295-91	s	RESISTOR,CHIP 0 (1/10W)
R258	1-216-295-91	s	RESISTOR,CHIP 0 (1/10W)
R259	1-216-295-91	s	RESISTOR,CHIP 0 (1/10W)
R260	1-216-295-91	s	RESISTOR,CHIP 0 (1/10W)
R261	1-216-295-91	s	RESISTOR,CHIP 0 (1/10W)
R262	1-216-295-91	s	RESISTOR,CHIP 0 (1/10W)
R263	1-216-295-91	s	RESISTOR,CHIP 0 (1/10W)
R264	1-216-295-91	s	RESISTOR,CHIP 0 (1/10W)
R265	1-216-295-91	s	RESISTOR,CHIP 0 (1/10W)
R266	1-216-025-91	s	RESISTOR,CHIP 100 1/10W(2125)
R267	1-216-025-91	s	RESISTOR,CHIP 100 1/10W(2125)
R268	1-216-025-91	s	RESISTOR,CHIP 100 1/10W(2125)
R269	1-216-097-91	s	RESISTOR,CHIP 100K 1/10W(2012)
R270	1-216-025-91	s	RESISTOR,CHIP 100 1/10W(2125)
R271	1-216-025-91	s	RESISTOR,CHIP 100 1/10W(2125)
R272	1-216-025-91	s	RESISTOR,CHIP 100 1/10W(2125)
R273	1-216-025-91	s	RESISTOR,CHIP 100 1/10W(2125)
R274	1-216-295-91	s	RESISTOR,CHIP 0 (1/10W)
R275	1-216-073-00	s	RESISTOR,CHIP 10K 1/10W(2012)
R276	1-216-025-91	s	RESISTOR,CHIP 100 1/10W(2125)

(DPR-136 BOARD(DSR-2000/2000P) SUFFIX -11 through -14)

Ref. No. or Q'ty	Part No.	SP	Description
R277	1-216-025-91	s	RESISTOR,CHIP 100 1/10W(2125)
R278	1-216-025-91	s	RESISTOR,CHIP 100 1/10W(2125)
R279	1-216-025-91	s	RESISTOR,CHIP 100 1/10W(2125)
R280	1-216-025-91	s	RESISTOR,CHIP 100 1/10W(2125)
R281	1-216-025-91	s	RESISTOR,CHIP 100 1/10W(2125)
R282	1-216-025-91	s	RESISTOR,CHIP 100 1/10W(2125)
R283	1-216-025-91	s	RESISTOR,CHIP 100 1/10W(2125)
R284	1-216-025-91	s	RESISTOR,CHIP 100 1/10W(2125)
R285	1-216-025-91	s	RESISTOR,CHIP 100 1/10W(2125)
R286	1-216-025-91	s	RESISTOR,CHIP 100 1/10W(2125)
R287	1-216-025-91	s	RESISTOR,CHIP 100 1/10W(2125)
R288	1-216-025-91	s	RESISTOR,CHIP 100 1/10W(2125)
R289	1-216-025-91	s	RESISTOR,CHIP 100 1/10W(2125)
R290	1-216-025-91	s	RESISTOR,CHIP 100 1/10W(2125)
R291	1-216-025-91	s	RESISTOR,CHIP 100 1/10W(2125)
R292	1-216-025-91	s	RESISTOR,CHIP 100 1/10W(2125)
R293	1-216-097-91	s	RESISTOR,CHIP 100K 1/10W(2012)
R295	1-216-295-91	s	RESISTOR, CHIP 0 (1/10W)
R297	1-216-295-91	s	RESISTOR, CHIP 0 (1/10W)
R298	1-216-009-00	s	RESISTOR,CHIP 22 1/10W(2125)
R299	1-216-009-00	s	RESISTOR,CHIP 22 1/10W(2125)
R300	1-216-025-91	s	RESISTOR,CHIP 100 1/10W(2125)
R301	1-216-025-91	s	RESISTOR,CHIP 100 1/10W(2125)
R302	1-216-025-91	s	RESISTOR,CHIP 100 1/10W(2125)
R303	1-216-295-91	s	RESISTOR, CHIP 0 (1/10W)
R304	1-216-097-91	s	RESISTOR,CHIP 100K 1/10W(2012)
R305	1-216-097-91	s	RESISTOR,CHIP 100K 1/10W(2012)
R306	1-216-295-91	s	RESISTOR, CHIP 0 (1/10W)
R307	1-216-025-91	s	RESISTOR,CHIP 100 1/10W(2125)
R308	1-216-025-91	s	RESISTOR,CHIP 100 1/10W(2125)
R309	1-216-025-91	s	RESISTOR,CHIP 100 1/10W(2125)
R310	1-216-025-91	s	RESISTOR,CHIP 100 1/10W(2125)
R311	1-216-025-91	s	RESISTOR,CHIP 100 1/10W(2125)
R312	1-216-025-91	s	RESISTOR,CHIP 100 1/10W(2125)
R350	1-216-025-91	s	RESISTOR,CHIP 100 1/10W(2125)
R351	1-216-025-91	s	RESISTOR,CHIP 100 1/10W(2125)
R352	1-216-025-91	s	RESISTOR,CHIP 100 1/10W(2125)
R353	1-216-009-00	s	RESISTOR,CHIP 22 1/10W(2125)
R354	1-216-009-00	s	RESISTOR,CHIP 22 1/10W(2125)
R355	1-216-009-00	s	RESISTOR,CHIP 22 1/10W(2125)
R356	1-216-009-00	s	RESISTOR,CHIP 22 1/10W(2125)
R357	1-216-009-00	s	RESISTOR,CHIP 22 1/10W(2125)
R358	1-216-009-00	s	RESISTOR,CHIP 22 1/10W(2125)
R359	1-216-009-00	s	RESISTOR,CHIP 22 1/10W(2125)
R360	1-216-009-00	s	RESISTOR,CHIP 22 1/10W(2125)
R361	1-216-009-00	s	RESISTOR,CHIP 22 1/10W(2125)
R362	1-216-009-00	s	RESISTOR,CHIP 22 1/10W(2125)
R363	1-216-009-00	s	RESISTOR,CHIP 22 1/10W(2125)
R364	1-216-025-91	s	RESISTOR,CHIP 100 1/10W(2125)
R365	1-216-025-91	s	RESISTOR,CHIP 100 1/10W(2125)
R366	1-216-025-91	s	RESISTOR,CHIP 100 1/10W(2125)
R367	1-216-097-91	s	RESISTOR,CHIP 100K 1/10W(2012)
R368	1-216-097-91	s	RESISTOR,CHIP 100K 1/10W(2012)
R369	1-216-295-91	s	RESISTOR, CHIP 0 (1/10W)
R400	1-216-097-91	s	RESISTOR,CHIP 100K 1/10W(2012)
R401	1-216-097-91	s	RESISTOR,CHIP 100K 1/10W(2012)
R402	1-216-295-91	s	RESISTOR, CHIP 0 (1/10W)
R403	1-216-295-91	s	RESISTOR, CHIP 0 (1/10W)
R404	1-216-025-91	s	RESISTOR,CHIP 100 1/10W(2125)

(DPR-136 BOARD(DSR-2000/2000P) SUFFIX -11 through -14)

Ref. No. or Q'ty	Part No.	SP	Description
R405	1-216-025-91	s	RESISTOR,CHIP 100 1/10W(2125)
R406 *4	1-216-295-91	s	RESISTOR,CHIP 0 (1/10W)
R407 *4	1-216-295-91	s	RESISTOR,CHIP 0 (1/10W)
R408 *3	1-216-295-91	s	RESISTOR,CHIP 0 (1/10W)
R409 *3	1-216-295-91	s	RESISTOR,CHIP 0 (1/10W)
R410 *3	1-216-295-91	s	RESISTOR,CHIP 0 (1/10W)
R411 *4	1-216-295-91	s	RESISTOR,CHIP 0 (1/10W)
R412 *4	1-216-295-91	s	RESISTOR,CHIP 0 (1/10W)
R413 *4	1-216-295-91	s	RESISTOR,CHIP 0 (1/10W)
R450	1-216-295-91	s	RESISTOR,CHIP 0 (1/10W)
R501	1-216-295-91	s	RESISTOR,CHIP 0 (1/10W)
R502	1-216-073-00	s	RESISTOR,CHIP 10K 1/10W(2012)
R503	1-216-073-00	s	RESISTOR,CHIP 10K 1/10W(2012)
R504	1-216-065-91	s	RESISTOR,CHIP 4.7K (2012)
R505	1-216-017-91	s	RESISTOR,CHIP 47 1/10W(2012)
R506	1-216-037-00	s	RESISTOR,CHIP 330 1/10W(2012)
R507	1-216-073-00	s	RESISTOR,CHIP 10K 1/10W(2012)
R508	1-216-073-00	s	RESISTOR,CHIP 10K 1/10W(2012)
R509	1-216-065-91	s	RESISTOR,CHIP 4.7K (2012)
R510	1-216-017-91	s	RESISTOR,CHIP 47 1/10W(2012)
R511	1-216-295-91	s	RESISTOR,CHIP 0 (1/10W)
R512	1-216-097-91	s	RESISTOR,CHIP 100K 1/10W(2012)
R513	1-216-041-00	s	RESISTOR,CHIP 470 1/10W(2012)
R514	1-216-097-91	s	RESISTOR,CHIP 100K 1/10W(2012)
R515 *4	1-216-295-91	s	RESISTOR,CHIP 0 (1/10W)
R516	1-216-089-91	s	RESISTOR, CHIP 47K
R517	1-216-083-00	s	RESISTOR CHIP 27K 1/10W(2012)
R518	1-216-085-00	s	RESISTOR CHIP 33K 1/10W(2012)
R519	1-216-089-91	s	RESISTOR, CHIP 47K
R520	1-216-295-91	s	RESISTOR, CHIP 0 (1/10W)
R521	1-216-065-91	s	RESISTOR,CHIP 4.7K (2012)
R522	1-216-089-91	s	RESISTOR, CHIP 47K
R524	1-216-077-00	s	RESISTOR,CHIP 15K 1/10W(2012)
R525	1-216-089-91	s	RESISTOR, CHIP 47K
R526	1-216-025-91	s	RESISTOR,CHIP 100 1/10W(2125)
R527	1-216-025-91	s	RESISTOR,CHIP 100 1/10W(2125)
R528	1-216-025-91	s	RESISTOR,CHIP 100 1/10W(2125)
R529	1-216-089-91	s	RESISTOR, CHIP 47K
R530	1-216-083-00	s	RESISTOR CHIP 27K 1/10W(2012)
R531	1-216-085-00	s	RESISTOR CHIP 33K 1/10W(2012)
R532	1-216-089-91	s	RESISTOR, CHIP 47K
R533	1-216-295-91	s	RESISTOR, CHIP 0 (1/10W)
R534	1-216-065-91	s	RESISTOR,CHIP 4.7K (2012)
R535	1-216-089-91	s	RESISTOR, CHIP 47K
R537	1-216-077-00	s	RESISTOR,CHIP 15K 1/10W(2012)
R538	1-216-089-91	s	RESISTOR, CHIP 47K
R539 *4	1-216-295-91	s	RESISTOR,CHIP 0 (1/10W)
*1	1-216-073-00	s	RESISTOR,CHIP 10K 1/10W(2012)
R540 *4	1-216-295-91	s	RESISTOR,CHIP 0 (1/10W)
*1	1-216-073-00	s	RESISTOR,CHIP 10K 1/10W(2012)
R541 *1	1-216-065-91	s	RESISTOR,CHIP 4.7K (2012)
R542 *1	1-216-017-91	s	RESISTOR, CHIP 47 1/10W(2012)
R543 *1	1-216-037-00	s	RESISTOR,CHIP 330 1/10W(2012)
R544	1-216-073-00	s	RESISTOR,CHIP 10K 1/10W(2012)
R545	1-216-073-00	s	RESISTOR,CHIP 10K 1/10W(2012)
R546	1-216-065-91	s	RESISTOR,CHIP 4.7K (2012)
R547	1-216-017-91	s	RESISTOR, CHIP 47 1/10W(2012)
R548	1-216-041-00	s	RESISTOR, CHIP 470 1/10W(2012)
R549	1-216-097-91	s	RESISTOR,CHIP 100K 1/10W(2012)

(DPR-136 BOARD(DSR-2000/2000P) SUFFIX -11 through -14)

Ref. No. or Q'ty	Part No.	SP	Description
R550	1-216-295-91	s	RESISTOR, CHIP 0 (1/10W)
R551	1-216-097-91	s	RESISTOR,CHIP 100K 1/10W(2012)
R552 *4	1-216-295-91	s	RESISTOR,CHIP 0 (1/10W)
R553	1-216-025-91	s	RESISTOR,CHIP 100 1/10W(2125)
R554	1-216-025-91	s	RESISTOR,CHIP 100 1/10W(2125)
R555	1-216-121-91	s	RESISTOR CHIP 1M 1/10W(2125)
R556	1-216-025-91	s	RESISTOR,CHIP 100 1/10W(2125)
R558	1-216-295-91	s	RESISTOR, CHIP 0 (1/10W)
R559 *4	1-216-121-91	s	RESISTOR,CHIP 1M 1/10W(2125)
R560 *4	1-216-121-91	s	RESISTOR,CHIP 1M 1/10W(2125)
R570	1-216-097-91	s	RESISTOR,CHIP 100K 1/10W(2012)
R571	1-216-097-91	s	RESISTOR,CHIP 100K 1/10W(2012)
R572	1-216-097-91	s	RESISTOR,CHIP 100K 1/10W(2012)
R573	1-216-097-91	s	RESISTOR,CHIP 100K 1/10W(2012)
R574	1-216-025-91	s	RESISTOR,CHIP 100 1/10W(2125)
R575	1-216-025-91	s	RESISTOR,CHIP 100 1/10W(2125)
R576	1-216-073-00	s	RESISTOR,CHIP 10K 1/10W(2012)
R577 *2	1-216-073-00	s	RESISTOR,CHIP 10K 1/10W(2012)
R578	1-216-073-00	s	RESISTOR,CHIP 10K 1/10W(2012)
R579	1-216-073-00	s	RESISTOR,CHIP 10K 1/10W(2012)
R580	1-216-073-00	s	RESISTOR,CHIP 10K 1/10W(2012)
R581	1-216-073-00	s	RESISTOR,CHIP 10K 1/10W(2012)
R582	1-216-073-00	s	RESISTOR,CHIP 10K 1/10W(2012)
R583 *2	1-216-073-00	s	RESISTOR,CHIP 10K 1/10W(2012)
R584	1-216-073-00	s	RESISTOR,CHIP 10K 1/10W(2012)
R585	1-216-073-00	s	RESISTOR,CHIP 10K 1/10W(2012)
R586	1-216-073-00	s	RESISTOR,CHIP 10K 1/10W(2012)
R587	1-216-073-00	s	RESISTOR,CHIP 10K 1/10W(2012)
R588	1-216-073-00	s	RESISTOR,CHIP 10K 1/10W(2012)
R589	1-216-073-00	s	RESISTOR,CHIP 10K 1/10W(2012)
R590	1-216-073-00	s	RESISTOR,CHIP 10K 1/10W(2012)
R600	1-216-025-91	s	RESISTOR,CHIP 100 1/10W(2125)
R601	1-216-025-91	s	RESISTOR,CHIP 100 1/10W(2125)
R602	1-216-025-91	s	RESISTOR,CHIP 100 1/10W(2125)
R603	1-216-025-91	s	RESISTOR,CHIP 100 1/10W(2125)
R604	1-216-025-91	s	RESISTOR,CHIP 100 1/10W(2125)
R605	1-216-295-91	s	RESISTOR,CHIP 0 (1/10W)
R606	1-216-025-91	s	RESISTOR,CHIP 100 1/10W(2125)
R607	1-216-025-91	s	RESISTOR,CHIP 100 1/10W(2125)
R608	1-216-295-91	s	RESISTOR,CHIP 0 (1/10W)
R609 *4	1-216-295-91	s	RESISTOR,CHIP 0 (1/10W)
R610 *4	1-216-295-91	s	RESISTOR,CHIP 0 (1/10W)
R650	1-216-025-91	s	RESISTOR,CHIP 100 1/10W(2125)
R651	1-216-097-91	s	RESISTOR,CHIP 100K 1/10W(2012)
R652	1-216-009-00	s	RESISTOR,CHIP 22 1/10W(2125)
R653	1-216-009-00	s	RESISTOR,CHIP 22 1/10W(2125)
R654	1-216-009-00	s	RESISTOR,CHIP 22 1/10W(2125)
R655	1-216-009-00	s	RESISTOR,CHIP 22 1/10W(2125)
R656	1-216-009-00	s	RESISTOR,CHIP 22 1/10W(2125)
R657	1-216-009-00	s	RESISTOR,CHIP 22 1/10W(2125)
R658	1-216-009-00	s	RESISTOR,CHIP 22 1/10W(2125)
R659	1-216-009-00	s	RESISTOR,CHIP 22 1/10W(2125)
R660	1-216-009-00	s	RESISTOR,CHIP 22 1/10W(2125)
R661	1-216-009-00	s	RESISTOR,CHIP 22 1/10W(2125)
R662	1-216-009-00	s	RESISTOR,CHIP 22 1/10W(2125)
R663 *1	1-216-295-91	s	RESISTOR,CHIP 0 (1/10W)
R664 *4	1-216-017-91	s	RESISTOR,CHIP 47 1/10W(2012)
*1	1-216-295-91	s	RESISTOR,CHIP 0 (1/10W)
R665 *1	1-216-295-91	s	RESISTOR,CHIP 0 (1/10W)

(DPR-136 BOARD(DSR-2000/2000P) SUFFIX -11 through -14)

Ref. No. or Q'ty	Part No.	SP	Description
R666 *c	1-216-295-91	s	RESISTOR,CHIP 0 (1/10W)
R667 *4	1-216-295-91	s	RESISTOR,CHIP 0 (1/10W)
R669 *4	1-216-295-91	s	RESISTOR,CHIP 0 (1/10W)
R700	1-216-097-91	s	RESISTOR,CHIP 100K 1/10W(2012)
R701 *4	1-216-017-91	s	RESISTOR,CHIP 47 1/10W(2012)
*1	1-216-295-91	s	RESISTOR, CHIP 0 (1/10W)
R702 *1	1-216-295-91	s	RESISTOR, CHIP 0 (1/10W)
R703 *4	1-216-017-91	s	RESISTOR,CHIP 47 1/10W(2012)
*1	1-216-295-91	s	RESISTOR, CHIP 0 (1/10W)
R704 *1	1-216-295-91	s	RESISTOR, CHIP 0 (1/10W)
R750	1-216-097-91	s	RESISTOR,CHIP 100K 1/10W(2012)
R751	1-216-097-91	s	RESISTOR,CHIP 100K 1/10W(2012)
R752	1-216-025-91	s	RESISTOR,CHIP 100 1/10W(2125)
R753 *4	1-216-017-91	s	RESISTOR,CHIP 47 1/10W(2012)
*1	1-216-295-91	s	RESISTOR, CHIP 0 (1/10W)
R754	1-216-295-91	s	RESISTOR, CHIP 0 (1/10W)
R755 *1	1-216-295-91	s	RESISTOR, CHIP 0 (1/10W)
R756	1-216-295-91	s	RESISTOR, CHIP 0 (1/10W)
R757	1-216-295-91	s	RESISTOR, CHIP 0 (1/10W)
R800	1-216-025-91	s	RESISTOR,CHIP 100 1/10W(2125)
R801	1-216-025-91	s	RESISTOR,CHIP 100 1/10W(2125)
R802	1-216-025-91	s	RESISTOR,CHIP 100 1/10W(2125)
R803	1-216-025-91	s	RESISTOR,CHIP 100 1/10W(2125)
R804	1-216-025-91	s	RESISTOR,CHIP 100 1/10W(2125)
R805	1-216-025-91	s	RESISTOR,CHIP 100 1/10W(2125)
R806	1-216-025-91	s	RESISTOR,CHIP 100 1/10W(2125)
R807	1-216-025-91	s	RESISTOR,CHIP 100 1/10W(2125)
R808	1-216-025-91	s	RESISTOR,CHIP 100 1/10W(2125)
R809	1-216-025-91	s	RESISTOR,CHIP 100 1/10W(2125)
R810	1-216-025-91	s	RESISTOR,CHIP 100 1/10W(2125)
R811	1-216-025-91	s	RESISTOR,CHIP 100 1/10W(2125)
R812	1-216-025-91	s	RESISTOR,CHIP 100 1/10W(2125)
R813	1-216-025-91	s	RESISTOR,CHIP 100 1/10W(2125)
R814	1-216-025-91	s	RESISTOR,CHIP 100 1/10W(2125)
R815	1-216-025-91	s	RESISTOR,CHIP 100 1/10W(2125)
R816	1-216-025-91	s	RESISTOR,CHIP 100 1/10W(2125)
R817	1-216-025-91	s	RESISTOR,CHIP 100 1/10W(2125)
R818	1-216-025-91	s	RESISTOR,CHIP 100 1/10W(2125)
R819	1-216-025-91	s	RESISTOR,CHIP 100 1/10W(2125)
R820	1-216-025-91	s	RESISTOR,CHIP 100 1/10W(2125)
R821	1-216-025-91	s	RESISTOR,CHIP 100 1/10W(2125)
R822	1-216-025-91	s	RESISTOR,CHIP 100 1/10W(2125)
R823	1-216-025-91	s	RESISTOR,CHIP 100 1/10W(2125)
R824	1-216-025-91	s	RESISTOR,CHIP 100 1/10W(2125)
R825	1-216-025-91	s	RESISTOR,CHIP 100 1/10W(2125)
R826	1-216-025-91	s	RESISTOR,CHIP 100 1/10W(2125)
R827	1-216-025-91	s	RESISTOR,CHIP 100 1/10W(2125)
R828	1-216-025-91	s	RESISTOR,CHIP 100 1/10W(2125)
R829	1-216-025-91	s	RESISTOR,CHIP 100 1/10W(2125)
R830	1-216-025-91	s	RESISTOR,CHIP 100 1/10W(2125)
R831	1-216-025-91	s	RESISTOR,CHIP 100 1/10W(2125)
R832	1-216-073-00	s	RESISTOR,CHIP 10K 1/10W(2012)
R833	1-216-025-91	s	RESISTOR,CHIP 100 1/10W(2125)
R834	1-216-025-91	s	RESISTOR,CHIP 100 1/10W(2125)
R835	1-216-025-91	s	RESISTOR,CHIP 100 1/10W(2125)
R836	1-216-025-91	s	RESISTOR,CHIP 100 1/10W(2125)
R837	1-216-025-91	s	RESISTOR,CHIP 100 1/10W(2125)
R838	1-216-025-91	s	RESISTOR,CHIP 100 1/10W(2125)
R839	1-216-025-91	s	RESISTOR,CHIP 100 1/10W(2125)

(DPR-136 BOARD(DSR-2000/2000P) SUFFIX -11 through -14)

Ref. No. or Q'ty	Part No.	SP	Description
R840	1-216-025-91	s	RESISTOR,CHIP 100 1/10W(2125)
R841	1-216-025-91	s	RESISTOR,CHIP 100 1/10W(2125)
R842	1-216-025-91	s	RESISTOR,CHIP 100 1/10W(2125)
R843	1-216-025-91	s	RESISTOR,CHIP 100 1/10W(2125)
R844	*5 1-216-009-00	s	RESISTOR,CHIP 22 1/10W(2125)
R845	*5 1-216-009-00	s	RESISTOR,CHIP 22 1/10W(2125)
R846	*5 1-216-009-00	s	RESISTOR,CHIP 22 1/10W(2125)
R847	*5 1-216-009-00	s	RESISTOR,CHIP 22 1/10W(2125)
R848	*5 1-216-009-00	s	RESISTOR,CHIP 22 1/10W(2125)
R849	*5 1-216-009-00	s	RESISTOR,CHIP 22 1/10W(2125)
R850	*5 1-216-009-00	s	RESISTOR,CHIP 22 1/10W(2125)
R851	*5 1-216-009-00	s	RESISTOR,CHIP 22 1/10W(2125)
R852	*5 1-216-009-00	s	RESISTOR,CHIP 22 1/10W(2125)
R853	*5 1-216-009-00	s	RESISTOR,CHIP 22 1/10W(2125)
R854	*5 1-216-009-00	s	RESISTOR,CHIP 22 1/10W(2125)
R855	*5 1-216-295-91	s	RESISTOR,CHIP 0 (1/10W)
R900	*4 1-216-295-91	s	RESISTOR,CHIP 0 (1/10W)
R901	*4 1-216-295-91	s	RESISTOR,CHIP 0 (1/10W)
R902	*4 1-216-295-91	s	RESISTOR,CHIP 0 (1/10W)
R903	*4 1-216-295-91	s	RESISTOR,CHIP 0 (1/10W)
R904	*4 1-216-295-91	s	RESISTOR,CHIP 0 (1/10W)
R905	*4 1-216-295-91	s	RESISTOR,CHIP 0 (1/10W)
R906	*4 1-216-295-91	s	RESISTOR,CHIP 0 (1/10W)
R907	*4 1-216-295-91	s	RESISTOR,CHIP 0 (1/10W)
R908	*4 1-216-295-91	s	RESISTOR,CHIP 0 (1/10W)
R909	*4 1-216-295-91	s	RESISTOR,CHIP 0 (1/10W)
R910	*4 1-216-295-91	s	RESISTOR,CHIP 0 (1/10W)
R911	*4 1-216-295-91	s	RESISTOR,CHIP 0 (1/10W)
R912	*4 1-216-295-91	s	RESISTOR,CHIP 0 (1/10W)
R913	*4 1-216-295-91	s	RESISTOR,CHIP 0 (1/10W)
R914	*4 1-216-295-91	s	RESISTOR,CHIP 0 (1/10W)
R915	*4 1-216-295-91	s	RESISTOR,CHIP 0 (1/10W)
R916	*4 1-216-295-91	s	RESISTOR,CHIP 0 (1/10W)
R917	*4 1-216-295-91	s	RESISTOR,CHIP 0 (1/10W)
R918	*4 1-216-295-91	s	RESISTOR,CHIP 0 (1/10W)
R919	*4 1-216-295-91	s	RESISTOR,CHIP 0 (1/10W)
R920	*4 1-216-295-91	s	RESISTOR,CHIP 0 (1/10W)
R921	*4 1-216-295-91	s	RESISTOR,CHIP 0 (1/10W)
R922	*4 1-216-295-91	s	RESISTOR,CHIP 0 (1/10W)
R923	*4 1-216-295-91	s	RESISTOR,CHIP 0 (1/10W)
X500	1-767-449-11	s	VIBRATOR, CRYSTAL

DU-83 BOARD(DSR-2000/2000P)

Ref. No. or Q'ty	Part No.	SP	Description
C2	1-163-038-91	s	CAPACITOR, CERAMIC 0.1MF/25V
C3	1-163-038-91	s	CAPACITOR, CERAMIC 0.1MF/25V
C4	1-163-038-91	s	CAPACITOR, CERAMIC 0.1MF/25V
C5	1-126-392-11	s	CAPACITOR,CHIP ELECT100MF/6.3V
C6	1-163-038-91	s	CAPACITOR, CERAMIC 0.1MF/25V
C7	1-163-038-91	s	CAPACITOR, CERAMIC 0.1MF/25V
C8	1-163-038-91	s	CAPACITOR, CERAMIC 0.1MF/25V
C9	1-163-038-91	s	CAPACITOR, CERAMIC 0.1MF/25V
C30	1-163-038-91	s	CAPACITOR, CERAMIC 0.1MF/25V
C31	1-163-038-91	s	CAPACITOR, CERAMIC 0.1MF/25V
C32	1-163-038-91	s	CAPACITOR, CERAMIC 0.1MF/25V
C33	1-163-038-91	s	CAPACITOR, CERAMIC 0.1MF/25V
C34	1-126-392-11	s	CAPACITOR,CHIP ELECT100MF/6.3V
C35	1-163-038-91	s	CAPACITOR, CERAMIC 0.1MF/25V
C36	1-163-038-91	s	CAPACITOR, CERAMIC 0.1MF/25V
C37	1-163-038-91	s	CAPACITOR, CERAMIC 0.1MF/25V
C38	1-163-038-91	s	CAPACITOR, CERAMIC 0.1MF/25V
C39	1-163-038-91	s	CAPACITOR, CERAMIC 0.1MF/25V
C40	1-126-392-11	s	CAPACITOR,CHIP ELECT100MF/6.3V
C41	1-163-038-91	s	CAPACITOR, CERAMIC 0.1MF/25V
C42	1-163-038-91	s	CAPACITOR, CERAMIC 0.1MF/25V
C70	1-163-038-91	s	CAPACITOR, CERAMIC 0.1MF/25V
C71	1-163-038-91	s	CAPACITOR, CERAMIC 0.1MF/25V
C72	1-163-038-91	s	CAPACITOR, CERAMIC 0.1MF/25V
C73	1-126-392-11	s	CAPACITOR,CHIP ELECT100MF/6.3V
C74	1-163-038-91	s	CAPACITOR, CERAMIC 0.1MF/25V
C75	1-163-038-91	s	CAPACITOR, CERAMIC 0.1MF/25V
C76	1-163-038-91	s	CAPACITOR, CERAMIC 0.1MF/25V
C77	1-163-038-91	s	CAPACITOR, CERAMIC 0.1MF/25V
C78	1-163-038-91	s	CAPACITOR, CERAMIC 0.1MF/25V
C79	1-126-392-11	s	CAPACITOR,CHIP ELECT100MF/6.3V
C80	1-163-038-91	s	CAPACITOR, CERAMIC 0.1MF/25V
C81	1-163-038-91	s	CAPACITOR, CERAMIC 0.1MF/25V
C90	1-163-038-91	s	CAPACITOR, CERAMIC 0.1MF/25V
C91	1-163-038-91	s	CAPACITOR, CERAMIC 0.1MF/25V
C92	1-163-038-91	s	CAPACITOR, CERAMIC 0.1MF/25V
C93	1-126-392-11	s	CAPACITOR,CHIP ELECT100MF/6.3V
C94	1-163-038-91	s	CAPACITOR, CERAMIC 0.1MF/25V
C95	1-163-038-91	s	CAPACITOR, CERAMIC 0.1MF/25V
C96	1-163-038-91	s	CAPACITOR, CERAMIC 0.1MF/25V
C97	1-163-038-91	s	CAPACITOR, CERAMIC 0.1MF/25V
C110	1-163-038-91	s	CAPACITOR, CERAMIC 0.1MF/25V
C111	1-163-038-91	s	CAPACITOR, CERAMIC 0.1MF/25V
C112	1-163-038-91	s	CAPACITOR, CERAMIC 0.1MF/25V
C113	1-163-038-91	s	CAPACITOR, CERAMIC 0.1MF/25V
C114	1-126-392-11	s	CAPACITOR,CHIP ELECT100MF/6.3V
C115	1-163-038-91	s	CAPACITOR, CERAMIC 0.1MF/25V
C116	1-163-038-91	s	CAPACITOR, CERAMIC 0.1MF/25V
C117	1-163-038-91	s	CAPACITOR, CERAMIC 0.1MF/25V
C118	1-163-038-91	s	CAPACITOR, CERAMIC 0.1MF/25V
C119	1-163-038-91	s	CAPACITOR, CERAMIC 0.1MF/25V
C120	1-126-392-11	s	CAPACITOR,CHIP ELECT100MF/6.3V
C121	1-163-038-91	s	CAPACITOR, CERAMIC 0.1MF/25V
C122	1-163-038-91	s	CAPACITOR, CERAMIC 0.1MF/25V
C150	1-163-038-91	s	CAPACITOR, CERAMIC 0.1MF/25V
C151	1-163-038-91	s	CAPACITOR, CERAMIC 0.1MF/25V
C152	1-163-038-91	s	CAPACITOR, CERAMIC 0.1MF/25V
C153	1-126-392-11	s	CAPACITOR,CHIP ELECT100MF/6.3V
C154	1-163-038-91	s	CAPACITOR, CERAMIC 0.1MF/25V

(DU-83 BOARD(DSR-2000/2000P))

Ref. No. or Q'ty	Part No.	SP	Description
C155	1-163-038-91	s	CAPACITOR, CERAMIC 0.1MF/25V
C156	1-163-038-91	s	CAPACITOR, CERAMIC 0.1MF/25V
C157	1-163-038-91	s	CAPACITOR, CERAMIC 0.1MF/25V
C158	1-163-038-91	s	CAPACITOR, CERAMIC 0.1MF/25V
C159	1-126-392-11	s	CAPACITOR,CHIP ELECT100MF/6.3V
C160	1-163-038-91	s	CAPACITOR, CERAMIC 0.1MF/25V
C161	1-163-038-91	s	CAPACITOR, CERAMIC 0.1MF/25V
C200	1-163-038-91	s	CAPACITOR, CERAMIC 0.1MF/25V
C201	1-163-038-91	s	CAPACITOR, CERAMIC 0.1MF/25V
C202	1-163-038-91	s	CAPACITOR, CERAMIC 0.1MF/25V
C203	1-126-394-11	s	CAPACITOR,ELECT 10MF/16V(CHIP)
CN200	1-770-677-11	o	CONNECTOR,BOARD TO BOARD 50P
CN201	1-784-088-11	o	CONNECTOR, BOARD TO BOARD 140P
IC3	8-759-529-45	s	IC IDT71V256SA15PZ-TL
IC4	8-759-529-45	s	IC IDT71V256SA15PZ-TL
IC31	8-759-529-45	s	IC IDT71V256SA15PZ-TL
IC91	8-759-529-45	s	IC IDT71V256SA15PZ-TL
IC92	8-759-529-45	s	IC IDT71V256SA15PZ-TL
IC111	8-759-529-45	s	IC IDT71V256SA15PZ-TL
IC200	8-759-537-83	s	IC MBM29F400BC-70PFTN
IC201	8-759-655-86	o	IC XC9536VQ44-DSR2000-DPR-V10
IC202	8-759-548-77	s	IC SN74LV245ANSR
L2	1-414-398-11	s	INDUCTOR (SMD) 10UH
L31	1-414-398-11	s	INDUCTOR (SMD) 10UH
L32	1-414-398-11	s	INDUCTOR (SMD) 10UH
L70	1-414-398-11	s	INDUCTOR (SMD) 10UH
L71	1-414-398-11	s	INDUCTOR (SMD) 10UH
L90	1-414-398-11	s	INDUCTOR (SMD) 10UH
L111	1-414-398-11	s	INDUCTOR (SMD) 10UH
L112	1-414-398-11	s	INDUCTOR (SMD) 10UH
L150	1-414-398-11	s	INDUCTOR (SMD) 10UH
L151	1-414-398-11	s	INDUCTOR (SMD) 10UH
L200	1-414-398-11	s	INDUCTOR (SMD) 10UH
R200	1-216-073-00	s	RESISTOR,CHIP 10K 1/10W(2012)
R201	1-216-073-00	s	RESISTOR,CHIP 10K 1/10W(2012)
R202	1-216-073-00	s	RESISTOR,CHIP 10K 1/10W(2012)
R203	1-216-073-00	s	RESISTOR,CHIP 10K 1/10W(2012)
R204	1-216-073-00	s	RESISTOR,CHIP 10K 1/10W(2012)
R205	1-216-295-91	s	RESISTOR, CHIP 0 (1/10W)
R206	1-216-295-91	s	RESISTOR, CHIP 0 (1/10W)
R207	1-216-295-91	s	RESISTOR, CHIP 0 (1/10W)
R208	1-216-295-91	s	RESISTOR, CHIP 0 (1/10W)

DU-84 BOARD(DSR-2000/2000P)

---

*a: Lot No. 907
*b: Lot No. 908 -

Ref. No. or Q'ty	Part No.	SP	Description
C1	1-163-038-91	s	CAPACITOR, CERAMIC 0.1MF/25V
C2	1-163-038-91	s	CAPACITOR, CERAMIC 0.1MF/25V
C3	1-163-038-91	s	CAPACITOR, CERAMIC 0.1MF/25V
C4	1-126-394-11	s	CAPACITOR,ELECT 10MF/16V(CHIP)
C50	1-163-038-91	s	CAPACITOR, CERAMIC 0.1MF/25V
C51	1-163-038-91	s	CAPACITOR, CERAMIC 0.1MF/25V
C52	1-163-038-91	s	CAPACITOR, CERAMIC 0.1MF/25V
C53	1-163-038-91	s	CAPACITOR, CERAMIC 0.1MF/25V
C54	1-163-038-91	s	CAPACITOR, CERAMIC 0.1MF/25V
C55	1-163-038-91	s	CAPACITOR, CERAMIC 0.1MF/25V
C56	1-126-392-11	s	CAPACITOR,CHIP ELECT100MF/6.3V
C57	1-126-392-11	s	CAPACITOR,CHIP ELECT100MF/6.3V
C58	1-163-038-91	s	CAPACITOR, CERAMIC 0.1MF/25V
C59	1-163-038-91	s	CAPACITOR, CERAMIC 0.1MF/25V
C60	1-163-038-91	s	CAPACITOR, CERAMIC 0.1MF/25V
C61	1-163-038-91	s	CAPACITOR, CERAMIC 0.1MF/25V
C62	1-163-038-91	s	CAPACITOR, CERAMIC 0.1MF/25V
C63	1-163-038-91	s	CAPACITOR, CERAMIC 0.1MF/25V
C64	1-126-392-11	s	CAPACITOR,CHIP ELECT100MF/6.3V
C100	1-163-038-91	s	CAPACITOR, CERAMIC 0.1MF/25V
C101	1-163-038-91	s	CAPACITOR, CERAMIC 0.1MF/25V
C102	1-163-038-91	s	CAPACITOR, CERAMIC 0.1MF/25V
C103	1-163-038-91	s	CAPACITOR, CERAMIC 0.1MF/25V
C104	1-163-038-91	s	CAPACITOR, CERAMIC 0.1MF/25V
C105	1-163-038-91	s	CAPACITOR, CERAMIC 0.1MF/25V
C106	1-126-392-11	s	CAPACITOR,CHIP ELECT100MF/6.3V
C107	1-126-392-11	s	CAPACITOR,CHIP ELECT100MF/6.3V
C108	1-163-038-91	s	CAPACITOR, CERAMIC 0.1MF/25V
C109	1-163-038-91	s	CAPACITOR, CERAMIC 0.1MF/25V
C110	1-163-038-91	s	CAPACITOR, CERAMIC 0.1MF/25V
C111	1-163-038-91	s	CAPACITOR, CERAMIC 0.1MF/25V
C112	1-163-038-91	s	CAPACITOR, CERAMIC 0.1MF/25V
C113	1-163-038-91	s	CAPACITOR, CERAMIC 0.1MF/25V
C114	1-163-038-91	s	CAPACITOR, CERAMIC 0.1MF/25V
C115	1-126-392-11	s	CAPACITOR,CHIP ELECT100MF/6.3V
C116	1-163-038-91	s	CAPACITOR, CERAMIC 0.1MF/25V
C117	1-163-038-91	s	CAPACITOR, CERAMIC 0.1MF/25V
CN1	1-784-088-11	o	CONNECTOR, BOARD TO BOARD 140P
CN2	1-770-677-11	o	CONNECTOR,BOARD TO BOARD 50P
IC1	8-759-537-83	s	IC MBM29F400BC-70PFTN
IC2	8-759-655-86	o	IC XC9536VQ44-DSR2000-DPR-V10
IC3	8-759-548-77	s	IC SN74LV245ANSR
IC52	8-759-559-40	s	IC MB811643242A-100FN
L1	1-414-398-11	s	INDUCTOR (SMD) 10UH
L50	1-414-398-11	s	INDUCTOR (SMD) 10UH
L51	1-414-398-11	s	INDUCTOR (SMD) 10UH
L52	1-414-398-11	s	INDUCTOR (SMD) 10UH
L100	1-414-398-11	s	INDUCTOR (SMD) 10UH
L101	1-414-398-11	s	INDUCTOR (SMD) 10UH
L102	1-414-398-11	s	INDUCTOR (SMD) 10UH
R1	1-216-073-00	s	RESISTOR,CHIP 10K 1/10W(2012)
R2	1-216-073-00	s	RESISTOR,CHIP 10K 1/10W(2012)
R3	1-216-073-00	s	RESISTOR,CHIP 10K 1/10W(2012)
R4	1-216-073-00	s	RESISTOR,CHIP 10K 1/10W(2012)

(DU-84 BOARD(DSR-2000/2000P))

Ref. No. or Q'ty	Part No.	SP	Description
R5	1-216-009-00	s	RESISTOR,CHIP 22 1/10W(2125)
R6 *b	1-216-295-91	s	CONDUCTOR,CHIP(2012)
*a	1-216-009-00	s	RESISTOR,CHIP 22 1/10W(2125)
R7 *b	1-216-295-91	s	CONDUCTOR,CHIP(2012)
*a	1-216-009-00	s	RESISTOR,CHIP 22 1/10W(2125)

DU-89 BOARD(DSR-2000/2000P)

Ref. No. or Q'ty	Part No.	SP	Description
C1	1-163-038-91	s	CAPACITOR, CERAMIC 0.1MF/25V
C2	1-163-038-91	s	CAPACITOR, CERAMIC 0.1MF/25V
C3	1-163-038-91	s	CAPACITOR, CERAMIC 0.1MF/25V
C4	1-126-394-11	s	CAPACITOR,ELECT 10MF/16V(CHIP)
C50	1-163-038-91	s	CAPACITOR, CERAMIC 0.1MF/25V
C51	1-163-038-91	s	CAPACITOR, CERAMIC 0.1MF/25V
C52	1-163-038-91	s	CAPACITOR, CERAMIC 0.1MF/25V
C53	1-163-038-91	s	CAPACITOR, CERAMIC 0.1MF/25V
C54	1-163-038-91	s	CAPACITOR, CERAMIC 0.1MF/25V
C55	1-163-038-91	s	CAPACITOR, CERAMIC 0.1MF/25V
C56	1-126-392-11	s	CAPACITOR,CHIP ELECT100MF/6.3V
C57	1-126-392-11	s	CAPACITOR,CHIP ELECT100MF/6.3V
C58	1-163-038-91	s	CAPACITOR, CERAMIC 0.1MF/25V
C59	1-163-038-91	s	CAPACITOR, CERAMIC 0.1MF/25V
C60	1-163-038-91	s	CAPACITOR, CERAMIC 0.1MF/25V
C61	1-163-038-91	s	CAPACITOR, CERAMIC 0.1MF/25V
C62	1-163-038-91	s	CAPACITOR, CERAMIC 0.1MF/25V
C63	1-163-038-91	s	CAPACITOR, CERAMIC 0.1MF/25V
C64	1-163-038-91	s	CAPACITOR, CERAMIC 0.1MF/25V
C65	1-163-038-91	s	CAPACITOR, CERAMIC 0.1MF/25V
C66	1-163-038-91	s	CAPACITOR, CERAMIC 0.1MF/25V
C67	1-126-392-11	s	CAPACITOR,CHIP ELECT100MF/6.3V
C68	1-163-038-91	s	CAPACITOR, CERAMIC 0.1MF/25V
C69	1-163-038-91	s	CAPACITOR, CERAMIC 0.1MF/25V
C70	1-126-392-11	s	CAPACITOR,CHIP ELECT100MF/6.3V
C100	1-163-038-91	s	CAPACITOR, CERAMIC 0.1MF/25V
C101	1-163-038-91	s	CAPACITOR, CERAMIC 0.1MF/25V
C102	1-163-038-91	s	CAPACITOR, CERAMIC 0.1MF/25V
C103	1-163-038-91	s	CAPACITOR, CERAMIC 0.1MF/25V
C104	1-163-038-91	s	CAPACITOR, CERAMIC 0.1MF/25V
C105	1-163-038-91	s	CAPACITOR, CERAMIC 0.1MF/25V
C106	1-126-392-11	s	CAPACITOR,CHIP ELECT100MF/6.3V
C107	1-126-392-11	s	CAPACITOR,CHIP ELECT100MF/6.3V
C108	1-163-038-91	s	CAPACITOR, CERAMIC 0.1MF/25V
C109	1-163-038-91	s	CAPACITOR, CERAMIC 0.1MF/25V
C110	1-163-038-91	s	CAPACITOR, CERAMIC 0.1MF/25V
C111	1-163-038-91	s	CAPACITOR, CERAMIC 0.1MF/25V
C112	1-163-038-91	s	CAPACITOR, CERAMIC 0.1MF/25V
C113	1-163-038-91	s	CAPACITOR, CERAMIC 0.1MF/25V
C114	1-163-038-91	s	CAPACITOR, CERAMIC 0.1MF/25V
C115	1-126-392-11	s	CAPACITOR,CHIP ELECT100MF/6.3V
C116	1-163-038-91	s	CAPACITOR, CERAMIC 0.1MF/25V
C117	1-163-038-91	s	CAPACITOR, CERAMIC 0.1MF/25V
CN1	1-784-088-11	o	CONNECTOR, BOARD TO BOARD 140P
CN2	1-770-677-11	o	CONNECTOR,BOARD TO BOARD 50P
IC1	8-759-537-83	s	IC MBM29F400BC-70PFTN
IC2	8-759-655-86	o	IC XC9536VQ44-DSR2000-DPR-V10
IC3	8-759-548-77	s	IC SN74LV245ANSR
IC53	8-759-559-40	s	IC MB811643242A-100FN
L1	1-414-398-11	s	INDUCTOR (SMD) 10UH
L50	1-414-398-11	s	INDUCTOR (SMD) 10UH
L51	1-414-398-11	s	INDUCTOR (SMD) 10UH
L52	1-414-398-11	s	INDUCTOR (SMD) 10UH
L53	1-414-398-11	s	INDUCTOR (SMD) 10UH
L100	1-414-398-11	s	INDUCTOR (SMD) 10UH
L101	1-414-398-11	s	INDUCTOR (SMD) 10UH
L102	1-414-398-11	s	INDUCTOR (SMD) 10UH

(DU-89 BOARD(DSR-2000/2000P))

Ref. No. or Q'ty	Part No.	SP	Description
R1	1-216-073-00	s	RESISTOR,CHIP 10K 1/10W(2012)
R2	1-216-073-00	s	RESISTOR,CHIP 10K 1/10W(2012)
R3	1-216-073-00	s	RESISTOR,CHIP 10K 1/10W(2012)
R4	1-216-073-00	s	RESISTOR,CHIP 10K 1/10W(2012)
R5	1-216-295-91	s	RESISTOR, CHIP 0 (1/10W)
R6	1-216-295-91	s	RESISTOR, CHIP 0 (1/10W)
R7	1-216-295-91	s	RESISTOR, CHIP 0 (1/10W)

DY-15 BOARD(DSR-2000/2000P)

Ref. No. or Q'ty	Part No.	SP	Description
1pc	A-8323-493-A	o	MOUNTED CIRCUIT BOARD, DY-15
C101	1-126-396-11	s	CAPACITOR,ELECT 47MF/16V(CHIP)
C102	1-126-396-11	s	CAPACITOR,ELECT 47MF/16V(CHIP)
C103	1-163-133-00	s	CAPACITOR,CHIP CERAMIC 470PF
C104	1-126-393-11	s	CAPACITOR ELECT 33MF/10V(CHIP)
C105	1-165-319-11	s	CAPACITOR,CERAMIC 0.1MF/50V
C106	1-165-319-11	s	CAPACITOR,CERAMIC 0.1MF/50V
C107	1-128-399-11	s	CAPACITOR ELECT 330MF/16V(CHIP)
C108	1-128-399-11	s	CAPACITOR ELECT 330MF/16V(CHIP)
C109	1-163-019-00	s	CAPACITOR,CHIP CERAMIC 6800PF
C110	1-128-405-11	s	CAPACITOR.ELECT 22MF/50V(CHIP)
C111	1-128-405-11	s	CAPACITOR.ELECT 22MF/50V(CHIP)
C112	1-128-405-11	s	CAPACITOR.ELECT 22MF/50V(CHIP)
C113	1-128-405-11	s	CAPACITOR.ELECT 22MF/50V(CHIP)
C114	1-128-405-11	s	CAPACITOR.ELECT 22MF/50V(CHIP)
C201	1-163-251-11	s	CAPACITOR CERAMIC 100PF/50V
C202	1-163-251-11	s	CAPACITOR CERAMIC 100PF/50V
C203	1-163-251-11	s	CAPACITOR CERAMIC 100PF/50V
C204	1-163-251-11	s	CAPACITOR CERAMIC 100PF/50V
C205	1-163-251-11	s	CAPACITOR CERAMIC 100PF/50V
C206	1-163-251-11	s	CAPACITOR CERAMIC 100PF/50V
C207	1-163-251-11	s	CAPACITOR CERAMIC 100PF/50V
C208	1-163-251-11	s	CAPACITOR CERAMIC 100PF/50V
C209	1-163-251-11	s	CAPACITOR CERAMIC 100PF/50V
C210	1-163-251-11	s	CAPACITOR CERAMIC 100PF/50V
C211	1-163-251-11	s	CAPACITOR CERAMIC 100PF/50V
C212	1-163-251-11	s	CAPACITOR CERAMIC 100PF/50V
C213	1-163-251-11	s	CAPACITOR CERAMIC 100PF/50V
C214	1-163-251-11	s	CAPACITOR CERAMIC 100PF/50V
C215	1-163-251-11	s	CAPACITOR CERAMIC 100PF/50V
C216	1-163-251-11	s	CAPACITOR CERAMIC 100PF/50V
C217	1-163-251-11	s	CAPACITOR CERAMIC 100PF/50V
C218	1-163-251-11	s	CAPACITOR CERAMIC 100PF/50V
C219	1-163-251-11	s	CAPACITOR CERAMIC 100PF/50V
C220	1-163-251-11	s	CAPACITOR CERAMIC 100PF/50V
C221	1-163-251-11	s	CAPACITOR CERAMIC 100PF/50V
C222	1-163-251-11	s	CAPACITOR CERAMIC 100PF/50V
C223	1-163-251-11	s	CAPACITOR CERAMIC 100PF/50V
C224	1-163-251-11	s	CAPACITOR CERAMIC 100PF/50V
C225	1-163-251-11	s	CAPACITOR CERAMIC 100PF/50V
C226	1-163-251-11	s	CAPACITOR CERAMIC 100PF/50V
C227	1-163-251-11	s	CAPACITOR CERAMIC 100PF/50V
C228	1-163-251-11	s	CAPACITOR CERAMIC 100PF/50V
C229	1-163-251-11	s	CAPACITOR CERAMIC 100PF/50V
C230	1-163-251-11	s	CAPACITOR CERAMIC 100PF/50V
C231	1-163-251-11	s	CAPACITOR CERAMIC 100PF/50V
C232	1-163-251-11	s	CAPACITOR CERAMIC 100PF/50V
C233	1-163-251-11	s	CAPACITOR CERAMIC 100PF/50V
C234	1-163-251-11	s	CAPACITOR CERAMIC 100PF/50V
C235	1-163-251-11	s	CAPACITOR CERAMIC 100PF/50V
C236	1-163-251-11	s	CAPACITOR CERAMIC 100PF/50V
C237	1-163-251-11	s	CAPACITOR CERAMIC 100PF/50V
C238	1-163-251-11	s	CAPACITOR CERAMIC 100PF/50V
C239	1-163-251-11	s	CAPACITOR CERAMIC 100PF/50V
C240	1-163-251-11	s	CAPACITOR CERAMIC 100PF/50V
CN720	1-764-162-11	o	CONNECTOR, FPC 20P
D101	8-719-110-02	s	DIODE RD7.5ES-B1

(DY-15 BOARD(DSR-2000/2000P))

Ref. No. or Q'ty	Part No.	SP	Description
D102	8-719-110-12	s	DIODE RD9.1ES-B1
D103	8-719-108-24	s	DIODE 1SS223
D104	8-719-110-12	s	DIODE RD9.1ES-B1
D105	8-719-110-12	s	DIODE RD9.1ES-B1
D106	8-719-051-03	s	DIODE EC11FS4-TE12L5
D107	8-719-109-93	s	DIODE RD6.2ES-B2
F102	⚠ 1-533-950-11	s	FUSE, CHIP
IC101	8-759-350-99	s	IC M66004M6FP200D
L101	1-406-824-11	s	COIL, CHOKE 22UH
L102	1-412-963-11	s	INDUCTOR 100UH (2520)
L103	1-406-824-11	s	COIL, CHOKE 22UH
Q101	8-729-230-49	s	TRANSISTOR 2SC2712-YG
Q102	8-729-202-37	s	TRANSISTOR 2SC3303-Y
Q201	8-729-106-68	s	TRANSISTOR 2SD1615A-GP
Q202	8-729-216-22	s	TRANSISTOR 2SA1162-G
Q203	8-729-019-87	s	TRANSISTOR 2SC3392-6-TB
Q204	8-729-216-22	s	TRANSISTOR 2SA1162-G
Q205	8-729-019-87	s	TRANSISTOR 2SC3392-6-TB
Q206	8-729-216-22	s	TRANSISTOR 2SA1162-G
Q207	8-729-019-87	s	TRANSISTOR 2SC3392-6-TB
Q208	8-729-216-22	s	TRANSISTOR 2SA1162-G
Q209	8-729-019-87	s	TRANSISTOR 2SC3392-6-TB
Q210	8-729-216-22	s	TRANSISTOR 2SA1162-G
Q211	8-729-019-87	s	TRANSISTOR 2SC3392-6-TB
Q212	8-729-216-22	s	TRANSISTOR 2SA1162-G
Q213	8-729-019-87	s	TRANSISTOR 2SC3392-6-TB
Q214	8-729-216-22	s	TRANSISTOR 2SA1162-G
Q215	8-729-019-87	s	TRANSISTOR 2SC3392-6-TB
Q216	8-729-216-22	s	TRANSISTOR 2SA1162-G
Q217	8-729-019-87	s	TRANSISTOR 2SC3392-6-TB
Q218	8-729-216-22	s	TRANSISTOR 2SA1162-G
Q219	8-729-019-87	s	TRANSISTOR 2SC3392-6-TB
Q220	8-729-216-22	s	TRANSISTOR 2SA1162-G
Q221	8-729-019-87	s	TRANSISTOR 2SC3392-6-TB
Q222	8-729-216-22	s	TRANSISTOR 2SA1162-G
Q223	8-729-019-87	s	TRANSISTOR 2SC3392-6-TB
Q224	8-729-216-22	s	TRANSISTOR 2SA1162-G
Q225	8-729-019-87	s	TRANSISTOR 2SC3392-6-TB
Q226	8-729-216-22	s	TRANSISTOR 2SA1162-G
Q227	8-729-019-87	s	TRANSISTOR 2SC3392-6-TB
Q228	8-729-216-22	s	TRANSISTOR 2SA1162-G
Q229	8-729-019-87	s	TRANSISTOR 2SC3392-6-TB
Q230	8-729-216-22	s	TRANSISTOR 2SA1162-G
Q231	8-729-019-87	s	TRANSISTOR 2SC3392-6-TB
Q232	8-729-216-22	s	TRANSISTOR 2SA1162-G
Q233	8-729-019-87	s	TRANSISTOR 2SC3392-6-TB
Q234	8-729-216-22	s	TRANSISTOR 2SA1162-G
Q235	8-729-019-87	s	TRANSISTOR 2SC3392-6-TB
Q236	8-729-216-22	s	TRANSISTOR 2SA1162-G
Q237	8-729-019-87	s	TRANSISTOR 2SC3392-6-TB
Q238	8-729-216-22	s	TRANSISTOR 2SA1162-G
Q239	8-729-019-87	s	TRANSISTOR 2SC3392-6-TB
Q240	8-729-216-22	s	TRANSISTOR 2SA1162-G
Q241	8-729-019-87	s	TRANSISTOR 2SC3392-6-TB
Q242	8-729-216-22	s	TRANSISTOR 2SA1162-G
Q243	8-729-019-87	s	TRANSISTOR 2SC3392-6-TB

(DY-15 BOARD(DSR-2000/2000P))

Ref. No. or Q'ty	Part No.	SP	Description
Q244	8-729-216-22	s	TRANSISTOR 2SA1162-G
Q245	8-729-019-87	s	TRANSISTOR 2SC3392-6-TB
Q246	8-729-216-22	s	TRANSISTOR 2SA1162-G
Q247	8-729-019-87	s	TRANSISTOR 2SC3392-6-TB
Q248	8-729-216-22	s	TRANSISTOR 2SA1162-G
Q249	8-729-019-87	s	TRANSISTOR 2SC3392-6-TB
Q250	8-729-216-22	s	TRANSISTOR 2SA1162-G
Q251	8-729-019-87	s	TRANSISTOR 2SC3392-6-TB
Q252	8-729-216-22	s	TRANSISTOR 2SA1162-G
Q253	8-729-019-87	s	TRANSISTOR 2SC3392-6-TB
Q254	8-729-216-22	s	TRANSISTOR 2SA1162-G
Q255	8-729-019-87	s	TRANSISTOR 2SC3392-6-TB
Q256	8-729-216-22	s	TRANSISTOR 2SA1162-G
Q257	8-729-019-87	s	TRANSISTOR 2SC3392-6-TB
Q258	8-729-216-22	s	TRANSISTOR 2SA1162-G
Q259	8-729-019-87	s	TRANSISTOR 2SC3392-6-TB
Q260	8-729-216-22	s	TRANSISTOR 2SA1162-G
Q261	8-729-019-87	s	TRANSISTOR 2SC3392-6-TB
Q262	8-729-216-22	s	TRANSISTOR 2SA1162-G
Q263	8-729-019-87	s	TRANSISTOR 2SC3392-6-TB
Q264	8-729-216-22	s	TRANSISTOR 2SA1162-G
Q265	8-729-019-87	s	TRANSISTOR 2SC3392-6-TB
Q266	8-729-216-22	s	TRANSISTOR 2SA1162-G
Q267	8-729-019-87	s	TRANSISTOR 2SC3392-6-TB
Q268	8-729-216-22	s	TRANSISTOR 2SA1162-G
Q269	8-729-019-87	s	TRANSISTOR 2SC3392-6-TB
Q270	8-729-216-22	s	TRANSISTOR 2SA1162-G
Q271	8-729-019-87	s	TRANSISTOR 2SC3392-6-TB
Q272	8-729-216-22	s	TRANSISTOR 2SA1162-G
Q273	8-729-019-87	s	TRANSISTOR 2SC3392-6-TB
Q274	8-729-216-22	s	TRANSISTOR 2SA1162-G
Q275	8-729-019-87	s	TRANSISTOR 2SC3392-6-TB
Q276	8-729-216-22	s	TRANSISTOR 2SA1162-G
Q277	8-729-019-87	s	TRANSISTOR 2SC3392-6-TB
Q278	8-729-216-22	s	TRANSISTOR 2SA1162-G
Q279	8-729-019-87	s	TRANSISTOR 2SC3392-6-TB
Q280	8-729-216-22	s	TRANSISTOR 2SA1162-G
R101	1-216-049-91	s	RESISTOR,CHIP 1K 1/10W(2125)
R110	1-216-049-91	s	RESISTOR,CHIP 1K 1/10W(2125)
R111	1-216-037-00	s	RESISTOR,CHIP 330 1/10W(2012)
R112	1-216-043-91	s	RESISTOR, CHIP 560 1/10W(2125)
R113	1-216-021-00	s	RESISTOR,CHIP 68 1/10W(2012)
R115	1-216-093-00	s	RESISTOR, CHIP 68K 1/10W(2012)
R116	1-216-295-91	s	RESISTOR, CHIP 0 (1/10W)
R201	1-216-025-91	s	RESISTOR,CHIP 100 1/10W(2125)
R202	1-216-025-91	s	RESISTOR,CHIP 100 1/10W(2125)
R203	1-216-025-91	s	RESISTOR,CHIP 100 1/10W(2125)
R204	1-216-025-91	s	RESISTOR,CHIP 100 1/10W(2125)
R205	1-216-025-91	s	RESISTOR,CHIP 100 1/10W(2125)
R206	1-216-025-91	s	RESISTOR,CHIP 100 1/10W(2125)
R207	1-216-025-91	s	RESISTOR,CHIP 100 1/10W(2125)
R208	1-216-025-91	s	RESISTOR,CHIP 100 1/10W(2125)
R209	1-216-025-91	s	RESISTOR,CHIP 100 1/10W(2125)
R210	1-216-025-91	s	RESISTOR,CHIP 100 1/10W(2125)
R211	1-216-025-91	s	RESISTOR,CHIP 100 1/10W(2125)
R212	1-216-025-91	s	RESISTOR,CHIP 100 1/10W(2125)
R213	1-216-025-91	s	RESISTOR,CHIP 100 1/10W(2125)
R214	1-216-025-91	s	RESISTOR,CHIP 100 1/10W(2125)

(DY-15 BOARD(DSR-2000/2000P))

Ref. No. or Q'ty	Part No.	SP	Description
R215	1-216-025-91	s	RESISTOR,CHIP 100 1/10W(2125)
R216	1-216-025-91	s	RESISTOR,CHIP 100 1/10W(2125)
R217	1-216-025-91	s	RESISTOR,CHIP 100 1/10W(2125)
R218	1-216-025-91	s	RESISTOR,CHIP 100 1/10W(2125)
R219	1-216-025-91	s	RESISTOR,CHIP 100 1/10W(2125)
R220	1-216-025-91	s	RESISTOR,CHIP 100 1/10W(2125)
R221	1-216-025-91	s	RESISTOR,CHIP 100 1/10W(2125)
R222	1-216-025-91	s	RESISTOR,CHIP 100 1/10W(2125)
R223	1-216-025-91	s	RESISTOR,CHIP 100 1/10W(2125)
R224	1-216-025-91	s	RESISTOR,CHIP 100 1/10W(2125)
R225	1-216-025-91	s	RESISTOR,CHIP 100 1/10W(2125)
R226	1-216-025-91	s	RESISTOR,CHIP 100 1/10W(2125)
R227	1-216-025-91	s	RESISTOR,CHIP 100 1/10W(2125)
R228	1-216-025-91	s	RESISTOR,CHIP 100 1/10W(2125)
R229	1-216-025-91	s	RESISTOR,CHIP 100 1/10W(2125)
R230	1-216-025-91	s	RESISTOR,CHIP 100 1/10W(2125)
R231	1-216-025-91	s	RESISTOR,CHIP 100 1/10W(2125)
R232	1-216-025-91	s	RESISTOR,CHIP 100 1/10W(2125)
R233	1-216-025-91	s	RESISTOR,CHIP 100 1/10W(2125)
R234	1-216-025-91	s	RESISTOR,CHIP 100 1/10W(2125)
R235	1-216-025-91	s	RESISTOR,CHIP 100 1/10W(2125)
R236	1-216-025-91	s	RESISTOR,CHIP 100 1/10W(2125)
R237	1-216-025-91	s	RESISTOR,CHIP 100 1/10W(2125)
R238	1-216-025-91	s	RESISTOR,CHIP 100 1/10W(2125)
R239	1-216-025-91	s	RESISTOR,CHIP 100 1/10W(2125)
R240	1-216-025-91	s	RESISTOR,CHIP 100 1/10W(2125)
RB101	1-239-389-11	s	RESISTOR,NETWORK 47K (1608)
S101	1-692-537-21	s	SWITCH, TACTILE (WITH LIGHT)
S102	1-692-538-11	s	SWITCH, TACTIL
S103	1-692-538-11	s	SWITCH, TACTIL
S104	1-692-538-11	s	SWITCH, TACTIL
S105	1-692-538-11	s	SWITCH, TACTIL
T1	1-435-185-11	s	TRANSFORMER, CONVERTER

EX-752 BOARD(DSR-2000/2000P)

Ref. No. or Q'ty	Part No.	SP	Description
1pc	A-8323-516-A	o	MOUNTED CIRCUIT BOARD, EX-752
CN300	1-778-262-12	o	CONNECTOR, BOARD TO BOARD 148P
CN303	1-563-766-11	o	RECEPTACLE,MULTI CONNECTOR 30P
E301	1-535-881-21	o	TERMINAL, TP (AUTO INSERTION)

FU-78P BOARD(DSR-2000/2000P)

Ref. No. or Q'ty	Part No.	SP	Description
1pc	A-8326-493-A	o	MOUNTED CIRCUIT BOARD, FU-78P
C1	1-104-851-11	s	CAPACITOR,TANTALUM 10MF/10V
C2	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
C3	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
C4	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
C5	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
C6	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
C7	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
C8	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
C9	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
C10	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
C11	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
C12	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
C13	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
C14	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
C15	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
C16	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
C17	1-128-964-11	s	CAPACITOR,TANTALUM 100MF/6.3V
C18	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
C19	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
C20	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
C21	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
C22	1-104-851-11	s	CAPACITOR,TANTALUM 10MF/10V
C23	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
C24	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
C25	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
C26	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
C27	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
C28	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
C29	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
C30	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
C31	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
C32	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
C33	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
C34	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
C35	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
C36	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
C37	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
C38	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
C39	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
C40	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
C41	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
C42	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
C43	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
C44	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
C45	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
C46	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
C47	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
C48	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
C49	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
C50	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
C51	1-104-851-11	s	CAPACITOR,TANTALUM 10MF/10V
C52	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
C53	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
C54	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
C55	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
C56	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
C57	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF

(FU-78P BOARD(DSR-2000/2000P))

Ref. No. or Q'ty	Part No.	SP	Description
C58	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
C59	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
C60	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
C61	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
C62	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
C63	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
C64	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
C65	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
C66	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
C67	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
C68	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
C69	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
C70	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
C71	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
C72	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
C73	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
C74	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
C75	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
C76	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
C77	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
C78	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
C79	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
C80	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
C81	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
C82	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
C83	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
C84	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
C85	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
C86	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
C87	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
C88	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
C89	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
C90	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
C91	1-104-851-11	s	CAPACITOR,TANTALUM 10MF/10V
C94	1-162-919-11	s	CAPACITOR,CERAMIC 22PF/50V CH
CN11	1-778-003-11	o	CONNECTOR, BOARD TO BOARD 80P
CN12	1-778-003-11	o	CONNECTOR, BOARD TO BOARD 80P
IC1	8-759-567-07	s	IC CXD8763AR
IC2	8-749-017-21	s	IC SI-3025LS-TL
IC6	8-759-713-79	s	IC MB81F643242C-10FN
IC7	8-759-426-26	s	IC CXD8608R
IC8	8-759-426-26	s	IC CXD8608R
IC9	8-759-426-26	s	IC CXD8608R
IC10	8-759-426-26	s	IC CXD8608R
L1	1-414-398-11	s	INDUCTOR (SMD) 10UH
L2	1-414-398-11	s	INDUCTOR (SMD) 10UH
L3	1-414-398-11	s	INDUCTOR (SMD) 10UH
L4	1-414-398-11	s	INDUCTOR (SMD) 10UH
R1	1-216-841-11	s	RESISTOR, CHIP 47K 1/16W 1608
R2	1-216-841-11	s	RESISTOR, CHIP 47K 1/16W 1608
R3	1-216-864-11	s	CONDUCTOR, CHIP (1608)
R4	1-216-864-11	s	CONDUCTOR, CHIP (1608)
R6	1-216-864-11	s	CONDUCTOR, CHIP (1608)
R7	1-216-864-11	s	CONDUCTOR, CHIP (1608)
R8	1-216-864-11	s	CONDUCTOR, CHIP (1608)
R9	1-216-864-11	s	CONDUCTOR, CHIP (1608)
R11	1-216-864-11	s	CONDUCTOR, CHIP (1608)
R13	1-216-864-11	s	CONDUCTOR, CHIP (1608)

(FU-78P BOARD(DSR-2000/2000P))

Ref. No. or Q'ty	Part No.	SP	Description
R14	1-216-864-11	s	CONDUCTOR, CHIP (1608)
R15	1-216-864-11	s	CONDUCTOR, CHIP (1608)
R17	1-216-864-11	s	CONDUCTOR, CHIP (1608)
R18	1-216-864-11	s	CONDUCTOR, CHIP (1608)
R19	1-216-864-11	s	CONDUCTOR, CHIP (1608)
R20	1-216-864-11	s	CONDUCTOR, CHIP (1608)
R21	1-216-864-11	s	CONDUCTOR, CHIP (1608)
R22	1-216-864-11	s	CONDUCTOR, CHIP (1608)
R24	1-216-864-11	s	CONDUCTOR, CHIP (1608)
R29	1-216-864-11	s	CONDUCTOR, CHIP (1608)
R30	1-216-864-11	s	CONDUCTOR, CHIP (1608)
R31	1-216-829-11	s	RESISTOR,CHIP 4.7K 1/16W(1608)
R32	1-216-829-11	s	RESISTOR,CHIP 4.7K 1/16W(1608)
R34	1-216-864-11	s	CONDUCTOR, CHIP (1608)
RB1	1-239-389-11	s	RESISTOR,NETWORK 47K (1608)
RB2	1-239-389-11	s	RESISTOR,NETWORK 47K (1608)
RB3	1-239-389-11	s	RESISTOR,NETWORK 47K (1608)
RB4	1-239-389-11	s	RESISTOR,NETWORK 47K (1608)

FU-78R BOARD(DSR-2000/2000P)

Ref. No. or Q'ty	Part No.	SP	Description
1pc	A-8326-492-A	o	MOUNTED CIRCUIT BOARD, FU-78R
C1	1-104-851-11	s	CAPACITOR,TANTALUM 10MF/10V
C2	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
C3	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
C4	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
C5	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
C6	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
C7	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
C8	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
C9	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
C10	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
C11	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
C12	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
C13	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
C14	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
C15	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
C16	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
C17	1-128-964-11	s	CAPACITOR,TANTALUM 100MF/6.3V
C18	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
C19	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
C20	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
C21	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
C22	1-104-851-11	s	CAPACITOR,TANTALUM 10MF/10V
C23	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
C24	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
C25	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
C26	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
C27	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
C28	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
C29	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
C30	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
C31	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
C32	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
C33	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
C34	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
C35	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
C36	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
C37	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
C38	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
C39	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
C40	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
C41	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
C42	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
C43	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
C44	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
C45	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
C46	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
C47	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
C48	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
C49	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
C50	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
C51	1-104-851-11	s	CAPACITOR,TANTALUM 10MF/10V
C52	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
C53	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
C54	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
C55	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
C56	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
C57	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF

(FU-78R BOARD(DSR-2000/2000P))

Ref. No. or Q'ty	Part No.	SP	Description
C58	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
C59	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
C60	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
C61	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
C62	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
C63	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
C64	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
C65	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
C66	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
C67	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
C68	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
C69	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
C70	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
C71	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
C72	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
C73	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
C74	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
C75	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
C76	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
C77	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
C78	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
C79	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
C80	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
C81	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
C82	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
C83	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
C84	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
C85	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
C86	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
C87	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
C88	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
C89	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
C90	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
C91	1-104-851-11	s	CAPACITOR,TANTALUM 10MF/10V
C94	1-162-919-11	s	CAPACITOR,CERAMIC 22PF/50V CH
IC1	8-759-567-07	s	IC CXD8763AR
IC2	8-749-017-21	s	IC SI-3025LS-TL
IC6	8-759-713-79	s	IC MB81F643242C-10FN
IC7	8-759-426-26	s	IC CXD8608R
IC8	8-759-426-26	s	IC CXD8608R
IC9	8-759-426-26	s	IC CXD8608R
IC10	8-759-426-26	s	IC CXD8608R
L1	1-414-398-11	s	INDUCTOR (SMD) 10UH
L2	1-414-398-11	s	INDUCTOR (SMD) 10UH
L3	1-414-398-11	s	INDUCTOR (SMD) 10UH
L4	1-414-398-11	s	INDUCTOR (SMD) 10UH
R1	1-216-841-11	s	RESISTOR, CHIP 47K 1/16W 1608
R2	1-216-841-11	s	RESISTOR, CHIP 47K 1/16W 1608
R3	1-216-864-11	s	CONDUCTOR, CHIP (1608)
R4	1-216-864-11	s	CONDUCTOR, CHIP (1608)
R5	1-216-864-11	s	CONDUCTOR, CHIP (1608)
R6	1-216-864-11	s	CONDUCTOR, CHIP (1608)
R7	1-216-864-11	s	CONDUCTOR, CHIP (1608)
R8	1-216-864-11	s	CONDUCTOR, CHIP (1608)
R9	1-216-864-11	s	CONDUCTOR, CHIP (1608)
R10	1-216-864-11	s	CONDUCTOR, CHIP (1608)
R12	1-216-864-11	s	CONDUCTOR, CHIP (1608)
R14	1-216-864-11	s	CONDUCTOR, CHIP (1608)

(FU-78R BOARD(DSR-2000/2000P))

Ref. No. or Q'ty	Part No.	SP	Description
R15	1-216-864-11	s	CONDUCTOR, CHIP (1608)
R16	1-216-864-11	s	CONDUCTOR, CHIP (1608)
R18	1-216-864-11	s	CONDUCTOR, CHIP (1608)
R19	1-216-864-11	s	CONDUCTOR, CHIP (1608)
R20	1-216-864-11	s	CONDUCTOR, CHIP (1608)
R21	1-216-864-11	s	CONDUCTOR, CHIP (1608)
R22	1-216-864-11	s	CONDUCTOR, CHIP (1608)
R23	1-216-864-11	s	CONDUCTOR, CHIP (1608)
R25	1-216-864-11	s	CONDUCTOR, CHIP (1608)
R27	1-216-864-11	s	CONDUCTOR, CHIP (1608)
R28	1-216-864-11	s	CONDUCTOR, CHIP (1608)
R31	1-216-829-11	s	RESISTOR,CHIP 4.7K 1/16W(1608)
R32	1-216-829-11	s	RESISTOR,CHIP 4.7K 1/16W(1608)
R35	1-216-864-11	s	CONDUCTOR, CHIP (1608)
RB1	1-239-389-11	s	RESISTOR,NETWORK 47K (1608)
RB2	1-239-389-11	s	RESISTOR,NETWORK 47K (1608)
RB3	1-239-389-11	s	RESISTOR,NETWORK 47K (1608)
RB4	1-239-389-11	s	RESISTOR,NETWORK 47K (1608)

HP-99 BOARD(DSR-2000/2000P)

Ref. No. or Q'ty	Part No.	SP	Description
1pc	A-8323-513-A	o	MOUNTED CIRCUIT BOARD, HP-99
C1	1-163-038-91	s	CAPACITOR, CERAMIC 0.1MF/25V
C2	1-163-038-91	s	CAPACITOR, CERAMIC 0.1MF/25V
C4	1-163-251-11	s	CAPACITOR CERAMIC 100PF/50V
C5	1-163-251-11	s	CAPACITOR CERAMIC 100PF/50V
C6	1-163-251-11	s	CAPACITOR CERAMIC 100PF/50V
C7	1-163-251-11	s	CAPACITOR CERAMIC 100PF/50V
C8	1-126-392-11	s	CAPACITOR,CHIP ELECT100MF/6.3V
C9	1-126-392-11	s	CAPACITOR,CHIP ELECT100MF/6.3V
C10	1-163-809-11	s	CAPACITOR,CHIP CERAMIC 0.047MF
C11	1-163-809-11	s	CAPACITOR,CHIP CERAMIC 0.047MF
C12	1-163-038-91	s	CAPACITOR, CERAMIC 0.1MF/25V
C13	1-126-391-11	s	CAPACITOR ELECT 47MF/6.3V(105)
C14	1-126-391-11	s	CAPACITOR ELECT 47MF/6.3V(105)
C15	1-126-391-11	s	CAPACITOR ELECT 47MF/6.3V(105)
C16	1-126-391-11	s	CAPACITOR ELECT 47MF/6.3V(105)
C17	1-163-038-91	s	CAPACITOR, CERAMIC 0.1MF/25V
C18	1-163-038-91	s	CAPACITOR, CERAMIC 0.1MF/25V
CN1	1-565-327-11	s	JACK, LARGE TYPE (6.3MM)
CN2	1-506-488-11	s	PIN,CONNECTOR 9P
IC1	8-759-369-73	s	IC NJM4556AM
Q1	8-729-029-14	s	TRANSISTOR DTC144EUA-T106
Q2	8-729-141-48	s	TRANSISTOR 2SB624-BV345
Q5	8-729-209-07	s	TRANSISTOR 2SC4213-B
Q6	8-729-209-07	s	TRANSISTOR 2SC4213-B
Q8	8-729-028-91	s	TRANSISTOR DTA144EUA-T106
Q9	8-729-029-14	s	TRANSISTOR DTC144EUA-T106
Q10	8-729-028-91	s	TRANSISTOR DTA144EUA-T106
Q11	8-729-808-42	s	TRANSISTOR 2SD1624-T
R1	1-208-802-11	s	RESISTOR,CHIP 6.8K 1/10W(2012)
R2	1-208-802-11	s	RESISTOR,CHIP 6.8K 1/10W(2012)
R5	1-208-802-11	s	RESISTOR,CHIP 6.8K 1/10W(2012)
R6	1-208-802-11	s	RESISTOR,CHIP 6.8K 1/10W(2012)
R7	1-208-810-11	s	RESISTOR,CHIP 15K 1/10W (2012)
R8	1-208-818-11	s	RESISTOR,CHIP 33K 1/10W (2012)
R9	1-208-818-11	s	RESISTOR,CHIP 33K 1/10W (2012)
R10	1-208-818-11	s	RESISTOR,CHIP 33K 1/10W (2012)
R11	1-208-818-11	s	RESISTOR,CHIP 33K 1/10W (2012)
R12	1-216-097-91	s	RESISTOR,CHIP 100K 1/10W(2012)
R13	1-211-966-11	s	RESISTOR,CHIP 39 1/10W (2125)
R14	1-211-964-11	s	RESISTOR,CHIP 33 1/10W (2012)
R15	1-211-966-11	s	RESISTOR,CHIP 39 1/10W (2125)
R16	1-211-964-11	s	RESISTOR,CHIP 33 1/10W (2012)
R17	1-216-073-00	s	RESISTOR,CHIP 10K 1/10W(2012)
R18	1-208-806-11	s	RESISTOR,CHIP 10K 1/10W (2012)
R19	1-208-798-11	s	RESISTOR,CHIP 4.7K 1/10W(2012)
RV1	1-241-577-11	s	VAR, CARBON 20K/20K
S1	1-554-088-00	s	SWITCH,KEY BOARD

IF-763 BOARD(DSBK-190)
---

*1: Board No. suffix 11
*2: Board No. suffix 12 -

*a: Lot No. 909 - 911

Ref. No. or Q'ty	Part No.	SP	Description
1pc	3-179-084-01	s	LEVER(R),PRINTED C,BOARD
1pc	3-179-085-01	s	LEVER(L),PRINTED C.BOARD
1pc	8-759-655-86	s	IC XC9536VQ44-DSR2000-DPR-V10
C1	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C2	1-126-401-11	s	CAPACITOR, ELECT 1MF/50V(CHIP)
C3	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C4	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C5	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C6	1-126-391-11	s	CAPACITOR ELECT 47MF/6.3V(105)
C7	1-162-915-11	s	CAPACITOR,CERAMIC 10PF/50V CH
C8	1-162-915-11	s	CAPACITOR,CERAMIC 10PF/50V CH
C9	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C10	1-164-230-11	s	CAPACITOR,CERAMIC 220PF/50V
C11	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C12	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C13	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C14	1-135-212-21	s	CAPACITOR TANTALUM 2.2MF/35V
C15	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C201	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C202	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C203	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C204	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C205	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C206	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C207	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C208	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C209	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C210	1-126-391-11	s	CAPACITOR ELECT 47MF/6.3V(105)
C211	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C306	1-162-964-11	s	CAPACITOR,CERAMIC 1000PF/50V B
C307	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C308	1-162-964-11	s	CAPACITOR,CERAMIC 1000PF/50V B
C309	1-162-964-11	s	CAPACITOR,CERAMIC 1000PF/50V B
C310	1-165-176-11	s	CAPACITOR,CERAMIC 47000PF/16V
C311	1-164-505-11	s	CAPACITOR,CHIP CERAMIC 2.2MF
C317	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C318	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C319	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C320	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C321 *2	1-126-393-11	s	CAPACITOR,ELECT 33MF/10V(CHIP)
*1	1-126-394-11	s	CAPACITOR,ELECT 10MF/16V(CHIP)
C322 *2	1-126-393-11	s	CAPACITOR,ELECT 33MF/10V(CHIP)
*1	1-126-394-11	s	CAPACITOR,ELECT 10MF/16V(CHIP)
C323	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C324	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C325	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C326	1-162-917-11	s	CAPACITOR,CERAMIC 15PF/50V CH
C327	1-162-917-11	s	CAPACITOR,CERAMIC 15PF/50V CH
C328 *2	1-126-393-11	s	CAPACITOR,ELECT 33MF/10V(CHIP)
*1	1-126-394-11	s	CAPACITOR,ELECT 10MF/16V(CHIP)
C329	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C330	1-126-391-11	s	CAPACITOR ELECT 47MF/6.3V(105)
C331	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C332	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F

(IF-763 BOARD(DSBK-190))

Ref. No. or Q'ty	Part No.	SP	Description
C333 *2	1-126-393-11	s	CAPACITOR,ELECT 33MF/10V(CHIP)
C334 *2	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C335 *2	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C401	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C402	1-126-391-11	s	CAPACITOR ELECT 47MF/6.3V(105)
C403	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C404	1-126-390-11	s	CAPACITOR ELECT 22MF/6.3V(105)
C405	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C406	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C407	1-162-919-11	s	CAPACITOR,CERAMIC 22PF/50V CH
C408	1-162-919-11	s	CAPACITOR,CERAMIC 22PF/50V CH
C409	1-115-156-11	s	CAPACITOR, 1MF/10V (1608)
C410	1-164-230-11	s	CAPACITOR,CERAMIC 220PF/50V
C411	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C412	1-126-391-11	s	CAPACITOR ELECT 47MF/6.3V(105)
C413	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C414	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C415	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
CN1	1-764-095-11	o	PIN, CONNECTOR (PC BOARD) 10P
CN202	1-778-262-12	o	CONNECTOR, BOARD TO BOARD 148P
CN302	1-770-677-11	o	CONNECTOR,BOARD TO BOARD 50P
CN401	1-580-789-21	o	PIN,CONNECTOR (SMD)
D1	8-719-938-72	s	DIODE SB01-05CP (RECTI)
D2	8-719-941-86	s	DIODE DAN202U
D303	8-719-041-39	s	DIODE KV1470 (5MA)
D304	8-719-027-95	s	DIODE HSM88WK
IC1	8-759-445-93	s	IC AK6440AM (E2)
IC2	8-759-586-82	s	IC HD64F3048VTF8-DSBK140-V104
IC3	8-759-524-27	s	IC TC74VHC244FT(EL)
IC4	8-759-196-96	s	IC TC7SH08FU (TE85R)
IC5	8-759-196-96	s	IC TC7SH08FU (TE85R)
IC6	8-759-058-58	s	IC TC7S04FU-TE85R
IC7	8-759-257-96	s	IC TC7S14FU (TE85R)
IC8	8-759-387-54	s	IC S-80727-SN-DQ-T1
IC9	8-759-534-96	s	IC SN74AHCT125PW-E05
IC201	8-759-837-54	s	IC HY57V641620HGT-H
IC202	8-759-548-77	s	IC SN74LV245ANSR
IC203	8-759-548-77	s	IC SN74LV245ANSR
IC204	8-759-548-77	s	IC SN74LV245ANSR
IC301	8-752-378-75	s	IC CXD3106R
IC303	8-759-537-83	s	IC MBM29F400BC-70PFTN
IC304	8-759-657-92	s	IC TA48M03F(TE16L)
IC305	8-759-655-86	s	IC XC9536VQ44-DSR2000-DPR-V10
IC401	8-759-432-00	s	IC TSB11LV01PT-TEB
IC402	8-759-430-56	s	IC CXD2194AR-TEB
L1	1-412-939-11	s	INDUCTOR 1.0UH (2520)
L201	1-414-398-11	s	INDUCTOR (SMD) 10UH
L302	1-412-173-11	s	MICRO INDUCTOR 0.82UH
L304	1-414-398-11	s	INDUCTOR (SMD) 10UH
L306	1-406-824-11	s	COIL, CHOKE 22UH
L401	1-412-939-11	s	INDUCTOR 1.0UH (2520)
L402	1-412-939-11	s	INDUCTOR 1.0UH (2520)
L403	1-412-939-11	s	INDUCTOR 1.0UH (2520)
PS302 ⚠	1-576-123-21	s	CIRCUIT PROTECTOR 0.8A(IC LINK)
Q302	8-729-117-32	s	TRANSISTOR 2SC4177
Q304	8-729-029-14	s	TRANSISTOR DTC144EUA-T106
Q305	8-729-029-14	s	TRANSISTOR DTC144EUA-T106

(IF-763 BOARD(DSBK-190))

Ref. No. or Q'ty	Part No.	SP	Description
R1	1-216-834-11	s	RESISTOR,CHIP 12K 1/16W 1608
R2	1-216-809-11	s	RESISTOR,CHIP 100 1/16W 1608
R3	1-216-809-11	s	RESISTOR,CHIP 100 1/16W 1608
R4	1-216-841-11	s	RESISTOR, CHIP 47K 1/16W 1608
R5	1-216-841-11	s	RESISTOR, CHIP 47K 1/16W 1608
R6	1-216-841-11	s	RESISTOR, CHIP 47K 1/16W 1608
R8	1-216-841-11	s	RESISTOR, CHIP 47K 1/16W 1608
R10	1-216-841-11	s	RESISTOR, CHIP 47K 1/16W 1608
R11	1-216-841-11	s	RESISTOR, CHIP 47K 1/16W 1608
R12	1-216-841-11	s	RESISTOR, CHIP 47K 1/16W 1608
R13	1-218-840-11	s	RESISTOR,CHIP 510 1/16W (1608)
R14	1-216-834-11	s	RESISTOR,CHIP 12K 1/16W 1608
R17	1-216-841-11	s	RESISTOR, CHIP 47K 1/16W 1608
R18	1-216-841-11	s	RESISTOR, CHIP 47K 1/16W 1608
R19	1-216-809-11	s	RESISTOR,CHIP 100 1/16W 1608
R20	1-216-841-11	s	RESISTOR, CHIP 47K 1/16W 1608
R21	1-216-841-11	s	RESISTOR, CHIP 47K 1/16W 1608
R22	1-216-809-11	s	RESISTOR,CHIP 100 1/16W 1608
R23	1-216-845-11	s	RESISTOR,CHIP 100K 1/16W(1608)
R26	1-216-864-11	s	RESISTOR,CHIP 0 1/16W (1608)
R201 *a	1-216-809-11	s	RESISTOR,CHIP 100 1/16W 1608
R203	1-216-809-11	s	RESISTOR,CHIP 100 1/16W 1608
R204	1-216-801-11	s	RESISTOR,CHIP 22 1/16W 1608
R205	1-216-801-11	s	RESISTOR,CHIP 22 1/16W 1608
R206	1-216-801-11	s	RESISTOR,CHIP 22 1/16W 1608
R207	1-216-801-11	s	RESISTOR,CHIP 22 1/16W 1608
R208	1-216-801-11	s	RESISTOR,CHIP 22 1/16W 1608
R209	1-216-801-11	s	RESISTOR,CHIP 22 1/16W 1608
R210	1-216-801-11	s	RESISTOR,CHIP 22 1/16W 1608
R211	1-216-801-11	s	RESISTOR,CHIP 22 1/16W 1608
R212	1-216-864-11	s	RESISTOR,CHIP 0 1/16W (1608)
R213	1-216-864-11	s	RESISTOR,CHIP 0 1/16W (1608)
R214	1-216-864-11	s	RESISTOR,CHIP 0 1/16W (1608)
R215	1-216-864-11	s	RESISTOR,CHIP 0 1/16W (1608)
R216	1-216-864-11	s	RESISTOR,CHIP 0 1/16W (1608)
R217	1-216-864-11	s	RESISTOR,CHIP 0 1/16W (1608)
R218	1-216-864-11	s	RESISTOR,CHIP 0 1/16W (1608)
R219	1-216-864-11	s	RESISTOR,CHIP 0 1/16W (1608)
R220	1-216-864-11	s	RESISTOR,CHIP 0 1/16W (1608)
R221	1-216-864-11	s	RESISTOR,CHIP 0 1/16W (1608)
R222	1-216-864-11	s	RESISTOR,CHIP 0 1/16W (1608)
R223	1-216-864-11	s	RESISTOR,CHIP 0 1/16W (1608)
R224	1-216-864-11	s	RESISTOR,CHIP 0 1/16W (1608)
R225	1-216-864-11	s	RESISTOR,CHIP 0 1/16W (1608)
R306	1-216-833-11	s	RESISTOR,CHIP 10K 1/16W 1608
R307	1-216-833-11	s	RESISTOR,CHIP 10K 1/16W 1608
R308	1-216-829-11	s	RESISTOR, CHIP 4.7K 1/16W 1608
R309	1-216-805-11	s	RESISTOR,CHIP 47 1/16W 1608
R310	1-216-817-11	s	RESISTOR,CHIP 470 1/16W 1608
R311	1-216-845-11	s	RESISTOR,CHIP 100K 1/16W(1608)
R312 *1	1-216-864-11	s	RESISTOR,CHIP 0 1/16W (1608)
R313	1-216-845-11	s	RESISTOR,CHIP 100K 1/16W(1608)
R314	1-216-833-11	s	RESISTOR,CHIP 10K 1/16W 1608
R315 *1	1-216-864-11	s	RESISTOR,CHIP 0 1/16W (1608)
R320	1-216-809-11	s	RESISTOR,CHIP 100 1/16W 1608
R321	1-216-833-11	s	RESISTOR,CHIP 10K 1/16W 1608
R322	1-216-833-11	s	RESISTOR,CHIP 10K 1/16W 1608
R323	1-216-833-11	s	RESISTOR,CHIP 10K 1/16W 1608
R324	1-216-833-11	s	RESISTOR,CHIP 10K 1/16W 1608

(IF-763 BOARD(DSBK-190))

Ref. No. or Q'ty	Part No.	SP	Description
R325	1-216-833-11	s	RESISTOR,CHIP 10K 1/16W 1608
R328	1-216-864-11	s	RESISTOR,CHIP 0 1/16W (1608)
R329	1-216-809-11	s	RESISTOR,CHIP 100 1/16W 1608
R330	1-216-864-11	s	RESISTOR,CHIP 0 1/16W (1608)
R331 *2	1-216-821-11	s	RESISTOR,CHIP 1.0K 1/16W(1608)
R401	1-216-833-11	s	RESISTOR,CHIP 10K 1/16W 1608
R402	1-216-833-11	s	RESISTOR,CHIP 10K 1/16W 1608
R403	1-216-833-11	s	RESISTOR,CHIP 10K 1/16W 1608
R404	1-218-873-11	s	RESISTOR,CHIP 12K 1/16W (1608)
R405	1-216-857-11	s	RESISTOR, CHIP 1.0M 1/16W 1608
R406	1-218-873-11	s	RESISTOR,CHIP 12K 1/16W (1608)
R407	1-216-833-11	s	RESISTOR,CHIP 10K 1/16W 1608
R408	1-216-833-11	s	RESISTOR,CHIP 10K 1/16W 1608
R409	1-211-987-11	s	RESISTOR,CHIP 56 1/16W (1608)
R410	1-211-987-11	s	RESISTOR,CHIP 56 1/16W (1608)
R411	1-211-987-11	s	RESISTOR,CHIP 56 1/16W (1608)
R412	1-211-987-11	s	RESISTOR,CHIP 56 1/16W (1608)
R413	1-216-821-11	s	RESISTOR,CHIP 1.0K 1/16W(1608)
R414	1-216-845-11	s	RESISTOR,CHIP 100K 1/16W(1608)
R415	1-216-833-11	s	RESISTOR,CHIP 10K 1/16W 1608
R416	1-216-833-11	s	RESISTOR,CHIP 10K 1/16W 1608
R417	1-216-845-11	s	RESISTOR,CHIP 100K 1/16W(1608)
R418	1-216-845-11	s	RESISTOR,CHIP 100K 1/16W(1608)
RB1	1-239-389-11	s	RESISTOR,NETWORK 47K (1608)
RB2	1-239-310-11	s	RESISTOR ARRAY, CHIP 220K
X1	1-767-636-11	s	VIBRATOR, CRYSTAL
X301	1-767-449-11	s	VIBRATOR, CRYSTAL
X401	1-579-922-11	s	VIBRATOR, CERAMIC (CHIP TYPE)

IF-778 BOARD(DSBK-200)

Ref. No. or Q'ty	Part No.	SP	Description
1pc	A-8324-145-A	o	MOUNTED CIRCUIT BOARD, IF-778
C1	1-124-589-11	s	CAPACITOR,ELECT 47MF/16V
C2	1-124-229-00	s	CAPACITOR,ELECT 33MF/10V
C3	1-163-038-91	s	CAPACITOR, CERAMIC 0.1MF/25V
C4	1-163-038-91	s	CAPACITOR, CERAMIC 0.1MF/25V
CN1	1-564-695-21	o	CONNECTOR,RIBBON CABLE 16P
CN2	1-564-009-11	o	PIN,CONNECTOR 10P
F1	⚠ 1-533-950-11	s	FUSE, CHIP
FL1	1-236-058-11	s	FILTER, EMI
FL2	1-236-058-11	s	FILTER, EMI
FL3	1-236-058-11	s	FILTER, EMI
FL4	1-236-058-11	s	FILTER, EMI
FL5	1-236-058-11	s	FILTER, EMI
FL6	1-236-058-11	s	FILTER, EMI
FL7	1-236-058-11	s	FILTER, EMI
FL8	1-236-058-11	s	FILTER, EMI
IC1	8-749-930-52	s	IC SI-3052V
LF1	1-421-773-11	s	FILTER,NOISE REMOVAL
R5	1-216-065-91	s	RESISTOR,CHIP 4.7K (2012)

KY-452 BOARD(DSR-2000/2000P)

*1: Board No. suffix 11
*2: Board No. suffix 13 -
*3: Board No. suffix 13
*4: Board No. suffix 11 - 13
*5: Board No. suffix 14 -

*a: Lot No. 907 - 908

Ref. No. or Q'ty	Part No.	SP	Description
1pc	A-8323-492-A	o	MOUNTED CIRCUIT BOARD, KY-452
1pc	3-708-877-01	s	CAP (PC)
1pc	3-708-933-01	s	CAP (PC)
C2	1-163-038-91	s	CAPACITOR, CERAMIC 0.1MF/25V
C3	1-126-396-11	s	CAPACITOR,ELECT 47MF/16V(CHIP)
C7	1-163-257-11	s	CAPACITOR CERAMIC 180PF/50V
C8	1-163-257-11	s	CAPACITOR CERAMIC 180PF/50V
C9	1-163-257-11	s	CAPACITOR CERAMIC 180PF/50V
C10	1-163-257-11	s	CAPACITOR CERAMIC 180PF/50V
C11	*2 1-163-038-91	s	CAPACITOR, CERAMIC 0.1MF/25V
C12	1-163-038-91	s	CAPACITOR, CERAMIC 0.1MF/25V
C15	1-163-133-00	s	CAPACITOR,CHIP CERAMIC 470PF
C16	1-163-038-91	s	CAPACITOR, CERAMIC 0.1MF/25V
C17	1-128-393-11	s	CAPACITOR,ELECT 100MF/10V
C18	1-163-038-91	s	CAPACITOR, CERAMIC 0.1MF/25V
C19	1-163-038-91	s	CAPACITOR, CERAMIC 0.1MF/25V
C20	1-163-038-91	s	CAPACITOR, CERAMIC 0.1MF/25V
C21	1-163-133-00	s	CAPACITOR,CHIP CERAMIC 470PF
C22	1-126-393-11	s	CAPACITOR ELECT 33MF/10V(CHIP)
C23	1-163-038-91	s	CAPACITOR, CERAMIC 0.1MF/25V
C24	*2 1-163-038-91	s	CAPACITOR, CERAMIC 0.1MF/25V
C25	*2 1-163-038-91	s	CAPACITOR, CERAMIC 0.1MF/25V
C26	*5 1-163-038-91	s	CAPACITOR, CERAMIC 0.1MF/25V
	*2 1-161-485-00	s	CAPACITOR, CERAMIC 0.1MF/50V
C27	*5 1-163-038-91	s	CAPACITOR, CERAMIC 0.1MF/25V
	*2 1-164-156-11	s	CAPACITOR, CERAMIC 0.1MF/25V F
C28	*5 1-163-038-91	s	CAPACITOR, CERAMIC 0.1MF/25V
	*2 1-164-156-11	S	CAPACITOR, CERAMIC 0.1MF/25V F
C29	*5 1-163-038-91	s	CAPACITOR, CERAMIC 0.1MF/25V
	*2 1-164-156-11	s	CAPACITOR, CERAMIC 0.1MF/25V F
C30	*5 1-163-038-91	s	CAPACITOR, CERAMIC 0.1MF/25V
	*2 1-164-156-11	s	CAPACITOR, CERAMIC 0.1MF/25V F
C31	*5 1-163-038-91	s	CAPACITOR, CERAMIC 0.1MF/25V
	*2 1-164-156-11	s	CAPACITOR, CERAMIC 0.1MF/25V F
C201	1-163-038-91	s	CAPACITOR, CERAMIC 0.1MF/25V
C301	1-126-394-11	s	CAPACITOR,ELECT 10MF/16V(CHIP)
C302	1-126-394-11	s	CAPACITOR,ELECT 10MF/16V(CHIP)
C303	1-126-394-11	s	CAPACITOR,ELECT 10MF/16V(CHIP)
C304	1-126-394-11	s	CAPACITOR,ELECT 10MF/16V(CHIP)
C305	1-126-394-11	s	CAPACITOR,ELECT 10MF/16V(CHIP)
C306	1-126-394-11	s	CAPACITOR,ELECT 10MF/16V(CHIP)
C307	1-126-394-11	s	CAPACITOR,ELECT 10MF/16V(CHIP)
C308	1-126-394-11	s	CAPACITOR,ELECT 10MF/16V(CHIP)
C309	1-126-394-11	s	CAPACITOR,ELECT 10MF/16V(CHIP)
C310	1-126-394-11	s	CAPACITOR,ELECT 10MF/16V(CHIP)
C311	1-126-394-11	s	CAPACITOR,ELECT 10MF/16V(CHIP)
C312	1-126-394-11	s	CAPACITOR,ELECT 10MF/16V(CHIP)
C313	1-126-394-11	s	CAPACITOR,ELECT 10MF/16V(CHIP)
C314	1-126-394-11	s	CAPACITOR,ELECT 10MF/16V(CHIP)
C315	1-126-394-11	s	CAPACITOR,ELECT 10MF/16V(CHIP)
C316	1-126-394-11	s	CAPACITOR,ELECT 10MF/16V(CHIP)
C317	1-126-394-11	s	CAPACITOR,ELECT 10MF/16V(CHIP)

(KY-452 BOARD(DSR-2000/2000P))

Ref. No. or Q'ty	Part No.	SP	Description
C318	1-126-394-11	s	CAPACITOR,ELECT 10MF/16V(CHIP)
C319	1-126-394-11	s	CAPACITOR,ELECT 10MF/16V(CHIP)
C320	1-126-394-11	s	CAPACITOR,ELECT 10MF/16V(CHIP)
C321	1-126-394-11	s	CAPACITOR,ELECT 10MF/16V(CHIP)
C322	1-126-394-11	s	CAPACITOR,ELECT 10MF/16V(CHIP)
C323	1-126-394-11	s	CAPACITOR,ELECT 10MF/16V(CHIP)
C324	1-126-394-11	s	CAPACITOR,ELECT 10MF/16V(CHIP)
C325	1-126-394-11	s	CAPACITOR,ELECT 10MF/16V(CHIP)
C326	1-126-394-11	s	CAPACITOR,ELECT 10MF/16V(CHIP)
C327	1-126-394-11	s	CAPACITOR,ELECT 10MF/16V(CHIP)
C328	1-126-394-11	s	CAPACITOR,ELECT 10MF/16V(CHIP)
C329	1-126-394-11	s	CAPACITOR,ELECT 10MF/16V(CHIP)
C330	1-126-394-11	s	CAPACITOR,ELECT 10MF/16V(CHIP)
C331	1-126-394-11	s	CAPACITOR,ELECT 10MF/16V(CHIP)
C333	1-126-394-11	s	CAPACITOR,ELECT 10MF/16V(CHIP)
C334	1-126-394-11	s	CAPACITOR,ELECT 10MF/16V(CHIP)
C335	1-126-394-11	s	CAPACITOR,ELECT 10MF/16V(CHIP)
C336	1-163-038-91	s	CAPACITOR, CERAMIC 0.1MF/25V
C337	1-126-394-11	s	CAPACITOR,ELECT 10MF/16V(CHIP)
C338	1-126-394-11	s	CAPACITOR,ELECT 10MF/16V(CHIP)
C339	1-126-394-11	s	CAPACITOR,ELECT 10MF/16V(CHIP)
C340	1-126-394-11	s	CAPACITOR,ELECT 10MF/16V(CHIP)
C341	1-126-394-11	s	CAPACITOR,ELECT 10MF/16V(CHIP)
C342	1-126-394-11	s	CAPACITOR,ELECT 10MF/16V(CHIP)
C343	1-126-394-11	s	CAPACITOR,ELECT 10MF/16V(CHIP)
C344	1-126-394-11	s	CAPACITOR,ELECT 10MF/16V(CHIP)
C345	1-126-394-11	s	CAPACITOR,ELECT 10MF/16V(CHIP)
C346	1-126-394-11	s	CAPACITOR,ELECT 10MF/16V(CHIP)
C347	1-126-394-11	s	CAPACITOR,ELECT 10MF/16V(CHIP)
C501	1-163-251-11	s	CAPACITOR CERAMIC 100PF/50V
C502	1-163-251-11	s	CAPACITOR CERAMIC 100PF/50V
C503	1-163-251-11	s	CAPACITOR CERAMIC 100PF/50V
C504	1-163-251-11	s	CAPACITOR CERAMIC 100PF/50V
C505	1-163-251-11	s	CAPACITOR CERAMIC 100PF/50V
C506	1-163-251-11	s	CAPACITOR CERAMIC 100PF/50V
C507	1-163-251-11	s	CAPACITOR CERAMIC 100PF/50V
C508	1-163-251-11	s	CAPACITOR CERAMIC 100PF/50V
C509	1-163-251-11	s	CAPACITOR CERAMIC 100PF/50V
C510	1-163-251-11	s	CAPACITOR CERAMIC 100PF/50V
C511	1-163-251-11	s	CAPACITOR CERAMIC 100PF/50V
C512	1-163-251-11	s	CAPACITOR CERAMIC 100PF/50V
C513	1-163-251-11	s	CAPACITOR CERAMIC 100PF/50V
C514	1-163-251-11	s	CAPACITOR CERAMIC 100PF/50V
C515	1-163-251-11	s	CAPACITOR CERAMIC 100PF/50V
C516	1-163-251-11	s	CAPACITOR CERAMIC 100PF/50V
C517	1-163-251-11	s	CAPACITOR CERAMIC 100PF/50V
C518	1-163-251-11	s	CAPACITOR CERAMIC 100PF/50V
C519	1-163-251-11	s	CAPACITOR CERAMIC 100PF/50V
C520	1-163-251-11	s	CAPACITOR CERAMIC 100PF/50V
C521	1-163-251-11	s	CAPACITOR CERAMIC 100PF/50V
C522	1-163-251-11	s	CAPACITOR CERAMIC 100PF/50V
C523	1-163-251-11	s	CAPACITOR CERAMIC 100PF/50V
C524	1-163-251-11	s	CAPACITOR CERAMIC 100PF/50V
C525	1-163-251-11	s	CAPACITOR CERAMIC 100PF/50V
C526	1-163-251-11	s	CAPACITOR CERAMIC 100PF/50V
C527	1-163-251-11	s	CAPACITOR CERAMIC 100PF/50V
C528	1-163-251-11	s	CAPACITOR CERAMIC 100PF/50V
C529	1-163-251-11	s	CAPACITOR CERAMIC 100PF/50V
C530	1-163-251-11	s	CAPACITOR CERAMIC 100PF/50V
C531	1-163-251-11	s	CAPACITOR CERAMIC 100PF/50V

(KY-452 BOARD(DSR-2000/2000P))

Ref. No. or Q'ty	Part No.	SP	Description
C532	1-163-251-11	s	CAPACITOR CERAMIC 100PF/50V
C533	1-163-251-11	s	CAPACITOR CERAMIC 100PF/50V
C534	1-163-251-11	s	CAPACITOR CERAMIC 100PF/50V
C535	1-163-251-11	s	CAPACITOR CERAMIC 100PF/50V
C536	1-163-251-11	s	CAPACITOR CERAMIC 100PF/50V
C537	1-163-251-11	s	CAPACITOR CERAMIC 100PF/50V
C538	1-163-251-11	s	CAPACITOR CERAMIC 100PF/50V
C539	1-163-251-11	s	CAPACITOR CERAMIC 100PF/50V
C540	1-163-251-11	s	CAPACITOR CERAMIC 100PF/50V
C541	1-163-251-11	s	CAPACITOR CERAMIC 100PF/50V
C542	1-163-251-11	s	CAPACITOR CERAMIC 100PF/50V
C543	1-163-251-11	s	CAPACITOR CERAMIC 100PF/50V
C544	1-163-251-11	s	CAPACITOR CERAMIC 100PF/50V
C545	1-163-251-11	s	CAPACITOR CERAMIC 100PF/50V
C546	1-163-251-11	s	CAPACITOR CERAMIC 100PF/50V
C547	1-163-251-11	s	CAPACITOR CERAMIC 100PF/50V
C548	1-163-251-11	s	CAPACITOR CERAMIC 100PF/50V
C549	1-163-251-11	s	CAPACITOR CERAMIC 100PF/50V
C550	1-163-251-11	s	CAPACITOR CERAMIC 100PF/50V
C551	1-128-399-11	s	CAPACITOR ELECT 330MF/16V(CHIP)
C552	1-163-021-91	s	CAPACITOR, CERAMIC 0.01MF/50V
C553	1-128-405-11	s	CAPACITOR.ELECT 22MF/50V(CHIP)
C554 *2	1-128-405-11	s	CAPACITOR.ELECT 22MF/50V(CHIP)
C555 *2	1-128-405-11	s	CAPACITOR.ELECT 22MF/50V(CHIP)
CN710	1-563-018-11	o	CONNECTOR,F.P.C 34P
CN711	1-564-005-11	o	PIN, CONNECTOR 6P
CN712	1-506-474-11	s	PIN,CONNECTOR 9P
CN713	1-691-395-11	s	CONNECTOR,FPC 6P
CN714	1-691-395-11	s	CONNECTOR,FPC 6P
D201	8-719-024-81	s	DIODE 1SS300-TE85L
D202	8-719-024-81	s	DIODE 1SS300-TE85L
D203	8-719-024-81	s	DIODE 1SS300-TE85L
D204	8-719-024-81	s	DIODE 1SS300-TE85L
D205	8-719-024-81	s	DIODE 1SS300-TE85L
D206	8-719-024-81	s	DIODE 1SS300-TE85L
D207	8-719-024-81	s	DIODE 1SS300-TE85L
D208	8-719-024-81	s	DIODE 1SS300-TE85L
D209	8-719-024-81	s	DIODE 1SS300-TE85L
D210	8-719-024-81	s	DIODE 1SS300-TE85L
D211	8-719-024-81	s	DIODE 1SS300-TE85L
D212	8-719-024-81	s	DIODE 1SS300-TE85L
D213	8-719-024-81	s	DIODE 1SS300-TE85L
D215	8-719-024-81	s	DIODE 1SS300-TE85L
D216	8-719-024-81	s	DIODE 1SS300-TE85L
D217	8-719-024-81	s	DIODE 1SS300-TE85L
D218	8-719-024-81	s	DIODE 1SS300-TE85L
D219	8-719-024-81	s	DIODE 1SS300-TE85L
D221	8-719-024-81	s	DIODE 1SS300-TE85L
D222	8-719-024-81	s	DIODE 1SS300-TE85L
D223	8-719-024-81	s	DIODE 1SS300-TE85L
D224	8-719-024-81	s	DIODE 1SS300-TE85L
D225	8-719-024-81	s	DIODE 1SS300-TE85L
D226	8-719-024-81	s	DIODE 1SS300-TE85L
D227	8-719-024-81	s	DIODE 1SS300-TE85L
D301	8-719-989-53	s	LED CL-200HR-C-TSL
D302	8-719-061-59	s	LED CL-200PG-C-TU
D303	8-719-061-58	s	LED CL-200Y-C-TU
D304	8-719-989-53	s	LED CL-200HR-C-TSL
D501	8-719-110-02	s	DIODE RD7.5ES-B1

(KY-452 BOARD(DSR-2000/2000P))

Ref. No. or Q'ty	Part No.	SP	Description
D502	8-719-110-22	s	DIODE RD11ES-B2
D503	8-719-108-24	s	DIODE 1SS223
D504	8-719-110-22	s	DIODE RD11ES-B2
D505	8-719-110-22	s	DIODE RD11ES-B2
D506	8-719-033-28	s	DIODE EC11FS4-TE12
D507	8-719-110-04	s	DIODE RD7.5ES-B3
F1	⚠ 1-533-950-11	s	FUSE, CHIP
IC1	8-759-664-61	o	IC XC9536VQ44-DSR2000-JOG-V101
IC2	8-759-327-80	s	IC S-80745SN-D9-T1
IC3	8-759-186-44	s	IC TC74VHC125F
IC5	8-759-664-34	s	IC UPD780204GF-065-3BA
IC6	8-759-271-86	s	IC TC7SH04FU
IC201	8-759-186-47	s	IC TC74VHC138F
IC301	8-759-051-53	s	IC TD62381F
L1	1-406-823-11	s	COIL, CHOKE 10UH
L4	1-406-824-11	s	COIL, CHOKE 22UH
ND501	1-517-922-11	o	INDICATOR TUBE, FLUORESCENT
PS2	⚠ 1-576-259-11	s	LINK,IC 0.6A (3225)
Q201	8-729-028-81	s	TRANSISTOR DTA123JUA-T106
Q202	8-729-028-81	s	TRANSISTOR DTA123JUA-T106
Q203	8-729-028-81	s	TRANSISTOR DTA123JUA-T106
Q204	8-729-028-81	s	TRANSISTOR DTA123JUA-T106
Q205	8-729-028-81	s	TRANSISTOR DTA123JUA-T106
Q206	8-729-028-81	s	TRANSISTOR DTA123JUA-T106
Q207	8-729-028-81	s	TRANSISTOR DTA123JUA-T106
Q301	8-729-029-04	s	TRANSISTOR DTC123JUA-T106
Q302	8-729-140-63	s	TRANSISTOR 2SA1611-M5M6
Q303	8-729-028-74	s	TRANSISTOR DTA114TUA-T106
Q304	8-729-028-74	s	TRANSISTOR DTA114TUA-T106
Q305	8-729-028-74	s	TRANSISTOR DTA114TUA-T106
Q306	8-729-028-74	s	TRANSISTOR DTA114TUA-T106
Q307	8-729-028-74	s	TRANSISTOR DTA114TUA-T106
Q308	8-729-029-04	s	TRANSISTOR DTC123JUA-T106
Q309	8-729-117-32	s	TRANSISTOR 2SC4177
Q310	8-729-117-32	s	TRANSISTOR 2SC4177
Q311	8-729-117-32	s	TRANSISTOR 2SC4177
Q312	8-729-117-32	s	TRANSISTOR 2SC4177
Q313	8-729-117-32	s	TRANSISTOR 2SC4177
Q314	8-729-140-63	s	TRANSISTOR 2SA1611-M5M6
Q315	8-729-028-74	s	TRANSISTOR DTA114TUA-T106
Q316	8-729-028-74	s	TRANSISTOR DTA114TUA-T106
Q317	8-729-028-74	s	TRANSISTOR DTA114TUA-T106
Q318	8-729-028-74	s	TRANSISTOR DTA114TUA-T106
Q319	8-729-028-74	s	TRANSISTOR DTA114TUA-T106
Q320	8-729-029-04	s	TRANSISTOR DTC123JUA-T106
Q321	8-729-117-32	s	TRANSISTOR 2SC4177
Q322	8-729-117-32	s	TRANSISTOR 2SC4177
Q323	8-729-117-32	s	TRANSISTOR 2SC4177
Q324	8-729-117-32	s	TRANSISTOR 2SC4177
Q325	8-729-117-32	s	TRANSISTOR 2SC4177
Q326	8-729-140-63	s	TRANSISTOR 2SA1611-M5M6
Q327	8-729-028-74	s	TRANSISTOR DTA114TUA-T106
Q328	8-729-028-74	s	TRANSISTOR DTA114TUA-T106
Q329	8-729-028-74	s	TRANSISTOR DTA114TUA-T106
Q330	8-729-028-74	s	TRANSISTOR DTA114TUA-T106

(KY-452 BOARD(DSR-2000/2000P))

Ref. No. or Q'ty	Part No.	SP	Description
Q331	8-729-028-74	s	TRANSISTOR DTA114TUA-T106
Q332	8-729-029-04	s	TRANSISTOR DTC123JUA-T106
Q333	8-729-117-32	s	TRANSISTOR 2SC4177
Q334	8-729-117-32	s	TRANSISTOR 2SC4177
Q335	8-729-117-32	s	TRANSISTOR 2SC4177
Q336	8-729-117-32	s	TRANSISTOR 2SC4177
Q337	8-729-117-32	s	TRANSISTOR 2SC4177
Q338	8-729-140-63	s	TRANSISTOR 2SA1611-M5M6
Q339	8-729-028-74	s	TRANSISTOR DTA114TUA-T106
Q340	8-729-028-74	s	TRANSISTOR DTA114TUA-T106
Q341	8-729-028-74	s	TRANSISTOR DTA114TUA-T106
Q342	8-729-028-74	s	TRANSISTOR DTA114TUA-T106
Q343	8-729-028-74	s	TRANSISTOR DTA114TUA-T106
Q344	8-729-029-04	s	TRANSISTOR DTC123JUA-T106
Q345	8-729-117-32	s	TRANSISTOR 2SC4177
Q346	8-729-117-32	s	TRANSISTOR 2SC4177
Q347	8-729-117-32	s	TRANSISTOR 2SC4177
Q348	8-729-117-32	s	TRANSISTOR 2SC4177
Q349	8-729-117-32	s	TRANSISTOR 2SC4177
Q350	8-729-140-63	s	TRANSISTOR 2SA1611-M5M6
Q351	8-729-028-74	s	TRANSISTOR DTA114TUA-T106
Q352	8-729-028-74	s	TRANSISTOR DTA114TUA-T106
Q353	8-729-028-74	s	TRANSISTOR DTA114TUA-T106
Q354	8-729-029-04	s	TRANSISTOR DTC123JUA-T106
Q355	8-729-117-32	s	TRANSISTOR 2SC4177
Q356	8-729-117-32	s	TRANSISTOR 2SC4177
Q357	8-729-117-32	s	TRANSISTOR 2SC4177
Q358	8-729-140-63	s	TRANSISTOR 2SA1611-M5M6
Q359	8-729-028-74	s	TRANSISTOR DTA114TUA-T106
Q360	8-729-028-74	s	TRANSISTOR DTA114TUA-T106
Q361	8-729-028-74	s	TRANSISTOR DTA114TUA-T106
Q362	8-729-029-04	s	TRANSISTOR DTC123JUA-T106
Q363	8-729-117-32	s	TRANSISTOR 2SC4177
Q364	8-729-117-32	s	TRANSISTOR 2SC4177
Q365	8-729-117-32	s	TRANSISTOR 2SC4177
Q366	8-729-140-63	s	TRANSISTOR 2SA1611-M5M6
Q367	8-729-028-74	s	TRANSISTOR DTA114TUA-T106
Q368	8-729-028-74	s	TRANSISTOR DTA114TUA-T106
Q369	8-729-028-74	s	TRANSISTOR DTA114TUA-T106
Q370	8-729-028-74	s	TRANSISTOR DTA114TUA-T106
Q371	8-729-029-04	s	TRANSISTOR DTC123JUA-T106
Q372	8-729-117-32	s	TRANSISTOR 2SC4177
Q373	8-729-117-32	s	TRANSISTOR 2SC4177
Q374	8-729-117-32	s	TRANSISTOR 2SC4177
Q375	8-729-117-32	s	TRANSISTOR 2SC4177
Q376	8-729-140-63	s	TRANSISTOR 2SA1611-M5M6
Q377	8-729-028-74	s	TRANSISTOR DTA114TUA-T106
Q379	8-729-028-74	s	TRANSISTOR DTA114TUA-T106
Q380	8-729-028-74	s	TRANSISTOR DTA114TUA-T106
Q381	8-729-028-74	s	TRANSISTOR DTA114TUA-T106
Q382	8-729-117-32	s	TRANSISTOR 2SC4177
Q384	8-729-117-32	s	TRANSISTOR 2SC4177
Q385	8-729-117-32	s	TRANSISTOR 2SC4177
Q386	8-729-117-32	s	TRANSISTOR 2SC4177
Q387	8-729-028-74	s	TRANSISTOR DTA114TUA-T106
Q388	8-729-028-74	s	TRANSISTOR DTA114TUA-T106
Q389	8-729-028-74	s	TRANSISTOR DTA114TUA-T106
Q390	8-729-028-74	s	TRANSISTOR DTA114TUA-T106
Q391	8-729-028-74	s	TRANSISTOR DTA114TUA-T106

(KY-452 BOARD(DSR-2000/2000P))

Ref. No. or Q'ty	Part No.	SP	Description
Q392	8-729-028-74	s	TRANSISTOR DTA114TUA-T106
Q393	8-729-028-74	s	TRANSISTOR DTA114TUA-T106
Q394	8-729-028-74	s	TRANSISTOR DTA114TUA-T106
Q395	8-729-028-74	s	TRANSISTOR DTA114TUA-T106
Q396	8-729-028-74	s	TRANSISTOR DTA114TUA-T106
Q397	8-729-028-74	s	TRANSISTOR DTA114TUA-T106
Q398	8-729-117-32	s	TRANSISTOR 2SC4177
Q399	8-729-117-32	s	TRANSISTOR 2SC4177
Q400	8-729-117-32	s	TRANSISTOR 2SC4177
Q401	8-729-117-32	s	TRANSISTOR 2SC4177
Q402	8-729-117-32	s	TRANSISTOR 2SC4177
Q403	8-729-117-32	s	TRANSISTOR 2SC4177
Q404	8-729-117-32	s	TRANSISTOR 2SC4177
Q405	8-729-117-32	s	TRANSISTOR 2SC4177
Q406	8-729-117-32	s	TRANSISTOR 2SC4177
Q407	8-729-117-32	s	TRANSISTOR 2SC4177
Q408	8-729-117-32	s	TRANSISTOR 2SC4177
Q501	8-729-019-87	s	TRANSISTOR 2SC3392-6-TB
Q502	8-729-216-22	s	TRANSISTOR 2SA1162-G
Q503	8-729-019-87	s	TRANSISTOR 2SC3392-6-TB
Q504	8-729-216-22	s	TRANSISTOR 2SA1162-G
Q505	8-729-019-87	s	TRANSISTOR 2SC3392-6-TB
Q506	8-729-216-22	s	TRANSISTOR 2SA1162-G
Q507	8-729-019-87	s	TRANSISTOR 2SC3392-6-TB
Q508	8-729-216-22	s	TRANSISTOR 2SA1162-G
Q509	8-729-019-87	s	TRANSISTOR 2SC3392-6-TB
Q510	8-729-216-22	s	TRANSISTOR 2SA1162-G
Q511	8-729-019-87	s	TRANSISTOR 2SC3392-6-TB
Q512	8-729-216-22	s	TRANSISTOR 2SA1162-G
Q513	8-729-019-87	s	TRANSISTOR 2SC3392-6-TB
Q514	8-729-216-22	s	TRANSISTOR 2SA1162-G
Q515	8-729-019-87	s	TRANSISTOR 2SC3392-6-TB
Q516	8-729-216-22	s	TRANSISTOR 2SA1162-G
Q517	8-729-019-87	s	TRANSISTOR 2SC3392-6-TB
Q518	8-729-216-22	s	TRANSISTOR 2SA1162-G
Q519	8-729-019-87	s	TRANSISTOR 2SC3392-6-TB
Q520	8-729-216-22	s	TRANSISTOR 2SA1162-G
Q521	8-729-019-87	s	TRANSISTOR 2SC3392-6-TB
Q522	8-729-216-22	s	TRANSISTOR 2SA1162-G
Q523	8-729-019-87	s	TRANSISTOR 2SC3392-6-TB
Q524	8-729-216-22	s	TRANSISTOR 2SA1162-G
Q525	8-729-019-87	s	TRANSISTOR 2SC3392-6-TB
Q526	8-729-216-22	s	TRANSISTOR 2SA1162-G
Q527	8-729-019-87	s	TRANSISTOR 2SC3392-6-TB
Q528	8-729-216-22	s	TRANSISTOR 2SA1162-G
Q529	8-729-019-87	s	TRANSISTOR 2SC3392-6-TB
Q530	8-729-216-22	s	TRANSISTOR 2SA1162-G
Q531	8-729-019-87	s	TRANSISTOR 2SC3392-6-TB
Q532	8-729-216-22	s	TRANSISTOR 2SA1162-G
Q533	8-729-019-87	s	TRANSISTOR 2SC3392-6-TB
Q534	8-729-216-22	s	TRANSISTOR 2SA1162-G
Q535	8-729-019-87	s	TRANSISTOR 2SC3392-6-TB
Q536	8-729-216-22	s	TRANSISTOR 2SA1162-G
Q537	8-729-019-87	s	TRANSISTOR 2SC3392-6-TB
Q538	8-729-216-22	s	TRANSISTOR 2SA1162-G
Q539	8-729-019-87	s	TRANSISTOR 2SC3392-6-TB
Q540	8-729-216-22	s	TRANSISTOR 2SA1162-G
Q541	8-729-019-87	s	TRANSISTOR 2SC3392-6-TB
Q542	8-729-216-22	s	TRANSISTOR 2SA1162-G

(KY-452 BOARD(DSR-2000/2000P))

Ref. No. or Q'ty	Part No.	SP	Description
Q543	8-729-019-87	s	TRANSISTOR 2SC3392-6-TB
Q544	8-729-216-22	s	TRANSISTOR 2SA1162-G
Q545	8-729-019-87	s	TRANSISTOR 2SC3392-6-TB
Q546	8-729-216-22	s	TRANSISTOR 2SA1162-G
Q547	8-729-019-87	s	TRANSISTOR 2SC3392-6-TB
Q548	8-729-216-22	s	TRANSISTOR 2SA1162-G
Q549	8-729-019-87	s	TRANSISTOR 2SC3392-6-TB
Q550	8-729-216-22	s	TRANSISTOR 2SA1162-G
Q551	8-729-019-87	s	TRANSISTOR 2SC3392-6-TB
Q552	8-729-216-22	s	TRANSISTOR 2SA1162-G
Q553	8-729-019-87	s	TRANSISTOR 2SC3392-6-TB
Q554	8-729-216-22	s	TRANSISTOR 2SA1162-G
Q555	8-729-019-87	s	TRANSISTOR 2SC3392-6-TB
Q556	8-729-216-22	s	TRANSISTOR 2SA1162-G
Q557	8-729-019-87	s	TRANSISTOR 2SC3392-6-TB
Q558	8-729-216-22	s	TRANSISTOR 2SA1162-G
Q559	8-729-019-87	s	TRANSISTOR 2SC3392-6-TB
Q560	8-729-216-22	s	TRANSISTOR 2SA1162-G
Q561	8-729-019-87	s	TRANSISTOR 2SC3392-6-TB
Q562	8-729-216-22	s	TRANSISTOR 2SA1162-G
Q563	8-729-019-87	s	TRANSISTOR 2SC3392-6-TB
Q564	8-729-216-22	s	TRANSISTOR 2SA1162-G
Q565	8-729-019-87	s	TRANSISTOR 2SC3392-6-TB
Q566	8-729-216-22	s	TRANSISTOR 2SA1162-G
Q567	8-729-019-87	s	TRANSISTOR 2SC3392-6-TB
Q568	8-729-216-22	s	TRANSISTOR 2SA1162-G
Q569	8-729-019-87	s	TRANSISTOR 2SC3392-6-TB
Q570	8-729-216-22	s	TRANSISTOR 2SA1162-G
Q571	8-729-019-87	s	TRANSISTOR 2SC3392-6-TB
Q572	8-729-216-22	s	TRANSISTOR 2SA1162-G
Q573	8-729-019-87	s	TRANSISTOR 2SC3392-6-TB
Q574	8-729-216-22	s	TRANSISTOR 2SA1162-G
Q575	8-729-019-87	s	TRANSISTOR 2SC3392-6-TB
Q576	8-729-216-22	s	TRANSISTOR 2SA1162-G
Q577	8-729-019-87	s	TRANSISTOR 2SC3392-6-TB
Q578	8-729-216-22	s	TRANSISTOR 2SA1162-G
Q579	8-729-019-87	s	TRANSISTOR 2SC3392-6-TB
Q580	8-729-216-22	s	TRANSISTOR 2SA1162-G
Q581	8-729-019-87	s	TRANSISTOR 2SC3392-6-TB
Q582	8-729-216-22	s	TRANSISTOR 2SA1162-G
Q583	8-729-019-87	s	TRANSISTOR 2SC3392-6-TB
Q584	8-729-216-22	s	TRANSISTOR 2SA1162-G
Q585	8-729-019-87	s	TRANSISTOR 2SC3392-6-TB
Q586	8-729-216-22	s	TRANSISTOR 2SA1162-G
Q587	8-729-019-87	s	TRANSISTOR 2SC3392-6-TB
Q588	8-729-216-22	s	TRANSISTOR 2SA1162-G
Q589	8-729-019-87	s	TRANSISTOR 2SC3392-6-TB
Q590	8-729-216-22	s	TRANSISTOR 2SA1162-G
Q591	8-729-019-87	s	TRANSISTOR 2SC3392-6-TB
Q592	8-729-216-22	s	TRANSISTOR 2SA1162-G
Q593	8-729-019-87	s	TRANSISTOR 2SC3392-6-TB
Q594	8-729-216-22	s	TRANSISTOR 2SA1162-G
Q595	8-729-019-87	s	TRANSISTOR 2SC3392-6-TB
Q596	8-729-216-22	s	TRANSISTOR 2SA1162-G
Q597	8-729-019-87	s	TRANSISTOR 2SC3392-6-TB
Q598	8-729-216-22	s	TRANSISTOR 2SA1162-G
Q599	8-729-019-87	s	TRANSISTOR 2SC3392-6-TB
Q600	8-729-216-22	s	TRANSISTOR 2SA1162-G
Q601	8-729-230-49	s	TRANSISTOR 2SC2712-YG

(KY-452 BOARD(DSR-2000/2000P))

Ref. No. or Q'ty	Part No.	SP	Description
Q602	8-729-202-37	s	TRANSISTOR 2SC3303-Y
R2	1-216-025-91	s	RESISTOR,CHIP 100 1/10W(2125)
R3	1-216-025-91	s	RESISTOR,CHIP 100 1/10W(2125)
R4	1-216-025-91	s	RESISTOR,CHIP 100 1/10W(2125)
R5	1-216-025-91	s	RESISTOR,CHIP 100 1/10W(2125)
R6 *2	1-216-089-91	s	RESISTOR,CHIP 47K
R8 *5	1-216-089-91	s	RESISTOR,CHIP 47K
R10	1-216-089-91	s	RESISTOR,CHIP 47K
R11	1-216-049-91	s	RESISTOR,CHIP 1K 1/10W(2125)
R22 *4	1-216-089-91	s	RESISTOR,CHIP 47K
R25	1-216-049-91	s	RESISTOR,CHIP 1K 1/10W(2125)
R27	1-216-089-91	s	RESISTOR,CHIP 47K
R28	1-216-089-91	s	RESISTOR,CHIP 47K
R30 *1	1-216-089-91	s	RESISTOR,CHIP 47K
R33	1-216-025-91	s	RESISTOR,CHIP 100 1/10W(2125)
R34	1-216-025-91	s	RESISTOR,CHIP 100 1/10W(2125)
R35 *5	1-216-089-91	s	RESISTOR,CHIP 47K
*3	1-247-871-91	s	RESISTOR,CARBON 47K 1/4W
R305	1-216-057-00	s	RESISTOR CHIP 2.2K 1/10W(2012)
R306	1-216-057-00	s	RESISTOR CHIP 2.2K 1/10W(2012)
R308	1-216-057-00	s	RESISTOR CHIP 2.2K 1/10W(2012)
R309	1-216-057-00	s	RESISTOR CHIP 2.2K 1/10W(2012)
R310	1-216-057-00	s	RESISTOR CHIP 2.2K 1/10W(2012)
R311	1-216-057-00	s	RESISTOR CHIP 2.2K 1/10W(2012)
R312	1-216-057-00	s	RESISTOR CHIP 2.2K 1/10W(2012)
R313	1-216-057-00	s	RESISTOR CHIP 2.2K 1/10W(2012)
R314	1-216-057-00	s	RESISTOR CHIP 2.2K 1/10W(2012)
R315	1-216-057-00	s	RESISTOR CHIP 2.2K 1/10W(2012)
R316	1-216-057-00	s	RESISTOR CHIP 2.2K 1/10W(2012)
R317	1-216-057-00	s	RESISTOR CHIP 2.2K 1/10W(2012)
R318	1-216-057-00	s	RESISTOR CHIP 2.2K 1/10W(2012)
R319	1-216-057-00	s	RESISTOR CHIP 2.2K 1/10W(2012)
R320	1-218-478-11	s	RESISTOR, CHIP 330 1/4W (3225)
R321	1-220-262-11	s	RESISTOR CHIP 680 1/4W (3225)
R322	1-216-049-91	s	RESISTOR,CHIP 1K 1/10W(2125)
R323	1-218-478-11	s	RESISTOR, CHIP 330 1/4W (3225)
R324	1-218-478-11	s	RESISTOR, CHIP 330 1/4W (3225)
R325	1-216-057-00	s	RESISTOR CHIP 2.2K 1/10W(2012)
R326	1-216-057-00	s	RESISTOR CHIP 2.2K 1/10W(2012)
R327	1-216-057-00	s	RESISTOR CHIP 2.2K 1/10W(2012)
R328	1-216-057-00	s	RESISTOR CHIP 2.2K 1/10W(2012)
R329	1-216-057-00	s	RESISTOR CHIP 2.2K 1/10W(2012)
R330	1-216-057-00	s	RESISTOR CHIP 2.2K 1/10W(2012)
R331	1-216-057-00	s	RESISTOR CHIP 2.2K 1/10W(2012)
R332	1-216-057-00	s	RESISTOR CHIP 2.2K 1/10W(2012)
R333	1-216-057-00	s	RESISTOR CHIP 2.2K 1/10W(2012)
R334	1-216-057-00	s	RESISTOR CHIP 2.2K 1/10W(2012)
R335	1-216-057-00	s	RESISTOR CHIP 2.2K 1/10W(2012)
R336	1-216-057-00	s	RESISTOR CHIP 2.2K 1/10W(2012)
R337	1-218-478-11	s	RESISTOR, CHIP 330 1/4W (3225)
R338	1-218-478-11	s	RESISTOR, CHIP 330 1/4W (3225)
R339	1-216-049-91	s	RESISTOR,CHIP 1K 1/10W(2125)
R340	1-218-478-11	s	RESISTOR, CHIP 330 1/4W (3225)
R341	1-218-478-11	s	RESISTOR, CHIP 330 1/4W (3225)
R342	1-216-057-00	s	RESISTOR CHIP 2.2K 1/10W(2012)
R343	1-216-057-00	s	RESISTOR CHIP 2.2K 1/10W(2012)
R344	1-216-057-00	s	RESISTOR CHIP 2.2K 1/10W(2012)
R345	1-216-057-00	s	RESISTOR CHIP 2.2K 1/10W(2012)

(KY-452 BOARD(DSR-2000/2000P))

Ref. No. or Q'ty	Part No.	SP	Description
R346	1-216-057-00	s	RESISTOR CHIP 2.2K 1/10W(2012)
R347	1-216-057-00	s	RESISTOR CHIP 2.2K 1/10W(2012)
R348	1-216-057-00	s	RESISTOR CHIP 2.2K 1/10W(2012)
R349	1-216-057-00	s	RESISTOR CHIP 2.2K 1/10W(2012)
R350	1-216-057-00	s	RESISTOR CHIP 2.2K 1/10W(2012)
R351	1-216-057-00	s	RESISTOR CHIP 2.2K 1/10W(2012)
R352	1-216-057-00	s	RESISTOR CHIP 2.2K 1/10W(2012)
R353	1-216-057-00	s	RESISTOR CHIP 2.2K 1/10W(2012)
R354	1-218-478-11	s	RESISTOR, CHIP 330 1/4W (3225)
R355	1-216-049-91	s	RESISTOR,CHIP 1K 1/10W(2125)
R356	1-216-049-91	s	RESISTOR,CHIP 1K 1/10W(2125)
R357	1-220-262-11	s	RESISTOR CHIP 680 1/4W (3225)
R358	1-218-478-11	s	RESISTOR, CHIP 330 1/4W (3225)
R359	1-216-057-00	s	RESISTOR CHIP 2.2K 1/10W(2012)
R360	1-216-057-00	s	RESISTOR CHIP 2.2K 1/10W(2012)
R361	1-216-057-00	s	RESISTOR CHIP 2.2K 1/10W(2012)
R362	1-216-057-00	s	RESISTOR CHIP 2.2K 1/10W(2012)
R363	1-216-057-00	s	RESISTOR CHIP 2.2K 1/10W(2012)
R364	1-216-057-00	s	RESISTOR CHIP 2.2K 1/10W(2012)
R365	1-216-057-00	s	RESISTOR CHIP 2.2K 1/10W(2012)
R366	1-216-057-00	s	RESISTOR CHIP 2.2K 1/10W(2012)
R367	1-216-057-00	s	RESISTOR CHIP 2.2K 1/10W(2012)
R368	1-216-057-00	s	RESISTOR CHIP 2.2K 1/10W(2012)
R369	1-216-057-00	s	RESISTOR CHIP 2.2K 1/10W(2012)
R370	1-216-057-00	s	RESISTOR CHIP 2.2K 1/10W(2012)
R371	1-218-478-11	s	RESISTOR, CHIP 330 1/4W (3225)
R372	1-216-049-91	s	RESISTOR,CHIP 1K 1/10W(2125)
R373	1-216-049-91	s	RESISTOR,CHIP 1K 1/10W(2125)
R374	1-218-478-11	s	RESISTOR, CHIP 330 1/4W (3225)
R375	1-218-478-11	s	RESISTOR, CHIP 330 1/4W (3225)
R376	1-216-057-00	s	RESISTOR CHIP 2.2K 1/10W(2012)
R377	1-216-057-00	s	RESISTOR CHIP 2.2K 1/10W(2012)
R378	1-216-057-00	s	RESISTOR CHIP 2.2K 1/10W(2012)
R379	1-216-057-00	s	RESISTOR CHIP 2.2K 1/10W(2012)
R380	1-216-057-00	s	RESISTOR CHIP 2.2K 1/10W(2012)
R381	1-216-057-00	s	RESISTOR CHIP 2.2K 1/10W(2012)
R382	1-216-057-00	s	RESISTOR CHIP 2.2K 1/10W(2012)
R383	1-216-057-00	s	RESISTOR CHIP 2.2K 1/10W(2012)
R384	1-218-478-11	s	RESISTOR, CHIP 330 1/4W (3225)
R385	1-216-049-91	s	RESISTOR,CHIP 1K 1/10W(2125)
R386	1-218-478-11	s	RESISTOR, CHIP 330 1/4W (3225)
R387	1-216-057-00	s	RESISTOR CHIP 2.2K 1/10W(2012)
R388	1-216-057-00	s	RESISTOR CHIP 2.2K 1/10W(2012)
R389	1-216-057-00	s	RESISTOR CHIP 2.2K 1/10W(2012)
R390	1-216-057-00	s	RESISTOR CHIP 2.2K 1/10W(2012)
R391	1-216-057-00	s	RESISTOR CHIP 2.2K 1/10W(2012)
R392	1-216-057-00	s	RESISTOR CHIP 2.2K 1/10W(2012)
R393	1-216-057-00	s	RESISTOR CHIP 2.2K 1/10W(2012)
R394	1-216-057-00	s	RESISTOR CHIP 2.2K 1/10W(2012)
R395	1-218-478-11	s	RESISTOR, CHIP 330 1/4W (3225)
R396	1-216-049-91	s	RESISTOR,CHIP 1K 1/10W(2125)
R397	1-216-061-00	s	RESISTOR CHIP 3.3K 1/10W(2012)
R398	1-216-057-00	s	RESISTOR CHIP 2.2K 1/10W(2012)
R399	1-216-057-00	s	RESISTOR CHIP 2.2K 1/10W(2012)
R400	1-216-057-00	s	RESISTOR CHIP 2.2K 1/10W(2012)
R401	1-216-057-00	s	RESISTOR CHIP 2.2K 1/10W(2012)
R402	1-216-057-00	s	RESISTOR CHIP 2.2K 1/10W(2012)
R403	1-216-057-00	s	RESISTOR CHIP 2.2K 1/10W(2012)
R404	1-216-057-00	s	RESISTOR CHIP 2.2K 1/10W(2012)

(KY-452 BOARD(DSR-2000/2000P))

Ref. No. or Q'ty	Part No.	SP	Description
R405	1-216-057-00	s	RESISTOR CHIP 2.2K 1/10W(2012)
R406	1-216-057-00	s	RESISTOR CHIP 2.2K 1/10W(2012)
R407	1-216-057-00	s	RESISTOR CHIP 2.2K 1/10W(2012)
R408	1-218-478-11	s	RESISTOR, CHIP 330 1/4W (3225)
R409	1-216-049-91	s	RESISTOR,CHIP 1K 1/10W(2125)
R410	1-218-478-11	s	RESISTOR, CHIP 330 1/4W (3225)
R411	1-218-478-11	s	RESISTOR, CHIP 330 1/4W (3225)
R412	1-216-057-00	s	RESISTOR CHIP 2.2K 1/10W(2012)
R414	1-216-057-00	s	RESISTOR CHIP 2.2K 1/10W(2012)
R415	1-216-057-00	s	RESISTOR CHIP 2.2K 1/10W(2012)
R416	1-216-057-00	s	RESISTOR CHIP 2.2K 1/10W(2012)
R417	1-216-057-00	s	RESISTOR CHIP 2.2K 1/10W(2012)
R419	1-216-057-00	s	RESISTOR CHIP 2.2K 1/10W(2012)
R420	1-216-057-00	s	RESISTOR CHIP 2.2K 1/10W(2012)
R421	1-216-057-00	s	RESISTOR CHIP 2.2K 1/10W(2012)
R422	1-218-478-11	s	RESISTOR, CHIP 330 1/4W (3225)
R424	1-216-049-91	s	RESISTOR,CHIP 1K 1/10W(2125)
R425	1-218-478-11	s	RESISTOR, CHIP 330 1/4W (3225)
R426	1-216-049-91	s	RESISTOR,CHIP 1K 1/10W(2125)
R427	1-216-057-00	s	RESISTOR CHIP 2.2K 1/10W(2012)
R428	1-216-057-00	s	RESISTOR CHIP 2.2K 1/10W(2012)
R429	1-216-057-00	s	RESISTOR CHIP 2.2K 1/10W(2012)
R430	1-216-057-00	s	RESISTOR CHIP 2.2K 1/10W(2012)
R431	1-216-057-00	s	RESISTOR CHIP 2.2K 1/10W(2012)
R432	1-216-057-00	s	RESISTOR CHIP 2.2K 1/10W(2012)
R433	1-218-478-11	s	RESISTOR, CHIP 330 1/4W (3225)
R434	1-220-261-11	s	RESISTOR, CHIP 470 1/4W (3225)
R435	1-216-061-00	s	RESISTOR CHIP 3.3K 1/10W(2012)
R436	1-216-057-00	s	RESISTOR CHIP 2.2K 1/10W(2012)
R437	1-216-057-00	s	RESISTOR CHIP 2.2K 1/10W(2012)
R438	1-216-049-91	s	RESISTOR,CHIP 1K 1/10W(2125)
R439	1-216-057-00	s	RESISTOR CHIP 2.2K 1/10W(2012)
R440	1-216-057-00	s	RESISTOR CHIP 2.2K 1/10W(2012)
R441	1-216-049-91	s	RESISTOR,CHIP 1K 1/10W(2125)
R442	1-216-057-00	s	RESISTOR CHIP 2.2K 1/10W(2012)
R443	1-216-057-00	s	RESISTOR CHIP 2.2K 1/10W(2012)
R444	1-216-049-91	s	RESISTOR,CHIP 1K 1/10W(2125)
R445	1-216-057-00	s	RESISTOR CHIP 2.2K 1/10W(2012)
R446	1-216-057-00	s	RESISTOR CHIP 2.2K 1/10W(2012)
R447	1-216-049-91	s	RESISTOR,CHIP 1K 1/10W(2125)
R448	1-216-057-00	s	RESISTOR CHIP 2.2K 1/10W(2012)
R449	1-216-057-00	s	RESISTOR CHIP 2.2K 1/10W(2012)
R450	1-216-049-91	s	RESISTOR,CHIP 1K 1/10W(2125)
R451	1-216-057-00	s	RESISTOR CHIP 2.2K 1/10W(2012)
R452	1-216-057-00	s	RESISTOR CHIP 2.2K 1/10W(2012)
R453	1-216-049-91	s	RESISTOR,CHIP 1K 1/10W(2125)
R454	1-216-057-00	s	RESISTOR CHIP 2.2K 1/10W(2012)
R455	1-216-057-00	s	RESISTOR CHIP 2.2K 1/10W(2012)
R456	1-216-049-91	s	RESISTOR,CHIP 1K 1/10W(2125)
R457	1-216-057-00	s	RESISTOR CHIP 2.2K 1/10W(2012)
R458	1-216-057-00	s	RESISTOR CHIP 2.2K 1/10W(2012)
R459	1-216-049-91	s	RESISTOR,CHIP 1K 1/10W(2125)
R501	1-216-025-91	s	RESISTOR,CHIP 100 1/10W(2125)
R502	1-216-025-91	s	RESISTOR,CHIP 100 1/10W(2125)
R503	1-216-025-91	s	RESISTOR,CHIP 100 1/10W(2125)
R504	1-216-025-91	s	RESISTOR,CHIP 100 1/10W(2125)
R505	1-216-025-91	s	RESISTOR,CHIP 100 1/10W(2125)
R506	1-216-025-91	s	RESISTOR,CHIP 100 1/10W(2125)
R507	1-216-025-91	s	RESISTOR,CHIP 100 1/10W(2125)

(KY-452 BOARD(DSR-2000/2000P))

Ref. No. or Q'ty	Part No.	SP	Description
R508	1-216-025-91	s	RESISTOR,CHIP 100 1/10W(2125)
R509	1-216-025-91	s	RESISTOR,CHIP 100 1/10W(2125)
R510	1-216-025-91	s	RESISTOR,CHIP 100 1/10W(2125)
R511	1-216-025-91	s	RESISTOR,CHIP 100 1/10W(2125)
R512	1-216-025-91	s	RESISTOR,CHIP 100 1/10W(2125)
R513	1-216-025-91	s	RESISTOR,CHIP 100 1/10W(2125)
R514	1-216-025-91	s	RESISTOR,CHIP 100 1/10W(2125)
R515	1-216-025-91	s	RESISTOR,CHIP 100 1/10W(2125)
R516	1-216-025-91	s	RESISTOR,CHIP 100 1/10W(2125)
R517	1-216-025-91	s	RESISTOR,CHIP 100 1/10W(2125)
R518	1-216-025-91	s	RESISTOR,CHIP 100 1/10W(2125)
R519	1-216-025-91	s	RESISTOR,CHIP 100 1/10W(2125)
R520	1-216-025-91	s	RESISTOR,CHIP 100 1/10W(2125)
R521	1-216-025-91	s	RESISTOR,CHIP 100 1/10W(2125)
R522	1-216-025-91	s	RESISTOR,CHIP 100 1/10W(2125)
R523	1-216-025-91	s	RESISTOR,CHIP 100 1/10W(2125)
R524	1-216-025-91	s	RESISTOR,CHIP 100 1/10W(2125)
R525	1-216-025-91	s	RESISTOR,CHIP 100 1/10W(2125)
R526	1-216-025-91	s	RESISTOR,CHIP 100 1/10W(2125)
R527	1-216-025-91	s	RESISTOR,CHIP 100 1/10W(2125)
R528	1-216-025-91	s	RESISTOR,CHIP 100 1/10W(2125)
R529	1-216-025-91	s	RESISTOR,CHIP 100 1/10W(2125)
R530	1-216-025-91	s	RESISTOR,CHIP 100 1/10W(2125)
R531	1-216-025-91	s	RESISTOR,CHIP 100 1/10W(2125)
R532	1-216-025-91	s	RESISTOR,CHIP 100 1/10W(2125)
R533	1-216-025-91	s	RESISTOR,CHIP 100 1/10W(2125)
R534	1-216-025-91	s	RESISTOR,CHIP 100 1/10W(2125)
R535	1-216-025-91	s	RESISTOR,CHIP 100 1/10W(2125)
R536	1-216-025-91	s	RESISTOR,CHIP 100 1/10W(2125)
R537	1-216-025-91	s	RESISTOR,CHIP 100 1/10W(2125)
R538	1-216-025-91	s	RESISTOR,CHIP 100 1/10W(2125)
R539	1-216-025-91	s	RESISTOR,CHIP 100 1/10W(2125)
R540	1-216-025-91	s	RESISTOR,CHIP 100 1/10W(2125)
R541	1-216-025-91	s	RESISTOR,CHIP 100 1/10W(2125)
R542	1-216-025-91	s	RESISTOR,CHIP 100 1/10W(2125)
R543	1-216-025-91	s	RESISTOR,CHIP 100 1/10W(2125)
R544	1-216-025-91	s	RESISTOR,CHIP 100 1/10W(2125)
R545	1-216-025-91	s	RESISTOR,CHIP 100 1/10W(2125)
R546	1-216-025-91	s	RESISTOR,CHIP 100 1/10W(2125)
R547	1-216-025-91	s	RESISTOR,CHIP 100 1/10W(2125)
R548	1-216-025-91	s	RESISTOR,CHIP 100 1/10W(2125)
R549	1-216-025-91	s	RESISTOR,CHIP 100 1/10W(2125)
R550	1-216-025-91	s	RESISTOR,CHIP 100 1/10W(2125)
R551	1-216-049-91	s	RESISTOR,CHIP 1K 1/10W(2125)
R552	1-216-025-91	s	RESISTOR,CHIP 100 1/10W(2125)
R553	1-216-049-91	s	RESISTOR,CHIP 1K 1/10W(2125)
R554	1-216-033-00	s	RESISTOR,CHIP 220 1/10W(2012)
R555	1-208-823-11	s	RESISTOR,CHIP 51K 1/10W (2125)
R557	1-216-093-00	s	RESISTOR, CHIP 68K 1/10W(2012)
RB1	1-236-904-11	s	RESISTOR NETWORK 1K (1608)
RB2	1-236-908-11	s	RESISTOR,NETWORK 10K (3216)
RB3 *4	1-239-389-11	s	RESISTOR,NETWORK 47K (1608)
RB4	1-239-389-11	s	RESISTOR,NETWORK 47K (1608)
RB14 *a	1-239-308-11	s	RESISTOR,ARRAY,CHIP 47K
RB15 *a	1-239-308-11	s	RESISTOR,ARRAY,CHIP 47K
RB16 *a	1-239-308-11	s	RESISTOR,ARRAY,CHIP 47K
RB17 *a	1-239-308-11	s	RESISTOR,ARRAY,CHIP 47K
RB18 *a	1-239-308-11	s	RESISTOR,ARRAY,CHIP 47K
RB201	1-239-306-11	s	RESISTOR ARRAY,CHIP 10K

(KY-452 BOARD(DSR-2000/2000P))

Ref. No. or Q'ty	Part No.	SP	Description
RB301	1-239-304-11	s	RESISTOR ARRAY, CHIP 2.2K
S1	1-692-892-11	s	SWITCH, TACTILE (WITH LIGHT)
S2	1-692-891-21	s	SWITCH, TACTILE (WITH LIGHT)
S3	1-692-537-11	s	SWITCH, TACTILE (WITH LIGHT)
S4	1-692-890-11	s	SWITCH, TACTILE
S5	1-692-994-11	s	SWITCH, TACTILE (ILLUMINATED)
S6	1-692-892-21	s	SWITCH, TACTILE (WITH LIGHT)
S7	1-692-890-11	s	SWITCH, TACTILE
S8	1-692-537-11	s	SWITCH, TACTILE (WITH LIGHT)
S9	1-692-994-11	s	SWITCH, TACTILE (ILLUMINATED)
S10	1-692-994-11	s	SWITCH, TACTILE (ILLUMINATED)
S11	1-692-890-41	s	SWITCH, TACTILE (WITH LIGHT)
S12	1-692-537-21	s	SWITCH, TACTILE (WITH LIGHT)
S13	1-692-537-11	s	SWITCH, TACTILE (WITH LIGHT)
S14	1-762-132-11	s	SWITCH, TACTILE (ILLUMINATED)
S15	1-692-994-11	s	SWITCH, TACTILE (ILLUMINATED)
S16	1-692-890-31	s	SWITCH, TACTILE (WITH LIGHT)
S17	1-692-537-21	s	SWITCH, TACTILE (WITH LIGHT)
S18	1-692-537-11	s	SWITCH, TACTILE (WITH LIGHT)
S19	1-692-994-11	s	SWITCH, TACTILE (ILLUMINATED)
S20	1-692-994-11	s	SWITCH, TACTILE (ILLUMINATED)
S25	1-571-977-11	s	SWITCH,TACTIL
S26	1-571-977-11	s	SWITCH,TACTIL
S27	1-571-977-11	s	SWITCH,TACTIL
S28	1-571-977-11	s	SWITCH,TACTIL
S29	1-571-977-11	s	SWITCH,TACTIL
S30	1-571-977-11	s	SWITCH,TACTIL
S31	1-571-977-11	s	SWITCH,TACTIL
S32	1-692-890-21	s	SWITCH, TACTILE (WITH LIGHT)
S33	1-692-537-11	s	SWITCH, TACTILE (WITH LIGHT)
S34	1-692-994-11	s	SWITCH, TACTILE (ILLUMINATED)
S35	1-692-994-11	s	SWITCH, TACTILE (ILLUMINATED)
S36	1-692-537-11	s	SWITCH, TACTILE (WITH LIGHT)
S37	1-692-994-11	s	SWITCH, TACTILE (ILLUMINATED)
S38	1-692-537-11	s	SWITCH, TACTILE (WITH LIGHT)
S39	1-692-994-11	s	SWITCH, TACTILE (ILLUMINATED)
S40	1-692-994-11	s	SWITCH, TACTILE (ILLUMINATED)
S41	1-692-890-11	s	SWITCH, TACTILE
S42	1-692-537-21	s	SWITCH, TACTILE (WITH LIGHT)
S43	1-692-994-11	s	SWITCH, TACTILE (ILLUMINATED)
S44	1-692-537-11	s	SWITCH, TACTILE (WITH LIGHT)
S45	1-692-537-11	s	SWITCH, TACTILE (WITH LIGHT)
S46	1-692-537-11	s	SWITCH, TACTILE (WITH LIGHT)
S47	1-692-537-11	s	SWITCH, TACTILE (WITH LIGHT)
S48	1-692-537-11	s	SWITCH, TACTILE (WITH LIGHT)
S49	1-692-537-11	s	SWITCH, TACTILE (WITH LIGHT)
S50	1-692-537-11	s	SWITCH, TACTILE (WITH LIGHT)
S51	1-692-537-11	s	SWITCH, TACTILE (WITH LIGHT)
S52	1-692-537-11	s	SWITCH, TACTILE (WITH LIGHT)
T501	1-435-186-11	s	TRANSFORMER, CONVERTER
X1	1-767-460-21	s	OSCILLATOR, CERAMIC

KY-452A BOARD(DSBK-200)

---

*1: Board No. suffix 13
*2: Board No. suffix 14 -

Ref. No. or Q'ty	Part No.	SP	Description
1pc	A-8324-694-A	o	MOUNTED CIRCUIT BOARD, KY-452A
1pc	3-708-877-01	s	CAP (PC)
1pc	3-708-933-01	s	CAP (PC)
C2	1-163-038-91	s	CAPACITOR, CERAMIC 0.1MF/25V
C3	1-126-396-11	s	CAPACITOR,ELECT 47MF/16V(CHIP)
C7	1-163-257-11	s	CAPACITOR CERAMIC 180PF/50V
C8	1-163-257-11	s	CAPACITOR CERAMIC 180PF/50V
C9	1-163-257-11	s	CAPACITOR CERAMIC 180PF/50V
C10	1-163-257-11	s	CAPACITOR CERAMIC 180PF/50V
C11	1-163-038-91	s	CAPACITOR, CERAMIC 0.1MF/25V
C12	1-163-038-91	s	CAPACITOR, CERAMIC 0.1MF/25V
C15	1-163-133-00	s	CAPACITOR,CHIP CERAMIC 470PF
C16	1-163-038-91	s	CAPACITOR, CERAMIC 0.1MF/25V
C17	1-128-393-11	s	CAPACITOR,ELECT 100MF/10V
C18	1-163-038-91	s	CAPACITOR, CERAMIC 0.1MF/25V
C19	1-163-038-91	s	CAPACITOR, CERAMIC 0.1MF/25V
C20	1-163-038-91	s	CAPACITOR, CERAMIC 0.1MF/25V
C21	1-163-133-00	s	CAPACITOR,CHIP CERAMIC 470PF
C22	1-126-393-11	s	CAPACITOR ELECT 33MF/10V(CHIP)
C23	1-163-038-91	s	CAPACITOR, CERAMIC 0.1MF/25V
C24	*2 1-163-038-91	s	CAPACITOR, CERAMIC 0.1MF/25V
C25	*2 1-163-038-91	s	CAPACITOR, CERAMIC 0.1MF/25V
C26	*2 1-163-038-91	s	CAPACITOR, CERAMIC 0.1MF/25V
C27	*2 1-163-038-91	s	CAPACITOR, CERAMIC 0.1MF/25V
C28	*2 1-163-038-91	s	CAPACITOR, CERAMIC 0.1MF/25V
C29	*2 1-163-038-91	s	CAPACITOR, CERAMIC 0.1MF/25V
C30	*2 1-163-038-91	s	CAPACITOR, CERAMIC 0.1MF/25V
C31	*2 1-163-038-91	s	CAPACITOR, CERAMIC 0.1MF/25V
C201	1-163-038-91	s	CAPACITOR, CERAMIC 0.1MF/25V
C301	1-126-394-11	s	CAPACITOR,ELECT 10MF/16V(CHIP)
C302	1-126-394-11	s	CAPACITOR,ELECT 10MF/16V(CHIP)
C303	1-126-394-11	s	CAPACITOR,ELECT 10MF/16V(CHIP)
C304	1-126-394-11	s	CAPACITOR,ELECT 10MF/16V(CHIP)
C305	1-126-394-11	s	CAPACITOR,ELECT 10MF/16V(CHIP)
C306	1-126-394-11	s	CAPACITOR,ELECT 10MF/16V(CHIP)
C307	1-126-394-11	s	CAPACITOR,ELECT 10MF/16V(CHIP)
C308	1-126-394-11	s	CAPACITOR,ELECT 10MF/16V(CHIP)
C309	1-126-394-11	s	CAPACITOR,ELECT 10MF/16V(CHIP)
C310	1-126-394-11	s	CAPACITOR,ELECT 10MF/16V(CHIP)
C311	1-126-394-11	s	CAPACITOR,ELECT 10MF/16V(CHIP)
C312	1-126-394-11	s	CAPACITOR,ELECT 10MF/16V(CHIP)
C313	1-126-394-11	s	CAPACITOR,ELECT 10MF/16V(CHIP)
C314	1-126-394-11	s	CAPACITOR,ELECT 10MF/16V(CHIP)
C315	1-126-394-11	s	CAPACITOR,ELECT 10MF/16V(CHIP)
C316	1-126-394-11	s	CAPACITOR,ELECT 10MF/16V(CHIP)
C317	1-126-394-11	s	CAPACITOR,ELECT 10MF/16V(CHIP)
C318	1-126-394-11	s	CAPACITOR,ELECT 10MF/16V(CHIP)
C319	1-126-394-11	s	CAPACITOR,ELECT 10MF/16V(CHIP)
C320	1-126-394-11	s	CAPACITOR,ELECT 10MF/16V(CHIP)
C321	1-126-394-11	s	CAPACITOR,ELECT 10MF/16V(CHIP)
C322	1-126-394-11	s	CAPACITOR,ELECT 10MF/16V(CHIP)
C323	1-126-394-11	s	CAPACITOR,ELECT 10MF/16V(CHIP)
C324	1-126-394-11	s	CAPACITOR,ELECT 10MF/16V(CHIP)
C325	1-126-394-11	s	CAPACITOR,ELECT 10MF/16V(CHIP)
C326	1-126-394-11	s	CAPACITOR,ELECT 10MF/16V(CHIP)

(KY-452A BOARD(DSBK-200))

Ref. No. or Q'ty	Part No.	SP	Description
C327	1-126-394-11	s	CAPACITOR,ELECT 10MF/16V(CHIP)
C328	1-126-394-11	s	CAPACITOR,ELECT 10MF/16V(CHIP)
C329	1-126-394-11	s	CAPACITOR,ELECT 10MF/16V(CHIP)
C330	1-126-394-11	s	CAPACITOR,ELECT 10MF/16V(CHIP)
C331	1-126-394-11	s	CAPACITOR,ELECT 10MF/16V(CHIP)
C333	1-126-394-11	s	CAPACITOR,ELECT 10MF/16V(CHIP)
C334	1-126-394-11	s	CAPACITOR,ELECT 10MF/16V(CHIP)
C335	1-126-394-11	s	CAPACITOR,ELECT 10MF/16V(CHIP)
C336	1-163-038-91	s	CAPACITOR, CERAMIC 0.1MF/25V
C337	1-126-394-11	s	CAPACITOR,ELECT 10MF/16V(CHIP)
C338	1-126-394-11	s	CAPACITOR,ELECT 10MF/16V(CHIP)
C339	1-126-394-11	s	CAPACITOR,ELECT 10MF/16V(CHIP)
C341	1-126-394-11	s	CAPACITOR,ELECT 10MF/16V(CHIP)
C501	1-163-251-11	s	CAPACITOR CERAMIC 100PF/50V
C502	1-163-251-11	s	CAPACITOR CERAMIC 100PF/50V
C503	1-163-251-11	s	CAPACITOR CERAMIC 100PF/50V
C504	1-163-251-11	s	CAPACITOR CERAMIC 100PF/50V
C505	1-163-251-11	s	CAPACITOR CERAMIC 100PF/50V
C506	1-163-251-11	s	CAPACITOR CERAMIC 100PF/50V
C507	1-163-251-11	s	CAPACITOR CERAMIC 100PF/50V
C508	1-163-251-11	s	CAPACITOR CERAMIC 100PF/50V
C509	1-163-251-11	s	CAPACITOR CERAMIC 100PF/50V
C510	1-163-251-11	s	CAPACITOR CERAMIC 100PF/50V
C511	1-163-251-11	s	CAPACITOR CERAMIC 100PF/50V
C512	1-163-251-11	s	CAPACITOR CERAMIC 100PF/50V
C513	1-163-251-11	s	CAPACITOR CERAMIC 100PF/50V
C514	1-163-251-11	s	CAPACITOR CERAMIC 100PF/50V
C515	1-163-251-11	s	CAPACITOR CERAMIC 100PF/50V
C516	1-163-251-11	s	CAPACITOR CERAMIC 100PF/50V
C517	1-163-251-11	s	CAPACITOR CERAMIC 100PF/50V
C518	1-163-251-11	s	CAPACITOR CERAMIC 100PF/50V
C519	1-163-251-11	s	CAPACITOR CERAMIC 100PF/50V
C520	1-163-251-11	s	CAPACITOR CERAMIC 100PF/50V
C521	1-163-251-11	s	CAPACITOR CERAMIC 100PF/50V
C522	1-163-251-11	s	CAPACITOR CERAMIC 100PF/50V
C523	1-163-251-11	s	CAPACITOR CERAMIC 100PF/50V
C524	1-163-251-11	s	CAPACITOR CERAMIC 100PF/50V
C525	1-163-251-11	s	CAPACITOR CERAMIC 100PF/50V
C526	1-163-251-11	s	CAPACITOR CERAMIC 100PF/50V
C527	1-163-251-11	s	CAPACITOR CERAMIC 100PF/50V
C528	1-163-251-11	s	CAPACITOR CERAMIC 100PF/50V
C529	1-163-251-11	s	CAPACITOR CERAMIC 100PF/50V
C530	1-163-251-11	s	CAPACITOR CERAMIC 100PF/50V
C531	1-163-251-11	s	CAPACITOR CERAMIC 100PF/50V
C532	1-163-251-11	s	CAPACITOR CERAMIC 100PF/50V
C533	1-163-251-11	s	CAPACITOR CERAMIC 100PF/50V
C534	1-163-251-11	s	CAPACITOR CERAMIC 100PF/50V
C535	1-163-251-11	s	CAPACITOR CERAMIC 100PF/50V
C536	1-163-251-11	s	CAPACITOR CERAMIC 100PF/50V
C537	1-163-251-11	s	CAPACITOR CERAMIC 100PF/50V
C538	1-163-251-11	s	CAPACITOR CERAMIC 100PF/50V
C539	1-163-251-11	s	CAPACITOR CERAMIC 100PF/50V
C540	1-163-251-11	s	CAPACITOR CERAMIC 100PF/50V
C541	1-163-251-11	s	CAPACITOR CERAMIC 100PF/50V
C542	1-163-251-11	s	CAPACITOR CERAMIC 100PF/50V
C543	1-163-251-11	s	CAPACITOR CERAMIC 100PF/50V
C544	1-163-251-11	s	CAPACITOR CERAMIC 100PF/50V
C545	1-163-251-11	s	CAPACITOR CERAMIC 100PF/50V
C546	1-163-251-11	s	CAPACITOR CERAMIC 100PF/50V

(KY-452A BOARD(DSBK-200))

Ref. No. or Q'ty	Part No.	SP	Description
C547	1-163-251-11	s	CAPACITOR CERAMIC 100PF/50V
C548	1-163-251-11	s	CAPACITOR CERAMIC 100PF/50V
C549	1-163-251-11	s	CAPACITOR CERAMIC 100PF/50V
C550	1-163-251-11	s	CAPACITOR CERAMIC 100PF/50V
C551	1-128-399-11	s	CAPACITOR ELECT 330MF/16V(CHIP)
C552	1-163-021-91	s	CAPACITOR, CERAMIC 0.01MF/50V
C553	1-128-405-11	s	CAPACITOR.ELECT 22MF/50V(CHIP)
CN711	1-564-005-11	o	PIN, CONNECTOR 6P
CN715	1-506-489-11	s	PIN,CONNECTOR 10P
D201	8-719-024-81	s	DIODE 1SS300-TE85L
D202	8-719-024-81	s	DIODE 1SS300-TE85L
D203	8-719-024-81	s	DIODE 1SS300-TE85L
D204	8-719-024-81	s	DIODE 1SS300-TE85L
D205	8-719-024-81	s	DIODE 1SS300-TE85L
D206	8-719-024-81	s	DIODE 1SS300-TE85L
D207	8-719-024-81	s	DIODE 1SS300-TE85L
D208	8-719-024-81	s	DIODE 1SS300-TE85L
D209	8-719-024-81	s	DIODE 1SS300-TE85L
D210	8-719-024-81	s	DIODE 1SS300-TE85L
D211	8-719-024-81	s	DIODE 1SS300-TE85L
D212	8-719-024-81	s	DIODE 1SS300-TE85L
D213	8-719-024-81	s	DIODE 1SS300-TE85L
D215	8-719-024-81	s	DIODE 1SS300-TE85L
D216	8-719-024-81	s	DIODE 1SS300-TE85L
D217	8-719-024-81	s	DIODE 1SS300-TE85L
D218	8-719-024-81	s	DIODE 1SS300-TE85L
D219	8-719-024-81	s	DIODE 1SS300-TE85L
D221	8-719-024-81	s	DIODE 1SS300-TE85L
D222	8-719-024-81	s	DIODE 1SS300-TE85L
D223	8-719-024-81	s	DIODE 1SS300-TE85L
D224	*1 8-719-024-81	s	DIODE 1SS300-TE85L
D301	8-719-989-53	s	LED CL-200HR-C-TSL
D302	8-719-061-59	s	LED CL-200PG-C-TU
D303	8-719-061-58	s	LED CL-200Y-C-TU
D304	8-719-989-53	s	LED CL-200HR-C-TSL
D501	8-719-110-02	s	DIODE RD7.5ES-B1
D502	8-719-110-22	s	DIODE RD11ES-B2
D503	8-719-108-24	s	DIODE 1SS223
D504	8-719-110-22	s	DIODE RD11ES-B2
D505	8-719-110-22	s	DIODE RD11ES-B2
D506	8-719-033-28	s	DIODE EC11FS4-TE12
D507	8-719-110-04	s	DIODE RD7.5ES-B3
F1	⚠ 1-533-950-11	s	FUSE, CHIP
IC1	8-759-655-86	s	IC XC9536VQ44-DSR2000-DPR-V10
IC2	8-759-327-80	s	IC S-80745SN-D9-T1
IC3	8-759-186-44	s	IC TC74VHC125F
IC5	8-759-664-34	s	UPD780208GF
IC6	8-759-271-86	s	IC TC7SH04FU
IC201	8-759-186-47	s	IC TC74VHC138F
IC301	8-759-051-53	s	IC TD62381F
L1	1-406-823-11	s	COIL, CHOKE 10UH
L4	1-406-824-11	s	COIL, CHOKE 22UH
ND501	1-517-922-11	o	INDICATOR TUBE, FLUORESCENT
PS2	⚠ 1-576-259-11	s	LINK,IC 0.6A (3225)

(KY-452A BOARD(DSBK-200))

Ref. No. or Q'ty	Part No.	SP	Description
Q201	8-729-028-81	s	TRANSISTOR DTA123JUA-T106
Q202	8-729-028-81	s	TRANSISTOR DTA123JUA-T106
Q203	8-729-028-81	s	TRANSISTOR DTA123JUA-T106
Q204	8-729-028-81	s	TRANSISTOR DTA123JUA-T106
Q205	8-729-028-81	s	TRANSISTOR DTA123JUA-T106
Q206	8-729-028-81	s	TRANSISTOR DTA123JUA-T106
Q207	8-729-028-81	s	TRANSISTOR DTA123JUA-T106
Q301	8-729-029-04	s	TRANSISTOR DTC123JUA-T106
Q302	8-729-140-63	s	TRANSISTOR 2SA1611-M5M6
Q303	8-729-028-74	s	TRANSISTOR DTA114TUA-T106
Q304	8-729-028-74	s	TRANSISTOR DTA114TUA-T106
Q305	8-729-028-74	s	TRANSISTOR DTA114TUA-T106
Q306	8-729-028-74	s	TRANSISTOR DTA114TUA-T106
Q307	8-729-028-74	s	TRANSISTOR DTA114TUA-T106
Q308	8-729-029-04	s	TRANSISTOR DTC123JUA-T106
Q309	8-729-117-32	s	TRANSISTOR 2SC4177
Q310	8-729-117-32	s	TRANSISTOR 2SC4177
Q311	8-729-117-32	s	TRANSISTOR 2SC4177
Q312	8-729-117-32	s	TRANSISTOR 2SC4177
Q313	8-729-117-32	s	TRANSISTOR 2SC4177
Q314	8-729-140-63	s	TRANSISTOR 2SA1611-M5M6
Q315	8-729-028-74	s	TRANSISTOR DTA114TUA-T106
Q316	8-729-028-74	s	TRANSISTOR DTA114TUA-T106
Q317	8-729-028-74	s	TRANSISTOR DTA114TUA-T106
Q318	8-729-028-74	s	TRANSISTOR DTA114TUA-T106
Q319	8-729-028-74	s	TRANSISTOR DTA114TUA-T106
Q320	8-729-029-04	s	TRANSISTOR DTC123JUA-T106
Q321	8-729-117-32	s	TRANSISTOR 2SC4177
Q322	8-729-117-32	s	TRANSISTOR 2SC4177
Q323	8-729-117-32	s	TRANSISTOR 2SC4177
Q324	8-729-117-32	s	TRANSISTOR 2SC4177
Q325	8-729-117-32	s	TRANSISTOR 2SC4177
Q326	8-729-140-63	s	TRANSISTOR 2SA1611-M5M6
Q327	8-729-028-74	s	TRANSISTOR DTA114TUA-T106
Q328	8-729-028-74	s	TRANSISTOR DTA114TUA-T106
Q329	8-729-028-74	s	TRANSISTOR DTA114TUA-T106
Q330	8-729-028-74	s	TRANSISTOR DTA114TUA-T106
Q331	8-729-028-74	s	TRANSISTOR DTA114TUA-T106
Q332	8-729-029-04	s	TRANSISTOR DTC123JUA-T106
Q333	8-729-117-32	s	TRANSISTOR 2SC4177
Q334	8-729-117-32	s	TRANSISTOR 2SC4177
Q335	8-729-117-32	s	TRANSISTOR 2SC4177
Q336	8-729-117-32	s	TRANSISTOR 2SC4177
Q337	8-729-117-32	s	TRANSISTOR 2SC4177
Q338	8-729-140-63	s	TRANSISTOR 2SA1611-M5M6
Q339	8-729-028-74	s	TRANSISTOR DTA114TUA-T106
Q340	8-729-028-74	s	TRANSISTOR DTA114TUA-T106
Q341	8-729-028-74	s	TRANSISTOR DTA114TUA-T106
Q342	8-729-028-74	s	TRANSISTOR DTA114TUA-T106
Q343	8-729-028-74	s	TRANSISTOR DTA114TUA-T106
Q344	8-729-029-04	s	TRANSISTOR DTC123JUA-T106
Q345	8-729-117-32	s	TRANSISTOR 2SC4177
Q346	8-729-117-32	s	TRANSISTOR 2SC4177
Q347	8-729-117-32	s	TRANSISTOR 2SC4177
Q348	8-729-117-32	s	TRANSISTOR 2SC4177
Q349	8-729-117-32	s	TRANSISTOR 2SC4177
Q350	8-729-140-63	s	TRANSISTOR 2SA1611-M5M6
Q351	8-729-028-74	s	TRANSISTOR DTA114TUA-T106
Q352	8-729-028-74	s	TRANSISTOR DTA114TUA-T106

(KY-452A BOARD(DSBK-200))

Ref. No. or Q'ty	Part No.	SP	Description
Q353	8-729-028-74	s	TRANSISTOR DTA114TUA-T106
Q354	8-729-029-04	s	TRANSISTOR DTC123JUA-T106
Q355	8-729-117-32	s	TRANSISTOR 2SC4177
Q356	8-729-117-32	s	TRANSISTOR 2SC4177
Q357	8-729-117-32	s	TRANSISTOR 2SC4177
Q358	8-729-140-63	s	TRANSISTOR 2SA1611-M5M6
Q359	8-729-028-74	s	TRANSISTOR DTA114TUA-T106
Q360	8-729-028-74	s	TRANSISTOR DTA114TUA-T106
Q361	8-729-028-74	s	TRANSISTOR DTA114TUA-T106
Q362	8-729-029-04	s	TRANSISTOR DTC123JUA-T106
Q363	8-729-117-32	s	TRANSISTOR 2SC4177
Q364	8-729-117-32	s	TRANSISTOR 2SC4177
Q365	8-729-117-32	s	TRANSISTOR 2SC4177
Q366	8-729-140-63	s	TRANSISTOR 2SA1611-M5M6
Q367	8-729-028-74	s	TRANSISTOR DTA114TUA-T106
Q368	8-729-028-74	s	TRANSISTOR DTA114TUA-T106
Q369	8-729-028-74	s	TRANSISTOR DTA114TUA-T106
Q370	8-729-028-74	s	TRANSISTOR DTA114TUA-T106
Q371	8-729-029-04	s	TRANSISTOR DTC123JUA-T106
Q372	8-729-117-32	s	TRANSISTOR 2SC4177
Q373	8-729-117-32	s	TRANSISTOR 2SC4177
Q374	8-729-117-32	s	TRANSISTOR 2SC4177
Q375	8-729-117-32	s	TRANSISTOR 2SC4177
Q376	8-729-140-63	s	TRANSISTOR 2SA1611-M5M6
Q377	8-729-028-74	s	TRANSISTOR DTA114TUA-T106
Q379	8-729-028-74	s	TRANSISTOR DTA114TUA-T106
Q380	8-729-028-74	s	TRANSISTOR DTA114TUA-T106
Q381	8-729-028-74	s	TRANSISTOR DTA114TUA-T106
Q382	8-729-117-32	s	TRANSISTOR 2SC4177
Q384	8-729-117-32	s	TRANSISTOR 2SC4177
Q385	8-729-117-32	s	TRANSISTOR 2SC4177
Q386	8-729-117-32	s	TRANSISTOR 2SC4177
Q387	8-729-028-74	s	TRANSISTOR DTA114TUA-T106
Q388	8-729-028-74	s	TRANSISTOR DTA114TUA-T106
Q389	8-729-028-74	s	TRANSISTOR DTA114TUA-T106
Q391	8-729-028-74	s	TRANSISTOR DTA114TUA-T106
Q398	8-729-117-32	s	TRANSISTOR 2SC4177
Q399	8-729-117-32	s	TRANSISTOR 2SC4177
Q400	8-729-117-32	s	TRANSISTOR 2SC4177
Q402	8-729-117-32	s	TRANSISTOR 2SC4177
Q501	8-729-019-87	s	TRANSISTOR 2SC3392-6-TB
Q502	8-729-216-22	s	TRANSISTOR 2SA1162-G
Q503	8-729-019-87	s	TRANSISTOR 2SC3392-6-TB
Q504	8-729-216-22	s	TRANSISTOR 2SA1162-G
Q505	8-729-019-87	s	TRANSISTOR 2SC3392-6-TB
Q506	8-729-216-22	s	TRANSISTOR 2SA1162-G
Q507	8-729-019-87	s	TRANSISTOR 2SC3392-6-TB
Q508	8-729-216-22	s	TRANSISTOR 2SA1162-G
Q509	8-729-019-87	s	TRANSISTOR 2SC3392-6-TB
Q510	8-729-216-22	s	TRANSISTOR 2SA1162-G
Q511	8-729-019-87	s	TRANSISTOR 2SC3392-6-TB
Q512	8-729-216-22	s	TRANSISTOR 2SA1162-G
Q513	8-729-019-87	s	TRANSISTOR 2SC3392-6-TB
Q514	8-729-216-22	s	TRANSISTOR 2SA1162-G
Q515	8-729-019-87	s	TRANSISTOR 2SC3392-6-TB
Q516	8-729-216-22	s	TRANSISTOR 2SA1162-G
Q517	8-729-019-87	s	TRANSISTOR 2SC3392-6-TB
Q518	8-729-216-22	s	TRANSISTOR 2SA1162-G
Q519	8-729-019-87	s	TRANSISTOR 2SC3392-6-TB

(KY-452A BOARD(DSBK-200))

Ref. No. or Q'ty	Part No.	SP	Description
Q520	8-729-216-22	s	TRANSISTOR 2SA1162-G
Q521	8-729-019-87	s	TRANSISTOR 2SC3392-6-TB
Q522	8-729-216-22	s	TRANSISTOR 2SA1162-G
Q523	8-729-019-87	s	TRANSISTOR 2SC3392-6-TB
Q524	8-729-216-22	s	TRANSISTOR 2SA1162-G
Q525	8-729-019-87	s	TRANSISTOR 2SC3392-6-TB
Q526	8-729-216-22	s	TRANSISTOR 2SA1162-G
Q527	8-729-019-87	s	TRANSISTOR 2SC3392-6-TB
Q528	8-729-216-22	s	TRANSISTOR 2SA1162-G
Q529	8-729-019-87	s	TRANSISTOR 2SC3392-6-TB
Q530	8-729-216-22	s	TRANSISTOR 2SA1162-G
Q531	8-729-019-87	s	TRANSISTOR 2SC3392-6-TB
Q532	8-729-216-22	s	TRANSISTOR 2SA1162-G
Q533	8-729-019-87	s	TRANSISTOR 2SC3392-6-TB
Q534	8-729-216-22	s	TRANSISTOR 2SA1162-G
Q535	8-729-019-87	s	TRANSISTOR 2SC3392-6-TB
Q536	8-729-216-22	s	TRANSISTOR 2SA1162-G
Q537	8-729-019-87	s	TRANSISTOR 2SC3392-6-TB
Q538	8-729-216-22	s	TRANSISTOR 2SA1162-G
Q539	8-729-019-87	s	TRANSISTOR 2SC3392-6-TB
Q540	8-729-216-22	s	TRANSISTOR 2SA1162-G
Q541	8-729-019-87	s	TRANSISTOR 2SC3392-6-TB
Q542	8-729-216-22	s	TRANSISTOR 2SA1162-G
Q543	8-729-019-87	s	TRANSISTOR 2SC3392-6-TB
Q544	8-729-216-22	s	TRANSISTOR 2SA1162-G
Q545	8-729-019-87	s	TRANSISTOR 2SC3392-6-TB
Q546	8-729-216-22	s	TRANSISTOR 2SA1162-G
Q547	8-729-019-87	s	TRANSISTOR 2SC3392-6-TB
Q548	8-729-216-22	s	TRANSISTOR 2SA1162-G
Q549	8-729-019-87	s	TRANSISTOR 2SC3392-6-TB
Q550	8-729-216-22	s	TRANSISTOR 2SA1162-G
Q551	8-729-019-87	s	TRANSISTOR 2SC3392-6-TB
Q552	8-729-216-22	s	TRANSISTOR 2SA1162-G
Q553	8-729-019-87	s	TRANSISTOR 2SC3392-6-TB
Q554	8-729-216-22	s	TRANSISTOR 2SA1162-G
Q555	8-729-019-87	s	TRANSISTOR 2SC3392-6-TB
Q556	8-729-216-22	s	TRANSISTOR 2SA1162-G
Q557	8-729-019-87	s	TRANSISTOR 2SC3392-6-TB
Q558	8-729-216-22	s	TRANSISTOR 2SA1162-G
Q559	8-729-019-87	s	TRANSISTOR 2SC3392-6-TB
Q560	8-729-216-22	s	TRANSISTOR 2SA1162-G
Q561	8-729-019-87	s	TRANSISTOR 2SC3392-6-TB
Q562	8-729-216-22	s	TRANSISTOR 2SA1162-G
Q563	8-729-019-87	s	TRANSISTOR 2SC3392-6-TB
Q564	8-729-216-22	s	TRANSISTOR 2SA1162-G
Q565	8-729-019-87	s	TRANSISTOR 2SC3392-6-TB
Q566	8-729-216-22	s	TRANSISTOR 2SA1162-G
Q567	8-729-019-87	s	TRANSISTOR 2SC3392-6-TB
Q568	8-729-216-22	s	TRANSISTOR 2SA1162-G
Q569	8-729-019-87	s	TRANSISTOR 2SC3392-6-TB
Q570	8-729-216-22	s	TRANSISTOR 2SA1162-G
Q571	8-729-019-87	s	TRANSISTOR 2SC3392-6-TB
Q572	8-729-216-22	s	TRANSISTOR 2SA1162-G
Q573	8-729-019-87	s	TRANSISTOR 2SC3392-6-TB
Q574	8-729-216-22	s	TRANSISTOR 2SA1162-G
Q575	8-729-019-87	s	TRANSISTOR 2SC3392-6-TB
Q576	8-729-216-22	s	TRANSISTOR 2SA1162-G
Q577	8-729-019-87	s	TRANSISTOR 2SC3392-6-TB
Q578	8-729-216-22	s	TRANSISTOR 2SA1162-G

(KY-452A BOARD(DSBK-200))

Ref. No. or Q'ty	Part No.	SP	Description
Q579	8-729-019-87	s	TRANSISTOR 2SC3392-6-TB
Q580	8-729-216-22	s	TRANSISTOR 2SA1162-G
Q581	8-729-019-87	s	TRANSISTOR 2SC3392-6-TB
Q582	8-729-216-22	s	TRANSISTOR 2SA1162-G
Q583	8-729-019-87	s	TRANSISTOR 2SC3392-6-TB
Q584	8-729-216-22	s	TRANSISTOR 2SA1162-G
Q585	8-729-019-87	s	TRANSISTOR 2SC3392-6-TB
Q586	8-729-216-22	s	TRANSISTOR 2SA1162-G
Q587	8-729-019-87	s	TRANSISTOR 2SC3392-6-TB
Q588	8-729-216-22	s	TRANSISTOR 2SA1162-G
Q589	8-729-019-87	s	TRANSISTOR 2SC3392-6-TB
Q590	8-729-216-22	s	TRANSISTOR 2SA1162-G
Q591	8-729-019-87	s	TRANSISTOR 2SC3392-6-TB
Q592	8-729-216-22	s	TRANSISTOR 2SA1162-G
Q593	8-729-019-87	s	TRANSISTOR 2SC3392-6-TB
Q594	8-729-216-22	s	TRANSISTOR 2SA1162-G
Q595	8-729-019-87	s	TRANSISTOR 2SC3392-6-TB
Q596	8-729-216-22	s	TRANSISTOR 2SA1162-G
Q597	8-729-019-87	s	TRANSISTOR 2SC3392-6-TB
Q598	8-729-216-22	s	TRANSISTOR 2SA1162-G
Q599	8-729-019-87	s	TRANSISTOR 2SC3392-6-TB
Q600	8-729-216-22	s	TRANSISTOR 2SA1162-G
Q601	8-729-230-49	s	TRANSISTOR 2SC2712-YG
Q602	8-729-202-37	s	TRANSISTOR 2SC3303-Y
R2	1-216-025-91	s	RESISTOR,CHIP 100 1/10W(2125)
R3	1-216-025-91	s	RESISTOR,CHIP 100 1/10W(2125)
R4	1-216-025-91	s	RESISTOR,CHIP 100 1/10W(2125)
R5	1-216-025-91	s	RESISTOR,CHIP 100 1/10W(2125)
R6	1-216-089-91	s	RESISTOR,CHIP 47K
R7 *2	1-216-089-91	s	RESISTOR,CHIP 47K
R8 *2	1-216-089-91	s	RESISTOR,CHIP 47K
R10	1-216-089-91	s	RESISTOR,CHIP 47K
R11	1-216-049-91	s	RESISTOR,CHIP 1K 1/10W(2125)
R22 *1	1-216-089-91	s	RESISTOR,CHIP 47K
R25	1-216-049-91	s	RESISTOR,CHIP 1K 1/10W(2125)
R27	1-216-089-91	s	RESISTOR,CHIP 47K
R28	1-216-089-91	s	RESISTOR, CHIP 47K
R33	1-216-025-91	s	RESISTOR,CHIP 100 1/10W(2125)
R34	1-216-025-91	s	RESISTOR,CHIP 100 1/10W(2125)
R35 *2	1-216-089-91	s	RESISTOR,CHIP 47K
R305	1-216-057-00	s	RESISTOR CHIP 2.2K 1/10W(2012)
R306	1-216-057-00	s	RESISTOR CHIP 2.2K 1/10W(2012)
R308	1-216-057-00	s	RESISTOR CHIP 2.2K 1/10W(2012)
R309	1-216-057-00	s	RESISTOR CHIP 2.2K 1/10W(2012)
R310	1-216-057-00	s	RESISTOR CHIP 2.2K 1/10W(2012)
R311	1-216-057-00	s	RESISTOR CHIP 2.2K 1/10W(2012)
R312	1-216-057-00	s	RESISTOR CHIP 2.2K 1/10W(2012)
R313	1-216-057-00	s	RESISTOR CHIP 2.2K 1/10W(2012)
R314	1-216-057-00	s	RESISTOR CHIP 2.2K 1/10W(2012)
R315	1-216-057-00	s	RESISTOR CHIP 2.2K 1/10W(2012)
R316	1-216-057-00	s	RESISTOR CHIP 2.2K 1/10W(2012)
R317	1-216-057-00	s	RESISTOR CHIP 2.2K 1/10W(2012)
R318	1-216-057-00	s	RESISTOR CHIP 2.2K 1/10W(2012)
R319	1-216-057-00	s	RESISTOR CHIP 2.2K 1/10W(2012)
R320	1-218-478-11	s	RESISTOR, CHIP 330 1/4W (3225)
R321	1-220-262-11	s	RESISTOR CHIP 680 1/4W (3225)
R322	1-216-049-91	s	RESISTOR,CHIP 1K 1/10W(2125)
R323	1-218-478-11	s	RESISTOR, CHIP 330 1/4W (3225)
R324	1-218-478-11	s	RESISTOR, CHIP 330 1/4W (3225)

(KY-452A BOARD(DSBK-200))

Ref. No. or Q'ty	Part No.	SP	Description
R325	1-216-057-00	s	RESISTOR CHIP 2.2K 1/10W(2012)
R326	1-216-057-00	s	RESISTOR CHIP 2.2K 1/10W(2012)
R327	1-216-057-00	s	RESISTOR CHIP 2.2K 1/10W(2012)
R328	1-216-057-00	s	RESISTOR CHIP 2.2K 1/10W(2012)
R329	1-216-057-00	s	RESISTOR CHIP 2.2K 1/10W(2012)
R330	1-216-057-00	s	RESISTOR CHIP 2.2K 1/10W(2012)
R331	1-216-057-00	s	RESISTOR CHIP 2.2K 1/10W(2012)
R332	1-216-057-00	s	RESISTOR CHIP 2.2K 1/10W(2012)
R333	1-216-057-00	s	RESISTOR CHIP 2.2K 1/10W(2012)
R334	1-216-057-00	s	RESISTOR CHIP 2.2K 1/10W(2012)
R335	1-216-057-00	s	RESISTOR CHIP 2.2K 1/10W(2012)
R336	1-216-057-00	s	RESISTOR CHIP 2.2K 1/10W(2012)
R337	1-218-478-11	s	RESISTOR, CHIP 330 1/4W (3225)
R338	1-218-478-11	s	RESISTOR, CHIP 330 1/4W (3225)
R339	1-216-049-91	s	RESISTOR,CHIP 1K 1/10W(2125)
R340	1-218-478-11	s	RESISTOR, CHIP 330 1/4W (3225)
R341	1-218-478-11	s	RESISTOR, CHIP 330 1/4W (3225)
R342	1-216-057-00	s	RESISTOR CHIP 2.2K 1/10W(2012)
R343	1-216-057-00	s	RESISTOR CHIP 2.2K 1/10W(2012)
R344	1-216-057-00	s	RESISTOR CHIP 2.2K 1/10W(2012)
R345	1-216-057-00	s	RESISTOR CHIP 2.2K 1/10W(2012)
R346	1-216-057-00	s	RESISTOR CHIP 2.2K 1/10W(2012)
R347	1-216-057-00	s	RESISTOR CHIP 2.2K 1/10W(2012)
R348	1-216-057-00	s	RESISTOR CHIP 2.2K 1/10W(2012)
R349	1-216-057-00	s	RESISTOR CHIP 2.2K 1/10W(2012)
R350	1-216-057-00	s	RESISTOR CHIP 2.2K 1/10W(2012)
R351	1-216-057-00	s	RESISTOR CHIP 2.2K 1/10W(2012)
R352	1-216-057-00	s	RESISTOR CHIP 2.2K 1/10W(2012)
R353	1-216-057-00	s	RESISTOR CHIP 2.2K 1/10W(2012)
R354	1-218-478-11	s	RESISTOR, CHIP 330 1/4W (3225)
R355	1-216-049-91	s	RESISTOR,CHIP 1K 1/10W(2125)
R356	1-216-049-91	s	RESISTOR,CHIP 1K 1/10W(2125)
R357	1-220-262-11	s	RESISTOR CHIP 680 1/4W (3225)
R358	1-218-478-11	s	RESISTOR, CHIP 330 1/4W (3225)
R359	1-216-057-00	s	RESISTOR CHIP 2.2K 1/10W(2012)
R360	1-216-057-00	s	RESISTOR CHIP 2.2K 1/10W(2012)
R361	1-216-057-00	s	RESISTOR CHIP 2.2K 1/10W(2012)
R362	1-216-057-00	s	RESISTOR CHIP 2.2K 1/10W(2012)
R363	1-216-057-00	s	RESISTOR CHIP 2.2K 1/10W(2012)
R364	1-216-057-00	s	RESISTOR CHIP 2.2K 1/10W(2012)
R365	1-216-057-00	s	RESISTOR CHIP 2.2K 1/10W(2012)
R366	1-216-057-00	s	RESISTOR CHIP 2.2K 1/10W(2012)
R367	1-216-057-00	s	RESISTOR CHIP 2.2K 1/10W(2012)
R368	1-216-057-00	s	RESISTOR CHIP 2.2K 1/10W(2012)
R369	1-216-057-00	s	RESISTOR CHIP 2.2K 1/10W(2012)
R370	1-216-057-00	s	RESISTOR CHIP 2.2K 1/10W(2012)
R371	1-218-478-11	s	RESISTOR, CHIP 330 1/4W (3225)
R372	1-216-049-91	s	RESISTOR,CHIP 1K 1/10W(2125)
R373	1-216-049-91	s	RESISTOR,CHIP 1K 1/10W(2125)
R374	1-218-478-11	s	RESISTOR, CHIP 330 1/4W (3225)
R375	1-218-478-11	s	RESISTOR, CHIP 330 1/4W (3225)
R376	1-216-057-00	s	RESISTOR CHIP 2.2K 1/10W(2012)
R377	1-216-057-00	s	RESISTOR CHIP 2.2K 1/10W(2012)
R378	1-216-057-00	s	RESISTOR CHIP 2.2K 1/10W(2012)
R379	1-216-057-00	s	RESISTOR CHIP 2.2K 1/10W(2012)
R380	1-216-057-00	s	RESISTOR CHIP 2.2K 1/10W(2012)
R381	1-216-057-00	s	RESISTOR CHIP 2.2K 1/10W(2012)
R382	1-216-057-00	s	RESISTOR CHIP 2.2K 1/10W(2012)
R383	1-216-057-00	s	RESISTOR CHIP 2.2K 1/10W(2012)

(KY-452A BOARD(DSBK-200))

Ref. No. or Q'ty	Part No.	SP	Description
R384	1-218-478-11	s	RESISTOR, CHIP 330 1/4W (3225)
R385	1-216-049-91	s	RESISTOR,CHIP 1K 1/10W(2125)
R386	1-218-478-11	s	RESISTOR, CHIP 330 1/4W (3225)
R387	1-216-057-00	s	RESISTOR CHIP 2.2K 1/10W(2012)
R388	1-216-057-00	s	RESISTOR CHIP 2.2K 1/10W(2012)
R389	1-216-057-00	s	RESISTOR CHIP 2.2K 1/10W(2012)
R390	1-216-057-00	s	RESISTOR CHIP 2.2K 1/10W(2012)
R391	1-216-057-00	s	RESISTOR CHIP 2.2K 1/10W(2012)
R392	1-216-057-00	s	RESISTOR CHIP 2.2K 1/10W(2012)
R393	1-216-057-00	s	RESISTOR CHIP 2.2K 1/10W(2012)
R394	1-216-057-00	s	RESISTOR CHIP 2.2K 1/10W(2012)
R395	1-218-478-11	s	RESISTOR, CHIP 330 1/4W (3225)
R396	1-216-049-91	s	RESISTOR,CHIP 1K 1/10W(2125)
R397	1-216-061-00	s	RESISTOR CHIP 3.3K 1/10W(2012)
R398	1-216-057-00	s	RESISTOR CHIP 2.2K 1/10W(2012)
R399	1-216-057-00	s	RESISTOR CHIP 2.2K 1/10W(2012)
R400	1-216-057-00	s	RESISTOR CHIP 2.2K 1/10W(2012)
R401	1-216-057-00	s	RESISTOR CHIP 2.2K 1/10W(2012)
R402	1-216-057-00	s	RESISTOR CHIP 2.2K 1/10W(2012)
R403	1-216-057-00	s	RESISTOR CHIP 2.2K 1/10W(2012)
R404	1-216-057-00	s	RESISTOR CHIP 2.2K 1/10W(2012)
R405	1-216-057-00	s	RESISTOR CHIP 2.2K 1/10W(2012)
R406	1-216-057-00	s	RESISTOR CHIP 2.2K 1/10W(2012)
R407	1-216-057-00	s	RESISTOR CHIP 2.2K 1/10W(2012)
R408	1-218-478-11	s	RESISTOR, CHIP 330 1/4W (3225)
R409	1-216-049-91	s	RESISTOR,CHIP 1K 1/10W(2125)
R410	1-218-478-11	s	RESISTOR, CHIP 330 1/4W (3225)
R411	1-218-478-11	s	RESISTOR, CHIP 330 1/4W (3225)
R412	1-216-057-00	s	RESISTOR CHIP 2.2K 1/10W(2012)
R414	1-216-057-00	s	RESISTOR CHIP 2.2K 1/10W(2012)
R415	1-216-057-00	s	RESISTOR CHIP 2.2K 1/10W(2012)
R416	1-216-057-00	s	RESISTOR CHIP 2.2K 1/10W(2012)
R417	1-216-057-00	s	RESISTOR CHIP 2.2K 1/10W(2012)
R419	1-216-057-00	s	RESISTOR CHIP 2.2K 1/10W(2012)
R420	1-216-057-00	s	RESISTOR CHIP 2.2K 1/10W(2012)
R421	1-216-057-00	s	RESISTOR CHIP 2.2K 1/10W(2012)
R422	1-218-478-11	s	RESISTOR, CHIP 330 1/4W (3225)
R424	1-216-049-91	s	RESISTOR,CHIP 1K 1/10W(2125)
R425	1-218-478-11	s	RESISTOR, CHIP 330 1/4W (3225)
R426	1-216-049-91	s	RESISTOR,CHIP 1K 1/10W(2125)
R427	1-216-057-00	s	RESISTOR CHIP 2.2K 1/10W(2012)
R428	1-216-057-00	s	RESISTOR CHIP 2.2K 1/10W(2012)
R429	1-216-057-00	s	RESISTOR CHIP 2.2K 1/10W(2012)
R430	1-216-057-00	s	RESISTOR CHIP 2.2K 1/10W(2012)
R431	1-216-057-00	s	RESISTOR CHIP 2.2K 1/10W(2012)
R432	1-216-057-00	s	RESISTOR CHIP 2.2K 1/10W(2012)
R433	1-218-478-11	s	RESISTOR, CHIP 330 1/4W (3225)
R434	1-220-261-11	s	RESISTOR, CHIP 470 1/4W (3225)
R435	1-216-061-00	s	RESISTOR CHIP 3.3K 1/10W(2012)
R439	1-216-057-00	s	RESISTOR CHIP 2.2K 1/10W(2012)
R440	1-216-057-00	s	RESISTOR CHIP 2.2K 1/10W(2012)
R441	1-216-049-91	s	RESISTOR,CHIP 1K 1/10W(2125)
R501	1-216-025-91	s	RESISTOR,CHIP 100 1/10W(2125)
R502	1-216-025-91	s	RESISTOR,CHIP 100 1/10W(2125)
R503	1-216-025-91	s	RESISTOR,CHIP 100 1/10W(2125)
R504	1-216-025-91	s	RESISTOR,CHIP 100 1/10W(2125)
R505	1-216-025-91	s	RESISTOR,CHIP 100 1/10W(2125)
R506	1-216-025-91	s	RESISTOR,CHIP 100 1/10W(2125)
R507	1-216-025-91	s	RESISTOR,CHIP 100 1/10W(2125)

(KY-452A BOARD(DSBK-200))

Ref. No. or Q'ty	Part No.	SP	Description
R508	1-216-025-91	s	RESISTOR,CHIP 100 1/10W(2125)
R509	1-216-025-91	s	RESISTOR,CHIP 100 1/10W(2125)
R510	1-216-025-91	s	RESISTOR,CHIP 100 1/10W(2125)
R511	1-216-025-91	s	RESISTOR,CHIP 100 1/10W(2125)
R512	1-216-025-91	s	RESISTOR,CHIP 100 1/10W(2125)
R513	1-216-025-91	s	RESISTOR,CHIP 100 1/10W(2125)
R514	1-216-025-91	s	RESISTOR,CHIP 100 1/10W(2125)
R515	1-216-025-91	s	RESISTOR,CHIP 100 1/10W(2125)
R516	1-216-025-91	s	RESISTOR,CHIP 100 1/10W(2125)
R517	1-216-025-91	s	RESISTOR,CHIP 100 1/10W(2125)
R518	1-216-025-91	s	RESISTOR,CHIP 100 1/10W(2125)
R519	1-216-025-91	s	RESISTOR,CHIP 100 1/10W(2125)
R520	1-216-025-91	s	RESISTOR,CHIP 100 1/10W(2125)
R521	1-216-025-91	s	RESISTOR,CHIP 100 1/10W(2125)
R522	1-216-025-91	s	RESISTOR,CHIP 100 1/10W(2125)
R523	1-216-025-91	s	RESISTOR,CHIP 100 1/10W(2125)
R524	1-216-025-91	s	RESISTOR,CHIP 100 1/10W(2125)
R525	1-216-025-91	s	RESISTOR,CHIP 100 1/10W(2125)
R526	1-216-025-91	s	RESISTOR,CHIP 100 1/10W(2125)
R527	1-216-025-91	s	RESISTOR,CHIP 100 1/10W(2125)
R528	1-216-025-91	s	RESISTOR,CHIP 100 1/10W(2125)
R529	1-216-025-91	s	RESISTOR,CHIP 100 1/10W(2125)
R530	1-216-025-91	s	RESISTOR,CHIP 100 1/10W(2125)
R531	1-216-025-91	s	RESISTOR,CHIP 100 1/10W(2125)
R532	1-216-025-91	s	RESISTOR,CHIP 100 1/10W(2125)
R533	1-216-025-91	s	RESISTOR,CHIP 100 1/10W(2125)
R534	1-216-025-91	s	RESISTOR,CHIP 100 1/10W(2125)
R535	1-216-025-91	s	RESISTOR,CHIP 100 1/10W(2125)
R536	1-216-025-91	s	RESISTOR,CHIP 100 1/10W(2125)
R537	1-216-025-91	s	RESISTOR,CHIP 100 1/10W(2125)
R538	1-216-025-91	s	RESISTOR,CHIP 100 1/10W(2125)
R539	1-216-025-91	s	RESISTOR,CHIP 100 1/10W(2125)
R540	1-216-025-91	s	RESISTOR,CHIP 100 1/10W(2125)
R541	1-216-025-91	s	RESISTOR,CHIP 100 1/10W(2125)
R542	1-216-025-91	s	RESISTOR,CHIP 100 1/10W(2125)
R543	1-216-025-91	s	RESISTOR,CHIP 100 1/10W(2125)
R544	1-216-025-91	s	RESISTOR,CHIP 100 1/10W(2125)
R545	1-216-025-91	s	RESISTOR,CHIP 100 1/10W(2125)
R546	1-216-025-91	s	RESISTOR,CHIP 100 1/10W(2125)
R547	1-216-025-91	s	RESISTOR,CHIP 100 1/10W(2125)
R548	1-216-025-91	s	RESISTOR,CHIP 100 1/10W(2125)
R549	1-216-025-91	s	RESISTOR,CHIP 100 1/10W(2125)
R550	1-216-025-91	s	RESISTOR,CHIP 100 1/10W(2125)
R551	1-216-049-91	s	RESISTOR,CHIP 1K 1/10W(2125)
R552	1-216-025-91	s	RESISTOR,CHIP 100 1/10W(2125)
R553	1-216-049-91	s	RESISTOR,CHIP 1K 1/10W(2125)
R554	1-216-033-00	s	RESISTOR,CHIP 220 1/10W(2012)
R555	1-208-823-11	s	RESISTOR,CHIP 51K 1/10W (2125)
R557	1-216-093-00	s	RESISTOR, CHIP 68K 1/10W(2012)
RB1	1-236-904-11	s	RESISTOR NETWORK 1K (1608)
RB2	1-236-908-11	s	RESISTOR,NETWORK 10K (3216)
RB3 *1	1-239-389-11	s	RESISTOR,NETWORK 47K (1608)
RB4	1-239-389-11	s	RESISTOR,NETWORK 47K (1608)
RB14	1-239-308-11	s	RESISTOR ARRAY,CHIP 47K
RB15	1-239-308-11	s	RESISTOR ARRAY,CHIP 47K
RB16	1-239-308-11	s	RESISTOR ARRAY,CHIP 47K
RB17	1-239-308-11	s	RESISTOR ARRAY,CHIP 47K
RB18	1-239-308-11	s	RESISTOR ARRAY,CHIP 47K
RB201	1-239-306-11	s	RESISTOR ARRAY,CHIP 10K

(KY-452A BOARD(DSBK-200))

Ref. No. or Q'ty	Part No.	SP	Description
RB301	1-239-304-11	s	RESISTOR ARRAY, CHIP 2.2K
S1	1-692-892-11	s	SWITCH, TACTILE (WITH LIGHT)
S2	1-692-891-21	s	SWITCH, TACTILE (WITH LIGHT)
S3	1-692-537-11	s	SWITCH, TACTILE (WITH LIGHT)
S4	1-692-890-11	s	SWITCH, TACTILE
S5	1-692-994-11	s	SWITCH, TACTILE (ILLUMINATED)
S6	1-692-892-21	s	SWITCH, TACTILE (WITH LIGHT)
S7	1-692-890-11	s	SWITCH, TACTILE
S8	1-692-537-11	s	SWITCH, TACTILE (WITH LIGHT)
S9	1-692-994-11	s	SWITCH, TACTILE (ILLUMINATED)
S10	1-692-994-11	s	SWITCH, TACTILE (ILLUMINATED)
S11	1-692-890-41	s	SWITCH, TACTILE (WITH LIGHT)
S12	1-692-537-21	s	SWITCH, TACTILE (WITH LIGHT)
S13	1-692-537-11	s	SWITCH, TACTILE (WITH LIGHT)
S14	1-762-132-11	s	SWITCH, TACTILE (ILLUMINATED)
S15	1-692-994-11	s	SWITCH, TACTILE (ILLUMINATED)
S16	1-692-890-31	s	SWITCH, TACTILE (WITH LIGHT)
S17	1-692-537-21	s	SWITCH, TACTILE (WITH LIGHT)
S18	1-692-537-11	s	SWITCH, TACTILE (WITH LIGHT)
S19	1-692-994-11	s	SWITCH, TACTILE (ILLUMINATED)
S20	1-692-994-11	s	SWITCH, TACTILE (ILLUMINATED)
S25	1-571-977-11	s	SWITCH,TACTIL
S26	1-571-977-11	s	SWITCH,TACTIL
S27	1-571-977-11	s	SWITCH,TACTIL
S28	1-571-977-11	s	SWITCH,TACTIL
S29	1-571-977-11	s	SWITCH,TACTIL
S30	1-571-977-11	s	SWITCH,TACTIL
S31	1-571-977-11	s	SWITCH,TACTIL
S32	1-692-890-21	s	SWITCH, TACTILE (WITH LIGHT)
S33	1-692-537-11	s	SWITCH, TACTILE (WITH LIGHT)
S34	1-692-994-11	s	SWITCH, TACTILE (ILLUMINATED)
S35	1-692-994-11	s	SWITCH, TACTILE (ILLUMINATED)
S36	1-692-537-11	s	SWITCH, TACTILE (WITH LIGHT)
S37	1-692-994-11	s	SWITCH, TACTILE (ILLUMINATED)
S38	1-692-537-11	s	SWITCH, TACTILE (WITH LIGHT)
S39	1-692-994-11	s	SWITCH, TACTILE (ILLUMINATED)
S40	1-692-994-11	s	SWITCH, TACTILE (ILLUMINATED)
S41	1-692-890-11	s	SWITCH, TACTILE
S42	1-692-537-21	s	SWITCH, TACTILE (WITH LIGHT)
S43	1-692-994-11	s	SWITCH, TACTILE (ILLUMINATED)
S44	1-692-537-11	s	SWITCH, TACTILE (WITH LIGHT)
S46	1-692-537-21	s	SWITCH, TACTILE (WITH LIGHT)
T501	1-435-186-11	s	TRANSFORMER, CONVERTER
X1	1-767-460-21	s	OSCILLATOR, CERAMIC

MB-859 BOARD(DSR-2000/2000P)

Ref. No. or Q'ty	Part No.	SP	Description
1pc	A-8323-494-A	o	MOUNTED CIRCUIT BOARD, MB-859
CN106	1-778-259-11	o	CONNECTOR, BOARD TO BOARD 148P
CN111	1-778-259-11	o	CONNECTOR, BOARD TO BOARD 148P
CN114	1-778-259-11	o	CONNECTOR, BOARD TO BOARD 148P
CN202	1-778-259-11	o	CONNECTOR, BOARD TO BOARD 148P
CN300	1-778-259-11	o	CONNECTOR, BOARD TO BOARD 148P
CN500	1-565-913-11	s	SOCKET,CONNECTOR 22P
CN501	1-565-913-11	s	SOCKET,CONNECTOR 22P
CN502	1-565-473-11	o	HOUSING,CONNECTOR 30P
CN503	1-565-473-11	o	HOUSING,CONNECTOR 30P
CN504	1-565-473-11	o	HOUSING,CONNECTOR 30P
CN505	1-565-681-11	s	SOCKET, CONNECTOR 18P
CN601	1-691-740-11	o	CONNECTOR,BOARD TO BOARD 14P
CN602	1-691-740-11	o	CONNECTOR,BOARD TO BOARD 14P
CN603	1-691-740-11	o	CONNECTOR,BOARD TO BOARD 14P
CN604	1-691-740-11	o	CONNECTOR,BOARD TO BOARD 14P
CN605	1-691-740-11	o	CONNECTOR,BOARD TO BOARD 14P
CN606	1-691-740-11	o	CONNECTOR,BOARD TO BOARD 14P
CN607	1-691-740-11	o	CONNECTOR,BOARD TO BOARD 14P
CN608	1-691-740-11	o	CONNECTOR,BOARD TO BOARD 14P
CN701	1-691-740-11	o	CONNECTOR,BOARD TO BOARD 14P
CN702	1-691-740-11	o	CONNECTOR,BOARD TO BOARD 14P
CN703	1-691-740-11	o	CONNECTOR,BOARD TO BOARD 14P
CN704	1-691-740-11	o	CONNECTOR,BOARD TO BOARD 14P
CN901	1-779-092-11	s	PIN, CONNECTOR (PC BOARD) 10P
CN902	1-580-838-11	o	PIN,CONNECTOR (PC BOARD) 4P

MS-64 BOARD(DSR-2000/2000P)

Ref. No. or Q'ty	Part No.	SP	Description
1pc	A-8323-565-A	o	MOUNTED CIRCUIT BOARD, MS-64
C1	1-162-970-11	s	CAPACITOR CERAMIC 0.01MF/25V B
C2	1-162-970-11	s	CAPACITOR CERAMIC 0.01MF/25V B
C3	1-164-218-11	s	CAPACITOR,CERAMIC 180PF/50V CH
C4	1-164-218-11	s	CAPACITOR,CERAMIC 180PF/50V CH
C5	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C6	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C7	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C8	1-126-390-11	s	CAPACITOR ELECT 22MF/6.3V(105)
C9	1-162-970-11	s	CAPACITOR CERAMIC 0.01MF/25V B
C10	1-162-970-11	s	CAPACITOR CERAMIC 0.01MF/25V B
C11	1-162-923-11	s	CAPACITOR,CERAMIC 47PF/50V CH
C12	1-162-923-11	s	CAPACITOR,CERAMIC 47PF/50V CH
C13	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C14	1-162-927-11	s	CAPACITOR,CERAMIC 100PF/50V CH
C15	1-162-959-11	s	CAPACITOR,CERAMIC 330PF/50V SL
C16	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C17	1-162-968-11	s	CAPACITOR,CERAMIC 4700PF/50V B
C18	1-164-677-11	s	CAPACITOR,CERAMIC 0.033M/16V(B)
C19	1-135-177-21	s	CAPACITOR TANTALUM 1MF/25V
C20	1-135-259-11	s	CAPACITOR TANTALUM 10MF/6.3VF
C21	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C22	1-164-315-11	s	CAPACITOR,CERAMIC 470PF/50V CH
C23	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C24	1-162-970-11	s	CAPACITOR CERAMIC 0.01MF/25V B
C25	1-162-970-11	s	CAPACITOR CERAMIC 0.01MF/25V B
C26	1-162-923-11	s	CAPACITOR,CERAMIC 47PF/50V CH
C27	1-162-923-11	s	CAPACITOR,CERAMIC 47PF/50V CH
C28	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C29	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C30	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C31	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C32	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C33	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C34	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C35	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C36	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C37	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C38	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C39	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C40	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
CN1	1-778-648-11	o	CONNECTOR, FFC (ZIF) 20P
CN2	1-764-078-11	s	PIN, CONNECTOR (PC BOARD) 3P
CN3	1-695-320-21	o	PIN, CONNECTOR(1.5MM)SMD 2P
CN4	1-778-647-11	o	CONNECTOR, FFC (ZIF) 15P
CN5	1-695-480-21	o	PIN, CONNECTOR (PC BOARD) 2P
CN6	1-778-648-11	o	CONNECTOR, FFC (ZIF) 20P
CN7	1-766-432-21	o	HOUSING, CONNECTOR 6P
CN8	1-764-078-11	s	PIN, CONNECTOR (PC BOARD) 3P
CN9	1-764-078-11	s	PIN, CONNECTOR (PC BOARD) 3P
CN10	1-750-840-21	s	HOUSING, CONNECTOR 15P
CN11	1-778-648-11	o	CONNECTOR, FFC (ZIF) 20P
CN12	1-764-078-11	s	PIN, CONNECTOR (PC BOARD) 3P
CN13	1-778-647-11	o	CONNECTOR, FFC (ZIF) 15P
CN19	1-695-480-21	o	PIN, CONNECTOR (PC BOARD) 2P
CN500	1-784-979-11	s	HOUSING, CONNECTOR 22P
CN501	1-784-979-11	s	HOUSING, CONNECTOR 22P
CN502	1-766-431-21	o	HOUSING, CONNECTOR 30P

(MS-64 BOARD(DSR-2000/2000P))

Ref. No. or Q'ty	Part No.	SP	Description
CN503	1-766-431-21	o	HOUSING, CONNECTOR 30P
CN504	1-766-431-21	o	HOUSING, CONNECTOR 30P
D1	8-719-941-86	s	DIODE DAN202U
IC1	8-759-338-95	s	IC NJM2903V (TE2)
IC2	8-759-444-87	s	IC NJM324V (TE2)
IC3	8-759-278-58	s	IC NJM4558V (TE2)
IC4	8-759-278-58	s	IC NJM4558V (TE2)
IC5	8-759-278-58	s	IC NJM4558V (TE2)
IC6	8-759-593-47	s	IC AK6417AM-E2
IC7	8-759-337-40	s	IC NJM2904V(TE2)
R1	1-216-812-11	s	RESISTOR,CHIP 180 1/16W 1608
R2	1-218-863-11	s	RESISTOR,CHIP 4.7K 1/16W(1608)
R3	1-218-863-11	s	RESISTOR,CHIP 4.7K 1/16W(1608)
R4	1-218-863-11	s	RESISTOR,CHIP 4.7K 1/16W(1608)
R5	1-218-863-11	s	RESISTOR,CHIP 4.7K 1/16W(1608)
R6	1-216-821-11	s	RESISTOR,CHIP 1.0K 1/16W(1608)
R7	1-216-821-11	s	RESISTOR,CHIP 1.0K 1/16W(1608)
R8	1-216-839-11	s	RESISTOR,CHIP 33K 1/16W 1608
R9	1-216-839-11	s	RESISTOR,CHIP 33K 1/16W 1608
R10	1-216-817-11	s	RESISTOR,CHIP 470 1/16W 1608
R11	1-216-817-11	s	RESISTOR,CHIP 470 1/16W 1608
R12	1-216-850-11	s	RESISTOR,CHIP 270K 1/16W 1608
R13	1-216-845-11	s	RESISTOR,CHIP 100K 1/16W(1608)
R14	1-216-811-11	s	RESISTOR, CHIP 150 1/16W 1608
R15	1-216-809-11	s	RESISTOR,CHIP 100 1/16W 1608
R16	1-218-863-11	s	RESISTOR,CHIP 4.7K 1/16W(1608)
R17	1-218-863-11	s	RESISTOR,CHIP 4.7K 1/16W(1608)
R18	1-218-863-11	s	RESISTOR,CHIP 4.7K 1/16W(1608)
R19	1-218-863-11	s	RESISTOR,CHIP 4.7K 1/16W(1608)
R20	1-216-821-11	s	RESISTOR,CHIP 1.0K 1/16W(1608)
R21	1-216-821-11	s	RESISTOR,CHIP 1.0K 1/16W(1608)
R22	1-216-821-11	s	RESISTOR,CHIP 1.0K 1/16W(1608)
R23	1-216-821-11	s	RESISTOR,CHIP 1.0K 1/16W(1608)
R24	1-216-829-11	s	RESISTOR, CHIP 4.7K 1/16W 1608
R25	1-216-829-11	s	RESISTOR, CHIP 4.7K 1/16W 1608
R26	1-216-842-11	s	RESISTOR,CHIP 56K 1/16W(1608)
R27	1-216-842-11	s	RESISTOR,CHIP 56K 1/16W(1608)
R28	1-216-845-11	s	RESISTOR,CHIP 100K 1/16W(1608)
R29	1-216-845-11	s	RESISTOR,CHIP 100K 1/16W(1608)
R30	1-216-843-11	s	RESISTOR,CHIP 68K 1/16W (1608)
R31	1-216-827-11	s	RESISTOR, CHIP 3.3K 1/16W 1608
R32	1-216-833-11	s	RESISTOR,CHIP 10K 1/16W 1608
R33	1-216-833-11	s	RESISTOR,CHIP 10K 1/16W 1608
R34	1-216-850-11	s	RESISTOR,CHIP 270K 1/16W 1608
R35	1-216-845-11	s	RESISTOR,CHIP 100K 1/16W(1608)
R36	1-216-829-11	s	RESISTOR, CHIP 4.7K 1/16W 1608
R37	1-216-833-11	s	RESISTOR,CHIP 10K 1/16W 1608
R38	1-216-842-11	s	RESISTOR,CHIP 56K 1/16W(1608)
R39	1-216-853-11	s	RESISTOR,CHIP 470K 1/16W(1608)
R40	1-216-853-11	s	RESISTOR,CHIP 470K 1/16W(1608)
R41	1-216-817-11	s	RESISTOR,CHIP 470 1/16W 1608
R42	1-216-817-11	s	RESISTOR,CHIP 470 1/16W 1608
R43	1-218-863-11	s	RESISTOR,CHIP 4.7K 1/16W(1608)
R44	1-218-863-11	s	RESISTOR,CHIP 4.7K 1/16W(1608)
R45	1-218-863-11	s	RESISTOR,CHIP 4.7K 1/16W(1608)
R46	1-218-863-11	s	RESISTOR,CHIP 4.7K 1/16W(1608)
R47	1-216-821-11	s	RESISTOR,CHIP 1.0K 1/16W(1608)

(MS-64 BOARD(DSR-2000/2000P))

Ref. No. or Q'ty	Part No.	SP	Description
R48	1-216-821-11	s	RESISTOR,CHIP 1.0K 1/16W(1608)
R49	1-216-842-11	s	RESISTOR,CHIP 56K 1/16W(1608)
R50	1-216-842-11	s	RESISTOR,CHIP 56K 1/16W(1608)
R51	1-218-847-11	s	RESISTOR, CHIP 1K 1/16W (1608)
R52	1-218-847-11	s	RESISTOR, CHIP 1K 1/16W (1608)
R53	1-218-863-11	s	RESISTOR,CHIP 4.7K 1/16W(1608)
R54	1-218-863-11	s	RESISTOR,CHIP 4.7K 1/16W(1608)
R55	1-218-903-11	s	RESISTOR,CHIP 220K 1/16W(1608)
R56	1-218-887-11	s	RESISTOR,CHIP 47K 1/16W (1608)
R58	1-218-849-11	s	RESISTOR,CHIP 1.2K 1/16W(1608)
R59	1-218-861-11	s	RESISTOR,CHIP 3.9K 1/16W(1608)
R60	1-218-903-11	s	RESISTOR,CHIP 220K 1/16W(1608)
R61	1-216-864-11	s	RESISTOR,CHIP 0 1/16W (1608)

PTC-100 BOARD(DSR-2000/2000P,DSBK-200)

Ref. No. or Q'ty	Part No.	SP	Description
C1	1-126-157-11	s	CAPACITOR,ELECT 10MF/16V (105)
C2	1-163-038-91	s	CAPACITOR, CERAMIC 0.1MF/25V
C5	1-163-021-91	s	CAPACITOR, CERAMIC 0.01MF/50V
C6	1-163-021-91	s	CAPACITOR, CERAMIC 0.01MF/50V
C7	1-163-021-91	s	CAPACITOR, CERAMIC 0.01MF/50V
C8	1-163-021-91	s	CAPACITOR, CERAMIC 0.01MF/50V
C12	1-163-038-91	s	CAPACITOR, CERAMIC 0.1MF/25V
CN1	1-564-005-11	o	PIN, CONNECTOR 6P
IC2	8-759-981-61	s	IC LM2901M
PH4	8-749-925-01	s	PHOTO INTERRUPTER SPI-235-18
R1	1-208-774-11	s	RESISTOR,CHIP 470 1/10W (2012)
R2	1-208-774-11	s	RESISTOR,CHIP 470 1/10W (2012)
R5	1-208-822-11	s	RESISTOR,CHIP 47K 1/10W (2012)
R6	1-208-806-11	s	RESISTOR,CHIP 10K 1/10W (2012)
R7	1-208-806-11	s	RESISTOR,CHIP 10K 1/10W (2012)
R8	1-208-822-11	s	RESISTOR,CHIP 47K 1/10W (2012)
R11	1-208-806-11	s	RESISTOR,CHIP 10K 1/10W (2012)
R12	1-208-806-11	s	RESISTOR,CHIP 10K 1/10W (2012)
R14	1-208-806-11	s	RESISTOR,CHIP 10K 1/10W (2012)
R15	1-208-814-11	s	RESISTOR,CHIP 22K 1/10W (2012)
R17	1-208-814-11	s	RESISTOR,CHIP 22K 1/10W (2012)
R18	1-208-806-11	s	RESISTOR,CHIP 10K 1/10W (2012)
R20	1-208-806-11	s	RESISTOR,CHIP 10K 1/10W (2012)
R22	1-208-806-11	s	RESISTOR,CHIP 10K 1/10W (2012)
R23	1-208-814-11	s	RESISTOR,CHIP 22K 1/10W (2012)
R24	1-208-806-11	s	RESISTOR,CHIP 10K 1/10W (2012)
R27	1-208-830-11	s	RESISTOR,CHIP 100K 1/10W(2012)
R28	1-208-830-11	s	RESISTOR,CHIP 100K 1/10W(2012)
R29	1-208-830-11	s	RESISTOR,CHIP 100K 1/10W(2012)
R30	1-208-830-11	s	RESISTOR,CHIP 100K 1/10W(2012)
R31	1-208-806-11	s	RESISTOR,CHIP 10K 1/10W (2012)
R32	1-208-806-11	s	RESISTOR,CHIP 10K 1/10W (2012)
R33	1-208-806-11	s	RESISTOR,CHIP 10K 1/10W (2012)
R34	1-208-806-11	s	RESISTOR,CHIP 10K 1/10W (2012)
R35	1-208-774-11	s	RESISTOR,CHIP 470 1/10W (2012)
R36	1-208-806-11	s	RESISTOR,CHIP 10K 1/10W (2012)
R37	1-208-806-11	s	RESISTOR,CHIP 10K 1/10W (2012)
R38	1-208-774-11	s	RESISTOR,CHIP 470 1/10W (2012)
R39	1-208-806-11	s	RESISTOR,CHIP 10K 1/10W (2012)
R40	1-208-806-11	s	RESISTOR,CHIP 10K 1/10W (2012)

RP-111 BOARD(DSR-2000/2000P)

*a: Lot No. 908 - 911

Ref. No. or Q'ty	Part No.	SP	Description
1pc	A-8323-475-A	s	MOUNTED CIRCUIT BOARD, RP-111
1pc	3-179-084-01	s	LEVER(R),PRINTED C,BOARD
1pc	3-179-085-01	s	LEVER(L),PRINTED C.BOARD
1pc	7-682-903-11	s	SCREW +PWH 3X6(EP-PE/ZN/CM2)
C1	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C2	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C3	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C4	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C5	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C6	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C7	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C8	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C9	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C10	1-104-851-11	s	CAPACITOR,TANTALUM 10MF/10V
C11	1-104-851-11	s	CAPACITOR,TANTALUM 10MF/10V
C12	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C13	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C14	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C15	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C16	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C17	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C18	1-115-416-11	s	CAPACITOR,CERAMIC 1000PF/25V
C19	1-115-416-11	s	CAPACITOR,CERAMIC 1000PF/25V
C20	1-115-416-11	s	CAPACITOR,CERAMIC 1000PF/25V
C21	1-162-970-11	s	CAPACITOR CERAMIC 0.01MF/25V B
C22	1-115-416-11	s	CAPACITOR,CERAMIC 1000PF/25V
C23	1-135-145-11	s	CAPACITOR TANTALUM 0.47MF/35V
C24	1-115-416-11	s	CAPACITOR,CERAMIC 1000PF/25V
C25	1-162-970-11	s	CAPACITOR CERAMIC 0.01MF/25V B
C26	1-135-145-11	s	CAPACITOR TANTALUM 0.47MF/35V
C27	1-115-416-11	s	CAPACITOR,CERAMIC 1000PF/25V
C28	1-113-985-11	s	CAPACITOR,TANTALUM 10MF/20V
C29	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C30	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C31	1-104-851-11	s	CAPACITOR,TANTALUM 10MF/10V
C32	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C33	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C34	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C35	1-104-851-11	s	CAPACITOR,TANTALUM 10MF/10V
C36	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C37	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C38	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C39	1-162-970-11	s	CAPACITOR CERAMIC 0.01MF/25V B
C40	1-115-416-11	s	CAPACITOR,CERAMIC 1000PF/25V
C41	1-115-416-11	s	CAPACITOR,CERAMIC 1000PF/25V
C42	1-162-970-11	s	CAPACITOR CERAMIC 0.01MF/25V B
C43	1-135-145-11	s	CAPACITOR TANTALUM 0.47MF/35V
C44	1-115-416-11	s	CAPACITOR,CERAMIC 1000PF/25V
C45	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C46	1-104-851-11	s	CAPACITOR,TANTALUM 10MF/10V
C47	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C48	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C49	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C50	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C51	1-104-851-11	s	CAPACITOR,TANTALUM 10MF/10V
C52	1-104-851-11	s	CAPACITOR,TANTALUM 10MF/10V

(RP-111 BOARD(DSR-2000/2000P))

Ref. No. or Q'ty	Part No.	SP	Description
C101	1-113-985-11	s	CAPACITOR,TANTALUM 10MF/20V
C102	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C103	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C104	1-104-851-11	s	CAPACITOR,TANTALUM 10MF/10V
C106	1-162-970-11	s	CAPACITOR CERAMIC 0.01MF/25V B
C107	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C108	1-162-970-11	s	CAPACITOR CERAMIC 0.01MF/25V B
C109	1-162-970-11	s	CAPACITOR CERAMIC 0.01MF/25V B
C110	1-162-970-11	s	CAPACITOR CERAMIC 0.01MF/25V B
C111	1-113-985-11	s	CAPACITOR,TANTALUM 10MF/20V
C112	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C113	1-162-970-11	s	CAPACITOR CERAMIC 0.01MF/25V B
C115	1-162-969-11	s	CAPACITOR,CERAMIC 6800PF/25V B
C116	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C118	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C119	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C120	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C121	1-162-923-11	s	CAPACITOR,CERAMIC 47PF/50V CH
C122	1-162-969-11	s	CAPACITOR,CERAMIC 6800PF/25V B
C123	1-162-923-11	s	CAPACITOR,CERAMIC 47PF/50V CH
C124	1-162-970-11	s	CAPACITOR CERAMIC 0.01MF/25V B
C125	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C126	1-162-969-11	s	CAPACITOR,CERAMIC 6800PF/25V B
C127	1-162-970-11	s	CAPACITOR CERAMIC 0.01MF/25V B
C128	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C129	1-162-970-11	s	CAPACITOR CERAMIC 0.01MF/25V B
C131	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C133	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C134	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C135	1-162-923-11	s	CAPACITOR,CERAMIC 47PF/50V CH
C137	1-162-925-11	s	CAPACITOR,CERAMIC 68PF/50V CH
C138	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C139	1-162-958-11	s	CAPACITOR,CERAMIC 270PF/50V SL
C140	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C151	1-113-985-11	s	CAPACITOR,TANTALUM 10MF/20V
C152	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C153	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C154	1-104-851-11	s	CAPACITOR,TANTALUM 10MF/10V
C156	1-162-970-11	s	CAPACITOR CERAMIC 0.01MF/25V B
C157	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C158	1-162-970-11	s	CAPACITOR CERAMIC 0.01MF/25V B
C159	1-162-970-11	s	CAPACITOR CERAMIC 0.01MF/25V B
C160	1-162-970-11	s	CAPACITOR CERAMIC 0.01MF/25V B
C161	1-113-985-11	s	CAPACITOR,TANTALUM 10MF/20V
C162	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C163	1-162-970-11	s	CAPACITOR CERAMIC 0.01MF/25V B
C165	1-162-969-11	s	CAPACITOR,CERAMIC 6800PF/25V B
C166	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C168	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C169	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C170	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C171	1-162-923-11	s	CAPACITOR,CERAMIC 47PF/50V CH
C172	1-162-969-11	s	CAPACITOR,CERAMIC 6800PF/25V B
C173	1-162-923-11	s	CAPACITOR,CERAMIC 47PF/50V CH
C174	1-162-970-11	s	CAPACITOR CERAMIC 0.01MF/25V B
C175	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C176	1-162-969-11	s	CAPACITOR,CERAMIC 6800PF/25V B
C177	1-162-970-11	s	CAPACITOR CERAMIC 0.01MF/25V B
C178	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F

(RP-111 BOARD(DSR-2000/2000P))

Ref. No. or Q'ty	Part No.	SP	Description
C179	1-162-970-11	s	CAPACITOR CERAMIC 0.01MF/25V B
C181	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C183	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C184	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C185	1-162-923-11	s	CAPACITOR,CERAMIC 47PF/50V CH
C187	1-162-925-11	s	CAPACITOR,CERAMIC 68PF/50V CH
C188	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C189	1-162-958-11	s	CAPACITOR,CERAMIC 270PF/50V SL
C190	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C201	1-113-985-11	s	CAPACITOR,TANTALUM 10MF/20V
C202	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C203	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C205	1-162-969-11	s	CAPACITOR,CERAMIC 6800PF/25V B
C208	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C209	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C211	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C212	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C213	1-162-923-11	s	CAPACITOR,CERAMIC 47PF/50V CH
C214	1-162-969-11	s	CAPACITOR,CERAMIC 6800PF/25V B
C215	1-162-923-11	s	CAPACITOR,CERAMIC 47PF/50V CH
C216	1-125-891-11	s	CAPACITOR CERAMIC 0.47MF/10V
C217	1-125-891-11	s	CAPACITOR CERAMIC 0.47MF/10V
C218	1-162-969-11	s	CAPACITOR,CERAMIC 6800PF/25V B
C219	1-125-891-11	s	CAPACITOR CERAMIC 0.47MF/10V
C220	1-125-891-11	s	CAPACITOR CERAMIC 0.47MF/10V
C221	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C223	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C224	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C227	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C229	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C230	1-162-923-11	s	CAPACITOR,CERAMIC 47PF/50V CH
C231	1-125-891-11	s	CAPACITOR CERAMIC 0.47MF/10V
C232	1-125-891-11	s	CAPACITOR CERAMIC 0.47MF/10V
C233	1-125-891-11	s	CAPACITOR CERAMIC 0.47MF/10V
C234	1-125-891-11	s	CAPACITOR CERAMIC 0.47MF/10V
C235	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C236	1-104-851-11	s	CAPACITOR,TANTALUM 10MF/10V
C237	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C238	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C239	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C240	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C251	1-113-985-11	s	CAPACITOR,TANTALUM 10MF/20V
C252	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C253	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C255	1-162-969-11	s	CAPACITOR,CERAMIC 6800PF/25V B
C258	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C259	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C261	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C262	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C263	1-162-923-11	s	CAPACITOR,CERAMIC 47PF/50V CH
C264	1-162-969-11	s	CAPACITOR,CERAMIC 6800PF/25V B
C265	1-162-923-11	s	CAPACITOR,CERAMIC 47PF/50V CH
C266	1-125-891-11	s	CAPACITOR CERAMIC 0.47MF/10V
C267	1-125-891-11	s	CAPACITOR CERAMIC 0.47MF/10V
C268	1-162-969-11	s	CAPACITOR,CERAMIC 6800PF/25V B
C269	1-125-891-11	s	CAPACITOR CERAMIC 0.47MF/10V
C270	1-125-891-11	s	CAPACITOR CERAMIC 0.47MF/10V
C271	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C273	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F

(RP-111 BOARD(DSR-2000/2000P))

Ref. No. or Q'ty	Part No.	SP	Description
C274	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C277	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C279	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C280	1-162-923-11	s	CAPACITOR,CERAMIC 47PF/50V CH
C281	1-125-891-11	s	CAPACITOR CERAMIC 0.47MF/10V
C282	1-125-891-11	s	CAPACITOR CERAMIC 0.47MF/10V
C283	1-125-891-11	s	CAPACITOR CERAMIC 0.47MF/10V
C284	1-125-891-11	s	CAPACITOR CERAMIC 0.47MF/10V
C285	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C286	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C287	1-162-925-11	s	CAPACITOR,CERAMIC 68PF/50V CH
C288	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C289	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C290	1-162-958-11	s	CAPACITOR,CERAMIC 270PF/50V SL
C291	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C292	1-162-923-11	s	CAPACITOR,CERAMIC 47PF/50V CH
C293	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C301	1-113-985-11	s	CAPACITOR,TANTALUM 10MF/20V
C302	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C303	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C305	1-162-969-11	s	CAPACITOR,CERAMIC 6800PF/25V B
C308	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C309	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C311	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C312	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C313	1-162-923-11	s	CAPACITOR,CERAMIC 47PF/50V CH
C314	1-162-969-11	s	CAPACITOR,CERAMIC 6800PF/25V B
C315	1-162-923-11	s	CAPACITOR,CERAMIC 47PF/50V CH
C316	1-125-891-11	s	CAPACITOR CERAMIC 0.47MF/10V
C317	1-125-891-11	s	CAPACITOR CERAMIC 0.47MF/10V
C318	1-162-969-11	s	CAPACITOR,CERAMIC 6800PF/25V B
C319	1-125-891-11	s	CAPACITOR CERAMIC 0.47MF/10V
C320	1-125-891-11	s	CAPACITOR CERAMIC 0.47MF/10V
C321	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C323	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C324	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C327	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C329	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C330	1-162-923-11	s	CAPACITOR,CERAMIC 47PF/50V CH
C331	1-125-891-11	s	CAPACITOR CERAMIC 0.47MF/10V
C332	1-125-891-11	s	CAPACITOR CERAMIC 0.47MF/10V
C333	1-125-891-11	s	CAPACITOR CERAMIC 0.47MF/10V
C334	1-125-891-11	s	CAPACITOR CERAMIC 0.47MF/10V
C335	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C336	1-104-851-11	s	CAPACITOR,TANTALUM 10MF/10V
C337	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C338	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C339	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C340	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C351	1-113-985-11	s	CAPACITOR,TANTALUM 10MF/20V
C352	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C353	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C355	1-162-969-11	s	CAPACITOR,CERAMIC 6800PF/25V B
C358	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C359	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C361	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C362	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C363	1-162-923-11	s	CAPACITOR,CERAMIC 47PF/50V CH
C364	1-162-969-11	s	CAPACITOR,CERAMIC 6800PF/25V B

(RP-111 BOARD(DSR-2000/2000P))

Ref. No. or Q'ty	Part No.	SP	Description
C365	1-162-923-11	s	CAPACITOR,CERAMIC 47PF/50V CH
C366	1-125-891-11	s	CAPACITOR CERAMIC 0.47MF/10V
C367	1-125-891-11	s	CAPACITOR CERAMIC 0.47MF/10V
C368	1-162-969-11	s	CAPACITOR,CERAMIC 6800PF/25V B
C369	1-125-891-11	s	CAPACITOR CERAMIC 0.47MF/10V
C370	1-125-891-11	s	CAPACITOR CERAMIC 0.47MF/10V
C371	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C373	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C374	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C377	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C379	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C380	1-162-923-11	s	CAPACITOR,CERAMIC 47PF/50V CH
C381	1-125-891-11	s	CAPACITOR CERAMIC 0.47MF/10V
C382	1-125-891-11	s	CAPACITOR CERAMIC 0.47MF/10V
C383	1-125-891-11	s	CAPACITOR CERAMIC 0.47MF/10V
C384	1-125-891-11	s	CAPACITOR CERAMIC 0.47MF/10V
C385	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C386	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C387	1-162-925-11	s	CAPACITOR,CERAMIC 68PF/50V CH
C388	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C389	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C390	1-162-958-11	s	CAPACITOR,CERAMIC 270PF/50V SL
C391	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C392	1-162-923-11	s	CAPACITOR,CERAMIC 47PF/50V CH
C401	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C402	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C403	1-104-851-11	s	CAPACITOR,TANTALUM 10MF/10V
C404	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C405	1-113-985-11	s	CAPACITOR,TANTALUM 10MF/20V
C406	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C407	1-113-985-11	s	CAPACITOR,TANTALUM 10MF/20V
C408	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C409	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C410	1-104-851-11	s	CAPACITOR,TANTALUM 10MF/10V
C411	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C412	1-104-851-11	s	CAPACITOR,TANTALUM 10MF/10V
C413	1-162-970-11	s	CAPACITOR CERAMIC 0.01MF/25V B
C414	1-162-970-11	s	CAPACITOR CERAMIC 0.01MF/25V B
C415	1-162-970-11	s	CAPACITOR CERAMIC 0.01MF/25V B
C416	1-162-970-11	s	CAPACITOR CERAMIC 0.01MF/25V B
C417	1-162-970-11	s	CAPACITOR CERAMIC 0.01MF/25V B
C418	1-162-970-11	s	CAPACITOR CERAMIC 0.01MF/25V B
C419	1-162-970-11	s	CAPACITOR CERAMIC 0.01MF/25V B
C420	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C421	1-162-970-11	s	CAPACITOR CERAMIC 0.01MF/25V B
C422	1-162-970-11	s	CAPACITOR CERAMIC 0.01MF/25V B
C423	1-115-416-11	s	CAPACITOR,CERAMIC 1000PF/25V
C425	1-162-923-11	s	CAPACITOR,CERAMIC 47PF/50V CH
C426	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C427	1-164-315-11	s	CAPACITOR,CERAMIC 470PF/50V CH
C428	1-164-217-11	s	CAPACITOR,CERAMIC 150PF/50V CH
C429	1-164-217-11	s	CAPACITOR,CERAMIC 150PF/50V CH
C430	1-162-970-11	s	CAPACITOR CERAMIC 0.01MF/25V B
C431	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C432	1-162-970-11	s	CAPACITOR CERAMIC 0.01MF/25V B
C433	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C434	1-162-964-11	s	CAPACITOR,CERAMIC 1000PF/50V B
C435	1-162-970-11	s	CAPACITOR CERAMIC 0.01MF/25V B
C436	1-162-964-11	s	CAPACITOR,CERAMIC 1000PF/50V B

(RP-111 BOARD(DSR-2000/2000P))

Ref. No. or Q'ty	Part No.	SP	Description
C437	1-162-970-11	s	CAPACITOR CERAMIC 0.01MF/25V B
C438	1-162-913-11	s	CAPACITOR,CHIP CERAMIC 8PF/50V
C439	1-162-970-11	s	CAPACITOR CERAMIC 0.01MF/25V B
C440	1-162-964-11	s	CAPACITOR,CERAMIC 1000PF/50V B
C441	1-162-964-11	s	CAPACITOR,CERAMIC 1000PF/50V B
C442	1-162-970-11	s	CAPACITOR CERAMIC 0.01MF/25V B
C443	1-162-970-11	s	CAPACITOR CERAMIC 0.01MF/25V B
C444	1-113-985-11	s	CAPACITOR,TANTALUM 10MF/20V
C445	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C446	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C447	1-104-851-11	s	CAPACITOR,TANTALUM 10MF/10V
C448	1-115-416-11	s	CAPACITOR,CERAMIC 1000PF/25V
C449	1-162-970-11	s	CAPACITOR CERAMIC 0.01MF/25V B
C450	1-162-923-11	s	CAPACITOR,CERAMIC 47PF/50V CH
C451	1-162-923-11	s	CAPACITOR,CERAMIC 47PF/50V CH
C452	1-162-970-11	s	CAPACITOR CERAMIC 0.01MF/25V B
C453	1-162-966-11	s	CAPACITOR,CERAMIC 2200PF/50V B
C454	1-162-970-11	s	CAPACITOR CERAMIC 0.01MF/25V B
C455	1-162-966-11	s	CAPACITOR,CERAMIC 2200PF/50V B
C456	1-162-970-11	s	CAPACITOR CERAMIC 0.01MF/25V B
C457	1-162-967-11	s	CAPACITOR,CERAMIC 3300PF/50V B
C458	1-162-967-11	s	CAPACITOR,CERAMIC 3300PF/50V B
C459	1-162-964-11	s	CAPACITOR,CERAMIC 1000PF/50V B
C460	1-162-927-11	s	CAPACITOR,CERAMIC 100PF/50V CH
C461	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C464	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C465	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C466	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
C467	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
C469	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C470	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
C471	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
C475	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
C476	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
C477	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
C501	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C502	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C503	1-104-851-11	s	CAPACITOR,TANTALUM 10MF/10V
C504	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C505	1-113-985-11	s	CAPACITOR,TANTALUM 10MF/20V
C506	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C507	1-113-985-11	s	CAPACITOR,TANTALUM 10MF/20V
C508	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C509	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C510	1-104-851-11	s	CAPACITOR,TANTALUM 10MF/10V
C511	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C512	1-104-851-11	s	CAPACITOR,TANTALUM 10MF/10V
C513	1-162-970-11	s	CAPACITOR CERAMIC 0.01MF/25V B
C514	1-162-970-11	s	CAPACITOR CERAMIC 0.01MF/25V B
C515	1-162-970-11	s	CAPACITOR CERAMIC 0.01MF/25V B
C516	1-162-970-11	s	CAPACITOR CERAMIC 0.01MF/25V B
C517	1-162-970-11	s	CAPACITOR CERAMIC 0.01MF/25V B
C518	1-162-970-11	s	CAPACITOR CERAMIC 0.01MF/25V B
C519	1-162-970-11	s	CAPACITOR CERAMIC 0.01MF/25V B
C520	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C521	1-162-970-11	s	CAPACITOR CERAMIC 0.01MF/25V B
C522	1-162-970-11	s	CAPACITOR CERAMIC 0.01MF/25V B
C523	1-115-416-11	s	CAPACITOR,CERAMIC 1000PF/25V
C525	1-162-923-11	s	CAPACITOR,CERAMIC 47PF/50V CH

(RP-111 BOARD(DSR-2000/2000P))

Ref. No. or Q'ty	Part No.	SP	Description
C526	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C527	1-164-315-11	s	CAPACITOR,CERAMIC 470PF/50V CH
C528	1-164-217-11	s	CAPACITOR,CERAMIC 150PF/50V CH
C529	1-164-217-11	s	CAPACITOR,CERAMIC 150PF/50V CH
C530	1-162-970-11	s	CAPACITOR CERAMIC 0.01MF/25V B
C531	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C532	1-162-970-11	s	CAPACITOR CERAMIC 0.01MF/25V B
C533	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C534	1-162-964-11	s	CAPACITOR,CERAMIC 1000PF/50V B
C535	1-162-970-11	s	CAPACITOR CERAMIC 0.01MF/25V B
C536	1-162-964-11	s	CAPACITOR,CERAMIC 1000PF/50V B
C537	1-162-970-11	s	CAPACITOR CERAMIC 0.01MF/25V B
C538	1-162-913-11	s	CAPACITOR,CHIP CERAMIC 8PF/50V
C539	1-162-970-11	s	CAPACITOR CERAMIC 0.01MF/25V B
C540	1-162-964-11	s	CAPACITOR,CERAMIC 1000PF/50V B
C541	1-162-964-11	s	CAPACITOR,CERAMIC 1000PF/50V B
C542	1-162-970-11	s	CAPACITOR CERAMIC 0.01MF/25V B
C543	1-162-970-11	s	CAPACITOR CERAMIC 0.01MF/25V B
C544	1-113-985-11	s	CAPACITOR,TANTALUM 10MF/20V
C545	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C546	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C547	1-104-851-11	s	CAPACITOR,TANTALUM 10MF/10V
C548	1-115-416-11	s	CAPACITOR,CERAMIC 1000PF/25V
C549	1-162-970-11	s	CAPACITOR CERAMIC 0.01MF/25V B
C550	1-162-923-11	s	CAPACITOR,CERAMIC 47PF/50V CH
C551	1-162-923-11	s	CAPACITOR,CERAMIC 47PF/50V CH
C552	1-162-970-11	s	CAPACITOR CERAMIC 0.01MF/25V B
C553	1-162-966-11	s	CAPACITOR,CERAMIC 2200PF/50V B
C554	1-162-970-11	s	CAPACITOR CERAMIC 0.01MF/25V B
C555	1-162-966-11	s	CAPACITOR,CERAMIC 2200PF/50V B
C556	1-162-970-11	s	CAPACITOR CERAMIC 0.01MF/25V B
C557	1-162-967-11	s	CAPACITOR,CERAMIC 3300PF/50V B
C558	1-162-967-11	s	CAPACITOR,CERAMIC 3300PF/50V B
C559	1-162-964-11	s	CAPACITOR,CERAMIC 1000PF/50V B
C560	1-162-927-11	s	CAPACITOR,CERAMIC 100PF/50V CH
C561	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C564	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C565	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C566	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
C567	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
C569	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C570	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
C571	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
C575	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
C576	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
C577	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
C601	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C602	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C603	1-104-851-11	s	CAPACITOR,TANTALUM 10MF/10V
C604	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C605	1-113-985-11	s	CAPACITOR,TANTALUM 10MF/20V
C606	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C607	1-113-985-11	s	CAPACITOR,TANTALUM 10MF/20V
C608	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C609	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C610	1-104-851-11	s	CAPACITOR,TANTALUM 10MF/10V
C611	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C612	1-104-851-11	s	CAPACITOR,TANTALUM 10MF/10V
C613	1-162-970-11	s	CAPACITOR CERAMIC 0.01MF/25V B

(RP-111 BOARD(DSR-2000/2000P))

Ref. No. or Q'ty	Part No.	SP	Description
C614	1-162-970-11	s	CAPACITOR CERAMIC 0.01MF/25V B
C615	1-162-970-11	s	CAPACITOR CERAMIC 0.01MF/25V B
C616	1-162-970-11	s	CAPACITOR CERAMIC 0.01MF/25V B
C617	1-162-970-11	s	CAPACITOR CERAMIC 0.01MF/25V B
C618	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C619	1-162-970-11	s	CAPACITOR CERAMIC 0.01MF/25V B
C620	1-162-970-11	s	CAPACITOR CERAMIC 0.01MF/25V B
C621	1-115-416-11	s	CAPACITOR,CERAMIC 1000PF/25V
C623	1-162-923-11	s	CAPACITOR,CERAMIC 47PF/50V CH
C624	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C625	1-164-315-11	s	CAPACITOR,CERAMIC 470PF/50V CH
C626	1-164-217-11	s	CAPACITOR,CERAMIC 150PF/50V CH
C627	1-164-217-11	s	CAPACITOR,CERAMIC 150PF/50V CH
C628	1-162-970-11	s	CAPACITOR CERAMIC 0.01MF/25V B
C629	1-162-970-11	s	CAPACITOR CERAMIC 0.01MF/25V B
C630	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C631	1-162-964-11	s	CAPACITOR,CERAMIC 1000PF/50V B
C632	1-162-970-11	s	CAPACITOR CERAMIC 0.01MF/25V B
C633	1-162-964-11	s	CAPACITOR,CERAMIC 1000PF/50V B
C634	1-162-970-11	s	CAPACITOR CERAMIC 0.01MF/25V B
C635	1-162-924-11	s	CAPACITOR,CERAMIC 56PF/50V CH
C636	1-162-970-11	s	CAPACITOR CERAMIC 0.01MF/25V B
C637	1-162-964-11	s	CAPACITOR,CERAMIC 1000PF/50V B
C638	1-162-964-11	s	CAPACITOR,CERAMIC 1000PF/50V B
C639	1-162-970-11	s	CAPACITOR CERAMIC 0.01MF/25V B
C640	1-162-970-11	s	CAPACITOR CERAMIC 0.01MF/25V B
C641	1-113-985-11	s	CAPACITOR,TANTALUM 10MF/20V
C642	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C643	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C644	1-104-851-11	s	CAPACITOR,TANTALUM 10MF/10V
C645	1-115-416-11	s	CAPACITOR,CERAMIC 1000PF/25V
C646	1-162-970-11	s	CAPACITOR CERAMIC 0.01MF/25V B
C647	1-162-923-11	s	CAPACITOR,CERAMIC 47PF/50V CH
C648	1-162-923-11	s	CAPACITOR,CERAMIC 47PF/50V CH
C649	1-162-970-11	s	CAPACITOR CERAMIC 0.01MF/25V B
C650	1-162-966-11	s	CAPACITOR,CERAMIC 2200PF/50V B
C651	1-162-970-11	s	CAPACITOR CERAMIC 0.01MF/25V B
C652	1-162-966-11	s	CAPACITOR,CERAMIC 2200PF/50V B
C653	1-162-970-11	s	CAPACITOR CERAMIC 0.01MF/25V B
C654	1-162-967-11	s	CAPACITOR,CERAMIC 3300PF/50V B
C655	1-162-967-11	s	CAPACITOR,CERAMIC 3300PF/50V B
C656	1-162-964-11	s	CAPACITOR,CERAMIC 1000PF/50V B
C657	1-162-927-11	s	CAPACITOR,CERAMIC 100PF/50V CH
C658	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C661	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C662	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C663	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C664	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
C665	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
C667	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C668	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
C669	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
C675	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
C676	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
C677	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
C701	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C702	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C703	1-104-851-11	s	CAPACITOR,TANTALUM 10MF/10V
C704	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F

(RP-111 BOARD(DSR-2000/2000P))

Ref. No. or Q'ty	Part No.	SP	Description
C705	1-113-985-11	s	CAPACITOR,TANTALUM 10MF/20V
C706	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C707	1-113-985-11	s	CAPACITOR,TANTALUM 10MF/20V
C708	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C709	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C710	1-104-851-11	s	CAPACITOR,TANTALUM 10MF/10V
C711	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C712	1-104-851-11	s	CAPACITOR,TANTALUM 10MF/10V
C713	1-162-970-11	s	CAPACITOR CERAMIC 0.01MF/25V B
C714	1-162-970-11	s	CAPACITOR CERAMIC 0.01MF/25V B
C715	1-162-970-11	s	CAPACITOR CERAMIC 0.01MF/25V B
C716	1-162-970-11	s	CAPACITOR CERAMIC 0.01MF/25V B
C717	1-162-970-11	s	CAPACITOR CERAMIC 0.01MF/25V B
C718	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C719	1-162-970-11	s	CAPACITOR CERAMIC 0.01MF/25V B
C720	1-162-970-11	s	CAPACITOR CERAMIC 0.01MF/25V B
C721	1-115-416-11	s	CAPACITOR,CERAMIC 1000PF/25V
C723	1-162-923-11	s	CAPACITOR,CERAMIC 47PF/50V CH
C724	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C725	1-164-315-11	s	CAPACITOR,CERAMIC 470PF/50V CH
C726	1-164-217-11	s	CAPACITOR,CERAMIC 150PF/50V CH
C727	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C728	1-164-217-11	s	CAPACITOR,CERAMIC 150PF/50V CH
C729	1-162-970-11	s	CAPACITOR CERAMIC 0.01MF/25V B
C730	1-162-970-11	s	CAPACITOR CERAMIC 0.01MF/25V B
C731	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C732	1-162-964-11	s	CAPACITOR,CERAMIC 1000PF/50V B
C733	1-162-970-11	s	CAPACITOR CERAMIC 0.01MF/25V B
C734	1-162-964-11	s	CAPACITOR,CERAMIC 1000PF/50V B
C735	1-162-970-11	s	CAPACITOR CERAMIC 0.01MF/25V B
C736	1-162-924-11	s	CAPACITOR,CERAMIC 56PF/50V CH
C737	1-162-970-11	s	CAPACITOR CERAMIC 0.01MF/25V B
C738	1-162-964-11	s	CAPACITOR,CERAMIC 1000PF/50V B
C739	1-162-964-11	s	CAPACITOR,CERAMIC 1000PF/50V B
C740	1-162-970-11	s	CAPACITOR CERAMIC 0.01MF/25V B
C741	1-162-970-11	s	CAPACITOR CERAMIC 0.01MF/25V B
C742	1-113-985-11	s	CAPACITOR,TANTALUM 10MF/20V
C743	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C744	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C745	1-104-851-11	s	CAPACITOR,TANTALUM 10MF/10V
C746	1-115-416-11	s	CAPACITOR,CERAMIC 1000PF/25V
C747	1-162-970-11	s	CAPACITOR CERAMIC 0.01MF/25V B
C748	1-162-923-11	s	CAPACITOR,CERAMIC 47PF/50V CH
C749	1-162-923-11	s	CAPACITOR,CERAMIC 47PF/50V CH
C750	1-162-970-11	s	CAPACITOR CERAMIC 0.01MF/25V B
C751	1-162-966-11	s	CAPACITOR,CERAMIC 2200PF/50V B
C752	1-162-970-11	s	CAPACITOR CERAMIC 0.01MF/25V B
C753	1-162-966-11	s	CAPACITOR,CERAMIC 2200PF/50V B
C754	1-162-970-11	s	CAPACITOR CERAMIC 0.01MF/25V B
C755	1-162-967-11	s	CAPACITOR,CERAMIC 3300PF/50V B
C756	1-162-967-11	s	CAPACITOR,CERAMIC 3300PF/50V B
C757	1-162-964-11	s	CAPACITOR,CERAMIC 1000PF/50V B
C758	1-162-927-11	s	CAPACITOR,CERAMIC 100PF/50V CH
C759	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C762	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C763	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C764	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
C765	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
C767	1-162-970-11	s	CAPACITOR CERAMIC 0.01MF/25V B

(RP-111 BOARD(DSR-2000/2000P))

Ref. No. or Q'ty	Part No.	SP	Description
C768	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
C769	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
C775	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
C776	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
C777	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
C801	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C802	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C803	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C804	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C805	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C806	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C807	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C808	1-104-851-11	s	CAPACITOR,TANTALUM 10MF/10V
C809	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C810	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C811	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C812	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C813	1-104-851-11	s	CAPACITOR,TANTALUM 10MF/10V
C814	1-104-851-11	s	CAPACITOR,TANTALUM 10MF/10V
C815	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C816	1-162-970-11	s	CAPACITOR CERAMIC 0.01MF/25V B
C817	1-162-970-11	s	CAPACITOR CERAMIC 0.01MF/25V B
C818	1-162-970-11	s	CAPACITOR CERAMIC 0.01MF/25V B
C821	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C822	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C823	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C824	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C825	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C826	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C827	1-104-851-11	s	CAPACITOR,TANTALUM 10MF/10V
C828	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C829	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C830	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C831	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C832	1-104-851-11	s	CAPACITOR,TANTALUM 10MF/10V
C838	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C839	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C840	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C851	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C852	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C853	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C854	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C855	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C856	1-104-851-11	s	CAPACITOR,TANTALUM 10MF/10V
C857	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C858	1-104-851-11	s	CAPACITOR,TANTALUM 10MF/10V
C859	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C860	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C861	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C862	1-162-970-11	s	CAPACITOR CERAMIC 0.01MF/25V B
C863	1-162-970-11	s	CAPACITOR CERAMIC 0.01MF/25V B
C867	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C868	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C869	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C870	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C871	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C872	1-104-851-11	s	CAPACITOR,TANTALUM 10MF/10V
C873	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C874	1-104-851-11	s	CAPACITOR,TANTALUM 10MF/10V

(RP-111 BOARD(DSR-2000/2000P))

Ref. No. or Q'ty	Part No.	SP	Description
C875	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C876	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C877	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C883	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C884	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C885	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C886	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C887	1-104-851-11	s	CAPACITOR,TANTALUM 10MF/10V
C901	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C902	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C903	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C904	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C905	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C906	1-104-851-11	s	CAPACITOR,TANTALUM 10MF/10V
C907	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C908	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C909	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C910	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C911	1-113-985-11	s	CAPACITOR,TANTALUM 10MF/20V
C914	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C915	1-113-985-11	s	CAPACITOR,TANTALUM 10MF/20V
C916	1-104-851-11	s	CAPACITOR,TANTALUM 10MF/10V
C917	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C918	1-113-985-11	s	CAPACITOR,TANTALUM 10MF/20V
C920	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C921	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C922	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C923	1-113-985-11	s	CAPACITOR,TANTALUM 10MF/20V
C924	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C925	1-113-985-11	s	CAPACITOR,TANTALUM 10MF/20V
C926	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C927	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C929	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C930	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C931	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C932	1-113-985-11	s	CAPACITOR,TANTALUM 10MF/20V
C933	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C934	1-113-985-11	s	CAPACITOR,TANTALUM 10MF/20V
C935	1-113-985-11	s	CAPACITOR,TANTALUM 10MF/20V
C936	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C937	1-104-851-11	s	CAPACITOR,TANTALUM 10MF/10V
C938	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C941	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C942	1-113-985-11	s	CAPACITOR,TANTALUM 10MF/20V
C943	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C944	1-162-966-11	s	CAPACITOR,CERAMIC 2200PF/50V B
C945	1-162-927-11	s	CAPACITOR,CERAMIC 100PF/50V CH
C946	1-164-230-11	s	CAPACITOR,CERAMIC 220PF/50V
C947	1-164-230-11	s	CAPACITOR,CERAMIC 220PF/50V
C948	1-162-970-11	s	CAPACITOR CERAMIC 0.01MF/25V B
C949	1-162-927-11	s	CAPACITOR,CERAMIC 100PF/50V CH
C950	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C951	1-115-416-11	s	CAPACITOR,CERAMIC 1000PF/25V
C952	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C953	1-162-970-11	s	CAPACITOR CERAMIC 0.01MF/25V B
C954	1-162-970-11	s	CAPACITOR CERAMIC 0.01MF/25V B
C955	1-104-851-11	s	CAPACITOR,TANTALUM 10MF/10V
C956	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C957	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F

(RP-111 BOARD(DSR-2000/2000P))

Ref. No. or Q'ty	Part No.	SP	Description
C958	1-162-970-11	s	CAPACITOR CERAMIC 0.01MF/25V B
C959	1-162-970-11	s	CAPACITOR CERAMIC 0.01MF/25V B
C960	1-162-970-11	s	CAPACITOR CERAMIC 0.01MF/25V B
C961	1-113-985-11	s	CAPACITOR,TANTALUM 10MF/20V
C962	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C963	1-162-966-11	s	CAPACITOR,CERAMIC 2200PF/50V B
C964	1-162-927-11	s	CAPACITOR,CERAMIC 100PF/50V CH
C965	1-164-230-11	s	CAPACITOR,CERAMIC 220PF/50V
C966	1-164-230-11	s	CAPACITOR,CERAMIC 220PF/50V
C967	1-162-970-11	s	CAPACITOR CERAMIC 0.01MF/25V B
C968	1-162-927-11	s	CAPACITOR,CERAMIC 100PF/50V CH
C969	1-115-416-11	s	CAPACITOR,CERAMIC 1000PF/25V
C970	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C971	1-162-970-11	s	CAPACITOR CERAMIC 0.01MF/25V B
C972	1-162-970-11	s	CAPACITOR CERAMIC 0.01MF/25V B
C973	1-104-851-11	s	CAPACITOR,TANTALUM 10MF/10V
C974	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C975	1-162-970-11	s	CAPACITOR CERAMIC 0.01MF/25V B
C976	1-162-970-11	s	CAPACITOR CERAMIC 0.01MF/25V B
C977	1-162-970-11	s	CAPACITOR CERAMIC 0.01MF/25V B
C978	1-104-851-11	s	CAPACITOR,TANTALUM 10MF/10V
C979	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C981	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C982	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C983	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C984	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C985	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C986	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C987	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C988	1-104-851-11	s	CAPACITOR,TANTALUM 10MF/10V
C989	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
CN1	1-565-771-11	s	CONNECTOR,FPC(21F) 12P
CN2	1-568-164-11	s	CONNECTOR,FPC 8P
CN3	1-565-771-11	s	CONNECTOR,FPC(21F) 12P
CN4	1-565-771-11	s	CONNECTOR,FPC(21F) 12P
CN302	1-794-047-11	o	CONNECTOR, BOARD TO BOARD 80P
CN401	1-764-243-11	o	CONNECTOR (COAXIAL)
CN501	1-764-243-11	o	CONNECTOR (COAXIAL)
CN601	1-764-243-11	o	CONNECTOR (COAXIAL)
CN701	1-764-243-11	o	CONNECTOR (COAXIAL)
D1	8-719-027-95	s	DIODE HSM88WK
D2	8-719-027-95	s	DIODE HSM88WK
D3	8-719-041-39	s	DIODE KV1470 (5MA)
D4	8-719-041-39	s	DIODE KV1470 (5MA)
D5	8-719-027-95	s	DIODE HSM88WK
D6	8-719-041-39	s	DIODE KV1470 (5MA)
D101	8-719-052-27	s	DIODE 1SS351-TB
D151	8-719-052-27	s	DIODE 1SS351-TB
DL403	1-411-274-21	s	DELAY LINE, LC (23NS)
DL503	1-411-274-21	s	DELAY LINE, LC (23NS)
DL603	1-411-274-21	s	DELAY LINE, LC (23NS)
DL703	1-411-274-21	s	DELAY LINE, LC (23NS)
FL401	1-234-484-21	s	FILTER, LOW PASS
FL501	1-234-484-21	s	FILTER, LOW PASS
FL601	1-234-484-21	s	FILTER, LOW PASS
FL701	1-234-484-21	s	FILTER, LOW PASS
FL941	1-233-351-21	s	FILTER, BAND PASS

(RP-111 BOARD(DSR-2000/2000P))

Ref. No. or Q'ty	Part No.	SP	Description
FL942	1-233-350-21	s	FILTER, BAND PASS
FL943	1-233-351-21	s	FILTER, BAND PASS
FL944	1-233-350-21	s	FILTER, BAND PASS
IC1	8-752-386-38	s	IC CXD3105R (T6)
IC2	8-752-386-38	s	IC CXD3105R (T6)
IC3	8-759-523-95	s	IC TC74VHC74FT(EL)
IC4	8-759-058-54	s	IC TC7S00FU-TE85R
IC5	8-752-386-38	s	IC CXD3105R (T6)
IC6	8-752-073-50	s	IC CXA2018Q
IC7	8-759-524-50	s	IC TC74VHC541FT(EL)
IC8	8-759-524-50	s	IC TC74VHC541FT(EL)
IC9	8-759-196-97	s	IC TC7SH32FU (TE85R)
IC10	8-759-196-97	s	IC TC7SH32FU (TE85R)
IC101	8-752-073-50	s	IC CXA2018Q
IC102	8-752-085-28	s	IC CXA3241TN-T2
IC103	8-752-085-28	s	IC CXA3241TN-T2
IC104	8-752-085-27	s	IC CXA3240TN-T2
IC105	8-752-085-28	s	IC CXA3241TN-T2
IC151	8-752-073-50	s	IC CXA2018Q
IC152	8-752-085-28	s	IC CXA3241TN-T2
IC153	8-752-085-28	s	IC CXA3241TN-T2
IC154	8-752-085-27	s	IC CXA3240TN-T2
IC155	8-752-085-28	s	IC CXA3241TN-T2
IC201	8-752-085-28	s	IC CXA3241TN-T2
IC202	8-752-085-28	s	IC CXA3241TN-T2
IC203	8-752-085-27	s	IC CXA3240TN-T2
IC204	8-759-523-94	s	IC TC74VHC32FT(EL)
IC205	8-752-085-28	s	IC CXA3241TN-T2
IC206	8-752-085-27	s	IC CXA3240TN-T2
IC207	8-759-548-97	s	IC SN74LV04APWR
IC208	8-752-085-28	s	IC CXA3241TN-T2
IC251	8-752-085-28	s	IC CXA3241TN-T2
IC252	8-752-085-28	s	IC CXA3241TN-T2
IC253	8-752-085-27	s	IC CXA3240TN-T2
IC255	8-752-085-28	s	IC CXA3241TN-T2
IC256	8-752-085-27	s	IC CXA3240TN-T2
IC257	8-759-523-94	s	IC TC74VHC32FT(EL)
IC301	8-752-085-28	s	IC CXA3241TN-T2
IC302	8-752-085-28	s	IC CXA3241TN-T2
IC303	8-752-085-27	s	IC CXA3240TN-T2
IC304	8-759-523-94	s	IC TC74VHC32FT(EL)
IC305	8-752-085-28	s	IC CXA3241TN-T2
IC306	8-752-085-27	s	IC CXA3240TN-T2
IC307	8-759-548-97	s	IC SN74LV04APWR
IC308	8-752-085-28	s	IC CXA3241TN-T2
IC351	8-752-085-28	s	IC CXA3241TN-T2
IC352	8-752-085-28	s	IC CXA3241TN-T2
IC353	8-752-085-27	s	IC CXA3240TN-T2
IC355	8-752-085-28	s	IC CXA3241TN-T2
IC356	8-752-085-27	s	IC CXA3240TN-T2
IC401	8-752-371-18	s	IC CXD2302Q
IC402	8-752-074-59	s	IC CXA2023R
IC403	8-752-070-12	s	IC CXA1762Q
IC404	8-759-524-50	s	IC TC74VHC541FT(EL)
IC405	8-759-523-81	s	IC TC74VHC08FT(EL)
IC406	8-759-523-96	s	IC TC74VHC86FT (EL)
IC501	8-752-371-18	s	IC CXD2302Q
IC502	8-752-074-59	s	IC CXA2023R

(RP-111 BOARD(DSR-2000/2000P))

Ref. No. or Q'ty	Part No.	SP	Description
IC503	8-752-070-12	s	IC CXA1762Q
IC504	8-759-524-50	s	IC TC74VHC541FT(EL)
IC601	8-752-371-18	s	IC CXD2302Q
IC602	8-752-074-59	s	IC CXA2023R
IC603	8-752-070-12	s	IC CXA1762Q
IC604	8-759-524-50	s	IC TC74VHC541FT(EL)
IC605	8-759-523-94	s	IC TC74VHC32FT(EL)
IC701	8-752-371-18	s	IC CXD2302Q
IC702	8-752-074-59	s	IC CXA2023R
IC703	8-752-070-12	s	IC CXA1762Q
IC704	8-759-524-50	s	IC TC74VHC541FT(EL)
IC801	8-759-524-50	s	IC TC74VHC541FT(EL)
IC802	8-752-386-38	s	IC CXD3105R (T6)
IC803	8-759-523-94	s	IC TC74VHC32FT(EL)
IC804	8-759-524-50	s	IC TC74VHC541FT(EL)
IC805	8-759-524-50	s	IC TC74VHC541FT(EL)
IC806	8-759-058-54	s	IC TC7S00FU-TE85R
IC807	8-759-524-50	s	IC TC74VHC541FT(EL)
IC808	8-752-386-38	s	IC CXD3105R (T6)
IC809	8-759-524-50	s	IC TC74VHC541FT(EL)
IC810	8-759-058-54	s	IC TC7S00FU-TE85R
IC851	8-759-524-50	s	IC TC74VHC541FT(EL)
IC852	8-752-386-38	s	IC CXD3105R (T6)
IC853	8-759-524-50	s	IC TC74VHC541FT(EL)
IC854	8-759-524-50	s	IC TC74VHC541FT(EL)
IC855	8-752-386-38	s	IC CXD3105R (T6)
IC856	8-759-524-50	s	IC TC74VHC541FT(EL)
IC857	8-759-524-50	s	IC TC74VHC541FT(EL)
IC901	8-759-491-47	s	IC TC74VHCT08FT (EL)
IC902	8-759-523-02	s	IC TC74HC4053AFT(EL)
IC903	8-759-523-02	s	IC TC74HC4053AFT(EL)
IC904	8-759-259-77	s	IC PQ20VZ5U
IC905	8-759-064-36	s	IC MB88346BPFV
IC906	8-759-259-77	s	IC PQ20VZ5U
IC907	8-759-064-36	s	IC MB88346BPFV
IC909	8-759-259-77	s	IC PQ20VZ5U
IC910	8-759-182-84	s	IC PQ05SZ5U
IC911	8-759-064-36	s	IC MB88346BPFV
IC912	8-759-523-02	s	IC TC74HC4053AFT(EL)
IC913	8-759-064-36	s	IC MB88346BPFV
IC914	8-759-182-84	s	IC PQ05SZ5U
IC916	8-759-445-93	s	IC AK6440AM (E2)
IC941	8-759-523-78	s	IC TC74VHC00FT(EL)
IC942	8-759-327-00	s	IC CXA8044Q (T4)
IC943	8-759-062-66	s	IC TC7S66F
IC944	8-759-523-02	s	IC TC74HC4053AFT(EL)
IC945	8-759-491-47	s	IC TC74VHCT08FT (EL)
IC946	8-759-327-01	s	IC NJM062V-TE2
IC947	8-759-327-00	s	IC CXA8044Q (T4)
IC948	8-759-062-66	s	IC TC7S66F
IC949	8-759-327-01	s	IC NJM062V-TE2
IC950	8-759-548-97	s	IC SN74LV04APWR
L1	1-414-398-11	s	INDUCTOR (SMD) 10UH
L2	1-414-398-11	s	INDUCTOR (SMD) 10UH
L3	1-414-398-11	s	INDUCTOR (SMD) 10UH
L4	1-412-936-11	s	INDUCTOR CHIP 0.56UH (2520)
L5	1-412-936-11	s	INDUCTOR CHIP 0.56UH (2520)
L6	1-414-398-11	s	INDUCTOR (SMD) 10UH

(RP-111 BOARD(DSR-2000/2000P))

Ref. No. or Q'ty	Part No.	SP	Description
L7	1-414-398-11	s	INDUCTOR (SMD) 10UH
L8	1-414-398-11	s	INDUCTOR (SMD) 10UH
L9	1-412-936-11	s	INDUCTOR CHIP 0.56UH (2520)
L10	1-414-398-11	s	INDUCTOR (SMD) 10UH
L11	1-414-398-11	s	INDUCTOR (SMD) 10UH
L101	1-414-398-11	s	INDUCTOR (SMD) 10UH
L102	1-414-398-11	s	INDUCTOR (SMD) 10UH
L103	1-414-397-11	s	INDUCTOR (SMD) 6.8UH
L151	1-414-398-11	s	INDUCTOR (SMD) 10UH
L152	1-414-398-11	s	INDUCTOR (SMD) 10UH
L153	1-414-397-11	s	INDUCTOR (SMD) 6.8UH
L201	1-414-397-11	s	INDUCTOR (SMD) 6.8UH
L202	1-414-398-11	s	INDUCTOR (SMD) 10UH
L251	1-414-397-11	s	INDUCTOR (SMD) 6.8UH
L301	1-414-397-11	s	INDUCTOR (SMD) 6.8UH
L302	1-414-398-11	s	INDUCTOR (SMD) 10UH
L351	1-414-397-11	s	INDUCTOR (SMD) 6.8UH
L401	1-414-398-11	s	INDUCTOR (SMD) 10UH
L402	1-414-398-11	s	INDUCTOR (SMD) 10UH
L403	1-414-398-11	s	INDUCTOR (SMD) 10UH
L404	1-414-398-11	s	INDUCTOR (SMD) 10UH
L405	1-414-398-11	s	INDUCTOR (SMD) 10UH
L406	1-414-398-11	s	INDUCTOR (SMD) 10UH
L407	1-414-398-11	s	INDUCTOR (SMD) 10UH
L408	1-410-657-21	s	CHIP INDUCTOR 180UH (3225)
L409	1-410-393-11	s	CHIP INDUCTOR 100UH (3225)
L501	1-414-398-11	s	INDUCTOR (SMD) 10UH
L502	1-414-398-11	s	INDUCTOR (SMD) 10UH
L503	1-414-398-11	s	INDUCTOR (SMD) 10UH
L504	1-414-398-11	s	INDUCTOR (SMD) 10UH
L505	1-414-398-11	s	INDUCTOR (SMD) 10UH
L506	1-414-398-11	s	INDUCTOR (SMD) 10UH
L507	1-414-398-11	s	INDUCTOR (SMD) 10UH
L508	1-410-657-21	s	CHIP INDUCTOR 180UH (3225)
L509	1-410-393-11	s	CHIP INDUCTOR 100UH (3225)
L601	1-414-398-11	s	INDUCTOR (SMD) 10UH
L602	1-414-398-11	s	INDUCTOR (SMD) 10UH
L603	1-414-398-11	s	INDUCTOR (SMD) 10UH
L604	1-414-398-11	s	INDUCTOR (SMD) 10UH
L605	1-414-398-11	s	INDUCTOR (SMD) 10UH
L606	1-414-398-11	s	INDUCTOR (SMD) 10UH
L607	1-414-398-11	s	INDUCTOR (SMD) 10UH
L608	1-410-657-21	s	CHIP INDUCTOR 180UH (3225)
L609	1-410-656-11	s	CHIP INDUCTOR 150UH (3225)
L701	1-414-398-11	s	INDUCTOR (SMD) 10UH
L702	1-414-398-11	s	INDUCTOR (SMD) 10UH
L703	1-414-398-11	s	INDUCTOR (SMD) 10UH
L704	1-414-398-11	s	INDUCTOR (SMD) 10UH
L705	1-414-398-11	s	INDUCTOR (SMD) 10UH
L706	1-414-398-11	s	INDUCTOR (SMD) 10UH
L707	1-414-398-11	s	INDUCTOR (SMD) 10UH
L708	1-410-657-21	s	CHIP INDUCTOR 180UH (3225)
L709	1-410-656-11	s	CHIP INDUCTOR 150UH (3225)
L801	1-414-398-11	s	INDUCTOR (SMD) 10UH
L802	1-414-398-11	s	INDUCTOR (SMD) 10UH
L803	1-414-398-11	s	INDUCTOR (SMD) 10UH
L805	1-414-398-11	s	INDUCTOR (SMD) 10UH
L806	1-414-398-11	s	INDUCTOR (SMD) 10UH
L851	1-414-398-11	s	INDUCTOR (SMD) 10UH

(RP-111 BOARD(DSR-2000/2000P))

Ref. No. or Q'ty	Part No.	SP	Description
L852	1-414-398-11	s	INDUCTOR (SMD) 10UH
L854	1-414-398-11	s	INDUCTOR (SMD) 10UH
L855	1-414-398-11	s	INDUCTOR (SMD) 10UH
L857	1-414-398-11	s	INDUCTOR (SMD) 10UH
L901	1-414-398-11	s	INDUCTOR (SMD) 10UH
L902	1-424-673-11	s	COIL, CHOKE 4.7UH
L903	1-424-673-11	s	COIL, CHOKE 4.7UH
L941	1-414-398-11	s	INDUCTOR (SMD) 10UH
L942	1-412-282-41	s	INDUCTOR INDACTOR 470UH (3225)
L943	1-414-398-11	s	INDUCTOR (SMD) 10UH
L944	1-412-282-41	s	INDUCTOR INDACTOR 470UH (3225)
L981	1-414-398-11	s	INDUCTOR (SMD) 10UH
PS901	⚠ 1-533-282-21	s	CIRCUIT PROTECTOR 2A (3225)
PS903	⚠ 1-533-282-21	s	CIRCUIT PROTECTOR 2A (3225)
Q1	1-801-806-11	s	TRANSISTOR DTC144EAK
Q102	8-729-143-46	s	TRANSISTOR 2SC3356-R24
Q152	8-729-143-46	s	TRANSISTOR 2SC3356-R24
Q202	8-729-143-46	s	TRANSISTOR 2SC3356-R24
Q302	8-729-143-46	s	TRANSISTOR 2SC3356-R24
Q401	8-729-039-79	s	TRANSISTOR 2SA1813-TL
Q402	8-729-905-35	s	TRANSISTOR 2SC4081-R
Q403	8-729-905-35	s	TRANSISTOR 2SC4081-R
Q404	8-729-905-35	s	TRANSISTOR 2SC4081-R
Q405	1-801-806-11	s	TRANSISTOR DTC144EAK
Q406	1-801-806-11	s	TRANSISTOR DTC144EAK
Q407	8-729-905-23	s	TRANSISTOR 2SA1576-R
Q408	8-729-905-35	s	TRANSISTOR 2SC4081-R
Q409	8-729-041-82	s	TRANSISTOR UPA801T-T1/FB
Q410	8-729-041-82	s	TRANSISTOR UPA801T-T1/FB
Q501	8-729-039-79	s	TRANSISTOR 2SA1813-TL
Q502	8-729-905-35	s	TRANSISTOR 2SC4081-R
Q503	8-729-905-35	s	TRANSISTOR 2SC4081-R
Q504	8-729-905-35	s	TRANSISTOR 2SC4081-R
Q505	1-801-806-11	s	TRANSISTOR DTC144EAK
Q506	1-801-806-11	s	TRANSISTOR DTC144EAK
Q507	8-729-905-23	s	TRANSISTOR 2SA1576-R
Q508	8-729-905-35	s	TRANSISTOR 2SC4081-R
Q509	8-729-041-82	s	TRANSISTOR UPA801T-T1/FB
Q510	8-729-041-82	s	TRANSISTOR UPA801T-T1/FB
Q601	8-729-039-79	s	TRANSISTOR 2SA1813-TL
Q602	8-729-905-35	s	TRANSISTOR 2SC4081-R
Q603	8-729-905-35	s	TRANSISTOR 2SC4081-R
Q604	8-729-905-35	s	TRANSISTOR 2SC4081-R
Q605	1-801-806-11	s	TRANSISTOR DTC144EAK
Q606	1-801-806-11	s	TRANSISTOR DTC144EAK
Q607	8-729-905-23	s	TRANSISTOR 2SA1576-R
Q608	8-729-905-35	s	TRANSISTOR 2SC4081-R
Q609	8-729-041-82	s	TRANSISTOR UPA801T-T1/FB
Q610	8-729-041-82	s	TRANSISTOR UPA801T-T1/FB
Q701	8-729-039-79	s	TRANSISTOR 2SA1813-TL
Q702	8-729-905-35	s	TRANSISTOR 2SC4081-R
Q703	8-729-905-35	s	TRANSISTOR 2SC4081-R
Q704	8-729-905-35	s	TRANSISTOR 2SC4081-R
Q705	1-801-806-11	s	TRANSISTOR DTC144EAK
Q706	1-801-806-11	s	TRANSISTOR DTC144EAK
Q707	8-729-905-23	s	TRANSISTOR 2SA1576-R
Q708	8-729-905-35	s	TRANSISTOR 2SC4081-R
Q709	8-729-041-82	s	TRANSISTOR UPA801T-T1/FB

(RP-111 BOARD(DSR-2000/2000P))

Ref. No. or Q'ty	Part No.	SP	Description
Q710	8-729-041-82	s	TRANSISTOR UPA801T-T1/FB
Q941	8-729-905-35	s	TRANSISTOR 2SC4081-R
Q942	8-729-905-35	s	TRANSISTOR 2SC4081-R
Q943	1-801-806-11	s	TRANSISTOR DTC144EAK
Q944	8-729-905-35	s	TRANSISTOR 2SC4081-R
Q945	8-729-905-35	s	TRANSISTOR 2SC4081-R
Q946	1-801-806-11	s	TRANSISTOR DTC144EAK
R1	1-216-801-11	s	RESISTOR,CHIP 22 1/16W 1608
R2	1-216-864-11	s	RESISTOR,CHIP 0 1/16W (1608)
R3	1-216-864-11	s	RESISTOR,CHIP 0 1/16W (1608)
R4	1-216-864-11	s	RESISTOR,CHIP 0 1/16W (1608)
R5	1-216-864-11	s	RESISTOR,CHIP 0 1/16W (1608)
R6	1-216-801-11	s	RESISTOR,CHIP 22 1/16W 1608
R7	1-216-809-11	s	RESISTOR,CHIP 100 1/16W 1608
R8	1-216-809-11	s	RESISTOR,CHIP 100 1/16W 1608
R9	1-216-833-11	s	RESISTOR,CHIP 10K 1/16W 1608
R10	1-216-809-11	s	RESISTOR,CHIP 100 1/16W 1608
R11	1-216-864-11	s	RESISTOR,CHIP 0 1/16W (1608)
R12	1-216-833-11	s	RESISTOR,CHIP 10K 1/16W 1608
R13	1-216-837-11	s	RESISTOR,CHIP 22K 1/16W 1608
R14	1-216-864-11	s	RESISTOR,CHIP 0 1/16W (1608)
R15	1-216-864-11	s	RESISTOR,CHIP 0 1/16W (1608)
R16	1-216-864-11	s	RESISTOR,CHIP 0 1/16W (1608)
R17	1-216-864-11	s	RESISTOR,CHIP 0 1/16W (1608)
R18	1-216-864-11	s	RESISTOR,CHIP 0 1/16W (1608)
R19	1-216-809-11	s	RESISTOR,CHIP 100 1/16W 1608
R20	1-216-845-11	s	RESISTOR,CHIP 100K 1/16W(1608)
R21	1-216-814-11	s	RESISTOR,CHIP 270 1/16W 1608
R22	1-216-864-11	s	RESISTOR,CHIP 0 1/16W (1608)
R23	1-216-864-11	s	RESISTOR,CHIP 0 1/16W (1608)
R24	1-216-864-11	s	RESISTOR,CHIP 0 1/16W (1608)
R25	1-218-887-11	s	RESISTOR,CHIP 47K 1/16W (1608)
R26	1-218-887-11	s	RESISTOR,CHIP 47K 1/16W (1608)
R27	1-218-887-11	s	RESISTOR,CHIP 47K 1/16W (1608)
R28	1-216-809-11	s	RESISTOR,CHIP 100 1/16W 1608
R29	1-216-845-11	s	RESISTOR,CHIP 100K 1/16W(1608)
R30	1-218-887-11	s	RESISTOR,CHIP 47K 1/16W (1608)
R31	1-218-855-11	s	RESISTOR,CHIP 2.2K 1/16W(1608)
R32	1-216-814-11	s	RESISTOR,CHIP 270 1/16W 1608
R33	1-216-864-11	s	RESISTOR,CHIP 0 1/16W (1608)
R34	1-216-809-11	s	RESISTOR,CHIP 100 1/16W 1608
R35	1-218-855-11	s	RESISTOR,CHIP 2.2K 1/16W(1608)
R36	1-216-801-11	s	RESISTOR,CHIP 22 1/16W 1608
R37	1-216-864-11	s	RESISTOR,CHIP 0 1/16W (1608)
R38	1-216-801-11	s	RESISTOR,CHIP 22 1/16W 1608
R39	1-216-809-11	s	RESISTOR,CHIP 100 1/16W 1608
R40	1-216-833-11	s	RESISTOR,CHIP 10K 1/16W 1608
R41	1-216-864-11	s	RESISTOR,CHIP 0 1/16W (1608)
R42	1-216-864-11	s	RESISTOR,CHIP 0 1/16W (1608)
R43	1-216-864-11	s	RESISTOR,CHIP 0 1/16W (1608)
R44	1-216-864-11	s	RESISTOR,CHIP 0 1/16W (1608)
R45	1-216-809-11	s	RESISTOR,CHIP 100 1/16W 1608
R46	1-216-864-11	s	RESISTOR,CHIP 0 1/16W (1608)
R47	1-218-867-11	s	RESISTOR,CHIP 6.8K 1/16W(1608)
R48	1-216-864-11	s	RESISTOR,CHIP 0 1/16W (1608)
R49	1-218-887-11	s	RESISTOR,CHIP 47K 1/16W (1608)
R50	1-216-845-11	s	RESISTOR,CHIP 100K 1/16W(1608)
R51	1-216-809-11	s	RESISTOR,CHIP 100 1/16W 1608

(RP-111 BOARD(DSR-2000/2000P))

Ref. No. or Q'ty	Part No.	SP	Description
R52	1-218-887-11	s	RESISTOR,CHIP 47K 1/16W (1608)
R53	1-216-814-11	s	RESISTOR,CHIP 270 1/16W 1608
R54	1-216-864-11	s	RESISTOR,CHIP 0 1/16W (1608)
R55	1-216-809-11	s	RESISTOR,CHIP 100 1/16W 1608
R57	1-218-855-11	s	RESISTOR,CHIP 2.2K 1/16W(1608)
R58	1-218-871-11	s	RESISTOR,CHIP 10K 1/16W (1608)
R59	1-218-895-11	s	RESISTOR,CHIP 100K 1/16W(1608)
R60	1-218-871-11	s	RESISTOR,CHIP 10K 1/16W (1608)
R61	1-218-895-11	s	RESISTOR,CHIP 100K 1/16W(1608)
R62	1-216-833-11	s	RESISTOR,CHIP 10K 1/16W 1608
R63	1-216-833-11	s	RESISTOR,CHIP 10K 1/16W 1608
R66	1-216-864-11	s	RESISTOR,CHIP 0 1/16W (1608)
R67 *a	1-216-864-11	s	RESISTOR,CHIP 0 1/16W (1608)
R101	1-218-871-11	s	RESISTOR,CHIP 10K 1/16W (1608)
R102	1-218-835-11	s	RESISTOR,CHIP 330 1/16W (1608)
R103	1-218-837-11	s	RESISTOR,CHIP 390 1/16W (1608)
R104	1-216-834-11	s	RESISTOR,CHIP 12K 1/16W 1608
R105	1-216-829-11	s	RESISTOR, CHIP 4.7K 1/16W 1608
R106	1-218-867-11	s	RESISTOR,CHIP 6.8K 1/16W(1608)
R107	1-216-864-11	s	RESISTOR,CHIP 0 1/16W (1608)
R108	1-216-809-11	s	RESISTOR,CHIP 100 1/16W 1608
R109	1-218-879-11	s	RESISTOR,CHIP 22K 1/16W (1608)
R110	1-218-853-11	s	RESISTOR,CHIP 1.8K 1/16W(1608)
R111	1-218-867-11	s	RESISTOR,CHIP 6.8K 1/16W(1608)
R112	1-216-809-11	s	RESISTOR,CHIP 100 1/16W 1608
R113	1-216-805-11	s	RESISTOR,CHIP 47 1/16W 1608
R114	1-218-855-11	s	RESISTOR,CHIP 2.2K 1/16W(1608)
R115	1-216-805-11	s	RESISTOR,CHIP 47 1/16W 1608
R116	1-216-795-11	s	RESISTOR,CHIP 6.8 1/16W(1608)
R117	1-216-797-11	s	RESISTOR,CHIP 10 1/16W 1608
R118	1-218-827-11	s	RESISTOR,CHIP 150 1/16W (1608)
R119	1-216-797-11	s	RESISTOR,CHIP 10 1/16W 1608
R121	1-216-797-11	s	RESISTOR,CHIP 10 1/16W 1608
R122	1-218-827-11	s	RESISTOR,CHIP 150 1/16W (1608)
R123	1-216-797-11	s	RESISTOR,CHIP 10 1/16W 1608
R124	1-216-835-11	s	RESISTOR,CHIP 15K 1/16W
R125	1-216-835-11	s	RESISTOR,CHIP 15K 1/16W
R128	1-218-855-11	s	RESISTOR,CHIP 2.2K 1/16W(1608)
R130	1-216-864-11	s	RESISTOR,CHIP 0 1/16W (1608)
R131	1-211-985-11	s	RESISTOR,CHIP 47 1/16W (1608)
R132	1-211-985-11	s	RESISTOR,CHIP 47 1/16W (1608)
R134	1-211-985-11	s	RESISTOR,CHIP 47 1/16W (1608)
R135	1-216-821-11	s	RESISTOR,CHIP 1.0K 1/16W(1608)
R137	1-216-805-11	s	RESISTOR,CHIP 47 1/16W 1608
R138	1-218-860-11	s	RESISTOR,CHIP 3.6K 1/16W(1608)
R139	1-216-805-11	s	RESISTOR,CHIP 47 1/16W 1608
R140	1-216-805-11	s	RESISTOR,CHIP 47 1/16W 1608
R141	1-211-985-11	s	RESISTOR,CHIP 47 1/16W (1608)
R142	1-216-794-11	s	RESISTOR,CHIP 5.6 1/16W 1608
R143	1-218-843-11	s	RESISTOR,CHIP 680 1/16W (1608)
R144	1-216-817-11	s	RESISTOR,CHIP 470 1/16W 1608
R145	1-218-865-11	s	RESISTOR,CHIP 5.6K 1/16W(1608)
R146	1-216-864-11	s	RESISTOR,CHIP 0 1/16W (1608)
R147	1-216-864-11	s	RESISTOR,CHIP 0 1/16W (1608)
R148	1-218-823-11	s	RESISTOR,CHIP 100 1/16W (1608)
R149	1-216-833-11	s	RESISTOR,CHIP 10K 1/16W 1608
R150	1-216-833-11	s	RESISTOR,CHIP 10K 1/16W 1608
R151	1-218-871-11	s	RESISTOR,CHIP 10K 1/16W (1608)
R152	1-218-835-11	s	RESISTOR,CHIP 330 1/16W (1608)

(RP-111 BOARD(DSR-2000/2000P))

Ref. No. or Q'ty	Part No.	SP	Description
R153	1-218-837-11	s	RESISTOR,CHIP 390 1/16W (1608)
R154	1-216-834-11	s	RESISTOR,CHIP 12K 1/16W 1608
R155	1-216-829-11	s	RESISTOR, CHIP 4.7K 1/16W 1608
R156	1-218-867-11	s	RESISTOR,CHIP 6.8K 1/16W(1608)
R157	1-216-864-11	s	RESISTOR,CHIP 0 1/16W (1608)
R158	1-216-809-11	s	RESISTOR,CHIP 100 1/16W 1608
R159	1-218-879-11	s	RESISTOR,CHIP 22K 1/16W (1608)
R160	1-218-853-11	s	RESISTOR,CHIP 1.8K 1/16W(1608)
R161	1-218-867-11	s	RESISTOR,CHIP 6.8K 1/16W(1608)
R162	1-216-809-11	s	RESISTOR,CHIP 100 1/16W 1608
R163	1-216-805-11	s	RESISTOR,CHIP 47 1/16W 1608
R164	1-218-855-11	s	RESISTOR,CHIP 2.2K 1/16W(1608)
R165	1-216-805-11	s	RESISTOR,CHIP 47 1/16W 1608
R166	1-216-795-11	s	RESISTOR,CHIP 6.8 1/16W(1608)
R167	1-216-797-11	s	RESISTOR,CHIP 10 1/16W 1608
R168	1-218-827-11	s	RESISTOR,CHIP 150 1/16W (1608)
R169	1-216-797-11	s	RESISTOR,CHIP 10 1/16W 1608
R171	1-216-797-11	s	RESISTOR,CHIP 10 1/16W 1608
R172	1-218-827-11	s	RESISTOR,CHIP 150 1/16W (1608)
R173	1-216-797-11	s	RESISTOR,CHIP 10 1/16W 1608
R174	1-216-835-11	s	RESISTOR,CHIP 15K 1/16W
R175	1-216-835-11	s	RESISTOR,CHIP 15K 1/16W
R178	1-218-855-11	s	RESISTOR,CHIP 2.2K 1/16W(1608)
R180	1-216-864-11	s	RESISTOR,CHIP 0 1/16W (1608)
R181	1-211-985-11	s	RESISTOR,CHIP 47 1/16W (1608)
R182	1-211-985-11	s	RESISTOR,CHIP 47 1/16W (1608)
R184	1-211-985-11	s	RESISTOR,CHIP 47 1/16W (1608)
R185	1-216-821-11	s	RESISTOR,CHIP 1.0K 1/16W(1608)
R187	1-216-805-11	s	RESISTOR,CHIP 47 1/16W 1608
R188	1-218-860-11	s	RESISTOR,CHIP 3.6K 1/16W(1608)
R189	1-216-805-11	s	RESISTOR,CHIP 47 1/16W 1608
R190	1-216-805-11	s	RESISTOR,CHIP 47 1/16W 1608
R191	1-211-985-11	s	RESISTOR,CHIP 47 1/16W (1608)
R192	1-216-794-11	s	RESISTOR,CHIP 5.6 1/16W 1608
R193	1-218-843-11	s	RESISTOR,CHIP 680 1/16W (1608)
R194	1-216-817-11	s	RESISTOR,CHIP 470 1/16W 1608
R195	1-218-865-11	s	RESISTOR,CHIP 5.6K 1/16W(1608)
R196	1-216-864-11	s	RESISTOR,CHIP 0 1/16W (1608)
R197	1-218-855-11	s	RESISTOR,CHIP 2.2K 1/16W(1608)
R198	1-218-855-11	s	RESISTOR,CHIP 2.2K 1/16W(1608)
R199	1-218-823-11	s	RESISTOR,CHIP 100 1/16W (1608)
R201	1-218-855-11	s	RESISTOR,CHIP 2.2K 1/16W(1608)
R202	1-216-805-11	s	RESISTOR,CHIP 47 1/16W 1608
R203	1-211-985-11	s	RESISTOR,CHIP 47 1/16W (1608)
R204	1-216-805-11	s	RESISTOR,CHIP 47 1/16W 1608
R205	1-216-864-11	s	RESISTOR,CHIP 0 1/16W (1608)
R206	1-216-805-11	s	RESISTOR,CHIP 47 1/16W 1608
R207	1-216-795-11	s	RESISTOR,CHIP 6.8 1/16W(1608)
R208	1-216-797-11	s	RESISTOR,CHIP 10 1/16W 1608
R209	1-218-827-11	s	RESISTOR,CHIP 150 1/16W (1608)
R210	1-211-969-11	s	RESISTOR,CHIP 10 1/16W (1608)
R212	1-216-797-11	s	RESISTOR,CHIP 10 1/16W 1608
R213	1-218-827-11	s	RESISTOR,CHIP 150 1/16W (1608)
R214	1-211-969-11	s	RESISTOR,CHIP 10 1/16W (1608)
R215	1-216-835-11	s	RESISTOR,CHIP 15K 1/16W
R216	1-216-835-11	s	RESISTOR,CHIP 15K 1/16W
R219	1-218-855-11	s	RESISTOR,CHIP 2.2K 1/16W(1608)
R220	1-216-864-11	s	RESISTOR,CHIP 0 1/16W (1608)
R223	1-211-985-11	s	RESISTOR,CHIP 47 1/16W (1608)

(RP-111 BOARD(DSR-2000/2000P))

Ref. No. or Q'ty	Part No.	SP	Description
R224	1-216-821-11	s	RESISTOR,CHIP 1.0K 1/16W(1608)
R229	1-216-805-11	s	RESISTOR,CHIP 47 1/16W 1608
R230	1-218-855-11	s	RESISTOR,CHIP 2.2K 1/16W(1608)
R231	1-216-805-11	s	RESISTOR,CHIP 47 1/16W 1608
R232	1-216-805-11	s	RESISTOR,CHIP 47 1/16W 1608
R233	1-211-969-11	s	RESISTOR,CHIP 10 1/16W (1608)
R234	1-211-969-11	s	RESISTOR,CHIP 10 1/16W (1608)
R235	1-218-855-11	s	RESISTOR,CHIP 2.2K 1/16W(1608)
R236	1-216-864-11	s	RESISTOR,CHIP 0 1/16W (1608)
R237	1-216-809-11	s	RESISTOR,CHIP 100 1/16W 1608
R238	1-216-829-11	s	RESISTOR, CHIP 4.7K 1/16W 1608
R239	1-211-985-11	s	RESISTOR,CHIP 47 1/16W (1608)
R240	1-216-805-11	s	RESISTOR,CHIP 47 1/16W 1608
R241	1-216-805-11	s	RESISTOR,CHIP 47 1/16W 1608
R242	1-211-985-11	s	RESISTOR,CHIP 47 1/16W (1608)
R243	1-216-794-11	s	RESISTOR,CHIP 5.6 1/16W 1608
R244	1-216-864-11	s	RESISTOR,CHIP 0 1/16W (1608)
R245	1-218-843-11	s	RESISTOR,CHIP 680 1/16W (1608)
R246	1-216-805-11	s	RESISTOR,CHIP 47 1/16W 1608
R247	1-216-817-11	s	RESISTOR,CHIP 470 1/16W 1608
R248	1-218-860-11	s	RESISTOR,CHIP 3.6K 1/16W(1608)
R249	1-218-865-11	s	RESISTOR,CHIP 5.6K 1/16W(1608)
R250	1-218-855-11	s	RESISTOR,CHIP 2.2K 1/16W(1608)
R251	1-218-855-11	s	RESISTOR,CHIP 2.2K 1/16W(1608)
R252	1-216-805-11	s	RESISTOR,CHIP 47 1/16W 1608
R254	1-216-805-11	s	RESISTOR,CHIP 47 1/16W 1608
R255	1-216-864-11	s	RESISTOR,CHIP 0 1/16W (1608)
R257	1-216-795-11	s	RESISTOR,CHIP 6.8 1/16W(1608)
R258	1-216-797-11	s	RESISTOR,CHIP 10 1/16W 1608
R259	1-218-827-11	s	RESISTOR,CHIP 150 1/16W (1608)
R260	1-216-797-11	s	RESISTOR,CHIP 10 1/16W 1608
R262	1-216-797-11	s	RESISTOR,CHIP 10 1/16W 1608
R263	1-218-827-11	s	RESISTOR,CHIP 150 1/16W (1608)
R264	1-216-797-11	s	RESISTOR,CHIP 10 1/16W 1608
R265	1-216-835-11	s	RESISTOR,CHIP 15K 1/16W
R266	1-216-835-11	s	RESISTOR,CHIP 15K 1/16W
R269	1-218-855-11	s	RESISTOR,CHIP 2.2K 1/16W(1608)
R270	1-216-864-11	s	RESISTOR,CHIP 0 1/16W (1608)
R273	1-211-985-11	s	RESISTOR,CHIP 47 1/16W (1608)
R274	1-216-821-11	s	RESISTOR,CHIP 1.0K 1/16W(1608)
R279	1-216-805-11	s	RESISTOR,CHIP 47 1/16W 1608
R280	1-218-855-11	s	RESISTOR,CHIP 2.2K 1/16W(1608)
R281	1-216-805-11	s	RESISTOR,CHIP 47 1/16W 1608
R283	1-216-797-11	s	RESISTOR,CHIP 10 1/16W 1608
R284	1-216-797-11	s	RESISTOR,CHIP 10 1/16W 1608
R285	1-218-855-11	s	RESISTOR,CHIP 2.2K 1/16W(1608)
R286	1-216-864-11	s	RESISTOR,CHIP 0 1/16W (1608)
R287	1-216-805-11	s	RESISTOR,CHIP 47 1/16W 1608
R288	1-216-805-11	s	RESISTOR,CHIP 47 1/16W 1608
R289	1-218-823-11	s	RESISTOR,CHIP 100 1/16W (1608)
R301	1-218-855-11	s	RESISTOR,CHIP 2.2K 1/16W(1608)
R302	1-216-805-11	s	RESISTOR,CHIP 47 1/16W 1608
R303	1-211-985-11	s	RESISTOR,CHIP 47 1/16W (1608)
R304	1-216-805-11	s	RESISTOR,CHIP 47 1/16W 1608
R305	1-216-864-11	s	RESISTOR,CHIP 0 1/16W (1608)
R307	1-216-795-11	s	RESISTOR,CHIP 6.8 1/16W(1608)
R308	1-216-797-11	s	RESISTOR,CHIP 10 1/16W 1608
R309	1-218-827-11	s	RESISTOR,CHIP 150 1/16W (1608)
R310	1-211-969-11	s	RESISTOR,CHIP 10 1/16W (1608)

(RP-111 BOARD(DSR-2000/2000P))

Ref. No. or Q'ty	Part No.	SP	Description
R312	1-216-797-11	s	RESISTOR,CHIP 10 1/16W 1608
R313	1-218-827-11	s	RESISTOR,CHIP 150 1/16W (1608)
R314	1-211-969-11	s	RESISTOR,CHIP 10 1/16W (1608)
R315	1-216-835-11	s	RESISTOR,CHIP 15K 1/16W
R316	1-216-835-11	s	RESISTOR,CHIP 15K 1/16W
R319	1-218-855-11	s	RESISTOR,CHIP 2.2K 1/16W(1608)
R320	1-216-864-11	s	RESISTOR,CHIP 0 1/16W (1608)
R323	1-211-985-11	s	RESISTOR,CHIP 47 1/16W (1608)
R324	1-216-821-11	s	RESISTOR,CHIP 1.0K 1/16W(1608)
R329	1-216-805-11	s	RESISTOR,CHIP 47 1/16W 1608
R330	1-218-855-11	s	RESISTOR,CHIP 2.2K 1/16W(1608)
R331	1-216-805-11	s	RESISTOR,CHIP 47 1/16W 1608
R333	1-211-969-11	s	RESISTOR,CHIP 10 1/16W (1608)
R334	1-211-969-11	s	RESISTOR,CHIP 10 1/16W (1608)
R335	1-218-855-11	s	RESISTOR,CHIP 2.2K 1/16W(1608)
R336	1-216-864-11	s	RESISTOR,CHIP 0 1/16W (1608)
R337	1-216-809-11	s	RESISTOR,CHIP 100 1/16W 1608
R338	1-216-829-11	s	RESISTOR, CHIP 4.7K 1/16W 1608
R339	1-211-985-11	s	RESISTOR,CHIP 47 1/16W (1608)
R340	1-216-805-11	s	RESISTOR,CHIP 47 1/16W 1608
R341	1-216-805-11	s	RESISTOR,CHIP 47 1/16W 1608
R342	1-211-985-11	s	RESISTOR,CHIP 47 1/16W (1608)
R343	1-216-794-11	s	RESISTOR,CHIP 5.6 1/16W 1608
R344	1-216-864-11	s	RESISTOR,CHIP 0 1/16W (1608)
R345	1-218-843-11	s	RESISTOR,CHIP 680 1/16W (1608)
R346	1-216-805-11	s	RESISTOR,CHIP 47 1/16W 1608
R347	1-216-817-11	s	RESISTOR,CHIP 470 1/16W 1608
R348	1-218-860-11	s	RESISTOR,CHIP 3.6K 1/16W(1608)
R349	1-218-865-11	s	RESISTOR,CHIP 5.6K 1/16W(1608)
R350	1-218-855-11	s	RESISTOR,CHIP 2.2K 1/16W(1608)
R351	1-218-855-11	s	RESISTOR,CHIP 2.2K 1/16W(1608)
R352	1-216-805-11	s	RESISTOR,CHIP 47 1/16W 1608
R354	1-216-805-11	s	RESISTOR,CHIP 47 1/16W 1608
R355	1-216-864-11	s	RESISTOR,CHIP 0 1/16W (1608)
R357	1-216-795-11	s	RESISTOR,CHIP 6.8 1/16W(1608)
R358	1-216-797-11	s	RESISTOR,CHIP 10 1/16W 1608
R359	1-218-827-11	s	RESISTOR,CHIP 150 1/16W (1608)
R360	1-216-797-11	s	RESISTOR,CHIP 10 1/16W 1608
R362	1-216-797-11	s	RESISTOR,CHIP 10 1/16W 1608
R363	1-218-827-11	s	RESISTOR,CHIP 150 1/16W (1608)
R364	1-216-797-11	s	RESISTOR,CHIP 10 1/16W 1608
R365	1-216-835-11	s	RESISTOR,CHIP 15K 1/16W
R366	1-216-835-11	s	RESISTOR,CHIP 15K 1/16W
R369	1-218-855-11	s	RESISTOR,CHIP 2.2K 1/16W(1608)
R370	1-216-864-11	s	RESISTOR,CHIP 0 1/16W (1608)
R373	1-211-985-11	s	RESISTOR,CHIP 47 1/16W (1608)
R374	1-216-821-11	s	RESISTOR,CHIP 1.0K 1/16W(1608)
R379	1-216-805-11	s	RESISTOR,CHIP 47 1/16W 1608
R380	1-218-855-11	s	RESISTOR,CHIP 2.2K 1/16W(1608)
R381	1-216-805-11	s	RESISTOR,CHIP 47 1/16W 1608
R382	1-216-805-11	s	RESISTOR,CHIP 47 1/16W 1608
R383	1-216-797-11	s	RESISTOR,CHIP 10 1/16W 1608
R384	1-216-797-11	s	RESISTOR,CHIP 10 1/16W 1608
R385	1-218-855-11	s	RESISTOR,CHIP 2.2K 1/16W(1608)
R386	1-216-864-11	s	RESISTOR,CHIP 0 1/16W (1608)
R387	1-216-805-11	s	RESISTOR,CHIP 47 1/16W 1608
R388	1-216-805-11	s	RESISTOR,CHIP 47 1/16W 1608
R389	1-218-823-11	s	RESISTOR,CHIP 100 1/16W (1608)
R401	1-216-805-11	s	RESISTOR,CHIP 47 1/16W 1608

(RP-111 BOARD(DSR-2000/2000P))

Ref. No. or Q'ty	Part No.	SP	Description
R402	1-216-853-11	s	RESISTOR,CHIP 470K 1/16W(1608)
R403	1-216-853-11	s	RESISTOR,CHIP 470K 1/16W(1608)
R404	1-218-880-11	s	RESISTOR,CHIP 24K 1/16W (1608)
R405	1-218-880-11	s	RESISTOR,CHIP 24K 1/16W (1608)
R406	1-216-841-11	s	RESISTOR, CHIP 47K 1/16W 1608
R407	1-218-878-11	s	RESISTOR,CHIP 20K 1/16W (1608)
R408	1-218-879-11	s	RESISTOR,CHIP 22K 1/16W (1608)
R409	1-218-832-11	s	RESISTOR,CHIP 240 1/16W (1608)
R410	1-218-832-11	s	RESISTOR,CHIP 240 1/16W (1608)
R411	1-218-849-11	s	RESISTOR,CHIP 1.2K 1/16W(1608)
R412	1-218-871-11	s	RESISTOR,CHIP 10K 1/16W (1608)
R413	1-216-809-11	s	RESISTOR,CHIP 100 1/16W 1608
R414	1-218-863-11	s	RESISTOR,CHIP 4.7K 1/16W(1608)
R415	1-216-864-11	s	RESISTOR,CHIP 0 1/16W (1608)
R416	1-218-864-11	s	RESISTOR,CHIP 5.1K 1/16W(1608)
R417	1-216-835-11	s	RESISTOR,CHIP 15K 1/16W
R418	1-218-847-11	s	RESISTOR, CHIP 1K 1/16W (1608)
R419	1-218-835-11	s	RESISTOR,CHIP 330 1/16W (1608)
R420	1-216-864-11	s	RESISTOR,CHIP 0 1/16W (1608)
R421	1-216-864-11	s	RESISTOR,CHIP 0 1/16W (1608)
R422	1-218-879-11	s	RESISTOR,CHIP 22K 1/16W (1608)
R423	1-218-880-11	s	RESISTOR,CHIP 24K 1/16W (1608)
R424	1-218-835-11	s	RESISTOR,CHIP 330 1/16W (1608)
R425	1-218-871-11	s	RESISTOR,CHIP 10K 1/16W (1608)
R426	1-218-839-11	s	RESISTOR,CHIP 470 1/16W (1608)
R427	1-218-863-11	s	RESISTOR,CHIP 4.7K 1/16W(1608)
R428	1-218-875-11	s	RESISTOR,CHIP 15K 1/16W (1608)
R429	1-218-837-11	s	RESISTOR,CHIP 390 1/16W (1608)
R430	1-216-809-11	s	RESISTOR,CHIP 100 1/16W 1608
R431	1-216-809-11	s	RESISTOR,CHIP 100 1/16W 1608
R432	1-218-837-11	s	RESISTOR,CHIP 390 1/16W (1608)
R433	1-216-821-11	s	RESISTOR,CHIP 1.0K 1/16W(1608)
R434	1-216-809-11	s	RESISTOR,CHIP 100 1/16W 1608
R435	1-216-810-11	s	RESISTOR, CHIP 120 1/16W 1608
R436	1-216-810-11	s	RESISTOR, CHIP 120 1/16W 1608
R437	1-218-867-11	s	RESISTOR,CHIP 6.8K 1/16W(1608)
R438	1-216-817-11	s	RESISTOR,CHIP 470 1/16W 1608
R439	1-216-821-11	s	RESISTOR,CHIP 1.0K 1/16W(1608)
R440	1-218-871-11	s	RESISTOR,CHIP 10K 1/16W (1608)
R441	1-218-835-11	s	RESISTOR,CHIP 330 1/16W (1608)
R442	1-218-835-11	s	RESISTOR,CHIP 330 1/16W (1608)
R444	1-218-823-11	s	RESISTOR,CHIP 100 1/16W (1608)
R445	1-216-809-11	s	RESISTOR,CHIP 100 1/16W 1608
R446	1-216-829-11	s	RESISTOR, CHIP 4.7K 1/16W 1608
R447	1-216-829-11	s	RESISTOR, CHIP 4.7K 1/16W 1608
R448	1-216-809-11	s	RESISTOR,CHIP 100 1/16W 1608
R449	1-216-805-11	s	RESISTOR,CHIP 47 1/16W 1608
R450	1-218-839-11	s	RESISTOR,CHIP 470 1/16W (1608)
R451	1-216-805-11	s	RESISTOR,CHIP 47 1/16W 1608
R452	1-216-817-11	s	RESISTOR,CHIP 470 1/16W 1608
R453	1-216-809-11	s	RESISTOR,CHIP 100 1/16W 1608
R454	1-216-864-11	s	RESISTOR,CHIP 0 1/16W (1608)
R455	1-218-875-11	s	RESISTOR,CHIP 15K 1/16W (1608)
R456	1-211-973-11	s	RESISTOR,CHIP 15 1/16W (1608)
R457	1-216-864-11	s	RESISTOR,CHIP 0 1/16W (1608)
R458	1-216-864-11	s	RESISTOR,CHIP 0 1/16W (1608)
R459	1-216-805-11	s	RESISTOR,CHIP 47 1/16W 1608
R475	1-216-829-11	s	RESISTOR, CHIP 4.7K 1/16W 1608
R476	1-216-829-11	s	RESISTOR, CHIP 4.7K 1/16W 1608

(RP-111 BOARD(DSR-2000/2000P))

Ref. No. or Q'ty	Part No.	SP	Description
R477	1-216-809-11	s	RESISTOR,CHIP 100 1/16W 1608
R478	1-216-805-11	s	RESISTOR,CHIP 47 1/16W 1608
R479	1-218-839-11	s	RESISTOR,CHIP 470 1/16W (1608)
R480	1-211-989-11	s	RESISTOR,CHIP 68 1/16W (1608)
R501	1-216-805-11	s	RESISTOR,CHIP 47 1/16W 1608
R502	1-216-853-11	s	RESISTOR,CHIP 470K 1/16W(1608)
R503	1-216-853-11	s	RESISTOR,CHIP 470K 1/16W(1608)
R504	1-218-880-11	s	RESISTOR,CHIP 24K 1/16W (1608)
R505	1-218-880-11	s	RESISTOR,CHIP 24K 1/16W (1608)
R506	1-216-841-11	s	RESISTOR, CHIP 47K 1/16W 1608
R507	1-218-878-11	s	RESISTOR,CHIP 20K 1/16W (1608)
R508	1-218-879-11	s	RESISTOR,CHIP 22K 1/16W (1608)
R509	1-218-832-11	s	RESISTOR,CHIP 240 1/16W (1608)
R510	1-218-832-11	s	RESISTOR,CHIP 240 1/16W (1608)
R511	1-218-849-11	s	RESISTOR,CHIP 1.2K 1/16W(1608)
R512	1-218-871-11	s	RESISTOR,CHIP 10K 1/16W (1608)
R513	1-216-809-11	s	RESISTOR,CHIP 100 1/16W 1608
R514	1-218-863-11	s	RESISTOR,CHIP 4.7K 1/16W(1608)
R515	1-216-864-11	s	RESISTOR,CHIP 0 1/16W (1608)
R516	1-218-864-11	s	RESISTOR,CHIP 5.1K 1/16W(1608)
R517	1-216-835-11	s	RESISTOR,CHIP 15K 1/16W
R518	1-218-847-11	s	RESISTOR, CHIP 1K 1/16W (1608)
R519	1-218-835-11	s	RESISTOR,CHIP 330 1/16W (1608)
R520	1-216-864-11	s	RESISTOR,CHIP 0 1/16W (1608)
R521	1-216-864-11	s	RESISTOR,CHIP 0 1/16W (1608)
R522	1-218-879-11	s	RESISTOR,CHIP 22K 1/16W (1608)
R523	1-218-880-11	s	RESISTOR,CHIP 24K 1/16W (1608)
R524	1-218-835-11	s	RESISTOR,CHIP 330 1/16W (1608)
R525	1-218-871-11	s	RESISTOR,CHIP 10K 1/16W (1608)
R526	1-218-839-11	s	RESISTOR,CHIP 470 1/16W (1608)
R527	1-218-863-11	s	RESISTOR,CHIP 4.7K 1/16W(1608)
R528	1-218-875-11	s	RESISTOR,CHIP 15K 1/16W (1608)
R529	1-218-837-11	s	RESISTOR,CHIP 390 1/16W (1608)
R530	1-218-823-11	s	RESISTOR,CHIP 100 1/16W (1608)
R531	1-218-823-11	s	RESISTOR,CHIP 100 1/16W (1608)
R532	1-218-837-11	s	RESISTOR,CHIP 390 1/16W (1608)
R533	1-216-821-11	s	RESISTOR,CHIP 1.0K 1/16W(1608)
R534	1-216-809-11	s	RESISTOR,CHIP 100 1/16W 1608
R535	1-216-810-11	s	RESISTOR, CHIP 120 1/16W 1608
R536	1-216-810-11	s	RESISTOR, CHIP 120 1/16W 1608
R537	1-218-867-11	s	RESISTOR,CHIP 6.8K 1/16W(1608)
R538	1-216-817-11	s	RESISTOR,CHIP 470 1/16W 1608
R539	1-216-821-11	s	RESISTOR,CHIP 1.0K 1/16W(1608)
R540	1-218-871-11	s	RESISTOR,CHIP 10K 1/16W (1608)
R541	1-218-835-11	s	RESISTOR,CHIP 330 1/16W (1608)
R542	1-218-835-11	s	RESISTOR,CHIP 330 1/16W (1608)
R544	1-218-823-11	s	RESISTOR,CHIP 100 1/16W (1608)
R545	1-216-809-11	s	RESISTOR,CHIP 100 1/16W 1608
R546	1-216-829-11	s	RESISTOR, CHIP 4.7K 1/16W 1608
R547	1-216-829-11	s	RESISTOR, CHIP 4.7K 1/16W 1608
R548	1-216-809-11	s	RESISTOR,CHIP 100 1/16W 1608
R549	1-216-805-11	s	RESISTOR,CHIP 47 1/16W 1608
R550	1-218-839-11	s	RESISTOR,CHIP 470 1/16W (1608)
R551	1-216-805-11	s	RESISTOR,CHIP 47 1/16W 1608
R552	1-216-817-11	s	RESISTOR,CHIP 470 1/16W 1608
R553	1-216-809-11	s	RESISTOR,CHIP 100 1/16W 1608
R554	1-216-864-11	s	RESISTOR,CHIP 0 1/16W (1608)
R555	1-218-875-11	s	RESISTOR,CHIP 15K 1/16W (1608)
R556	1-211-973-11	s	RESISTOR,CHIP 15 1/16W (1608)

(RP-111 BOARD(DSR-2000/2000P))

Ref. No. or Q'ty	Part No.	SP	Description
R557	1-216-864-11	s	RESISTOR,CHIP 0 1/16W (1608)
R558	1-216-864-11	s	RESISTOR,CHIP 0 1/16W (1608)
R559	1-216-805-11	s	RESISTOR,CHIP 47 1/16W 1608
R575	1-216-829-11	s	RESISTOR, CHIP 4.7K 1/16W 1608
R576	1-216-829-11	s	RESISTOR, CHIP 4.7K 1/16W 1608
R577	1-216-809-11	s	RESISTOR,CHIP 100 1/16W 1608
R578	1-216-805-11	s	RESISTOR,CHIP 47 1/16W 1608
R579	1-218-839-11	s	RESISTOR,CHIP 470 1/16W (1608)
R580	1-211-989-11	s	RESISTOR,CHIP 68 1/16W (1608)
R601	1-216-805-11	s	RESISTOR,CHIP 47 1/16W 1608
R602	1-216-853-11	s	RESISTOR,CHIP 470K 1/16W(1608)
R603	1-216-853-11	s	RESISTOR,CHIP 470K 1/16W(1608)
R604	1-218-880-11	s	RESISTOR,CHIP 24K 1/16W (1608)
R605	1-218-880-11	s	RESISTOR,CHIP 24K 1/16W (1608)
R606	1-216-841-11	s	RESISTOR, CHIP 47K 1/16W 1608
R607	1-218-878-11	s	RESISTOR,CHIP 20K 1/16W (1608)
R608	1-218-879-11	s	RESISTOR,CHIP 22K 1/16W (1608)
R609	1-218-832-11	s	RESISTOR,CHIP 240 1/16W (1608)
R610	1-218-832-11	s	RESISTOR,CHIP 240 1/16W (1608)
R611	1-216-864-11	s	RESISTOR,CHIP 0 1/16W (1608)
R612	1-216-864-11	s	RESISTOR,CHIP 0 1/16W (1608)
R613	1-218-849-11	s	RESISTOR,CHIP 1.2K 1/16W(1608)
R614	1-218-871-11	s	RESISTOR,CHIP 10K 1/16W (1608)
R615	1-218-863-11	s	RESISTOR,CHIP 4.7K 1/16W(1608)
R616	1-218-863-11	s	RESISTOR,CHIP 4.7K 1/16W(1608)
R617	1-218-864-11	s	RESISTOR,CHIP 5.1K 1/16W(1608)
R618	1-218-864-11	s	RESISTOR,CHIP 5.1K 1/16W(1608)
R619	1-216-864-11	s	RESISTOR,CHIP 0 1/16W (1608)
R620	1-216-835-11	s	RESISTOR,CHIP 15K 1/16W
R621	1-218-846-11	s	RESISTOR,CHIP 910 1/16W (1608)
R622	1-218-835-11	s	RESISTOR,CHIP 330 1/16W (1608)
R623	1-216-864-11	s	RESISTOR,CHIP 0 1/16W (1608)
R624	1-216-809-11	s	RESISTOR,CHIP 100 1/16W 1608
R625	1-218-879-11	s	RESISTOR,CHIP 22K 1/16W (1608)
R626	1-218-880-11	s	RESISTOR,CHIP 24K 1/16W (1608)
R627	1-218-835-11	s	RESISTOR,CHIP 330 1/16W (1608)
R628	1-218-871-11	s	RESISTOR,CHIP 10K 1/16W (1608)
R629	1-218-839-11	s	RESISTOR,CHIP 470 1/16W (1608)
R630	1-218-863-11	s	RESISTOR,CHIP 4.7K 1/16W(1608)
R631	1-218-875-11	s	RESISTOR,CHIP 15K 1/16W (1608)
R632	1-218-837-11	s	RESISTOR,CHIP 390 1/16W (1608)
R633	1-216-809-11	s	RESISTOR,CHIP 100 1/16W 1608
R634	1-216-809-11	s	RESISTOR,CHIP 100 1/16W 1608
R635	1-218-837-11	s	RESISTOR,CHIP 390 1/16W (1608)
R636	1-216-821-11	s	RESISTOR,CHIP 1.0K 1/16W(1608)
R637	1-216-814-11	s	RESISTOR,CHIP 270 1/16W 1608
R638	1-216-810-11	s	RESISTOR, CHIP 120 1/16W 1608
R639	1-216-810-11	s	RESISTOR, CHIP 120 1/16W 1608
R640	1-218-867-11	s	RESISTOR,CHIP 6.8K 1/16W(1608)
R641	1-216-817-11	s	RESISTOR,CHIP 470 1/16W 1608
R642	1-216-821-11	s	RESISTOR,CHIP 1.0K 1/16W(1608)
R643	1-218-871-11	s	RESISTOR,CHIP 10K 1/16W (1608)
R644	1-218-835-11	s	RESISTOR,CHIP 330 1/16W (1608)
R645	1-218-835-11	s	RESISTOR,CHIP 330 1/16W (1608)
R647	1-218-823-11	s	RESISTOR,CHIP 100 1/16W (1608)
R648	1-216-829-11	s	RESISTOR, CHIP 4.7K 1/16W 1608
R649	1-216-829-11	s	RESISTOR, CHIP 4.7K 1/16W 1608
R650	1-216-809-11	s	RESISTOR,CHIP 100 1/16W 1608
R651	1-216-805-11	s	RESISTOR,CHIP 47 1/16W 1608

(RP-111 BOARD(DSR-2000/2000P))

Ref. No. or Q'ty	Part No.	SP	Description
R652	1-218-839-11	s	RESISTOR,CHIP 470 1/16W (1608)
R653	1-216-805-11	s	RESISTOR,CHIP 47 1/16W 1608
R654	1-216-817-11	s	RESISTOR,CHIP 470 1/16W 1608
R655	1-216-809-11	s	RESISTOR,CHIP 100 1/16W 1608
R656	1-216-809-11	s	RESISTOR,CHIP 100 1/16W 1608
R657	1-216-864-11	s	RESISTOR,CHIP 0 1/16W (1608)
R658	1-218-875-11	s	RESISTOR,CHIP 15K 1/16W (1608)
R659	1-211-973-11	s	RESISTOR,CHIP 15 1/16W (1608)
R660	1-211-973-11	s	RESISTOR,CHIP 15 1/16W (1608)
R661	1-218-875-11	s	RESISTOR,CHIP 15K 1/16W (1608)
R663	1-216-805-11	s	RESISTOR,CHIP 47 1/16W 1608
R675	1-216-829-11	s	RESISTOR, CHIP 4.7K 1/16W 1608
R676	1-216-829-11	s	RESISTOR, CHIP 4.7K 1/16W 1608
R677	1-216-809-11	s	RESISTOR,CHIP 100 1/16W 1608
R678	1-216-805-11	s	RESISTOR,CHIP 47 1/16W 1608
R679	1-218-839-11	s	RESISTOR,CHIP 470 1/16W (1608)
R680	1-211-989-11	s	RESISTOR,CHIP 68 1/16W (1608)
R701	1-216-805-11	s	RESISTOR,CHIP 47 1/16W 1608
R702	1-216-853-11	s	RESISTOR,CHIP 470K 1/16W(1608)
R703	1-216-853-11	s	RESISTOR,CHIP 470K 1/16W(1608)
R704	1-218-880-11	s	RESISTOR,CHIP 24K 1/16W (1608)
R705	1-218-880-11	s	RESISTOR,CHIP 24K 1/16W (1608)
R706	1-216-841-11	s	RESISTOR, CHIP 47K 1/16W 1608
R707	1-218-878-11	s	RESISTOR,CHIP 20K 1/16W (1608)
R708	1-218-879-11	s	RESISTOR,CHIP 22K 1/16W (1608)
R709	1-218-832-11	s	RESISTOR,CHIP 240 1/16W (1608)
R710	1-218-832-11	s	RESISTOR,CHIP 240 1/16W (1608)
R711	1-216-864-11	s	RESISTOR,CHIP 0 1/16W (1608)
R712	1-216-864-11	s	RESISTOR,CHIP 0 1/16W (1608)
R713	1-218-849-11	s	RESISTOR,CHIP 1.2K 1/16W(1608)
R714	1-218-871-11	s	RESISTOR,CHIP 10K 1/16W (1608)
R715	1-218-863-11	s	RESISTOR,CHIP 4.7K 1/16W(1608)
R716	1-218-863-11	s	RESISTOR,CHIP 4.7K 1/16W(1608)
R717	1-218-864-11	s	RESISTOR,CHIP 5.1K 1/16W(1608)
R718	1-218-864-11	s	RESISTOR,CHIP 5.1K 1/16W(1608)
R719	1-216-864-11	s	RESISTOR,CHIP 0 1/16W (1608)
R720	1-216-835-11	s	RESISTOR,CHIP 15K 1/16W
R721	1-218-846-11	s	RESISTOR,CHIP 910 1/16W (1608)
R722	1-218-835-11	s	RESISTOR,CHIP 330 1/16W (1608)
R724	1-216-809-11	s	RESISTOR,CHIP 100 1/16W 1608
R725	1-218-879-11	s	RESISTOR,CHIP 22K 1/16W (1608)
R726	1-218-880-11	s	RESISTOR,CHIP 24K 1/16W (1608)
R727	1-218-835-11	s	RESISTOR,CHIP 330 1/16W (1608)
R728	1-218-871-11	s	RESISTOR,CHIP 10K 1/16W (1608)
R729	1-218-839-11	s	RESISTOR,CHIP 470 1/16W (1608)
R730	1-218-863-11	s	RESISTOR,CHIP 4.7K 1/16W(1608)
R731	1-218-875-11	s	RESISTOR,CHIP 15K 1/16W (1608)
R732	1-218-837-11	s	RESISTOR,CHIP 390 1/16W (1608)
R733	1-216-809-11	s	RESISTOR,CHIP 100 1/16W 1608
R734	1-216-809-11	s	RESISTOR,CHIP 100 1/16W 1608
R735	1-218-837-11	s	RESISTOR,CHIP 390 1/16W (1608)
R736	1-216-821-11	s	RESISTOR,CHIP 1.0K 1/16W(1608)
R737	1-216-814-11	s	RESISTOR,CHIP 270 1/16W 1608
R738	1-216-810-11	s	RESISTOR, CHIP 120 1/16W 1608
R739	1-216-810-11	s	RESISTOR, CHIP 120 1/16W 1608
R740	1-218-867-11	s	RESISTOR,CHIP 6.8K 1/16W(1608)
R741	1-216-817-11	s	RESISTOR,CHIP 470 1/16W 1608
R742	1-216-821-11	s	RESISTOR,CHIP 1.0K 1/16W(1608)
R743	1-218-871-11	s	RESISTOR,CHIP 10K 1/16W (1608)

(RP-111 BOARD(DSR-2000/2000P))

Ref. No. or Q'ty	Part No.	SP	Description
R744	1-218-835-11	s	RESISTOR,CHIP 330 1/16W (1608)
R745	1-218-835-11	s	RESISTOR,CHIP 330 1/16W (1608)
R747	1-218-823-11	s	RESISTOR,CHIP 100 1/16W (1608)
R748	1-216-829-11	s	RESISTOR, CHIP 4.7K 1/16W 1608
R749	1-216-829-11	s	RESISTOR, CHIP 4.7K 1/16W 1608
R750	1-216-809-11	s	RESISTOR,CHIP 100 1/16W 1608
R751	1-216-805-11	s	RESISTOR,CHIP 47 1/16W 1608
R752	1-218-839-11	s	RESISTOR,CHIP 470 1/16W (1608)
R753	1-216-805-11	s	RESISTOR,CHIP 47 1/16W 1608
R754	1-216-817-11	s	RESISTOR,CHIP 470 1/16W 1608
R755	1-216-809-11	s	RESISTOR,CHIP 100 1/16W 1608
R756	1-216-809-11	s	RESISTOR,CHIP 100 1/16W 1608
R758	1-216-864-11	s	RESISTOR,CHIP 0 1/16W (1608)
R759	1-218-875-11	s	RESISTOR,CHIP 15K 1/16W (1608)
R760	1-211-973-11	s	RESISTOR,CHIP 15 1/16W (1608)
R761	1-211-973-11	s	RESISTOR,CHIP 15 1/16W (1608)
R762	1-218-875-11	s	RESISTOR,CHIP 15K 1/16W (1608)
R763	1-216-805-11	s	RESISTOR,CHIP 47 1/16W 1608
R775	1-216-829-11	s	RESISTOR, CHIP 4.7K 1/16W 1608
R776	1-216-829-11	s	RESISTOR, CHIP 4.7K 1/16W 1608
R777	1-216-809-11	s	RESISTOR,CHIP 100 1/16W 1608
R778	1-216-805-11	s	RESISTOR,CHIP 47 1/16W 1608
R779	1-218-839-11	s	RESISTOR,CHIP 470 1/16W (1608)
R780	1-211-989-11	s	RESISTOR,CHIP 68 1/16W (1608)
R801	1-216-864-11	s	RESISTOR,CHIP 0 1/16W (1608)
R802	1-216-809-11	s	RESISTOR,CHIP 100 1/16W 1608
R803	1-216-809-11	s	RESISTOR,CHIP 100 1/16W 1608
R804	1-216-809-11	s	RESISTOR,CHIP 100 1/16W 1608
R805	1-216-864-11	s	RESISTOR,CHIP 0 1/16W (1608)
R806	1-216-864-11	s	RESISTOR,CHIP 0 1/16W (1608)
R807	1-216-809-11	s	RESISTOR,CHIP 100 1/16W 1608
R808	1-216-809-11	s	RESISTOR,CHIP 100 1/16W 1608
R809	1-216-864-11	s	RESISTOR,CHIP 0 1/16W (1608)
R810	1-216-837-11	s	RESISTOR,CHIP 22K 1/16W 1608
R811	1-216-864-11	s	RESISTOR,CHIP 0 1/16W (1608)
R812	1-218-823-11	s	RESISTOR,CHIP 100 1/16W (1608)
R814	1-216-845-11	s	RESISTOR,CHIP 100K 1/16W(1608)
R821	1-216-837-11	s	RESISTOR,CHIP 22K 1/16W 1608
R822	1-216-837-11	s	RESISTOR,CHIP 22K 1/16W 1608
R823	1-216-864-11	s	RESISTOR,CHIP 0 1/16W (1608)
R824	1-216-809-11	s	RESISTOR,CHIP 100 1/16W 1608
R825	1-216-809-11	s	RESISTOR,CHIP 100 1/16W 1608
R826	1-216-864-11	s	RESISTOR,CHIP 0 1/16W (1608)
R827	1-216-837-11	s	RESISTOR,CHIP 22K 1/16W 1608
R828	1-216-864-11	s	RESISTOR,CHIP 0 1/16W (1608)
R831	1-216-845-11	s	RESISTOR,CHIP 100K 1/16W(1608)
R837	1-216-864-11	s	RESISTOR,CHIP 0 1/16W (1608)
R838	1-216-864-11	s	RESISTOR,CHIP 0 1/16W (1608)
R839	1-216-864-11	s	RESISTOR,CHIP 0 1/16W (1608)
R840	1-216-864-11	s	RESISTOR,CHIP 0 1/16W (1608)
R841	1-216-864-11	s	RESISTOR,CHIP 0 1/16W (1608)
R842	1-216-864-11	s	RESISTOR,CHIP 0 1/16W (1608)
R851	1-216-809-11	s	RESISTOR,CHIP 100 1/16W 1608
R852	1-216-809-11	s	RESISTOR,CHIP 100 1/16W 1608
R853	1-216-809-11	s	RESISTOR,CHIP 100 1/16W 1608
R854	1-216-809-11	s	RESISTOR,CHIP 100 1/16W 1608
R855	1-216-809-11	s	RESISTOR,CHIP 100 1/16W 1608
R857	1-216-864-11	s	RESISTOR,CHIP 0 1/16W (1608)
R858	1-216-864-11	s	RESISTOR,CHIP 0 1/16W (1608)

(RP-111 BOARD(DSR-2000/2000P))

Ref. No. or Q'ty	Part No.	SP	Description
R859	1-216-837-11	s	RESISTOR,CHIP 22K 1/16W 1608
R860	1-216-837-11	s	RESISTOR,CHIP 22K 1/16W 1608
R861	1-216-845-11	s	RESISTOR,CHIP 100K 1/16W(1608)
R862	1-216-864-11	s	RESISTOR,CHIP 0 1/16W (1608)
R863	1-216-864-11	s	RESISTOR,CHIP 0 1/16W (1608)
R864	1-216-864-11	s	RESISTOR,CHIP 0 1/16W (1608)
R865	1-216-864-11	s	RESISTOR,CHIP 0 1/16W (1608)
R866	1-216-864-11	s	RESISTOR,CHIP 0 1/16W (1608)
R867	1-216-809-11	s	RESISTOR,CHIP 100 1/16W 1608
R868	1-216-809-11	s	RESISTOR,CHIP 100 1/16W 1608
R869	1-216-809-11	s	RESISTOR,CHIP 100 1/16W 1608
R870	1-216-809-11	s	RESISTOR,CHIP 100 1/16W 1608
R871	1-216-809-11	s	RESISTOR,CHIP 100 1/16W 1608
R872	1-216-864-11	s	RESISTOR,CHIP 0 1/16W (1608)
R873	1-216-864-11	s	RESISTOR,CHIP 0 1/16W (1608)
R874	1-216-864-11	s	RESISTOR,CHIP 0 1/16W (1608)
R876	1-216-845-11	s	RESISTOR,CHIP 100K 1/16W(1608)
R901	1-218-851-11	s	RESISTOR,CHIP 1.5K 1/16W(1608)
R902	1-218-847-11	s	RESISTOR, CHIP 1K 1/16W (1608)
R903	1-218-851-11	s	RESISTOR,CHIP 1.5K 1/16W(1608)
R904	1-218-847-11	s	RESISTOR, CHIP 1K 1/16W (1608)
R905	1-216-845-11	s	RESISTOR,CHIP 100K 1/16W(1608)
R906	1-218-851-11	s	RESISTOR,CHIP 1.5K 1/16W(1608)
R907	1-218-847-11	s	RESISTOR, CHIP 1K 1/16W (1608)
R923	1-218-823-11	s	RESISTOR,CHIP 100 1/16W (1608)
R924	1-218-823-11	s	RESISTOR,CHIP 100 1/16W (1608)
R925	1-218-823-11	s	RESISTOR,CHIP 100 1/16W (1608)
R926	1-218-823-11	s	RESISTOR,CHIP 100 1/16W (1608)
R927	1-218-823-11	s	RESISTOR,CHIP 100 1/16W (1608)
R928	1-218-823-11	s	RESISTOR,CHIP 100 1/16W (1608)
R929	1-218-823-11	s	RESISTOR,CHIP 100 1/16W (1608)
R930	1-218-823-11	s	RESISTOR,CHIP 100 1/16W (1608)
R931	1-216-864-11	s	RESISTOR,CHIP 0 1/16W (1608)
R932	1-216-864-11	s	RESISTOR,CHIP 0 1/16W (1608)
R933	1-216-864-11	s	RESISTOR,CHIP 0 1/16W (1608)
R934	1-216-864-11	s	RESISTOR,CHIP 0 1/16W (1608)
R940	1-216-864-11	s	RESISTOR,CHIP 0 1/16W (1608)
R941	1-216-845-11	s	RESISTOR,CHIP 100K 1/16W(1608)
R942	1-216-845-11	s	RESISTOR,CHIP 100K 1/16W(1608)
R943	1-216-837-11	s	RESISTOR,CHIP 22K 1/16W 1608
R944	1-216-837-11	s	RESISTOR,CHIP 22K 1/16W 1608
R945	1-216-843-11	s	RESISTOR,CHIP 68K 1/16W (1608)
R946	1-216-839-11	s	RESISTOR,CHIP 33K 1/16W 1608
R947	1-216-817-11	s	RESISTOR,CHIP 470 1/16W 1608
R948	1-216-839-11	s	RESISTOR,CHIP 33K 1/16W 1608
R949	1-216-833-11	s	RESISTOR,CHIP 10K 1/16W 1608
R950	1-216-832-11	s	RESISTOR,CHIP 8.2K 1/16W 1608
R951	1-216-833-11	s	RESISTOR,CHIP 10K 1/16W 1608
R952	1-216-833-11	s	RESISTOR,CHIP 10K 1/16W 1608
R953	1-216-821-11	s	RESISTOR,CHIP 1.0K 1/16W(1608)
R954	1-216-833-11	s	RESISTOR,CHIP 10K 1/16W 1608
R955	1-218-855-11	s	RESISTOR,CHIP 2.2K 1/16W(1608)
R956	1-218-855-11	s	RESISTOR,CHIP 2.2K 1/16W(1608)
R957	1-216-833-11	s	RESISTOR,CHIP 10K 1/16W 1608
R958	1-216-834-11	s	RESISTOR,CHIP 12K 1/16W 1608
R959	1-216-833-11	s	RESISTOR,CHIP 10K 1/16W 1608
R960	1-216-834-11	s	RESISTOR,CHIP 12K 1/16W 1608
R961	1-216-833-11	s	RESISTOR,CHIP 10K 1/16W 1608
R962	1-218-847-11	s	RESISTOR, CHIP 1K 1/16W (1608)

(RP-111 BOARD(DSR-2000/2000P))

Ref. No. or Q'ty	Part No.	SP	Description
R964	1-218-871-11	s	RESISTOR,CHIP 10K 1/16W (1608)
R965	1-216-833-11	s	RESISTOR,CHIP 10K 1/16W 1608
R966	1-218-879-11	s	RESISTOR,CHIP 22K 1/16W (1608)
R967	1-216-821-11	s	RESISTOR,CHIP 1.0K 1/16W(1608)
R968	1-218-847-11	s	RESISTOR, CHIP 1K 1/16W (1608)
R969	1-216-833-11	s	RESISTOR,CHIP 10K 1/16W 1608
R970	1-216-843-11	s	RESISTOR,CHIP 68K 1/16W (1608)
R971	1-216-839-11	s	RESISTOR,CHIP 33K 1/16W 1608
R972	1-216-809-11	s	RESISTOR,CHIP 100 1/16W 1608
R973	1-216-817-11	s	RESISTOR,CHIP 470 1/16W 1608
R974	1-216-839-11	s	RESISTOR,CHIP 33K 1/16W 1608
R975	1-216-833-11	s	RESISTOR,CHIP 10K 1/16W 1608
R976	1-216-832-11	s	RESISTOR,CHIP 8.2K 1/16W 1608
R977	1-216-833-11	s	RESISTOR,CHIP 10K 1/16W 1608
R978	1-216-833-11	s	RESISTOR,CHIP 10K 1/16W 1608
R979	1-216-821-11	s	RESISTOR,CHIP 1.0K 1/16W(1608)
R980	1-216-833-11	s	RESISTOR,CHIP 10K 1/16W 1608
R981	1-218-855-11	s	RESISTOR,CHIP 2.2K 1/16W(1608)
R982	1-218-855-11	s	RESISTOR,CHIP 2.2K 1/16W(1608)
R983	1-216-833-11	s	RESISTOR,CHIP 10K 1/16W 1608
R984	1-216-834-11	s	RESISTOR,CHIP 12K 1/16W 1608
R985	1-216-833-11	s	RESISTOR,CHIP 10K 1/16W 1608
R986	1-216-834-11	s	RESISTOR,CHIP 12K 1/16W 1608
R987	1-216-833-11	s	RESISTOR,CHIP 10K 1/16W 1608
R988	1-218-847-11	s	RESISTOR, CHIP 1K 1/16W (1608)
R990	1-218-871-11	s	RESISTOR,CHIP 10K 1/16W (1608)
R991	1-216-833-11	s	RESISTOR,CHIP 10K 1/16W 1608
R992	1-218-879-11	s	RESISTOR,CHIP 22K 1/16W (1608)
R993	1-216-821-11	s	RESISTOR,CHIP 1.0K 1/16W(1608)
R994	1-218-847-11	s	RESISTOR, CHIP 1K 1/16W (1608)
R995	1-216-833-11	s	RESISTOR,CHIP 10K 1/16W 1608
R996	1-216-821-11	s	RESISTOR,CHIP 1.0K 1/16W(1608)
R997	1-216-864-11	s	RESISTOR,CHIP 0 1/16W (1608)
R998	1-218-823-11	s	RESISTOR,CHIP 100 1/16W (1608)
R999	1-218-823-11	s	RESISTOR,CHIP 100 1/16W (1608)
R1000	1-216-845-11	s	RESISTOR,CHIP 100K 1/16W(1608)
R1001	1-211-981-11	s	RESISTOR,CHIP 33 1/16W (1608)
R1002	1-211-981-11	s	RESISTOR,CHIP 33 1/16W (1608)
R1004	1-216-864-11	s	RESISTOR,CHIP 0 1/16W (1608)
R1012	1-216-864-11	s	RESISTOR,CHIP 0 1/16W (1608)
R1013	1-216-864-11	s	RESISTOR,CHIP 0 1/16W (1608)
R1014	1-216-864-11	s	RESISTOR,CHIP 0 1/16W (1608)
R1015	1-216-864-11	s	RESISTOR,CHIP 0 1/16W (1608)
R1016	1-216-864-11	s	RESISTOR,CHIP 0 1/16W (1608)
R1017	1-216-864-11	s	RESISTOR,CHIP 0 1/16W (1608)
R1018	1-216-864-11	s	RESISTOR,CHIP 0 1/16W (1608)
R1019	1-216-864-11	s	RESISTOR,CHIP 0 1/16W (1608)
R1024	1-216-864-11	s	RESISTOR,CHIP 0 1/16W (1608)
RB1	1-239-621-11	s	NETWORK RESISTOR 22 (1608)
RB2	1-239-621-11	s	NETWORK RESISTOR 22 (1608)
RB3	1-236-907-11	s	RESISTOR BLOCK 100K (1608)
RB4	1-236-907-11	s	RESISTOR BLOCK 100K (1608)
RB801	1-239-711-11	s	NETWORK, RESISTOR 0 (1608)
RB802	1-239-711-11	s	NETWORK, RESISTOR 0 (1608)
RB803	1-236-904-11	s	RESISTOR NETWORK 1K (1608)
RB804	1-236-904-11	s	RESISTOR NETWORK 1K (1608)
RB805	1-236-904-11	s	RESISTOR NETWORK 1K (1608)
RB806	1-236-904-11	s	RESISTOR NETWORK 1K (1608)

(RP-111 BOARD(DSR-2000/2000P))

Ref. No. or Q'ty	Part No.	SP	Description
RB851	1-239-711-11	s	NETWORK, RESISTOR 0 (1608)
RB852	1-239-711-11	s	NETWORK, RESISTOR 0 (1608)
RB853	1-239-711-11	s	NETWORK, RESISTOR 0 (1608)
RB854	1-239-711-11	s	NETWORK, RESISTOR 0 (1608)
RB855	1-239-711-11	s	NETWORK, RESISTOR 0 (1608)
RB856	1-239-711-11	s	NETWORK, RESISTOR 0 (1608)
RB857	1-236-904-11	s	RESISTOR NETWORK 1K (1608)
RB858	1-236-904-11	s	RESISTOR NETWORK 1K (1608)
RB859	1-236-904-11	s	RESISTOR NETWORK 1K (1608)
RB860	1-236-904-11	s	RESISTOR NETWORK 1K (1608)
RB901	1-239-412-11	s	NETWORK, RESISTOR 100 (1608)
RB902	1-239-412-11	s	NETWORK, RESISTOR 100 (1608)
RB903	1-239-412-11	s	NETWORK, RESISTOR 100 (1608)
RB945	1-239-412-11	s	NETWORK, RESISTOR 100 (1608)
RB981	1-239-416-11	s	NETWORK,RESISTOR 220 (1608)
RB982	1-239-416-11	s	NETWORK,RESISTOR 220 (1608)
RB983	1-239-416-11	s	NETWORK,RESISTOR 220 (1608)
RB984	1-239-416-11	s	NETWORK,RESISTOR 220 (1608)
RB985	1-239-416-11	s	NETWORK,RESISTOR 220 (1608)
RB986	1-239-416-11	s	NETWORK,RESISTOR 220 (1608)
RB987	1-239-416-11	s	NETWORK,RESISTOR 220 (1608)
RB988	1-239-416-11	s	NETWORK,RESISTOR 220 (1608)
S941	1-692-535-11	s	SWITCH DIP (4P)
S942	1-692-535-11	s	SWITCH DIP (4P)

SE-521 BOARD(DSR-2000/2000P)

Ref. No. or Q'ty	Part No.	SP	Description
1pc	A-8323-518-A	s	MOUNTED CIRCUIT BOARD, SE-521
CN3	1-784-405-21	s	CONNECTOR, FFC/FPC (ZIF) 5P
CN4	1-785-840-21	o	CONNECTOR, FFC (ZIF) 15P
PH1	8-719-988-15	s	PHOTO REFRECTOR PR-11-C
PH2	8-719-988-15	s	PHOTO REFRECTOR PR-11-C
PH3	8-719-988-15	s	PHOTO REFRECTOR PR-11-C
Q1	8-729-926-31	s	PHOTO TRANSISTOR PT483F1S

SE-522 BOARD(DSR-2000/2000P)

Ref. No. or Q'ty	Part No.	SP	Description
1pc	A-8323-519-A	s	MOUNTED CIRCUIT BOARD, SE-522
CN2	1-784-405-21	s	CONNECTOR, FFC/FPC (ZIF) 5P
CN3	1-785-840-21	o	CONNECTOR, FFC (ZIF) 15P
PH1	8-719-939-11	s	PHOTO SENSOR GP2S09B
PH2	8-719-939-11	s	PHOTO SENSOR GP2S09B
PH3	8-719-939-11	s	PHOTO SENSOR GP2S09B
PH4	8-719-988-15	s	PHOTO REFRECTOR PR-11-C
Q1	8-729-926-31	s	PHOTO TRANSISTOR PT483F1S
TH1	1-804-378-11	s	THERMISTOR

SV-212 BOARD(DSR-2000/2000P)

Ref. No. or Q'ty	Part No.	SP	Description
1pc	A-8323-476-A	o	MOUNTED CIRCUIT BOARD, SV-212
1pc	3-179-084-01	s	LEVER(R),PRINTED C,BOARD
1pc	3-179-085-01	s	LEVER(L),PRINTED C.BOARD
C101	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C102	1-162-964-11	s	CAPACITOR,CERAMIC 1000PF/50V B
C103	1-126-396-11	s	CAPACITOR,ELECT 47MF/16V(CHIP)
C104	1-162-964-11	s	CAPACITOR,CERAMIC 1000PF/50V B
C105	1-165-176-11	s	CAPACITOR,CERAMIC 47000PF/16V
C106	1-164-227-11	s	CAPACITOR,CERAMIC 0.022MF/25V
C107	1-162-966-11	s	CAPACITOR,CERAMIC 2200PF/50V B
C108	1-162-964-11	s	CAPACITOR,CERAMIC 1000PF/50V B
C109	1-162-918-11	s	CAPACITOR,CERAMIC 18PF/50V CH
C110	1-162-920-11	s	CAPACITOR,CERAMIC 27PF/50V CH
C111	1-164-227-11	s	CAPACITOR,CERAMIC 0.022MF/25V
C112	1-164-227-11	s	CAPACITOR,CERAMIC 0.022MF/25V
C113	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C114	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C115	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C116	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C117	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C120	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C121	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C122	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C123	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C124	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C125	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C126	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C127	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C128	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C129	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C130	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C132	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C133	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C134	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C135	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C136	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C137	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C138	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C139	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C140	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C141	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C142	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C143	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C200	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C201	1-162-927-11	s	CAPACITOR,CERAMIC 100PF/50V CH
C202	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C203	1-162-964-11	s	CAPACITOR,CERAMIC 1000PF/50V B
C204	1-162-920-11	s	CAPACITOR,CERAMIC 27PF/50V CH
C205	1-162-920-11	s	CAPACITOR,CERAMIC 27PF/50V CH
C209	1-162-966-11	s	CAPACITOR,CERAMIC 2200PF/50V B
C210	1-162-966-11	s	CAPACITOR,CERAMIC 2200PF/50V B
C211	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C212	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C213	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C216	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C217	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C218	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C219	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F

(SV-212 BOARD(DSR-2000/2000P))

Ref. No. or Q'ty	Part No.	SP	Description
C220	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C301	1-162-964-11	s	CAPACITOR,CERAMIC 1000PF/50V B
C302	1-162-964-11	s	CAPACITOR,CERAMIC 1000PF/50V B
C303	1-162-964-11	s	CAPACITOR,CERAMIC 1000PF/50V B
C304	1-162-964-11	s	CAPACITOR,CERAMIC 1000PF/50V B
C305	1-162-964-11	s	CAPACITOR,CERAMIC 1000PF/50V B
C306	1-162-964-11	s	CAPACITOR,CERAMIC 1000PF/50V B
C307	1-162-964-11	s	CAPACITOR,CERAMIC 1000PF/50V B
C308	1-162-964-11	s	CAPACITOR,CERAMIC 1000PF/50V B
C309	1-162-964-11	s	CAPACITOR,CERAMIC 1000PF/50V B
C310	1-162-964-11	s	CAPACITOR,CERAMIC 1000PF/50V B
C311	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C312	1-162-919-11	s	CAPACITOR,CERAMIC 22PF/50V CH
C313	1-162-919-11	s	CAPACITOR,CERAMIC 22PF/50V CH
C314	1-162-964-11	s	CAPACITOR,CERAMIC 1000PF/50V B
C315	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C316	1-126-401-11	s	CAPACITOR, ELECT 1MF/50V(CHIP)
C317	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C318	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C319	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C320	1-162-968-11	s	CAPACITOR,CERAMIC 4700PF/50V B
C321	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C322	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C323	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C401	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C402	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C403	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C404	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C500	1-109-892-11	s	CAPACITOR ERECT 47MF/25V(105C)
C501	1-162-970-11	s	CAPACITOR CERAMIC 0.01MF/25V B
C502	1-162-964-11	s	CAPACITOR,CERAMIC 1000PF/50V B
C503	1-164-315-11	s	CAPACITOR,CERAMIC 470PF/50V CH
C504	1-162-970-11	s	CAPACITOR CERAMIC 0.01MF/25V B
C505	1-162-968-11	s	CAPACITOR,CERAMIC 4700PF/50V B
C506	1-162-925-11	s	CAPACITOR,CERAMIC 68PF/50V CH
C507	1-162-925-11	s	CAPACITOR,CERAMIC 68PF/50V CH
C508	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C509	1-126-394-11	s	CAPACITOR,ELECT 10MF/16V(CHIP)
C510	1-162-922-11	s	CAPACITOR,CERAMIC 39PF/50V CH
C511	1-165-176-11	s	CAPACITOR,CERAMIC 47000PF/16V
C512	1-162-968-11	s	CAPACITOR,CERAMIC 4700PF/50V B
C513	1-164-227-11	s	CAPACITOR,CERAMIC 0.022MF/25V
C514	1-162-969-11	s	CAPACITOR,CERAMIC 6800PF/25V B
C515	1-162-967-11	s	CAPACITOR,CERAMIC 3300PF/50V B
C516	1-162-967-11	s	CAPACITOR,CERAMIC 3300PF/50V B
C517	1-162-924-11	s	CAPACITOR,CERAMIC 56PF/50V CH
C518	1-162-969-11	s	CAPACITOR,CERAMIC 6800PF/25V B
C519	1-162-969-11	s	CAPACITOR,CERAMIC 6800PF/25V B
C520	1-162-964-11	s	CAPACITOR,CERAMIC 1000PF/50V B
C521	1-162-967-11	s	CAPACITOR,CERAMIC 3300PF/50V B
C522	1-162-964-11	s	CAPACITOR,CERAMIC 1000PF/50V B
C523	1-162-967-11	s	CAPACITOR,CERAMIC 3300PF/50V B
C524	1-109-892-11	s	CAPACITOR ERECT 47MF/25V(105C)
C525	1-162-964-11	s	CAPACITOR,CERAMIC 1000PF/50V B
C526	1-162-968-11	s	CAPACITOR,CERAMIC 4700PF/50V B
C527	1-162-964-11	s	CAPACITOR,CERAMIC 1000PF/50V B
C528	1-109-892-11	s	CAPACITOR ERECT 47MF/25V(105C)
C529	1-162-968-11	s	CAPACITOR,CERAMIC 4700PF/50V B
C530	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F

(SV-212 BOARD(DSR-2000/2000P))

Ref. No. or Q'ty	Part No.	SP	Description
C531	1-109-892-11	s	CAPACITOR ERECT 47MF/25V(105C)
C532	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C533	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C534	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C535	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C536	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C537	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C538	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C539	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C540	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C541	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C542	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C543	1-162-970-11	s	CAPACITOR CERAMIC 0.01MF/25V B
C544	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C545	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C546	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C547	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C548	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C549	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C550	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C552	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C553	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C554	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C555	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C556	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C559	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C565	1-162-970-11	s	CAPACITOR CERAMIC 0.01MF/25V B
C566	1-162-967-11	s	CAPACITOR,CERAMIC 3300PF/50V B
C567	1-162-970-11	s	CAPACITOR CERAMIC 0.01MF/25V B
C568	1-162-967-11	s	CAPACITOR,CERAMIC 3300PF/50V B
C569	1-162-970-11	s	CAPACITOR CERAMIC 0.01MF/25V B
C570	1-162-967-11	s	CAPACITOR,CERAMIC 3300PF/50V B
C571	1-162-970-11	s	CAPACITOR CERAMIC 0.01MF/25V B
C572	1-162-967-11	s	CAPACITOR,CERAMIC 3300PF/50V B
C573	1-162-970-11	s	CAPACITOR CERAMIC 0.01MF/25V B
C574	1-162-967-11	s	CAPACITOR,CERAMIC 3300PF/50V B
C575	1-162-970-11	s	CAPACITOR CERAMIC 0.01MF/25V B
C576	1-162-967-11	s	CAPACITOR,CERAMIC 3300PF/50V B
C577	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C578	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C579	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C650	1-162-968-11	s	CAPACITOR,CERAMIC 4700PF/50V B
C651	1-162-968-11	s	CAPACITOR,CERAMIC 4700PF/50V B
C652	1-162-968-11	s	CAPACITOR,CERAMIC 4700PF/50V B
C653	1-162-964-11	s	CAPACITOR,CERAMIC 1000PF/50V B
C654	1-165-176-11	s	CAPACITOR,CERAMIC 47000PF/16V
C655	1-162-968-11	s	CAPACITOR,CERAMIC 4700PF/50V B
C656	1-164-315-11	s	CAPACITOR,CERAMIC 470PF/50V CH
C657	1-162-922-11	s	CAPACITOR,CERAMIC 39PF/50V CH
C658	1-162-922-11	s	CAPACITOR,CERAMIC 39PF/50V CH
C659	1-162-922-11	s	CAPACITOR,CERAMIC 39PF/50V CH
C660	1-162-922-11	s	CAPACITOR,CERAMIC 39PF/50V CH
C661	1-162-922-11	s	CAPACITOR,CERAMIC 39PF/50V CH
C662	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C663	1-165-176-11	s	CAPACITOR,CERAMIC 47000PF/16V
C664	1-165-176-11	s	CAPACITOR,CERAMIC 47000PF/16V
C665	1-162-967-11	s	CAPACITOR,CERAMIC 3300PF/50V B
C666	1-162-967-11	s	CAPACITOR,CERAMIC 3300PF/50V B
C667	1-162-969-11	s	CAPACITOR,CERAMIC 6800PF/25V B

(SV-212 BOARD(DSR-2000/2000P))

Ref. No. or Q'ty	Part No.	SP	Description
C668	1-162-969-11	s	CAPACITOR,CERAMIC 6800PF/25V B
C669	1-162-967-11	s	CAPACITOR,CERAMIC 3300PF/50V B
C670	1-162-967-11	s	CAPACITOR,CERAMIC 3300PF/50V B
C671	1-162-970-11	s	CAPACITOR CERAMIC 0.01MF/25V B
C672	1-162-967-11	s	CAPACITOR,CERAMIC 3300PF/50V B
C673	1-162-967-11	s	CAPACITOR,CERAMIC 3300PF/50V B
C674	1-162-970-11	s	CAPACITOR CERAMIC 0.01MF/25V B
C675	1-109-892-11	s	CAPACITOR ERECT 47MF/25V(105C)
C676	1-109-892-11	s	CAPACITOR ERECT 47MF/25V(105C)
C677	1-162-964-11	s	CAPACITOR,CERAMIC 1000PF/50V B
C678	1-162-964-11	s	CAPACITOR,CERAMIC 1000PF/50V B
C679	1-162-967-11	s	CAPACITOR,CERAMIC 3300PF/50V B
C680	1-162-967-11	s	CAPACITOR,CERAMIC 3300PF/50V B
C681	1-162-968-11	s	CAPACITOR,CERAMIC 4700PF/50V B
C682	1-162-968-11	s	CAPACITOR,CERAMIC 4700PF/50V B
C683	1-109-892-11	s	CAPACITOR ERECT 47MF/25V(105C)
C684	1-109-892-11	s	CAPACITOR ERECT 47MF/25V(105C)
C685	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C686	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C687	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C688	1-115-340-11	s	CAPACITOR CERAMIC 0.22MF/25V B
C689	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C690	1-115-340-11	s	CAPACITOR CERAMIC 0.22MF/25V B
C691	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C694	1-165-176-11	s	CAPACITOR,CERAMIC 47000PF/16V
C695	1-126-402-11	s	CAPACITOR, ELECT 2.2MF/50V
C696	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C697	1-165-176-11	s	CAPACITOR,CERAMIC 47000PF/16V
C698	1-126-402-11	s	CAPACITOR, ELECT 2.2MF/50V
C699	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C700	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C701	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C706	1-165-176-11	s	CAPACITOR,CERAMIC 47000PF/16V
C707	1-126-402-11	s	CAPACITOR, ELECT 2.2MF/50V
C708	1-165-176-11	s	CAPACITOR,CERAMIC 47000PF/16V
C709	1-126-402-11	s	CAPACITOR, ELECT 2.2MF/50V
C710	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C711	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C712	1-165-176-11	s	CAPACITOR,CERAMIC 47000PF/16V
C713	1-126-402-11	s	CAPACITOR, ELECT 2.2MF/50V
C714	1-162-970-11	s	CAPACITOR CERAMIC 0.01MF/25V B
C715	1-165-176-11	s	CAPACITOR,CERAMIC 47000PF/16V
C716	1-126-402-11	s	CAPACITOR, ELECT 2.2MF/50V
C717	1-162-970-11	s	CAPACITOR CERAMIC 0.01MF/25V B
C718	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C719	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C720	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C722	1-164-677-11	s	CAPACITOR,CERAMIC 0.033M/16V(B)
C723	1-164-677-11	s	CAPACITOR,CERAMIC 0.033M/16V(B)
C724	1-164-677-11	s	CAPACITOR,CERAMIC 0.033M/16V(B)
C725	1-164-677-11	s	CAPACITOR,CERAMIC 0.033M/16V(B)
C726	1-164-677-11	s	CAPACITOR,CERAMIC 0.033M/16V(B)
C727	1-164-677-11	s	CAPACITOR,CERAMIC 0.033M/16V(B)
C728	1-162-968-11	s	CAPACITOR,CERAMIC 4700PF/50V B
C729	1-162-968-11	s	CAPACITOR,CERAMIC 4700PF/50V B
C730	1-162-968-11	s	CAPACITOR,CERAMIC 4700PF/50V B
C731	1-162-968-11	s	CAPACITOR,CERAMIC 4700PF/50V B
C732	1-162-968-11	s	CAPACITOR,CERAMIC 4700PF/50V B
C733	1-162-968-11	s	CAPACITOR,CERAMIC 4700PF/50V B

(SV-212 BOARD(DSR-2000/2000P))

Ref. No. or Q'ty	Part No.	SP	Description
C734	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C735	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C736	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C737	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C738	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C739	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C740	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C741	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C742	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C743	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C744	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C801	1-126-397-11	s	CAPACITOR ELECT 33MF/25V(CHIP)
C802	1-126-395-11	s	CAPACITOR,ELECT 22MF/16V(CHIP)
C803	1-126-394-11	s	CAPACITOR,ELECT 10MF/16V(CHIP)
C804	1-126-395-11	s	CAPACITOR,ELECT 22MF/16V(CHIP)
C805	1-126-394-11	s	CAPACITOR,ELECT 10MF/16V(CHIP)
C806	1-126-395-11	s	CAPACITOR,ELECT 22MF/16V(CHIP)
C807	1-162-970-11	s	CAPACITOR CERAMIC 0.01MF/25V B
C808	1-162-967-11	s	CAPACITOR,CERAMIC 3300PF/50V B
C809	1-162-967-11	s	CAPACITOR,CERAMIC 3300PF/50V B
C810	1-162-967-11	s	CAPACITOR,CERAMIC 3300PF/50V B
C811	1-162-967-11	s	CAPACITOR,CERAMIC 3300PF/50V B
C812	1-107-778-11	s	CAPACITOR,ELECT 470MF/16V CHIP
C815	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C816	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C818	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C819	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C820	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C821	1-162-969-11	s	CAPACITOR,CERAMIC 6800PF/25V B
C822	1-162-969-11	s	CAPACITOR,CERAMIC 6800PF/25V B
C823	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C824	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C825	1-107-778-11	s	CAPACITOR,ELECT 470MF/16V CHIP
C826	1-107-778-11	s	CAPACITOR,ELECT 470MF/16V CHIP
C827	1-107-778-11	s	CAPACITOR,ELECT 470MF/16V CHIP
C828	1-107-778-11	s	CAPACITOR,ELECT 470MF/16V CHIP
C829	1-107-778-11	s	CAPACITOR,ELECT 470MF/16V CHIP
C830	1-107-778-11	s	CAPACITOR,ELECT 470MF/16V CHIP
C831	1-107-778-11	s	CAPACITOR,ELECT 470MF/16V CHIP
C832	1-107-778-11	s	CAPACITOR,ELECT 470MF/16V CHIP
C833	1-107-778-11	s	CAPACITOR,ELECT 470MF/16V CHIP
C834	1-107-778-11	s	CAPACITOR,ELECT 470MF/16V CHIP
C835	1-107-778-11	s	CAPACITOR,ELECT 470MF/16V CHIP
C836	1-107-778-11	s	CAPACITOR,ELECT 470MF/16V CHIP
CN1	1-569-775-21	o	PIN, CONNECTOR 5P
CN2	1-770-677-11	o	CONNECTOR,BOARD TO BOARD 50P
CN114	1-778-262-12	o	CONNECTOR, BOARD TO BOARD 148P
D101	8-719-941-23	s	DIODE DA204U
D102	8-719-941-86	s	DIODE DAN202U
D103	8-719-941-09	s	DIODE DAP202U
D401	8-719-941-86	s	DIODE DAN202U
D402	8-719-941-86	s	DIODE DAN202U
D403	8-719-941-86	s	DIODE DAN202U
D404	8-719-941-86	s	DIODE DAN202U
D405	8-719-941-09	s	DIODE DAP202U
D406	8-719-941-09	s	DIODE DAP202U
D407	8-719-941-09	s	DIODE DAP202U
D408	8-719-941-09	s	DIODE DAP202U

(SV-212 BOARD(DSR-2000/2000P))

Ref. No. or Q'ty	Part No.	SP	Description	
D409	8-719-941-86	s	DIODE DAN202U	
D410	8-719-941-86	s	DIODE DAN202U	
D411	8-719-941-86	s	DIODE DAN202U	
D412	8-719-941-86	s	DIODE DAN202U	
D413	8-719-941-09	s	DIODE DAP202U	
D414	8-719-941-09	s	DIODE DAP202U	
D415	8-719-941-09	s	DIODE DAP202U	
D416	8-719-941-09	s	DIODE DAP202U	
D417	8-719-941-86	s	DIODE DAN202U	
D418	8-719-941-86	s	DIODE DAN202U	
D419	8-719-941-86	s	DIODE DAN202U	
D420	8-719-941-86	s	DIODE DAN202U	
D421	8-719-941-09	s	DIODE DAP202U	
D422	8-719-941-09	s	DIODE DAP202U	
D423	8-719-941-09	s	DIODE DAP202U	
D424	8-719-941-09	s	DIODE DAP202U	
D425	8-719-941-86	s	DIODE DAN202U	
D426	8-719-941-86	s	DIODE DAN202U	
D427	8-719-941-86	s	DIODE DAN202U	
D428	8-719-941-86	s	DIODE DAN202U	
D429	8-719-941-09	s	DIODE DAP202U	
D430	8-719-941-09	s	DIODE DAP202U	
D431	8-719-941-09	s	DIODE DAP202U	
D432	8-719-941-09	s	DIODE DAP202U	
D500	8-719-980-38	s	DIODE SB07-03C	(RECTI)
D501	8-719-941-09	s	DIODE DAP202U	
D502	8-719-048-43	s	DIODE MA795	
D503	8-719-980-38	s	DIODE SB07-03C	(RECTI)
D504	8-719-980-38	s	DIODE SB07-03C	(RECTI)
D505	8-719-980-38	s	DIODE SB07-03C	(RECTI)
D650	8-719-048-43	s	DIODE MA795	
D651	8-719-980-38	s	DIODE SB07-03C	(RECTI)
D652	8-719-980-38	s	DIODE SB07-03C	(RECTI)
D653	8-719-980-38	s	DIODE SB07-03C	(RECTI)
D654	8-719-980-38	s	DIODE SB07-03C	(RECTI)
D655	8-719-980-38	s	DIODE SB07-03C	(RECTI)
D656	8-719-980-38	s	DIODE SB07-03C	(RECTI)
D657	8-719-980-38	s	DIODE SB07-03C	(RECTI)
D658	8-719-980-38	s	DIODE SB07-03C	(RECTI)
D659	8-719-980-38	s	DIODE SB07-03C	(RECTI)
D660	8-719-980-38	s	DIODE SB07-03C	(RECTI)
D661	8-719-980-38	s	DIODE SB07-03C	(RECTI)
D662	8-719-980-38	s	DIODE SB07-03C	(RECTI)
D663	8-719-980-38	s	DIODE SB07-03C	(RECTI)
D664	8-719-980-38	s	DIODE SB07-03C	(RECTI)
D701	8-719-105-28	s	DIODE RD2.4M-B	
D702	8-719-105-28	s	DIODE RD2.4M-B	
D703	8-719-053-18	s	DIODE 1SR154-400TE-25	
D801	8-719-941-86	s	DIODE DAN202U	
D802	8-719-941-86	s	DIODE DAN202U	
D803	8-719-048-98	s	DIODE RB160L-40TE25	
D804	8-719-048-98	s	DIODE RB160L-40TE25	
D805	8-719-048-98	s	DIODE RB160L-40TE25	
D806	8-719-106-44	s	DIODE RD9.1M-B2	
D807	8-719-941-86	s	DIODE DAN202U	
D808	8-719-941-86	s	DIODE DAN202U	
D810	8-719-048-98	s	DIODE RB160L-40TE25	
D811	8-719-048-98	s	DIODE RB160L-40TE25	
D812	8-719-048-98	s	DIODE RB160L-40TE25	

(SV-212 BOARD(DSR-2000/2000P))

Ref. No. or Q'ty	Part No.	SP	Description
D813	8-719-048-98	s	DIODE RB160L-40TE25
D814	8-719-106-44	s	DIODE RD9.1M-B2
D815	8-719-048-98	s	DIODE RB160L-40TE25
D816	8-719-048-98	s	DIODE RB160L-40TE25
D818	8-719-048-98	s	DIODE RB160L-40TE25
F1	⚠ 1-576-401-21	s	FUSE (SMD)
F2	⚠ 1-576-401-21	s	FUSE (SMD)
IC101	8-759-278-58	s	IC NJM4558V (TE2)
IC102	8-759-491-50	s	IC TC74VHCT244AFT(EL)
IC103	8-759-523-79	s	IC TC74VHC02FT
IC104	8-759-523-84	s	IC TC74VHC14FT (EL)
IC105	8-759-510-71	s	IC BA10358F-E2
IC106	8-759-523-93	s	IC TC74VHC27FT (EL)
IC107	8-759-523-84	s	IC TC74VHC14FT (EL)
IC108	8-759-491-46	s	IC TC74VHCT04AFT (EL)
IC109	8-759-523-93	s	IC TC74VHC27FT (EL)
IC111	8-759-523-81	s	IC TC74VHC08FT(EL)
IC112	8-759-523-94	s	IC TC74VHC32FT(EL)
IC114	8-759-523-83	s	IC TC74VHC11FT(EL)
IC116	8-759-523-82	s	IC TC74VHC10FT (EL)
IC118	8-759-497-29	s	IC LC35256DM-70-TLM
IC119	8-759-537-83	s	IC MBM29F400BC-70PFTN
IC120	8-759-497-29	s	IC LC35256DM-70-TLM
IC121	8-759-523-83	s	IC TC74VHC11FT(EL)
IC123	8-759-348-69	s	IC HD6415108RF10
IC128	8-759-524-28	s	IC TC74VHC245FT(EL)
IC129	8-759-524-28	s	IC TC74VHC245FT(EL)
IC130	8-759-524-28	s	IC TC74VHC245FT(EL)
IC200	8-759-523-02	s	IC TC74HC4053AFT(EL)
IC204	8-759-524-07	s	IC TC74VHC138FT(EL)
IC205	8-752-343-05	s	IC CXD2202Q
IC206	8-759-497-29	s	IC LC35256DM-70-TLM
IC207	8-759-175-56	s	IC CXD8804Q
IC209	8-759-175-56	s	IC CXD8804Q
IC210	8-759-497-29	s	IC LC35256DM-70-TLM
IC211	8-759-491-50	s	IC TC74VHCT244AFT(EL)
IC213	8-759-524-50	s	IC TC74VHC541FT(EL)
IC214	8-759-523-84	s	IC TC74VHC14FT (EL)
IC215	8-759-524-50	s	IC TC74VHC541FT(EL)
IC301	8-752-903-83	s	IC CXP912032-206Q
IC302	8-759-338-95	s	IC NJM2903V (TE2)
IC303	8-759-198-61	s	IC S-80727SL-AQ-T1
IC304	8-759-196-96	s	IC TC7SH08FU (TE85R)
IC305	8-759-058-58	s	IC TC7S04FU-TE85R
IC401	8-759-523-01	s	IC TC74HC4052AFT(EL)
IC402	8-759-523-01	s	IC TC74HC4052AFT(EL)
IC403	8-759-523-01	s	IC TC74HC4052AFT(EL)
IC404	8-759-523-01	s	IC TC74HC4052AFT(EL)
IC501	8-759-064-36	s	IC MB88346BPFV
IC502	8-759-338-95	s	IC NJM2903V (TE2)
IC503	8-759-466-53	s	IC NJM2060V(TE2)
IC504	8-759-510-71	s	IC BA10358F-E2
IC505	8-759-523-02	s	IC TC74HC4053AFT(EL)
IC506	8-759-273-87	s	IC NJM2901V (TE2)
IC508	8-759-523-96	s	IC TC74VHC86FT (EL)
IC510	8-759-273-87	s	IC NJM2901V (TE2)
IC511	8-759-444-87	s	IC NJM324V (TE2)
IC512	8-759-399-64	s	IC LB1857M-TE-L

(SV-212 BOARD(DSR-2000/2000P))

Ref. No. or Q'ty	Part No.	SP	Description
IC513	8-759-399-64	s	IC LB1857M-TE-L
IC514	8-759-510-71	s	IC BA10358F-E2
IC515	8-759-510-71	s	IC BA10358F-E2
IC650	8-759-523-02	s	IC TC74HC4053AFT(EL)
IC651	8-759-338-95	s	IC NJM2903V (TE2)
IC652	8-759-466-53	s	IC NJM2060V(TE2)
IC653	8-759-523-02	s	IC TC74HC4053AFT(EL)
IC654	8-759-444-87	s	IC NJM324V (TE2)
IC655	8-759-273-87	s	IC NJM2901V (TE2)
IC660	8-759-444-87	s	IC NJM324V (TE2)
IC663	8-759-559-74	s	IC AN3834S
IC664	8-759-559-74	s	IC AN3834S
IC665	8-759-276-89	s	IC BA6285FP (E2)
IC666	8-759-444-87	s	IC NJM324V (TE2)
IC667	8-759-444-87	s	IC NJM324V (TE2)
IC801	8-759-442-54	s	IC RH5RL50AA-T1
IC805	8-759-276-89	s	IC BA6285FP (E2)
IC806	8-759-276-89	s	IC BA6285FP (E2)
IC807	8-759-491-50	s	IC TC74VHCT244AFT(EL)
L500	1-414-696-21	s	INDUCTOR (POWER) 330UH
L501	1-414-696-21	s	INDUCTOR (POWER) 330UH
L650	1-414-696-21	s	INDUCTOR (POWER) 330UH
L651	1-414-696-21	s	INDUCTOR (POWER) 330UH
L801	1-406-824-11	s	COIL, CHOKE 22UH
L802	1-406-824-11	s	COIL, CHOKE 22UH
L803	1-406-824-11	s	COIL, CHOKE 22UH
L804	1-406-824-11	s	COIL, CHOKE 22UH
PS802	⚠ 1-576-123-21	s	CIRCUIT PROTECTOR 0.8A(IC LINK)
PS803	⚠ 1-576-123-21	s	CIRCUIT PROTECTOR 0.8A(IC LINK)
PS804	⚠ 1-576-123-21	s	CIRCUIT PROTECTOR 0.8A(IC LINK)
PS805	⚠ 1-576-123-21	s	CIRCUIT PROTECTOR 0.8A(IC LINK)
Q401	8-729-907-00	s	TRANSISTOR DTC114EU
Q500	8-729-930-44	s	TRANSISTOR UMY1-TR
Q501	6-550-001-01	s	TRANSISTOR UMH11NTN
Q502	8-729-930-44	s	TRANSISTOR UMY1-TR
Q650	6-550-001-01	s	TRANSISTOR UMH11NTN
Q651	6-550-001-01	s	TRANSISTOR UMH11NTN
Q652	8-729-930-44	s	TRANSISTOR UMY1-TR
Q653	8-729-930-44	s	TRANSISTOR UMY1-TR
Q654	8-729-047-61	s	TRANSISTOR SI4925DY-T1
Q655	8-729-047-61	s	TRANSISTOR SI4925DY-T1
Q801	8-729-930-13	s	TRANSISTOR UMH2
Q802	8-729-930-44	s	TRANSISTOR UMY1-TR
Q803	8-729-034-98	s	TRANSISTOR SI9434DY-T1
Q804	8-729-028-91	s	TRANSISTOR DTA144EUA-T106
Q805	8-729-029-14	s	TRANSISTOR DTC144EUA-T106
Q806	8-729-927-59	s	TRANSISTOR UMZ1
Q807	8-729-927-59	s	TRANSISTOR UMZ1
Q808	8-729-024-50	s	TRANSISTOR SI9936DY
Q809	8-729-024-50	s	TRANSISTOR SI9936DY
Q810	8-729-024-50	s	TRANSISTOR SI9936DY
Q811	8-729-024-50	s	TRANSISTOR SI9936DY
Q812	8-729-034-98	s	TRANSISTOR SI9434DY-T1
Q813	8-729-202-05	s	TRANSISTOR 2SC2873-O
Q814	8-729-202-05	s	TRANSISTOR 2SC2873-O
R104	1-216-841-11	s	RESISTOR, CHIP 47K 1/16W 1608
R105	1-216-845-11	s	RESISTOR,CHIP 100K 1/16W(1608)
R106	1-218-871-11	s	RESISTOR,CHIP 10K 1/16W (1608)

Ref. No. or Q'ty	Part No.	SP	Description
R107	1-218-871-11	s	RESISTOR,CHIP 10K 1/16W (1608)
R108	1-216-839-11	s	RESISTOR,CHIP 33K 1/16W 1608
R109	1-218-881-11	s	RESISTOR, CHIP 27K 1/16W(1608)
R110	1-216-839-11	s	RESISTOR,CHIP 33K 1/16W 1608
R111	1-218-881-11	s	RESISTOR, CHIP 27K 1/16W(1608)
R112	1-216-839-11	s	RESISTOR,CHIP 33K 1/16W 1608
R113	1-216-845-11	s	RESISTOR,CHIP 100K 1/16W(1608)
R114	1-216-845-11	s	RESISTOR,CHIP 100K 1/16W(1608)
R115	1-216-817-11	s	RESISTOR,CHIP 470 1/16W 1608
R116	1-216-817-11	s	RESISTOR,CHIP 470 1/16W 1608
R117	1-216-809-11	s	RESISTOR,CHIP 100 1/16W 1608
R118	1-218-895-11	s	RESISTOR,CHIP 100K 1/16W(1608)
R119	1-218-891-11	s	RESISTOR,CHIP 68K 1/16W (1608)
R120	1-216-845-11	s	RESISTOR,CHIP 100K 1/16W(1608)
R121	1-216-841-11	s	RESISTOR, CHIP 47K 1/16W 1608
R122	1-216-805-11	s	RESISTOR,CHIP 47 1/16W 1608
R124	1-216-837-11	s	RESISTOR,CHIP 22K 1/16W 1608
R125	1-216-837-11	s	RESISTOR,CHIP 22K 1/16W 1608
R126	1-218-883-11	s	RESISTOR,CHIP 33K 1/16W (1608)
R127	1-216-841-11	s	RESISTOR, CHIP 47K 1/16W 1608
R128	1-216-849-11	s	RESISTOR,CHIP 220K 1/16W 1608
R129	1-216-809-11	s	RESISTOR,CHIP 100 1/16W 1608
R130	1-216-821-11	s	RESISTOR,CHIP 1.0K 1/16W(1608)
R131	1-216-837-11	s	RESISTOR,CHIP 22K 1/16W 1608
R132	1-218-907-11	s	RESISTOR,CHIP 330K 1/16W(1608)
R135	1-216-833-11	s	RESISTOR,CHIP 10K 1/16W 1608
R136	1-216-849-11	s	RESISTOR,CHIP 220K 1/16W 1608
R137	1-216-821-11	s	RESISTOR,CHIP 1.0K 1/16W(1608)
R138	1-216-809-11	s	RESISTOR,CHIP 100 1/16W 1608
R139	1-216-833-11	s	RESISTOR,CHIP 10K 1/16W 1608
R140	1-216-833-11	s	RESISTOR,CHIP 10K 1/16W 1608
R141	1-216-821-11	s	RESISTOR,CHIP 1.0K 1/16W(1608)
R148	1-216-821-11	s	RESISTOR,CHIP 1.0K 1/16W(1608)
R149	1-216-805-11	s	RESISTOR,CHIP 47 1/16W 1608
R150	1-216-805-11	s	RESISTOR,CHIP 47 1/16W 1608
R151	1-216-849-11	s	RESISTOR,CHIP 220K 1/16W 1608
R152	1-216-849-11	s	RESISTOR,CHIP 220K 1/16W 1608
R154	1-216-829-11	s	RESISTOR, CHIP 4.7K 1/16W 1608
R155	1-216-829-11	s	RESISTOR, CHIP 4.7K 1/16W 1608
R157	1-216-821-11	s	RESISTOR,CHIP 1.0K 1/16W(1608)
R158	1-216-845-11	s	RESISTOR,CHIP 100K 1/16W(1608)
R159	1-216-821-11	s	RESISTOR,CHIP 1.0K 1/16W(1608)
R160	1-216-821-11	s	RESISTOR,CHIP 1.0K 1/16W(1608)
R161	1-216-841-11	s	RESISTOR, CHIP 47K 1/16W 1608
R162	1-216-845-11	s	RESISTOR,CHIP 100K 1/16W(1608)
R163	1-216-845-11	s	RESISTOR,CHIP 100K 1/16W(1608)
R164	1-216-845-11	s	RESISTOR,CHIP 100K 1/16W(1608)
R165	1-216-849-11	s	RESISTOR,CHIP 220K 1/16W 1608
R166	1-216-841-11	s	RESISTOR, CHIP 47K 1/16W 1608
R167	1-216-841-11	s	RESISTOR, CHIP 47K 1/16W 1608
R168	1-216-805-11	s	RESISTOR,CHIP 47 1/16W 1608
R169	1-216-805-11	s	RESISTOR,CHIP 47 1/16W 1608
R170	1-216-805-11	s	RESISTOR,CHIP 47 1/16W 1608
R171	1-216-864-11	s	RESISTOR,CHIP 0 1/16W (1608)
R172	1-216-805-11	s	RESISTOR,CHIP 47 1/16W 1608
R173	1-216-840-11	s	RESISTOR,CHIP 39K 1/16W 1608
R175	1-216-833-11	s	RESISTOR,CHIP 10K 1/16W 1608
R176	1-218-903-11	s	RESISTOR,CHIP 220K 1/16W(1608)
R177	1-218-871-11	s	RESISTOR,CHIP 10K 1/16W (1608)

(SV-212 BOARD(DSR-2000/2000P))

Ref. No. or Q'ty	Part No.	SP	Description
R178	1-218-883-11	s	RESISTOR,CHIP 33K 1/16W (1608)
R179	1-218-891-11	s	RESISTOR,CHIP 68K 1/16W (1608)
R180	1-218-871-11	s	RESISTOR,CHIP 10K 1/16W (1608)
R201	1-216-838-11	s	RESISTOR CHIP 27K 1/16W(1608)
R202	1-216-845-11	s	RESISTOR,CHIP 100K 1/16W(1608)
R203	1-216-845-11	s	RESISTOR,CHIP 100K 1/16W(1608)
R204	1-216-845-11	s	RESISTOR,CHIP 100K 1/16W(1608)
R205	1-216-817-11	s	RESISTOR,CHIP 470 1/16W 1608
R206	1-216-845-11	s	RESISTOR,CHIP 100K 1/16W(1608)
R207	1-216-845-11	s	RESISTOR,CHIP 100K 1/16W(1608)
R208	1-216-845-11	s	RESISTOR,CHIP 100K 1/16W(1608)
R209	1-216-845-11	s	RESISTOR,CHIP 100K 1/16W(1608)
R210	1-216-845-11	s	RESISTOR,CHIP 100K 1/16W(1608)
R211	1-216-849-11	s	RESISTOR,CHIP 220K 1/16W 1608
R212	1-216-815-11	s	RESISTOR,CHIP 330 1/16W 1608
R213	1-216-849-11	s	RESISTOR,CHIP 220K 1/16W 1608
R217	1-216-845-11	s	RESISTOR,CHIP 100K 1/16W(1608)
R218	1-216-845-11	s	RESISTOR,CHIP 100K 1/16W(1608)
R219	1-216-809-11	s	RESISTOR,CHIP 100 1/16W 1608
R220	1-216-805-11	s	RESISTOR,CHIP 47 1/16W 1608
R221	1-216-837-11	s	RESISTOR,CHIP 22K 1/16W 1608
R226	1-216-864-11	s	RESISTOR,CHIP 0 1/16W (1608)
R229	1-216-805-11	s	RESISTOR,CHIP 47 1/16W 1608
R230	1-216-809-11	s	RESISTOR,CHIP 100 1/16W 1608
R231	1-216-837-11	s	RESISTOR,CHIP 22K 1/16W 1608
R234	1-216-805-11	s	RESISTOR,CHIP 47 1/16W 1608
R235	1-216-845-11	s	RESISTOR,CHIP 100K 1/16W(1608)
R301	1-216-817-11	s	RESISTOR,CHIP 470 1/16W 1608
R302	1-216-817-11	s	RESISTOR,CHIP 470 1/16W 1608
R303	1-218-863-11	s	RESISTOR,CHIP 4.7K 1/16W(1608)
R304	1-218-843-11	s	RESISTOR,CHIP 680 1/16W (1608)
R305	1-218-863-11	s	RESISTOR,CHIP 4.7K 1/16W(1608)
R306	1-216-827-11	s	RESISTOR, CHIP 3.3K 1/16W 1608
R307	1-216-827-11	s	RESISTOR, CHIP 3.3K 1/16W 1608
R308	1-216-845-11	s	RESISTOR,CHIP 100K 1/16W(1608)
R309	1-216-845-11	s	RESISTOR,CHIP 100K 1/16W(1608)
R310	1-216-837-11	s	RESISTOR,CHIP 22K 1/16W 1608
R311	1-216-833-11	s	RESISTOR,CHIP 10K 1/16W 1608
R312	1-216-833-11	s	RESISTOR,CHIP 10K 1/16W 1608
R313	1-216-833-11	s	RESISTOR,CHIP 10K 1/16W 1608
R314	1-216-809-11	s	RESISTOR,CHIP 100 1/16W 1608
R315	1-216-857-11	s	RESISTOR, CHIP 1.0M 1/16W 1608
R316	1-216-849-11	s	RESISTOR,CHIP 220K 1/16W 1608
R317	1-216-809-11	s	RESISTOR,CHIP 100 1/16W 1608
R318	1-216-845-11	s	RESISTOR,CHIP 100K 1/16W(1608)
R319	1-216-845-11	s	RESISTOR,CHIP 100K 1/16W(1608)
R324	1-216-845-11	s	RESISTOR,CHIP 100K 1/16W(1608)
R325	1-216-837-11	s	RESISTOR,CHIP 22K 1/16W 1608
R328	1-216-837-11	s	RESISTOR,CHIP 22K 1/16W 1608
R402	1-216-817-11	s	RESISTOR,CHIP 470 1/16W 1608
R403	1-216-841-11	s	RESISTOR, CHIP 47K 1/16W 1608
R404	1-216-849-11	s	RESISTOR,CHIP 220K 1/16W 1608
R405	1-216-808-11	s	RESISTOR,CHIP 82 1/16W 1608
R406	1-216-817-11	s	RESISTOR,CHIP 470 1/16W 1608
R407	1-218-859-11	s	RESISTOR,CHIP 3.3K 1/16W(1608)
R408	1-218-847-11	s	RESISTOR, CHIP 1K 1/16W (1608)
R409	1-216-817-11	s	RESISTOR,CHIP 470 1/16W 1608
R410	1-216-841-11	s	RESISTOR, CHIP 47K 1/16W 1608
R411	1-218-882-11	s	RESISTOR, CHIP 30K 1/16W(1608)

(SV-212 BOARD(DSR-2000/2000P))

Ref. No. or Q'ty	Part No.	SP	Description
R412	1-216-833-11	s	RESISTOR,CHIP 10K 1/16W 1608
R413	1-216-841-11	s	RESISTOR, CHIP 47K 1/16W 1608
R414	1-216-817-11	s	RESISTOR,CHIP 470 1/16W 1608
R415	1-216-841-11	s	RESISTOR, CHIP 47K 1/16W 1608
R416	1-216-841-11	s	RESISTOR, CHIP 47K 1/16W 1608
R500	1-216-833-11	s	RESISTOR,CHIP 10K 1/16W 1608
R501	1-216-849-11	s	RESISTOR,CHIP 220K 1/16W 1608
R502	1-216-849-11	s	RESISTOR,CHIP 220K 1/16W 1608
R503	1-218-891-11	s	RESISTOR,CHIP 68K 1/16W (1608)
R504	1-218-891-11	s	RESISTOR,CHIP 68K 1/16W (1608)
R505	1-216-833-11	s	RESISTOR,CHIP 10K 1/16W 1608
R506	1-216-833-11	s	RESISTOR,CHIP 10K 1/16W 1608
R507	1-216-833-11	s	RESISTOR,CHIP 10K 1/16W 1608
R508	1-216-853-11	s	RESISTOR,CHIP 470K 1/16W(1608)
R509	1-218-891-11	s	RESISTOR,CHIP 68K 1/16W (1608)
R510	1-218-891-11	s	RESISTOR,CHIP 68K 1/16W (1608)
R511	1-218-891-11	s	RESISTOR,CHIP 68K 1/16W (1608)
R512	1-218-891-11	s	RESISTOR,CHIP 68K 1/16W (1608)
R513	1-216-841-11	s	RESISTOR, CHIP 47K 1/16W 1608
R514	1-216-839-11	s	RESISTOR,CHIP 33K 1/16W 1608
R515	1-216-826-11	s	RESISTOR,CHIP 2.7K 1/16W 1608
R516	1-218-907-11	s	RESISTOR,CHIP 330K 1/16W(1608)
R517	1-218-903-11	s	RESISTOR,CHIP 220K 1/16W(1608)
R518	1-216-821-11	s	RESISTOR,CHIP 1.0K 1/16W(1608)
R519	1-216-839-11	s	RESISTOR,CHIP 33K 1/16W 1608
R520	1-216-825-11	s	RESISTOR,CHIP 2.2K 1/16W 1608
R521	1-216-845-11	s	RESISTOR,CHIP 100K 1/16W(1608)
R522	1-216-845-11	s	RESISTOR,CHIP 100K 1/16W(1608)
R523	1-216-837-11	s	RESISTOR,CHIP 22K 1/16W 1608
R524	1-216-837-11	s	RESISTOR,CHIP 22K 1/16W 1608
R525	1-216-833-11	s	RESISTOR,CHIP 10K 1/16W 1608
R526	1-216-833-11	s	RESISTOR,CHIP 10K 1/16W 1608
R527	1-216-833-11	s	RESISTOR,CHIP 10K 1/16W 1608
R528	1-216-833-11	s	RESISTOR,CHIP 10K 1/16W 1608
R529	1-216-833-11	s	RESISTOR,CHIP 10K 1/16W 1608
R530	1-216-833-11	s	RESISTOR,CHIP 10K 1/16W 1608
R531	1-216-853-11	s	RESISTOR,CHIP 470K 1/16W(1608)
R532	1-216-837-11	s	RESISTOR,CHIP 22K 1/16W 1608
R533	1-216-853-11	s	RESISTOR,CHIP 470K 1/16W(1608)
R534	1-216-853-11	s	RESISTOR,CHIP 470K 1/16W(1608)
R535	1-216-839-11	s	RESISTOR,CHIP 33K 1/16W 1608
R536	1-216-839-11	s	RESISTOR,CHIP 33K 1/16W 1608
R537	1-216-839-11	s	RESISTOR,CHIP 33K 1/16W 1608
R538	1-216-839-11	s	RESISTOR,CHIP 33K 1/16W 1608
R539	1-216-841-11	s	RESISTOR, CHIP 47K 1/16W 1608
R540	1-216-825-11	s	RESISTOR,CHIP 2.2K 1/16W 1608
R541	1-216-825-11	s	RESISTOR,CHIP 2.2K 1/16W 1608
R542	1-216-825-11	s	RESISTOR,CHIP 2.2K 1/16W 1608
R543	1-216-841-11	s	RESISTOR, CHIP 47K 1/16W 1608
R544	1-216-853-11	s	RESISTOR,CHIP 470K 1/16W(1608)
R545	1-216-837-11	s	RESISTOR,CHIP 22K 1/16W 1608
R546	1-216-837-11	s	RESISTOR,CHIP 22K 1/16W 1608
R547	1-216-837-11	s	RESISTOR,CHIP 22K 1/16W 1608
R548	1-216-837-11	s	RESISTOR,CHIP 22K 1/16W 1608
R549	1-216-845-11	s	RESISTOR,CHIP 100K 1/16W(1608)
R550	1-216-849-11	s	RESISTOR,CHIP 220K 1/16W 1608
R551	1-216-833-11	s	RESISTOR,CHIP 10K 1/16W 1608
R552	1-216-849-11	s	RESISTOR,CHIP 220K 1/16W 1608
R553	1-216-833-11	s	RESISTOR,CHIP 10K 1/16W 1608

(SV-212 BOARD(DSR-2000/2000P))

Ref. No. or Q'ty	Part No.	SP	Description
R554	1-216-853-11	s	RESISTOR,CHIP 470K 1/16W(1608)
R555	1-216-853-11	s	RESISTOR,CHIP 470K 1/16W(1608)
R556	1-216-840-11	s	RESISTOR,CHIP 39K 1/16W 1608
R557	1-216-837-11	s	RESISTOR,CHIP 22K 1/16W 1608
R558	1-216-840-11	s	RESISTOR,CHIP 39K 1/16W 1608
R559	1-216-837-11	s	RESISTOR,CHIP 22K 1/16W 1608
R560	1-216-829-11	s	RESISTOR, CHIP 4.7K 1/16W 1608
R561	1-216-829-11	s	RESISTOR, CHIP 4.7K 1/16W 1608
R562	1-216-854-11	s	RESISTOR, CHIP 560K 1/16W 1608
R563	1-216-831-11	s	RESISTOR,CHIP 6.8K 1/16W(1608)
R564	1-216-843-11	s	RESISTOR,CHIP 68K 1/16W (1608)
R565	1-216-831-11	s	RESISTOR,CHIP 6.8K 1/16W(1608)
R566	1-216-843-11	s	RESISTOR,CHIP 68K 1/16W (1608)
R567	1-216-829-11	s	RESISTOR, CHIP 4.7K 1/16W 1608
R568	1-216-829-11	s	RESISTOR, CHIP 4.7K 1/16W 1608
R569	1-216-829-11	s	RESISTOR, CHIP 4.7K 1/16W 1608
R570	1-216-841-11	s	RESISTOR, CHIP 47K 1/16W 1608
R571	1-216-845-11	s	RESISTOR,CHIP 100K 1/16W(1608)
R572	1-216-849-11	s	RESISTOR,CHIP 220K 1/16W 1608
R573	1-216-833-11	s	RESISTOR,CHIP 10K 1/16W 1608
R574	1-216-833-11	s	RESISTOR,CHIP 10K 1/16W 1608
R575	1-216-833-11	s	RESISTOR,CHIP 10K 1/16W 1608
R576	1-216-845-11	s	RESISTOR,CHIP 100K 1/16W(1608)
R577	1-216-839-11	s	RESISTOR,CHIP 33K 1/16W 1608
R578	1-216-809-11	s	RESISTOR,CHIP 100 1/16W 1608
R579	1-216-833-11	s	RESISTOR,CHIP 10K 1/16W 1608
R580	1-216-849-11	s	RESISTOR,CHIP 220K 1/16W 1608
R581	1-216-833-11	s	RESISTOR,CHIP 10K 1/16W 1608
R582	1-216-839-11	s	RESISTOR,CHIP 33K 1/16W 1608
R583	1-216-809-11	s	RESISTOR,CHIP 100 1/16W 1608
R584	1-216-821-11	s	RESISTOR,CHIP 1.0K 1/16W(1608)
R585	1-216-821-11	s	RESISTOR,CHIP 1.0K 1/16W(1608)
R586	1-216-833-11	s	RESISTOR,CHIP 10K 1/16W 1608
R587	1-216-849-11	s	RESISTOR,CHIP 220K 1/16W 1608
R588	1-211-737-11	s	RESISTOR 0.47 1/4W (3225)
R589	1-211-737-11	s	RESISTOR 0.47 1/4W (3225)
R590	1-216-849-11	s	RESISTOR,CHIP 220K 1/16W 1608
R591	1-216-841-11	s	RESISTOR, CHIP 47K 1/16W 1608
R592	1-216-841-11	s	RESISTOR, CHIP 47K 1/16W 1608
R593	1-216-833-11	s	RESISTOR,CHIP 10K 1/16W 1608
R594	1-211-737-11	s	RESISTOR 0.47 1/4W (3225)
R595	1-211-737-11	s	RESISTOR 0.47 1/4W (3225)
R596	1-216-842-11	s	RESISTOR,CHIP 56K 1/16W(1608)
R597	1-216-842-11	s	RESISTOR,CHIP 56K 1/16W(1608)
R650	1-216-842-11	s	RESISTOR,CHIP 56K 1/16W(1608)
R651	1-216-849-11	s	RESISTOR,CHIP 220K 1/16W 1608
R652	1-216-849-11	s	RESISTOR,CHIP 220K 1/16W 1608
R653	1-216-838-11	s	RESISTOR CHIP 27K 1/16W(1608)
R654	1-216-842-11	s	RESISTOR,CHIP 56K 1/16W(1608)
R655	1-216-829-11	s	RESISTOR, CHIP 4.7K 1/16W 1608
R656	1-216-833-11	s	RESISTOR,CHIP 10K 1/16W 1608
R657	1-216-833-11	s	RESISTOR,CHIP 10K 1/16W 1608
R658	1-216-853-11	s	RESISTOR,CHIP 470K 1/16W(1608)
R659	1-216-838-11	s	RESISTOR CHIP 27K 1/16W(1608)
R660	1-216-841-11	s	RESISTOR, CHIP 47K 1/16W 1608
R661	1-216-826-11	s	RESISTOR,CHIP 2.7K 1/16W 1608
R662	1-216-825-11	s	RESISTOR,CHIP 2.2K 1/16W 1608
R663	1-218-891-11	s	RESISTOR,CHIP 68K 1/16W (1608)
R664	1-218-891-11	s	RESISTOR,CHIP 68K 1/16W (1608)

Ref. No. or Q'ty	Part No.	SP	Description
R665	1-218-891-11	s	RESISTOR,CHIP 68K 1/16W (1608)
R666	1-218-891-11	s	RESISTOR,CHIP 68K 1/16W (1608)
R667	1-216-837-11	s	RESISTOR,CHIP 22K 1/16W 1608
R668	1-216-837-11	s	RESISTOR,CHIP 22K 1/16W 1608
R669	1-218-891-11	s	RESISTOR,CHIP 68K 1/16W (1608)
R670	1-218-891-11	s	RESISTOR,CHIP 68K 1/16W (1608)
R671	1-218-891-11	s	RESISTOR,CHIP 68K 1/16W (1608)
R672	1-218-891-11	s	RESISTOR,CHIP 68K 1/16W (1608)
R673	1-218-891-11	s	RESISTOR,CHIP 68K 1/16W (1608)
R674	1-218-891-11	s	RESISTOR,CHIP 68K 1/16W (1608)
R675	1-218-891-11	s	RESISTOR,CHIP 68K 1/16W (1608)
R676	1-218-891-11	s	RESISTOR,CHIP 68K 1/16W (1608)
R677	1-216-837-11	s	RESISTOR,CHIP 22K 1/16W 1608
R678	1-216-839-11	s	RESISTOR,CHIP 33K 1/16W 1608
R679	1-216-839-11	s	RESISTOR,CHIP 33K 1/16W 1608
R680	1-216-839-11	s	RESISTOR,CHIP 33K 1/16W 1608
R681	1-216-839-11	s	RESISTOR,CHIP 33K 1/16W 1608
R682	1-216-843-11	s	RESISTOR,CHIP 68K 1/16W (1608)
R683	1-216-839-11	s	RESISTOR,CHIP 33K 1/16W 1608
R684	1-216-843-11	s	RESISTOR,CHIP 68K 1/16W (1608)
R685	1-216-843-11	s	RESISTOR,CHIP 68K 1/16W (1608)
R686	1-216-843-11	s	RESISTOR,CHIP 68K 1/16W (1608)
R687	1-216-837-11	s	RESISTOR,CHIP 22K 1/16W 1608
R688	1-216-839-11	s	RESISTOR,CHIP 33K 1/16W 1608
R689	1-216-839-11	s	RESISTOR,CHIP 33K 1/16W 1608
R690	1-216-833-11	s	RESISTOR,CHIP 10K 1/16W 1608
R691	1-216-833-11	s	RESISTOR,CHIP 10K 1/16W 1608
R692	1-216-833-11	s	RESISTOR,CHIP 10K 1/16W 1608
R693	1-216-833-11	s	RESISTOR,CHIP 10K 1/16W 1608
R694	1-216-833-11	s	RESISTOR,CHIP 10K 1/16W 1608
R695	1-216-833-11	s	RESISTOR,CHIP 10K 1/16W 1608
R696	1-216-833-11	s	RESISTOR,CHIP 10K 1/16W 1608
R697	1-216-833-11	s	RESISTOR,CHIP 10K 1/16W 1608
R698	1-216-841-11	s	RESISTOR, CHIP 47K 1/16W 1608
R699	1-216-853-11	s	RESISTOR,CHIP 470K 1/16W(1608)
R700	1-216-853-11	s	RESISTOR,CHIP 470K 1/16W(1608)
R701	1-216-853-11	s	RESISTOR,CHIP 470K 1/16W(1608)
R702	1-216-853-11	s	RESISTOR,CHIP 470K 1/16W(1608)
R703	1-216-841-11	s	RESISTOR, CHIP 47K 1/16W 1608
R704	1-216-841-11	s	RESISTOR, CHIP 47K 1/16W 1608
R705	1-216-845-11	s	RESISTOR,CHIP 100K 1/16W(1608)
R706	1-216-842-11	s	RESISTOR,CHIP 56K 1/16W(1608)
R707	1-216-825-11	s	RESISTOR,CHIP 2.2K 1/16W 1608
R708	1-216-825-11	s	RESISTOR,CHIP 2.2K 1/16W 1608
R709	1-216-825-11	s	RESISTOR,CHIP 2.2K 1/16W 1608
R710	1-216-825-11	s	RESISTOR,CHIP 2.2K 1/16W 1608
R711	1-216-842-11	s	RESISTOR,CHIP 56K 1/16W(1608)
R712	1-216-842-11	s	RESISTOR,CHIP 56K 1/16W(1608)
R713	1-216-842-11	s	RESISTOR,CHIP 56K 1/16W(1608)
R714	1-216-842-11	s	RESISTOR,CHIP 56K 1/16W(1608)
R715	1-216-825-11	s	RESISTOR,CHIP 2.2K 1/16W 1608
R716	1-216-825-11	s	RESISTOR,CHIP 2.2K 1/16W 1608
R717	1-216-841-11	s	RESISTOR, CHIP 47K 1/16W 1608
R718	1-216-849-11	s	RESISTOR,CHIP 220K 1/16W 1608
R719	1-216-841-11	s	RESISTOR, CHIP 47K 1/16W 1608
R720	1-216-849-11	s	RESISTOR,CHIP 220K 1/16W 1608
R721	1-216-838-11	s	RESISTOR CHIP 27K 1/16W(1608)
R722	1-216-838-11	s	RESISTOR CHIP 27K 1/16W(1608)
R723	1-216-840-11	s	RESISTOR,CHIP 39K 1/16W 1608

(SV-212 BOARD(DSR-2000/2000P))

Ref. No. or Q'ty	Part No.	SP	Description
R724	1-216-837-11	s	RESISTOR,CHIP 22K 1/16W 1608
R725	1-216-840-11	s	RESISTOR,CHIP 39K 1/16W 1608
R726	1-216-837-11	s	RESISTOR,CHIP 22K 1/16W 1608
R727	1-216-831-11	s	RESISTOR,CHIP 6.8K 1/16W(1608)
R728	1-216-843-11	s	RESISTOR,CHIP 68K 1/16W (1608)
R729	1-216-849-11	s	RESISTOR,CHIP 220K 1/16W 1608
R730	1-216-831-11	s	RESISTOR,CHIP 6.8K 1/16W(1608)
R731	1-216-843-11	s	RESISTOR,CHIP 68K 1/16W (1608)
R732	1-216-849-11	s	RESISTOR,CHIP 220K 1/16W 1608
R733	1-216-829-11	s	RESISTOR, CHIP 4.7K 1/16W 1608
R734	1-216-829-11	s	RESISTOR, CHIP 4.7K 1/16W 1608
R735	1-216-849-11	s	RESISTOR,CHIP 220K 1/16W 1608
R736	1-216-845-11	s	RESISTOR,CHIP 100K 1/16W(1608)
R737	1-216-849-11	s	RESISTOR,CHIP 220K 1/16W 1608
R738	1-216-833-11	s	RESISTOR,CHIP 10K 1/16W 1608
R739	1-216-833-11	s	RESISTOR,CHIP 10K 1/16W 1608
R740	1-216-845-11	s	RESISTOR,CHIP 100K 1/16W(1608)
R741	1-216-821-11	s	RESISTOR,CHIP 1.0K 1/16W(1608)
R742	1-216-821-11	s	RESISTOR,CHIP 1.0K 1/16W(1608)
R743	1-216-847-11	s	RESISTOR, CHIP 150K 1/16W 1608
R744	1-216-849-11	s	RESISTOR,CHIP 220K 1/16W 1608
R745	1-216-833-11	s	RESISTOR,CHIP 10K 1/16W 1608
R746	1-216-833-11	s	RESISTOR,CHIP 10K 1/16W 1608
R747	1-216-809-11	s	RESISTOR,CHIP 100 1/16W 1608
R748	1-216-845-11	s	RESISTOR,CHIP 100K 1/16W(1608)
R749	1-216-809-11	s	RESISTOR,CHIP 100 1/16W 1608
R750	1-216-833-11	s	RESISTOR,CHIP 10K 1/16W 1608
R751	1-216-849-11	s	RESISTOR,CHIP 220K 1/16W 1608
R752	1-216-847-11	s	RESISTOR, CHIP 150K 1/16W 1608
R753	1-216-845-11	s	RESISTOR,CHIP 100K 1/16W(1608)
R754	1-216-833-11	s	RESISTOR,CHIP 10K 1/16W 1608
R755	1-216-821-11	s	RESISTOR,CHIP 1.0K 1/16W(1608)
R756	1-216-821-11	s	RESISTOR,CHIP 1.0K 1/16W(1608)
R757	1-220-149-11	s	RESISTOR,CHIP 2.2 1/2W (4532)
R758	1-220-149-11	s	RESISTOR,CHIP 2.2 1/2W (4532)
R759	1-220-149-11	s	RESISTOR,CHIP 2.2 1/2W (4532)
R760	1-220-149-11	s	RESISTOR,CHIP 2.2 1/2W (4532)
R761	1-211-737-11	s	RESISTOR 0.47 1/4W (3225)
R762	1-211-737-11	s	RESISTOR 0.47 1/4W (3225)
R763	1-216-834-11	s	RESISTOR,CHIP 12K 1/16W 1608
R764	1-216-834-11	s	RESISTOR,CHIP 12K 1/16W 1608
R765	1-220-244-11	s	RESISTOR CHIP 33 1/4W (3225)
R766	1-216-841-11	s	RESISTOR, CHIP 47K 1/16W 1608
R767	1-220-244-11	s	RESISTOR CHIP 33 1/4W (3225)
R768	1-216-841-11	s	RESISTOR, CHIP 47K 1/16W 1608
R769	1-220-244-11	s	RESISTOR CHIP 33 1/4W (3225)
R770	1-220-244-11	s	RESISTOR CHIP 33 1/4W (3225)
R771	1-220-244-11	s	RESISTOR CHIP 33 1/4W (3225)
R772	1-220-244-11	s	RESISTOR CHIP 33 1/4W (3225)
R775	1-216-849-11	s	RESISTOR,CHIP 220K 1/16W 1608
R776	1-216-833-11	s	RESISTOR,CHIP 10K 1/16W 1608
R777	1-216-849-11	s	RESISTOR,CHIP 220K 1/16W 1608
R778	1-216-833-11	s	RESISTOR,CHIP 10K 1/16W 1608
R779	1-216-817-11	s	RESISTOR,CHIP 470 1/16W 1608
R780	1-216-817-11	s	RESISTOR,CHIP 470 1/16W 1608
R801	1-216-833-11	s	RESISTOR,CHIP 10K 1/16W 1608
R802	1-216-845-11	s	RESISTOR,CHIP 100K 1/16W(1608)
R803	1-216-833-11	s	RESISTOR,CHIP 10K 1/16W 1608
R804	1-216-834-11	s	RESISTOR,CHIP 12K 1/16W 1608

(SV-212 BOARD(DSR-2000/2000P))

Ref. No. or Q'ty	Part No.	SP	Description
R805	1-216-847-11	s	RESISTOR, CHIP 150K 1/16W 1608
R806	1-216-847-11	s	RESISTOR, CHIP 150K 1/16W 1608
R807	1-216-833-11	s	RESISTOR,CHIP 10K 1/16W 1608
R808	1-216-833-11	s	RESISTOR,CHIP 10K 1/16W 1608
R809	1-216-847-11	s	RESISTOR, CHIP 150K 1/16W 1608
R810	1-216-847-11	s	RESISTOR, CHIP 150K 1/16W 1608
R811	1-216-833-11	s	RESISTOR,CHIP 10K 1/16W 1608
R812	1-216-833-11	s	RESISTOR,CHIP 10K 1/16W 1608
R813	1-216-845-11	s	RESISTOR,CHIP 100K 1/16W(1608)
R814	1-216-845-11	s	RESISTOR,CHIP 100K 1/16W(1608)
R815	1-216-845-11	s	RESISTOR,CHIP 100K 1/16W(1608)
R816	1-216-845-11	s	RESISTOR,CHIP 100K 1/16W(1608)
R817	1-216-845-11	s	RESISTOR,CHIP 100K 1/16W(1608)
R818	1-216-845-11	s	RESISTOR,CHIP 100K 1/16W(1608)
R819	1-216-849-11	s	RESISTOR,CHIP 220K 1/16W 1608
R820	1-216-841-11	s	RESISTOR, CHIP 47K 1/16W 1608
R821	1-216-818-11	s	RESISTOR, CHIP 560 1/16W 1608
R822	1-216-837-11	s	RESISTOR,CHIP 22K 1/16W 1608
R823	1-216-841-11	s	RESISTOR, CHIP 47K 1/16W 1608
R824	1-216-837-11	s	RESISTOR,CHIP 22K 1/16W 1608
R825	1-216-841-11	s	RESISTOR, CHIP 47K 1/16W 1608
R826	1-216-841-11	s	RESISTOR, CHIP 47K 1/16W 1608
R827	1-216-841-11	s	RESISTOR, CHIP 47K 1/16W 1608
R828	1-216-841-11	s	RESISTOR, CHIP 47K 1/16W 1608
R829	1-216-849-11	s	RESISTOR,CHIP 220K 1/16W 1608
R830	1-216-849-11	s	RESISTOR,CHIP 220K 1/16W 1608
R831	1-216-817-11	s	RESISTOR,CHIP 470 1/16W 1608
R832	1-216-837-11	s	RESISTOR,CHIP 22K 1/16W 1608
R833	1-216-817-11	s	RESISTOR,CHIP 470 1/16W 1608
R834	1-216-817-11	s	RESISTOR,CHIP 470 1/16W 1608
R835	1-216-837-11	s	RESISTOR,CHIP 22K 1/16W 1608
R836	1-216-817-11	s	RESISTOR,CHIP 470 1/16W 1608
R837	1-216-817-11	s	RESISTOR,CHIP 470 1/16W 1608
R838	1-216-817-11	s	RESISTOR,CHIP 470 1/16W 1608
R839	1-216-849-11	s	RESISTOR,CHIP 220K 1/16W 1608
R840	1-216-849-11	s	RESISTOR,CHIP 220K 1/16W 1608
R841	1-211-737-11	s	RESISTOR 0.47 1/4W (3225)
R842	1-211-737-11	s	RESISTOR 0.47 1/4W (3225)
R843	1-211-737-11	s	RESISTOR 0.47 1/4W (3225)
R844	1-211-737-11	s	RESISTOR 0.47 1/4W (3225)
R845	1-216-845-11	s	RESISTOR,CHIP 100K 1/16W(1608)
R846	1-216-845-11	s	RESISTOR,CHIP 100K 1/16W(1608)
R847	1-216-817-11	s	RESISTOR,CHIP 470 1/16W 1608
R848	1-216-817-11	s	RESISTOR,CHIP 470 1/16W 1608
R849	1-216-837-11	s	RESISTOR,CHIP 22K 1/16W 1608
R851	1-216-837-11	s	RESISTOR,CHIP 22K 1/16W 1608
R852	1-216-833-11	s	RESISTOR,CHIP 10K 1/16W 1608
R853	1-216-849-11	s	RESISTOR,CHIP 220K 1/16W 1608
R854	1-216-833-11	s	RESISTOR,CHIP 10K 1/16W 1608
R855	1-216-849-11	s	RESISTOR,CHIP 220K 1/16W 1608
R856	1-216-833-11	s	RESISTOR,CHIP 10K 1/16W 1608
R857	1-216-849-11	s	RESISTOR,CHIP 220K 1/16W 1608
R858	1-216-849-11	s	RESISTOR,CHIP 220K 1/16W 1608
R859	1-216-849-11	s	RESISTOR,CHIP 220K 1/16W 1608
R860	1-216-849-11	s	RESISTOR,CHIP 220K 1/16W 1608
R861	1-216-849-11	s	RESISTOR,CHIP 220K 1/16W 1608
R862	1-216-849-11	s	RESISTOR,CHIP 220K 1/16W 1608
R863	1-216-849-11	s	RESISTOR,CHIP 220K 1/16W 1608
R864	1-216-849-11	s	RESISTOR,CHIP 220K 1/16W 1608

(SV-212 BOARD(DSR-2000/2000P))

Ref. No. or Q'ty	Part No.	SP	Description
R865	1-216-841-11	s	RESISTOR, CHIP 47K 1/16W 1608
R866	1-216-841-11	s	RESISTOR, CHIP 47K 1/16W 1608
R867	1-216-841-11	s	RESISTOR, CHIP 47K 1/16W 1608
R868	1-216-841-11	s	RESISTOR, CHIP 47K 1/16W 1608
R869	1-216-841-11	s	RESISTOR, CHIP 47K 1/16W 1608
R870	1-216-841-11	s	RESISTOR, CHIP 47K 1/16W 1608
R871	1-216-841-11	s	RESISTOR, CHIP 47K 1/16W 1608
R872	1-216-841-11	s	RESISTOR, CHIP 47K 1/16W 1608
R873	1-216-837-11	s	RESISTOR,CHIP 22K 1/16W 1608
R874	1-216-821-11	s	RESISTOR,CHIP 1.0K 1/16W(1608)
R875	1-216-837-11	s	RESISTOR,CHIP 22K 1/16W 1608
R876	1-216-821-11	s	RESISTOR,CHIP 1.0K 1/16W(1608)
R877	1-216-819-11	s	RESISTOR,CHIP 680 1/16W 1608
R879	1-216-841-11	s	RESISTOR, CHIP 47K 1/16W 1608
R880	1-216-809-11	s	RESISTOR,CHIP 100 1/16W 1608
RB1	1-236-907-11	s	RESISTOR BLOCK 100K (1608)
RB2	1-236-907-11	s	RESISTOR BLOCK 100K (1608)
RB104	1-236-908-11	s	RESISTOR,NETWORK 10K (3216)
RB105	1-239-409-11	s	RESISTOR NETWORK 47 (1608)
RB106	1-239-409-11	s	RESISTOR NETWORK 47 (1608)
RB107	1-239-409-11	s	RESISTOR NETWORK 47 (1608)
RB108	1-239-409-11	s	RESISTOR NETWORK 47 (1608)
RB109	1-239-409-11	s	RESISTOR NETWORK 47 (1608)
RB110	1-239-409-11	s	RESISTOR NETWORK 47 (1608)
RB111	1-239-409-11	s	RESISTOR NETWORK 47 (1608)
RB117	1-239-409-11	s	RESISTOR NETWORK 47 (1608)
RB118	1-239-409-11	s	RESISTOR NETWORK 47 (1608)
RB119	1-239-409-11	s	RESISTOR NETWORK 47 (1608)
RB120	1-239-409-11	s	RESISTOR NETWORK 47 (1608)
RB121	1-239-409-11	s	RESISTOR NETWORK 47 (1608)
RB122	1-239-409-11	s	RESISTOR NETWORK 47 (1608)
RB123	1-239-409-11	s	RESISTOR NETWORK 47 (1608)
RB124	1-239-409-11	s	RESISTOR NETWORK 47 (1608)
RB206	1-239-409-11	s	RESISTOR NETWORK 47 (1608)
RB207	1-239-409-11	s	RESISTOR NETWORK 47 (1608)
RB208	1-239-409-11	s	RESISTOR NETWORK 47 (1608)
RB209	1-239-409-11	s	RESISTOR NETWORK 47 (1608)
RB210	1-239-409-11	s	RESISTOR NETWORK 47 (1608)
RB211	1-239-409-11	s	RESISTOR NETWORK 47 (1608)
RB215	1-239-412-11	s	NETWORK, RESISTOR 100 (1608)
RB216	1-239-412-11	s	NETWORK, RESISTOR 100 (1608)
RB222	1-236-908-11	s	RESISTOR,NETWORK 10K (3216)
RB223	1-239-286-11	s	RESISTOR,NETWORK 22K (1608)
RB224	1-239-286-11	s	RESISTOR,NETWORK 22K (1608)
RB225	1-239-409-11	s	RESISTOR NETWORK 47 (1608)
RB226	1-239-409-11	s	RESISTOR NETWORK 47 (1608)
RB227	1-239-409-11	s	RESISTOR NETWORK 47 (1608)
RB228	1-239-409-11	s	RESISTOR NETWORK 47 (1608)
RB229	1-239-409-11	s	RESISTOR NETWORK 47 (1608)
RB230	1-239-409-11	s	RESISTOR NETWORK 47 (1608)
RB233	1-239-412-11	s	NETWORK, RESISTOR 100 (1608)
RB234	1-239-412-11	s	NETWORK, RESISTOR 100 (1608)
RB235	1-236-907-11	s	RESISTOR BLOCK 100K (1608)
RB236	1-236-907-11	s	RESISTOR BLOCK 100K (1608)
RB301	1-239-389-11	s	RESISTOR,NETWORK 47K (1608)
RB302	1-239-412-11	s	NETWORK, RESISTOR 100 (1608)
RB303	1-239-412-11	s	NETWORK, RESISTOR 100 (1608)
RB304	1-239-412-11	s	NETWORK, RESISTOR 100 (1608)
RB305	1-239-412-11	s	NETWORK, RESISTOR 100 (1608)

(SV-212 BOARD(DSR-2000/2000P))

Ref. No. or Q'ty	Part No.	SP	Description
RB306	1-239-412-11	s	NETWORK, RESISTOR 100 (1608)
RB307	1-239-412-11	s	NETWORK, RESISTOR 100 (1608)
RB308	1-239-412-11	s	NETWORK, RESISTOR 100 (1608)
RB309	1-239-412-11	s	NETWORK, RESISTOR 100 (1608)
RB310	1-239-412-11	s	NETWORK, RESISTOR 100 (1608)
RB311	1-239-412-11	s	NETWORK, RESISTOR 100 (1608)
RB312	1-239-412-11	s	NETWORK, RESISTOR 100 (1608)
RB313	1-236-907-11	s	RESISTOR BLOCK 100K (1608)
RB402	1-236-908-11	s	RESISTOR,NETWORK 10K (3216)
RB403	1-236-908-11	s	RESISTOR,NETWORK 10K (3216)
RB404	1-236-908-11	s	RESISTOR,NETWORK 10K (3216)
RB405	1-239-389-11	s	RESISTOR,NETWORK 47K (1608)
RB406	1-239-389-11	s	RESISTOR,NETWORK 47K (1608)
RB407	1-236-908-11	s	RESISTOR,NETWORK 10K (3216)
RB408	1-239-389-11	s	RESISTOR,NETWORK 47K (1608)
RB409	1-239-389-11	s	RESISTOR,NETWORK 47K (1608)
S101	1-692-536-11	s	SWITCH DIP (8P)
X101	1-579-996-21	s	VIBRATOR, CERAMIC
X201	1-579-996-21	s	VIBRATOR, CERAMIC
X301	1-579-996-21	s	VIBRATOR, CERAMIC

SW-11 BOARD(DSR-2000)

---

*1: Board No. suffix 12 - 13
*2: Board No. suffix 14 -

Ref. No. or Q'ty	Part No.	SP	Description
1pc	A-8323-477-A	o	MOUNTED CIRCUIT BOARD, SW-11
C101	1-162-927-11	s	CAPACITOR,CERAMIC 100PF/50V CH
C102	1-162-927-11	s	CAPACITOR,CERAMIC 100PF/50V CH
C103	1-162-927-11	s	CAPACITOR,CERAMIC 100PF/50V CH
C104	1-162-927-11	s	CAPACITOR,CERAMIC 100PF/50V CH
C105	1-162-927-11	s	CAPACITOR,CERAMIC 100PF/50V CH
C106	1-164-227-11	s	CAPACITOR,CERAMIC 0.022MF/25V
C107	1-164-227-11	s	CAPACITOR,CERAMIC 0.022MF/25V
C108	1-164-227-11	s	CAPACITOR,CERAMIC 0.022MF/25V
C109	1-164-227-11	s	CAPACITOR,CERAMIC 0.022MF/25V
C110	1-164-227-11	s	CAPACITOR,CERAMIC 0.022MF/25V
C111	1-164-227-11	s	CAPACITOR,CERAMIC 0.022MF/25V
C112	1-162-927-11	s	CAPACITOR,CERAMIC 100PF/50V CH
C113	1-162-927-11	s	CAPACITOR,CERAMIC 100PF/50V CH
C114	1-162-927-11	s	CAPACITOR,CERAMIC 100PF/50V CH
C115	1-162-927-11	s	CAPACITOR,CERAMIC 100PF/50V CH
C116	1-162-927-11	s	CAPACITOR,CERAMIC 100PF/50V CH
C117	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C118	1-126-393-11	s	CAPACITOR ELECT 33MF/10V(CHIP)
C119	1-126-393-11	s	CAPACITOR ELECT 33MF/10V(CHIP)
C120	1-126-393-11	s	CAPACITOR ELECT 33MF/10V(CHIP)
C121	1-164-227-11	s	CAPACITOR,CERAMIC 0.022MF/25V
C122	1-164-227-11	s	CAPACITOR,CERAMIC 0.022MF/25V
C123	*2 1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C124	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C125	1-126-393-11	s	CAPACITOR ELECT 33MF/10V(CHIP)
C126	1-126-393-11	s	CAPACITOR ELECT 33MF/10V(CHIP)
C127	1-164-227-11	s	CAPACITOR,CERAMIC 0.022MF/25V
C128	1-164-227-11	s	CAPACITOR,CERAMIC 0.022MF/25V
C129	1-115-416-11	s	CAPACITOR,CERAMIC 1000PF/25V
C130	1-115-416-11	s	CAPACITOR,CERAMIC 1000PF/25V
C131	1-115-416-11	s	CAPACITOR,CERAMIC 1000PF/25V
C132	1-115-416-11	s	CAPACITOR,CERAMIC 1000PF/25V
C133	1-115-416-11	s	CAPACITOR,CERAMIC 1000PF/25V
C134	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C135	*2 1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C136	*2 1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C137	*2 1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C138	*2 1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C139	*2 1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C140	*2 1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C141	*2 1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C201	1-164-315-11	s	CAPACITOR,CERAMIC 470PF/50V CH
C202	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C203	1-126-393-11	s	CAPACITOR ELECT 33MF/10V(CHIP)
C204	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C205	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C209	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C210	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C211	*2 1-162-927-11	s	CAPACITOR,CERAMIC 100PF/50V CH
C301	1-115-416-11	s	CAPACITOR,CERAMIC 1000PF/25V
C302	1-115-416-11	s	CAPACITOR,CERAMIC 1000PF/25V
C303	1-115-416-11	s	CAPACITOR,CERAMIC 1000PF/25V
C304	1-115-416-11	s	CAPACITOR,CERAMIC 1000PF/25V
C305	1-115-416-11	s	CAPACITOR,CERAMIC 1000PF/25V

(SW-11 BOARD(DSR-2000))

Ref. No. or Q'ty	Part No.	SP	Description
C306	1-115-416-11	s	CAPACITOR,CERAMIC 1000PF/25V
C307	1-115-416-11	s	CAPACITOR,CERAMIC 1000PF/25V
C308	1-115-416-11	s	CAPACITOR,CERAMIC 1000PF/25V
C309	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C310	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C311 *2	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C312 *2	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C313 *2	1-162-927-11	s	CAPACITOR,CERAMIC 100PF/50V CH
C314 *2	1-162-927-11	s	CAPACITOR,CERAMIC 100PF/50V CH
C315 *2	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C316 *2	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C317 *2	1-115-416-11	s	CAPACITOR,CERAMIC 1000PF/25V
C318 *2	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
CN701	1-691-739-11	o	CONNECTOR,BOARD TO BOARD 14P
CN702	1-691-739-11	o	CONNECTOR,BOARD TO BOARD 14P
CN703	1-691-739-11	o	CONNECTOR,BOARD TO BOARD 14P
CN704	1-691-739-11	o	CONNECTOR,BOARD TO BOARD 14P
CN710	1-562-717-11	o	SOCKET,CONNECTOR 34P
CN720	1-764-162-11	o	CONNECTOR, FPC 20P
CN730	1-793-719-11	o	CONNECTOR, FPC (DIP TYPE) 7P
D201	8-719-024-81	s	DIODE 1SS300-TE85L
D202	8-719-941-23	s	DIODE DA204U
D203	8-719-941-23	s	DIODE DA204U
D204	8-719-941-23	s	DIODE DA204U
D301	8-719-028-74	s	DIODE NSQ03A04
IC101	8-759-180-19	s	IC NJU7211U50-TE1
IC102	8-759-441-31	s	IC MC14053BDTR2
IC103	8-759-441-31	s	IC MC14053BDTR2
IC104	8-759-248-78	s	IC MB88102PFV-G-BND-ER
IC105	8-759-444-87	s	IC NJM324V (TE2)
IC106	8-759-444-87	s	IC NJM324V (TE2)
IC107	8-759-444-87	s	IC NJM324V (TE2)
IC108	8-729-039-85	S	IC UPC29L05T
IC201	8-759-338-75	s	IC S-80742SN-D6-T1
IC202	8-759-530-30	s	IC TC74VHCU04FT (EL)
IC203	8-759-524-04	s	IC TC74VHC125FT (EL)
IC204	8-759-664-36	s	IC UPD78013FYGC-R20-AB8
IC301	8-759-248-78	s	IC MB88102PFV-G-BND-ER
L101	1-406-824-11	s	COIL, CHOKE 22UH
L102 *2	1-410-377-31	s	INDUCTOR,CHIP 4.7UH (3225)
L103 *2	1-410-377-31	s	INDUCTOR,CHIP 4.7UH (3225)
L201 *2	1-410-377-31	s	INDUCTOR,CHIP 4.7UH (3225)
*1	1-410-385-11	s	CHIP INDUCTOR 22UH (3225)
L202 *2	1-410-377-31	s	INDUCTOR,CHIP 4.7UH (3225)
*1	1-410-381-11	s	CHIP INDUCTOR 10UH (3225)
L203 *2	1-410-377-31	s	INDUCTOR,CHIP 4.7UH (3225)
L301 *2	1-410-377-31	s	INDUCTOR,CHIP 4.7UH (3225)
PS101 ⚠	1-532-637-00	s	LINK, IC (1.0A)
PS102 ⚠	1-532-605-00	s	CIRCUIT PROTECTOR (0.4A)
PS103 ⚠	1-532-605-00	s	CIRCUIT PROTECTOR (0.4A)
Q201	8-729-028-73	s	TRANSISTOR DTA114EUA-T106
Q202	8-729-028-73	s	TRANSISTOR DTA114EUA-T106
Q203	8-729-028-91	s	TRANSISTOR DTA144EUA-T106
Q204	8-729-028-91	s	TRANSISTOR DTA144EUA-T106
Q205	8-729-028-73	s	TRANSISTOR DTA114EUA-T106
Q206	8-729-427-70	s	TRANSISTOR XP4401
Q207	8-729-140-63	s	TRANSISTOR 2SA1611-M5M6

(SW-11 BOARD(DSR-2000))

Ref. No. or Q'ty	Part No.	SP	Description
Q208	8-729-028-73	s	TRANSISTOR DTA114EUA-T106
R101	1-216-845-11	s	RESISTOR,CHIP 100K 1/16W(1608)
R102	1-216-845-11	s	RESISTOR,CHIP 100K 1/16W(1608)
R103	1-216-845-11	s	RESISTOR,CHIP 100K 1/16W(1608)
R104	1-216-845-11	s	RESISTOR,CHIP 100K 1/16W(1608)
R105	1-216-845-11	s	RESISTOR,CHIP 100K 1/16W(1608)
R106	1-218-871-11	s	RESISTOR,CHIP 10K 1/16W (1608)
R107	1-218-871-11	s	RESISTOR,CHIP 10K 1/16W (1608)
R108	1-218-871-11	s	RESISTOR,CHIP 10K 1/16W (1608)
R109	1-218-871-11	s	RESISTOR,CHIP 10K 1/16W (1608)
R110	1-218-871-11	s	RESISTOR,CHIP 10K 1/16W (1608)
R111	1-218-871-11	s	RESISTOR,CHIP 10K 1/16W (1608)
R112	1-218-871-11	s	RESISTOR,CHIP 10K 1/16W (1608)
R113	1-218-871-11	s	RESISTOR,CHIP 10K 1/16W (1608)
R114	1-218-871-11	s	RESISTOR,CHIP 10K 1/16W (1608)
R115	1-218-871-11	s	RESISTOR,CHIP 10K 1/16W (1608)
R117	1-216-825-11	s	RESISTOR,CHIP 2.2K 1/16W 1608
R118	1-216-825-11	s	RESISTOR,CHIP 2.2K 1/16W 1608
R119	1-216-817-11	s	RESISTOR,CHIP 470 1/16W 1608
R120	1-216-841-11	s	RESISTOR, CHIP 47K 1/16W 1608
R121	1-216-825-11	s	RESISTOR,CHIP 2.2K 1/16W 1608
R122	1-216-825-11	s	RESISTOR,CHIP 2.2K 1/16W 1608
R123	1-216-825-11	s	RESISTOR,CHIP 2.2K 1/16W 1608
R124	1-216-825-11	s	RESISTOR,CHIP 2.2K 1/16W 1608
R125	1-216-825-11	s	RESISTOR,CHIP 2.2K 1/16W 1608
R126 *2	1-216-809-11	s	RESISTOR,CHIP 100 1/16W 1608
R127 *2	1-216-809-11	s	RESISTOR,CHIP 100 1/16W 1608
R128 *2	1-216-809-11	s	RESISTOR,CHIP 100 1/16W 1608
R129 *2	1-216-809-11	s	RESISTOR,CHIP 100 1/16W 1608
R130 *2	1-216-809-11	s	RESISTOR,CHIP 100 1/16W 1608
R201	1-216-857-11	s	RESISTOR, CHIP 1.0M 1/16W 1608
R202	1-216-841-11	s	RESISTOR, CHIP 47K 1/16W 1608
R203	1-216-841-11	s	RESISTOR, CHIP 47K 1/16W 1608
R204	1-216-813-11	s	RESISTOR, CHIP 220 1/16W 1608
R205	1-216-821-11	s	RESISTOR,CHIP 1.0K 1/16W(1608)
R206	1-216-841-11	s	RESISTOR, CHIP 47K 1/16W 1608
R207	1-216-841-11	s	RESISTOR, CHIP 47K 1/16W 1608
R211	1-216-841-11	s	RESISTOR, CHIP 47K 1/16W 1608
R212	1-216-841-11	s	RESISTOR, CHIP 47K 1/16W 1608
R213	1-216-841-11	s	RESISTOR, CHIP 47K 1/16W 1608
R215	1-216-821-11	s	RESISTOR,CHIP 1.0K 1/16W(1608)
R216	1-216-821-11	s	RESISTOR,CHIP 1.0K 1/16W(1608)
R217	1-216-821-11	s	RESISTOR,CHIP 1.0K 1/16W(1608)
R218	1-216-809-11	s	RESISTOR,CHIP 100 1/16W 1608
R219	1-216-809-11	s	RESISTOR,CHIP 100 1/16W 1608
R220	1-216-841-11	s	RESISTOR, CHIP 47K 1/16W 1608
R221	1-216-827-11	s	RESISTOR, CHIP 3.3K 1/16W 1608
R222	1-216-827-11	s	RESISTOR, CHIP 3.3K 1/16W 1608
R223	1-216-823-11	s	RESISTOR, CHIP 1.5K 1/16W
R224	1-216-830-11	s	RESISTOR,CHIP 5.6K 1/16W 1608
R225	1-216-829-11	s	RESISTOR, CHIP 4.7K 1/16W 1608
R226	1-216-791-11	s	RESISTOR,CHIP 3.3 1/16W 1608
R227	1-216-825-11	s	RESISTOR,CHIP 2.2K 1/16W 1608
R228	1-216-827-11	s	RESISTOR, CHIP 3.3K 1/16W 1608
R229	1-216-815-11	s	RESISTOR,CHIP 330 1/16W 1608
R230	1-216-815-11	s	RESISTOR,CHIP 330 1/16W 1608
R231	1-216-815-11	s	RESISTOR,CHIP 330 1/16W 1608
R232	1-216-815-11	s	RESISTOR,CHIP 330 1/16W 1608

(SW-11 BOARD(DSR-2000)

Ref. No. or Q'ty	Part No.	SP	Description
R235	*2 1-216-809-11	s	RESISTOR,CHIP 100 1/16W 1608
	*1 1-216-864-11	s	RESISTOR,CHIP 0 1/16W (1608)
R236	1-216-821-11	s	RESISTOR,CHIP 1.0K 1/16W(1608)
R237	1-216-821-11	s	RESISTOR,CHIP 1.0K 1/16W(1608)
R238	*2 1-216-809-11	s	RESISTOR,CHIP 100 1/16W 1608
R239	*2 1-216-809-11	s	RESISTOR,CHIP 100 1/16W 1608
R240	*2 1-216-809-11	s	RESISTOR,CHIP 100 1/16W 1608
R241	*2 1-216-809-11	s	RESISTOR,CHIP 100 1/16W 1608
R242	*2 1-216-809-11	s	RESISTOR,CHIP 100 1/16W 1608
R243	*2 1-216-809-11	s	RESISTOR,CHIP 100 1/16W 1608
R301	*2 1-216-809-11	s	RESISTOR,CHIP 100 1/16W 1608
R302	*2 1-216-809-11	s	RESISTOR,CHIP 100 1/16W 1608
RB101	1-239-389-11	s	RESISTOR,NETWORK 47K (1608)
RB201	1-239-308-11	s	RESISTOR ARRAY,CHIP 47K
RB202	1-239-308-11	s	RESISTOR ARRAY,CHIP 47K
RB203	1-239-308-11	s	RESISTOR ARRAY,CHIP 47K
RB204	1-239-389-11	s	RESISTOR,NETWORK 47K (1608)
RB205	1-236-904-11	s	RESISTOR NETWORK 1K (1608)
RB206	1-236-904-11	s	RESISTOR NETWORK 1K (1608)
RB301	1-239-426-11	s	NETWORK RESISTOR 2.2K (1608)
RB302	1-239-426-11	s	NETWORK RESISTOR 2.2K (1608)
RV106	1-241-856-11	s	RESISTOR, VAR, CARBON 500K
RV107	1-237-695-11	s	RESISTOR,VAR,CARBON 5K
RV108	1-241-856-11	s	RESISTOR, VAR, CARBON 500K
RV109	1-241-856-11	s	RESISTOR, VAR, CARBON 500K
RV110	1-237-695-11	s	RESISTOR,VAR,CARBON 5K
RV111	1-241-856-11	s	RESISTOR, VAR, CARBON 500K
RV112	1-237-695-11	s	RESISTOR,VAR,CARBON 5K
S103	1-571-427-11	s	SWITCH,SLIDE (1-1-2)
S105	1-571-427-11	s	SWITCH,SLIDE (1-1-2)
S106	1-571-427-11	s	SWITCH,SLIDE (1-1-2)
S107	1-571-427-11	s	SWITCH,SLIDE (1-1-2)
S108	1-571-427-11	s	SWITCH,SLIDE (1-1-2)
S109	1-571-427-11	s	SWITCH,SLIDE (1-1-2)
S110	1-571-427-11	s	SWITCH,SLIDE (1-1-2)
S111	1-571-427-11	s	SWITCH,SLIDE (1-1-2)
S112	1-571-427-11	s	SWITCH,SLIDE (1-1-2)
S113	1-571-427-11	s	SWITCH,SLIDE (1-1-2)
S114	1-571-427-11	s	SWITCH,SLIDE (1-1-2)
S116	1-771-122-11	s	SWITCH, SLIDE
S117	1-771-122-11	s	SWITCH, SLIDE
S118	1-571-427-11	s	SWITCH,SLIDE (1-1-2)
S119	1-571-427-11	s	SWITCH,SLIDE (1-1-2)
X201	1-781-174-21	s	VIBRATOR, CERAMIC (10.000MHZ)

SW-11P BOARD(DSR-2000P)

---

*1: Board No. suffix 12 - 13
*2: Board No. suffix 14 -

Ref. No. or Q'ty	Part No.	SP	Description
1pc	A-8323-478-A	o	MOUNTED CIRCUIT BOARD, SW-11P
C101	1-162-927-11	s	CAPACITOR,CERAMIC 100PF/50V CH
C102	1-162-927-11	s	CAPACITOR,CERAMIC 100PF/50V CH
C103	1-162-927-11	s	CAPACITOR,CERAMIC 100PF/50V CH
C104	1-162-927-11	s	CAPACITOR,CERAMIC 100PF/50V CH
C105	1-162-927-11	s	CAPACITOR,CERAMIC 100PF/50V CH
C106	1-164-227-11	s	CAPACITOR,CERAMIC 0.022MF/25V
C107	1-164-227-11	s	CAPACITOR,CERAMIC 0.022MF/25V
C108	1-164-227-11	s	CAPACITOR,CERAMIC 0.022MF/25V
C109	1-164-227-11	s	CAPACITOR,CERAMIC 0.022MF/25V
C110	1-164-227-11	s	CAPACITOR,CERAMIC 0.022MF/25V
C111	1-164-227-11	s	CAPACITOR,CERAMIC 0.022MF/25V
C112	1-162-927-11	s	CAPACITOR,CERAMIC 100PF/50V CH
C113	1-162-927-11	s	CAPACITOR,CERAMIC 100PF/50V CH
C114	1-162-927-11	s	CAPACITOR,CERAMIC 100PF/50V CH
C115	1-162-927-11	s	CAPACITOR,CERAMIC 100PF/50V CH
C116	1-162-927-11	s	CAPACITOR,CERAMIC 100PF/50V CH
C117	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C118	1-126-393-11	s	CAPACITOR ELECT 33MF/10V(CHIP)
C119	1-126-393-11	s	CAPACITOR ELECT 33MF/10V(CHIP)
C120	1-126-393-11	s	CAPACITOR ELECT 33MF/10V(CHIP)
C121	1-164-227-11	s	CAPACITOR,CERAMIC 0.022MF/25V
C122	1-164-227-11	s	CAPACITOR,CERAMIC 0.022MF/25V
C123	*2 1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C124	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C125	1-126-393-11	s	CAPACITOR ELECT 33MF/10V(CHIP)
C126	1-126-393-11	s	CAPACITOR ELECT 33MF/10V(CHIP)
C127	1-164-227-11	s	CAPACITOR,CERAMIC 0.022MF/25V
C128	1-164-227-11	s	CAPACITOR,CERAMIC 0.022MF/25V
C129	1-115-416-11	s	CAPACITOR,CERAMIC 1000PF/25V
C130	1-115-416-11	s	CAPACITOR,CERAMIC 1000PF/25V
C131	1-115-416-11	s	CAPACITOR,CERAMIC 1000PF/25V
C132	1-115-416-11	s	CAPACITOR,CERAMIC 1000PF/25V
C133	1-115-416-11	s	CAPACITOR,CERAMIC 1000PF/25V
C134	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C135	*2 1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C136	*2 1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C137	*2 1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C138	*2 1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C139	*2 1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C140	*2 1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C141	*2 1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C201	1-164-315-11	s	CAPACITOR,CERAMIC 470PF/50V CH
C202	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C203	1-126-393-11	s	CAPACITOR ELECT 33MF/10V(CHIP)
C204	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C205	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C209	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C210	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C211	*2 1-162-927-11	s	CAPACITOR,CERAMIC 100PF/50V CH
C301	1-115-416-11	s	CAPACITOR,CERAMIC 1000PF/25V
C302	1-115-416-11	s	CAPACITOR,CERAMIC 1000PF/25V
C303	1-115-416-11	s	CAPACITOR,CERAMIC 1000PF/25V
C304	1-115-416-11	s	CAPACITOR,CERAMIC 1000PF/25V
C305	1-115-416-11	s	CAPACITOR,CERAMIC 1000PF/25V

(SW-11P BOARD(DSR-2000P))

Ref. No. or Q'ty	Part No.	SP	Description
C306	1-115-416-11	s	CAPACITOR,CERAMIC 1000PF/25V
C307	1-115-416-11	s	CAPACITOR,CERAMIC 1000PF/25V
C308	1-115-416-11	s	CAPACITOR,CERAMIC 1000PF/25V
C309	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C310	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C311 *2	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C312 *2	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C313 *2	1-162-927-11	s	CAPACITOR,CERAMIC 100PF/50V CH
C314 *2	1-162-927-11	s	CAPACITOR,CERAMIC 100PF/50V CH
C315 *2	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C316 *2	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C317 *2	1-115-416-11	s	CAPACITOR,CERAMIC 1000PF/25V
C318 *2	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
CN701	1-691-739-11	o	CONNECTOR,BOARD TO BOARD 14P
CN702	1-691-739-11	o	CONNECTOR,BOARD TO BOARD 14P
CN703	1-691-739-11	o	CONNECTOR,BOARD TO BOARD 14P
CN704	1-691-739-11	o	CONNECTOR,BOARD TO BOARD 14P
CN710	1-562-717-11	o	SOCKET,CONNECTOR 34P
CN720	1-764-162-11	o	CONNECTOR, FPC 20P
CN730	1-793-719-11	o	CONNECTOR, FPC (DIP TYPE) 7P
D201	8-719-024-81	s	DIODE 1SS300-TE85L
D202	8-719-941-23	s	DIODE DA204U
D203	8-719-941-23	s	DIODE DA204U
D204	8-719-941-23	s	DIODE DA204U
D301	8-719-028-74	s	DIODE NSQ03A04
IC101	8-759-180-19	s	IC NJU7211U50-TE1
IC102	8-759-441-31	s	IC MC14053BDTR2
IC103	8-759-441-31	s	IC MC14053BDTR2
IC104	8-759-248-78	s	IC MB88102PFV-G-BND-ER
IC105	8-759-444-87	s	IC NJM324V (TE2)
IC106	8-759-444-87	s	IC NJM324V (TE2)
IC107	8-759-444-87	s	IC NJM324V (TE2)
IC108	8-729-039-85	s	IC UPC29L05T
IC201	8-759-338-75	s	IC S-80742SN-D6-T1
IC202	8-759-530-30	s	IC TC74VHCU04FT (EL)
IC203	8-759-524-04	s	IC TC74VHC125FT (EL)
IC204	8-759-664-36	s	IC UPD78013FYGC-R20-AB8
IC301	8-759-248-78	s	IC MB88102PFV-G-BND-ER
L101	1-406-824-11	s	COIL, CHOKE 22UH
L102 *2	1-410-377-31	s	INDUCTOR,CHIP 4.7UH (3225)
L103 *2	1-410-377-31	s	INDUCTOR,CHIP 4.7UH (3225)
L201 *2	1-410-377-31	s	INDUCTOR,CHIP 4.7UH (3225)
*1	1-410-385-11	s	CHIP INDUCTOR 22UH (3225)
L202 *2	1-410-377-31	s	INDUCTOR,CHIP 4.7UH (3225)
*1	1-410-381-11	s	CHIP INDUCTOR 10UH (3225)
L203 *2	1-410-377-31	s	INDUCTOR,CHIP 4.7UH (3225)
L301 *2	1-410-377-31	s	INDUCTOR,CHIP 4.7UH (3225)
PS101 ⚠	1-532-637-00	s	LINK, IC (1.0A)
PS102 ⚠	1-532-605-00	s	CIRCUIT PROTECTOR (0.4A)
PS103 ⚠	1-532-605-00	s	CIRCUIT PROTECTOR (0.4A)
Q201	8-729-028-73	s	TRANSISTOR DTA114EUA-T106
Q202	8-729-028-73	s	TRANSISTOR DTA114EUA-T106
Q203	8-729-028-91	s	TRANSISTOR DTA144EUA-T106
Q204	8-729-028-91	s	TRANSISTOR DTA144EUA-T106
Q205	8-729-028-73	s	TRANSISTOR DTA114EUA-T106
Q206	8-729-427-70	s	TRANSISTOR XP4401
Q207	8-729-140-63	s	TRANSISTOR 2SA1611-M5M6

(SW-11P BOARD(DSR-2000P))

Ref. No. or Q'ty	Part No.	SP	Description
Q208	8-729-028-73	s	TRANSISTOR DTA114EUA-T106
R101	1-216-845-11	s	RESISTOR,CHIP 100K 1/16W(1608)
R102	1-216-845-11	s	RESISTOR,CHIP 100K 1/16W(1608)
R103	1-216-845-11	s	RESISTOR,CHIP 100K 1/16W(1608)
R104	1-216-845-11	s	RESISTOR,CHIP 100K 1/16W(1608)
R105	1-216-845-11	s	RESISTOR,CHIP 100K 1/16W(1608)
R106	1-218-871-11	s	RESISTOR,CHIP 10K 1/16W (1608)
R107	1-218-871-11	s	RESISTOR,CHIP 10K 1/16W (1608)
R108	1-218-871-11	s	RESISTOR,CHIP 10K 1/16W (1608)
R109	1-218-871-11	s	RESISTOR,CHIP 10K 1/16W (1608)
R110	1-218-871-11	s	RESISTOR,CHIP 10K 1/16W (1608)
R111	1-218-871-11	s	RESISTOR,CHIP 10K 1/16W (1608)
R112	1-218-871-11	s	RESISTOR,CHIP 10K 1/16W (1608)
R113	1-218-871-11	s	RESISTOR,CHIP 10K 1/16W (1608)
R114	1-218-871-11	s	RESISTOR,CHIP 10K 1/16W (1608)
R115	1-218-871-11	s	RESISTOR,CHIP 10K 1/16W (1608)
R117	1-216-825-11	s	RESISTOR,CHIP 2.2K 1/16W 1608
R118	1-216-825-11	s	RESISTOR,CHIP 2.2K 1/16W 1608
R119	1-216-817-11	s	RESISTOR,CHIP 470 1/16W 1608
R120	1-216-841-11	s	RESISTOR, CHIP 47K 1/16W 1608
R121	1-216-825-11	s	RESISTOR,CHIP 2.2K 1/16W 1608
R122	1-216-825-11	s	RESISTOR,CHIP 2.2K 1/16W 1608
R123	1-216-825-11	s	RESISTOR,CHIP 2.2K 1/16W 1608
R124	1-216-825-11	s	RESISTOR,CHIP 2.2K 1/16W 1608
R125	1-216-825-11	s	RESISTOR,CHIP 2.2K 1/16W 1608
R126 *2	1-216-809-11	s	RESISTOR,CHIP 100 1/16W 1608
R127 *2	1-216-809-11	s	RESISTOR,CHIP 100 1/16W 1608
R128 *2	1-216-809-11	s	RESISTOR,CHIP 100 1/16W 1608
R129 *2	1-216-809-11	s	RESISTOR,CHIP 100 1/16W 1608
R130 *2	1-216-809-11	s	RESISTOR,CHIP 100 1/16W 1608
R201	1-216-857-11	s	RESISTOR, CHIP 1.0M 1/16W 1608
R202	1-216-841-11	s	RESISTOR, CHIP 47K 1/16W 1608
R203	1-216-841-11	s	RESISTOR, CHIP 47K 1/16W 1608
R204	1-216-813-11	s	RESISTOR, CHIP 220 1/16W 1608
R205	1-216-821-11	s	RESISTOR,CHIP 1.0K 1/16W(1608)
R206	1-216-841-11	s	RESISTOR, CHIP 47K 1/16W 1608
R207	1-216-841-11	s	RESISTOR, CHIP 47K 1/16W 1608
R211	1-216-841-11	s	RESISTOR, CHIP 47K 1/16W 1608
R212	1-216-841-11	s	RESISTOR, CHIP 47K 1/16W 1608
R213	1-216-841-11	s	RESISTOR, CHIP 47K 1/16W 1608
R215	1-216-821-11	s	RESISTOR,CHIP 1.0K 1/16W(1608)
R216	1-216-821-11	s	RESISTOR,CHIP 1.0K 1/16W(1608)
R217	1-216-821-11	s	RESISTOR,CHIP 1.0K 1/16W(1608)
R218	1-216-809-11	s	RESISTOR,CHIP 100 1/16W 1608
R219	1-216-809-11	s	RESISTOR,CHIP 100 1/16W 1608
R220	1-216-841-11	s	RESISTOR, CHIP 47K 1/16W 1608
R221	1-216-827-11	s	RESISTOR, CHIP 3.3K 1/16W 1608
R222	1-216-827-11	s	RESISTOR, CHIP 3.3K 1/16W 1608
R223	1-216-823-11	s	RESISTOR, CHIP 1.5K 1/16W
R224	1-216-830-11	s	RESISTOR,CHIP 5.6K 1/16W 1608
R225	1-216-829-11	s	RESISTOR, CHIP 4.7K 1/16W 1608
R226	1-216-791-11	s	RESISTOR,CHIP 3.3 1/16W 1608
R227	1-216-825-11	s	RESISTOR,CHIP 2.2K 1/16W 1608
R228	1-216-827-11	s	RESISTOR, CHIP 3.3K 1/16W 1608
R229	1-216-815-11	s	RESISTOR,CHIP 330 1/16W 1608
R230	1-216-815-11	s	RESISTOR,CHIP 330 1/16W 1608
R231	1-216-815-11	s	RESISTOR,CHIP 330 1/16W 1608
R232	1-216-815-11	s	RESISTOR,CHIP 330 1/16W 1608

(SW-11P BOARD(DSR-2000P))

Ref. No. or Q'ty	Part No.	SP	Description
R235	*2 1-216-809-11	s	RESISTOR,CHIP 100 1/16W 1608
	*1 1-216-864-11	s	RESISTOR,CHIP 0 1/16W (1608)
R236	1-216-821-11	s	RESISTOR,CHIP 1.0K 1/16W(1608)
R237	1-216-821-11	s	RESISTOR,CHIP 1.0K 1/16W(1608)
R238	*2 1-216-809-11	s	RESISTOR,CHIP 100 1/16W 1608
R239	*2 1-216-809-11	s	RESISTOR,CHIP 100 1/16W 1608
R240	*2 1-216-809-11	s	RESISTOR,CHIP 100 1/16W 1608
R241	*2 1-216-809-11	s	RESISTOR,CHIP 100 1/16W 1608
R242	*2 1-216-809-11	s	RESISTOR,CHIP 100 1/16W 1608
R243	*2 1-216-809-11	s	RESISTOR,CHIP 100 1/16W 1608
R301	*2 1-216-809-11	s	RESISTOR,CHIP 100 1/16W 1608
R302	*2 1-216-809-11	s	RESISTOR,CHIP 100 1/16W 1608
RB101	1-239-389-11	s	RESISTOR,NETWORK 47K (1608)
RB201	1-239-308-11	s	RESISTOR ARRAY,CHIP 47K
RB202	1-239-308-11	s	RESISTOR ARRAY,CHIP 47K
RB203	1-239-308-11	s	RESISTOR ARRAY,CHIP 47K
RB204	1-239-389-11	s	RESISTOR,NETWORK 47K (1608)
RB205	1-236-904-11	s	RESISTOR NETWORK 1K (1608)
RB206	1-236-904-11	s	RESISTOR NETWORK 1K (1608)
RB301	1-239-426-11	s	NETWORK RESISTOR 2.2K (1608)
RB302	1-239-426-11	s	NETWORK RESISTOR 2.2K (1608)
RV106	1-241-856-11	s	RESISTOR, VAR, CARBON 500K
RV107	1-237-695-11	s	RESISTOR,VAR,CARBON 5K
RV108	1-241-856-11	s	RESISTOR, VAR, CARBON 500K
RV109	1-241-856-11	s	RESISTOR, VAR, CARBON 500K
RV110	1-237-695-11	s	RESISTOR,VAR,CARBON 5K
RV111	1-241-856-11	s	RESISTOR, VAR, CARBON 500K
RV112	1-237-695-11	s	RESISTOR,VAR,CARBON 5K
S103	1-571-427-11	s	SWITCH,SLIDE (1-1-2)
S105	1-571-427-11	s	SWITCH,SLIDE (1-1-2)
S106	1-571-427-11	s	SWITCH,SLIDE (1-1-2)
S107	1-571-427-11	s	SWITCH,SLIDE (1-1-2)
S109	1-571-427-11	s	SWITCH,SLIDE (1-1-2)
S110	1-571-427-11	s	SWITCH,SLIDE (1-1-2)
S111	1-571-427-11	s	SWITCH,SLIDE (1-1-2)
S112	1-571-427-11	s	SWITCH,SLIDE (1-1-2)
S113	1-571-427-11	s	SWITCH,SLIDE (1-1-2)
S114	1-571-427-11	s	SWITCH,SLIDE (1-1-2)
S116	1-771-122-11	s	SWITCH, SLIDE
S117	1-771-122-11	s	SWITCH, SLIDE
S118	1-571-427-11	s	SWITCH,SLIDE (1-1-2)
S119	1-571-427-11	s	SWITCH,SLIDE (1-1-2)
X201	1-781-174-21	s	VIBRATOR, CERAMIC (10.000MHZ)

SW-17 BOARD(DSR-2000/2000P)

Ref. No. or Q'ty	Part No.	SP	Description
1pc	1-675-557-11	o	PRINTED WIRING BOARD, SW-17
CN730	1-793-719-11	o	CONNECTOR, FPC (DIP TYPE) 7P
S1	1-692-537-11	s	SWITCH, TACTILE (WITH LIGHT)
S2	1-692-537-21	s	SWITCH, TACTILE (WITH LIGHT)
S3	1-692-537-21	s	SWITCH, TACTILE (WITH LIGHT)

SY-278 BOARD(DSR-2000/2000P)

---

*1: Board No. suffix 11 - 12
*2: Board No. suffix 13 -

*a: Lot No. 907
*b: Lot No. 908 -

Ref. No. or Q'ty	Part No.	SP	Description
1pc	A-8323-479-A	s	MOUNTED CIRCUIT BOARD, SY-278
1pc	3-179-084-01	s	LEVER(R),PRINTED C,BOARD
1pc	3-179-085-01	s	LEVER(L),PRINTED C.BOARD
1pc	1-528-749-11	s	BATTERY,MOLD TYPE (LITHIUM)
C103	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C104	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C105	1-126-395-11	s	CAPACITOR,ELECT 22MF/16V(CHIP)
C106	*2 1-128-416-11	s	CAPACITOR,ELECT 100MF/16V (105C)
	*1 1-126-396-11	s	CAPACITOR,ELECT 47MF/16V(CHIP)
C107	*2 1-128-416-11	s	CAPACITOR,ELECT 100MF/16V (105C)
	*1 1-126-395-11	s	CAPACITOR,ELECT 22MF/16V(CHIP)
C108	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C109	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C110	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C111	*2 1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C112	*2 1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C113	*2 1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C114	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C115	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C116	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C117	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C118	1-162-915-11	s	CAPACITOR,CERAMIC 10PF/50V CH
C119	1-162-915-11	s	CAPACITOR,CERAMIC 10PF/50V CH
C120	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C121	1-126-396-11	s	CAPACITOR,ELECT 47MF/16V(CHIP)
C122	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C123	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C124	1-135-212-21	s	CAPACITOR TANTALUM 2.2MF/35V
C125	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C126	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C127	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C130	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C131	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C132	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C133	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C134	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C135	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C136	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C137	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C138	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C201	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C202	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C203	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C204	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C205	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C206	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C207	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C208	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C209	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C210	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C211	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C212	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C301	1-162-962-11	s	CAPACITOR,CERAMIC 470PF/50V(B)

(SY-278 BOARD(DSR-2000/2000P))

Ref. No. or Q'ty	Part No.	SP	Description
C302	1-126-396-11	s	CAPACITOR,ELECT 47MF/16V(CHIP)
C303	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C304	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C305	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C306	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C307	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C308	1-162-915-11	s	CAPACITOR,CERAMIC 10PF/50V CH
C309	1-162-915-11	s	CAPACITOR,CERAMIC 10PF/50V CH
C310	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C311	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C312	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C313	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C314	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C315	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C316	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C317	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C318	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C319	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C320	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C321	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C322	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
*2 C323	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C324	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C325	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
*2 C326	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C401	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C402	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
*2 C403	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C404	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C405	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C406	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C407	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C408	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C409	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C410	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C411	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C501	1-126-405-11	s	CAPACITOR,ELECT 10MF/50V(CHIP
C502	1-126-405-11	s	CAPACITOR,ELECT 10MF/50V(CHIP
C503	1-162-964-11	s	CAPACITOR,CERAMIC 1000PF/50V B
C504	1-162-995-11	s	CAPACITOR,CERAMIC 0.022MF/50V
C505	1-162-970-11	s	CAPACITOR CERAMIC 0.01MF/25V B
C506	1-162-927-11	s	CAPACITOR,CERAMIC 100PF/50V CH
C507	1-162-995-11	s	CAPACITOR,CERAMIC 0.022MF/50V
C508	1-162-919-11	s	CAPACITOR,CERAMIC 22PF/50V CH
C509	1-162-919-11	s	CAPACITOR,CERAMIC 22PF/50V CH
C510	1-162-995-11	s	CAPACITOR,CERAMIC 0.022MF/50V
C511	1-162-962-11	s	CAPACITOR,CERAMIC 470PF/50V(B)
C512	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C513	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C514	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C515	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C516	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C517	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C518	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
*2 C519	1-115-670-11	s	CAPACITOR,ELECT 220MF/35V(CHIP)
CN1	1-770-677-11	o	CONNECTOR,BOARD TO BOARD 50P
CN2	1-770-677-11	o	CONNECTOR,BOARD TO BOARD 50P
CN111	1-778-262-12	o	CONNECTOR, BOARD TO BOARD 148P
CN113	1-695-223-21	o	PIN,CONNECTOR (SMD) 10P

(SY-278 BOARD(DSR-2000/2000P))

Ref. No. or Q'ty	Part No.	SP	Description
D501	8-719-987-69	s	DIODE DAN217
D502	8-719-987-69	s	DIODE DAN217
D503	8-719-987-69	s	DIODE DAN217
D504	8-719-987-69	s	DIODE DAN217
D505	8-719-987-69	s	DIODE DAN217
D506	8-719-987-69	s	DIODE DAN217
IC101	8-759-525-99	s	IC HD6437021SC02X
IC102	8-759-537-83	s	IC MBM29F400BC-70PFTN
IC103	8-759-524-50	s	IC TC74VHC541FT(EL)
IC104	8-759-491-50	s	IC TC74VHCT244AFT(EL)
IC105	8-759-479-32	s	IC SN75C1168NS (E05)
IC106	8-759-479-32	s	IC SN75C1168NS (E05)
IC107	8-759-549-01	s	IC SN74LV125APWR
IC108	8-759-549-01	s	IC SN74LV125APWR
IC109	8-759-549-01	s	IC SN74LV125APWR
IC110	8-759-524-07	s	IC TC74VHC138FT(EL)
IC111	8-759-524-07	s	IC TC74VHC138FT(EL)
IC114	8-759-523-94	s	IC TC74VHC32FT(EL)
IC115	8-759-394-05	s	IC TC7SH08F-TE85R
IC116	8-759-327-80	s	IC S-80745SN-D9-T1
IC117	8-759-457-20	s	IC CY7C199-20VC-T2
IC118	8-759-457-20	s	IC CY7C199-20VC-T2
IC119	8-759-084-79	s	IC TC7S14F
IC120	8-759-491-46	s	IC TC74VHCT04AFT (EL)
IC202	8-759-524-07	s	IC TC74VHC138FT(EL)
IC203	8-759-549-15	s	IC SN74LV245APWR
IC204	8-759-549-15	s	IC SN74LV245APWR
IC205	8-759-549-15	s	IC SN74LV245APWR
IC206	8-759-523-92	s	IC TC74VHC21FT(EL)
IC207	8-759-497-29	s	IC LC35256DM-70-TLM
IC208	8-759-095-41	s	IC CXD8176AQ
IC209	8-759-095-41	s	IC CXD8176AQ
IC210	8-759-270-56	s	IC SN74HC377ANS (E20)
IC211	8-759-524-50	s	IC TC74VHC541FT(EL)
IC212	6-700-517-01	s	IC M48Z58Y-70MH1TRS
IC213	8-759-497-29	s	IC LC35256DM-70-TLM
IC214	8-759-524-50	s	IC TC74VHC541FT(EL)
IC301	8-759-525-99	s	IC HD6437021SC02X
IC302	8-759-537-83	s	IC MBM29F400BC-70PFTN
IC303	8-759-095-41	s	IC CXD8176AQ
IC304	8-759-524-07	s	IC TC74VHC138FT(EL)
IC305	8-759-523-94	s	IC TC74VHC32FT(EL)
IC306	8-759-523-94	s	IC TC74VHC32FT(EL)
IC307	8-759-394-05	s	IC TC7SH08F-TE85R
IC308	8-759-524-07	s	IC TC74VHC138FT(EL)
IC309	8-759-497-29	s	IC LC35256DM-70-TLM
IC312	8-759-524-07	s	IC TC74VHC138FT(EL)
IC313	8-759-457-20	s	IC CY7C199-20VC-T2
IC314	8-759-457-20	s	IC CY7C199-20VC-T2
IC315	8-759-524-07	s	IC TC74VHC138FT(EL)
IC316	8-759-549-15	s	IC SN74LV245APWR
IC317	8-759-549-15	s	IC SN74LV245APWR
IC318	8-759-549-15	s	IC SN74LV245APWR
IC401	8-759-491-51	s	IC TC74VHCT245AFT(EL)
IC402	8-759-524-07	s	IC TC74VHC138FT(EL)
IC403	8-759-549-15	s	IC SN74LV245APWR
IC404 *2	8-759-524-22	s	IC TC74VHC175FT(EL)
IC405	8-759-490-41	s	IC TC74VHCT541AFT(EL)

(SY-278 BOARD(DSR-2000/2000P))

Ref. No. or Q'ty	Part No.	SP	Description
IC406	8-759-524-50	s	IC TC74VHC541FT(EL)
IC407	8-759-271-86	s	IC TC7SH04FU
IC408	8-759-270-56	s	IC SN74HC377ANS (E20)
IC409	8-759-524-22	s	IC TC74VHC175FT(EL)
IC410	8-759-523-94	s	IC TC74VHC32FT(EL)
IC411	8-759-524-50	s	IC TC74VHC541FT(EL)
IC504	8-759-523-94	s	IC TC74VHC32FT(EL)
IC505	8-759-369-73	s	IC NJM4556AM
IC506	8-759-100-96	s	IC UPC4558G2
IC507	8-759-700-07	s	IC NJM2903M
IC508	8-759-175-77	s	IC CXD8384Q
IC509	8-759-524-22	s	IC TC74VHC175FT(EL)
IC510	8-759-523-94	s	IC TC74VHC32FT(EL)
L101	1-406-824-11	s	COIL, CHOKE 22UH
L102	1-412-955-11	s	INDUCTOR 22UH (2520)
PS101	⚠ 1-576-259-11	s	LINK,IC 0.6A (3225)
PS102	⚠ 1-576-124-11	s	LINK IC 1A (3225)
PS103	⚠ 1-576-259-11	s	LINK,IC 0.6A (3225)
Q101	8-729-117-32	s	TRANSISTOR 2SC4177
Q501	8-729-027-38	s	TRANSISTOR DTA144EAK-T146
Q502	8-729-027-38	s	TRANSISTOR DTA144EAK-T146
Q503	8-729-422-44	s	TRANSISTOR 2SK663
Q504	8-729-422-44	s	TRANSISTOR 2SK663
R104	1-220-258-11	s	RESISTOR, CHIP 100 1/4W (3225)
R105	1-216-833-11	s	RESISTOR,CHIP 10K 1/16W 1608
R106	1-216-833-11	s	RESISTOR,CHIP 10K 1/16W 1608
R107	*b 1-216-833-11	s	RESISTOR,CHIP 10K 1/16W 1608
	*a 1-216-845-11	s	RESISTOR,CHIP 100K 1/16W(1608)
R108	1-216-841-11	s	RESISTOR, CHIP 47K 1/16W 1608
R109	1-216-833-11	s	RESISTOR,CHIP 10K 1/16W 1608
R110	1-216-833-11	s	RESISTOR,CHIP 10K 1/16W 1608
R111	1-216-821-11	s	RESISTOR,CHIP 1.0K 1/16W(1608)
R113	1-216-805-11	s	RESISTOR,CHIP 47 1/16W 1608
R121	1-216-845-11	s	RESISTOR,CHIP 100K 1/16W(1608)
R137	1-216-841-11	s	RESISTOR, CHIP 47K 1/16W 1608
R139	1-216-845-11	s	RESISTOR,CHIP 100K 1/16W(1608)
R140	1-216-801-11	s	RESISTOR,CHIP 22 1/16W 1608
R142	1-216-845-11	s	RESISTOR,CHIP 100K 1/16W(1608)
R143	1-216-833-11	s	RESISTOR,CHIP 10K 1/16W 1608
R147	1-216-845-11	s	RESISTOR,CHIP 100K 1/16W(1608)
R148	1-216-809-11	s	RESISTOR,CHIP 100 1/16W 1608
R149	1-216-805-11	s	RESISTOR,CHIP 47 1/16W 1608
R150	1-216-805-11	s	RESISTOR,CHIP 47 1/16W 1608
R201	1-216-801-11	s	RESISTOR,CHIP 22 1/16W 1608
R202	1-216-801-11	s	RESISTOR,CHIP 22 1/16W 1608
R203	1-216-801-11	s	RESISTOR,CHIP 22 1/16W 1608
R204	1-216-805-11	s	RESISTOR,CHIP 47 1/16W 1608
R205	1-216-805-11	s	RESISTOR,CHIP 47 1/16W 1608
R206	1-216-805-11	s	RESISTOR,CHIP 47 1/16W 1608
R207	1-216-805-11	s	RESISTOR,CHIP 47 1/16W 1608
R208	1-216-805-11	s	RESISTOR,CHIP 47 1/16W 1608
R209	1-216-805-11	s	RESISTOR,CHIP 47 1/16W 1608
R210	1-216-805-11	s	RESISTOR,CHIP 47 1/16W 1608
R211	1-216-864-11	s	RESISTOR,CHIP 0 1/16W (1608)
R212	1-216-805-11	s	RESISTOR,CHIP 47 1/16W 1608
R213	1-216-805-11	s	RESISTOR,CHIP 47 1/16W 1608
R214	1-216-845-11	s	RESISTOR,CHIP 100K 1/16W(1608)
R215	1-216-805-11	s	RESISTOR,CHIP 47 1/16W 1608

(SY-278 BOARD(DSR-2000/2000P))

Ref. No. or Q'ty	Part No.	SP	Description
R216	1-216-805-11	s	RESISTOR,CHIP 47 1/16W 1608
R217	*2 1-216-805-11	s	RESISTOR,CHIP 47 1/16W 1608
	*1 1-216-864-11	s	RESISTOR,CHIP 0 1/16W (1608)
R218	*2 1-216-805-11	s	RESISTOR,CHIP 47 1/16W 1608
	*1 1-216-864-11	s	RESISTOR,CHIP 0 1/16W (1608)
R219	*2 1-216-805-11	s	RESISTOR,CHIP 47 1/16W 1608
	*1 1-216-864-11	s	RESISTOR,CHIP 0 1/16W (1608)
R220	*2 1-216-805-11	s	RESISTOR,CHIP 47 1/16W 1608
R221	*2 1-216-805-11	s	RESISTOR,CHIP 47 1/16W 1608
R222	*2 1-216-805-11	s	RESISTOR,CHIP 47 1/16W 1608
R301	1-216-841-11	s	RESISTOR, CHIP 47K 1/16W 1608
R302	1-216-821-11	s	RESISTOR,CHIP 1.0K 1/16W(1608)
R303	1-216-849-11	s	RESISTOR,CHIP 220K 1/16W 1608
R304	1-216-849-11	s	RESISTOR,CHIP 220K 1/16W 1608
R305	1-216-809-11	s	RESISTOR,CHIP 100 1/16W 1608
R306	1-216-809-11	s	RESISTOR,CHIP 100 1/16W 1608
R308	1-216-801-11	s	RESISTOR,CHIP 22 1/16W 1608
R309	*b 1-216-833-11	s	RESISTOR,CHIP 10K 1/16W 1608
	*a 1-216-864-11	s	RESISTOR,CHIP 0 1/16W (1608)
R310	1-216-841-11	s	RESISTOR, CHIP 47K 1/16W 1608
R313	1-216-864-11	s	RESISTOR,CHIP 0 1/16W (1608)
R314	1-216-801-11	s	RESISTOR,CHIP 22 1/16W 1608
R315	1-216-801-11	s	RESISTOR,CHIP 22 1/16W 1608
R316	1-216-849-11	s	RESISTOR,CHIP 220K 1/16W 1608
R317	1-216-849-11	s	RESISTOR,CHIP 220K 1/16W 1608
R320	1-216-801-11	s	RESISTOR,CHIP 22 1/16W 1608
R321	1-216-801-11	s	RESISTOR,CHIP 22 1/16W 1608
R322	1-216-833-11	s	RESISTOR,CHIP 10K 1/16W 1608
R323	1-216-833-11	s	RESISTOR,CHIP 10K 1/16W 1608
R324	1-216-805-11	s	RESISTOR,CHIP 47 1/16W 1608
R325	1-216-805-11	s	RESISTOR,CHIP 47 1/16W 1608
R326	1-216-841-11	s	RESISTOR, CHIP 47K 1/16W 1608
R327	1-216-841-11	s	RESISTOR, CHIP 47K 1/16W 1608
R328	1-216-845-11	s	RESISTOR,CHIP 100K 1/16W(1608)
R330	1-216-805-11	s	RESISTOR,CHIP 47 1/16W 1608
R334	1-216-864-11	s	RESISTOR,CHIP 0 1/16W (1608)
R335	1-216-805-11	s	RESISTOR,CHIP 47 1/16W 1608
R336	1-216-845-11	s	RESISTOR,CHIP 100K 1/16W(1608)
R337	1-216-845-11	s	RESISTOR,CHIP 100K 1/16W(1608)
R338	1-216-805-11	s	RESISTOR,CHIP 47 1/16W 1608
R401	1-216-864-11	s	RESISTOR,CHIP 0 1/16W (1608)
R402	1-216-864-11	s	RESISTOR,CHIP 0 1/16W (1608)
R403	1-216-864-11	s	RESISTOR,CHIP 0 1/16W (1608)
R404	1-216-864-11	s	RESISTOR,CHIP 0 1/16W (1608)
R405	1-216-864-11	s	RESISTOR,CHIP 0 1/16W (1608)
R406	1-216-864-11	s	RESISTOR,CHIP 0 1/16W (1608)
R407	1-216-864-11	s	RESISTOR,CHIP 0 1/16W (1608)
R408	1-216-864-11	s	RESISTOR,CHIP 0 1/16W (1608)
R409	1-216-864-11	s	RESISTOR,CHIP 0 1/16W (1608)
R410	*2 1-216-864-11	s	RESISTOR,CHIP 0 1/16W (1608)
R411	*2 1-216-864-11	s	RESISTOR,CHIP 0 1/16W (1608)
R501	1-218-859-11	s	RESISTOR,CHIP 3.3K 1/16W(1608)
R502	1-218-844-11	s	RESISTOR,CHIP 750 1/16W (1608)
R503	1-216-841-11	s	RESISTOR, CHIP 47K 1/16W 1608
R504	1-218-887-11	s	RESISTOR,CHIP 47K 1/16W (1608)
R505	1-218-887-11	s	RESISTOR,CHIP 47K 1/16W (1608)
R506	1-218-855-11	s	RESISTOR,CHIP 2.2K 1/16W(1608)
R507	1-218-855-11	s	RESISTOR,CHIP 2.2K 1/16W(1608)
R508	1-211-990-11	s	RESISTOR,CHIP 75 1/16W (1608)

(SY-278 BOARD(DSR-2000/2000P))

Ref. No. or Q'ty	Part No.	SP	Description
R509	1-218-895-11	s	RESISTOR,CHIP 100K 1/16W(1608)
R510	1-216-837-11	s	RESISTOR,CHIP 22K 1/16W 1608
R511	1-216-832-11	s	RESISTOR,CHIP 8.2K 1/16W 1608
R512	1-216-837-11	s	RESISTOR,CHIP 22K 1/16W 1608
R513	1-216-827-11	s	RESISTOR, CHIP 3.3K 1/16W 1608
R514	1-218-895-11	s	RESISTOR,CHIP 100K 1/16W(1608)
R515	1-216-857-11	s	RESISTOR, CHIP 1.0M 1/16W 1608
R516	1-216-857-11	s	RESISTOR, CHIP 1.0M 1/16W 1608
R517	1-216-821-11	s	RESISTOR,CHIP 1.0K 1/16W(1608)
R518	1-216-857-11	s	RESISTOR, CHIP 1.0M 1/16W 1608
R519	1-216-857-11	s	RESISTOR, CHIP 1.0M 1/16W 1608
R520	1-216-829-11	s	RESISTOR, CHIP 4.7K 1/16W 1608
R521	1-216-845-11	s	RESISTOR,CHIP 100K 1/16W(1608)
R522	1-216-829-11	s	RESISTOR, CHIP 4.7K 1/16W 1608
R523	1-216-829-11	s	RESISTOR, CHIP 4.7K 1/16W 1608
R524	1-216-830-11	s	RESISTOR,CHIP 5.6K 1/16W 1608
R525	1-216-829-11	s	RESISTOR, CHIP 4.7K 1/16W 1608
R526	1-216-857-11	s	RESISTOR, CHIP 1.0M 1/16W 1608
R527	1-216-815-11	s	RESISTOR,CHIP 330 1/16W 1608
R528	1-216-821-11	s	RESISTOR,CHIP 1.0K 1/16W(1608)
R529	1-216-801-11	s	RESISTOR,CHIP 22 1/16W 1608
R530	1-216-801-11	s	RESISTOR,CHIP 22 1/16W 1608
R531	1-216-801-11	s	RESISTOR,CHIP 22 1/16W 1608
R532	1-216-801-11	s	RESISTOR,CHIP 22 1/16W 1608
R533	1-216-801-11	s	RESISTOR,CHIP 22 1/16W 1608
R534	*2 1-216-833-11	s	RESISTOR,CHIP 10K 1/16W (1608)
R801	1-216-864-11	s	RESISTOR,CHIP 0 1/16W (1608)
R805	1-216-864-11	s	RESISTOR,CHIP 0 1/16W (1608)
R806	1-216-864-11	s	RESISTOR,CHIP 0 1/16W (1608)
R807	1-216-864-11	s	RESISTOR,CHIP 0 1/16W (1608)
R808	1-216-864-11	s	RESISTOR,CHIP 0 1/16W (1608)
R919	1-216-809-11	s	RESISTOR,CHIP 100 1/16W 1608
R920	1-216-809-11	s	RESISTOR,CHIP 100 1/16W 1608
R921	1-216-833-11	s	RESISTOR,CHIP 10K 1/16W 1608
R922	1-216-833-11	s	RESISTOR,CHIP 10K 1/16W 1608
RB101	1-236-906-11	s	RESISTOR, NETWORK 15K (1608)
RB102	1-236-907-11	s	RESISTOR BLOCK 100K (1608)
RB103	1-239-444-11	s	NETWORK,RESISTOR 220K (1608)
RB107	1-239-309-11	s	RESISTOR ARRAY,CHIP 100K
RB108	1-239-309-11	s	RESISTOR ARRAY,CHIP 100K
RB109	1-239-310-11	s	RESISTOR ARRAY, CHIP 220K
RB110	1-239-621-11	s	NETWORK RESISTOR 22 (1608)
RB111	1-239-621-11	s	NETWORK RESISTOR 22 (1608)
RB112	1-239-621-11	s	NETWORK RESISTOR 22 (1608)
RB113	1-239-621-11	s	NETWORK RESISTOR 22 (1608)
RB114	1-239-621-11	s	NETWORK RESISTOR 22 (1608)
RB115	1-239-621-11	s	NETWORK RESISTOR 22 (1608)
RB116	1-239-621-11	s	NETWORK RESISTOR 22 (1608)
RB117	1-239-621-11	s	NETWORK RESISTOR 22 (1608)
RB118	1-239-621-11	s	NETWORK RESISTOR 22 (1608)
RB119	1-239-621-11	s	NETWORK RESISTOR 22 (1608)
RB120	1-239-621-11	s	NETWORK RESISTOR 22 (1608)
RB121	1-239-621-11	s	NETWORK RESISTOR 22 (1608)
RB122	1-239-621-11	s	NETWORK RESISTOR 22 (1608)
RB123	1-239-621-11	s	NETWORK RESISTOR 22 (1608)
RB124	1-239-621-11	s	NETWORK RESISTOR 22 (1608)
RB125	1-239-621-11	s	NETWORK RESISTOR 22 (1608)
RB126	1-239-621-11	s	NETWORK RESISTOR 22 (1608)
RB127	1-239-621-11	s	NETWORK RESISTOR 22 (1608)

(SY-278 BOARD(DSR-2000/2000P))

Ref. No. or Q'ty	Part No.	SP	Description
RB128	1-239-621-11	s	NETWORK RESISTOR 22 (1608)
RB129	1-239-621-11	s	NETWORK RESISTOR 22 (1608)
RB130	1-239-621-11	s	NETWORK RESISTOR 22 (1608)
RB131	1-239-621-11	s	NETWORK RESISTOR 22 (1608)
RB201	1-239-621-11	s	NETWORK RESISTOR 22 (1608)
RB202	1-239-621-11	s	NETWORK RESISTOR 22 (1608)
RB203	1-239-621-11	s	NETWORK RESISTOR 22 (1608)
RB204	1-239-621-11	s	NETWORK RESISTOR 22 (1608)
RB205	1-239-621-11	s	NETWORK RESISTOR 22 (1608)
RB206	1-239-621-11	s	NETWORK RESISTOR 22 (1608)
RB207	1-239-621-11	s	NETWORK RESISTOR 22 (1608)
RB208	1-239-621-11	s	NETWORK RESISTOR 22 (1608)
RB209	1-239-409-11	s	RESISTOR NETWORK 47 (1608)
RB210	1-239-409-11	s	RESISTOR NETWORK 47 (1608)
RB211	1-239-409-11	s	RESISTOR NETWORK 47 (1608)
RB212	1-239-409-11	s	RESISTOR NETWORK 47 (1608)
RB213	1-239-409-11	s	RESISTOR NETWORK 47 (1608)
RB214	1-239-409-11	s	RESISTOR NETWORK 47 (1608)
RB215	1-239-310-11	s	RESISTOR ARRAY, CHIP 220K
RB216	1-239-409-11	s	RESISTOR NETWORK 47 (1608)
RB217	1-239-409-11	s	RESISTOR NETWORK 47 (1608)
RB218	1-239-409-11	s	RESISTOR NETWORK 47 (1608)
RB219	1-239-409-11	s	RESISTOR NETWORK 47 (1608)
RB220	1-239-409-11	s	RESISTOR NETWORK 47 (1608)
RB221	1-239-409-11	s	RESISTOR NETWORK 47 (1608)
RB222	1-239-409-11	s	RESISTOR NETWORK 47 (1608)
RB223	1-239-409-11	s	RESISTOR NETWORK 47 (1608)
RB224	1-239-409-11	s	RESISTOR NETWORK 47 (1608)
RB225	1-239-409-11	s	RESISTOR NETWORK 47 (1608)
RB226	1-239-409-11	s	RESISTOR NETWORK 47 (1608)
RB227	1-239-409-11	s	RESISTOR NETWORK 47 (1608)
RB228	1-239-409-11	s	RESISTOR NETWORK 47 (1608)
RB229	1-239-409-11	s	RESISTOR NETWORK 47 (1608)
RB230	1-239-409-11	s	RESISTOR NETWORK 47 (1608)
RB231	1-239-711-11	s	NETWORK, RESISTOR 0 (1608)
RB232	1-239-711-11	s	NETWORK, RESISTOR 0 (1608)
RB233	1-239-711-11	s	NETWORK, RESISTOR 0 (1608)
RB234	1-239-310-11	s	RESISTOR ARRAY, CHIP 220K
RB235	*2 1-239-409-11	s	RESISTOR,NETWORK 47 (1608)
RB236	*2 1-239-409-11	s	RESISTOR,NETWORK 47 (1608)
RB237	*2 1-239-409-11	s	RESISTOR,NETWORK 47 (1608)
RB238	*2 1-239-409-11	s	RESISTOR,NETWORK 47 (1608)
RB239	*2 1-239-409-11	s	RESISTOR,NETWORK 47 (1608)
RB301	1-236-907-11	s	RESISTOR BLOCK 100K (1608)
RB302	1-239-309-11	s	RESISTOR ARRAY,CHIP 100K
RB305	1-239-621-11	s	NETWORK RESISTOR 22 (1608)
RB306	1-239-621-11	s	NETWORK RESISTOR 22 (1608)
RB307	1-239-621-11	s	NETWORK RESISTOR 22 (1608)
RB308	1-239-621-11	s	NETWORK RESISTOR 22 (1608)
RB309	1-239-621-11	s	NETWORK RESISTOR 22 (1608)
RB310	1-239-621-11	s	NETWORK RESISTOR 22 (1608)
RB311	1-239-621-11	s	NETWORK RESISTOR 22 (1608)
RB312	1-239-621-11	s	NETWORK RESISTOR 22 (1608)
RB313	1-239-621-11	s	NETWORK RESISTOR 22 (1608)
RB314	1-239-621-11	s	NETWORK RESISTOR 22 (1608)
RB315	1-239-621-11	s	NETWORK RESISTOR 22 (1608)
RB316	1-239-621-11	s	NETWORK RESISTOR 22 (1608)
RB317	1-239-621-11	s	NETWORK RESISTOR 22 (1608)
RB318	1-239-621-11	s	NETWORK RESISTOR 22 (1608)

(SY-278 BOARD(DSR-2000/2000P))

Ref. No. or Q'ty	Part No.	SP	Description
RB319	1-239-621-11	s	NETWORK RESISTOR 22 (1608)
RB320	1-239-621-11	s	NETWORK RESISTOR 22 (1608)
RB321	1-239-409-11	s	RESISTOR NETWORK 47 (1608)
RB322	1-239-409-11	s	RESISTOR NETWORK 47 (1608)
RB323	1-239-409-11	s	RESISTOR NETWORK 47 (1608)
RB324	1-239-409-11	s	RESISTOR NETWORK 47 (1608)
RB325	1-239-409-11	s	RESISTOR NETWORK 47 (1608)
RB326	1-239-409-11	s	RESISTOR NETWORK 47 (1608)
RB327	1-239-621-11	s	NETWORK RESISTOR 22 (1608)
RB328	1-239-621-11	s	NETWORK RESISTOR 22 (1608)
RB329	1-239-621-11	s	NETWORK RESISTOR 22 (1608)
RB330	1-239-409-11	s	RESISTOR NETWORK 47 (1608)
RB331	1-239-409-11	s	RESISTOR NETWORK 47 (1608)
RB332	1-239-309-11	s	RESISTOR ARRAY,CHIP 100K
RB333	1-239-309-11	s	RESISTOR ARRAY,CHIP 100K
RB334	1-239-309-11	s	RESISTOR ARRAY,CHIP 100K
RB335	1-239-409-11	s	RESISTOR NETWORK 47 (1608)
RB336	1-239-621-11	s	NETWORK RESISTOR 22 (1608)
RB337	1-239-621-11	s	NETWORK RESISTOR 22 (1608)
RB338	1-239-621-11	s	NETWORK RESISTOR 22 (1608)
RB339	1-239-621-11	s	NETWORK RESISTOR 22 (1608)
RB340	1-239-621-11	s	NETWORK RESISTOR 22 (1608)
RB341	1-239-621-11	s	NETWORK RESISTOR 22 (1608)
RB342	1-239-621-11	s	NETWORK RESISTOR 22 (1608)
RB343	1-239-621-11	s	NETWORK RESISTOR 22 (1608)
RB344	1-239-621-11	s	NETWORK RESISTOR 22 (1608)
RB345	1-239-621-11	s	NETWORK RESISTOR 22 (1608)
RB346	1-239-621-11	s	NETWORK RESISTOR 22 (1608)
RB347	1-239-621-11	s	NETWORK RESISTOR 22 (1608)
RB401	1-239-308-11	s	RESISTOR ARRAY,CHIP 47K
RB402	1-239-309-11	s	RESISTOR ARRAY,CHIP 100K
RB403	1-239-711-11	s	NETWORK, RESISTOR 0 (1608)
RB404 *2	1-239-621-11	s	NETWORK RESISTOR 22 (1608)
RB405 *2	1-239-621-11	s	NETWORK RESISTOR 22 (1608)
RB406 *2	1-239-621-11	s	NETWORK RESISTOR 22 (1608)
RB407 *2	1-239-621-11	s	NETWORK RESISTOR 22 (1608)
RB501	1-239-621-11	s	NETWORK RESISTOR 22 (1608)
RB502	1-239-621-11	s	NETWORK RESISTOR 22 (1608)
RB503	1-239-621-11	s	NETWORK RESISTOR 22 (1608)
RB904	1-239-412-11	s	NETWORK, RESISTOR 100 (1608)
S101	1-572-473-11	s	SWITCH, TACTIL
S201	1-692-536-11	s	SWITCH DIP (8P)
X101	1-767-559-11	s	VIBRATOR, CRYSTAL
X301	1-579-996-21	s	VIBRATOR, CERAMIC
X501	1-579-993-21	s	VIBRATOR, CERAMIC

VPR-62 BOARD(DSR-2000)

---

*1: Board No. suffix 11
*2: Board No. suffix 12 -
*3: Board No. suffix 11 - 12
*4: Board No. suffix 12
*5: Board No. suffix 14 -

*a: Lot No. 002 -
*b: Lot No. 907 - 912
*c: Lot No. 001 -

Ref. No. or Q'ty	Part No.	SP	Description
1pc	A-8323-487-A	s	MOUNTED CIRCUIT BOARD,VPR-62
1pc	3-179-085-01	s	LEVER(L),PRINTED C.BOARD
1pc	3-179-084-01	s	LEVER(R),PRINTED C.BOARD
C1	1-126-396-11	s	CAPACITOR,ELECT 47MF/16V(CHIP)
C2	1-126-396-11	s	CAPACITOR,ELECT 47MF/16V(CHIP)
C3	1-126-392-11	s	CAPACITOR,CHIP ELECT100MF/6.3V
C4	1-126-396-11	s	CAPACITOR,ELECT 47MF/16V(CHIP)
C5	1-126-392-11	s	CAPACITOR,CHIP ELECT100MF/6.3V
C6	1-126-392-11	s	CAPACITOR,CHIP ELECT100MF/6.3V
C7	1-164-227-11	s	CAPACITOR,CERAMIC 0.022MF/25V
C8	1-164-227-11	s	CAPACITOR,CERAMIC 0.022MF/25V
C9	1-164-227-11	s	CAPACITOR,CERAMIC 0.022MF/25V
C10	1-164-227-11	s	CAPACITOR,CERAMIC 0.022MF/25V
C11	1-164-227-11	s	CAPACITOR,CERAMIC 0.022MF/25V
C12	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
C13	1-164-227-11	s	CAPACITOR,CERAMIC 0.022MF/25V
C14	1-164-227-11	s	CAPACITOR,CERAMIC 0.022MF/25V
C15	1-164-227-11	s	CAPACITOR,CERAMIC 0.022MF/25V
C16	1-164-227-11	s	CAPACITOR,CERAMIC 0.022MF/25V
C17	1-126-392-11	s	CAPACITOR,CHIP ELECT100MF/6.3V
C18	1-126-392-11	s	CAPACITOR,CHIP ELECT100MF/6.3V
C19	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
C20	1-126-392-11	s	CAPACITOR,CHIP ELECT100MF/6.3V
C21	1-126-392-11	s	CAPACITOR,CHIP ELECT100MF/6.3V
C22	1-164-227-11	s	CAPACITOR,CERAMIC 0.022MF/25V
C23	1-164-227-11	s	CAPACITOR,CERAMIC 0.022MF/25V
C24	1-164-227-11	s	CAPACITOR,CERAMIC 0.022MF/25V
C25	1-164-227-11	s	CAPACITOR,CERAMIC 0.022MF/25V
C26	1-164-227-11	s	CAPACITOR,CERAMIC 0.022MF/25V
C27	1-164-227-11	s	CAPACITOR,CERAMIC 0.022MF/25V
C28	1-126-396-11	s	CAPACITOR,ELECT 47MF/16V(CHIP)
C29	1-126-396-11	s	CAPACITOR,ELECT 47MF/16V(CHIP)
C30	1-126-392-11	s	CAPACITOR,CHIP ELECT100MF/6.3V
C31	1-126-392-11	s	CAPACITOR,CHIP ELECT100MF/6.3V
C32	1-126-392-11	s	CAPACITOR,CHIP ELECT100MF/6.3V
C33	1-126-392-11	s	CAPACITOR,CHIP ELECT100MF/6.3V
C34	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
C35	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
C36	1-126-391-11	s	CAPACITOR ELECT 47MF/6.3V(105)
C37	1-126-391-11	s	CAPACITOR ELECT 47MF/6.3V(105)
C38	1-164-227-11	s	CAPACITOR,CERAMIC 0.022MF/25V
C39	1-126-396-11	s	CAPACITOR,ELECT 47MF/16V(CHIP)
C101	1-126-392-11	s	CAPACITOR,CHIP ELECT100MF/6.3V
C102	1-126-392-11	s	CAPACITOR,CHIP ELECT100MF/6.3V
C103	1-164-227-11	s	CAPACITOR,CERAMIC 0.022MF/25V
C104	1-164-227-11	s	CAPACITOR,CERAMIC 0.022MF/25V
C105	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
C106	1-162-964-11	s	CAPACITOR,CERAMIC 1000PF/50V B
C107	1-126-396-11	s	CAPACITOR,ELECT 47MF/16V(CHIP)

(VPR-62 BOARD(DSR-2000))

Ref. No. or Q'ty	Part No.	SP	Description
C108	1-164-227-11	s	CAPACITOR,CERAMIC 0.022MF/25V
C109	1-164-227-11	s	CAPACITOR,CERAMIC 0.022MF/25V
C110	1-126-392-11	s	CAPACITOR,CHIP ELECT100MF/6.3V
C111	1-126-392-11	s	CAPACITOR,CHIP ELECT100MF/6.3V
C112	1-164-227-11	s	CAPACITOR,CERAMIC 0.022MF/25V
C113	1-164-227-11	s	CAPACITOR,CERAMIC 0.022MF/25V
C114	1-126-396-11	s	CAPACITOR,ELECT 47MF/16V(CHIP)
C115	1-164-227-11	s	CAPACITOR,CERAMIC 0.022MF/25V
C116	1-164-227-11	s	CAPACITOR,CERAMIC 0.022MF/25V
C117	1-164-227-11	s	CAPACITOR,CERAMIC 0.022MF/25V
C118	1-164-227-11	s	CAPACITOR,CERAMIC 0.022MF/25V
C119	1-164-227-11	s	CAPACITOR,CERAMIC 0.022MF/25V
C120	1-126-392-11	s	CAPACITOR,CHIP ELECT100MF/6.3V
C121	1-164-227-11	s	CAPACITOR,CERAMIC 0.022MF/25V
C122	1-164-227-11	s	CAPACITOR,CERAMIC 0.022MF/25V
C123	1-126-396-11	s	CAPACITOR,ELECT 47MF/16V(CHIP)
C124	1-164-227-11	s	CAPACITOR,CERAMIC 0.022MF/25V
C125	1-164-227-11	s	CAPACITOR,CERAMIC 0.022MF/25V
C126	1-126-396-11	s	CAPACITOR,ELECT 47MF/16V(CHIP)
C127	1-126-396-11	s	CAPACITOR,ELECT 47MF/16V(CHIP)
C128	1-162-921-11	s	CAPACITOR,CERAMIC 33PF/50V CH
C129	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
C130	1-164-227-11	s	CAPACITOR,CERAMIC 0.022MF/25V
C131	1-164-227-11	s	CAPACITOR,CERAMIC 0.022MF/25V
C132	1-164-227-11	s	CAPACITOR,CERAMIC 0.022MF/25V
C133	1-164-227-11	s	CAPACITOR,CERAMIC 0.022MF/25V
C134	1-164-227-11	s	CAPACITOR,CERAMIC 0.022MF/25V
C135	1-110-569-11	s	CAPACITOR CHIP TANTAL47MF/6.3V
C137	1-110-569-11	s	CAPACITOR CHIP TANTAL47MF/6.3V
C138	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
C139	1-104-851-11	s	CAPACITOR,TANTALUM 10MF/10V
C140	1-164-227-11	s	CAPACITOR,CERAMIC 0.022MF/25V
C141 *5	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
C200	1-164-227-11	s	CAPACITOR,CERAMIC 0.022MF/25V
C201	1-126-392-11	s	CAPACITOR,CHIP ELECT100MF/6.3V
C202	1-162-921-11	s	CAPACITOR,CERAMIC 33PF/50V CH
C203	1-164-227-11	s	CAPACITOR,CERAMIC 0.022MF/25V
C204	1-164-227-11	s	CAPACITOR,CERAMIC 0.022MF/25V
C205	1-164-227-11	s	CAPACITOR,CERAMIC 0.022MF/25V
C206	1-164-227-11	s	CAPACITOR,CERAMIC 0.022MF/25V
C207	1-164-227-11	s	CAPACITOR,CERAMIC 0.022MF/25V
C208	1-164-227-11	s	CAPACITOR,CERAMIC 0.022MF/25V
C209	1-164-227-11	s	CAPACITOR,CERAMIC 0.022MF/25V
C210	1-164-227-11	s	CAPACITOR,CERAMIC 0.022MF/25V
C211	1-164-227-11	s	CAPACITOR,CERAMIC 0.022MF/25V
C212	1-164-227-11	s	CAPACITOR,CERAMIC 0.022MF/25V
C213	1-164-227-11	s	CAPACITOR,CERAMIC 0.022MF/25V
C217	1-164-227-11	s	CAPACITOR,CERAMIC 0.022MF/25V
C218	1-164-227-11	s	CAPACITOR,CERAMIC 0.022MF/25V
C219	1-126-392-11	s	CAPACITOR,CHIP ELECT100MF/6.3V
C220	1-164-227-11	s	CAPACITOR,CERAMIC 0.022MF/25V
C221	1-164-227-11	s	CAPACITOR,CERAMIC 0.022MF/25V
C222	1-164-227-11	s	CAPACITOR,CERAMIC 0.022MF/25V
C223	1-164-227-11	s	CAPACITOR,CERAMIC 0.022MF/25V
C224	1-164-227-11	s	CAPACITOR,CERAMIC 0.022MF/25V
C226	1-164-227-11	s	CAPACITOR,CERAMIC 0.022MF/25V
C227	1-126-392-11	s	CAPACITOR,CHIP ELECT100MF/6.3V
C228	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
C229	1-164-227-11	s	CAPACITOR,CERAMIC 0.022MF/25V

(VPR-62 BOARD(DSR-2000))

Ref. No. or Q'ty	Part No.	SP	Description
C230	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
C231	1-164-227-11	s	CAPACITOR,CERAMIC 0.022MF/25V
C232	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
C233	1-164-227-11	s	CAPACITOR,CERAMIC 0.022MF/25V
C234	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
C235	1-164-227-11	s	CAPACITOR,CERAMIC 0.022MF/25V
C236	1-164-227-11	s	CAPACITOR,CERAMIC 0.022MF/25V
C237	1-164-227-11	s	CAPACITOR,CERAMIC 0.022MF/25V
C238	1-162-927-11	s	CAPACITOR,CERAMIC 100PF/50V CH
C239	1-162-927-11	s	CAPACITOR,CERAMIC 100PF/50V CH
C240	1-162-927-11	s	CAPACITOR,CERAMIC 100PF/50V CH
C241	1-126-392-11	s	CAPACITOR,CHIP ELECT100MF/6.3V
C242	1-126-392-11	s	CAPACITOR,CHIP ELECT100MF/6.3V
C243	1-164-227-11	s	CAPACITOR,CERAMIC 0.022MF/25V
C244	1-164-227-11	s	CAPACITOR,CERAMIC 0.022MF/25V
C245	1-164-227-11	s	CAPACITOR,CERAMIC 0.022MF/25V
C246	1-164-227-11	s	CAPACITOR,CERAMIC 0.022MF/25V
C247	1-164-227-11	s	CAPACITOR,CERAMIC 0.022MF/25V
C248	1-164-227-11	s	CAPACITOR,CERAMIC 0.022MF/25V
C249	1-164-227-11	s	CAPACITOR,CERAMIC 0.022MF/25V
C250	1-164-227-11	s	CAPACITOR,CERAMIC 0.022MF/25V
C252	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
C253 *2	1-126-392-11	s	CAPACITOR,CHIP ELECT100MF/6.3V
*1	1-124-584-00	s	CAPACITOR,ELECT 100MF/10V
C300	1-126-392-11	s	CAPACITOR,CHIP ELECT100MF/6.3V
C301	1-126-392-11	s	CAPACITOR,CHIP ELECT100MF/6.3V
C302	1-164-227-11	s	CAPACITOR,CERAMIC 0.022MF/25V
C303	1-164-227-11	s	CAPACITOR,CERAMIC 0.022MF/25V
C304	1-126-396-11	s	CAPACITOR,ELECT 47MF/16V(CHIP)
C305	1-162-926-11	s	CAPACITOR,CERAMIC 82PF/50V CH
C306	1-164-227-11	s	CAPACITOR,CERAMIC 0.022MF/25V
C307	1-164-227-11	s	CAPACITOR,CERAMIC 0.022MF/25V
C308	1-164-227-11	s	CAPACITOR,CERAMIC 0.022MF/25V
C309	1-162-919-11	s	CAPACITOR,CERAMIC 22PF/50V CH
C310	1-162-925-11	s	CAPACITOR,CERAMIC 68PF/50V CH
C311	1-104-851-11	s	CAPACITOR,TANTALUM 10MF/10V
C312	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
C313	1-164-227-11	s	CAPACITOR,CERAMIC 0.022MF/25V
C314	1-164-227-11	s	CAPACITOR,CERAMIC 0.022MF/25V
C315	1-164-227-11	s	CAPACITOR,CERAMIC 0.022MF/25V
C316	1-126-392-11	s	CAPACITOR,CHIP ELECT100MF/6.3V
C317	1-126-392-11	s	CAPACITOR,CHIP ELECT100MF/6.3V
C318	1-162-959-11	s	CAPACITOR,CERAMIC 330PF/50V SL
C319	1-162-921-11	s	CAPACITOR,CERAMIC 33PF/50V CH
C320	1-164-217-11	s	CAPACITOR,CERAMIC 150PF/50V CH
C321	1-164-227-11	s	CAPACITOR,CERAMIC 0.022MF/25V
C322	1-164-227-11	s	CAPACITOR,CERAMIC 0.022MF/25V
C323	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
C324	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
C325	1-164-227-11	s	CAPACITOR,CERAMIC 0.022MF/25V
C326	1-126-392-11	s	CAPACITOR,CHIP ELECT100MF/6.3V
C327	1-164-227-11	s	CAPACITOR,CERAMIC 0.022MF/25V
C328	1-164-227-11	s	CAPACITOR,CERAMIC 0.022MF/25V
C329	1-164-227-11	s	CAPACITOR,CERAMIC 0.022MF/25V
C330	1-164-227-11	s	CAPACITOR,CERAMIC 0.022MF/25V
C331	1-164-227-11	s	CAPACITOR,CERAMIC 0.022MF/25V
C332	1-164-315-11	s	CAPACITOR,CERAMIC 470PF/50V CH
C333	1-162-968-11	s	CAPACITOR,CERAMIC 4700PF/50V B
C334	1-162-968-11	s	CAPACITOR,CERAMIC 4700PF/50V B

(VPR-62 BOARD(DSR-2000))

Ref. No. or Q'ty	Part No.	SP	Description
C335	1-164-227-11	s	CAPACITOR,CERAMIC 0.022MF/25V
C336	1-164-227-11	s	CAPACITOR,CERAMIC 0.022MF/25V
C337	1-164-227-11	s	CAPACITOR,CERAMIC 0.022MF/25V
C338	1-126-392-11	s	CAPACITOR,CHIP ELECT100MF/6.3V
C339	1-164-217-11	s	CAPACITOR,CERAMIC 150PF/50V CH
C340	1-164-227-11	s	CAPACITOR,CERAMIC 0.022MF/25V
C341	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
C342	1-162-919-11	s	CAPACITOR,CERAMIC 22PF/50V CH
C343	1-162-921-11	s	CAPACITOR,CERAMIC 33PF/50V CH
C344	1-126-392-11	s	CAPACITOR,CHIP ELECT100MF/6.3V
C345	1-164-227-11	s	CAPACITOR,CERAMIC 0.022MF/25V
C346	1-126-392-11	s	CAPACITOR,CHIP ELECT100MF/6.3V
C347	1-164-217-11	s	CAPACITOR,CERAMIC 150PF/50V CH
C348	1-164-227-11	s	CAPACITOR,CERAMIC 0.022MF/25V
C349	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
C351	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
C352	1-162-922-11	s	CAPACITOR,CERAMIC 39PF/50V CH
C354	1-164-227-11	s	CAPACITOR,CERAMIC 0.022MF/25V
C355	1-126-392-11	s	CAPACITOR,CHIP ELECT100MF/6.3V
C356	1-162-959-11	s	CAPACITOR,CERAMIC 330PF/50V SL
C359	1-164-227-11	s	CAPACITOR,CERAMIC 0.022MF/25V
C360	1-126-392-11	s	CAPACITOR,CHIP ELECT100MF/6.3V
C361	1-164-227-11	s	CAPACITOR,CERAMIC 0.022MF/25V
C362	1-162-968-11	s	CAPACITOR,CERAMIC 4700PF/50V B
C363	1-126-392-11	s	CAPACITOR,CHIP ELECT100MF/6.3V
C364	1-164-227-11	s	CAPACITOR,CERAMIC 0.022MF/25V
C365	1-164-227-11	s	CAPACITOR,CERAMIC 0.022MF/25V
C366	1-164-227-11	s	CAPACITOR,CERAMIC 0.022MF/25V
C367	1-164-227-11	s	CAPACITOR,CERAMIC 0.022MF/25V
C400	1-164-227-11	s	CAPACITOR,CERAMIC 0.022MF/25V
C401	1-164-227-11	s	CAPACITOR,CERAMIC 0.022MF/25V
C402	1-126-396-11	s	CAPACITOR,ELECT 47MF/16V(CHIP)
C403	1-126-392-11	s	CAPACITOR,CHIP ELECT100MF/6.3V
C404	1-126-392-11	s	CAPACITOR,CHIP ELECT100MF/6.3V
C405	1-126-392-11	s	CAPACITOR,CHIP ELECT100MF/6.3V
C406	1-126-392-11	s	CAPACITOR,CHIP ELECT100MF/6.3V
C407	1-126-392-11	s	CAPACITOR,CHIP ELECT100MF/6.3V
C408	1-164-227-11	s	CAPACITOR,CERAMIC 0.022MF/25V
C409	1-164-227-11	s	CAPACITOR,CERAMIC 0.022MF/25V
C410	1-164-227-11	s	CAPACITOR,CERAMIC 0.022MF/25V
C411	1-164-227-11	s	CAPACITOR,CERAMIC 0.022MF/25V
C412	1-164-227-11	s	CAPACITOR,CERAMIC 0.022MF/25V
C413	1-164-227-11	s	CAPACITOR,CERAMIC 0.022MF/25V
C414	1-162-921-11	s	CAPACITOR,CERAMIC 33PF/50V CH
C415	1-162-921-11	s	CAPACITOR,CERAMIC 33PF/50V CH
C416	1-162-921-11	s	CAPACITOR,CERAMIC 33PF/50V CH
C419	1-162-921-11	s	CAPACITOR,CERAMIC 33PF/50V CH
C420	1-162-921-11	s	CAPACITOR,CERAMIC 33PF/50V CH
C421	1-164-227-11	s	CAPACITOR,CERAMIC 0.022MF/25V
C422	1-164-227-11	s	CAPACITOR,CERAMIC 0.022MF/25V
C425	1-164-227-11	s	CAPACITOR,CERAMIC 0.022MF/25V
C426	1-164-227-11	s	CAPACITOR,CERAMIC 0.022MF/25V
C427	1-126-392-11	s	CAPACITOR,CHIP ELECT100MF/6.3V
C428	1-126-392-11	s	CAPACITOR,CHIP ELECT100MF/6.3V
C429	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
C430	1-162-964-11	s	CAPACITOR,CERAMIC 1000PF/50V B
C431	1-164-227-11	s	CAPACITOR,CERAMIC 0.022MF/25V
C432	1-164-227-11	s	CAPACITOR,CERAMIC 0.022MF/25V
C433	1-164-227-11	s	CAPACITOR,CERAMIC 0.022MF/25V

(VPR-62 BOARD(DSR-2000))

Ref. No. or Q'ty	Part No.	SP	Description
C434	1-165-176-11	s	CAPACITOR,CERAMIC 47000PF/16V
C435	1-162-917-11	s	CAPACITOR,CERAMIC 15PF/50V CH
C436	1-164-227-11	s	CAPACITOR,CERAMIC 0.022MF/25V
C437	1-164-227-11	s	CAPACITOR,CERAMIC 0.022MF/25V
C438	1-164-227-11	s	CAPACITOR,CERAMIC 0.022MF/25V
C439	1-164-227-11	s	CAPACITOR,CERAMIC 0.022MF/25V
C440	1-126-391-11	s	CAPACITOR ELECT 47MF/6.3V(105)
C441	1-126-391-11	s	CAPACITOR ELECT 47MF/6.3V(105)
C442	1-126-391-11	s	CAPACITOR ELECT 47MF/6.3V(105)
C443	1-126-391-11	s	CAPACITOR ELECT 47MF/6.3V(105)
C444	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
C446	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
C447	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
C448	1-126-392-11	s	CAPACITOR,CHIP ELECT100MF/6.3V
C449	1-164-227-11	s	CAPACITOR,CERAMIC 0.022MF/25V
C450	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
C451	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
C452	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
C453	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
C455	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
C456	1-126-391-11	s	CAPACITOR ELECT 47MF/6.3V(105)
C458	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
C459	1-126-391-11	s	CAPACITOR ELECT 47MF/6.3V(105)
C460	1-126-391-11	s	CAPACITOR ELECT 47MF/6.3V(105)
C461	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
C462	1-164-227-11	s	CAPACITOR,CERAMIC 0.022MF/25V
C463	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
C464	1-162-915-11	s	CAPACITOR,CERAMIC 10PF/50V CH
C465	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
C466	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
C467	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
C468	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
C470	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
C471	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
C472	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
C473	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
C475	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
C476	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
C477	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
C478	1-126-392-11	s	CAPACITOR,CHIP ELECT100MF/6.3V
C479	1-126-392-11	s	CAPACITOR,CHIP ELECT100MF/6.3V
C480	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
C481	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
C482	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
C483	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
C484	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
C485	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
C486	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
C487	1-162-915-11	s	CAPACITOR,CERAMIC 10PF/50V CH
C488	1-162-915-11	s	CAPACITOR,CERAMIC 10PF/50V CH
C501	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
C502	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
C503	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
C504	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
C505	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
C507	1-126-392-11	s	CAPACITOR,CHIP ELECT100MF/6.3V
C509	1-126-401-11	s	CAPACITOR, ELECT 1MF/50V(CHIP)
C510	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
C511	1-115-467-11	s	CAPACITOR CERAMIC 0.22MF/10V B

(VPR-62 BOARD(DSR-2000))

Ref. No. or Q'ty	Part No.	SP	Description
C512	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
C513	1-162-964-11	s	CAPACITOR,CERAMIC 1000PF/50V B
C514	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
C515	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
C516	1-115-467-11	s	CAPACITOR CERAMIC 0.22MF/10V B
C517	1-115-467-11	s	CAPACITOR CERAMIC 0.22MF/10V B
C518	1-115-414-11	s	CAPACITOR,CHIP CERAMIC 820PF
C519	1-115-467-11	s	CAPACITOR CERAMIC 0.22MF/10V B
C520	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
C521	1-162-927-11	s	CAPACITOR,CERAMIC 100PF/50V CH
C522	1-115-467-11	s	CAPACITOR CERAMIC 0.22MF/10V B
C523	1-162-964-11	s	CAPACITOR,CERAMIC 1000PF/50V B
C524	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
C525	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
C526	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
C527	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
C528	1-126-392-11	s	CAPACITOR,CHIP ELECT100MF/6.3V
C529	1-126-392-11	s	CAPACITOR,CHIP ELECT100MF/6.3V
C530	1-162-926-11	s	CAPACITOR,CERAMIC 82PF/50V CH
C531	1-164-392-11	s	CAPACITOR CERAMIC 390PF/50V CH
C532	1-162-964-11	s	CAPACITOR,CERAMIC 1000PF/50V B
C533	1-126-392-11	s	CAPACITOR,CHIP ELECT100MF/6.3V
C534	1-164-227-11	s	CAPACITOR,CERAMIC 0.022MF/25V
C535	1-126-394-11	s	CAPACITOR,ELECT 10MF/16V(CHIP)
C536	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
C537	1-126-391-11	s	CAPACITOR ELECT 47MF/6.3V(105)
C538	1-162-970-11	s	CAPACITOR CERAMIC 0.01MF/25V B
C539	1-126-401-11	s	CAPACITOR, ELECT 1MF/50V(CHIP)
C540	1-126-401-11	s	CAPACITOR, ELECT 1MF/50V(CHIP)
C542	1-162-970-11	s	CAPACITOR CERAMIC 0.01MF/25V B
C543	1-162-970-11	s	CAPACITOR CERAMIC 0.01MF/25V B
C544	1-164-315-11	s	CAPACITOR,CERAMIC 470PF/50V CH
C545	1-162-967-11	s	CAPACITOR,CERAMIC 3300PF/50V B
C546	1-162-967-11	s	CAPACITOR,CERAMIC 3300PF/50V B
C547	1-104-912-11	s	CAPACITOR TANTALUM 3.3MF/16V
C548	1-162-911-11	s	CAPACITOR,CERAMIC 6PF/50V 1608
C549	1-162-920-11	s	CAPACITOR,CERAMIC 27PF/50V CH
C550	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
C551	1-162-970-11	s	CAPACITOR CERAMIC 0.01MF/25V B
C552	1-162-927-11	s	CAPACITOR,CERAMIC 100PF/50V CH
C553	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
C554	1-126-391-11	s	CAPACITOR ELECT 47MF/6.3V(105)
C555	1-164-227-11	s	CAPACITOR,CERAMIC 0.022MF/25V
C601	1-164-227-11	s	CAPACITOR,CERAMIC 0.022MF/25V
C602	1-162-919-11	s	CAPACITOR,CERAMIC 22PF/50V CH
C603	1-164-227-11	s	CAPACITOR,CERAMIC 0.022MF/25V
C604	1-164-227-11	s	CAPACITOR,CERAMIC 0.022MF/25V
C605	1-164-227-11	s	CAPACITOR,CERAMIC 0.022MF/25V
C606	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
C607	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
C608	1-162-964-11	s	CAPACITOR,CERAMIC 1000PF/50V B
C609	1-162-964-11	s	CAPACITOR,CERAMIC 1000PF/50V B
C610	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
C611	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
C612	1-164-227-11	s	CAPACITOR,CERAMIC 0.022MF/25V
C613	1-164-227-11	s	CAPACITOR,CERAMIC 0.022MF/25V
C614	1-164-227-11	s	CAPACITOR,CERAMIC 0.022MF/25V
C615	1-164-227-11	s	CAPACITOR,CERAMIC 0.022MF/25V
C616	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF

(VPR-62 BOARD(DSR-2000))

Ref. No. or Q'ty	Part No.	SP	Description
C617	1-162-964-11	s	CAPACITOR,CERAMIC 1000PF/50V B
C618	1-164-227-11	s	CAPACITOR,CERAMIC 0.022MF/25V
C619	1-126-392-11	s	CAPACITOR,CHIP ELECT100MF/6.3V
C620	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
C621	1-164-227-11	s	CAPACITOR,CERAMIC 0.022MF/25V
C622	1-164-227-11	s	CAPACITOR,CERAMIC 0.022MF/25V
C623	1-164-227-11	s	CAPACITOR,CERAMIC 0.022MF/25V
C624	1-164-227-11	s	CAPACITOR,CERAMIC 0.022MF/25V
C625	1-126-391-11	s	CAPACITOR ELECT 47MF/6.3V(105)
C626	1-126-391-11	s	CAPACITOR ELECT 47MF/6.3V(105)
C627	1-164-227-11	s	CAPACITOR,CERAMIC 0.022MF/25V
C628	1-164-227-11	s	CAPACITOR,CERAMIC 0.022MF/25V
C629	1-164-227-11	s	CAPACITOR,CERAMIC 0.022MF/25V
C630	1-164-227-11	s	CAPACITOR,CERAMIC 0.022MF/25V
C631	1-164-227-11	s	CAPACITOR,CERAMIC 0.022MF/25V
C632	1-164-227-11	s	CAPACITOR,CERAMIC 0.022MF/25V
C633	1-126-392-11	s	CAPACITOR,CHIP ELECT100MF/6.3V
C634	1-126-392-11	s	CAPACITOR,CHIP ELECT100MF/6.3V
C635	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
C636	1-164-227-11	s	CAPACITOR,CERAMIC 0.022MF/25V
C637	1-126-392-11	s	CAPACITOR,CHIP ELECT100MF/6.3V
C638	1-126-391-11	s	CAPACITOR ELECT 47MF/6.3V(105)
C639	1-164-227-11	s	CAPACITOR,CERAMIC 0.022MF/25V
C640	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
C641	1-164-227-11	s	CAPACITOR,CERAMIC 0.022MF/25V
C642	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
C643	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
C644	1-164-227-11	s	CAPACITOR,CERAMIC 0.022MF/25V
C645	1-164-227-11	s	CAPACITOR,CERAMIC 0.022MF/25V
C646	1-126-392-11	s	CAPACITOR,CHIP ELECT100MF/6.3V
C647	1-164-227-11	s	CAPACITOR,CERAMIC 0.022MF/25V
C648	1-164-227-11	s	CAPACITOR,CERAMIC 0.022MF/25V
C649	1-164-227-11	s	CAPACITOR,CERAMIC 0.022MF/25V
C650	1-164-227-11	s	CAPACITOR,CERAMIC 0.022MF/25V
C651	1-135-210-11	s	CAPACITOR TANTAL 4.7MF/10V
C652	1-164-227-11	s	CAPACITOR,CERAMIC 0.022MF/25V
C653	1-126-392-11	s	CAPACITOR,CHIP ELECT100MF/6.3V
C654	1-126-396-11	s	CAPACITOR,ELECT 47MF/16V(CHIP)
C655	1-164-227-11	s	CAPACITOR,CERAMIC 0.022MF/25V
C656	1-164-227-11	s	CAPACITOR,CERAMIC 0.022MF/25V
C657	1-162-917-11	s	CAPACITOR,CERAMIC 15PF/50V CH
C658	1-162-923-11	s	CAPACITOR,CERAMIC 47PF/50V CH
C659	1-162-921-11	s	CAPACITOR,CERAMIC 33PF/50V CH
C660	1-162-919-11	s	CAPACITOR,CERAMIC 22PF/50V CH
C662	1-164-227-11	s	CAPACITOR,CERAMIC 0.022MF/25V
C663	1-164-227-11	s	CAPACITOR,CERAMIC 0.022MF/25V
C664	1-164-227-11	s	CAPACITOR,CERAMIC 0.022MF/25V
C665	1-162-917-11	s	CAPACITOR,CERAMIC 15PF/50V CH
C666	1-164-227-11	s	CAPACITOR,CERAMIC 0.022MF/25V
C667	1-162-923-11	s	CAPACITOR,CERAMIC 47PF/50V CH
C668	1-162-921-11	s	CAPACITOR,CERAMIC 33PF/50V CH
C669	1-162-919-11	s	CAPACITOR,CERAMIC 22PF/50V CH
C671	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
C672	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
C673	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
C674	*2 1-162-964-11	s	CAPACITOR,CERAMIC 1000PF/50V B
	*1 1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
C675	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
C676	1-126-392-11	s	CAPACITOR,CHIP ELECT100MF/6.3V

(VPR-62 BOARD(DSR-2000))

Ref. No. or Q'ty	Part No.	SP	Description
C677	1-126-392-11	s	CAPACITOR,CHIP ELECT100MF/6.3V
C678	*2 1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
C679	*5 1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
C680	*5 1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
C681	*5 1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
C701	1-126-392-11	s	CAPACITOR,CHIP ELECT100MF/6.3V
C702	1-126-392-11	s	CAPACITOR,CHIP ELECT100MF/6.3V
C703	1-162-915-11	s	CAPACITOR,CERAMIC 10PF/50V CH
C704	1-164-227-11	s	CAPACITOR,CERAMIC 0.022MF/25V
C705	1-164-227-11	s	CAPACITOR,CERAMIC 0.022MF/25V
C706	1-164-227-11	s	CAPACITOR,CERAMIC 0.022MF/25V
C707	1-164-227-11	s	CAPACITOR,CERAMIC 0.022MF/25V
C708	1-164-227-11	s	CAPACITOR,CERAMIC 0.022MF/25V
C709	1-162-927-11	s	CAPACITOR,CERAMIC 100PF/50V CH
C710	1-164-227-11	s	CAPACITOR,CERAMIC 0.022MF/25V
C711	1-164-227-11	s	CAPACITOR,CERAMIC 0.022MF/25V
C712	1-135-177-21	s	CAPACITOR TANTALUM 1MF/25V
C713	1-135-177-21	s	CAPACITOR TANTALUM 1MF/25V
C714	1-164-383-11	s	CAPACITOR,CERAMIC 110PF/50V CH
C715	1-135-177-21	s	CAPACITOR TANTALUM 1MF/25V
C716	1-135-177-21	s	CAPACITOR TANTALUM 1MF/25V
C717	1-164-227-11	s	CAPACITOR,CERAMIC 0.022MF/25V
C718	1-164-227-11	s	CAPACITOR,CERAMIC 0.022MF/25V
C719	1-126-392-11	s	CAPACITOR,CHIP ELECT100MF/6.3V
C720	1-164-227-11	s	CAPACITOR,CERAMIC 0.022MF/25V
C721	1-164-227-11	s	CAPACITOR,CERAMIC 0.022MF/25V
C722	1-164-227-11	s	CAPACITOR,CERAMIC 0.022MF/25V
C723	1-165-176-11	s	CAPACITOR,CERAMIC 47000PF/16V
C724	1-165-176-11	s	CAPACITOR,CERAMIC 47000PF/16V
C725	1-164-227-11	s	CAPACITOR,CERAMIC 0.022MF/25V
C726	1-162-917-11	s	CAPACITOR,CERAMIC 15PF/50V CH
C727	1-162-915-11	s	CAPACITOR,CERAMIC 10PF/50V CH
C728	1-164-230-11	s	CAPACITOR,CERAMIC 220PF/50V
C729	1-164-227-11	s	CAPACITOR,CERAMIC 0.022MF/25V
C730	1-126-392-11	s	CAPACITOR,CHIP ELECT100MF/6.3V
C731	1-164-227-11	s	CAPACITOR,CERAMIC 0.022MF/25V
C732	1-164-227-11	s	CAPACITOR,CERAMIC 0.022MF/25V
C733	1-164-227-11	s	CAPACITOR,CERAMIC 0.022MF/25V
C734	1-126-396-11	s	CAPACITOR,ELECT 47MF/16V(CHIP)
C735	1-164-227-11	s	CAPACITOR,CERAMIC 0.022MF/25V
C736	1-164-227-11	s	CAPACITOR,CERAMIC 0.022MF/25V
C737	1-164-227-11	s	CAPACITOR,CERAMIC 0.022MF/25V
C738	1-164-227-11	s	CAPACITOR,CERAMIC 0.022MF/25V
C739	1-164-227-11	s	CAPACITOR,CERAMIC 0.022MF/25V
C740	1-164-227-11	s	CAPACITOR,CERAMIC 0.022MF/25V
C741	1-162-923-11	s	CAPACITOR,CERAMIC 47PF/50V CH
C742	1-162-920-11	s	CAPACITOR,CERAMIC 27PF/50V CH
C743	1-162-920-11	s	CAPACITOR,CERAMIC 27PF/50V CH
C744	1-162-915-11	s	CAPACITOR,CERAMIC 10PF/50V CH
C745	1-162-924-11	s	CAPACITOR,CERAMIC 56PF/50V CH
C746	1-162-924-11	s	CAPACITOR,CERAMIC 56PF/50V CH
C747	1-162-920-11	s	CAPACITOR,CERAMIC 27PF/50V CH
C748	1-162-920-11	s	CAPACITOR,CERAMIC 27PF/50V CH
C749	1-164-227-11	s	CAPACITOR,CERAMIC 0.022MF/25V
C750	1-164-227-11	s	CAPACITOR,CERAMIC 0.022MF/25V
C751	1-164-227-11	s	CAPACITOR,CERAMIC 0.022MF/25V
C752	1-164-227-11	s	CAPACITOR,CERAMIC 0.022MF/25V
C753	1-162-912-11	s	CAPACITOR,CERAMIC 7PF/50V 1608
C755	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF

(VPR-62 BOARD(DSR-2000))

Ref. No. or Q'ty	Part No.	SP	Description
C756	1-164-227-11	s	CAPACITOR,CERAMIC 0.022MF/25V
C757	1-164-227-11	s	CAPACITOR,CERAMIC 0.022MF/25V
C758	1-164-227-11	s	CAPACITOR,CERAMIC 0.022MF/25V
C759	1-164-227-11	s	CAPACITOR,CERAMIC 0.022MF/25V
C760	1-164-227-11	s	CAPACITOR,CERAMIC 0.022MF/25V
C761	1-164-227-11	s	CAPACITOR,CERAMIC 0.022MF/25V
C762	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
C801	1-126-392-11	s	CAPACITOR,CHIP ELECT100MF/6.3V
C802	1-164-227-11	s	CAPACITOR,CERAMIC 0.022MF/25V
C803	1-126-392-11	s	CAPACITOR,CHIP ELECT100MF/6.3V
C804	1-164-227-11	s	CAPACITOR,CERAMIC 0.022MF/25V
C805	1-164-227-11	s	CAPACITOR,CERAMIC 0.022MF/25V
C806	1-162-925-11	s	CAPACITOR,CERAMIC 68PF/50V CH
C807	1-164-227-11	s	CAPACITOR,CERAMIC 0.022MF/25V
C808	1-164-227-11	s	CAPACITOR,CERAMIC 0.022MF/25V
C809	1-164-227-11	s	CAPACITOR,CERAMIC 0.022MF/25V
C810	1-164-227-11	s	CAPACITOR,CERAMIC 0.022MF/25V
C811	1-164-227-11	s	CAPACITOR,CERAMIC 0.022MF/25V
C812	1-164-227-11	s	CAPACITOR,CERAMIC 0.022MF/25V
C813	1-164-227-11	s	CAPACITOR,CERAMIC 0.022MF/25V
C814	1-111-253-11	s	CAPACITOR TANTALUM 100MF/6.3V
C815	1-162-915-11	s	CAPACITOR,CERAMIC 10PF/50V CH
C816	1-126-396-11	s	CAPACITOR,ELECT 47MF/16V(CHIP)
C817	1-164-227-11	s	CAPACITOR,CERAMIC 0.022MF/25V
C818	1-164-227-11	s	CAPACITOR,CERAMIC 0.022MF/25V
C819	1-162-916-11	s	CAPACITOR,CERAMIC 12PF/50V CH
C820	1-164-227-11	s	CAPACITOR,CERAMIC 0.022MF/25V
C821	1-126-392-11	s	CAPACITOR,CHIP ELECT100MF/6.3V
C822	1-164-227-11	s	CAPACITOR,CERAMIC 0.022MF/25V
C823	1-164-227-11	s	CAPACITOR,CERAMIC 0.022MF/25V
C824	1-164-227-11	s	CAPACITOR,CERAMIC 0.022MF/25V
C825	1-164-227-11	s	CAPACITOR,CERAMIC 0.022MF/25V
C826	1-164-227-11	s	CAPACITOR,CERAMIC 0.022MF/25V
C827	1-164-227-11	s	CAPACITOR,CERAMIC 0.022MF/25V
C828	1-164-227-11	s	CAPACITOR,CERAMIC 0.022MF/25V
C829	1-162-917-11	s	CAPACITOR,CERAMIC 15PF/50V CH
C830	1-164-384-11	s	CAPACITOR CERAMIC 130PF/50V CH
C831	1-104-851-11	s	CAPACITOR,TANTALUM 10MF/10V
C832	1-104-851-11	s	CAPACITOR,TANTALUM 10MF/10V
C833	1-165-176-11	s	CAPACITOR,CERAMIC 47000PF/16V
C834	1-164-227-11	s	CAPACITOR,CERAMIC 0.022MF/25V
C835	1-162-915-11	s	CAPACITOR,CERAMIC 10PF/50V CH
C836	1-164-227-11	s	CAPACITOR,CERAMIC 0.022MF/25V
C837	1-162-923-11	s	CAPACITOR,CERAMIC 47PF/50V CH
C838	1-162-915-11	s	CAPACITOR,CERAMIC 10PF/50V CH
C839	1-164-227-11	s	CAPACITOR,CERAMIC 0.022MF/25V
C840	1-162-923-11	s	CAPACITOR,CERAMIC 47PF/50V CH
C841	1-162-910-11	s	CAPACITOR,CERAMIC 5PF/50V 1608
C842	1-164-227-11	s	CAPACITOR,CERAMIC 0.022MF/25V
C843	1-164-227-11	s	CAPACITOR,CERAMIC 0.022MF/25V
C844	1-164-217-11	s	CAPACITOR,CERAMIC 150PF/50V CH
C901	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
C902	1-162-921-11	s	CAPACITOR,CERAMIC 33PF/50V CH
C903	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
C905	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
C908	1-126-396-11	s	CAPACITOR,ELECT 47MF/16V(CHIP)
C910	1-162-919-11	s	CAPACITOR,CERAMIC 22PF/50V CH
C911	1-164-217-11	s	CAPACITOR,CERAMIC 150PF/50V CH
C912	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF

(VPR-62 BOARD(DSR-2000))

Ref. No. or Q'ty	Part No.	SP	Description
C913	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
C914	1-126-396-11	s	CAPACITOR,ELECT 47MF/16V(CHIP)
C915	1-164-227-11	s	CAPACITOR,CERAMIC 0.022MF/25V
C916	1-162-970-11	s	CAPACITOR CERAMIC 0.01MF/25V B
C917	1-162-921-11	s	CAPACITOR,CERAMIC 33PF/50V CH
C918	1-164-227-11	s	CAPACITOR,CERAMIC 0.022MF/25V
C919	1-164-230-11	s	CAPACITOR,CERAMIC 220PF/50V
C920	1-164-227-11	s	CAPACITOR,CERAMIC 0.022MF/25V
C921	1-164-227-11	s	CAPACITOR,CERAMIC 0.022MF/25V
C922	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
C923	1-126-396-11	s	CAPACITOR,ELECT 47MF/16V(CHIP)
C924	1-126-392-11	s	CAPACITOR,CHIP ELECT100MF/6.3V
C925	1-164-227-11	s	CAPACITOR,CERAMIC 0.022MF/25V
C926	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
C927	1-164-227-11	s	CAPACITOR,CERAMIC 0.022MF/25V
C928	1-162-921-11	s	CAPACITOR,CERAMIC 33PF/50V CH
C929	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
C930	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
C931	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
C932	1-164-227-11	s	CAPACITOR,CERAMIC 0.022MF/25V
C933	1-126-392-11	s	CAPACITOR,CHIP ELECT100MF/6.3V
C934	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
C935	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
C936	1-164-217-11	s	CAPACITOR,CERAMIC 150PF/50V CH
C937	1-164-227-11	s	CAPACITOR,CERAMIC 0.022MF/25V
C938	1-126-392-11	s	CAPACITOR,CHIP ELECT100MF/6.3V
C940	1-162-970-11	s	CAPACITOR CERAMIC 0.01MF/25V B
C941	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
C942	1-126-392-11	s	CAPACITOR,CHIP ELECT100MF/6.3V
C1001	1-164-227-11	s	CAPACITOR,CERAMIC 0.022MF/25V
C1002	1-164-227-11	s	CAPACITOR,CERAMIC 0.022MF/25V
C1003	1-126-392-11	s	CAPACITOR,CHIP ELECT100MF/6.3V
C1004	1-126-392-11	s	CAPACITOR,CHIP ELECT100MF/6.3V
C1005	1-164-227-11	s	CAPACITOR,CERAMIC 0.022MF/25V
C1006	1-162-920-11	s	CAPACITOR,CERAMIC 27PF/50V CH
C1007	1-162-924-11	s	CAPACITOR,CERAMIC 56PF/50V CH
C1008	1-162-920-11	s	CAPACITOR,CERAMIC 27PF/50V CH
C1009	1-164-227-11	s	CAPACITOR,CERAMIC 0.022MF/25V
C1010	1-164-227-11	s	CAPACITOR,CERAMIC 0.022MF/25V
C1011	1-164-227-11	s	CAPACITOR,CERAMIC 0.022MF/25V
C1012	1-164-227-11	s	CAPACITOR,CERAMIC 0.022MF/25V
C1013	1-164-227-11	s	CAPACITOR,CERAMIC 0.022MF/25V
C1014	1-162-964-11	s	CAPACITOR,CERAMIC 1000PF/50V B
C1015	1-135-177-21	s	CAPACITOR TANTALUM 1MF/25V
C1016	1-162-970-11	s	CAPACITOR CERAMIC 0.01MF/25V B
C1017	1-135-210-11	s	CAPACITOR TANTAL 4.7MF/10V
C1018	1-162-970-11	s	CAPACITOR CERAMIC 0.01MF/25V B
C1019	1-164-227-11	s	CAPACITOR,CERAMIC 0.022MF/25V
C1020	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
C1021	1-126-392-11	s	CAPACITOR,CHIP ELECT100MF/6.3V
C1022	1-164-227-11	s	CAPACITOR,CERAMIC 0.022MF/25V
C1023	1-164-227-11	s	CAPACITOR,CERAMIC 0.022MF/25V
C1024	1-126-392-11	s	CAPACITOR,CHIP ELECT100MF/6.3V
C1025	1-164-227-11	s	CAPACITOR,CERAMIC 0.022MF/25V
C1026	1-164-227-11	s	CAPACITOR,CERAMIC 0.022MF/25V
C1027 *3	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
C1028 *3	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
C1029 *3	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF

(VPR-62 BOARD(DSR-2000))

Ref. No. or Q'ty	Part No.	SP	Description
C1030 *2	1-126-392-11	s	CAPACITOR,CHIP ELECT100MF/6.3V
*1	1-126-396-11	s	CAPACITOR,ELECT 47MF/16V(CHIP)
C1031	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
C1032 *3	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
C1035 *1	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
C1036 *1	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
C1037	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
C1038	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
C1039	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
C1040 *1	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
C1041	1-126-392-11	s	CAPACITOR,CHIP ELECT100MF/6.3V
C1042	1-164-227-11	s	CAPACITOR,CERAMIC 0.022MF/25V
C1043 *1	1-164-227-11	s	CAPACITOR,CERAMIC 0.022MF/25V
C1045	1-164-227-11	s	CAPACITOR,CERAMIC 0.022MF/25V
C1046 *1	1-164-227-11	s	CAPACITOR,CERAMIC 0.022MF/25V
C1047	1-164-227-11	s	CAPACITOR,CERAMIC 0.022MF/25V
C1048	1-164-227-11	s	CAPACITOR,CERAMIC 0.022MF/25V
C1049	1-164-227-11	s	CAPACITOR,CERAMIC 0.022MF/25V
C1050	1-164-227-11	s	CAPACITOR,CERAMIC 0.022MF/25V
C1051	1-164-227-11	s	CAPACITOR,CERAMIC 0.022MF/25V
C1052	1-164-227-11	s	CAPACITOR,CERAMIC 0.022MF/25V
C1053	1-126-392-11	s	CAPACITOR,CHIP ELECT100MF/6.3V
C1054	1-164-227-11	s	CAPACITOR,CERAMIC 0.022MF/25V
C1055	1-164-227-11	s	CAPACITOR,CERAMIC 0.022MF/25V
C1056	1-164-227-11	s	CAPACITOR,CERAMIC 0.022MF/25V
C1057 *1	1-164-227-11	s	CAPACITOR,CERAMIC 0.022MF/25V
C1058	1-126-392-11	s	CAPACITOR,CHIP ELECT100MF/6.3V
C1059	1-126-392-11	s	CAPACITOR,CHIP ELECT100MF/6.3V
C1060	1-126-392-11	s	CAPACITOR,CHIP ELECT100MF/6.3V
C1061	1-164-227-11	s	CAPACITOR,CERAMIC 0.022MF/25V
C1062	1-164-227-11	s	CAPACITOR,CERAMIC 0.022MF/25V
C1063	1-164-227-11	s	CAPACITOR,CERAMIC 0.022MF/25V
C1064	1-164-227-11	s	CAPACITOR,CERAMIC 0.022MF/25V
C1065	1-164-227-11	s	CAPACITOR,CERAMIC 0.022MF/25V
C1066 *3	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
C1067	1-164-227-11	s	CAPACITOR,CERAMIC 0.022MF/25V
C1068	1-164-227-11	s	CAPACITOR,CERAMIC 0.022MF/25V
C1069	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
C1070	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
C1071	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
C1072	1-135-179-21	s	CAPACITOR,TANTALUM 2.2MF/16V
C1073	1-165-176-11	s	CAPACITOR,CERAMIC 47000PF/16V
C1074	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
C1075	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
C1076	1-162-964-11	s	CAPACITOR,CERAMIC 1000PF/50V B
C1077	1-162-964-11	s	CAPACITOR,CERAMIC 1000PF/50V B
C1078	1-162-964-11	s	CAPACITOR,CERAMIC 1000PF/50V B
C1079	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
C1080 *2	1-135-177-21	s	CAPACITOR TANTALUM 1MF/25V
C1081 *2	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
C1082 *2	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
C1083 *2	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
C1084 *2	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
C1085 *2	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
C1086 *2	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
CT500	1-141-322-11	s	CAPACITOR,VAR,TRIMMER
D1	8-719-941-04	s	DIODE SB007-03CP
D2	8-719-941-04	s	DIODE SB007-03CP

(VPR-62 BOARD(DSR-2000))

Ref. No. or Q'ty	Part No.	SP	Description
D3	8-719-941-04	s	DIODE SB007-03CP
D4	8-719-941-04	s	DIODE SB007-03CP
D5	8-719-941-04	s	DIODE SB007-03CP
D6	8-719-941-04	s	DIODE SB007-03CP
D101	8-719-941-23	s	DIODE DA204U
D102	8-719-024-81	s	DIODE 1SS300-TE85L
D104	8-719-989-08	s	DIODE RB717F
D200	8-719-941-04	s	DIODE SB007-03CP
D201	8-719-024-81	s	DIODE 1SS300-TE85L
D300	8-719-041-39	s	DIODE KV1470 (5MA)
D302	8-719-024-81	s	DIODE 1SS300-TE85L
D303	8-719-941-23	s	DIODE DA204U
D304	8-719-941-23	s	DIODE DA204U
D306	8-719-941-23	s	DIODE DA204U
D400	8-719-941-23	s	DIODE DA204U
D401	8-719-045-99	s	DIODE RD2.2M-B
D402	8-719-045-99	s	DIODE RD2.2M-B
D403	8-719-941-04	s	DIODE SB007-03CP
D501	8-719-024-81	s	DIODE 1SS300-TE85L
D502	8-719-041-39	s	DIODE KV1470 (5MA)
D503	8-719-978-04	s	DIODE DTZ-TT11-3.3B
D601	8-719-024-81	s	DIODE 1SS300-TE85L
D801	8-719-976-99	s	DIODE DTZ5.1B
D802	8-719-024-81	s	DIODE 1SS300-TE85L
D900	8-719-941-23	s	DIODE DA204U
D901	8-719-941-23	s	DIODE DA204U
D1000 *1	8-719-987-43	s	LED CL-150PG-CD
D1001	8-719-941-23	s	DIODE DA204U
D1002	8-719-041-39	s	DIODE KV1470 (5MA)
D1003	8-719-027-95	s	DIODE HSM88WK
D1004 *2	8-719-404-35	s	DIODE MA141WK
FB200	1-543-309-21	s	BEAD,FERRITE
FB400	1-543-309-21	s	BEAD,FERRITE
FL1	1-233-674-21	s	FILTER, EMI
FL2	1-233-674-21	s	FILTER, EMI
FL100	1-233-614-11	s	FILTER, LOW PASS
FL200	1-233-614-11	s	FILTER, LOW PASS
FL201	1-233-598-11	s	FILTER, LOW PASS
FL202	1-233-598-11	s	FILTER, LOW PASS
FL601	1-233-614-11	s	FILTER, LOW PASS
FL602	1-233-598-11	s	FILTER, LOW PASS
FL603	1-233-598-11	s	FILTER, LOW PASS
FL701	1-239-771-11	s	FILTER, LOW PASS
IC1	8-759-172-41	s	IC L78M09T-TL
IC2	8-759-172-41	s	IC L78M09T-TL
IC3	8-759-539-90	s	IC LM2940SX-5.0
IC4	8-759-539-90	s	IC LM2940SX-5.0
IC5	8-759-539-89	s	IC LM2990SX-5.0
IC6	8-759-539-89	s	IC LM2990SX-5.0
IC7	8-759-549-20	s	IC SN74LV541APWR
IC8	8-759-549-20	s	IC SN74LV541APWR
IC9	8-759-490-41	s	IC TC74VHCT541AFT(EL)
IC10	8-759-549-20	s	IC SN74LV541APWR
IC101	8-759-082-61	s	IC TC4W53FU
IC102	8-759-058-64	s	IC TC7S32FU-TE85R
IC103	8-759-082-61	s	IC TC4W53FU
IC104	8-759-082-61	s	IC TC4W53FU

(VPR-62 BOARD(DSR-2000))

Ref. No. or Q'ty	Part No.	SP	Description
IC105 *c	8-759-669-73	s	IC TL082CPWR
*b	8-759-359-66	s	IC TL082CPW (E05)
IC200	8-759-387-83	s	IC MB40569PFV-ER
IC201	8-759-456-03	s	IC M66256GP (E2)
IC202	8-759-456-03	s	IC M66256GP (E2)
IC203	8-759-456-03	s	IC M66256GP (E2)
IC204	8-759-513-76	s	IC CXD8161AQ
IC205	8-759-058-58	s	IC TC7S04FU-TE85R
IC206	8-759-058-64	s	IC TC7S32FU-TE85R
IC207	8-752-363-60	s	IC CXD2307R-T4
IC208 *c	8-759-669-73	s	IC TL082CPWR
*b	8-759-359-66	s	IC TL082CPW (E05)
IC209	8-752-052-73	s	IC CXA1451M
IC210	8-752-052-73	s	IC CXA1451M
IC211	8-752-052-73	s	IC CXA1451M
IC300	8-752-339-04	s	IC CXD2208Q
IC301	8-759-058-58	s	IC TC7S04FU-TE85R
IC302	8-759-184-64	s	IC TC4W66FU
IC303 *c	8-759-669-72	s	IC TL064CPWR
*b	8-759-076-06	s	IC TL064CPW
IC304 *c	8-759-669-73	s	IC TL082CPWR
*b	8-759-359-66	s	IC TL082CPW (E05)
IC305 *c	8-759-669-45	s	IC TL062CPWR-12
*b	8-759-173-16	s	IC TL062CPW
IC306	8-759-058-58	s	IC TC7S04FU-TE85R
IC307	8-759-082-60	s	IC TC7S66FU
IC308	8-759-520-55	s	IC CXD8243AM
IC309	8-759-058-58	s	IC TC7S04FU-TE85R
IC310	8-759-082-60	s	IC TC7S66FU
IC400	8-759-523-01	s	IC TC74HC4052AFT(EL)
IC401	8-759-490-41	s	IC TC74VHCT541AFT(EL)
IC402 *c	8-759-669-74	s	IC TL084CPWR-12
*b	8-759-287-54	s	IC TL084CPW (E20)
IC403	8-759-640-14	s	IC TK15420MTL
IC404	8-759-082-61	s	IC TC4W53FU
IC405	8-759-523-95	s	IC TC74VHC74FT(EL)
IC406	8-759-324-03	s	IC HA17431UA(TL)
IC407	8-759-324-03	s	IC HA17431UA(TL)
IC408	8-759-447-90	s	IC TLC5733AIPM
IC409	8-752-376-32	s	IC CXD2310AR
IC410	8-759-198-63	s	IC S-81230SG-QB-T1
IC411	8-759-549-20	s	IC SN74LV541APWR
IC412	8-759-549-20	s	IC SN74LV541APWR
IC413	8-759-549-20	s	IC SN74LV541APWR
IC414	8-759-196-97	s	IC TC7SH32FU (TE85R)
IC415	8-759-196-97	s	IC TC7SH32FU (TE85R)
IC416	8-759-196-96	s	IC TC7SH08FU (TE85R)
IC500	8-759-549-20	s	IC SN74LV541APWR
IC503	8-759-524-07	s	IC TC74VHC138FT(EL)
IC504	8-759-564-49	s	IC TC7W53FU-TE12R
IC505	8-759-271-86	s	IC TC7SH04FU
IC508	8-759-523-97	s	IC TC74VHC123AFT(EL)
IC509	8-759-987-27	s	IC LM1881M
IC510	8-759-196-12	s	IC SN74LS221DB
IC511	8-759-523-95	s	IC TC74VHC74FT(EL)
IC512	8-759-082-57	s	IC TC7W04FU
IC513	8-759-196-12	s	IC SN74LS221DB
IC514	8-759-196-97	s	IC TC7SH32FU (TE85R)
IC515	8-759-530-05	s	IC TC4053BFT (EL.N)
IC516	8-759-083-94	s	IC TC7W74FU

(VPR-62 BOARD(DSR-2000))

Ref. No. or Q'ty	Part No.	SP	Description
IC517	8-759-523-97	s	IC TC74VHC123AFT(EL)
IC518	8-759-082-61	s	IC TC4W53FU
IC519	8-759-271-86	s	IC TC7SH04FU
IC520	8-759-196-96	s	IC TC7SH08FU (TE85R)
IC522	8-759-196-93	s	IC TC7SH00FU-TE85R
IC523	8-759-198-63	s	IC S-81230SG-QB-T1
IC524	8-759-524-19	s	IC TC74VHC164FT(EL)
IC525	8-759-343-09	s	IC CXD2193AR-ER
IC526	8-759-490-41	s	IC TC74VHCT541AFT(EL)
IC601	8-759-278-58	s	IC NJM4558V (TE2)
IC603	8-759-278-58	s	IC NJM4558V (TE2)
IC604	8-759-278-58	s	IC NJM4558V (TE2)
IC605 *5	8-759-524-50	s	IC TC74VHC541FT(EL)
IC606 *5	8-759-497-44	s	IC TC7WH125FU (TE12R)
IC607 *5	8-759-447-77	s	IC TC7WH74FU (TE12R)
IC608	8-759-198-63	s	IC S-81230SG-QB-T1
IC609	8-752-363-60	s	IC CXD2307R-T4
IC610	8-752-052-82	s	IC CXA1432M
IC611	8-759-640-14	s	IC TK15420MTL
IC612	8-759-524-10	s	IC TC74VHC157FT (EL)
IC613 *2	8-759-196-97	s	IC TC7SH32FU (TE85R)
IC701	8-752-054-80	s	IC CXA1521M
IC702	8-752-054-80	s	IC CXA1521M
IC703	8-759-196-12	s	IC SN74LS221DB
IC704 *c	8-759-669-74	s	IC TL084CPWR-12
*b	8-759-287-54	s	IC TL084CPW (E20)
IC705	8-759-082-61	s	IC TC4W53FU
IC706	8-759-082-61	s	IC TC4W53FU
IC707 *c	8-759-669-73	s	IC TL082CPWR
*b	8-759-359-66	s	IC TL082CPW (E05)
IC708	8-752-090-56	s	IC CXA3178M-T4
IC709	8-752-061-02	s	IC CXA1450M
IC801	8-752-052-73	s	IC CXA1451M
IC802	8-759-640-14	s	IC TK15420MTL
IC803	8-759-082-61	s	IC TC4W53FU
IC804	8-752-052-73	s	IC CXA1451M
IC805	8-759-082-59	s	IC TC7W32FU
IC806 *c	8-759-669-74	s	IC TL084CPWR-12
*b	8-759-287-54	s	IC TL084CPW (E20)
IC807	8-759-082-61	s	IC TC4W53FU
IC808	8-752-052-73	s	IC CXA1451M
IC901	8-759-082-57	s	IC TC7W04FU
IC903	8-759-523-02	s	IC TC74HC4053AFT(EL)
IC904	8-752-061-02	s	IC CXA1450M
IC905 *c	8-759-669-45	s	IC TL062CPWR-12
*b	8-759-173-16	s	IC TL062CPW
IC906 *c	8-759-669-72	s	IC TL064CPWR-12
*b	8-759-076-06	s	IC TL064CPW
IC907	8-752-052-73	s	IC CXA1451M
IC908	8-759-278-58	s	IC NJM4558V (TE2)
IC909	8-759-324-03	s	IC HA17431UA(TL)
IC910	8-759-987-27	s	IC LM1881M
IC911	8-759-248-78	s	IC MB88102PFV-G-BND-ER
IC912	8-759-523-97	s	IC TC74VHC123AFT(EL)
IC1001	8-759-082-61	s	IC TC4W53FU
IC1002	8-759-702-08	s	IC NJM360M
IC1003	8-752-335-47	s	IC CXD1216M
IC1004	8-759-523-02	s	IC TC74HC4053AFT(EL)
IC1005	8-759-058-58	s	IC TC7S04FU-TE85R
IC1006	8-759-271-86	s	IC TC7SH04FU

(VPR-62 BOARD(DSR-2000))

Ref. No. or Q'ty	Part No.	SP	Description
IC1008	8-752-414-92	s	IC CXD2309AQ-T6
IC1009*1	8-752-334-64	s	IC CXD1171M
IC1010	8-759-702-08	s	IC NJM360M
IC1011	8-759-271-88	s	IC TC7SHU04FU
IC1012	8-759-271-86	s	IC TC7SH04FU
IC1111*a	8-759-681-40	s	IC CXD9128AR
*2	8-759-650-00	s	IC CXD9128R
IC1112*2	8-759-196-93	s	IC TC7SH00FU-TE85R
L1	1-414-400-11	s	INDUCTOR, 22UH
L2	1-424-641-11	s	COIL,CHOKE (SHIELD)
L3	1-424-641-11	s	COIL,CHOKE (SHIELD)
L4	1-414-400-11	s	INDUCTOR, 22UH
L5	1-414-400-11	s	INDUCTOR, 22UH
L6	1-414-400-11	s	INDUCTOR, 22UH
L7	1-414-400-11	s	INDUCTOR, 22UH
L8	1-414-400-11	s	INDUCTOR, 22UH
L101	1-414-398-11	s	INDUCTOR (SMD) 10UH
L102	1-414-398-11	s	INDUCTOR (SMD) 10UH
L103	1-414-398-11	s	INDUCTOR (SMD) 10UH
L200	1-414-394-11	s	INDUCTOR (SMD) 2.2UH
L201	1-414-398-11	s	INDUCTOR (SMD) 10UH
L202	1-410-373-31	s	CHIP INDUCTOR 2.2UH (3225)
L203	1-410-373-31	s	CHIP INDUCTOR 2.2UH (3225)
L204	1-410-373-31	s	CHIP INDUCTOR 2.2UH (3225)
L205	1-414-398-11	s	INDUCTOR (SMD) 10UH
L206	1-414-398-11	s	INDUCTOR (SMD) 10UH
L301	1-414-401-11	s	INDUCTOR (SMD) 33UH
L302	1-414-395-11	s	INDUCTOR (SMD) 3.3UH
L303	1-414-398-11	s	INDUCTOR (SMD) 10UH
L304	1-414-398-11	s	INDUCTOR (SMD) 10UH
L305	1-414-402-11	s	INDUCTOR (SMD) 47UH
L306	1-410-378-11	s	INDUCTOR,CHIP 5.6UH (3225)
L307	1-414-404-11	s	INDUCTOR (SMD) 100UH
L308	1-414-398-11	s	INDUCTOR (SMD) 10UH
L309	1-414-404-11	s	INDUCTOR (SMD) 100UH
L310	1-414-404-11	s	INDUCTOR (SMD) 100UH
L311	1-414-404-11	s	INDUCTOR (SMD) 100UH
L312	1-414-398-11	s	INDUCTOR (SMD) 10UH
L313	1-414-398-11	s	INDUCTOR (SMD) 10UH
L400	1-414-398-11	s	INDUCTOR (SMD) 10UH
L401	1-414-398-11	s	INDUCTOR (SMD) 10UH
L402	1-414-398-11	s	INDUCTOR (SMD) 10UH
L403	1-414-398-11	s	INDUCTOR (SMD) 10UH
L500	1-414-400-11	s	INDUCTOR, 22UH
L501	1-414-400-11	s	INDUCTOR, 22UH
L502	1-410-390-11	s	CHIP INDUCTOR 56UH (3225)
L503	1-410-655-31	s	INDUCTOR,CHIP 120UH (3225)
L504	1-414-398-11	s	INDUCTOR (SMD) 10UH
L506	1-414-398-11	s	INDUCTOR (SMD) 10UH
L601	1-414-400-11	s	INDUCTOR, 22UH
L602	1-414-400-11	s	INDUCTOR, 22UH
L603	1-414-400-11	s	INDUCTOR, 22UH
L604	1-414-400-11	s	INDUCTOR, 22UH
L605	1-414-400-11	s	INDUCTOR, 22UH
L606	1-414-400-11	s	INDUCTOR, 22UH
L607	1-414-398-11	s	INDUCTOR (SMD) 10UH
L608	1-414-398-11	s	INDUCTOR (SMD) 10UH
L609	1-414-400-11	s	INDUCTOR, 22UH

(VPR-62 BOARD(DSR-2000))

Ref. No. or Q'ty	Part No.	SP	Description
L610	1-414-401-11	s	INDUCTOR (SMD) 33UH
L611	1-414-400-11	s	INDUCTOR, 22UH
L612	1-414-400-11	s	INDUCTOR, 22UH
L613	1-414-401-11	s	INDUCTOR (SMD) 33UH
L701	1-414-400-11	s	INDUCTOR, 22UH
L702	1-414-400-11	s	INDUCTOR, 22UH
L703	1-414-404-11	s	INDUCTOR (SMD) 100UH
L704	1-414-400-11	s	INDUCTOR, 22UH
L705	1-414-402-11	s	INDUCTOR (SMD) 47UH
L706	1-414-402-11	s	INDUCTOR (SMD) 47UH
L707	1-414-402-11	s	INDUCTOR (SMD) 47UH
L708	1-414-402-11	s	INDUCTOR (SMD) 47UH
L709	1-414-400-11	s	INDUCTOR, 22UH
L801	1-414-400-11	s	INDUCTOR, 22UH
L802	1-414-400-11	s	INDUCTOR, 22UH
L803	1-414-400-11	s	INDUCTOR, 22UH
L804	1-414-403-11	s	INDUCTOR, 68UH
L805	1-414-402-11	s	INDUCTOR (SMD) 47UH
L806	1-414-401-11	s	INDUCTOR (SMD) 33UH
L901	1-414-403-11	s	INDUCTOR, 68UH
L902	1-414-404-11	s	INDUCTOR (SMD) 100UH
L903	1-414-403-11	s	INDUCTOR, 68UH
L904	1-414-400-11	s	INDUCTOR, 22UH
L905	1-414-400-11	s	INDUCTOR, 22UH
L906	1-414-400-11	s	INDUCTOR, 22UH
L907	1-414-400-11	s	INDUCTOR, 22UH
L1001	1-414-400-11	s	INDUCTOR, 22UH
L1002	1-414-400-11	s	INDUCTOR, 22UH
L1003	1-414-402-11	s	INDUCTOR (SMD) 47UH
L1004	1-414-402-11	s	INDUCTOR (SMD) 47UH
L1005	1-414-400-11	s	INDUCTOR, 22UH
L1006	1-414-400-11	s	INDUCTOR, 22UH
L1007	1-414-398-11	s	INDUCTOR (SMD) 10UH
L1008 *2	1-410-374-11	s	INDUCTOR,CHIP 2.7UH
*1	1-414-395-11	s	INDUCTOR (SMD) 3.3UH
L1009	1-414-400-11	s	INDUCTOR, 22UH
L1010	1-414-400-11	s	INDUCTOR, 22UH
L1011	1-414-400-11	s	INDUCTOR, 22UH
L1012	1-414-400-11	s	INDUCTOR, 22UH
L1013	1-414-400-11	s	INDUCTOR, 22UH
L1014	1-414-400-11	s	INDUCTOR, 22UH
LV505	1-411-275-21	s	COIL, VARIABLE
PS1	⚠ 1-576-124-11	s	LINK IC 1A (3225)
PS2	⚠ 1-533-282-21	s	CIRCUIT PROTECTOR 2A (3225)
PS3	⚠ 1-533-282-21	s	CIRCUIT PROTECTOR 2A (3225)
PS4	⚠ 1-533-282-21	s	CIRCUIT PROTECTOR 2A (3225)
PS5	⚠ 1-576-124-11	s	LINK IC 1A (3225)
Q101	8-729-907-46	s	TRANSISTOR IMZ1
Q102	8-729-903-10	s	TRANSISTOR FMW1
Q103	8-729-117-32	s	TRANSISTOR 2SC4177
Q104	8-729-140-63	s	TRANSISTOR 2SA1611-M5M6
Q105	8-729-140-63	s	TRANSISTOR 2SA1611-M5M6
Q106	8-729-117-32	s	TRANSISTOR 2SC4177
Q107	8-729-117-32	s	TRANSISTOR 2SC4177
Q108 *5	8-729-026-56	s	TRANSISTOR FMS2A-T148
*3	8-729-904-04	s	TRANSISTOR FMS2
Q109	8-729-140-63	s	TRANSISTOR 2SA1611-M5M6
Q110	8-729-117-72	s	TRANSISTOR 2SC4178

(VPR-62 BOARD(DSR-2000))

Ref. No. or Q'ty	Part No.	SP	Description
Q111	8-729-907-46	s	TRANSISTOR IMZ1
Q112	8-729-907-46	s	TRANSISTOR IMZ1
Q113	8-729-117-72	s	TRANSISTOR 2SC4178
Q114	8-729-117-32	s	TRANSISTOR 2SC4177
Q115	8-729-117-72	s	TRANSISTOR 2SC4178
Q116 *5	8-729-026-56	s	TRANSISTOR FMS2A-T148
*3	8-729-904-04	s	TRANSISTOR FMS2
Q200	8-729-029-14	s	TRANSISTOR DTC144EUA-T106
Q201	8-729-117-32	s	TRANSISTOR 2SC4177
Q202	8-729-117-32	s	TRANSISTOR 2SC4177
Q203	8-729-117-32	s	TRANSISTOR 2SC4177
Q300	8-729-029-14	s	TRANSISTOR DTC144EUA-T106
Q301	8-729-140-63	s	TRANSISTOR 2SA1611-M5M6
Q302	8-729-117-32	s	TRANSISTOR 2SC4177
Q303	8-729-117-32	s	TRANSISTOR 2SC4177
Q304	8-729-117-32	s	TRANSISTOR 2SC4177
Q305	8-729-140-63	s	TRANSISTOR 2SA1611-M5M6
Q306	8-729-140-63	s	TRANSISTOR 2SA1611-M5M6
Q307	8-729-140-63	s	TRANSISTOR 2SA1611-M5M6
Q308	8-729-117-32	s	TRANSISTOR 2SC4177
Q309	8-729-117-32	s	TRANSISTOR 2SC4177
Q310	8-729-140-63	s	TRANSISTOR 2SA1611-M5M6
Q311	8-729-029-14	s	TRANSISTOR DTC144EUA-T106
Q312	8-729-140-63	s	TRANSISTOR 2SA1611-M5M6
Q313	8-729-140-63	s	TRANSISTOR 2SA1611-M5M6
Q315	8-729-140-63	s	TRANSISTOR 2SA1611-M5M6
Q400	8-729-117-72	s	TRANSISTOR 2SC4178
Q401	8-729-117-32	s	TRANSISTOR 2SC4177
Q402	8-729-117-32	s	TRANSISTOR 2SC4177
Q403	8-729-117-32	s	TRANSISTOR 2SC4177
Q404	8-729-117-32	s	TRANSISTOR 2SC4177
Q405	8-729-117-72	s	TRANSISTOR 2SC4178
Q406	8-729-117-32	s	TRANSISTOR 2SC4177
Q407	8-729-117-72	s	TRANSISTOR 2SC4178
Q408	8-729-422-44	s	TRANSISTOR 2SK663
Q409	8-729-422-44	s	TRANSISTOR 2SK663
Q410	8-729-422-44	s	TRANSISTOR 2SK663
Q411	8-729-422-44	s	TRANSISTOR 2SK663
Q412	8-729-140-63	s	TRANSISTOR 2SA1611-M5M6
Q413	8-729-140-63	s	TRANSISTOR 2SA1611-M5M6
Q414	8-729-140-63	s	TRANSISTOR 2SA1611-M5M6
Q415	8-729-117-32	s	TRANSISTOR 2SC4177
Q416	8-729-117-32	s	TRANSISTOR 2SC4177
Q417	8-729-117-72	s	TRANSISTOR 2SC4178
Q418	8-729-117-72	s	TRANSISTOR 2SC4178
Q419	8-729-117-72	s	TRANSISTOR 2SC4178
Q420	8-729-117-72	s	TRANSISTOR 2SC4178
Q421	8-729-140-63	s	TRANSISTOR 2SA1611-M5M6
Q422	8-729-140-63	s	TRANSISTOR 2SA1611-M5M6
Q501	8-729-117-32	s	TRANSISTOR 2SC4177
Q502	8-729-117-32	s	TRANSISTOR 2SC4177
Q503	8-729-140-63	s	TRANSISTOR 2SA1611-M5M6
Q504	8-729-140-63	s	TRANSISTOR 2SA1611-M5M6
Q601	8-729-117-32	s	TRANSISTOR 2SC4177
Q602	8-729-117-32	s	TRANSISTOR 2SC4177
Q603	8-729-140-63	s	TRANSISTOR 2SA1611-M5M6
Q604	8-729-140-63	s	TRANSISTOR 2SA1611-M5M6
Q605	8-729-117-32	s	TRANSISTOR 2SC4177
Q606	8-729-140-63	s	TRANSISTOR 2SA1611-M5M6

(VPR-62 BOARD(DSR-2000))

Ref. No. or Q'ty	Part No.	SP	Description
Q607	8-729-117-32	s	TRANSISTOR 2SC4177
Q608	8-729-117-32	s	TRANSISTOR 2SC4177
Q609	8-729-422-44	s	TRANSISTOR 2SK663
Q610	8-729-422-44	s	TRANSISTOR 2SK663
Q611	8-729-140-63	s	TRANSISTOR 2SA1611-M5M6
Q612	8-729-117-32	s	TRANSISTOR 2SC4177
Q613	8-729-140-63	s	TRANSISTOR 2SA1611-M5M6
Q614	8-729-117-32	s	TRANSISTOR 2SC4177
Q615	8-729-117-32	s	TRANSISTOR 2SC4177
Q616	8-729-422-44	s	TRANSISTOR 2SK663
Q617	8-729-422-44	s	TRANSISTOR 2SK663
Q618	8-729-140-63	s	TRANSISTOR 2SA1611-M5M6
Q619	8-729-029-14	s	TRANSISTOR DTC144EUA-T106
Q701	8-729-143-14	s	TRANSISTOR 2SC4176-B35
Q702	8-729-140-63	s	TRANSISTOR 2SA1611-M5M6
Q703	8-729-117-32	s	TRANSISTOR 2SC4177
Q704	8-729-140-63	s	TRANSISTOR 2SA1611-M5M6
Q705	8-729-117-32	s	TRANSISTOR 2SC4177
Q706	8-729-117-32	s	TRANSISTOR 2SC4177
Q707	8-729-117-32	s	TRANSISTOR 2SC4177
Q708	8-729-117-32	s	TRANSISTOR 2SC4177
Q709	8-729-117-32	s	TRANSISTOR 2SC4177
Q710	8-729-117-32	s	TRANSISTOR 2SC4177
Q711	8-729-143-14	s	TRANSISTOR 2SC4176-B35
Q712	8-729-903-82	s	TRANSISTOR FMW2
Q713	8-729-903-82	s	TRANSISTOR FMW2
Q801	8-729-904-41	s	TRANSISTOR FMY3
Q802	8-729-117-32	s	TRANSISTOR 2SC4177
Q803	8-729-143-14	s	TRANSISTOR 2SC4176-B35
Q804	8-729-117-32	s	TRANSISTOR 2SC4177
Q805	8-729-904-41	s	TRANSISTOR FMY3
Q806	8-729-143-14	s	TRANSISTOR 2SC4176-B35
Q807	8-729-140-63	s	TRANSISTOR 2SA1611-M5M6
Q808	8-729-117-32	s	TRANSISTOR 2SC4177
Q809	8-729-140-63	s	TRANSISTOR 2SA1611-M5M6
Q810	8-729-117-32	s	TRANSISTOR 2SC4177
Q811	8-729-117-32	s	TRANSISTOR 2SC4177
Q903	8-729-117-32	s	TRANSISTOR 2SC4177
Q905	8-729-117-32	s	TRANSISTOR 2SC4177
Q906	8-729-117-32	s	TRANSISTOR 2SC4177
Q907	8-729-904-41	s	TRANSISTOR FMY3
Q908	8-729-117-32	s	TRANSISTOR 2SC4177
Q909	8-729-117-32	s	TRANSISTOR 2SC4177
Q1001	8-729-117-32	s	TRANSISTOR 2SC4177
Q1002	8-729-117-32	s	TRANSISTOR 2SC4177
Q1003	8-729-029-14	s	TRANSISTOR DTC144EUA-T106
Q1004 *3	8-729-029-14	s	TRANSISTOR DTC144EUA-T106
Q1005	8-729-117-32	s	TRANSISTOR 2SC4177
Q1006	8-729-117-32	s	TRANSISTOR 2SC4177
Q1007	8-729-117-32	s	TRANSISTOR 2SC4177
Q1008 *1	8-729-117-32	s	TRANSISTOR 2SC4177
Q1009	8-729-029-14	s	TRANSISTOR DTC144EUA-T106
Q1010	8-729-140-63	s	TRANSISTOR 2SA1611-M5M6
Q1011	8-729-140-63	s	TRANSISTOR 2SA1611-M5M6
R1	1-216-833-11	s	RESISTOR,CHIP 10K 1/16W 1608
R2 *1	1-216-833-11	s	RESISTOR,CHIP 10K 1/16W 1608
R3	1-216-833-11	s	RESISTOR,CHIP 10K 1/16W 1608
R4	1-216-833-11	s	RESISTOR,CHIP 10K 1/16W 1608
R6	1-216-864-11	s	RESISTOR,CHIP 0 1/16W (1608)

(VPR-62 BOARD(DSR-2000))

Ref. No. or Q'ty	Part No.	SP	Description
R7	1-216-864-11	s	RESISTOR,CHIP 0 1/16W (1608)
R8	1-216-864-11	s	RESISTOR,CHIP 0 1/16W (1608)
R9 *2	1-216-864-11	s	RESISTOR,CHIP 0 1/16W (1608)
R10 *2	1-216-864-11	s	RESISTOR,CHIP 0 1/16W (1608)
R11 *2	1-216-864-11	s	RESISTOR,CHIP 0 1/16W (1608)
R12 *4	1-216-296-91	s	CONDUCTOR,CHIP (3216)
R13 *4	1-216-296-91	s	CONDUCTOR,CHIP (3216)
R14 *4	1-216-296-91	s	CONDUCTOR,CHIP (3216)
R15 *4	1-216-296-91	s	CONDUCTOR,CHIP (3216)
R16 *4	1-216-296-91	s	CONDUCTOR,CHIP (3216)
R101	1-216-845-11	s	RESISTOR,CHIP 100K 1/16W(1608)
R102	1-218-847-11	s	RESISTOR, CHIP 1K 1/16W (1608)
R103	1-218-847-11	s	RESISTOR, CHIP 1K 1/16W (1608)
R104	1-216-826-11	s	RESISTOR,CHIP 2.7K 1/16W 1608
R106	1-216-845-11	s	RESISTOR,CHIP 100K 1/16W(1608)
R107	1-216-833-11	s	RESISTOR,CHIP 10K 1/16W 1608
R108	1-216-833-11	s	RESISTOR,CHIP 10K 1/16W 1608
R109	1-216-829-11	s	RESISTOR, CHIP 4.7K 1/16W 1608
R110	1-216-809-11	s	RESISTOR,CHIP 100 1/16W 1608
R111	1-218-847-11	s	RESISTOR, CHIP 1K 1/16W (1608)
R112	1-218-823-11	s	RESISTOR,CHIP 100 1/16W (1608)
R113	1-218-847-11	s	RESISTOR, CHIP 1K 1/16W (1608)
R114	1-216-826-11	s	RESISTOR,CHIP 2.7K 1/16W 1608
R115	1-216-821-11	s	RESISTOR,CHIP 1.0K 1/16W(1608)
R116	1-216-809-11	s	RESISTOR,CHIP 100 1/16W 1608
R117	1-218-847-11	s	RESISTOR, CHIP 1K 1/16W (1608)
R118	1-216-826-11	s	RESISTOR,CHIP 2.7K 1/16W 1608
R119	1-216-809-11	s	RESISTOR,CHIP 100 1/16W 1608
R120	1-218-847-11	s	RESISTOR, CHIP 1K 1/16W (1608)
R121	1-218-847-11	s	RESISTOR, CHIP 1K 1/16W (1608)
R122	1-218-823-11	s	RESISTOR,CHIP 100 1/16W (1608)
R123	1-216-825-11	s	RESISTOR,CHIP 2.2K 1/16W 1608
R124	1-216-821-11	s	RESISTOR,CHIP 1.0K 1/16W(1608)
R125	1-216-819-11	s	RESISTOR,CHIP 680 1/16W 1608
R126	1-218-835-11	s	RESISTOR,CHIP 330 1/16W (1608)
R127	1-218-835-11	s	RESISTOR,CHIP 330 1/16W (1608)
R128	1-216-819-11	s	RESISTOR,CHIP 680 1/16W 1608
R129	1-218-847-11	s	RESISTOR, CHIP 1K 1/16W (1608)
R130	1-218-847-11	s	RESISTOR, CHIP 1K 1/16W (1608)
R131	1-216-809-11	s	RESISTOR,CHIP 100 1/16W 1608
R132	1-216-809-11	s	RESISTOR,CHIP 100 1/16W 1608
R133	1-216-821-11	s	RESISTOR,CHIP 1.0K 1/16W(1608)
R134	1-216-821-11	s	RESISTOR,CHIP 1.0K 1/16W(1608)
R135	1-216-821-11	s	RESISTOR,CHIP 1.0K 1/16W(1608)
R136	1-216-821-11	s	RESISTOR,CHIP 1.0K 1/16W(1608)
R137	1-218-837-11	s	RESISTOR,CHIP 390 1/16W (1608)
R138	1-216-825-11	s	RESISTOR,CHIP 2.2K 1/16W 1608
R139	1-216-815-11	s	RESISTOR,CHIP 330 1/16W 1608
R140	1-216-829-11	s	RESISTOR, CHIP 4.7K 1/16W 1608
R141	1-216-821-11	s	RESISTOR,CHIP 1.0K 1/16W(1608)
R142	1-216-829-11	s	RESISTOR, CHIP 4.7K 1/16W 1608
R143	1-216-825-11	s	RESISTOR,CHIP 2.2K 1/16W 1608
R144	1-216-809-11	s	RESISTOR,CHIP 100 1/16W 1608
R145	1-216-829-11	s	RESISTOR, CHIP 4.7K 1/16W 1608
R146	1-216-821-11	s	RESISTOR,CHIP 1.0K 1/16W(1608)
R147	1-216-857-11	s	RESISTOR, CHIP 1.0M 1/16W 1608
R148	1-216-825-11	s	RESISTOR,CHIP 2.2K 1/16W 1608
R149	1-216-829-11	s	RESISTOR, CHIP 4.7K 1/16W 1608
R150	1-216-821-11	s	RESISTOR,CHIP 1.0K 1/16W(1608)

(VPR-62 BOARD(DSR-2000))

Ref. No. or Q'ty	Part No.	SP	Description
R151	1-218-847-11	s	RESISTOR, CHIP 1K 1/16W (1608)
R201	1-216-805-11	s	RESISTOR,CHIP 47 1/16W 1608
R203	1-216-833-11	s	RESISTOR,CHIP 10K 1/16W 1608
R204	1-216-833-11	s	RESISTOR,CHIP 10K 1/16W 1608
R205	1-216-841-11	s	RESISTOR, CHIP 47K 1/16W 1608
R206	1-218-859-11	s	RESISTOR,CHIP 3.3K 1/16W(1608)
R207	1-218-859-11	s	RESISTOR,CHIP 3.3K 1/16W(1608)
R208	1-218-859-11	s	RESISTOR,CHIP 3.3K 1/16W(1608)
R209	1-216-837-11	s	RESISTOR,CHIP 22K 1/16W 1608
R210	1-216-829-11	s	RESISTOR, CHIP 4.7K 1/16W 1608
R211	1-216-833-11	s	RESISTOR,CHIP 10K 1/16W 1608
R212	1-216-839-11	s	RESISTOR,CHIP 33K 1/16W 1608
R213	1-216-832-11	s	RESISTOR,CHIP 8.2K 1/16W 1608
R214	1-218-883-11	s	RESISTOR,CHIP 33K 1/16W (1608)
R216	1-218-879-11	s	RESISTOR,CHIP 22K 1/16W (1608)
R217	1-218-863-11	s	RESISTOR,CHIP 4.7K 1/16W(1608)
R218	1-218-831-11	s	RESISTOR, CHIP 220 1/16W(1608)
R219	1-218-831-11	s	RESISTOR, CHIP 220 1/16W(1608)
R220	1-218-831-11	s	RESISTOR, CHIP 220 1/16W(1608)
R221	1-218-831-11	s	RESISTOR, CHIP 220 1/16W(1608)
R222	1-218-831-11	s	RESISTOR, CHIP 220 1/16W(1608)
R223	1-218-831-11	s	RESISTOR, CHIP 220 1/16W(1608)
R224	1-216-821-11	s	RESISTOR,CHIP 1.0K 1/16W(1608)
R225	1-216-821-11	s	RESISTOR,CHIP 1.0K 1/16W(1608)
R226	1-216-821-11	s	RESISTOR,CHIP 1.0K 1/16W(1608)
R227	1-218-835-11	s	RESISTOR,CHIP 330 1/16W (1608)
R229	1-218-835-11	s	RESISTOR,CHIP 330 1/16W (1608)
R230	1-218-835-11	s	RESISTOR,CHIP 330 1/16W (1608)
R231	1-218-835-11	s	RESISTOR,CHIP 330 1/16W (1608)
R232	1-218-835-11	s	RESISTOR,CHIP 330 1/16W (1608)
R233	1-218-835-11	s	RESISTOR,CHIP 330 1/16W (1608)
R235 *2	1-216-864-11	s	RESISTOR,CHIP 0 1/16W (1608)
R236 *2	1-216-864-11	s	RESISTOR,CHIP 0 1/16W (1608)
R237 *2	1-216-864-11	s	RESISTOR,CHIP 0 1/16W (1608)
R238 *2	1-216-864-11	s	RESISTOR,CHIP 0 1/16W (1608)
R239 *2	1-216-864-11	s	RESISTOR,CHIP 0 1/16W (1608)
R240 *2	1-216-864-11	s	RESISTOR,CHIP 0 1/16W (1608)
R241 *2	1-216-864-11	s	RESISTOR,CHIP 0 1/16W (1608)
R300	1-216-833-11	s	RESISTOR,CHIP 10K 1/16W 1608
R301	1-216-833-11	s	RESISTOR,CHIP 10K 1/16W 1608
R302	1-216-821-11	s	RESISTOR,CHIP 1.0K 1/16W(1608)
R303	1-218-849-11	s	RESISTOR,CHIP 1.2K 1/16W(1608)
R304	1-216-825-11	s	RESISTOR,CHIP 2.2K 1/16W 1608
R305	1-216-825-11	s	RESISTOR,CHIP 2.2K 1/16W 1608
R306	1-216-825-11	s	RESISTOR,CHIP 2.2K 1/16W 1608
R307	1-216-833-11	s	RESISTOR,CHIP 10K 1/16W 1608
R308	1-216-833-11	s	RESISTOR,CHIP 10K 1/16W 1608
R309	1-216-821-11	s	RESISTOR,CHIP 1.0K 1/16W(1608)
R310	1-216-821-11	s	RESISTOR,CHIP 1.0K 1/16W(1608)
R311	1-216-821-11	s	RESISTOR,CHIP 1.0K 1/16W(1608)
R312	1-216-821-11	s	RESISTOR,CHIP 1.0K 1/16W(1608)
R313	1-216-845-11	s	RESISTOR,CHIP 100K 1/16W(1608)
R314	1-216-809-11	s	RESISTOR,CHIP 100 1/16W 1608
R315	1-216-821-11	s	RESISTOR,CHIP 1.0K 1/16W(1608)
R316	1-216-829-11	s	RESISTOR, CHIP 4.7K 1/16W 1608
R317	1-216-821-11	s	RESISTOR,CHIP 1.0K 1/16W(1608)
R318	1-218-842-11	s	RESISTOR,CHIP 620 1/16W (1608)
R319	1-216-825-11	s	RESISTOR,CHIP 2.2K 1/16W 1608
R320	1-216-825-11	s	RESISTOR,CHIP 2.2K 1/16W 1608

(VPR-62 BOARD(DSR-2000))

Ref. No. or Q'ty	Part No.	SP	Description
R321	1-216-819-11	s	RESISTOR,CHIP 680 1/16W 1608
R322	1-216-829-11	s	RESISTOR, CHIP 4.7K 1/16W 1608
R323	1-216-857-11	s	RESISTOR, CHIP 1.0M 1/16W 1608
R324	1-216-855-11	s	RESISTOR, CHIP 680K 1/16W 1608
R325	1-216-855-11	s	RESISTOR, CHIP 680K 1/16W 1608
R326	1-218-863-11	s	RESISTOR,CHIP 4.7K 1/16W(1608)
R327	1-216-833-11	s	RESISTOR,CHIP 10K 1/16W 1608
R329	1-218-895-11	s	RESISTOR,CHIP 100K 1/16W(1608)
R330	1-218-863-11	s	RESISTOR,CHIP 4.7K 1/16W(1608)
R331	1-216-841-11	s	RESISTOR, CHIP 47K 1/16W 1608
R332	1-216-841-11	s	RESISTOR, CHIP 47K 1/16W 1608
R333	1-216-839-11	s	RESISTOR,CHIP 33K 1/16W 1608
R334	1-216-839-11	s	RESISTOR,CHIP 33K 1/16W 1608
R335	1-216-821-11	s	RESISTOR,CHIP 1.0K 1/16W(1608)
R336	1-218-903-11	s	RESISTOR,CHIP 220K 1/16W(1608)
R337	1-216-829-11	s	RESISTOR, CHIP 4.7K 1/16W 1608
R338	1-216-821-11	s	RESISTOR,CHIP 1.0K 1/16W(1608)
R339	1-218-866-11	s	RESISTOR,CHIP 6.2K 1/16W(1608)
R340	1-218-830-11	s	RESISTOR,CHIP 200 1/16W (1608)
R341	1-218-859-11	s	RESISTOR,CHIP 3.3K 1/16W(1608)
R342	1-218-863-11	s	RESISTOR,CHIP 4.7K 1/16W(1608)
R343	1-216-809-11	s	RESISTOR,CHIP 100 1/16W 1608
R344	1-216-839-11	s	RESISTOR,CHIP 33K 1/16W 1608
R345	1-216-829-11	s	RESISTOR, CHIP 4.7K 1/16W 1608
R346	1-216-855-11	s	RESISTOR, CHIP 680K 1/16W 1608
R348	1-216-845-11	s	RESISTOR,CHIP 100K 1/16W(1608)
R349	1-216-845-11	s	RESISTOR,CHIP 100K 1/16W(1608)
R350	1-216-805-11	s	RESISTOR,CHIP 47 1/16W 1608
R351	1-216-803-11	s	RESISTOR,CHIP 33 1/16W 1608
R355	1-216-821-11	s	RESISTOR,CHIP 1.0K 1/16W(1608)
R356	1-216-863-11	s	RESISTOR,CHIP 3.3M 1/16W 1608
R357	1-218-871-11	s	RESISTOR,CHIP 10K 1/16W (1608)
R358	1-218-871-11	s	RESISTOR,CHIP 10K 1/16W (1608)
R359	1-216-809-11	s	RESISTOR,CHIP 100 1/16W 1608
R360	1-216-821-11	s	RESISTOR,CHIP 1.0K 1/16W(1608)
R368	1-216-805-11	s	RESISTOR,CHIP 47 1/16W 1608
R369	1-216-805-11	s	RESISTOR,CHIP 47 1/16W 1608
R400	1-216-821-11	s	RESISTOR,CHIP 1.0K 1/16W(1608)
R401	1-218-835-11	s	RESISTOR,CHIP 330 1/16W (1608)
R402	1-216-821-11	s	RESISTOR,CHIP 1.0K 1/16W(1608)
R403	1-216-821-11	s	RESISTOR,CHIP 1.0K 1/16W(1608)
R404	1-216-821-11	s	RESISTOR,CHIP 1.0K 1/16W(1608)
R405	1-216-821-11	s	RESISTOR,CHIP 1.0K 1/16W(1608)
R406	1-216-829-11	s	RESISTOR, CHIP 4.7K 1/16W 1608
R407	1-216-829-11	s	RESISTOR, CHIP 4.7K 1/16W 1608
R408	1-216-815-11	s	RESISTOR,CHIP 330 1/16W 1608
R409	1-216-815-11	s	RESISTOR,CHIP 330 1/16W 1608
R410	1-218-855-11	s	RESISTOR,CHIP 2.2K 1/16W(1608)
R411	1-216-815-11	s	RESISTOR,CHIP 330 1/16W 1608
R412	1-216-829-11	s	RESISTOR, CHIP 4.7K 1/16W 1608
R413	1-216-809-11	s	RESISTOR,CHIP 100 1/16W 1608
R414	1-216-821-11	s	RESISTOR,CHIP 1.0K 1/16W(1608)
R415	1-216-829-11	s	RESISTOR, CHIP 4.7K 1/16W 1608
R416	1-216-809-11	s	RESISTOR,CHIP 100 1/16W 1608
R417	1-216-809-11	s	RESISTOR,CHIP 100 1/16W 1608
R418	1-216-809-11	s	RESISTOR,CHIP 100 1/16W 1608
R419	1-216-821-11	s	RESISTOR,CHIP 1.0K 1/16W(1608)
R420	1-216-825-11	s	RESISTOR,CHIP 2.2K 1/16W 1608
R421	1-216-825-11	s	RESISTOR,CHIP 2.2K 1/16W 1608

(VPR-62 BOARD(DSR-2000))

Ref. No. or Q'ty	Part No.	SP	Description
R422	1-218-835-11	s	RESISTOR,CHIP 330 1/16W (1608)
R423	1-216-821-11	s	RESISTOR,CHIP 1.0K 1/16W(1608)
R424	1-218-835-11	s	RESISTOR,CHIP 330 1/16W (1608)
R425	1-216-821-11	s	RESISTOR,CHIP 1.0K 1/16W(1608)
R426	1-218-852-11	s	RESISTOR,CHIP 1.6K 1/16W(1608)
R427	1-218-847-11	s	RESISTOR, CHIP 1K 1/16W (1608)
R428	1-218-852-11	s	RESISTOR,CHIP 1.6K 1/16W(1608)
R429	1-218-847-11	s	RESISTOR, CHIP 1K 1/16W (1608)
R430	1-218-858-11	s	RESISTOR, CHIP 3K 1/16W (1608)
R431	1-218-858-11	s	RESISTOR, CHIP 3K 1/16W (1608)
R432	1-216-845-11	s	RESISTOR,CHIP 100K 1/16W(1608)
R433	1-216-857-11	s	RESISTOR, CHIP 1.0M 1/16W 1608
R434	1-218-855-11	s	RESISTOR,CHIP 2.2K 1/16W(1608)
R435	1-216-809-11	s	RESISTOR,CHIP 100 1/16W 1608
R436	1-216-825-11	s	RESISTOR,CHIP 2.2K 1/16W 1608
R437	1-216-809-11	s	RESISTOR,CHIP 100 1/16W 1608
R438	1-216-821-11	s	RESISTOR,CHIP 1.0K 1/16W(1608)
R439	1-216-821-11	s	RESISTOR,CHIP 1.0K 1/16W(1608)
R440	1-218-863-11	s	RESISTOR,CHIP 4.7K 1/16W(1608)
R441	1-218-859-11	s	RESISTOR,CHIP 3.3K 1/16W(1608)
R442	1-216-809-11	s	RESISTOR,CHIP 100 1/16W 1608
R443	1-216-833-11	s	RESISTOR,CHIP 10K 1/16W 1608
R444	1-218-849-11	s	RESISTOR,CHIP 1.2K 1/16W(1608)
R445	1-218-849-11	s	RESISTOR,CHIP 1.2K 1/16W(1608)
R446	1-216-809-11	s	RESISTOR,CHIP 100 1/16W 1608
R447	1-218-878-11	s	RESISTOR,CHIP 20K 1/16W (1608)
R448	1-218-878-11	s	RESISTOR,CHIP 20K 1/16W (1608)
R449	1-216-809-11	s	RESISTOR,CHIP 100 1/16W 1608
R450	1-218-873-11	s	RESISTOR,CHIP 12K 1/16W (1608)
R451	1-218-878-11	s	RESISTOR,CHIP 20K 1/16W (1608)
R452	1-216-809-11	s	RESISTOR,CHIP 100 1/16W 1608
R453	1-216-809-11	s	RESISTOR,CHIP 100 1/16W 1608
R454	1-218-849-11	s	RESISTOR,CHIP 1.2K 1/16W(1608)
R455	*5 1-216-864-11	s	RESISTOR,CHIP 0 1/16W (1608)
R456	*5 1-216-864-11	s	RESISTOR,CHIP 0 1/16W (1608)
R474	1-216-803-11	s	RESISTOR,CHIP 33 1/16W 1608
R475	1-216-864-11	s	RESISTOR,CHIP 0 1/16W (1608)
R476	1-216-864-11	s	RESISTOR,CHIP 0 1/16W (1608)
R477	1-216-864-11	s	RESISTOR,CHIP 0 1/16W (1608)
R479	1-216-803-11	s	RESISTOR,CHIP 33 1/16W 1608
R480	1-216-804-11	s	RESISTOR,CHIP 39 1/16W 1608
R483	*2 1-216-864-11	s	RESISTOR,CHIP 0 1/16W (1608)
R501	*2 1-216-864-11	s	RESISTOR,CHIP 0 1/16W (1608)
R502	1-216-864-11	s	RESISTOR,CHIP 0 1/16W (1608)
R504	1-216-864-11	s	RESISTOR,CHIP 0 1/16W (1608)
R507	1-216-864-11	s	RESISTOR,CHIP 0 1/16W (1608)
R516	1-216-826-11	s	RESISTOR,CHIP 2.7K 1/16W 1608
R521	1-216-845-11	s	RESISTOR,CHIP 100K 1/16W(1608)
R523	1-216-830-11	s	RESISTOR,CHIP 5.6K 1/16W 1608
R524	1-216-848-11	s	RESISTOR,CHIP 180K 1/16 (1608)
R525	1-216-821-11	s	RESISTOR,CHIP 1.0K 1/16W(1608)
R526	1-216-829-11	s	RESISTOR, CHIP 4.7K 1/16W 1608
R527	1-216-855-11	s	RESISTOR, CHIP 680K 1/16W 1608
R528	1-216-848-11	s	RESISTOR,CHIP 180K 1/16 (1608)
R529	1-216-834-11	s	RESISTOR,CHIP 12K 1/16W 1608
R530	1-216-837-11	s	RESISTOR,CHIP 22K 1/16W 1608
R531	1-216-833-11	s	RESISTOR,CHIP 10K 1/16W 1608
R532	1-216-833-11	s	RESISTOR,CHIP 10K 1/16W 1608
R533	1-218-892-11	s	RESISTOR,CHIP 75K 1/16W (1608)

(VPR-62 BOARD(DSR-2000))

Ref. No. or Q'ty	Part No.	SP	Description
R534	1-216-853-11	s	RESISTOR,CHIP 470K 1/16W(1608)
R535	1-216-853-11	s	RESISTOR,CHIP 470K 1/16W(1608)
R536	1-218-889-11	s	RESISTOR,CHIP 56K 1/16W(1608)
R538	1-216-837-11	s	RESISTOR,CHIP 22K 1/16W 1608
R539	1-216-817-11	s	RESISTOR,CHIP 470 1/16W 1608
R540	1-216-821-11	s	RESISTOR,CHIP 1.0K 1/16W(1608)
R541	1-216-817-11	s	RESISTOR,CHIP 470 1/16W 1608
R542	1-216-821-11	s	RESISTOR,CHIP 1.0K 1/16W(1608)
R543	1-216-829-11	s	RESISTOR, CHIP 4.7K 1/16W 1608
R544	1-216-814-11	s	RESISTOR,CHIP 270 1/16W 1608
R545	1-216-829-11	s	RESISTOR, CHIP 4.7K 1/16W 1608
R546	1-216-864-11	s	RESISTOR,CHIP 0 1/16W (1608)
R547	1-216-864-11	s	RESISTOR,CHIP 0 1/16W (1608)
R549	1-216-829-11	s	RESISTOR, CHIP 4.7K 1/16W 1608
R550	1-216-814-11	s	RESISTOR,CHIP 270 1/16W 1608
R551	1-216-829-11	s	RESISTOR, CHIP 4.7K 1/16W 1608
R552	1-216-839-11	s	RESISTOR,CHIP 33K 1/16W 1608
R553	1-216-839-11	s	RESISTOR,CHIP 33K 1/16W 1608
R554	1-216-864-11	s	RESISTOR,CHIP 0 1/16W (1608)
R556	1-216-864-11	s	RESISTOR,CHIP 0 1/16W (1608)
R557	1-216-855-11	s	RESISTOR, CHIP 680K 1/16W 1608
R558	1-216-839-11	s	RESISTOR,CHIP 33K 1/16W 1608
R559	1-216-839-11	s	RESISTOR,CHIP 33K 1/16W 1608
R560	1-216-805-11	s	RESISTOR,CHIP 47 1/16W 1608
R561	1-216-864-11	s	RESISTOR,CHIP 0 1/16W (1608)
R562	1-216-864-11	s	RESISTOR,CHIP 0 1/16W (1608)
R563	1-216-839-11	s	RESISTOR,CHIP 33K 1/16W 1608
R564	1-216-821-11	s	RESISTOR,CHIP 1.0K 1/16W(1608)
R565	1-216-833-11	s	RESISTOR,CHIP 10K 1/16W 1608
R568	1-216-864-11	s	RESISTOR,CHIP 0 1/16W (1608)
R569	1-216-864-11	s	RESISTOR,CHIP 0 1/16W (1608)
R570	1-216-839-11	s	RESISTOR,CHIP 33K 1/16W 1608
R572	1-216-803-11	s	RESISTOR,CHIP 33 1/16W 1608
R573	1-216-803-11	s	RESISTOR,CHIP 33 1/16W 1608
R574	1-216-803-11	s	RESISTOR,CHIP 33 1/16W 1608
R575	1-216-803-11	s	RESISTOR,CHIP 33 1/16W 1608
R576	1-216-803-11	s	RESISTOR,CHIP 33 1/16W 1608
R601	1-216-864-11	s	RESISTOR,CHIP 0 1/16W (1608)
R602	1-216-817-11	s	RESISTOR,CHIP 470 1/16W 1608
R603	1-218-863-11	s	RESISTOR,CHIP 4.7K 1/16W(1608)
R604	1-216-833-11	s	RESISTOR,CHIP 10K 1/16W 1608
R605	1-218-861-11	s	RESISTOR,CHIP 3.9K 1/16W(1608)
R606	1-216-833-11	s	RESISTOR,CHIP 10K 1/16W 1608
R607	1-218-871-11	s	RESISTOR,CHIP 10K 1/16W (1608)
R608	1-218-848-11	s	RESISTOR,CHIP 1.1K 1/16W(1608)
R609	1-218-864-11	s	RESISTOR,CHIP 5.1K 1/16W(1608)
R610	1-218-864-11	s	RESISTOR,CHIP 5.1K 1/16W(1608)
R611	1-216-822-11	s	RESISTOR, CHIP 1.2K 1/16W 1608
R612	1-216-822-11	s	RESISTOR, CHIP 1.2K 1/16W 1608
R613	1-218-871-11	s	RESISTOR,CHIP 10K 1/16W (1608)
R614	1-216-833-11	s	RESISTOR,CHIP 10K 1/16W 1608
R615	1-216-825-11	s	RESISTOR,CHIP 2.2K 1/16W 1608
R616	1-216-828-11	s	RESISTOR, CHIP 3.9K 1/16W 1608
R617	1-218-871-11	s	RESISTOR,CHIP 10K 1/16W (1608)
R618	1-216-839-11	s	RESISTOR,CHIP 33K 1/16W 1608
R619	1-216-833-11	s	RESISTOR,CHIP 10K 1/16W 1608
R620	1-216-833-11	s	RESISTOR,CHIP 10K 1/16W 1608
R621	1-216-839-11	s	RESISTOR,CHIP 33K 1/16W 1608
R622	1-216-857-11	s	RESISTOR, CHIP 1.0M 1/16W 1608

(VPR-62 BOARD(DSR-2000))

Ref. No. or Q'ty	Part No.	SP	Description
R623	1-216-857-11	s	RESISTOR, CHIP 1.0M 1/16W 1608
R624	1-216-839-11	s	RESISTOR,CHIP 33K 1/16W 1608
R625	1-216-839-11	s	RESISTOR,CHIP 33K 1/16W 1608
R626	1-216-823-11	s	RESISTOR, CHIP 1.5K 1/16W
R627	1-216-823-11	s	RESISTOR, CHIP 1.5K 1/16W
R628	1-218-871-11	s	RESISTOR,CHIP 10K 1/16W (1608)
R629	1-216-833-11	s	RESISTOR,CHIP 10K 1/16W 1608
R630	1-216-837-11	s	RESISTOR,CHIP 22K 1/16W 1608
R631	1-216-857-11	s	RESISTOR, CHIP 1.0M 1/16W 1608
R632	1-216-839-11	s	RESISTOR,CHIP 33K 1/16W 1608
R633	1-216-805-11	s	RESISTOR,CHIP 47 1/16W 1608
R634	1-216-805-11	s	RESISTOR,CHIP 47 1/16W 1608
R635	1-216-805-11	s	RESISTOR,CHIP 47 1/16W 1608
R636	1-218-857-11	s	RESISTOR,CHIP 2.7K 1/16W(1608)
R637	1-218-882-11	s	RESISTOR, CHIP 30K 1/16W(1608)
R638	1-218-874-11	s	RESISTOR,CHIP 13K 1/16W (1608)
R639	1-218-835-11	s	RESISTOR,CHIP 330 1/16W (1608)
R640	1-218-835-11	s	RESISTOR,CHIP 330 1/16W (1608)
R641	1-218-835-11	s	RESISTOR,CHIP 330 1/16W (1608)
R642	1-218-835-11	s	RESISTOR,CHIP 330 1/16W (1608)
R643	1-218-835-11	s	RESISTOR,CHIP 330 1/16W (1608)
R644	1-218-835-11	s	RESISTOR,CHIP 330 1/16W (1608)
R645	1-216-821-11	s	RESISTOR,CHIP 1.0K 1/16W(1608)
R646	1-216-821-11	s	RESISTOR,CHIP 1.0K 1/16W(1608)
R647	1-216-821-11	s	RESISTOR,CHIP 1.0K 1/16W(1608)
R648	1-216-821-11	s	RESISTOR,CHIP 1.0K 1/16W(1608)
R649	1-216-809-11	s	RESISTOR,CHIP 100 1/16W 1608
R650	1-216-821-11	s	RESISTOR,CHIP 1.0K 1/16W(1608)
R651	1-216-821-11	s	RESISTOR,CHIP 1.0K 1/16W(1608)
R652	1-218-849-11	s	RESISTOR,CHIP 1.2K 1/16W(1608)
R653	1-216-829-11	s	RESISTOR, CHIP 4.7K 1/16W 1608
R654	1-216-809-11	s	RESISTOR,CHIP 100 1/16W 1608
R655	1-216-821-11	s	RESISTOR,CHIP 1.0K 1/16W(1608)
R656	1-216-821-11	s	RESISTOR,CHIP 1.0K 1/16W(1608)
R657	1-216-821-11	s	RESISTOR,CHIP 1.0K 1/16W(1608)
R658	1-218-835-11	s	RESISTOR,CHIP 330 1/16W (1608)
R659	1-216-809-11	s	RESISTOR,CHIP 100 1/16W 1608
R660	1-216-829-11	s	RESISTOR, CHIP 4.7K 1/16W 1608
R661	1-216-864-11	s	RESISTOR,CHIP 0 1/16W (1608)
R662	1-218-841-11	s	RESISTOR,CHIP 560 1/16W (1608)
R663	1-218-840-11	s	RESISTOR,CHIP 510 1/16W (1608)
R664	1-218-840-11	s	RESISTOR,CHIP 510 1/16W (1608)
R665	1-211-990-11	s	RESISTOR,CHIP 75 1/16W (1608)
R666	1-216-809-11	s	RESISTOR,CHIP 100 1/16W 1608
R667	1-216-821-11	s	RESISTOR,CHIP 1.0K 1/16W(1608)
R668	1-216-821-11	s	RESISTOR,CHIP 1.0K 1/16W(1608)
R669	1-218-849-11	s	RESISTOR,CHIP 1.2K 1/16W(1608)
R670	1-216-829-11	s	RESISTOR, CHIP 4.7K 1/16W 1608
R671	1-216-809-11	s	RESISTOR,CHIP 100 1/16W 1608
R672	1-216-821-11	s	RESISTOR,CHIP 1.0K 1/16W(1608)
R673	1-216-821-11	s	RESISTOR,CHIP 1.0K 1/16W(1608)
R674	1-216-821-11	s	RESISTOR,CHIP 1.0K 1/16W(1608)
R675	1-218-835-11	s	RESISTOR,CHIP 330 1/16W (1608)
R676	1-216-809-11	s	RESISTOR,CHIP 100 1/16W 1608
R677	1-216-829-11	s	RESISTOR, CHIP 4.7K 1/16W 1608
R678	1-216-864-11	s	RESISTOR,CHIP 0 1/16W (1608)
R679	1-218-841-11	s	RESISTOR,CHIP 560 1/16W (1608)
R680	1-218-840-11	s	RESISTOR,CHIP 510 1/16W (1608)
R681	1-218-840-11	s	RESISTOR,CHIP 510 1/16W (1608)

(VPR-62 BOARD(DSR-2000))

Ref. No. or Q'ty	Part No.	SP	Description
R682	1-211-990-11	s	RESISTOR,CHIP 75 1/16W (1608)
R683	1-216-839-11	s	RESISTOR,CHIP 33K 1/16W 1608
R684 *2	1-216-864-11	s	RESISTOR,CHIP 0 1/16W (1608)
R685 *2	1-216-805-11	s	RESISTOR,CHIP 47 1/16W 1608
R686 *2	1-216-805-11	s	RESISTOR,CHIP 47 1/16W 1608
R687 *2	1-216-805-11	s	RESISTOR,CHIP 47 1/16W 1608
R688 *2	1-216-805-11	s	RESISTOR,CHIP 47 1/16W 1608
R689 *2	1-216-805-11	s	RESISTOR,CHIP 47 1/16W 1608
R690 *2	1-216-805-11	s	RESISTOR,CHIP 47 1/16W 1608
R701	1-218-847-11	s	RESISTOR, CHIP 1K 1/16W (1608)
R702	1-216-841-11	s	RESISTOR, CHIP 47K 1/16W 1608
R703	1-218-847-11	s	RESISTOR, CHIP 1K 1/16W (1608)
R704	1-218-839-11	s	RESISTOR,CHIP 470 1/16W (1608)
R705	1-218-835-11	s	RESISTOR,CHIP 330 1/16W (1608)
R706	1-218-864-11	s	RESISTOR,CHIP 5.1K 1/16W(1608)
R707	1-216-834-11	s	RESISTOR,CHIP 12K 1/16W 1608
R708	1-216-837-11	s	RESISTOR,CHIP 22K 1/16W 1608
R709	1-216-834-11	s	RESISTOR,CHIP 12K 1/16W 1608
R710	1-216-837-11	s	RESISTOR,CHIP 22K 1/16W 1608
R712	1-216-857-11	s	RESISTOR, CHIP 1.0M 1/16W 1608
R713	1-216-857-11	s	RESISTOR, CHIP 1.0M 1/16W 1608
R714	1-216-821-11	s	RESISTOR,CHIP 1.0K 1/16W(1608)
R715	1-216-821-11	s	RESISTOR,CHIP 1.0K 1/16W(1608)
R716	1-218-883-11	s	RESISTOR,CHIP 33K 1/16W (1608)
R717	1-216-821-11	s	RESISTOR,CHIP 1.0K 1/16W(1608)
R718	1-216-841-11	s	RESISTOR, CHIP 47K 1/16W 1608
R719	1-216-821-11	s	RESISTOR,CHIP 1.0K 1/16W(1608)
R720	1-216-841-11	s	RESISTOR, CHIP 47K 1/16W 1608
R721	1-216-821-11	s	RESISTOR,CHIP 1.0K 1/16W(1608)
R722	1-216-821-11	s	RESISTOR,CHIP 1.0K 1/16W(1608)
R723	1-216-829-11	s	RESISTOR, CHIP 4.7K 1/16W 1608
R724	1-216-829-11	s	RESISTOR, CHIP 4.7K 1/16W 1608
R725	1-216-821-11	s	RESISTOR,CHIP 1.0K 1/16W(1608)
R726	1-216-821-11	s	RESISTOR,CHIP 1.0K 1/16W(1608)
R727	1-216-821-11	s	RESISTOR,CHIP 1.0K 1/16W(1608)
R728	1-216-837-11	s	RESISTOR,CHIP 22K 1/16W 1608
R729	1-216-833-11	s	RESISTOR,CHIP 10K 1/16W 1608
R730	1-216-821-11	s	RESISTOR,CHIP 1.0K 1/16W(1608)
R731	1-216-837-11	s	RESISTOR,CHIP 22K 1/16W 1608
R732	1-216-809-11	s	RESISTOR,CHIP 100 1/16W 1608
R733	1-218-858-11	s	RESISTOR, CHIP 3K 1/16W (1608)
R734	1-216-825-11	s	RESISTOR,CHIP 2.2K 1/16W 1608
R735	1-216-825-11	s	RESISTOR,CHIP 2.2K 1/16W 1608
R736	1-216-845-11	s	RESISTOR,CHIP 100K 1/16W(1608)
R737	1-216-821-11	s	RESISTOR,CHIP 1.0K 1/16W(1608)
R738	1-216-821-11	s	RESISTOR,CHIP 1.0K 1/16W(1608)
R739	1-216-821-11	s	RESISTOR,CHIP 1.0K 1/16W(1608)
R740	1-216-821-11	s	RESISTOR,CHIP 1.0K 1/16W(1608)
R741	1-216-821-11	s	RESISTOR,CHIP 1.0K 1/16W(1608)
R742	1-216-815-11	s	RESISTOR,CHIP 330 1/16W 1608
R743	1-216-815-11	s	RESISTOR,CHIP 330 1/16W 1608
R744	1-216-821-11	s	RESISTOR,CHIP 1.0K 1/16W(1608)
R745	1-216-821-11	s	RESISTOR,CHIP 1.0K 1/16W(1608)
R746	1-216-821-11	s	RESISTOR,CHIP 1.0K 1/16W(1608)
R747	1-216-821-11	s	RESISTOR,CHIP 1.0K 1/16W(1608)
R748	1-216-821-11	s	RESISTOR,CHIP 1.0K 1/16W(1608)
R749	1-216-825-11	s	RESISTOR,CHIP 2.2K 1/16W 1608
R750	1-218-843-11	s	RESISTOR,CHIP 680 1/16W (1608)
R751	1-218-862-11	s	RESISTOR,CHIP 4.3K 1/16W(1608)

(VPR-62 BOARD(DSR-2000))

Ref. No. or Q'ty	Part No.	SP	Description
R753	1-218-857-11	s	RESISTOR,CHIP 2.7K 1/16W(1608)
R754	1-216-825-11	s	RESISTOR,CHIP 2.2K 1/16W 1608
R755	1-216-825-11	s	RESISTOR,CHIP 2.2K 1/16W 1608
R756	1-216-825-11	s	RESISTOR,CHIP 2.2K 1/16W 1608
R757	1-216-805-11	s	RESISTOR,CHIP 47 1/16W 1608
R758	1-216-833-11	s	RESISTOR,CHIP 10K 1/16W 1608
R759	1-216-825-11	s	RESISTOR,CHIP 2.2K 1/16W 1608
R760	1-216-825-11	s	RESISTOR,CHIP 2.2K 1/16W 1608
R761	1-216-829-11	s	RESISTOR, CHIP 4.7K 1/16W 1608
R762	1-216-829-11	s	RESISTOR, CHIP 4.7K 1/16W 1608
R801	1-216-809-11	s	RESISTOR,CHIP 100 1/16W 1608
R802	1-216-825-11	s	RESISTOR,CHIP 2.2K 1/16W 1608
R803	1-216-825-11	s	RESISTOR,CHIP 2.2K 1/16W 1608
R804	1-218-839-11	s	RESISTOR,CHIP 470 1/16W (1608)
R805	1-218-849-11	s	RESISTOR,CHIP 1.2K 1/16W(1608)
R806	1-218-837-11	s	RESISTOR,CHIP 390 1/16W (1608)
R807	1-218-841-11	s	RESISTOR,CHIP 560 1/16W (1608)
R808	1-218-840-11	s	RESISTOR,CHIP 510 1/16W (1608)
R809	1-218-840-11	s	RESISTOR,CHIP 510 1/16W (1608)
R810	1-211-990-11	s	RESISTOR,CHIP 75 1/16W (1608)
R811	1-216-837-11	s	RESISTOR,CHIP 22K 1/16W 1608
R812	1-216-844-11	s	RESISTOR,CHIP 82K 1/16W 1608
R813	1-211-990-11	s	RESISTOR,CHIP 75 1/16W (1608)
R814	1-211-990-11	s	RESISTOR,CHIP 75 1/16W (1608)
R815	1-216-833-11	s	RESISTOR,CHIP 10K 1/16W 1608
R816	1-218-871-11	s	RESISTOR,CHIP 10K 1/16W (1608)
R817	1-216-809-11	s	RESISTOR,CHIP 100 1/16W 1608
R818	1-216-821-11	s	RESISTOR,CHIP 1.0K 1/16W(1608)
R819	1-218-847-11	s	RESISTOR, CHIP 1K 1/16W (1608)
R820	1-218-849-11	s	RESISTOR,CHIP 1.2K 1/16W(1608)
R821	1-218-847-11	s	RESISTOR, CHIP 1K 1/16W (1608)
R822	1-216-825-11	s	RESISTOR,CHIP 2.2K 1/16W 1608
R823	1-216-821-11	s	RESISTOR,CHIP 1.0K 1/16W(1608)
R824	1-216-821-11	s	RESISTOR,CHIP 1.0K 1/16W(1608)
R825	1-216-823-11	s	RESISTOR, CHIP 1.5K 1/16W
R826	1-216-825-11	s	RESISTOR,CHIP 2.2K 1/16W 1608
R827	1-216-825-11	s	RESISTOR,CHIP 2.2K 1/16W 1608
R828	1-218-839-11	s	RESISTOR,CHIP 470 1/16W (1608)
R829	1-218-853-11	s	RESISTOR,CHIP 1.8K 1/16W(1608)
R830	1-211-990-11	s	RESISTOR,CHIP 75 1/16W (1608)
R831	1-211-990-11	s	RESISTOR,CHIP 75 1/16W (1608)
R832	1-216-829-11	s	RESISTOR, CHIP 4.7K 1/16W 1608
R833	1-216-829-11	s	RESISTOR, CHIP 4.7K 1/16W 1608
R834	1-216-821-11	s	RESISTOR,CHIP 1.0K 1/16W(1608)
R835	1-216-813-11	s	RESISTOR, CHIP 220 1/16W 1608
R836	1-216-821-11	s	RESISTOR,CHIP 1.0K 1/16W(1608)
R837	1-216-821-11	s	RESISTOR,CHIP 1.0K 1/16W(1608)
R838	1-216-837-11	s	RESISTOR,CHIP 22K 1/16W 1608
R839	1-216-821-11	s	RESISTOR,CHIP 1.0K 1/16W(1608)
R840	1-216-829-11	s	RESISTOR, CHIP 4.7K 1/16W 1608
R841	1-216-809-11	s	RESISTOR,CHIP 100 1/16W 1608
R842	1-216-819-11	s	RESISTOR,CHIP 680 1/16W 1608
R843	1-216-809-11	s	RESISTOR,CHIP 100 1/16W 1608
R844	1-216-819-11	s	RESISTOR,CHIP 680 1/16W 1608
R845	1-216-853-11	s	RESISTOR,CHIP 470K 1/16W(1608)
R846	1-216-821-11	s	RESISTOR,CHIP 1.0K 1/16W(1608)
R847	1-216-821-11	s	RESISTOR,CHIP 1.0K 1/16W(1608)
R848	1-216-821-11	s	RESISTOR,CHIP 1.0K 1/16W(1608)
R849	1-216-825-11	s	RESISTOR,CHIP 2.2K 1/16W 1608

(VPR-62 BOARD(DSR-2000))

Ref. No. or Q'ty	Part No.	SP	Description
R850	1-216-833-11	s	RESISTOR,CHIP 10K 1/16W 1608
R851	1-216-823-11	s	RESISTOR, CHIP 1.5K 1/16W
R852	1-216-817-11	s	RESISTOR,CHIP 470 1/16W 1608
R853	1-216-817-11	s	RESISTOR,CHIP 470 1/16W 1608
R854	1-216-833-11	s	RESISTOR,CHIP 10K 1/16W 1608
R855	1-218-863-11	s	RESISTOR,CHIP 4.7K 1/16W(1608)
R856	1-218-847-11	s	RESISTOR, CHIP 1K 1/16W (1608)
R857	1-218-849-11	s	RESISTOR,CHIP 1.2K 1/16W(1608)
R858	1-216-821-11	s	RESISTOR,CHIP 1.0K 1/16W(1608)
R859	1-211-990-11	s	RESISTOR,CHIP 75 1/16W (1608)
R860	1-216-845-11	s	RESISTOR,CHIP 100K 1/16W(1608)
R861	1-216-837-11	s	RESISTOR,CHIP 22K 1/16W 1608
R866 *2	1-218-841-11	s	RESISTOR,CHIP 560 1/16W (1608)
*1	1-218-847-11	s	RESISTOR, CHIP 1K 1/16W (1608)
R902	1-216-841-11	s	RESISTOR, CHIP 47K 1/16W 1608
R903	1-216-841-11	s	RESISTOR, CHIP 47K 1/16W 1608
R906	1-218-857-11	s	RESISTOR,CHIP 2.7K 1/16W(1608)
R907	1-216-833-11	s	RESISTOR,CHIP 10K 1/16W 1608
R916	1-218-875-11	s	RESISTOR,CHIP 15K 1/16W (1608)
R917	1-218-873-11	s	RESISTOR,CHIP 12K 1/16W (1608)
R920	1-216-821-11	s	RESISTOR,CHIP 1.0K 1/16W(1608)
R921	1-216-864-11	s	RESISTOR,CHIP 0 1/16W (1608)
R922	1-216-864-11	s	RESISTOR,CHIP 0 1/16W (1608)
R923	1-216-833-11	s	RESISTOR,CHIP 10K 1/16W 1608
R924	1-216-817-11	s	RESISTOR,CHIP 470 1/16W 1608
R927	1-216-821-11	s	RESISTOR,CHIP 1.0K 1/16W(1608)
R931	1-216-864-11	s	RESISTOR,CHIP 0 1/16W (1608)
R932	1-218-847-11	s	RESISTOR, CHIP 1K 1/16W (1608)
R933	1-218-847-11	s	RESISTOR, CHIP 1K 1/16W (1608)
R934	1-216-825-11	s	RESISTOR,CHIP 2.2K 1/16W 1608
R935	1-218-851-11	s	RESISTOR,CHIP 1.5K 1/16W(1608)
R936	1-218-851-11	s	RESISTOR,CHIP 1.5K 1/16W(1608)
R937	1-216-833-11	s	RESISTOR,CHIP 10K 1/16W 1608
R938	1-216-805-11	s	RESISTOR,CHIP 47 1/16W 1608
R939	1-216-825-11	s	RESISTOR,CHIP 2.2K 1/16W 1608
R940	1-216-826-11	s	RESISTOR,CHIP 2.7K 1/16W 1608
R941	1-216-826-11	s	RESISTOR,CHIP 2.7K 1/16W 1608
R942	1-216-864-11	s	RESISTOR,CHIP 0 1/16W (1608)
R943	1-216-820-11	s	RESISTOR, CHIP 820 1/16W 1608
R944	1-218-871-11	s	RESISTOR,CHIP 10K 1/16W (1608)
R945	1-218-873-11	s	RESISTOR,CHIP 12K 1/16W (1608)
R946	1-218-879-11	s	RESISTOR,CHIP 22K 1/16W (1608)
R947	1-218-869-11	s	RESISTOR,CHIP 8.2K 1/16W(1608)
R948	1-211-990-11	s	RESISTOR,CHIP 75 1/16W (1608)
R949	1-216-826-11	s	RESISTOR,CHIP 2.7K 1/16W 1608
R950	1-218-883-11	s	RESISTOR,CHIP 33K 1/16W (1608)
R951	1-216-821-11	s	RESISTOR,CHIP 1.0K 1/16W(1608)
R952	1-218-885-11	s	RESISTOR,CHIP 39K 1/16W (1608)
R953	1-216-821-11	s	RESISTOR,CHIP 1.0K 1/16W(1608)
R954	1-216-837-11	s	RESISTOR,CHIP 22K 1/16W 1608
R955	1-216-855-11	s	RESISTOR, CHIP 680K 1/16W 1608
R956	1-216-864-11	s	RESISTOR,CHIP 0 1/16W (1608)
R957	1-216-817-11	s	RESISTOR,CHIP 470 1/16W 1608
R958	1-216-821-11	s	RESISTOR,CHIP 1.0K 1/16W(1608)
R959	1-216-826-11	s	RESISTOR,CHIP 2.7K 1/16W 1608
R960	1-218-883-11	s	RESISTOR,CHIP 33K 1/16W (1608)
R962	1-216-845-11	s	RESISTOR,CHIP 100K 1/16W(1608)
R964	1-216-809-11	s	RESISTOR,CHIP 100 1/16W 1608
R965	1-218-868-11	s	RESISTOR,CHIP 7.5K 1/16W(1608)

(VPR-62 BOARD(DSR-2000))

Ref. No. or Q'ty	Part No.	SP	Description
R966	1-218-868-11	s	RESISTOR,CHIP 7.5K 1/16W(1608)
R967	1-218-873-11	s	RESISTOR,CHIP 12K 1/16W (1608)
R968	1-218-873-11	s	RESISTOR,CHIP 12K 1/16W (1608)
R1000 *2	1-216-829-11	s	RESISTOR, CHIP 4.7K 1/16W 1608
R1001	1-216-821-11	s	RESISTOR,CHIP 1.0K 1/16W(1608)
R1002	1-216-821-11	s	RESISTOR,CHIP 1.0K 1/16W(1608)
R1003	1-216-815-11	s	RESISTOR,CHIP 330 1/16W 1608
R1004	1-216-821-11	s	RESISTOR,CHIP 1.0K 1/16W(1608)
R1005	1-216-821-11	s	RESISTOR,CHIP 1.0K 1/16W(1608)
R1006	1-216-843-11	s	RESISTOR,CHIP 68K 1/16W (1608)
R1007	1-216-821-11	s	RESISTOR,CHIP 1.0K 1/16W(1608)
R1008	1-216-845-11	s	RESISTOR,CHIP 100K 1/16W(1608)
R1010	1-216-845-11	s	RESISTOR,CHIP 100K 1/16W(1608)
R1012	1-216-829-11	s	RESISTOR, CHIP 4.7K 1/16W 1608
R1013	1-216-821-11	s	RESISTOR,CHIP 1.0K 1/16W(1608)
R1014	1-216-833-11	s	RESISTOR,CHIP 10K 1/16W 1608
R1015	1-216-833-11	s	RESISTOR,CHIP 10K 1/16W 1608
R1016 *3	1-216-829-11	s	RESISTOR, CHIP 4.7K 1/16W 1608
R1017	1-216-839-11	s	RESISTOR,CHIP 33K 1/16W 1608
R1019	1-216-833-11	s	RESISTOR,CHIP 10K 1/16W 1608
R1020	1-216-833-11	s	RESISTOR,CHIP 10K 1/16W 1608
R1021	1-216-833-11	s	RESISTOR,CHIP 10K 1/16W 1608
R1022	1-216-829-11	s	RESISTOR, CHIP 4.7K 1/16W 1608
R1023	1-216-839-11	s	RESISTOR,CHIP 33K 1/16W 1608
R1024	1-216-839-11	s	RESISTOR,CHIP 33K 1/16W 1608
R1025	1-216-864-11	s	RESISTOR,CHIP 0 1/16W (1608)
R1026	1-216-864-11	s	RESISTOR,CHIP 0 1/16W (1608)
R1027 *5	1-216-864-11	s	RESISTOR,CHIP 0 1/16W (1608)
*1	1-216-864-11	s	RESISTOR,CHIP 0 1/16W (1608)
R1028 *1	1-216-864-11	s	RESISTOR,CHIP 0 1/16W (1608)
R1029 *5	1-216-864-11	s	RESISTOR,CHIP 0 1/16W (1608)
R1030 *3	1-216-825-11	s	RESISTOR,CHIP 2.2K 1/16W 1608
R1035	1-216-864-11	s	RESISTOR,CHIP 0 1/16W (1608)
R1039	1-218-849-11	s	RESISTOR,CHIP 1.2K 1/16W(1608)
R1040 *1	1-218-863-11	s	RESISTOR,CHIP 4.7K 1/16W (1608)
R1041	1-211-990-11	s	RESISTOR,CHIP 75 1/16W (1608)
R1042	1-211-990-11	s	RESISTOR,CHIP 75 1/16W (1608)
R1043	1-218-861-11	s	RESISTOR,CHIP 3.9K 1/16W(1608)
R1044 *1	1-218-861-11	s	RESISTOR,CHIP 3.9K 1/16W(1608)
R1045	1-211-990-11	s	RESISTOR,CHIP 75 1/16W (1608)
R1046	1-218-873-11	s	RESISTOR,CHIP 12K 1/16W (1608)
R1047 *1	1-218-834-11	s	RESISTOR,CHIP 300 1/16W (1608)
R1048 *1	1-218-873-11	s	RESISTOR,CHIP 12K 1/16W (1608)
R1049	1-216-817-11	s	RESISTOR,CHIP 470 1/16W 1608
R1050	1-216-864-11	s	RESISTOR,CHIP 0 1/16W (1608)
R1051	1-216-817-11	s	RESISTOR,CHIP 470 1/16W 1608
R1052	1-216-864-11	s	RESISTOR,CHIP 0 1/16W (1608)
R1053	1-216-817-11	s	RESISTOR,CHIP 470 1/16W 1608
R1054 *1	1-216-817-11	s	RESISTOR,CHIP 470 1/16W 1608
R1055	1-211-985-11	s	RESISTOR,CHIP 47 1/16W (1608)
R1057	1-211-985-11	s	RESISTOR,CHIP 47 1/16W (1608)
R1058	1-211-985-11	s	RESISTOR,CHIP 47 1/16W (1608)
R1065 *1	1-216-864-11	s	RESISTOR,CHIP 0 1/16W (1608)
R1068 *1	1-216-864-11	s	RESISTOR,CHIP 0 1/16W (1608)
R1069	1-216-864-11	s	RESISTOR,CHIP 0 1/16W (1608)
R1071	1-216-864-11	s	RESISTOR,CHIP 0 1/16W (1608)
R1080	1-216-821-11	s	RESISTOR,CHIP 1.0K 1/16W(1608)
R1081	1-216-864-11	s	RESISTOR,CHIP 0 1/16W (1608)
R1082	1-216-864-11	s	RESISTOR,CHIP 0 1/16W (1608)

(VPR-62 BOARD(DSR-2000))

Ref. No. or Q'ty	Part No.	SP	Description
R1083 *1	1-218-871-11	s	RESISTOR,CHIP 10K 1/16W (1608)
R1084 *1	1-218-843-11	s	RESISTOR,CHIP 680 1/16W (1608)
R1085 *3	1-216-864-11	s	RESISTOR,CHIP 0 1/16W (1608)
R1086 *1	1-216-829-11	s	RESISTOR,CHIP 4.7K 1/16W (1608)
R1087	1-216-864-11	s	RESISTOR,CHIP 0 1/16W (1608)
R1088	1-216-864-11	s	RESISTOR,CHIP 0 1/16W (1608)
R1090	1-216-843-11	s	RESISTOR,CHIP 68K 1/16W (1608)
R1091	1-216-821-11	s	RESISTOR,CHIP 1.0K 1/16W(1608)
R1092	1-216-821-11	s	RESISTOR,CHIP 1.0K 1/16W(1608)
R1093	1-216-833-11	s	RESISTOR,CHIP 10K 1/16W 1608
R1094	1-216-833-11	s	RESISTOR,CHIP 10K 1/16W 1608
R1095	1-216-817-11	s	RESISTOR,CHIP 470 1/16W 1608
R1096	1-216-805-11	s	RESISTOR,CHIP 47 1/16W 1608
R1097	1-216-829-11	s	RESISTOR, CHIP 4.7K 1/16W 1608
R1098	1-216-864-11	s	RESISTOR,CHIP 0 1/16W (1608)
R1099	1-216-833-11	s	RESISTOR,CHIP 10K 1/16W 1608
R1100	1-216-833-11	s	RESISTOR,CHIP 10K 1/16W 1608
R1101 *2	1-211-985-11	s	RESISTOR,CHIP 47 1/16W (1608)
R1102 *2	1-216-829-11	s	RESISTOR, CHIP 4.7K 1/16W 1608
R1103 *2	1-216-829-11	s	RESISTOR, CHIP 4.7K 1/16W 1608
R1104 *2	1-216-864-11	s	RESISTOR,CHIP 0 1/16W (1608)
R1107 *4	1-216-864-11	s	RESISTOR,CHIP 0 1/16W (1608)
R1201 *2	1-216-864-11	s	RESISTOR,CHIP 0 1/16W (1608)
RB4 *2	1-239-711-11	s	NETWORK, RESISTOR 0 (1608)
*1	1-239-390-11	s	RESISTOR,NETWORK 33 (1608)
RB5 *2	1-239-711-11	s	NETWORK, RESISTOR 0 (1608)
*1	1-239-390-11	s	RESISTOR,NETWORK 33 (1608)
RB6 *2	1-239-711-11	s	NETWORK, RESISTOR 0 (1608)
*1	1-239-390-11	s	RESISTOR,NETWORK 33 (1608)
RB7 *2	1-239-711-11	s	NETWORK, RESISTOR 0 (1608)
*1	1-239-390-11	s	RESISTOR,NETWORK 33 (1608)
RB201	1-239-412-11	s	NETWORK, RESISTOR 100 (1608)
RB202	1-239-412-11	s	NETWORK, RESISTOR 100 (1608)
RB203	1-239-412-11	s	NETWORK, RESISTOR 100 (1608)
RB204	1-239-412-11	s	NETWORK, RESISTOR 100 (1608)
RB205	1-239-412-11	s	NETWORK, RESISTOR 100 (1608)
RB206	1-236-908-11	s	RESISTOR,NETWORK 10K (3216)
RB207	1-236-908-11	s	RESISTOR,NETWORK 10K (3216)
RB301	1-236-904-11	s	RESISTOR NETWORK 1K (1608)
RB401	1-239-390-11	s	RESISTOR,NETWORK 33 (1608)
RB402	1-239-390-11	s	RESISTOR,NETWORK 33 (1608)
RB403	1-239-390-11	s	RESISTOR,NETWORK 33 (1608)
RB404	1-239-390-11	s	RESISTOR,NETWORK 33 (1608)
RB405	1-239-390-11	s	RESISTOR,NETWORK 33 (1608)
RB601 *2	1-239-409-11	s	RESISTOR NETWORK 47 (1608)
RB602 *2	1-239-409-11	s	RESISTOR NETWORK 47 (1608)
RB603 *2	1-239-409-11	s	RESISTOR NETWORK 47 (1608)
RB604 *2	1-239-409-11	s	RESISTOR NETWORK 47 (1608)
RB605 *2	1-239-409-11	s	RESISTOR NETWORK 47 (1608)
RB606 *2	1-239-409-11	s	RESISTOR NETWORK 47 (1608)
RB1001	1-236-907-11	s	RESISTOR BLOCK 100K (1608)
RB1002	1-239-412-11	s	NETWORK, RESISTOR 100 (1608)
RV101	1-225-785-21	s	RES, ADJ, CERMET 100
RV103	1-225-787-21	s	RES, ADJ, CERMET 500
RV200	1-225-809-21	s	RES, ADJ, CERMET 5K
RV201	1-225-810-21	s	RES, ADJ, CERMET 10K
RV202	1-225-809-21	s	RES, ADJ, CERMET 5K
RV300	1-225-789-21	s	RES, ADJ, CERMET 2K
RV400	1-225-787-21	s	RES, ADJ, CERMET 500

(VPR-62 BOARD(DSR-2000))

Ref. No. or Q'ty	Part No.	SP	Description
RV401	1-225-787-21	s	RES, ADJ, CERMET 500
RV402	1-225-787-21	s	RES, ADJ, CERMET 500
RV403	1-225-788-21	s	RES, ADJ, CERMET 1K
RV404	1-225-789-21	s	RES, ADJ, CERMET 2K
RV405	1-225-789-21	s	RES, ADJ, CERMET 2K
RV406	1-225-789-21	s	RES, ADJ, CERMET 2K
RV407	1-225-789-21	s	RES, ADJ, CERMET 2K
RV408	1-225-789-21	s	RES, ADJ, CERMET 2K
RV409	1-225-789-21	s	RES, ADJ, CERMET 2K
RV500	1-225-810-21	s	RES, ADJ, CERMET 10K
RV601	1-225-809-21	s	RES, ADJ, CERMET 5K
RV602	1-225-809-21	s	RES, ADJ, CERMET 5K
RV603	1-225-807-21	s	RES, ADJ, CERMET 2K
RV604	1-225-789-21	s	RES, ADJ, CERMET 2K
RV605	1-225-785-21	s	RES, ADJ, CERMET 100
RV606	1-225-789-21	s	RES, ADJ, CERMET 2K
RV607	1-225-785-21	s	RES, ADJ, CERMET 100
RV701	1-225-809-21	s	RES, ADJ, CERMET 5K
RV702	1-225-809-21	s	RES, ADJ, CERMET 5K
RV703	1-225-813-21	s	RES, ADJ, CERMET 50K
RV704	1-225-813-21	s	RES, ADJ, CERMET 50K
RV705	1-225-789-21	s	RES, ADJ, CERMET 2K
RV801	1-225-787-21	s	RES, ADJ, CERMET 500
RV802	1-225-785-21	s	RES, ADJ, CERMET 100
RV803	1-225-787-21	s	RES, ADJ, CERMET 500
RV804	1-225-788-21	s	RES, ADJ, CERMET 1K
RV805	1-225-788-21	s	RES, ADJ, CERMET 1K
RV806	1-225-785-21	s	RES, ADJ, CERMET 100
RV901	1-225-791-21	s	RES, ADJ, CERMET 5K
RV902	1-225-810-21	s	RES, ADJ, CERMET 10K
RV903	1-225-810-21	s	RES, ADJ, CERMET 10K
RV904	1-225-789-21	s	RES, ADJ, CERMET 2K
RV906	1-225-788-21	s	RES, ADJ, CERMET 1K
RV1001	1-225-792-21	s	RES, ADJ, CERMET 10K
RV1002	1-225-792-21	s	RES, ADJ, CERMET 10K
S200	1-571-275-31	s	SWITCH,SLIDE (1-1-2)
THP701	1-809-352-11	s	THERMISTOR,NTC
X300	1-760-109-21	s	VIBRATOR, CRYSTAL
X301	1-767-617-11	s	OSCILLATOR, CRYSTAL
X601	1-781-123-21	s	OSCILLATOR, CRYSTAL
X602	1-781-123-21	s	OSCILLATOR, CRYSTAL
X603	1-781-123-21	s	OSCILLATOR, CRYSTAL
X1001	1-767-617-11	s	OSCILLATOR, CRYSTAL
X1002	1-767-695-21	s	OSCILLATOR, CRYSTAL

VPR-62P BOARD(DSR-2000P)

---

*1: Board No. suffix 11
*2: Board No. suffix 12 -
*3: Board No. suffix 11 - 12
*4: Board No. suffix 12
*5: Board No. suffix 14 -

*a: Lot No. 002 -
*b: Lot No. 907 - 912
*c: Lot No. 001 -

Ref. No. or Q'ty	Part No.	SP	Description
1pc	A-8323-488-A	s	MOUNTED CIRCUIT BOARD, VPR-62P
1pc	3-179-085-01	s	LEVER(L),PRINTED C.BOARD
1pc	3-179-084-01	s	LEVER(R),PRINTED C.BOARD
C1	1-126-396-11	s	CAPACITOR,ELECT 47MF/16V(CHIP)
C2	1-126-396-11	s	CAPACITOR,ELECT 47MF/16V(CHIP)
C3	1-126-392-11	s	CAPACITOR,CHIP ELECT100MF/6.3V
C4	1-126-396-11	s	CAPACITOR,ELECT 47MF/16V(CHIP)
C5	1-126-392-11	s	CAPACITOR,CHIP ELECT100MF/6.3V
C6	1-126-392-11	s	CAPACITOR,CHIP ELECT100MF/6.3V
C7	1-164-227-11	s	CAPACITOR,CERAMIC 0.022MF/25V
C8	1-164-227-11	s	CAPACITOR,CERAMIC 0.022MF/25V
C9	1-164-227-11	s	CAPACITOR,CERAMIC 0.022MF/25V
C10	1-164-227-11	s	CAPACITOR,CERAMIC 0.022MF/25V
C11	1-164-227-11	s	CAPACITOR,CERAMIC 0.022MF/25V
C12	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
C13	1-164-227-11	s	CAPACITOR,CERAMIC 0.022MF/25V
C14	1-164-227-11	s	CAPACITOR,CERAMIC 0.022MF/25V
C15	1-164-227-11	s	CAPACITOR,CERAMIC 0.022MF/25V
C16	1-164-227-11	s	CAPACITOR,CERAMIC 0.022MF/25V
C17	1-126-392-11	s	CAPACITOR,CHIP ELECT100MF/6.3V
C18	1-126-392-11	s	CAPACITOR,CHIP ELECT100MF/6.3V
C19	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
C20	1-126-392-11	s	CAPACITOR,CHIP ELECT100MF/6.3V
C21	1-126-392-11	s	CAPACITOR,CHIP ELECT100MF/6.3V
C22	1-164-227-11	s	CAPACITOR,CERAMIC 0.022MF/25V
C23	1-164-227-11	s	CAPACITOR,CERAMIC 0.022MF/25V
C24	1-164-227-11	s	CAPACITOR,CERAMIC 0.022MF/25V
C25	1-164-227-11	s	CAPACITOR,CERAMIC 0.022MF/25V
C26	1-164-227-11	s	CAPACITOR,CERAMIC 0.022MF/25V
C27	1-164-227-11	s	CAPACITOR,CERAMIC 0.022MF/25V
C28	1-126-396-11	s	CAPACITOR,ELECT 47MF/16V(CHIP)
C29	1-126-396-11	s	CAPACITOR,ELECT 47MF/16V(CHIP)
C30	1-126-392-11	s	CAPACITOR,CHIP ELECT100MF/6.3V
C31	1-126-392-11	s	CAPACITOR,CHIP ELECT100MF/6.3V
C32	1-126-392-11	s	CAPACITOR,CHIP ELECT100MF/6.3V
C33	1-126-392-11	s	CAPACITOR,CHIP ELECT100MF/6.3V
C34	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
C35	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
C36	1-126-391-11	s	CAPACITOR ELECT 47MF/6.3V(105)
C37	1-126-391-11	s	CAPACITOR ELECT 47MF/6.3V(105)
C38	1-164-227-11	s	CAPACITOR,CERAMIC 0.022MF/25V
C39	1-126-396-11	s	CAPACITOR,ELECT 47MF/16V(CHIP)
C101	1-126-392-11	s	CAPACITOR,CHIP ELECT100MF/6.3V
C102	1-126-392-11	s	CAPACITOR,CHIP ELECT100MF/6.3V
C103	1-164-227-11	s	CAPACITOR,CERAMIC 0.022MF/25V
C104	1-164-227-11	s	CAPACITOR,CERAMIC 0.022MF/25V
C105	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
C107	1-126-396-11	s	CAPACITOR,ELECT 47MF/16V(CHIP)
C108	1-164-227-11	s	CAPACITOR,CERAMIC 0.022MF/25V

(VPR-62P BOARD(DSR-2000P))

Ref. No. or Q'ty	Part No.	SP	Description
C109	1-164-227-11	s	CAPACITOR,CERAMIC 0.022MF/25V
C110	1-126-392-11	s	CAPACITOR,CHIP ELECT100MF/6.3V
C111	1-126-392-11	s	CAPACITOR,CHIP ELECT100MF/6.3V
C112	1-164-227-11	s	CAPACITOR,CERAMIC 0.022MF/25V
C113	1-164-227-11	s	CAPACITOR,CERAMIC 0.022MF/25V
C114	1-126-396-11	s	CAPACITOR,ELECT 47MF/16V(CHIP)
C115	1-164-227-11	s	CAPACITOR,CERAMIC 0.022MF/25V
C116	1-164-227-11	s	CAPACITOR,CERAMIC 0.022MF/25V
C117	1-164-227-11	s	CAPACITOR,CERAMIC 0.022MF/25V
C118	1-164-227-11	s	CAPACITOR,CERAMIC 0.022MF/25V
C119	1-164-227-11	s	CAPACITOR,CERAMIC 0.022MF/25V
C120	1-126-392-11	s	CAPACITOR,CHIP ELECT100MF/6.3V
C121	1-164-227-11	s	CAPACITOR,CERAMIC 0.022MF/25V
C122	1-164-227-11	s	CAPACITOR,CERAMIC 0.022MF/25V
C123	1-126-396-11	s	CAPACITOR,ELECT 47MF/16V(CHIP)
C124	1-164-227-11	s	CAPACITOR,CERAMIC 0.022MF/25V
C125	1-164-227-11	s	CAPACITOR,CERAMIC 0.022MF/25V
C126	1-126-396-11	s	CAPACITOR,ELECT 47MF/16V(CHIP)
C127	1-126-396-11	s	CAPACITOR,ELECT 47MF/16V(CHIP)
C128	1-162-921-11	s	CAPACITOR,CERAMIC 33PF/50V CH
C129	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
C130	1-164-227-11	s	CAPACITOR,CERAMIC 0.022MF/25V
C131	1-164-227-11	s	CAPACITOR,CERAMIC 0.022MF/25V
C132	1-164-227-11	s	CAPACITOR,CERAMIC 0.022MF/25V
C133	1-164-227-11	s	CAPACITOR,CERAMIC 0.022MF/25V
C134	1-164-227-11	s	CAPACITOR,CERAMIC 0.022MF/25V
C135	1-110-569-11	s	CAPACITOR CHIP TANTAL47MF/6.3V
C137	1-110-569-11	s	CAPACITOR CHIP TANTAL47MF/6.3V
C138	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
C139	1-104-851-11	s	CAPACITOR,TANTALUM 10MF/10V
C140	1-164-227-11	s	CAPACITOR,CERAMIC 0.022MF/25V
C141 *5	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
C200	1-164-227-11	s	CAPACITOR,CERAMIC 0.022MF/25V
C201	1-126-392-11	s	CAPACITOR,CHIP ELECT100MF/6.3V
C202	1-162-921-11	s	CAPACITOR,CERAMIC 33PF/50V CH
C203	1-164-227-11	s	CAPACITOR,CERAMIC 0.022MF/25V
C204	1-164-227-11	s	CAPACITOR,CERAMIC 0.022MF/25V
C205	1-164-227-11	s	CAPACITOR,CERAMIC 0.022MF/25V
C206	1-164-227-11	s	CAPACITOR,CERAMIC 0.022MF/25V
C207	1-164-227-11	s	CAPACITOR,CERAMIC 0.022MF/25V
C208	1-164-227-11	s	CAPACITOR,CERAMIC 0.022MF/25V
C209	1-164-227-11	s	CAPACITOR,CERAMIC 0.022MF/25V
C210	1-164-227-11	s	CAPACITOR,CERAMIC 0.022MF/25V
C211	1-164-227-11	s	CAPACITOR,CERAMIC 0.022MF/25V
C212	1-164-227-11	s	CAPACITOR,CERAMIC 0.022MF/25V
C213	1-164-227-11	s	CAPACITOR,CERAMIC 0.022MF/25V
C217	1-164-227-11	s	CAPACITOR,CERAMIC 0.022MF/25V
C218	1-164-227-11	s	CAPACITOR,CERAMIC 0.022MF/25V
C219	1-126-392-11	s	CAPACITOR,CHIP ELECT100MF/6.3V
C220	1-164-227-11	s	CAPACITOR,CERAMIC 0.022MF/25V
C221	1-164-227-11	s	CAPACITOR,CERAMIC 0.022MF/25V
C222	1-164-227-11	s	CAPACITOR,CERAMIC 0.022MF/25V
C223	1-164-227-11	s	CAPACITOR,CERAMIC 0.022MF/25V
C224	1-164-227-11	s	CAPACITOR,CERAMIC 0.022MF/25V
C226	1-164-227-11	s	CAPACITOR,CERAMIC 0.022MF/25V
C227	1-126-392-11	s	CAPACITOR,CHIP ELECT100MF/6.3V
C228	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
C229	1-164-227-11	s	CAPACITOR,CERAMIC 0.022MF/25V
C230	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF

(VPR-62P BOARD(DSR-2000P))

Ref. No. or Q'ty	Part No.	SP	Description
C231	1-164-227-11	s	CAPACITOR,CERAMIC 0.022MF/25V
C232	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
C233	1-164-227-11	s	CAPACITOR,CERAMIC 0.022MF/25V
C234	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
C235	1-164-227-11	s	CAPACITOR,CERAMIC 0.022MF/25V
C236	1-164-227-11	s	CAPACITOR,CERAMIC 0.022MF/25V
C237	1-164-227-11	s	CAPACITOR,CERAMIC 0.022MF/25V
C238	1-162-927-11	s	CAPACITOR,CERAMIC 100PF/50V CH
C239	1-162-927-11	s	CAPACITOR,CERAMIC 100PF/50V CH
C240	1-162-927-11	s	CAPACITOR,CERAMIC 100PF/50V CH
C241	1-126-392-11	s	CAPACITOR,CHIP ELECT100MF/6.3V
C242	1-126-392-11	s	CAPACITOR,CHIP ELECT100MF/6.3V
C243	1-164-227-11	s	CAPACITOR,CERAMIC 0.022MF/25V
C244	1-164-227-11	s	CAPACITOR,CERAMIC 0.022MF/25V
C245	1-164-227-11	s	CAPACITOR,CERAMIC 0.022MF/25V
C246	1-164-227-11	s	CAPACITOR,CERAMIC 0.022MF/25V
C247	1-164-227-11	s	CAPACITOR,CERAMIC 0.022MF/25V
C248	1-164-227-11	s	CAPACITOR,CERAMIC 0.022MF/25V
C249	1-164-227-11	s	CAPACITOR,CERAMIC 0.022MF/25V
C250	1-164-227-11	s	CAPACITOR,CERAMIC 0.022MF/25V
C252	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
C253 *2	1-126-392-11	s	CAPACITOR,CHIP ELECT100MF/6.3V
*1	1-124-584-00	s	CAPACITOR,ELECT 100MF/10V
C300	1-126-392-11	s	CAPACITOR,CHIP ELECT100MF/6.3V
C301	1-126-392-11	s	CAPACITOR,CHIP ELECT100MF/6.3V
C302	1-164-227-11	s	CAPACITOR,CERAMIC 0.022MF/25V
C303	1-164-227-11	s	CAPACITOR,CERAMIC 0.022MF/25V
C304	1-126-396-11	s	CAPACITOR,ELECT 47MF/16V(CHIP)
C305	1-162-926-11	s	CAPACITOR,CERAMIC 82PF/50V CH
C306	1-164-227-11	s	CAPACITOR,CERAMIC 0.022MF/25V
C307	1-164-227-11	s	CAPACITOR,CERAMIC 0.022MF/25V
C308	1-164-227-11	s	CAPACITOR,CERAMIC 0.022MF/25V
C309	1-162-919-11	s	CAPACITOR,CERAMIC 22PF/50V CH
C310	1-162-919-11	s	CAPACITOR,CERAMIC 22PF/50V CH
C311	1-104-851-11	s	CAPACITOR,TANTALUM 10MF/10V
C312	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
C313	1-164-227-11	s	CAPACITOR,CERAMIC 0.022MF/25V
C314	1-164-227-11	s	CAPACITOR,CERAMIC 0.022MF/25V
C315	1-164-227-11	s	CAPACITOR,CERAMIC 0.022MF/25V
C316	1-126-392-11	s	CAPACITOR,CHIP ELECT100MF/6.3V
C317	1-126-392-11	s	CAPACITOR,CHIP ELECT100MF/6.3V
C318	1-164-230-11	s	CAPACITOR,CERAMIC 220PF/50V
C319	1-162-921-11	s	CAPACITOR,CERAMIC 33PF/50V CH
C320	1-164-217-11	s	CAPACITOR,CERAMIC 150PF/50V CH
C321	1-164-227-11	s	CAPACITOR,CERAMIC 0.022MF/25V
C322	1-164-227-11	s	CAPACITOR,CERAMIC 0.022MF/25V
C323	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
C324	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
C325	1-164-227-11	s	CAPACITOR,CERAMIC 0.022MF/25V
C326	1-126-392-11	s	CAPACITOR,CHIP ELECT100MF/6.3V
C327	1-164-227-11	s	CAPACITOR,CERAMIC 0.022MF/25V
C328	1-164-227-11	s	CAPACITOR,CERAMIC 0.022MF/25V
C329	1-164-227-11	s	CAPACITOR,CERAMIC 0.022MF/25V
C330	1-164-227-11	s	CAPACITOR,CERAMIC 0.022MF/25V
C331	1-164-227-11	s	CAPACITOR,CERAMIC 0.022MF/25V
C332	1-164-315-11	s	CAPACITOR,CERAMIC 470PF/50V CH
C333	1-162-968-11	s	CAPACITOR,CERAMIC 4700PF/50V B
C334	1-162-968-11	s	CAPACITOR,CERAMIC 4700PF/50V B
C335	1-164-227-11	s	CAPACITOR,CERAMIC 0.022MF/25V

(VPR-62P BOARD(DSR-2000P))

Ref. No. or Q'ty	Part No.	SP	Description
C336	1-164-227-11	s	CAPACITOR,CERAMIC 0.022MF/25V
C337	1-164-227-11	s	CAPACITOR,CERAMIC 0.022MF/25V
C338	1-126-392-11	s	CAPACITOR,CHIP ELECT100MF/6.3V
C339	1-164-217-11	s	CAPACITOR,CERAMIC 150PF/50V CH
C340	1-164-227-11	s	CAPACITOR,CERAMIC 0.022MF/25V
C341	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
C342	1-162-919-11	s	CAPACITOR,CERAMIC 22PF/50V CH
C343	1-162-921-11	s	CAPACITOR,CERAMIC 33PF/50V CH
C344	1-126-392-11	s	CAPACITOR,CHIP ELECT100MF/6.3V
C345	1-164-227-11	s	CAPACITOR,CERAMIC 0.022MF/25V
C346	1-126-392-11	s	CAPACITOR,CHIP ELECT100MF/6.3V
C347	1-164-217-11	s	CAPACITOR,CERAMIC 150PF/50V CH
C348	1-164-227-11	s	CAPACITOR,CERAMIC 0.022MF/25V
C349	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
C351	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
C352	1-162-922-11	s	CAPACITOR,CERAMIC 39PF/50V CH
C354	1-164-227-11	s	CAPACITOR,CERAMIC 0.022MF/25V
C355	1-126-392-11	s	CAPACITOR,CHIP ELECT100MF/6.3V
C356	1-162-959-11	s	CAPACITOR,CERAMIC 330PF/50V SL
C359	1-164-227-11	s	CAPACITOR,CERAMIC 0.022MF/25V
C360	1-126-392-11	s	CAPACITOR,CHIP ELECT100MF/6.3V
C361	1-164-227-11	s	CAPACITOR,CERAMIC 0.022MF/25V
C362	1-162-968-11	s	CAPACITOR,CERAMIC 4700PF/50V B
C363	1-126-392-11	s	CAPACITOR,CHIP ELECT100MF/6.3V
C364	1-164-227-11	s	CAPACITOR,CERAMIC 0.022MF/25V
C365	1-164-227-11	s	CAPACITOR,CERAMIC 0.022MF/25V
C366	1-164-227-11	s	CAPACITOR,CERAMIC 0.022MF/25V
C367	1-164-227-11	s	CAPACITOR,CERAMIC 0.022MF/25V
C400	1-164-227-11	s	CAPACITOR,CERAMIC 0.022MF/25V
C401	1-164-227-11	s	CAPACITOR,CERAMIC 0.022MF/25V
C402	1-126-396-11	s	CAPACITOR,ELECT 47MF/16V(CHIP)
C403	1-126-392-11	s	CAPACITOR,CHIP ELECT100MF/6.3V
C404	1-126-392-11	s	CAPACITOR,CHIP ELECT100MF/6.3V
C405	1-126-392-11	s	CAPACITOR,CHIP ELECT100MF/6.3V
C406	1-126-392-11	s	CAPACITOR,CHIP ELECT100MF/6.3V
C407	1-126-392-11	s	CAPACITOR,CHIP ELECT100MF/6.3V
C408	1-164-227-11	s	CAPACITOR,CERAMIC 0.022MF/25V
C409	1-164-227-11	s	CAPACITOR,CERAMIC 0.022MF/25V
C410	1-164-227-11	s	CAPACITOR,CERAMIC 0.022MF/25V
C411	1-164-227-11	s	CAPACITOR,CERAMIC 0.022MF/25V
C412	1-164-227-11	s	CAPACITOR,CERAMIC 0.022MF/25V
C413	1-164-227-11	s	CAPACITOR,CERAMIC 0.022MF/25V
C414	1-162-921-11	s	CAPACITOR,CERAMIC 33PF/50V CH
C415	1-162-919-11	s	CAPACITOR,CERAMIC 22PF/50V CH
C416	1-162-919-11	s	CAPACITOR,CERAMIC 22PF/50V CH
C419	1-162-921-11	s	CAPACITOR,CERAMIC 33PF/50V CH
C420	1-162-921-11	s	CAPACITOR,CERAMIC 33PF/50V CH
C421	1-164-227-11	s	CAPACITOR,CERAMIC 0.022MF/25V
C422	1-164-227-11	s	CAPACITOR,CERAMIC 0.022MF/25V
C425	1-164-227-11	s	CAPACITOR,CERAMIC 0.022MF/25V
C426	1-164-227-11	s	CAPACITOR,CERAMIC 0.022MF/25V
C427	1-126-392-11	s	CAPACITOR,CHIP ELECT100MF/6.3V
C428	1-126-392-11	s	CAPACITOR,CHIP ELECT100MF/6.3V
C429	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
C430	1-162-964-11	s	CAPACITOR,CERAMIC 1000PF/50V B
C431	1-164-227-11	s	CAPACITOR,CERAMIC 0.022MF/25V
C432	1-164-227-11	s	CAPACITOR,CERAMIC 0.022MF/25V
C433	1-164-227-11	s	CAPACITOR,CERAMIC 0.022MF/25V
C434	1-165-176-11	s	CAPACITOR,CERAMIC 47000PF/16V

(VPR-62P BOARD(DSR-2000P))

Ref. No. or Q'ty	Part No.	SP	Description
C435	1-162-917-11	s	CAPACITOR,CERAMIC 15PF/50V CH
C436	1-164-227-11	s	CAPACITOR,CERAMIC 0.022MF/25V
C437	1-164-227-11	s	CAPACITOR,CERAMIC 0.022MF/25V
C438	1-164-227-11	s	CAPACITOR,CERAMIC 0.022MF/25V
C439	1-164-227-11	s	CAPACITOR,CERAMIC 0.022MF/25V
C440	1-126-391-11	s	CAPACITOR ELECT 47MF/6.3V(105)
C441	1-126-391-11	s	CAPACITOR ELECT 47MF/6.3V(105)
C442	1-126-391-11	s	CAPACITOR ELECT 47MF/6.3V(105)
C443	1-126-391-11	s	CAPACITOR ELECT 47MF/6.3V(105)
C444	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
C446	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
C447	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
C448	1-126-392-11	s	CAPACITOR,CHIP ELECT100MF/6.3V
C449	1-164-227-11	s	CAPACITOR,CERAMIC 0.022MF/25V
C450	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
C451	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
C452	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
C453	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
C455	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
C456	1-126-391-11	s	CAPACITOR ELECT 47MF/6.3V(105)
C458	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
C459	1-126-391-11	s	CAPACITOR ELECT 47MF/6.3V(105)
C460	1-126-391-11	s	CAPACITOR ELECT 47MF/6.3V(105)
C461	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
C462	1-164-227-11	s	CAPACITOR,CERAMIC 0.022MF/25V
C463	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
C464	1-162-915-11	s	CAPACITOR,CERAMIC 10PF/50V CH
C465	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
C466	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
C467	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
C468	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
C470	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
C471	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
C472	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
C473	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
C475	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
C476	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
C477	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
C478	1-126-392-11	s	CAPACITOR,CHIP ELECT100MF/6.3V
C479	1-126-392-11	s	CAPACITOR,CHIP ELECT100MF/6.3V
C480	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
C481	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
C482	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
C483	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
C484	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
C485	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
C486	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
C487	1-162-915-11	s	CAPACITOR,CERAMIC 10PF/50V CH
C488	1-162-915-11	s	CAPACITOR,CERAMIC 10PF/50V CH
C501	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
C502	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
C503	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
C504	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
C505	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
C507	1-126-392-11	s	CAPACITOR,CHIP ELECT100MF/6.3V
C509	1-126-401-11	s	CAPACITOR, ELECT 1MF/50V(CHIP)
C510	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
C511	1-115-467-11	s	CAPACITOR CERAMIC 0.22MF/10V B
C512	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF

(VPR-62P BOARD(DSR-2000P))

Ref. No. or Q'ty	Part No.	SP	Description
C513	1-162-964-11	s	CAPACITOR,CERAMIC 1000PF/50V B
C514	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
C515	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
C516	1-115-467-11	s	CAPACITOR CERAMIC 0.22MF/10V B
C517	1-115-467-11	s	CAPACITOR CERAMIC 0.22MF/10V B
C518	1-115-414-11	s	CAPACITOR,CHIP CERAMIC 820PF
C519	1-115-467-11	s	CAPACITOR CERAMIC 0.22MF/10V B
C520	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
C521	1-162-927-11	s	CAPACITOR,CERAMIC 100PF/50V CH
C522	1-115-467-11	s	CAPACITOR CERAMIC 0.22MF/10V B
C523	1-162-964-11	s	CAPACITOR,CERAMIC 1000PF/50V B
C524	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
C525	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
C526	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
C527	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
C528	1-126-392-11	s	CAPACITOR,CHIP ELECT100MF/6.3V
C529	1-126-392-11	s	CAPACITOR,CHIP ELECT100MF/6.3V
C530	1-162-926-11	s	CAPACITOR,CERAMIC 82PF/50V CH
C531	1-164-392-11	s	CAPACITOR CERAMIC 390PF/50V CH
C532	1-162-964-11	s	CAPACITOR,CERAMIC 1000PF/50V B
C533	1-126-392-11	s	CAPACITOR,CHIP ELECT100MF/6.3V
C534	1-164-227-11	s	CAPACITOR,CERAMIC 0.022MF/25V
C535	1-126-394-11	s	CAPACITOR,ELECT 10MF/16V(CHIP)
C536	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
C537	1-126-391-11	s	CAPACITOR ELECT 47MF/6.3V(105)
C538	1-162-970-11	s	CAPACITOR CERAMIC 0.01MF/25V B
C539	1-126-401-11	s	CAPACITOR, ELECT 1MF/50V(CHIP)
C540	1-126-401-11	s	CAPACITOR, ELECT 1MF/50V(CHIP)
C542	1-162-970-11	s	CAPACITOR CERAMIC 0.01MF/25V B
C543	1-162-970-11	s	CAPACITOR CERAMIC 0.01MF/25V B
C544	1-164-315-11	s	CAPACITOR,CERAMIC 470PF/50V CH
C545	1-162-967-11	s	CAPACITOR,CERAMIC 3300PF/50V B
C546	1-162-967-11	s	CAPACITOR,CERAMIC 3300PF/50V B
C547	1-104-912-11	s	CAPACITOR TANTALUM 3.3MF/16V
C548	1-162-911-11	s	CAPACITOR,CERAMIC 6PF/50V 1608
C549	1-162-920-11	s	CAPACITOR,CERAMIC 27PF/50V CH
C550	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
C551	1-162-970-11	s	CAPACITOR CERAMIC 0.01MF/25V B
C552	1-162-927-11	s	CAPACITOR,CERAMIC 100PF/50V CH
C553	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
C554	1-126-391-11	s	CAPACITOR ELECT 47MF/6.3V(105)
C555	1-164-227-11	s	CAPACITOR,CERAMIC 0.022MF/25V
C601	1-164-227-11	s	CAPACITOR,CERAMIC 0.022MF/25V
C602	1-162-919-11	s	CAPACITOR,CERAMIC 22PF/50V CH
C603	1-164-227-11	s	CAPACITOR,CERAMIC 0.022MF/25V
C604	1-164-227-11	s	CAPACITOR,CERAMIC 0.022MF/25V
C605	1-164-227-11	s	CAPACITOR,CERAMIC 0.022MF/25V
C606	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
C607	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
C608	1-162-964-11	s	CAPACITOR,CERAMIC 1000PF/50V B
C609	1-162-964-11	s	CAPACITOR,CERAMIC 1000PF/50V B
C610	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
C611	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
C612	1-164-227-11	s	CAPACITOR,CERAMIC 0.022MF/25V
C613	1-164-227-11	s	CAPACITOR,CERAMIC 0.022MF/25V
C614	1-164-227-11	s	CAPACITOR,CERAMIC 0.022MF/25V
C615	1-164-227-11	s	CAPACITOR,CERAMIC 0.022MF/25V
C616	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
C617	1-162-964-11	s	CAPACITOR,CERAMIC 1000PF/50V B

(VPR-62P BOARD(DSR-2000P))

Ref. No. or Q'ty	Part No.	SP	Description
C618	1-164-227-11	s	CAPACITOR,CERAMIC 0.022MF/25V
C619	1-126-392-11	s	CAPACITOR,CHIP ELECT100MF/6.3V
C620	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
C621	1-164-227-11	s	CAPACITOR,CERAMIC 0.022MF/25V
C622	1-164-227-11	s	CAPACITOR,CERAMIC 0.022MF/25V
C623	1-164-227-11	s	CAPACITOR,CERAMIC 0.022MF/25V
C624	1-164-227-11	s	CAPACITOR,CERAMIC 0.022MF/25V
C625	1-126-391-11	s	CAPACITOR ELECT 47MF/6.3V(105)
C626	1-126-391-11	s	CAPACITOR ELECT 47MF/6.3V(105)
C627	1-164-227-11	s	CAPACITOR,CERAMIC 0.022MF/25V
C628	1-164-227-11	s	CAPACITOR,CERAMIC 0.022MF/25V
C629	1-164-227-11	s	CAPACITOR,CERAMIC 0.022MF/25V
C630	1-164-227-11	s	CAPACITOR,CERAMIC 0.022MF/25V
C631	1-164-227-11	s	CAPACITOR,CERAMIC 0.022MF/25V
C632	1-164-227-11	s	CAPACITOR,CERAMIC 0.022MF/25V
C633	1-126-392-11	s	CAPACITOR,CHIP ELECT100MF/6.3V
C634	1-126-392-11	s	CAPACITOR,CHIP ELECT100MF/6.3V
C635	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
C636	1-164-227-11	s	CAPACITOR,CERAMIC 0.022MF/25V
C637	1-126-392-11	s	CAPACITOR,CHIP ELECT100MF/6.3V
C638	1-126-391-11	s	CAPACITOR ELECT 47MF/6.3V(105)
C639	1-164-227-11	s	CAPACITOR,CERAMIC 0.022MF/25V
C640	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
C641	1-164-227-11	s	CAPACITOR,CERAMIC 0.022MF/25V
C642	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
C643	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
C644	1-164-227-11	s	CAPACITOR,CERAMIC 0.022MF/25V
C645	1-164-227-11	s	CAPACITOR,CERAMIC 0.022MF/25V
C646	1-126-392-11	s	CAPACITOR,CHIP ELECT100MF/6.3V
C647	1-164-227-11	s	CAPACITOR,CERAMIC 0.022MF/25V
C648	1-164-227-11	s	CAPACITOR,CERAMIC 0.022MF/25V
C649	1-164-227-11	s	CAPACITOR,CERAMIC 0.022MF/25V
C650	1-164-227-11	s	CAPACITOR,CERAMIC 0.022MF/25V
C651	1-135-210-11	s	CAPACITOR TANTAL 4.7MF/10V
C652	1-164-227-11	s	CAPACITOR,CERAMIC 0.022MF/25V
C653	1-126-392-11	s	CAPACITOR,CHIP ELECT100MF/6.3V
C654	1-126-396-11	s	CAPACITOR,ELECT 47MF/16V(CHIP)
C655	1-164-227-11	s	CAPACITOR,CERAMIC 0.022MF/25V
C656	1-164-227-11	s	CAPACITOR,CERAMIC 0.022MF/25V
C657	1-162-917-11	s	CAPACITOR,CERAMIC 15PF/50V CH
C658	1-162-923-11	s	CAPACITOR,CERAMIC 47PF/50V CH
C659	1-162-921-11	s	CAPACITOR,CERAMIC 33PF/50V CH
C660	1-162-920-11	s	CAPACITOR,CERAMIC 27PF/50V CH
C662	1-164-227-11	s	CAPACITOR,CERAMIC 0.022MF/25V
C663	1-164-227-11	s	CAPACITOR,CERAMIC 0.022MF/25V
C664	1-164-227-11	s	CAPACITOR,CERAMIC 0.022MF/25V
C665	1-162-917-11	s	CAPACITOR,CERAMIC 15PF/50V CH
C666	1-164-227-11	s	CAPACITOR,CERAMIC 0.022MF/25V
C667	1-162-923-11	s	CAPACITOR,CERAMIC 47PF/50V CH
C668	1-162-921-11	s	CAPACITOR,CERAMIC 33PF/50V CH
C669	1-162-920-11	s	CAPACITOR,CERAMIC 27PF/50V CH
C671	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
C672	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
C673	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
C674	*2 1-162-964-11	s	CAPACITOR,CERAMIC 1000PF/50V B
	*1 1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
C675	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
C676	1-126-392-11	s	CAPACITOR,CHIP ELECT100MF/6.3V
C677	1-126-392-11	s	CAPACITOR,CHIP ELECT100MF/6.3V

(VPR-62P BOARD(DSR-2000P))

Ref. No. or Q'ty	Part No.	SP	Description
C678 *2	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
C701	1-126-392-11	s	CAPACITOR,CHIP ELECT100MF/6.3V
C702	1-126-392-11	s	CAPACITOR,CHIP ELECT100MF/6.3V
C703	1-162-915-11	s	CAPACITOR,CERAMIC 10PF/50V CH
C704	1-164-227-11	s	CAPACITOR,CERAMIC 0.022MF/25V
C705	1-164-227-11	s	CAPACITOR,CERAMIC 0.022MF/25V
C706	1-164-227-11	s	CAPACITOR,CERAMIC 0.022MF/25V
C707	1-164-227-11	s	CAPACITOR,CERAMIC 0.022MF/25V
C708	1-164-227-11	s	CAPACITOR,CERAMIC 0.022MF/25V
C709	1-162-927-11	s	CAPACITOR,CERAMIC 100PF/50V CH
C710	1-164-227-11	s	CAPACITOR,CERAMIC 0.022MF/25V
C711	1-164-227-11	s	CAPACITOR,CERAMIC 0.022MF/25V
C712	1-135-177-21	s	CAPACITOR TANTALUM 1MF/25V
C713	1-135-177-21	s	CAPACITOR TANTALUM 1MF/25V
C714	1-164-217-11	s	CAPACITOR,CERAMIC 150PF/50V CH
C715	1-135-177-21	s	CAPACITOR TANTALUM 1MF/25V
C716	1-135-177-21	s	CAPACITOR TANTALUM 1MF/25V
C717	1-164-227-11	s	CAPACITOR,CERAMIC 0.022MF/25V
C718	1-164-227-11	s	CAPACITOR,CERAMIC 0.022MF/25V
C719	1-126-392-11	s	CAPACITOR,CHIP ELECT100MF/6.3V
C720	1-164-227-11	s	CAPACITOR,CERAMIC 0.022MF/25V
C721	1-164-227-11	s	CAPACITOR,CERAMIC 0.022MF/25V
C722	1-164-227-11	s	CAPACITOR,CERAMIC 0.022MF/25V
C723	1-165-176-11	s	CAPACITOR,CERAMIC 47000PF/16V
C724	1-165-176-11	s	CAPACITOR,CERAMIC 47000PF/16V
C725	1-164-227-11	s	CAPACITOR,CERAMIC 0.022MF/25V
C726	1-162-917-11	s	CAPACITOR,CERAMIC 15PF/50V CH
C727	1-162-915-11	s	CAPACITOR,CERAMIC 10PF/50V CH
C728	1-164-230-11	s	CAPACITOR,CERAMIC 220PF/50V
C729	1-164-227-11	s	CAPACITOR,CERAMIC 0.022MF/25V
C730	1-126-392-11	s	CAPACITOR,CHIP ELECT100MF/6.3V
C731	1-164-227-11	s	CAPACITOR,CERAMIC 0.022MF/25V
C732	1-164-227-11	s	CAPACITOR,CERAMIC 0.022MF/25V
C733	1-164-227-11	s	CAPACITOR,CERAMIC 0.022MF/25V
C734	1-126-396-11	s	CAPACITOR,ELECT 47MF/16V(CHIP)
C735	1-164-227-11	s	CAPACITOR,CERAMIC 0.022MF/25V
C736	1-164-227-11	s	CAPACITOR,CERAMIC 0.022MF/25V
C737	1-164-227-11	s	CAPACITOR,CERAMIC 0.022MF/25V
C738	1-164-227-11	s	CAPACITOR,CERAMIC 0.022MF/25V
C739	1-164-227-11	s	CAPACITOR,CERAMIC 0.022MF/25V
C740	1-164-227-11	s	CAPACITOR,CERAMIC 0.022MF/25V
C741	1-162-923-11	s	CAPACITOR,CERAMIC 47PF/50V CH
C742	1-162-921-11	s	CAPACITOR,CERAMIC 33PF/50V CH
C743	1-162-921-11	s	CAPACITOR,CERAMIC 33PF/50V CH
C744	1-162-915-11	s	CAPACITOR,CERAMIC 10PF/50V CH
C745	1-162-925-11	s	CAPACITOR,CERAMIC 68PF/50V CH
C746	1-162-925-11	s	CAPACITOR,CERAMIC 68PF/50V CH
C747	1-162-921-11	s	CAPACITOR,CERAMIC 33PF/50V CH
C748	1-162-921-11	s	CAPACITOR,CERAMIC 33PF/50V CH
C749	1-164-227-11	s	CAPACITOR,CERAMIC 0.022MF/25V
C750	1-164-227-11	s	CAPACITOR,CERAMIC 0.022MF/25V
C751	1-164-227-11	s	CAPACITOR,CERAMIC 0.022MF/25V
C752	1-164-227-11	s	CAPACITOR,CERAMIC 0.022MF/25V
C753	1-162-909-11	s	CAPACITOR,CERAMIC 4.0PF/50V CH
C754	1-162-915-11	s	CAPACITOR,CERAMIC 10PF/50V CH
C755	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
C756	1-164-227-11	s	CAPACITOR,CERAMIC 0.022MF/25V
C757	1-164-227-11	s	CAPACITOR,CERAMIC 0.022MF/25V
C758	1-164-227-11	s	CAPACITOR,CERAMIC 0.022MF/25V

(VPR-62P BOARD(DSR-2000P))

Ref. No. or Q'ty	Part No.	SP	Description
C759	1-164-227-11	s	CAPACITOR,CERAMIC 0.022MF/25V
C760	1-164-227-11	s	CAPACITOR,CERAMIC 0.022MF/25V
C761	1-164-227-11	s	CAPACITOR,CERAMIC 0.022MF/25V
C762	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
C801	1-126-392-11	s	CAPACITOR,CHIP ELECT100MF/6.3V
C802	1-164-227-11	s	CAPACITOR,CERAMIC 0.022MF/25V
C803	1-126-392-11	s	CAPACITOR,CHIP ELECT100MF/6.3V
C804	1-164-227-11	s	CAPACITOR,CERAMIC 0.022MF/25V
C805	1-164-227-11	s	CAPACITOR,CERAMIC 0.022MF/25V
C806	1-162-925-11	s	CAPACITOR,CERAMIC 68PF/50V CH
C807	1-164-227-11	s	CAPACITOR,CERAMIC 0.022MF/25V
C808	1-164-227-11	s	CAPACITOR,CERAMIC 0.022MF/25V
C809	1-164-227-11	s	CAPACITOR,CERAMIC 0.022MF/25V
C810	1-164-227-11	s	CAPACITOR,CERAMIC 0.022MF/25V
C811	1-164-227-11	s	CAPACITOR,CERAMIC 0.022MF/25V
C812	1-164-227-11	s	CAPACITOR,CERAMIC 0.022MF/25V
C813	1-164-227-11	s	CAPACITOR,CERAMIC 0.022MF/25V
C814	1-111-253-11	s	CAPACITOR TANTALUM 100MF/6.3V
C815	1-162-915-11	s	CAPACITOR,CERAMIC 10PF/50V CH
C816	1-126-396-11	s	CAPACITOR,ELECT 47MF/16V(CHIP)
C817	1-164-227-11	s	CAPACITOR,CERAMIC 0.022MF/25V
C818	1-164-227-11	s	CAPACITOR,CERAMIC 0.022MF/25V
C819	1-162-916-11	s	CAPACITOR,CERAMIC 12PF/50V CH
C820	1-164-227-11	s	CAPACITOR,CERAMIC 0.022MF/25V
C821	1-126-392-11	s	CAPACITOR,CHIP ELECT100MF/6.3V
C822	1-164-227-11	s	CAPACITOR,CERAMIC 0.022MF/25V
C823	1-164-227-11	s	CAPACITOR,CERAMIC 0.022MF/25V
C824	1-164-227-11	s	CAPACITOR,CERAMIC 0.022MF/25V
C825	1-164-227-11	s	CAPACITOR,CERAMIC 0.022MF/25V
C826	1-164-227-11	s	CAPACITOR,CERAMIC 0.022MF/25V
C827	1-164-227-11	s	CAPACITOR,CERAMIC 0.022MF/25V
C828	1-164-227-11	s	CAPACITOR,CERAMIC 0.022MF/25V
C829	1-162-917-11	s	CAPACITOR,CERAMIC 15PF/50V CH
C830	1-164-230-11	s	CAPACITOR,CERAMIC 220PF/50V
C831	1-104-851-11	s	CAPACITOR,TANTALUM 10MF/10V
C832	1-104-851-11	s	CAPACITOR,TANTALUM 10MF/10V
C833	1-165-176-11	s	CAPACITOR,CERAMIC 47000PF/16V
C834	1-164-227-11	s	CAPACITOR,CERAMIC 0.022MF/25V
C835	1-162-915-11	s	CAPACITOR,CERAMIC 10PF/50V CH
C836	1-164-227-11	s	CAPACITOR,CERAMIC 0.022MF/25V
C837	1-162-920-11	s	CAPACITOR,CERAMIC 27PF/50V CH
C838	1-162-915-11	s	CAPACITOR,CERAMIC 10PF/50V CH
C839	1-164-227-11	s	CAPACITOR,CERAMIC 0.022MF/25V
C840	1-162-923-11	s	CAPACITOR,CERAMIC 47PF/50V CH
C841	1-162-910-11	s	CAPACITOR,CERAMIC 5PF/50V 1608
C842	1-164-227-11	s	CAPACITOR,CERAMIC 0.022MF/25V
C843	1-164-227-11	s	CAPACITOR,CERAMIC 0.022MF/25V
C844	1-164-217-11	s	CAPACITOR,CERAMIC 150PF/50V CH
C901	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
C902	1-162-921-11	s	CAPACITOR,CERAMIC 33PF/50V CH
C903	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
C905	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
C908	1-126-396-11	s	CAPACITOR,ELECT 47MF/16V(CHIP)
C910	1-162-919-11	s	CAPACITOR,CERAMIC 22PF/50V CH
C911	1-164-230-11	s	CAPACITOR,CERAMIC 220PF/50V
C912	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
C913	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
C914	1-126-396-11	s	CAPACITOR,ELECT 47MF/16V(CHIP)
C915	1-164-227-11	s	CAPACITOR,CERAMIC 0.022MF/25V

(VPR-62P BOARD(DSR-2000P))

Ref. No. or Q'ty	Part No.	SP	Description
C916	1-162-970-11	s	CAPACITOR CERAMIC 0.01MF/25V B
C917	1-162-921-11	s	CAPACITOR,CERAMIC 33PF/50V CH
C918	1-164-227-11	s	CAPACITOR,CERAMIC 0.022MF/25V
C919	1-164-230-11	s	CAPACITOR,CERAMIC 220PF/50V
C920	1-164-227-11	s	CAPACITOR,CERAMIC 0.022MF/25V
C921	1-164-227-11	s	CAPACITOR,CERAMIC 0.022MF/25V
C922	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
C923	1-126-396-11	s	CAPACITOR,ELECT 47MF/16V(CHIP)
C924	1-126-392-11	s	CAPACITOR,CHIP ELECT100MF/6.3V
C925	1-164-227-11	s	CAPACITOR,CERAMIC 0.022MF/25V
C926	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
C927	1-164-227-11	s	CAPACITOR,CERAMIC 0.022MF/25V
C928	1-162-919-11	s	CAPACITOR,CERAMIC 22PF/50V CH
C929	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
C930	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
C931	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
C932	1-164-227-11	s	CAPACITOR,CERAMIC 0.022MF/25V
C933	1-126-392-11	s	CAPACITOR,CHIP ELECT100MF/6.3V
C934	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
C935	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
C936	1-164-217-11	s	CAPACITOR,CERAMIC 150PF/50V CH
C937	1-164-227-11	s	CAPACITOR,CERAMIC 0.022MF/25V
C938	1-126-392-11	s	CAPACITOR,CHIP ELECT100MF/6.3V
C940	1-162-970-11	s	CAPACITOR CERAMIC 0.01MF/25V B
C941	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
C942	1-126-392-11	s	CAPACITOR,CHIP ELECT100MF/6.3V
C1001	1-164-227-11	s	CAPACITOR,CERAMIC 0.022MF/25V
C1002	1-164-227-11	s	CAPACITOR,CERAMIC 0.022MF/25V
C1003	1-126-392-11	s	CAPACITOR,CHIP ELECT100MF/6.3V
C1004	1-126-392-11	s	CAPACITOR,CHIP ELECT100MF/6.3V
C1005	1-164-227-11	s	CAPACITOR,CERAMIC 0.022MF/25V
C1006	1-162-921-11	s	CAPACITOR,CERAMIC 33PF/50V CH
C1007	1-162-925-11	s	CAPACITOR,CERAMIC 68PF/50V CH
C1008	1-162-921-11	s	CAPACITOR,CERAMIC 33PF/50V CH
C1009	1-164-227-11	s	CAPACITOR,CERAMIC 0.022MF/25V
C1010	1-164-227-11	s	CAPACITOR,CERAMIC 0.022MF/25V
C1011	1-164-227-11	s	CAPACITOR,CERAMIC 0.022MF/25V
C1012	1-164-227-11	s	CAPACITOR,CERAMIC 0.022MF/25V
C1013	1-164-227-11	s	CAPACITOR,CERAMIC 0.022MF/25V
C1014	1-162-964-11	s	CAPACITOR,CERAMIC 1000PF/50V B
C1015	1-135-177-21	s	CAPACITOR TANTALUM 1MF/25V
C1016	1-162-970-11	s	CAPACITOR CERAMIC 0.01MF/25V B
C1017	1-135-210-11	s	CAPACITOR TANTAL 4.7MF/10V
C1018	1-162-970-11	s	CAPACITOR CERAMIC 0.01MF/25V B
C1019	1-164-227-11	s	CAPACITOR,CERAMIC 0.022MF/25V
C1020	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
C1021	1-126-392-11	s	CAPACITOR,CHIP ELECT100MF/6.3V
C1022	1-164-227-11	s	CAPACITOR,CERAMIC 0.022MF/25V
C1023	1-164-227-11	s	CAPACITOR,CERAMIC 0.022MF/25V
C1024	1-126-392-11	s	CAPACITOR,CHIP ELECT100MF/6.3V
C1025	1-164-227-11	s	CAPACITOR,CERAMIC 0.022MF/25V
C1026	1-164-227-11	s	CAPACITOR,CERAMIC 0.022MF/25V
*3 C1027	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
*3 C1028	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
*3 C1029	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
*2 C1030	1-126-392-11	s	CAPACITOR,CHIP ELECT100MF/6.3V
*1	1-126-396-11	s	CAPACITOR,ELECT 47MF/16V(CHIP)
C1031	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
*3 C1032	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF

(VPR-62P BOARD(DSR-2000P))

Ref. No. or Q'ty	Part No.	SP	Description
*5 C1033	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
*5 C1035	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
*1	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
*1 C1036	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
C1037	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
C1038	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
C1039	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
*1 C1040	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
C1041	1-126-392-11	s	CAPACITOR,CHIP ELECT100MF/6.3V
C1042	1-164-227-11	s	CAPACITOR,CERAMIC 0.022MF/25V
*1 C1043	1-164-227-11	s	CAPACITOR,CERAMIC 0.022MF/25V
C1045	1-164-227-11	s	CAPACITOR,CERAMIC 0.022MF/25V
*1 C1046	1-164-227-11	s	CAPACITOR,CERAMIC 0.022MF/25V
C1047	1-164-227-11	s	CAPACITOR,CERAMIC 0.022MF/25V
C1048	1-164-227-11	s	CAPACITOR,CERAMIC 0.022MF/25V
C1049	1-164-227-11	s	CAPACITOR,CERAMIC 0.022MF/25V
C1050	1-164-227-11	s	CAPACITOR,CERAMIC 0.022MF/25V
C1051	1-164-227-11	s	CAPACITOR,CERAMIC 0.022MF/25V
C1052	1-164-227-11	s	CAPACITOR,CERAMIC 0.022MF/25V
C1053	1-126-392-11	s	CAPACITOR,CHIP ELECT100MF/6.3V
C1054	1-164-227-11	s	CAPACITOR,CERAMIC 0.022MF/25V
C1055	1-164-227-11	s	CAPACITOR,CERAMIC 0.022MF/25V
C1056	1-164-227-11	s	CAPACITOR,CERAMIC 0.022MF/25V
*1 C1057	1-164-227-11	s	CAPACITOR,CERAMIC 0.022MF/25V
C1058	1-126-392-11	s	CAPACITOR,CHIP ELECT100MF/6.3V
C1059	1-126-392-11	s	CAPACITOR,CHIP ELECT100MF/6.3V
C1060	1-126-392-11	s	CAPACITOR,CHIP ELECT100MF/6.3V
C1061	1-164-227-11	s	CAPACITOR,CERAMIC 0.022MF/25V
C1062	1-164-227-11	s	CAPACITOR,CERAMIC 0.022MF/25V
C1063	1-164-227-11	s	CAPACITOR,CERAMIC 0.022MF/25V
C1064	1-164-227-11	s	CAPACITOR,CERAMIC 0.022MF/25V
C1065	1-164-227-11	s	CAPACITOR,CERAMIC 0.022MF/25V
*3 C1066	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
C1067	1-164-227-11	s	CAPACITOR,CERAMIC 0.022MF/25V
C1068	1-164-227-11	s	CAPACITOR,CERAMIC 0.022MF/25V
C1069	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
C1070	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
C1071	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
C1072	1-135-179-21	s	CAPACITOR,TANTALUM 2.2MF/16V
C1073	1-165-176-11	s	CAPACITOR,CERAMIC 47000PF/16V
C1074	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
C1075	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
C1076	1-162-964-11	s	CAPACITOR,CERAMIC 1000PF/50V B
C1077	1-162-964-11	s	CAPACITOR,CERAMIC 1000PF/50V B
C1078	1-162-964-11	s	CAPACITOR,CERAMIC 1000PF/50V B
C1079	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
*2 C1080	1-135-177-21	s	CAPACITOR TANTALUM 1MF/25V
*2 C1081	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
*2 C1082	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
*2 C1083	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
*2 C1084	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
*2 C1085	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
*2 C1086	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
CT500	1-141-322-11	s	CAPACITOR,VAR,TRIMMER
D1	8-719-941-04	s	DIODE SB007-03CP
D2	8-719-941-04	s	DIODE SB007-03CP
D3	8-719-941-04	s	DIODE SB007-03CP
D4	8-719-941-04	s	DIODE SB007-03CP

(VPR-62P BOARD(DSR-2000P))

Ref. No. or Q'ty	Part No.	SP	Description
D5	8-719-941-04	s	DIODE SB007-03CP
D6	8-719-941-04	s	DIODE SB007-03CP
D102	8-719-024-81	s	DIODE 1SS300-TE85L
D104	8-719-989-08	s	DIODE RB717F
D200	8-719-941-04	s	DIODE SB007-03CP
D201	8-719-024-81	s	DIODE 1SS300-TE85L
D300	8-719-041-39	s	DIODE KV1470 (5MA)
D301	8-719-941-23	s	DIODE DA204U
D302	8-719-024-81	s	DIODE 1SS300-TE85L
D303	8-719-941-23	s	DIODE DA204U
D304	8-719-941-23	s	DIODE DA204U
D306	8-719-941-23	s	DIODE DA204U
D400	8-719-941-23	s	DIODE DA204U
D401	8-719-045-99	s	DIODE RD2.2M-B
D402	8-719-045-99	s	DIODE RD2.2M-B
D403	8-719-941-04	s	DIODE SB007-03CP
D501	8-719-024-81	s	DIODE 1SS300-TE85L
D502	8-719-041-39	s	DIODE KV1470 (5MA)
D503	8-719-978-04	s	DIODE DTZ-TT11-3.3B
D601	8-719-024-81	s	DIODE 1SS300-TE85L
D801	8-719-976-99	s	DIODE DTZ5.1B
D802	8-719-024-81	s	DIODE 1SS300-TE85L
D900	8-719-941-23	s	DIODE DA204U
D901	8-719-941-23	s	DIODE DA204U
D1000 *1	8-719-987-43	s	LED CL-150PG-CD
D1001	8-719-941-23	s	DIODE DA204U
D1002	8-719-041-39	s	DIODE KV1470 (5MA)
D1003	8-719-027-95	s	DIODE HSM88WK
D1004 *2	8-719-404-35	s	DIODE MA141WK
FB200	1-543-309-21	s	BEAD,FERRITE
FB400	1-543-309-21	s	BEAD,FERRITE
FL1	1-233-674-21	s	FILTER, EMI
FL2	1-233-674-21	s	FILTER, EMI
FL100	1-233-614-11	s	FILTER, LOW PASS
FL200	1-233-614-11	s	FILTER, LOW PASS
FL201	1-233-599-11	s	FILTER, LOW PASS
FL202	1-233-599-11	s	FILTER, LOW PASS
FL601	1-233-614-11	s	FILTER, LOW PASS
FL602	1-233-599-11	s	FILTER, LOW PASS
FL603	1-233-599-11	s	FILTER, LOW PASS
FL701	1-239-771-11	s	FILTER, LOW PASS
IC1	8-759-172-41	s	IC L78M09T-TL
IC2	8-759-172-41	s	IC L78M09T-TL
IC3	8-759-539-90	s	IC LM2940SX-5.0
IC4	8-759-539-90	s	IC LM2940SX-5.0
IC5	8-759-539-89	s	IC LM2990SX-5.0
IC6	8-759-539-89	s	IC LM2990SX-5.0
IC7	8-759-549-20	s	IC SN74LV541APWR
IC8	8-759-549-20	s	IC SN74LV541APWR
IC9	8-759-490-41	s	IC TC74VHCT541AFT(EL)
IC10	8-759-549-20	s	IC SN74LV541APWR
IC101	8-759-082-61	s	IC TC4W53FU
IC102	8-759-058-64	s	IC TC7S32FU-TE85R
IC103	8-759-082-61	s	IC TC4W53FU
IC104	8-759-082-61	s	IC TC4W53FU
IC105 *c	8-759-669-73	s	IC TL082CPWR
*b	8-759-359-66	s	IC TL082CPW (E05)
IC200	8-759-387-83	s	IC MB40569PFV-ER

(VPR-62P BOARD(DSR-2000P))

Ref. No. or Q'ty	Part No.	SP	Description
IC201	8-759-456-03	s	IC M66256GP (E2)
IC202	8-759-456-03	s	IC M66256GP (E2)
IC203	8-759-456-03	s	IC M66256GP (E2)
IC204	8-759-513-76	s	IC CXD8161AQ
IC205	8-759-058-58	s	IC TC7S04FU-TE85R
IC206	8-759-058-64	s	IC TC7S32FU-TE85R
IC207	8-752-363-60	s	IC CXD2307R-T4
IC208 *c	8-759-669-73	s	IC TL082CPWR
*b	8-759-359-66	s	IC TL082CPW (E05)
IC209	8-752-052-73	s	IC CXA1451M
IC210	8-752-052-73	s	IC CXA1451M
IC211	8-752-052-73	s	IC CXA1451M
IC300	8-752-339-04	s	IC CXD2208Q
IC301	8-759-058-58	s	IC TC7S04FU-TE85R
IC302	8-759-184-64	s	IC TC4W66FU
IC303 *c	8-759-669-72	s	IC TL064CPWR
*b	8-759-076-06	s	IC TL064CPW
IC304 *c	8-759-669-73	s	IC TL082CPWR
*b	8-759-359-66	s	IC TL082CPW (E05)
IC305 *c	8-759-669-45	s	IC TL062CPWR-12
*b	8-759-173-16	s	IC TL062CPW
IC306	8-759-058-58	s	IC TC7S04FU-TE85R
IC307	8-759-082-60	s	IC TC7S66FU
IC308	8-759-520-55	s	IC CXD8243AM
IC309	8-759-058-58	s	IC TC7S04FU-TE85R
IC310	8-759-082-60	s	IC TC7S66FU
IC400	8-759-523-01	s	IC TC74HC4052AFT(EL)
IC401	8-759-490-41	s	IC TC74VHCT541AFT(EL)
IC402 *c	8-759-669-74	s	IC TL084CPWR-12
*b	8-759-287-54	s	IC TL084CPW (E20)
IC403	8-759-640-14	s	IC TK15420MTL
IC404	8-759-082-61	s	IC TC4W53FU
IC405	8-759-523-95	s	IC TC74VHC74FT(EL)
IC406	8-759-324-03	s	IC HA17431UA(TL)
IC407	8-759-324-03	s	IC HA17431UA(TL)
IC408	8-759-447-90	s	IC TLC5733AIPM
IC409	8-752-376-32	s	IC CXD2310AR
IC410	8-759-198-63	s	IC S-81230SG-QB-T1
IC411	8-759-549-20	s	IC SN74LV541APWR
IC412	8-759-549-20	s	IC SN74LV541APWR
IC413	8-759-549-20	s	IC SN74LV541APWR
IC414	8-759-196-97	s	IC TC7SH32FU (TE85R)
IC415	8-759-196-97	s	IC TC7SH32FU (TE85R)
IC416	8-759-196-96	s	IC TC7SH08FU (TE85R)
IC500	8-759-549-20	s	IC SN74LV541APWR
IC503	8-759-524-07	s	IC TC74VHC138FT(EL)
IC504	8-759-564-49	s	IC TC7W53FU-TE12R
IC505	8-759-271-86	s	IC TC7SH04FU
IC508	8-759-523-97	s	IC TC74VHC123AFT(EL)
IC509	8-759-987-27	s	IC LM1881M
IC510	8-759-196-12	s	IC SN74LS221DB
IC511	8-759-523-95	s	IC TC74VHC74FT(EL)
IC512	8-759-082-57	s	IC TC7W04FU
IC513	8-759-196-12	s	IC SN74LS221DB
IC514	8-759-196-97	s	IC TC7SH32FU (TE85R)
IC515	8-759-530-05	s	IC TC4053BFT (EL.N)
IC516	8-759-083-94	s	IC TC7W74FU
IC517	8-759-523-97	s	IC TC74VHC123AFT(EL)
IC518	8-759-082-61	s	IC TC4W53FU
IC519	8-759-271-86	s	IC TC7SH04FU

(VPR-62P BOARD(DSR-2000P))

Ref. No. or Q'ty	Part No.	SP	Description
IC520	8-759-196-96	s	IC TC7SH08FU (TE85R)
IC522	8-759-196-93	s	IC TC7SH00FU-TE85R
IC523	8-759-198-63	s	IC S-81230SG-QB-T1
IC524	8-759-524-19	s	IC TC74VHC164FT(EL)
IC525	8-759-343-09	s	IC CXD2193AR-ER
IC526	8-759-490-41	s	IC TC74VHCT541AFT(EL)
IC601	8-759-278-58	s	IC NJM4558V (TE2)
IC603	8-759-278-58	s	IC NJM4558V (TE2)
IC604	8-759-278-58	s	IC NJM4558V (TE2)
IC608	8-759-198-63	s	IC S-81230SG-QB-T1
IC609	8-752-363-60	s	IC CXD2307R-T4
IC610	8-752-052-82	s	IC CXA1432M
IC611	8-759-640-14	s	IC TK15420MTL
IC612	8-759-524-10	s	IC TC74VHC157FT (EL)
IC613 *2	8-759-196-97	s	IC TC7SH32FU (TE85R)
IC701	8-752-054-80	s	IC CXA1521M
IC702	8-752-054-80	s	IC CXA1521M
IC703	8-759-196-12	s	IC SN74LS221DB
IC704 *c	8-759-669-74	s	IC TL084CPWR-12
*b	8-759-287-54	s	IC TL084CPW (E20)
IC705	8-759-082-61	s	IC TC4W53FU
IC706	8-759-082-61	s	IC TC4W53FU
IC707 *c	8-759-669-73	s	IC TL082CPWR
*b	8-759-359-66	s	IC TL082CPW (E05)
IC708	8-752-090-56	s	IC CXA3178M-T4
IC709	8-752-061-02	s	IC CXA1450M
IC801	8-752-052-73	s	IC CXA1451M
IC802	8-759-640-14	s	IC TK15420MTL
IC803	8-759-082-61	s	IC TC4W53FU
IC804	8-752-052-73	s	IC CXA1451M
IC805	8-759-082-59	s	IC TC7W32FU
IC806 *c	8-759-669-74	s	IC TL084CPWR-12
*b	8-759-287-54	s	IC TL084CPW (E20)
IC807	8-759-082-61	s	IC TC4W53FU
IC808	8-752-052-73	s	IC CXA1451M
IC901	8-759-082-57	s	IC TC7W04FU
IC903	8-759-523-02	s	IC TC74HC4053AFT(EL)
IC904	8-752-061-02	s	IC CXA1450M
IC905 *c	8-759-669-45	s	IC TL062CPWR-12
*b	8-759-173-16	s	IC TL062CPW
IC906 *c	8-759-669-72	s	IC TL064CPWR-12
*b	8-759-076-06	s	IC TL064CPW
IC907	8-752-052-73	s	IC CXA1451M
IC908	8-759-278-58	s	IC NJM4558V (TE2)
IC909	8-759-324-03	s	IC HA17431UA(TL)
IC910	8-759-987-27	s	IC LM1881M
IC911	8-759-248-78	s	IC MB88102PFV-G-BND-ER
IC912	8-759-523-97	s	IC TC74VHC123AFT(EL)
IC1001	8-759-082-61	s	IC TC4W53FU
IC1002	8-759-702-08	s	IC NJM360M
IC1003	8-752-335-47	s	IC CXD1216M
IC1004	8-759-523-02	s	IC TC74HC4053AFT(EL)
IC1005	8-759-058-58	s	IC TC7S04FU-TE85R
IC1006	8-759-271-86	s	IC TC7SH04FU
IC1008	8-752-414-92	s	IC CXD2309AQ-T6
IC1009*5	8-759-196-93	s	IC TC7SH00FU-TE85R
*1	8-752-334-64	s	IC CXD1171M
IC1010	8-759-702-08	s	IC NJM360M
IC1011	8-759-271-88	s	IC TC7SHU04FU
IC1012	8-759-271-86	s	IC TC7SH04FU

(VPR-62P BOARD(DSR-2000P))

Ref. No. or Q'ty	Part No.	SP	Description
IC1014*5	8-759-196-93	s	IC TC7SH00FU-TE85R
IC1111*a	8-759-681-40	s	IC CXD9128AR
*2	8-759-650-00	s	IC CXD9128R
IC1112*2	8-759-196-93	s	IC TC7SH00FU-TE85R
L1	1-414-400-11	s	INDUCTOR, 22UH
L2	1-424-641-11	s	COIL,CHOKE (SHIELD)
L3	1-424-641-11	s	COIL,CHOKE (SHIELD)
L4	1-414-400-11	s	INDUCTOR, 22UH
L5	1-414-400-11	s	INDUCTOR, 22UH
L6	1-414-400-11	s	INDUCTOR, 22UH
L7	1-414-400-11	s	INDUCTOR, 22UH
L8	1-414-400-11	s	INDUCTOR, 22UH
L101	1-414-398-11	s	INDUCTOR (SMD) 10UH
L102	1-414-398-11	s	INDUCTOR (SMD) 10UH
L103	1-414-398-11	s	INDUCTOR (SMD) 10UH
L200	1-414-394-11	s	INDUCTOR (SMD) 2.2UH
L201	1-414-398-11	s	INDUCTOR (SMD) 10UH
L202	1-410-372-21	s	CHIP INDUCTOR 1.8UH (3225)
L203	1-410-372-21	s	CHIP INDUCTOR 1.8UH (3225)
L204	1-410-372-21	s	CHIP INDUCTOR 1.8UH (3225)
L205	1-414-398-11	s	INDUCTOR (SMD) 10UH
L206	1-414-398-11	s	INDUCTOR (SMD) 10UH
L301	1-414-401-11	s	INDUCTOR (SMD) 33UH
L302	1-414-395-11	s	INDUCTOR (SMD) 3.3UH
L303	1-414-398-11	s	INDUCTOR (SMD) 10UH
L304	1-414-398-11	s	INDUCTOR (SMD) 10UH
L305	1-414-401-11	s	INDUCTOR (SMD) 33UH
L306	1-410-378-11	s	INDUCTOR,CHIP 5.6UH (3225)
L307	1-414-404-11	s	INDUCTOR (SMD) 100UH
L308	1-414-398-11	s	INDUCTOR (SMD) 10UH
L309	1-414-404-11	s	INDUCTOR (SMD) 100UH
L310	1-414-404-11	s	INDUCTOR (SMD) 100UH
L311	1-414-404-11	s	INDUCTOR (SMD) 100UH
L312	1-414-398-11	s	INDUCTOR (SMD) 10UH
L313	1-414-398-11	s	INDUCTOR (SMD) 10UH
L400	1-414-398-11	s	INDUCTOR (SMD) 10UH
L401	1-414-398-11	s	INDUCTOR (SMD) 10UH
L402	1-414-398-11	s	INDUCTOR (SMD) 10UH
L403	1-414-398-11	s	INDUCTOR (SMD) 10UH
L500	1-414-400-11	s	INDUCTOR, 22UH
L501	1-414-400-11	s	INDUCTOR, 22UH
L502	1-410-390-11	s	CHIP INDUCTOR 56UH (3225)
L503	1-410-655-31	s	INDUCTOR,CHIP 120UH (3225)
L504	1-414-398-11	s	INDUCTOR (SMD) 10UH
L506	1-414-398-11	s	INDUCTOR (SMD) 10UH
L601	1-414-400-11	s	INDUCTOR, 22UH
L602	1-414-400-11	s	INDUCTOR, 22UH
L603	1-414-400-11	s	INDUCTOR, 22UH
L604	1-414-400-11	s	INDUCTOR, 22UH
L605	1-414-400-11	s	INDUCTOR, 22UH
L606	1-414-400-11	s	INDUCTOR, 22UH
L607	1-414-398-11	s	INDUCTOR (SMD) 10UH
L608	1-414-398-11	s	INDUCTOR (SMD) 10UH
L609	1-414-400-11	s	INDUCTOR, 22UH
L610	1-414-401-11	s	INDUCTOR (SMD) 33UH
L611	1-414-400-11	s	INDUCTOR, 22UH
L612	1-414-400-11	s	INDUCTOR, 22UH
L613	1-414-401-11	s	INDUCTOR (SMD) 33UH
L701	1-414-400-11	s	INDUCTOR, 22UH

(VPR-62P BOARD(DSR-2000P))

Ref. No. or Q'ty	Part No.	SP	Description
L702	1-414-400-11	s	INDUCTOR, 22UH
L703	1-414-404-11	s	INDUCTOR (SMD) 100UH
L704	1-414-400-11	s	INDUCTOR, 22UH
L705	1-410-386-11	s	CHIP INDUCTOR 27UH (3225)
L706	1-410-386-11	s	CHIP INDUCTOR 27UH (3225)
L707	1-410-386-11	s	CHIP INDUCTOR 27UH (3225)
L708	1-410-386-11	s	CHIP INDUCTOR 27UH (3225)
L709	1-414-400-11	s	INDUCTOR, 22UH
L710	1-414-400-11	s	INDUCTOR, 22UH
L801	1-414-400-11	s	INDUCTOR, 22UH
L802	1-414-400-11	s	INDUCTOR, 22UH
L803	1-414-400-11	s	INDUCTOR, 22UH
L804	1-414-404-11	s	INDUCTOR (SMD) 100UH
L805	1-414-402-11	s	INDUCTOR (SMD) 47UH
L806	1-414-401-11	s	INDUCTOR (SMD) 33UH
L901	1-410-392-11	s	CHIP INDUCTOR 82UH (3225)
L902	1-414-404-11	s	INDUCTOR (SMD) 100UH
L903	1-414-403-11	s	INDUCTOR, 68UH
L904	1-414-400-11	s	INDUCTOR, 22UH
L905	1-414-400-11	s	INDUCTOR, 22UH
L906	1-414-400-11	s	INDUCTOR, 22UH
L907	1-414-400-11	s	INDUCTOR, 22UH
L1001	1-414-400-11	s	INDUCTOR, 22UH
L1002	1-414-400-11	s	INDUCTOR, 22UH
L1003	1-410-386-11	s	CHIP INDUCTOR 27UH (3225)
L1004	1-410-386-11	s	CHIP INDUCTOR 27UH (3225)
L1005	1-414-400-11	s	INDUCTOR, 22UH
L1006	1-414-400-11	s	INDUCTOR, 22UH
L1007	1-414-398-11	s	INDUCTOR (SMD) 10UH
L1008 *2	1-410-374-11	s	INDUCTOR,CHIP 2.7UH
*1	1-414-395-11	s	INDUCTOR (SMD) 3.3UH
L1009	1-414-400-11	s	INDUCTOR, 22UH
L1010	1-414-400-11	s	INDUCTOR, 22UH
L1011	1-414-400-11	s	INDUCTOR, 22UH
L1012	1-414-400-11	s	INDUCTOR, 22UH
L1013	1-414-400-11	s	INDUCTOR, 22UH
L1014 *2	1-414-400-11	s	INDUCTOR, 22UH
LV505	1-411-275-21	s	COIL, VARIABLE
PS1	⚠ 1-576-124-11	s	LINK IC 1A (3225)
PS2	⚠ 1-533-282-21	s	CIRCUIT PROTECTOR 2A (3225)
PS3	⚠ 1-533-282-21	s	CIRCUIT PROTECTOR 2A (3225)
PS4	⚠ 1-533-282-21	s	CIRCUIT PROTECTOR 2A (3225)
PS5	⚠ 1-576-124-11	s	LINK IC 1A (3225)
Q101	8-729-907-46	s	TRANSISTOR IMZ1
Q103	8-729-117-32	s	TRANSISTOR 2SC4177
Q104	8-729-140-63	s	TRANSISTOR 2SA1611-M5M6
Q105	8-729-140-63	s	TRANSISTOR 2SA1611-M5M6
Q106	8-729-117-32	s	TRANSISTOR 2SC4177
Q107	8-729-117-32	s	TRANSISTOR 2SC4177
Q108 *5	8-729-026-56	s	TRANSISTOR FMS2A-T148
*3	8-729-904-04	s	TRANSISTOR FMS2
Q109	8-729-140-63	s	TRANSISTOR 2SA1611-M5M6
Q110	8-729-117-72	s	TRANSISTOR 2SC4178
Q111	8-729-907-46	s	TRANSISTOR IMZ1
Q112	8-729-907-46	s	TRANSISTOR IMZ1
Q113	8-729-117-72	s	TRANSISTOR 2SC4178
Q114	8-729-117-32	s	TRANSISTOR 2SC4177
Q115	8-729-117-72	s	TRANSISTOR 2SC4178

(VPR-62P BOARD(DSR-2000P))

Ref. No. or Q'ty	Part No.	SP	Description
Q116 *5	8-729-026-56	s	TRANSISTOR FMS2A-T148
*3	8-729-904-04	s	TRANSISTOR FMS2
Q200	8-729-029-14	s	TRANSISTOR DTC144EUA-T106
Q201	8-729-117-32	s	TRANSISTOR 2SC4177
Q202	8-729-117-32	s	TRANSISTOR 2SC4177
Q203	8-729-117-32	s	TRANSISTOR 2SC4177
Q300	8-729-029-14	s	TRANSISTOR DTC144EÚA-T106
Q301	8-729-140-63	s	TRANSISTOR 2SA1611-M5M6
Q302	8-729-117-32	s	TRANSISTOR 2SC4177
Q303	8-729-117-32	s	TRANSISTOR 2SC4177
Q304	8-729-117-32	s	TRANSISTOR 2SC4177
Q305	8-729-140-63	s	TRANSISTOR 2SA1611-M5M6
Q306	8-729-140-63	s	TRANSISTOR 2SA1611-M5M6
Q307	8-729-140-63	s	TRANSISTOR 2SA1611-M5M6
Q308	8-729-117-32	s	TRANSISTOR 2SC4177
Q309	8-729-117-32	s	TRANSISTOR 2SC4177
Q310	8-729-140-63	s	TRANSISTOR 2SA1611-M5M6
Q311	8-729-029-14	s	TRANSISTOR DTC144EUA-T106
Q312	8-729-140-63	s	TRANSISTOR 2SA1611-M5M6
Q313	8-729-140-63	s	TRANSISTOR 2SA1611-M5M6
Q315	8-729-140-63	s	TRANSISTOR 2SA1611-M5M6
Q400	8-729-117-72	s	TRANSISTOR 2SC4178
Q401	8-729-117-32	s	TRANSISTOR 2SC4177
Q402	8-729-117-32	s	TRANSISTOR 2SC4177
Q403	8-729-117-32	s	TRANSISTOR 2SC4177
Q404	8-729-117-32	s	TRANSISTOR 2SC4177
Q405	8-729-117-72	s	TRANSISTOR 2SC4178
Q406	8-729-117-32	s	TRANSISTOR 2SC4177
Q407	8-729-117-72	s	TRANSISTOR 2SC4178
Q408	8-729-422-44	s	TRANSISTOR 2SK663
Q409	8-729-422-44	s	TRANSISTOR 2SK663
Q410	8-729-422-44	s	TRANSISTOR 2SK663
Q411	8-729-422-44	s	TRANSISTOR 2SK663
Q412	8-729-140-63	s	TRANSISTOR 2SA1611-M5M6
Q413	8-729-140-63	s	TRANSISTOR 2SA1611-M5M6
Q414	8-729-140-63	s	TRANSISTOR 2SA1611-M5M6
Q415	8-729-117-32	s	TRANSISTOR 2SC4177
Q416	8-729-117-32	s	TRANSISTOR 2SC4177
Q417	8-729-117-72	s	TRANSISTOR 2SC4178
Q418	8-729-117-72	s	TRANSISTOR 2SC4178
Q419	8-729-117-72	s	TRANSISTOR 2SC4178
Q420	8-729-117-72	s	TRANSISTOR 2SC4178
Q421	8-729-140-63	s	TRANSISTOR 2SA1611-M5M6
Q422	8-729-140-63	s	TRANSISTOR 2SA1611-M5M6
Q501	8-729-117-32	s	TRANSISTOR 2SC4177
Q502	8-729-117-32	s	TRANSISTOR 2SC4177
Q503	8-729-140-63	s	TRANSISTOR 2SA1611-M5M6
Q504	8-729-140-63	s	TRANSISTOR 2SA1611-M5M6
Q601	8-729-117-32	s	TRANSISTOR 2SC4177
Q602	8-729-117-32	s	TRANSISTOR 2SC4177
Q603	8-729-140-63	s	TRANSISTOR 2SA1611-M5M6
Q604	8-729-140-63	s	TRANSISTOR 2SA1611-M5M6
Q605	8-729-117-32	s	TRANSISTOR 2SC4177
Q606	8-729-140-63	s	TRANSISTOR 2SA1611-M5M6
Q607	8-729-117-32	s	TRANSISTOR 2SC4177
Q608	8-729-117-32	s	TRANSISTOR 2SC4177
Q609	8-729-422-44	s	TRANSISTOR 2SK663
Q610	8-729-422-44	s	TRANSISTOR 2SK663
Q611	8-729-140-63	s	TRANSISTOR 2SA1611-M5M6

(VPR-62P BOARD(DSR-2000P))

Ref. No. or Q'ty	Part No.	SP	Description
Q612	8-729-117-32	s	TRANSISTOR 2SC4177
Q613	8-729-140-63	s	TRANSISTOR 2SA1611-M5M6
Q614	8-729-117-32	s	TRANSISTOR 2SC4177
Q615	8-729-117-32	s	TRANSISTOR 2SC4177
Q616	8-729-422-44	s	TRANSISTOR 2SK663
Q617	8-729-422-44	s	TRANSISTOR 2SK663
Q618	8-729-140-63	s	TRANSISTOR 2SA1611-M5M6
Q619	8-729-029-14	s	TRANSISTOR DTC144EUA-T106
Q701	8-729-143-14	s	TRANSISTOR 2SC4176-B35
Q702	8-729-140-63	s	TRANSISTOR 2SA1611-M5M6
Q703	8-729-117-32	s	TRANSISTOR 2SC4177
Q704	8-729-140-63	s	TRANSISTOR 2SA1611-M5M6
Q705	8-729-117-32	s	TRANSISTOR 2SC4177
Q706	8-729-117-32	s	TRANSISTOR 2SC4177
Q707	8-729-117-32	s	TRANSISTOR 2SC4177
Q708	8-729-117-32	s	TRANSISTOR 2SC4177
Q709	8-729-117-32	s	TRANSISTOR 2SC4177
Q710	8-729-117-32	s	TRANSISTOR 2SC4177
Q711	8-729-143-14	s	TRANSISTOR 2SC4176-B35
Q712	8-729-903-82	s	TRANSISTOR FMW2
Q713	8-729-903-82	s	TRANSISTOR FMW2
Q801	8-729-904-41	s	TRANSISTOR FMY3
Q802	8-729-117-32	s	TRANSISTOR 2SC4177
Q803	8-729-143-14	s	TRANSISTOR 2SC4176-B35
Q804	8-729-117-32	s	TRANSISTOR 2SC4177
Q805	8-729-904-41	s	TRANSISTOR FMY3
Q806	8-729-143-14	s	TRANSISTOR 2SC4176-B35
Q807	8-729-140-63	s	TRANSISTOR 2SA1611-M5M6
Q808	8-729-117-32	s	TRANSISTOR 2SC4177
Q809	8-729-140-63	s	TRANSISTOR 2SA1611-M5M6
Q810	8-729-117-32	s	TRANSISTOR 2SC4177
Q811	8-729-117-32	s	TRANSISTOR 2SC4177
Q903	8-729-117-32	s	TRANSISTOR 2SC4177
Q905	8-729-117-32	s	TRANSISTOR 2SC4177
Q906	8-729-117-32	s	TRANSISTOR 2SC4177
Q907	8-729-904-41	s	TRANSISTOR FMY3
Q908	8-729-117-32	s	TRANSISTOR 2SC4177
Q909	8-729-117-32	s	TRANSISTOR 2SC4177
Q1001	8-729-117-32	s	TRANSISTOR 2SC4177
Q1002	8-729-117-32	s	TRANSISTOR 2SC4177
Q1003	8-729-029-14	s	TRANSISTOR DTC144EUA-T106
Q1004 *3	8-729-029-14	s	TRANSISTOR DTC144EUA-T106
Q1005	8-729-117-32	s	TRANSISTOR 2SC4177
Q1006	8-729-117-32	s	TRANSISTOR 2SC4177
Q1007	8-729-117-32	s	TRANSISTOR 2SC4177
Q1008 *1	8-729-117-32	s	TRANSISTOR 2SC4177
Q1009	8-729-029-14	s	TRANSISTOR DTC144EUA-T106
Q1010	8-729-140-63	s	TRANSISTOR 2SA1611-M5M6
Q1011	8-729-140-63	s	TRANSISTOR 2SA1611-M5M6
R1	1-216-833-11	s	RESISTOR,CHIP 10K 1/16W 1608
R2 *1	1-216-833-11	s	RESISTOR,CHIP 10K 1/16W 1608
R3	1-216-833-11	s	RESISTOR,CHIP 10K 1/16W 1608
R4	1-216-833-11	s	RESISTOR,CHIP 10K 1/16W 1608
R6	1-216-864-11	s	RESISTOR,CHIP 0 1/16W (1608)
R7	1-216-864-11	s	RESISTOR,CHIP 0 1/16W (1608)
R8	1-216-864-11	s	RESISTOR,CHIP 0 1/16W (1608)
R9 *2	1-216-864-11	s	RESISTOR,CHIP 0 1/16W (1608)
R10 *2	1-216-864-11	s	RESISTOR,CHIP 0 1/16W (1608)
R11 *2	1-216-864-11	s	RESISTOR,CHIP 0 1/16W (1608)

(VPR-62P BOARD(DSR-2000P))

Ref. No. or Q'ty	Part No.	SP	Description
R12 *4	1-216-296-91	s	CONDUCTOR,CHIP (3216)
R13 *4	1-216-296-91	s	CONDUCTOR,CHIP (3216)
R14 *4	1-216-296-91	s	CONDUCTOR,CHIP (3216)
R15 *4	1-216-296-91	s	CONDUCTOR,CHIP (3216)
R16 *4	1-216-296-91	s	CONDUCTOR,CHIP (3216)
R101	1-216-845-11	s	RESISTOR,CHIP 100K 1/16W(1608)
R102	1-218-847-11	s	RESISTOR, CHIP 1K 1/16W (1608)
R103	1-218-847-11	s	RESISTOR, CHIP 1K 1/16W (1608)
R104	1-216-826-11	s	RESISTOR,CHIP 2.7K 1/16W 1608
R109	1-216-829-11	s	RESISTOR, CHIP 4.7K 1/16W 1608
R110	1-216-809-11	s	RESISTOR,CHIP 100 1/16W 1608
R111	1-218-847-11	s	RESISTOR, CHIP 1K 1/16W (1608)
R112	1-218-823-11	s	RESISTOR,CHIP 100 1/16W (1608)
R113	1-218-847-11	s	RESISTOR, CHIP 1K 1/16W (1608)
R114	1-216-826-11	s	RESISTOR,CHIP 2.7K 1/16W 1608
R115	1-216-821-11	s	RESISTOR,CHIP 1.0K 1/16W(1608)
R116	1-216-809-11	s	RESISTOR,CHIP 100 1/16W 1608
R117	1-218-847-11	s	RESISTOR, CHIP 1K 1/16W (1608)
R118	1-216-826-11	s	RESISTOR,CHIP 2.7K 1/16W 1608
R119	1-216-809-11	s	RESISTOR,CHIP 100 1/16W 1608
R120	1-218-847-11	s	RESISTOR, CHIP 1K 1/16W (1608)
R121	1-218-847-11	s	RESISTOR, CHIP 1K 1/16W (1608)
R122	1-218-823-11	s	RESISTOR,CHIP 100 1/16W (1608)
R123	1-216-825-11	s	RESISTOR,CHIP 2.2K 1/16W 1608
R124	1-216-821-11	s	RESISTOR,CHIP 1.0K 1/16W(1608)
R125	1-216-819-11	s	RESISTOR,CHIP 680 1/16W 1608
R126	1-218-835-11	s	RESISTOR,CHIP 330 1/16W (1608)
R127	1-218-835-11	s	RESISTOR,CHIP 330 1/16W (1608)
R128	1-216-819-11	s	RESISTOR,CHIP 680 1/16W 1608
R129	1-218-847-11	s	RESISTOR, CHIP 1K 1/16W (1608)
R130	1-218-847-11	s	RESISTOR, CHIP 1K 1/16W (1608)
R131	1-216-809-11	s	RESISTOR,CHIP 100 1/16W 1608
R132	1-216-809-11	s	RESISTOR,CHIP 100 1/16W 1608
R133	1-216-821-11	s	RESISTOR,CHIP 1.0K 1/16W(1608)
R134	1-216-821-11	s	RESISTOR,CHIP 1.0K 1/16W(1608)
R135	1-216-821-11	s	RESISTOR,CHIP 1.0K 1/16W(1608)
R136	1-216-821-11	s	RESISTOR,CHIP 1.0K 1/16W(1608)
R137	1-218-837-11	s	RESISTOR,CHIP 390 1/16W (1608)
R138	1-216-825-11	s	RESISTOR,CHIP 2.2K 1/16W 1608
R139	1-216-815-11	s	RESISTOR,CHIP 330 1/16W 1608
R140	1-216-829-11	s	RESISTOR, CHIP 4.7K 1/16W 1608
R141	1-216-821-11	s	RESISTOR,CHIP 1.0K 1/16W(1608)
R142	1-216-829-11	s	RESISTOR, CHIP 4.7K 1/16W 1608
R143	1-216-825-11	s	RESISTOR,CHIP 2.2K 1/16W 1608
R144	1-216-809-11	s	RESISTOR,CHIP 100 1/16W 1608
R145	1-216-829-11	s	RESISTOR, CHIP 4.7K 1/16W 1608
R146	1-216-821-11	s	RESISTOR,CHIP 1.0K 1/16W(1608)
R147	1-216-857-11	s	RESISTOR, CHIP 1.0M 1/16W 1608
R148	1-216-825-11	s	RESISTOR,CHIP 2.2K 1/16W 1608
R149	1-216-829-11	s	RESISTOR, CHIP 4.7K 1/16W 1608
R150	1-216-821-11	s	RESISTOR,CHIP 1.0K 1/16W(1608)
R151	1-218-847-11	s	RESISTOR, CHIP 1K 1/16W (1608)
R201	1-216-805-11	s	RESISTOR,CHIP 47 1/16W 1608
R203	1-216-833-11	s	RESISTOR,CHIP 10K 1/16W 1608
R204	1-216-833-11	s	RESISTOR,CHIP 10K 1/16W 1608
R205	1-216-841-11	s	RESISTOR, CHIP 47K 1/16W 1608
R206	1-218-859-11	s	RESISTOR,CHIP 3.3K 1/16W(1608)
R207	1-218-859-11	s	RESISTOR,CHIP 3.3K 1/16W(1608)
R208	1-218-859-11	s	RESISTOR,CHIP 3.3K 1/16W(1608)

(VPR-62P BOARD(DSR-2000P))

Ref. No. or Q'ty	Part No.	SP	Description
R209	1-216-837-11	s	RESISTOR,CHIP 22K 1/16W 1608
R210	1-216-829-11	s	RESISTOR, CHIP 4.7K 1/16W 1608
R211	1-216-833-11	s	RESISTOR,CHIP 10K 1/16W 1608
R212	1-216-839-11	s	RESISTOR,CHIP 33K 1/16W 1608
R213	1-216-832-11	s	RESISTOR,CHIP 8.2K 1/16W 1608
R214	1-218-883-11	s	RESISTOR,CHIP 33K 1/16W (1608)
R216	1-218-879-11	s	RESISTOR,CHIP 22K 1/16W (1608)
R217	1-218-863-11	s	RESISTOR,CHIP 4.7K 1/16W(1608)
R218	1-218-831-11	s	RESISTOR, CHIP 220 1/16W(1608)
R219	1-218-831-11	s	RESISTOR, CHIP 220 1/16W(1608)
R220	1-218-831-11	s	RESISTOR, CHIP 220 1/16W(1608)
R221	1-218-831-11	s	RESISTOR, CHIP 220 1/16W(1608)
R222	1-218-831-11	s	RESISTOR, CHIP 220 1/16W(1608)
R223	1-218-831-11	s	RESISTOR, CHIP 220 1/16W(1608)
R224	1-216-821-11	s	RESISTOR,CHIP 1.0K 1/16W(1608)
R225	1-216-821-11	s	RESISTOR,CHIP 1.0K 1/16W(1608)
R226	1-216-821-11	s	RESISTOR,CHIP 1.0K 1/16W(1608)
R227	1-218-835-11	s	RESISTOR,CHIP 330 1/16W (1608)
R229	1-218-835-11	s	RESISTOR,CHIP 330 1/16W (1608)
R230	1-218-835-11	s	RESISTOR,CHIP 330 1/16W (1608)
R231	1-218-835-11	s	RESISTOR,CHIP 330 1/16W (1608)
R232	1-218-835-11	s	RESISTOR,CHIP 330 1/16W (1608)
R233	1-218-835-11	s	RESISTOR,CHIP 330 1/16W (1608)
R235 *2	1-216-864-11	s	RESISTOR,CHIP 0 1/16W (1608)
R236 *2	1-216-864-11	s	RESISTOR,CHIP 0 1/16W (1608)
R237 *2	1-216-864-11	s	RESISTOR,CHIP 0 1/16W (1608)
R238 *2	1-216-864-11	s	RESISTOR,CHIP 0 1/16W (1608)
R239 *2	1-216-864-11	s	RESISTOR,CHIP 0 1/16W (1608)
R240 *2	1-216-864-11	s	RESISTOR,CHIP 0 1/16W (1608)
R241 *2	1-216-864-11	s	RESISTOR,CHIP 0 1/16W (1608)
R300	1-216-833-11	s	RESISTOR,CHIP 10K 1/16W 1608
R301	1-216-833-11	s	RESISTOR,CHIP 10K 1/16W 1608
R302	1-216-821-11	s	RESISTOR,CHIP 1.0K 1/16W(1608)
R303	1-218-849-11	s	RESISTOR,CHIP 1.2K 1/16W(1608)
R304	1-216-825-11	s	RESISTOR,CHIP 2.2K 1/16W 1608
R305	1-216-825-11	s	RESISTOR,CHIP 2.2K 1/16W 1608
R306	1-216-825-11	s	RESISTOR,CHIP 2.2K 1/16W 1608
R307	1-216-833-11	s	RESISTOR,CHIP 10K 1/16W 1608
R308	1-216-833-11	s	RESISTOR,CHIP 10K 1/16W 1608
R309	1-216-821-11	s	RESISTOR,CHIP 1.0K 1/16W(1608)
R310	1-216-821-11	s	RESISTOR,CHIP 1.0K 1/16W(1608)
R311	1-216-821-11	s	RESISTOR,CHIP 1.0K 1/16W(1608)
R312	1-216-821-11	s	RESISTOR,CHIP 1.0K 1/16W(1608)
R313	1-216-845-11	s	RESISTOR,CHIP 100K 1/16W(1608)
R314	1-216-809-11	s	RESISTOR,CHIP 100 1/16W 1608
R315	1-216-821-11	s	RESISTOR,CHIP 1.0K 1/16W(1608)
R316	1-216-829-11	s	RESISTOR, CHIP 4.7K 1/16W 1608
R317	1-216-821-11	s	RESISTOR,CHIP 1.0K 1/16W(1608)
R318	1-218-842-11	s	RESISTOR,CHIP 620 1/16W (1608)
R319	1-216-825-11	s	RESISTOR,CHIP 2.2K 1/16W 1608
R320	1-216-825-11	s	RESISTOR,CHIP 2.2K 1/16W 1608
R321	1-216-819-11	s	RESISTOR,CHIP 680 1/16W 1608
R322	1-216-829-11	s	RESISTOR, CHIP 4.7K 1/16W 1608
R323	1-216-857-11	s	RESISTOR, CHIP 1.0M 1/16W 1608
R324	1-216-855-11	s	RESISTOR, CHIP 680K 1/16W 1608
R325	1-216-855-11	s	RESISTOR, CHIP 680K 1/16W 1608
R326	1-218-863-11	s	RESISTOR,CHIP 4.7K 1/16W(1608)
R327	1-216-833-11	s	RESISTOR,CHIP 10K 1/16W 1608
R328	1-218-907-11	s	RESISTOR,CHIP 330K 1/16W(1608)

(VPR-62P BOARD(DSR-2000P))

Ref. No. or Q'ty	Part No.	SP	Description
R329	1-218-907-11	s	RESISTOR,CHIP 330K 1/16W(1608)
R330	1-218-863-11	s	RESISTOR,CHIP 4.7K 1/16W(1608)
R331	1-216-841-11	s	RESISTOR, CHIP 47K 1/16W 1608
R332	1-216-841-11	s	RESISTOR, CHIP 47K 1/16W 1608
R333	1-216-839-11	s	RESISTOR,CHIP 33K 1/16W 1608
R334	1-216-839-11	s	RESISTOR,CHIP 33K 1/16W 1608
R335	1-216-821-11	s	RESISTOR,CHIP 1.0K 1/16W(1608)
R336	1-218-903-11	s	RESISTOR,CHIP 220K 1/16W(1608)
R337	1-216-829-11	s	RESISTOR, CHIP 4.7K 1/16W 1608
R338	1-216-821-11	s	RESISTOR,CHIP 1.0K 1/16W(1608)
R339	1-218-866-11	s	RESISTOR,CHIP 6.2K 1/16W(1608)
R340	1-218-830-11	s	RESISTOR,CHIP 200 1/16W (1608)
R341	1-218-859-11	s	RESISTOR,CHIP 3.3K 1/16W(1608)
R342	1-218-863-11	s	RESISTOR,CHIP 4.7K 1/16W(1608)
R343	1-216-809-11	s	RESISTOR,CHIP 100 1/16W 1608
R344	1-216-839-11	s	RESISTOR,CHIP 33K 1/16W 1608
R345	1-216-829-11	s	RESISTOR, CHIP 4.7K 1/16W 1608
R346	1-216-855-11	s	RESISTOR, CHIP 680K 1/16W 1608
R348	1-216-845-11	s	RESISTOR,CHIP 100K 1/16W(1608)
R349	1-216-845-11	s	RESISTOR,CHIP 100K 1/16W(1608)
R350	1-216-805-11	s	RESISTOR,CHIP 47 1/16W 1608
R351	1-216-803-11	s	RESISTOR,CHIP 33 1/16W 1608
R355	1-216-821-11	s	RESISTOR,CHIP 1.0K 1/16W(1608)
R356	1-216-863-11	s	RESISTOR,CHIP 3.3M 1/16W 1608
R357	1-218-871-11	s	RESISTOR,CHIP 10K 1/16W (1608)
R358	1-218-871-11	s	RESISTOR,CHIP 10K 1/16W (1608)
R359	1-216-809-11	s	RESISTOR,CHIP 100 1/16W 1608
R360	1-216-821-11	s	RESISTOR,CHIP 1.0K 1/16W(1608)
R362	1-216-864-11	s	RESISTOR,CHIP 0 1/16W (1608)
R363	1-216-864-11	s	RESISTOR,CHIP 0 1/16W (1608)
R368	1-216-805-11	s	RESISTOR,CHIP 47 1/16W 1608
R369	1-216-805-11	s	RESISTOR,CHIP 47 1/16W 1608
R400	1-216-821-11	s	RESISTOR,CHIP 1.0K 1/16W(1608)
R401	1-218-835-11	s	RESISTOR,CHIP 330 1/16W (1608)
R402	1-216-821-11	s	RESISTOR,CHIP 1.0K 1/16W(1608)
R403	1-216-821-11	s	RESISTOR,CHIP 1.0K 1/16W(1608)
R404	1-216-821-11	s	RESISTOR,CHIP 1.0K 1/16W(1608)
R405	1-216-821-11	s	RESISTOR,CHIP 1.0K 1/16W(1608)
R406	1-216-829-11	s	RESISTOR, CHIP 4.7K 1/16W 1608
R407	1-216-829-11	s	RESISTOR, CHIP 4.7K 1/16W 1608
R408	1-216-815-11	s	RESISTOR,CHIP 330 1/16W 1608
R409	1-216-815-11	s	RESISTOR,CHIP 330 1/16W 1608
R410	1-218-855-11	s	RESISTOR,CHIP 2.2K 1/16W(1608)
R411	1-216-815-11	s	RESISTOR,CHIP 330 1/16W 1608
R412	1-216-829-11	s	RESISTOR, CHIP 4.7K 1/16W 1608
R413	1-216-809-11	s	RESISTOR,CHIP 100 1/16W 1608
R414	1-216-821-11	s	RESISTOR,CHIP 1.0K 1/16W(1608)
R415	1-216-829-11	s	RESISTOR, CHIP 4.7K 1/16W 1608
R416	1-216-809-11	s	RESISTOR,CHIP 100 1/16W 1608
R417	1-216-809-11	s	RESISTOR,CHIP 100 1/16W 1608
R418	1-216-809-11	s	RESISTOR,CHIP 100 1/16W 1608
R419	1-216-821-11	s	RESISTOR,CHIP 1.0K 1/16W(1608)
R420	1-216-825-11	s	RESISTOR,CHIP 2.2K 1/16W 1608
R421	1-216-825-11	s	RESISTOR,CHIP 2.2K 1/16W 1608
R422	1-218-835-11	s	RESISTOR,CHIP 330 1/16W (1608)
R423	1-216-821-11	s	RESISTOR,CHIP 1.0K 1/16W(1608)
R424	1-218-835-11	s	RESISTOR,CHIP 330 1/16W (1608)
R425	1-216-821-11	s	RESISTOR,CHIP 1.0K 1/16W(1608)
R426	1-218-852-11	s	RESISTOR,CHIP 1.6K 1/16W(1608)

(VPR-62P BOARD(DSR-2000P))

Ref. No. or Q'ty	Part No.	SP	Description
R427	1-218-847-11	s	RESISTOR, CHIP 1K 1/16W (1608)
R428	1-218-852-11	s	RESISTOR,CHIP 1.6K 1/16W(1608)
R429	1-218-847-11	s	RESISTOR, CHIP 1K 1/16W (1608)
R430	1-218-858-11	s	RESISTOR, CHIP 3K 1/16W (1608)
R431	1-218-858-11	s	RESISTOR, CHIP 3K 1/16W (1608)
R432	1-216-845-11	s	RESISTOR,CHIP 100K 1/16W(1608)
R433	1-216-857-11	s	RESISTOR, CHIP 1.0M 1/16W 1608
R434	1-218-855-11	s	RESISTOR,CHIP 2.2K 1/16W(1608)
R435	1-216-809-11	s	RESISTOR,CHIP 100 1/16W 1608
R436	1-216-825-11	s	RESISTOR,CHIP 2.2K 1/16W 1608
R437	1-216-809-11	s	RESISTOR,CHIP 100 1/16W 1608
R438	1-216-821-11	s	RESISTOR,CHIP 1.0K 1/16W(1608)
R439	1-216-821-11	s	RESISTOR,CHIP 1.0K 1/16W(1608)
R440	1-218-863-11	s	RESISTOR,CHIP 4.7K 1/16W(1608)
R441	1-218-859-11	s	RESISTOR,CHIP 3.3K 1/16W(1608)
R442	1-216-809-11	s	RESISTOR,CHIP 100 1/16W 1608
R443	1-216-833-11	s	RESISTOR,CHIP 10K 1/16W 1608
R444	1-218-849-11	s	RESISTOR,CHIP 1.2K 1/16W(1608)
R445	1-218-849-11	s	RESISTOR,CHIP 1.2K 1/16W(1608)
R446	1-216-809-11	s	RESISTOR,CHIP 100 1/16W 1608
R447	1-218-878-11	s	RESISTOR,CHIP 20K 1/16W (1608)
R448	1-218-878-11	s	RESISTOR,CHIP 20K 1/16W (1608)
R449	1-216-809-11	s	RESISTOR,CHIP 100 1/16W 1608
R450	1-218-873-11	s	RESISTOR,CHIP 12K 1/16W (1608)
R451	1-218-878-11	s	RESISTOR,CHIP 20K 1/16W (1608)
R452	1-216-809-11	s	RESISTOR,CHIP 100 1/16W 1608
R453	1-216-809-11	s	RESISTOR,CHIP 100 1/16W 1608
R454	1-218-849-11	s	RESISTOR,CHIP 1.2K 1/16W(1608)
R455 *5	1-216-864-11	s	RESISTOR,CHIP 0 1/16W (1608)
R456 *5	1-216-864-11	s	RESISTOR,CHIP 0 1/16W (1608)
R474	1-216-803-11	s	RESISTOR,CHIP 33 1/16W 1608
R475	1-216-864-11	s	RESISTOR,CHIP 0 1/16W (1608)
R476	1-216-864-11	s	RESISTOR,CHIP 0 1/16W (1608)
R477	1-216-864-11	s	RESISTOR,CHIP 0 1/16W (1608)
R479	1-216-803-11	s	RESISTOR,CHIP 33 1/16W 1608
R480	1-216-804-11	s	RESISTOR,CHIP 39 1/16W 1608
R483 *2	1-216-864-11	s	RESISTOR,CHIP 0 1/16W (1608)
R501 *2	1-216-864-11	s	RESISTOR,CHIP 0 1/16W (1608)
R502	1-216-864-11	s	RESISTOR,CHIP 0 1/16W (1608)
R504	1-216-864-11	s	RESISTOR,CHIP 0 1/16W (1608)
R507	1-216-864-11	s	RESISTOR,CHIP 0 1/16W (1608)
R516	1-216-826-11	s	RESISTOR,CHIP 2.7K 1/16W 1608
R521	1-216-845-11	s	RESISTOR,CHIP 100K 1/16W(1608)
R523	1-216-830-11	s	RESISTOR,CHIP 5.6K 1/16W 1608
R524	1-216-848-11	s	RESISTOR,CHIP 180K 1/16 (1608)
R525	1-216-821-11	s	RESISTOR,CHIP 1.0K 1/16W(1608)
R526	1-216-829-11	s	RESISTOR, CHIP 4.7K 1/16W 1608
R527	1-216-855-11	s	RESISTOR, CHIP 680K 1/16W 1608
R528	1-216-848-11	s	RESISTOR,CHIP 180K 1/16 (1608)
R529	1-216-834-11	s	RESISTOR,CHIP 12K 1/16W 1608
R530	1-216-837-11	s	RESISTOR,CHIP 22K 1/16W 1608
R531	1-216-833-11	s	RESISTOR,CHIP 10K 1/16W 1608
R532	1-216-833-11	s	RESISTOR,CHIP 10K 1/16W 1608
R533	1-218-892-11	s	RESISTOR,CHIP 75K 1/16W (1608)
R534	1-216-853-11	s	RESISTOR,CHIP 470K 1/16W(1608)
R535	1-216-853-11	s	RESISTOR,CHIP 470K 1/16W(1608)
R536	1-218-889-11	s	RESISTOR,CHIP 56K 1/16W(1608)
R538	1-216-837-11	s	RESISTOR,CHIP 22K 1/16W 1608
R539	1-216-817-11	s	RESISTOR,CHIP 470 1/16W 1608

(VPR-62P BOARD(DSR-2000P))

Ref. No. or Q'ty	Part No.	SP	Description
R540	1-216-821-11	s	RESISTOR,CHIP 1.0K 1/16W(1608)
R541	1-216-817-11	s	RESISTOR,CHIP 470 1/16W 1608
R542	1-216-821-11	s	RESISTOR,CHIP 1.0K 1/16W(1608)
R543	1-216-829-11	s	RESISTOR, CHIP 4.7K 1/16W 1608
R544	1-216-814-11	s	RESISTOR,CHIP 270 1/16W 1608
R545	1-216-829-11	s	RESISTOR, CHIP 4.7K 1/16W 1608
R546	1-216-864-11	s	RESISTOR,CHIP 0 1/16W (1608)
R548	1-216-864-11	s	RESISTOR,CHIP 0 1/16W (1608)
R549	1-216-829-11	s	RESISTOR, CHIP 4.7K 1/16W 1608
R550	1-216-814-11	s	RESISTOR,CHIP 270 1/16W 1608
R551	1-216-829-11	s	RESISTOR, CHIP 4.7K 1/16W 1608
R552	1-216-839-11	s	RESISTOR,CHIP 33K 1/16W 1608
R553	1-216-839-11	s	RESISTOR,CHIP 33K 1/16W 1608
R554	1-216-864-11	s	RESISTOR,CHIP 0 1/16W (1608)
R556	1-216-864-11	s	RESISTOR,CHIP 0 1/16W (1608)
R557	1-216-855-11	s	RESISTOR, CHIP 680K 1/16W 1608
R558	1-216-839-11	s	RESISTOR,CHIP 33K 1/16W 1608
R559	1-216-839-11	s	RESISTOR,CHIP 33K 1/16W 1608
R560	1-216-805-11	s	RESISTOR,CHIP 47 1/16W 1608
R561	1-216-864-11	s	RESISTOR,CHIP 0 1/16W (1608)
R562	1-216-864-11	s	RESISTOR,CHIP 0 1/16W (1608)
R563	1-216-839-11	s	RESISTOR,CHIP 33K 1/16W 1608
R564	1-216-821-11	s	RESISTOR,CHIP 1.0K 1/16W(1608)
R565	1-216-833-11	s	RESISTOR,CHIP 10K 1/16W 1608
R568	1-216-864-11	s	RESISTOR,CHIP 0 1/16W (1608)
R569	1-216-864-11	s	RESISTOR,CHIP 0 1/16W (1608)
R570	1-216-839-11	s	RESISTOR,CHIP 33K 1/16W 1608
R572	1-216-803-11	s	RESISTOR,CHIP 33 1/16W 1608
R573	1-216-803-11	s	RESISTOR,CHIP 33 1/16W 1608
R574	1-216-803-11	s	RESISTOR,CHIP 33 1/16W 1608
R575	1-216-803-11	s	RESISTOR,CHIP 33 1/16W 1608
R576	1-216-803-11	s	RESISTOR,CHIP 33 1/16W 1608
R601	1-216-864-11	s	RESISTOR,CHIP 0 1/16W (1608)
R602	1-216-817-11	s	RESISTOR,CHIP 470 1/16W 1608
R603	1-218-863-11	s	RESISTOR,CHIP 4.7K 1/16W(1608)
R604	1-216-833-11	s	RESISTOR,CHIP 10K 1/16W 1608
R605	1-218-861-11	s	RESISTOR,CHIP 3.9K 1/16W(1608)
R606	1-216-833-11	s	RESISTOR,CHIP 10K 1/16W 1608
R607	1-218-871-11	s	RESISTOR,CHIP 10K 1/16W (1608)
R608	1-218-848-11	s	RESISTOR,CHIP 1.1K 1/16W(1608)
R609	1-218-864-11	s	RESISTOR,CHIP 5.1K 1/16W(1608)
R610	1-218-864-11	s	RESISTOR,CHIP 5.1K 1/16W(1608)
R611	1-216-822-11	s	RESISTOR, CHIP 1.2K 1/16W 1608
R612	1-216-822-11	s	RESISTOR, CHIP 1.2K 1/16W 1608
R613	1-218-871-11	s	RESISTOR,CHIP 10K 1/16W (1608)
R614	1-216-833-11	s	RESISTOR,CHIP 10K 1/16W 1608
R615	1-216-825-11	s	RESISTOR,CHIP 2.2K 1/16W 1608
R616	1-216-828-11	s	RESISTOR, CHIP 3.9K 1/16W 1608
R617	1-218-871-11	s	RESISTOR,CHIP 10K 1/16W (1608)
R618	1-216-839-11	s	RESISTOR,CHIP 33K 1/16W 1608
R619	1-216-833-11	s	RESISTOR,CHIP 10K 1/16W 1608
R620	1-216-833-11	s	RESISTOR,CHIP 10K 1/16W 1608
R621	1-216-839-11	s	RESISTOR,CHIP 33K 1/16W 1608
R622	1-216-857-11	s	RESISTOR, CHIP 1.0M 1/16W 1608
R623	1-216-857-11	s	RESISTOR, CHIP 1.0M 1/16W 1608
R624	1-216-839-11	s	RESISTOR,CHIP 33K 1/16W 1608
R625	1-216-839-11	s	RESISTOR,CHIP 33K 1/16W 1608
R626	1-216-823-11	s	RESISTOR, CHIP 1.5K 1/16W
R627	1-216-823-11	s	RESISTOR, CHIP 1.5K 1/16W

(VPR-62P BOARD(DSR-2000P))

Ref. No. or Q'ty	Part No.	SP	Description
R628	1-218-871-11	s	RESISTOR,CHIP 10K 1/16W (1608)
R629	1-216-833-11	s	RESISTOR,CHIP 10K 1/16W 1608
R630	1-216-837-11	s	RESISTOR,CHIP 22K 1/16W 1608
R631	1-216-857-11	s	RESISTOR, CHIP 1.0M 1/16W 1608
R632	1-216-839-11	s	RESISTOR,CHIP 33K 1/16W 1608
R633	1-216-805-11	s	RESISTOR,CHIP 47 1/16W 1608
R634	1-216-805-11	s	RESISTOR,CHIP 47 1/16W 1608
R635	1-216-805-11	s	RESISTOR,CHIP 47 1/16W 1608
R636	1-218-857-11	s	RESISTOR,CHIP 2.7K 1/16W(1608)
R637	1-218-882-11	s	RESISTOR, CHIP 30K 1/16W(1608)
R638	1-218-874-11	s	RESISTOR,CHIP 13K 1/16W (1608)
R639	1-218-835-11	s	RESISTOR,CHIP 330 1/16W (1608)
R640	1-218-835-11	s	RESISTOR,CHIP 330 1/16W (1608)
R641	1-218-835-11	s	RESISTOR,CHIP 330 1/16W (1608)
R642	1-218-835-11	s	RESISTOR,CHIP 330 1/16W (1608)
R643	1-218-835-11	s	RESISTOR,CHIP 330 1/16W (1608)
R644	1-218-835-11	s	RESISTOR,CHIP 330 1/16W (1608)
R645	1-216-821-11	s	RESISTOR,CHIP 1.0K 1/16W(1608)
R646	1-216-821-11	s	RESISTOR,CHIP 1.0K 1/16W(1608)
R647	1-216-821-11	s	RESISTOR,CHIP 1.0K 1/16W(1608)
R648	1-216-821-11	s	RESISTOR,CHIP 1.0K 1/16W(1608)
R649	1-216-809-11	s	RESISTOR,CHIP 100 1/16W 1608
R650	1-216-821-11	s	RESISTOR,CHIP 1.0K 1/16W(1608)
R651	1-216-821-11	s	RESISTOR,CHIP 1.0K 1/16W(1608)
R652	1-218-849-11	s	RESISTOR,CHIP 1.2K 1/16W(1608)
R653	1-216-829-11	s	RESISTOR, CHIP 4.7K 1/16W 1608
R654	1-216-809-11	s	RESISTOR,CHIP 100 1/16W 1608
R655	1-216-821-11	s	RESISTOR,CHIP 1.0K 1/16W(1608)
R656	1-216-821-11	s	RESISTOR,CHIP 1.0K 1/16W(1608)
R657	1-216-821-11	s	RESISTOR,CHIP 1.0K 1/16W(1608)
R658	1-218-835-11	s	RESISTOR,CHIP 330 1/16W (1608)
R659	1-216-809-11	s	RESISTOR,CHIP 100 1/16W 1608
R660	1-216-829-11	s	RESISTOR, CHIP 4.7K 1/16W 1608
R661	1-218-829-11	s	RESISTOR,CHIP 180 1/16W (1608)
R662	1-218-836-11	s	RESISTOR,CHIP 360 1/16W (1608)
R663	1-218-840-11	s	RESISTOR,CHIP 510 1/16W (1608)
R664	1-218-840-11	s	RESISTOR,CHIP 510 1/16W (1608)
R665	1-211-990-11	s	RESISTOR,CHIP 75 1/16W (1608)
R666	1-216-809-11	s	RESISTOR,CHIP 100 1/16W 1608
R667	1-216-821-11	s	RESISTOR,CHIP 1.0K 1/16W(1608)
R668	1-216-821-11	s	RESISTOR,CHIP 1.0K 1/16W(1608)
R669	1-218-849-11	s	RESISTOR,CHIP 1.2K 1/16W(1608)
R670	1-216-829-11	s	RESISTOR, CHIP 4.7K 1/16W 1608
R671	1-216-809-11	s	RESISTOR,CHIP 100 1/16W 1608
R672	1-216-821-11	s	RESISTOR,CHIP 1.0K 1/16W(1608)
R673	1-216-821-11	s	RESISTOR,CHIP 1.0K 1/16W(1608)
R674	1-216-821-11	s	RESISTOR,CHIP 1.0K 1/16W(1608)
R675	1-218-835-11	s	RESISTOR,CHIP 330 1/16W (1608)
R676	1-216-809-11	s	RESISTOR,CHIP 100 1/16W 1608
R677	1-216-829-11	s	RESISTOR, CHIP 4.7K 1/16W 1608
R678	1-218-829-11	s	RESISTOR,CHIP 180 1/16W (1608)
R679	1-218-836-11	s	RESISTOR,CHIP 360 1/16W (1608)
R680	1-218-840-11	s	RESISTOR,CHIP 510 1/16W (1608)
R681	1-218-840-11	s	RESISTOR,CHIP 510 1/16W (1608)
R682	1-211-990-11	s	RESISTOR,CHIP 75 1/16W (1608)
R683	1-216-839-11	s	RESISTOR,CHIP 33K 1/16W 1608
R684 *2	1-216-864-11	s	RESISTOR,CHIP 0 1/16W (1608)
R685 *2	1-216-805-11	s	RESISTOR,CHIP 47 1/16W 1608
R686 *2	1-216-805-11	s	RESISTOR,CHIP 47 1/16W 1608

(VPR-62P BOARD(DSR-2000P))

Ref. No. or Q'ty	Part No.	SP	Description
R687 *2	1-216-805-11	s	RESISTOR,CHIP 47 1/16W 1608
R688 *2	1-216-805-11	s	RESISTOR,CHIP 47 1/16W 1608
R689 *2	1-216-805-11	s	RESISTOR,CHIP 47 1/16W 1608
R690 *2	1-216-805-11	s	RESISTOR,CHIP 47 1/16W 1608
R691 *5	1-216-864-11	s	RESISTOR,CHIP 0 1/16W (1608)
R701	1-218-847-11	s	RESISTOR, CHIP 1K 1/16W (1608)
R702	1-216-841-11	s	RESISTOR, CHIP 47K 1/16W 1608
R703	1-218-847-11	s	RESISTOR, CHIP 1K 1/16W (1608)
R704	1-218-839-11	s	RESISTOR,CHIP 470 1/16W (1608)
R705	1-218-835-11	s	RESISTOR,CHIP 330 1/16W (1608)
R706	1-218-871-11	s	RESISTOR,CHIP 10K 1/16W (1608)
R707	1-216-834-11	s	RESISTOR,CHIP 12K 1/16W 1608
R708	1-216-837-11	s	RESISTOR,CHIP 22K 1/16W 1608
R709	1-216-834-11	s	RESISTOR,CHIP 12K 1/16W 1608
R710	1-216-837-11	s	RESISTOR,CHIP 22K 1/16W 1608
R712	1-216-857-11	s	RESISTOR, CHIP 1.0M 1/16W 1608
R713	1-216-857-11	s	RESISTOR, CHIP 1.0M 1/16W 1608
R714	1-216-821-11	s	RESISTOR,CHIP 1.0K 1/16W(1608)
R715	1-216-821-11	s	RESISTOR,CHIP 1.0K 1/16W(1608)
R716	1-218-878-11	s	RESISTOR,CHIP 20K 1/16W (1608)
R717	1-216-821-11	s	RESISTOR,CHIP 1.0K 1/16W(1608)
R718	1-216-841-11	s	RESISTOR, CHIP 47K 1/16W 1608
R719	1-216-821-11	s	RESISTOR,CHIP 1.0K 1/16W(1608)
R720	1-216-841-11	s	RESISTOR, CHIP 47K 1/16W 1608
R721	1-216-821-11	s	RESISTOR,CHIP 1.0K 1/16W(1608)
R722	1-216-821-11	s	RESISTOR,CHIP 1.0K 1/16W(1608)
R723	1-216-829-11	s	RESISTOR, CHIP 4.7K 1/16W 1608
R724	1-216-829-11	s	RESISTOR, CHIP 4.7K 1/16W 1608
R725	1-216-821-11	s	RESISTOR,CHIP 1.0K 1/16W(1608)
R726	1-216-821-11	s	RESISTOR,CHIP 1.0K 1/16W(1608)
R727	1-216-821-11	s	RESISTOR,CHIP 1.0K 1/16W(1608)
R728	1-216-837-11	s	RESISTOR,CHIP 22K 1/16W 1608
R729	1-216-833-11	s	RESISTOR,CHIP 10K 1/16W 1608
R730	1-216-821-11	s	RESISTOR,CHIP 1.0K 1/16W(1608)
R731	1-216-837-11	s	RESISTOR,CHIP 22K 1/16W 1608
R732	1-216-809-11	s	RESISTOR,CHIP 100 1/16W 1608
R733	1-218-858-11	s	RESISTOR, CHIP 3K 1/16W (1608)
R734	1-216-825-11	s	RESISTOR,CHIP 2.2K 1/16W 1608
R735	1-216-825-11	s	RESISTOR,CHIP 2.2K 1/16W 1608
R736	1-216-845-11	s	RESISTOR,CHIP 100K 1/16W(1608)
R737	1-216-821-11	s	RESISTOR,CHIP 1.0K 1/16W(1608)
R738	1-216-821-11	s	RESISTOR,CHIP 1.0K 1/16W(1608)
R739	1-216-821-11	s	RESISTOR,CHIP 1.0K 1/16W(1608)
R740	1-216-821-11	s	RESISTOR,CHIP 1.0K 1/16W(1608)
R741	1-216-821-11	s	RESISTOR,CHIP 1.0K 1/16W(1608)
R742	1-216-815-11	s	RESISTOR,CHIP 330 1/16W 1608
R743	1-216-815-11	s	RESISTOR,CHIP 330 1/16W 1608
R744	1-216-821-11	s	RESISTOR,CHIP 1.0K 1/16W(1608)
R745	1-216-821-11	s	RESISTOR,CHIP 1.0K 1/16W(1608)
R746	1-216-821-11	s	RESISTOR,CHIP 1.0K 1/16W(1608)
R747	1-216-821-11	s	RESISTOR,CHIP 1.0K 1/16W(1608)
R748	1-216-821-11	s	RESISTOR,CHIP 1.0K 1/16W(1608)
R749	1-216-825-11	s	RESISTOR,CHIP 2.2K 1/16W 1608
R750	1-218-843-11	s	RESISTOR,CHIP 680 1/16W (1608)
R751	1-218-862-11	s	RESISTOR,CHIP 4.3K 1/16W(1608)
R752	1-216-821-11	s	RESISTOR,CHIP 1.0K 1/16W(1608)
R753	1-218-857-11	s	RESISTOR,CHIP 2.7K 1/16W(1608)
R754	1-216-825-11	s	RESISTOR,CHIP 2.2K 1/16W 1608
R755	1-216-825-11	s	RESISTOR,CHIP 2.2K 1/16W 1608

(VPR-62P BOARD(DSR-2000P))

Ref. No. or Q'ty	Part No.	SP	Description
R756	1-216-825-11	s	RESISTOR,CHIP 2.2K 1/16W 1608
R757	1-216-805-11	s	RESISTOR,CHIP 47 1/16W 1608
R758	1-216-833-11	s	RESISTOR,CHIP 10K 1/16W 1608
R759	1-216-825-11	s	RESISTOR,CHIP 2.2K 1/16W 1608
R760	1-216-825-11	s	RESISTOR,CHIP 2.2K 1/16W 1608
R761	1-216-829-11	s	RESISTOR, CHIP 4.7K 1/16W 1608
R762	1-216-829-11	s	RESISTOR, CHIP 4.7K 1/16W 1608
R801	1-216-809-11	s	RESISTOR,CHIP 100 1/16W 1608
R802	1-216-825-11	s	RESISTOR,CHIP 2.2K 1/16W 1608
R803	1-216-825-11	s	RESISTOR,CHIP 2.2K 1/16W 1608
R804	1-218-839-11	s	RESISTOR,CHIP 470 1/16W (1608)
R805	1-218-849-11	s	RESISTOR,CHIP 1.2K 1/16W(1608)
R806	1-218-837-11	s	RESISTOR,CHIP 390 1/16W (1608)
R807	1-218-841-11	s	RESISTOR,CHIP 560 1/16W (1608)
R808	1-218-840-11	s	RESISTOR,CHIP 510 1/16W (1608)
R809	1-218-840-11	s	RESISTOR,CHIP 510 1/16W (1608)
R810	1-211-990-11	s	RESISTOR,CHIP 75 1/16W (1608)
R811	1-216-837-11	s	RESISTOR,CHIP 22K 1/16W 1608
R812	1-216-844-11	s	RESISTOR,CHIP 82K 1/16W 1608
R813	1-211-990-11	s	RESISTOR,CHIP 75 1/16W (1608)
R814	1-211-990-11	s	RESISTOR,CHIP 75 1/16W (1608)
R815	1-216-833-11	s	RESISTOR,CHIP 10K 1/16W 1608
R816	1-218-871-11	s	RESISTOR,CHIP 10K 1/16W (1608)
R817	1-216-809-11	s	RESISTOR,CHIP 100 1/16W 1608
R818	1-216-821-11	s	RESISTOR,CHIP 1.0K 1/16W(1608)
R819	1-218-847-11	s	RESISTOR, CHIP 1K 1/16W (1608)
R820	1-218-849-11	s	RESISTOR,CHIP 1.2K 1/16W(1608)
R821	1-218-847-11	s	RESISTOR, CHIP 1K 1/16W (1608)
R822	1-216-825-11	s	RESISTOR,CHIP 2.2K 1/16W 1608
R823	1-216-821-11	s	RESISTOR,CHIP 1.0K 1/16W(1608)
R824	1-216-821-11	s	RESISTOR,CHIP 1.0K 1/16W(1608)
R825	1-216-823-11	s	RESISTOR, CHIP 1.5K 1/16W
R826	1-216-825-11	s	RESISTOR,CHIP 2.2K 1/16W 1608
R827	1-216-825-11	s	RESISTOR,CHIP 2.2K 1/16W 1608
R828	1-218-839-11	s	RESISTOR,CHIP 470 1/16W (1608)
R829	1-218-853-11	s	RESISTOR,CHIP 1.8K 1/16W(1608)
R830	1-211-990-11	s	RESISTOR,CHIP 75 1/16W (1608)
R831	1-211-990-11	s	RESISTOR,CHIP 75 1/16W (1608)
R832	1-216-829-11	s	RESISTOR, CHIP 4.7K 1/16W 1608
R833	1-216-829-11	s	RESISTOR, CHIP 4.7K 1/16W 1608
R834	1-216-821-11	s	RESISTOR,CHIP 1.0K 1/16W(1608)
R835	1-216-813-11	s	RESISTOR, CHIP 220 1/16W 1608
R836	1-216-821-11	s	RESISTOR,CHIP 1.0K 1/16W(1608)
R837	1-216-821-11	s	RESISTOR,CHIP 1.0K 1/16W(1608)
R838	1-216-837-11	s	RESISTOR,CHIP 22K 1/16W 1608
R839	1-216-821-11	s	RESISTOR,CHIP 1.0K 1/16W(1608)
R840	1-216-829-11	s	RESISTOR, CHIP 4.7K 1/16W 1608
R841	1-216-809-11	s	RESISTOR,CHIP 100 1/16W 1608
R842	1-216-819-11	s	RESISTOR,CHIP 680 1/16W 1608
R843	1-216-809-11	s	RESISTOR,CHIP 100 1/16W 1608
R844	1-216-819-11	s	RESISTOR,CHIP 680 1/16W 1608
R845	1-216-853-11	s	RESISTOR,CHIP 470K 1/16W(1608)
R846	1-216-821-11	s	RESISTOR,CHIP 1.0K 1/16W(1608)
R847	1-216-821-11	s	RESISTOR,CHIP 1.0K 1/16W(1608)
R848	1-216-821-11	s	RESISTOR,CHIP 1.0K 1/16W(1608)
R849	1-216-825-11	s	RESISTOR,CHIP 2.2K 1/16W 1608
R850	1-216-833-11	s	RESISTOR,CHIP 10K 1/16W 1608
R851	1-216-823-11	s	RESISTOR, CHIP 1.5K 1/16W
R852	1-216-817-11	s	RESISTOR,CHIP 470 1/16W 1608

(VPR-62P BOARD(DSR-2000P))

Ref. No. or Q'ty	Part No.	SP	Description
R853	1-216-817-11	s	RESISTOR,CHIP 470 1/16W 1608
R854	1-216-833-11	s	RESISTOR,CHIP 10K 1/16W 1608
R855	1-218-863-11	s	RESISTOR,CHIP 4.7K 1/16W(1608)
R856	1-218-847-11	s	RESISTOR, CHIP 1K 1/16W (1608)
R857	1-218-849-11	s	RESISTOR,CHIP 1.2K 1/16W(1608)
R858	1-216-821-11	s	RESISTOR,CHIP 1.0K 1/16W(1608)
R859	1-211-990-11	s	RESISTOR,CHIP 75 1/16W (1608)
R860	1-216-845-11	s	RESISTOR,CHIP 100K 1/16W(1608)
R861	1-216-837-11	s	RESISTOR,CHIP 22K 1/16W 1608
R866 *2	1-218-841-11	s	RESISTOR,CHIP 560 1/16W (1608)
*1	1-218-847-11	s	RESISTOR, CHIP 1K 1/16W (1608)
R902	1-216-841-11	s	RESISTOR, CHIP 47K 1/16W 1608
R903	1-216-841-11	s	RESISTOR, CHIP 47K 1/16W 1608
R906	1-218-851-11	s	RESISTOR,CHIP 1.5K 1/16W(1608)
R907	1-216-833-11	s	RESISTOR,CHIP 10K 1/16W 1608
R911	1-216-833-11	s	RESISTOR,CHIP 10K 1/16W 1608
R916	1-218-867-11	s	RESISTOR,CHIP 6.8K 1/16W(1608)
R917	1-218-873-11	s	RESISTOR,CHIP 12K 1/16W (1608)
R920	1-216-821-11	s	RESISTOR,CHIP 1.0K 1/16W(1608)
R921	1-216-864-11	s	RESISTOR,CHIP 0 1/16W (1608)
R922	1-216-864-11	s	RESISTOR,CHIP 0 1/16W (1608)
R923	1-216-833-11	s	RESISTOR,CHIP 10K 1/16W 1608
R924	1-216-817-11	s	RESISTOR,CHIP 470 1/16W 1608
R927	1-216-821-11	s	RESISTOR,CHIP 1.0K 1/16W(1608)
R931	1-216-864-11	s	RESISTOR,CHIP 0 1/16W (1608)
R932	1-218-847-11	s	RESISTOR, CHIP 1K 1/16W (1608)
R933	1-218-847-11	s	RESISTOR, CHIP 1K 1/16W (1608)
R934	1-216-825-11	s	RESISTOR,CHIP 2.2K 1/16W 1608
R935	1-218-851-11	s	RESISTOR,CHIP 1.5K 1/16W(1608)
R936	1-218-851-11	s	RESISTOR,CHIP 1.5K 1/16W(1608)
R937	1-216-833-11	s	RESISTOR,CHIP 10K 1/16W 1608
R938	1-216-805-11	s	RESISTOR,CHIP 47 1/16W 1608
R939	1-216-825-11	s	RESISTOR,CHIP 2.2K 1/16W 1608
R940	1-216-826-11	s	RESISTOR,CHIP 2.7K 1/16W 1608
R941	1-216-826-11	s	RESISTOR,CHIP 2.7K 1/16W 1608
R942	1-216-864-11	s	RESISTOR,CHIP 0 1/16W (1608)
R943	1-216-820-11	s	RESISTOR, CHIP 820 1/16W 1608
R944	1-218-871-11	s	RESISTOR,CHIP 10K 1/16W (1608)
R945	1-218-873-11	s	RESISTOR,CHIP 12K 1/16W (1608)
R946	1-218-879-11	s	RESISTOR,CHIP 22K 1/16W (1608)
R947	1-218-869-11	s	RESISTOR,CHIP 8.2K 1/16W(1608)
R948	1-211-990-11	s	RESISTOR,CHIP 75 1/16W (1608)
R949	1-216-826-11	s	RESISTOR,CHIP 2.7K 1/16W 1608
R950	1-218-883-11	s	RESISTOR,CHIP 33K 1/16W (1608)
R951	1-216-821-11	s	RESISTOR,CHIP 1.0K 1/16W(1608)
R952	1-218-885-11	s	RESISTOR,CHIP 39K 1/16W (1608)
R953	1-216-821-11	s	RESISTOR,CHIP 1.0K 1/16W(1608)
R954	1-216-837-11	s	RESISTOR,CHIP 22K 1/16W 1608
R955	1-216-855-11	s	RESISTOR, CHIP 680K 1/16W 1608
R956	1-216-864-11	s	RESISTOR,CHIP 0 1/16W (1608)
R957	1-216-817-11	s	RESISTOR,CHIP 470 1/16W 1608
R958	1-216-821-11	s	RESISTOR,CHIP 1.0K 1/16W(1608)
R959	1-216-826-11	s	RESISTOR,CHIP 2.7K 1/16W 1608
R960	1-218-883-11	s	RESISTOR,CHIP 33K 1/16W (1608)
R962	1-216-845-11	s	RESISTOR,CHIP 100K 1/16W(1608)
R964	1-216-809-11	s	RESISTOR,CHIP 100 1/16W 1608
R965	1-218-868-11	s	RESISTOR,CHIP 7.5K 1/16W(1608)
R966	1-218-868-11	s	RESISTOR,CHIP 7.5K 1/16W(1608)
R967	1-218-873-11	s	RESISTOR,CHIP 12K 1/16W (1608)

(VPR-62P BOARD(DSR-2000P))

Ref. No. or Q'ty	Part No.	SP	Description
R968	1-218-873-11	s	RESISTOR,CHIP 12K 1/16W (1608)
R1000 *2	1-216-829-11	s	RESISTOR, CHIP 4.7K 1/16W 1608
R1001	1-216-821-11	s	RESISTOR,CHIP 1.0K 1/16W(1608)
R1002	1-216-821-11	s	RESISTOR,CHIP 1.0K 1/16W(1608)
R1003	1-216-815-11	s	RESISTOR,CHIP 330 1/16W 1608
R1004	1-216-821-11	s	RESISTOR,CHIP 1.0K 1/16W(1608)
R1005	1-216-821-11	s	RESISTOR,CHIP 1.0K 1/16W(1608)
R1006	1-216-843-11	s	RESISTOR,CHIP 68K 1/16W (1608)
R1007	1-216-821-11	s	RESISTOR,CHIP 1.0K 1/16W(1608)
R1009	1-216-864-11	s	RESISTOR,CHIP 0 1/16W (1608)
R1011	1-216-864-11	s	RESISTOR,CHIP 0 1/16W (1608)
R1012	1-216-829-11	s	RESISTOR, CHIP 4.7K 1/16W 1608
R1013	1-216-821-11	s	RESISTOR,CHIP 1.0K 1/16W(1608)
R1014	1-216-833-11	s	RESISTOR,CHIP 10K 1/16W 1608
R1015	1-216-833-11	s	RESISTOR,CHIP 10K 1/16W 1608
R1016 *3	1-216-829-11	s	RESISTOR, CHIP 4.7K 1/16W 1608
R1017	1-216-839-11	s	RESISTOR,CHIP 33K 1/16W 1608
R1019	1-216-833-11	s	RESISTOR,CHIP 10K 1/16W 1608
R1020	1-216-833-11	s	RESISTOR,CHIP 10K 1/16W 1608
R1021	1-216-833-11	s	RESISTOR,CHIP 10K 1/16W 1608
R1022	1-216-829-11	s	RESISTOR, CHIP 4.7K 1/16W 1608
R1023	1-216-839-11	s	RESISTOR,CHIP 33K 1/16W 1608
R1024	1-216-839-11	s	RESISTOR,CHIP 33K 1/16W 1608
R1025	1-216-864-11	s	RESISTOR,CHIP 0 1/16W (1608)
R1026	1-216-864-11	s	RESISTOR,CHIP 0 1/16W (1608)
R1027 *1	1-216-864-11	s	RESISTOR,CHIP 0 1/16W (1608)
R1028 *1	1-216-864-11	s	RESISTOR,CHIP 0 1/16W (1608)
R1029 *5	1-216-864-11	s	RESISTOR,CHIP 0 1/16W (1608)
R1030 *3	1-216-825-11	s	RESISTOR,CHIP 2.2K 1/16W 1608
R1035	1-216-864-11	s	RESISTOR,CHIP 0 1/16W (1608)
R1039	1-218-848-11	s	RESISTOR,CHIP 1.1K 1/16W(1608)
R1040 *1	1-218-863-11	s	RESISTOR,CHIP 4.7K 1/16W(1608)
R1041	1-211-990-11	s	RESISTOR,CHIP 75 1/16W (1608)
R1042	1-211-990-11	s	RESISTOR,CHIP 75 1/16W (1608)
R1043	1-218-861-11	s	RESISTOR,CHIP 3.9K 1/16W(1608)
R1044 *1	1-218-861-11	s	RESISTOR,CHIP 3.9K 1/16W(1608)
R1045	1-211-990-11	s	RESISTOR,CHIP 75 1/16W (1608)
R1046	1-218-873-11	s	RESISTOR,CHIP 12K 1/16W (1608)
R1047 *1	1-218-834-11	s	RESISTOR,CHIP 300 1/16W (1608)
R1048 *1	1-218-873-11	s	RESISTOR,CHIP 12K 1/16W (1608)
R1049	1-216-817-11	s	RESISTOR,CHIP 470 1/16W 1608
R1050	1-216-809-11	s	RESISTOR,CHIP 100 1/16W 1608
R1051	1-216-817-11	s	RESISTOR,CHIP 470 1/16W 1608
R1052	1-216-864-11	s	RESISTOR,CHIP 0 1/16W (1608)
R1053	1-216-817-11	s	RESISTOR,CHIP 470 1/16W 1608
R1054 *1	1-216-817-11	s	RESISTOR,CHIP 470 1/16W 1608
R1055	1-211-985-11	s	RESISTOR,CHIP 47 1/16W (1608)
R1057	1-211-985-11	s	RESISTOR,CHIP 47 1/16W (1608)
R1058	1-211-985-11	s	RESISTOR,CHIP 47 1/16W (1608)
R1065 *1	1-216-864-11	s	RESISTOR,CHIP 0 1/16W (1608)
R1068 *1	1-216-864-11	s	RESISTOR,CHIP 0 1/16W (1608)
R1069	1-216-864-11	s	RESISTOR,CHIP 0 1/16W (1608)
R1071	1-216-864-11	s	RESISTOR,CHIP 0 1/16W (1608)
R1080	1-216-821-11	s	RESISTOR,CHIP 1.0K 1/16W(1608)
R1081	1-216-864-11	s	RESISTOR,CHIP 0 1/16W (1608)
R1082	1-216-864-11	s	RESISTOR,CHIP 0 1/16W (1608)
R1083 *1	1-218-871-11	s	RESISTOR,CHIP 10K 1/16(1608)
R1084 *1	1-218-843-11	S	RESISTOR,CHIP 680 1/16W (1608)
R1085 *3	1-216-864-11	s	RESISTOR,CHIP 0 1/16W (1608)

(VPR-62P BOARD(DSR-2000P))

Ref. No. or Q'ty	Part No.	SP	Description
R1086 *1	1-216-829-11	s	RESISTOR,CHIP 4.7K 1/16W 1608
R1087	1-216-864-11	s	RESISTOR,CHIP 0 1/16W (1608)
R1088	1-216-864-11	s	RESISTOR,CHIP 0 1/16W (1608)
R1090	1-216-843-11	s	RESISTOR,CHIP 68K 1/16W (1608)
R1091	1-216-821-11	s	RESISTOR,CHIP 1.0K 1/16W(1608)
R1092	1-216-821-11	s	RESISTOR,CHIP 1.0K 1/16W(1608)
R1093	1-216-833-11	s	RESISTOR,CHIP 10K 1/16W 1608
R1094	1-216-833-11	s	RESISTOR,CHIP 10K 1/16W 1608
R1095	1-216-817-11	s	RESISTOR,CHIP 470 1/16W 1608
R1096	1-216-805-11	s	RESISTOR,CHIP 47 1/16W 1608
R1097	1-216-829-11	s	RESISTOR, CHIP 4.7K 1/16W 1608
R1098	1-216-864-11	s	RESISTOR,CHIP 0 1/16W (1608)
R1099	1-216-833-11	s	RESISTOR,CHIP 10K 1/16W 1608
R1100	1-216-833-11	s	RESISTOR,CHIP 10K 1/16W 1608
R1101 *2	1-211-985-11	s	RESISTOR,CHIP 47 1/16W (1608)
R1102 *2	1-216-829-11	s	RESISTOR, CHIP 4.7K 1/16W 1608
R1103 *2	1-216-829-11	s	RESISTOR, CHIP 4.7K 1/16W 1608
R1104 *2	1-216-864-11	s	RESISTOR,CHIP 0 1/16W (1608)
R1107 *4	1-216-864-11	s	RESISTOR,CHIP 0 1/16W (1608)
R1201 *2	1-216-864-11	s	RESISTOR,CHIP 0 1/16W (1608)
RB4 *2	1-239-711-11	s	NETWORK, RESISTOR 0 (1608)
*1	1-239-390-11	s	RESISTOR,NETWORK 33 (1608)
RB5 *2	1-239-711-11	s	NETWORK, RESISTOR 0 (1608)
*1	1-239-390-11	s	RESISTOR,NETWORK 33 (1608)
RB6 *2	1-239-711-11	s	NETWORK, RESISTOR 0 (1608)
*1	1-239-390-11	s	RESISTOR,NETWORK 33 (1608)
RB7 *2	1-239-711-11	s	NETWORK, RESISTOR 0 (1608)
*1	1-239-390-11	s	RESISTOR,NETWORK 33 (1608)
RB201	1-239-412-11	s	NETWORK, RESISTOR 100 (1608)
RB202	1-239-412-11	s	NETWORK, RESISTOR 100 (1608)
RB203	1-239-412-11	s	NETWORK, RESISTOR 100 (1608)
RB204	1-239-412-11	s	NETWORK, RESISTOR 100 (1608)
RB205	1-239-412-11	s	NETWORK, RESISTOR 100 (1608)
RB206	1-236-908-11	s	RESISTOR,NETWORK 10K (3216)
RB207	1-236-908-11	s	RESISTOR,NETWORK 10K (3216)
RB301	1-236-904-11	s	RESISTOR NETWORK 1K (1608)
RB401	1-239-390-11	s	RESISTOR,NETWORK 33 (1608)
RB402	1-239-390-11	s	RESISTOR,NETWORK 33 (1608)
RB403	1-239-390-11	s	RESISTOR,NETWORK 33 (1608)
RB404	1-239-390-11	s	RESISTOR,NETWORK 33 (1608)
RB405	1-239-390-11	s	RESISTOR,NETWORK 33 (1608)
RB601	1-239-409-11	s	RESISTOR NETWORK 47 (1608)
RB602	1-239-409-11	s	RESISTOR NETWORK 47 (1608)
RB603	1-239-409-11	s	RESISTOR NETWORK 47 (1608)
RB604	1-239-409-11	s	RESISTOR NETWORK 47 (1608)
RB605	1-239-409-11	s	RESISTOR NETWORK 47 (1608)
RB606	1-239-409-11	s	RESISTOR NETWORK 47 (1608)
RB1001	1-236-907-11	s	RESISTOR BLOCK 100K (1608)
RB1002	1-239-412-11	s	NETWORK, RESISTOR 100 (1608)
RV101	1-225-785-21	s	RES, ADJ, CERMET 100
RV103	1-225-787-21	s	RES, ADJ, CERMET 500
RV200	1-225-809-21	s	RES, ADJ, CERMET 5K
RV201	1-225-810-21	s	RES, ADJ, CERMET 10K
RV202	1-225-809-21	s	RES, ADJ, CERMET 5K
RV300	1-225-789-21	s	RES, ADJ, CERMET 2K
RV400	1-225-787-21	s	RES, ADJ, CERMET 500
RV401	1-225-787-21	s	RES, ADJ, CERMET 500
RV402	1-225-787-21	s	RES, ADJ, CERMET 500
RV403	1-225-788-21	s	RES, ADJ, CERMET 1K

(VPR-62P BOARD(DSR-2000P))

Ref. No. or Q'ty	Part No.	SP	Description
RV404	1-225-789-21	s	RES, ADJ, CERMET 2K
RV405	1-225-789-21	s	RES, ADJ, CERMET 2K
RV406	1-225-789-21	s	RES, ADJ, CERMET 2K
RV407	1-225-789-21	s	RES, ADJ, CERMET 2K
RV408	1-225-789-21	s	RES, ADJ, CERMET 2K
RV409	1-225-789-21	s	RES, ADJ, CERMET 2K
RV500	1-225-810-21	s	RES, ADJ, CERMET 10K
RV601	1-225-809-21	s	RES, ADJ, CERMET 5K
RV602	1-225-809-21	s	RES, ADJ, CERMET 5K
RV603	1-225-807-21	s	RES, ADJ, CERMET 2K
RV604	1-225-789-21	s	RES, ADJ, CERMET 2K
RV605	1-225-785-21	s	RES, ADJ, CERMET 100
RV606	1-225-789-21	s	RES, ADJ, CERMET 2K
RV607	1-225-785-21	s	RES, ADJ, CERMET 100
RV701	1-225-809-21	s	RES, ADJ, CERMET 5K
RV702	1-225-809-21	s	RES, ADJ, CERMET 5K
RV703	1-225-813-21	s	RES, ADJ, CERMET 50K
RV704	1-225-813-21	s	RES, ADJ, CERMET 50K
RV705	1-225-789-21	s	RES, ADJ, CERMET 2K
RV801	1-225-787-21	s	RES, ADJ, CERMET 500
RV802	1-225-785-21	s	RES, ADJ, CERMET 100
RV803	1-225-787-21	s	RES, ADJ, CERMET 500
RV804	1-225-788-21	s	RES, ADJ, CERMET 1K
RV805	1-225-788-21	s	RES, ADJ, CERMET 1K
RV806	1-225-785-21	s	RES, ADJ, CERMET 100
RV901	1-225-791-21	s	RES, ADJ, CERMET 5K
RV902	1-225-810-21	s	RES, ADJ, CERMET 10K
RV903	1-225-810-21	s	RES, ADJ, CERMET 10K
RV904	1-225-789-21	s	RES, ADJ, CERMET 2K
RV906	1-225-788-21	s	RES, ADJ, CERMET 1K
RV1001	1-225-792-21	s	RES, ADJ, CERMET 10K
RV1002	1-225-792-21	s	RES, ADJ, CERMET 10K
S200	1-571-275-31	s	SWITCH,SLIDE (1-1-2)
THP701	1-809-352-11	s	THERMISTOR,NTC
THP901	1-809-352-11	s	THERMISTOR,NTC
X300	1-760-183-21	s	VIBRATOR, CRYSTAL
X301	1-767-619-11	s	OSCILLATOR, CRYSTAL
X601	1-781-123-21	s	OSCILLATOR, CRYSTAL
X602	1-781-123-21	s	OSCILLATOR, CRYSTAL
X603	1-781-123-21	s	OSCILLATOR, CRYSTAL
X1001	1-767-619-11	s	OSCILLATOR, CRYSTAL
X1002	1-767-695-21	s	OSCILLATOR, CRYSTAL

VR-259 BOARD(DSR-2000/2000P)

Ref. No. or Q'ty	Part No.	SP	Description
1pc	A-8323-511-A	o	MOUNTED CIRCUIT BOARD, VR-259
C1	1-165-319-11	s	CAPACITOR,CERAMIC 0.1MF/50V
CN1	1-691-395-11	s	CONNECTOR,FPC 6P
R1	1-216-295-91	s	RESISTOR, CHIP 0 (1/10W)
R4	1-216-295-91	s	RESISTOR, CHIP 0 (1/10W)
R5	1-208-802-11	s	RESISTOR,CHIP 6.8K 1/10W(2012)
R6	1-208-802-11	s	RESISTOR,CHIP 6.8K 1/10W(2012)
R7	1-208-802-11	s	RESISTOR,CHIP 6.8K 1/10W(2012)
R8	1-208-802-11	s	RESISTOR,CHIP 6.8K 1/10W(2012)
R9	1-208-802-11	s	RESISTOR,CHIP 6.8K 1/10W(2012)
R10	1-208-802-11	s	RESISTOR,CHIP 6.8K 1/10W(2012)
R11	1-208-802-11	s	RESISTOR,CHIP 6.8K 1/10W(2012)
R12	1-208-802-11	s	RESISTOR,CHIP 6.8K 1/10W(2012)
RV1	1-241-249-11	s	RESISTOR, VAR, CARBON 10K
RV2	1-241-249-11	s	RESISTOR, VAR, CARBON 10K
RV3	1-241-249-11	s	RESISTOR, VAR, CARBON 10K
RV4	1-241-249-11	s	RESISTOR, VAR, CARBON 10K

VR-260 BOARD(DSR-2000/2000P)

Ref. No. or Q'ty	Part No.	SP	Description
1pc	A-8323-512-A	o	MOUNTED CIRCUIT BOARD, VR-260
C1	1-165-319-11	s	CAPACITOR,CERAMIC 0.1MF/50V
CN1	1-691-395-11	s	CONNECTOR,FPC 6P
R1	1-216-295-91	s	RESISTOR, CHIP 0 (1/10W)
R4	1-216-295-91	s	RESISTOR, CHIP 0 (1/10W)
R5	1-208-802-11	s	RESISTOR,CHIP 6.8K 1/10W(2012)
R6	1-208-802-11	s	RESISTOR,CHIP 6.8K 1/10W(2012)
R7	1-208-802-11	s	RESISTOR,CHIP 6.8K 1/10W(2012)
R8	1-208-802-11	s	RESISTOR,CHIP 6.8K 1/10W(2012)
R9	1-208-802-11	s	RESISTOR,CHIP 6.8K 1/10W(2012)
R10	1-208-802-11	s	RESISTOR,CHIP 6.8K 1/10W(2012)
R11	1-208-802-11	s	RESISTOR,CHIP 6.8K 1/10W(2012)
R12	1-208-802-11	s	RESISTOR,CHIP 6.8K 1/10W(2012)
RV1	1-241-249-11	s	RESISTOR, VAR, CARBON 10K
RV2	1-241-249-11	s	RESISTOR, VAR, CARBON 10K
RV3	1-241-249-11	s	RESISTOR, VAR, CARBON 10K
RV4	1-241-249-11	s	RESISTOR, VAR, CARBON 10K

FRAME(DSR-2000/2000P)

部品番号が記載されていないハーネスは，サービス部品として登録されていません。
これらは，リストに展開されているコンポーネント部品で補修してください。

Harnesses with no part number are not registered as spare parts.
In need of repair, get components shown in the list and repair using them.

Ref. No.
or Q'ty Part No. SP Description

HN001 1-960-088-11 o HARNESS, SUB (KYHP)
(FROM CN2/HP-99 BOARD TO CN712/KY-452 BOARD)

HN002 1-791-704-11 o WIRE, FLAT TYPE (6CORE)
(FROM CN1/VR-260 BOARD TO CN713/KY-452 BOARD)

HN003 1-791-705-11 o WIRE, FLAT TYPE (6CORE)
(FROM CN1/VR-259 BOARD TO CN714/KY-452 BOARD)

HN004 1-960-089-11 o HARNESS, SUB (KYJOG)
(FROM CN1/PTC-100 BOARD TO CN711/KY-452 BOARD)

HN005 1-791-711-11 o WIRE, FLAT TYPE (34CORE)
(FROM CN710/KY-452 BOARD TO CN710/SW-11 BOARD)

HN006 1-791-706-11 o WIRE, FLAT TYPE (7CORE)
(FROM CN730/SW-17 BOARD TO CN730/SW-11 BOARD)

HN007 1-791-707-11 o WIRE, FLAT TYPE (20CORE)
(FROM CN720/DY-15 BOARD TO CN720/SW-11 BOARD)

HN008 1-791-709-11 o WIRE, FLAT TYPE (22CORE)
(FROM CN500/MB-859 BOARD TO CN500/MS-64 BOARD)

HN009 1-791-709-11 o WIRE, FLAT TYPE (22CORE)
(FROM CN501/MB-859 BOARD TO CN501/MS-64 BOARD)

HN010 1-791-710-11 o WIRE, FLAT TYPE (30CORE)
(FROM CN502/MB-859 BOARD TO CN502/MS-64 BOARD)

HN011 1-791-710-11 o WIRE, FLAT TYPE (30CORE)
(FROM CN503/MS-64 BOARD TO CN503/MB-859 BOARD)

HN012 1-791-710-11 o WIRE, FLAT TYPE (30CORE)
(FROM CN504/MS-64 BOARD TO CN504/MB-859 BOARD)

HN013 1-791-715-12 o CABLE ASSEMBLY, COAXIAL

HN014 1-791-717-11 o CABLE ASSEMBLY, COAXIAL

HN015 1-791-718-12 o CABLE ASSEMBLY, COAXIAL

HN016 1-791-719-11 o CABLE ASSEMBLY, COAXIAL

HN017 1-791-720-11 o CABLE ASSEMBLY, COAXIAL

HN018 1-791-721-11 o CABLE ASSEMBLY, COAXIAL

HN019 1-791-716-12 o CABLE ASSEMBLY, COAXIAL

HN020 1-791-708-11 o WIRE, FLAT TYPE (18CORE)
(FROM CN505/MB-859 BOARD TO CN1/CC-83 BOARD)

HN021 1-960-087-11 o HARNESS, SUB (DC POWER 1)
(TO CN901/MB-859 BOARD)
1pc 1-563-888-11 s HOUSING, CONNECTOR 10P
10pcs 1-562-210-11 s CONTACT, CONNECTOR
(TO CN202/SW-REG)
1pc 1-563-888-11 s HOUSING, CONNECTOR 10P
10pcs 1-562-210-11 s CONTACT, CONNECTOR

Ref. No.
or Q'ty Part No. SP Description

HN022 1-960-090-11 o HARNESS, SUB (DC POWER 2)
(TO CN902/MB-859 BOARD)
1pc 1-562-285-11 o HOUSING, CONNECTOR 4P
4pcs 1-562-210-11 s CONTACT, CONNECTOR
(TO CN201/SW-REG)
1pc 1-562-285-11 o HOUSING, CONNECTOR 4P
4pcs 1-562-210-11 s CONTACT, CONNECTOR

HN023 1-791-714-11 o CABLE, FLEXIBLE FLAT (15CORE)
(FROM CN13/MS-64 BOARD TO CN4/SE-521 BOARD)

HN024 1-791-714-11 o CABLE, FLEXIBLE FLAT (15CORE)
(FROM CN4/MS-64 BOARD TO CN3/SE-522 BOARD)

HN025 - - - HARNESS, SUB (CAS)
(FROM CN3/CC-83 BOARD TO MOTOR/M1)
1pc 1-764-192-11 o HOUSING, CONNECTOR 2P
2pcs 1-695-215-11 o TERMINAL, SOLDERLESS 1P

HN026 1-960-086-12 o HARNESS, SUB (AC SW)
(FROM CN101/SW-REG TO POWER SW)
1pc 1-794-319-11 o HOUSING, CONNECTOR 7P
4pcs 1-562-210-11 s CONTACT, CONNECTOR
1pc ⚠ 1-762-953-11 s SWITCH, POWER

HN027 1-959-130-11 o HARNESS, SUB (RS)
(FROM REEL SHIFT MOTOR/M3 TO CN5/MS-64 BOARD)

HN028 1-959-130-11 o HARNESS, SUB (RS)
(FROM CN19/MS-64 BOARD TO LOADING MOTOR/M7)

M1 X-360-566-12 s MOTOR ASSY
"MOTOR"
M2 8-835-619-51 s MOTOR, DC SCD16A/J-RP
"CAPSTAN MOTOR"
M3 A-8279-204-A s MOTOR ASSY, RS
"REEL SHIFT MOTOR"
M4 8-835-636-51 s MOTOR, DC SRD14A/J-N
"T-REEL MOTOR"
M5 A-8323-775-A s DEH-16A-R
"DRUM ASSEMBLY"
M6 8-835-637-51 s MOTOR, DC SRD15A/J-N
"S-REEL MOTOR"
M7 A-8279-202-A s MOTOR ASSY, LD
"LOADING MOTOR"

SE1 8-719-988-19 s PHTO REFLECTOR PR-11-C-T
"CASSECOM SENSOR'S"
SE2 8-719-988-19 s PHTO REFLECTOR PR-11-C-T
"CASSECOM SENSOR'S"
SE3 8-719-988-19 s PHTO REFLECTOR PR-11-C-T
"CASSECOM SENSOR'S"
SE4 8-719-988-19 s PHOTO REFLECTOR PR-11-C-T
"LOADING SENSOR'S"
SE5 8-719-988-19 s PHOTO REFLECTOR PR-11-C-T
"LOADING SENSOR'S"
SE6 8-719-988-19 s PHOTO REFLECTOR PR-11-C-T
"LOADING SENSOR'S"
SE7 8-729-921-53 s PHOTO TRANSISTOR PT483F1
"END SENSOR"
SE8 8-729-921-53 s PHOTO TRANSISTOR PT483F1
"TOP SENSOR"
SE9 8-719-939-11 s PHOTO INTERRUPTER GP2S09-B
"REEL POSITION SENSOR'S"
SE10 8-719-988-19 s PTOTO REFLECTOR PR-11-C-T
"REEL POSITION SENSOR'S"
SE11 8-719-939-11 s PHOTO INTERRUPTER GP2S09-B
"REEL POSITION SENSOR'S"
SE12 8-719-939-11 s PHOTO INTERRUPTER GP2S09-B
"REEL POSITION SENSOR'S"

(FRAME(DSR-2000/2000P))

Ref. No. or Q'ty	Part No.	SP	Description
SE13	1-801-596-21	s	THERMISTOR "THERMO SENSOR"
SE14	1-572-288-21	s	SWITCH, PUSH "CASSETTE SIZE SENSOR'S"
SE15	1-572-288-21	s	SWITCH, PUSH "CASSETTE SIZE SENSOR'S"
SE16	1-572-288-21	s	SWITCH, PUSH "CASSETTE SIZE SENSOR'S"
SE17	1-803-490-11	s	SENSOR, DEW CONDENSATION "DEW SENSOR"
SE18	8-719-988-19	s	PHOTO REFLECTOR PR-11-C-T "CASSETTE IN SENSOR'S"
SE19	8-719-988-19	s	PHOTO REFLECTOR PR-11-C-T "CASSETTE IN SENSOR'S"
SE20	8-719-988-19	s	PHOTO REFLECTOR PR-11-C-T "CASSETTE IN SENSOR'S"
SE21	8-719-988-19	s	PHOTO REFLECTOR PR-11-C-T "CASSETTE IN SENSOR'S"
SE22	A-8323-659-A	s	HOLDER SUB ASSY, MIC "MIC SENSOR"
PM1	1-454-931-12	s	SOLENOID, PLUNGER "PINCH SOL"
PM2	1-454-932-11	s	SOLENOID, PLUNGER "M-STOP SOL"
PM3	1-454-930-11	s	SOLENOID, PLUNGER "R-BRAKE SOL"
PM4	1-454-942-11	s	SOLENOID, PLUNGER "HC SOL"
1pc	1-793-815-11	o	CONVERTER, COAXIAL CONNECTOR "SDTI (QSDI)"
1pc	1-793-815-11	o	CONVERTER, COAXIAL CONNECTOR "SDI INPUT"
1pc	1-793-816-11	o	CONVERTER, COAXIAL CONNECTOR "SDI OUTPUT"
1pc	⚠ 1-468-436-12	s	REGULATOR, SWITCHING "SW-REG"

FRAME(DSBK-190)

Ref. No. or Q'ty	Part No.	SP	Description
HN029	1-960-280-11	o	HARNESS, SUB (ISCN)
(TO CN401/IF-763 BOARD)			
1pc	1-565-978-11	o	HOUSING, CONNECTOR 6P
6pcs	1-565-977-11	s	TERMINAL, SOLDERLESS
(TO CN1/CN-1968 BOARD)			
1pc	1-565-978-11	o	HOUSING, CONNECTOR 6P
6pcs	1-565-977-11	s	TERMINAL, SOLDERLESS

FRAME(DSBK-200)

Ref. No. or Q'ty	Part No.	SP	Description
HN030	1-960-326-11	o	HARNESS, SUB(KYIF)
(FROM CN2/IF-778 BOARD TO CN715/KY-452A BOARD)			
HN031	1-960-089-11	o	HARNESS, SUB(KYJOG)
(FROM CN711/KY-452A BOARD TO CN1/PTC-100 BOARD)			

12-4. Packing Materials and Accessories

PACKING MATERIALS & SUPPLIED ACCESSORIES(DSR-2000/2000P)

Ref. No. or Q'ty	Part No.	SP	Description
1pc	⚠ 1-791-047-11	s	CORD SET, POWER (for J model)
1pc	⚠ 1-551-812-11	s	CORD,POWER (for UC model)
1pc	⚠ 1-782-929-11	s	CORD,POWER (BS 3P) (for CE model)
1pc	3-704-355-01	o	SHEET (STADARD), PROTECTION
1pc	3-858-617-02	s	INSTRUCTION (WF)
1pc	3-867-754-02	s	OPERATING INSTRUCTIONS (Japanese: for J model)
1pc	3-867-754-12	s	OPERATING INSTRUCTIONS (English: for UC/CE model)
1pc	3-867-754-22	s	OPERATING INSTRUCTIONS (French: for UC/CE model)
1pc	3-867-754-32	s	OPERATING INSTRUCTIONS (German: for CE model)
1pc	3-867-754-42	s	OPERATING INSTRUCTIONS (Italian: for CE model)

PACKING MATERIALS & SUPPLIED ACCESSORIES(DSBK-190)

Ref. No. or Q'ty	Part No.	SP	Description
1pc	1-782-408-21	s	CORD, CONNECTION
1pc	1-791-184-11	o	CORD, CONNECTION (IEEE 1394)
1pc	1-960-280-11	o	HARNESS, SUB (ISCN)
1pc	3-203-674-01	s	MANUAL, INSTRUCTION
1pc	7-623-422-07	s	LW3, TYPE B
1pc	7-682-547-04	s	SCREW +B 3x6

PACKING MATERIALS & SUPPLIED ACCESSORIES(DSBK-200)

Ref. No. or Q'ty	Part No.	SP	Description
1pc	1-543-798-11	s	FILTER, CLAMP(FERRITE CORE)
1pc	1-792-642-11	s	CORD, CONNECTION
1pc	3-203-675-01	s	MANUAL, INSTRUCTION

12-5. Optional Fixtures

Part No.	SP	Description
J-6080-029-A	s	MIRROR (SMALL ROUND TYPE 12MM)
J-6082-231-A	o	TOOL, WASHER BRACKET (1.5)
J-6082-232-A	o	TOOL, WASHER BRACKET (1.2)
J-6082-233-A	o	TOOL, WASHER BRACKET (0.8)
J-6082-234-A	o	TOOL, WASHER REMOVER (A)
J-6082-236-A	o	REMOVABLE SET, WASHER
J-6082-362-A	s	TAPE GUIDE DRIVER 2
J-6082-373-A	o	DV TORQUE CASSETTE
J-6325-110-A	o	BIT FOR TORQUE DRIVER (M1.4)
J-6325-380-A	o	BIT FOR TORQUE DRIVER (M2)
J-6325-400-A	o	TORQUE DRIVER (3KG)
J-6443-710-A	o	BRAKE TORQUE GAUGE (CCW) 200G-CM
J-6443-720-A	o	BRAKE TORQUE GAUGE (CW) 200G-CM
J-6444-610-B	o	PATH ADJUSTMENT BOARD, DJ-461
J-6444-930-A	o	EXTENSION BOARD, DJ-493
3-184-527-01	s	CLOTH, CLEANING (145MMX145MM)
7-432-114-11	s	THREE BOND-1401B
7-662-001-39	o	GREASE, SG-941 (20G)
8-967-999-02	o	TAPE, ALIGNMENT XH2-1AST (N&P)
8-967-999-22	o	TAPE, ALIGNMENT XH5-1A2 (NTSC)
8-967-999-26	o	TAPE, ALIGNMENT XH5-1AP2 (PAL)
8-967-999-31	o	TAPE, ALIGNMENT XH4-1A (NTSC)
9-919-573-01	s	HEAD CLEANING LIQUID

Section 13
Block Diagrams

Index

Board Name	Circuit Configuration	Page
Overall	—	13-2
APR-45	Audio process	13-4
CC-83	Cassette compartment mode detection/intermediate board	13-3
CC-84	Cassette compartment cassette type detection	13-3
CC-85	Cassette compartment cassette in detection	13-3
CN-1863	Sensor input/output board	—
CN-1968	i.LINK connector board (Option: DSBK-190)	13-15
CN-2021	Intermediate board between CC-84 and CC-83	—
CN-2022	Intermediate board between CC-85 and CC-84	—
CP-341	Video/remote interface	13-2, 3
CP-342/342A	Audio interface	13-2
DPR-136	Digital process	13-6
DU-83	Digital process	13-3
DU-84	Digital process	13-2, 3
DU-89	Digital process	13-2, 3
DU-95	SDI character generator	—
DY-15	Fluorescent display board/audio meter/input • output selection	13-3
EX-752	Intermediate board	—
FU-78P	Digital process (PB)	13-14
FU-78R	Digital process (REC)	13-14
HP-99	Headphone interface	—
IF-763	i.LINK interface board (Option: DSBK-190)	13-15
IF-778	Operation panel intermediate board (Option: DSBK-200)	—
KY-452	Operation panel	13-3
KY-452A	Operation panel board (Option: DSBK-200)	13-3
MB-859	Mother board	—
MS-64	Servo/mechanism control	13-3
PTC-100	Search dial sensor	—
RP-111	RF REC/PB, ATF detection	13-16
SE-521	Mode sensor/tape end sensor/loading motor FG sensor	13-3
SE-522	Tape top sensor/reel position sensor (Mini/M/Standard)	13-3
SE-525	LED signal board	—
SE-538	Tension sensor	13-3
SV-212	Servo/mechanism control	13-21
SW-11/11P	Switch	13-3
SW-17	Remote switch	13-3
SY-278	System control	13-24
VPR-62/62P	Analog video input • output process/reference	13-27
VR-259	Audio PB volume control	13-3
VR-260	Audio REC volume control	13-3

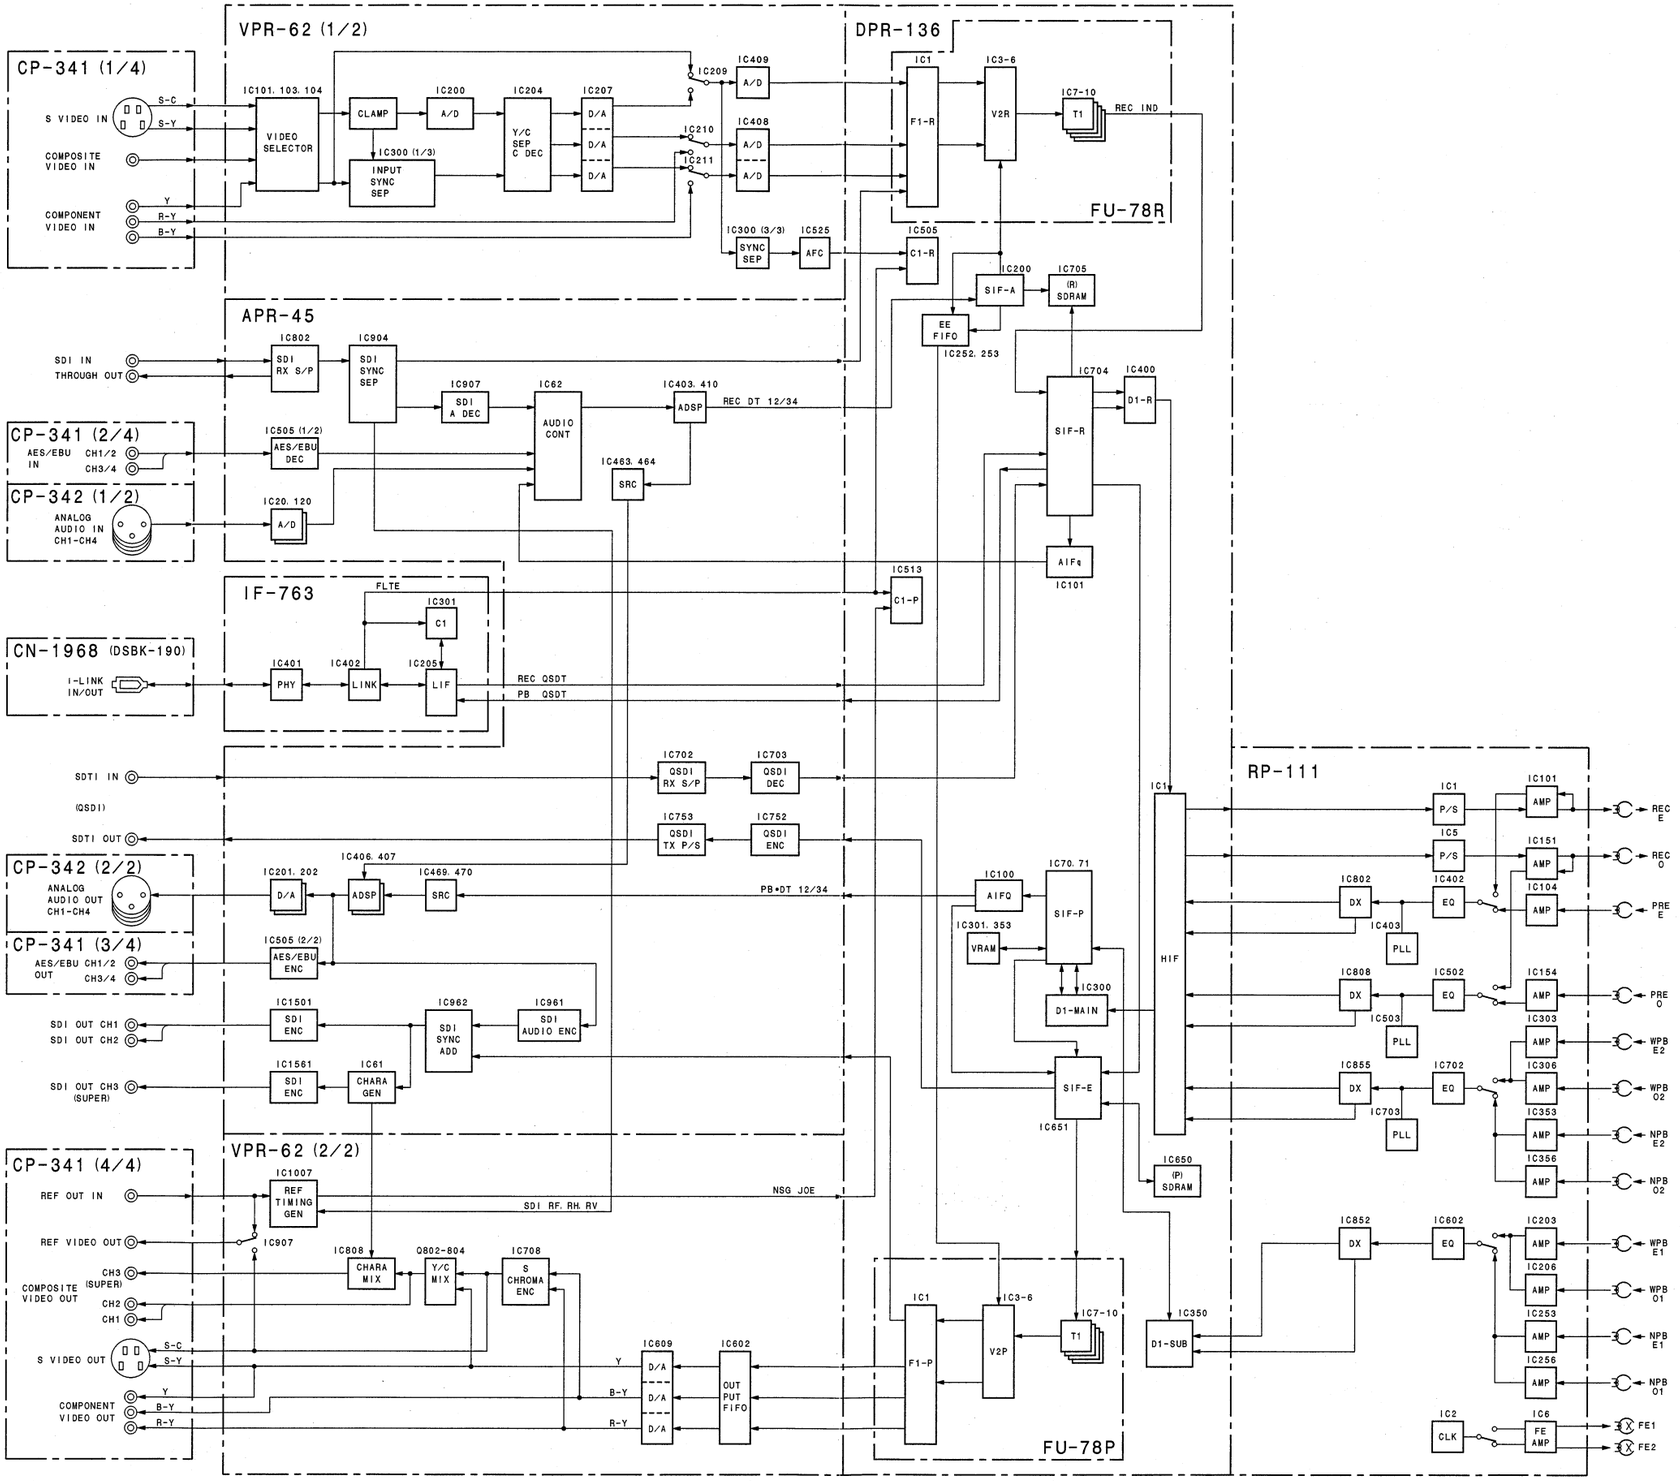

13-2 (b) 13-2 (b)

Overall (1/2)
LOT NO. 113-

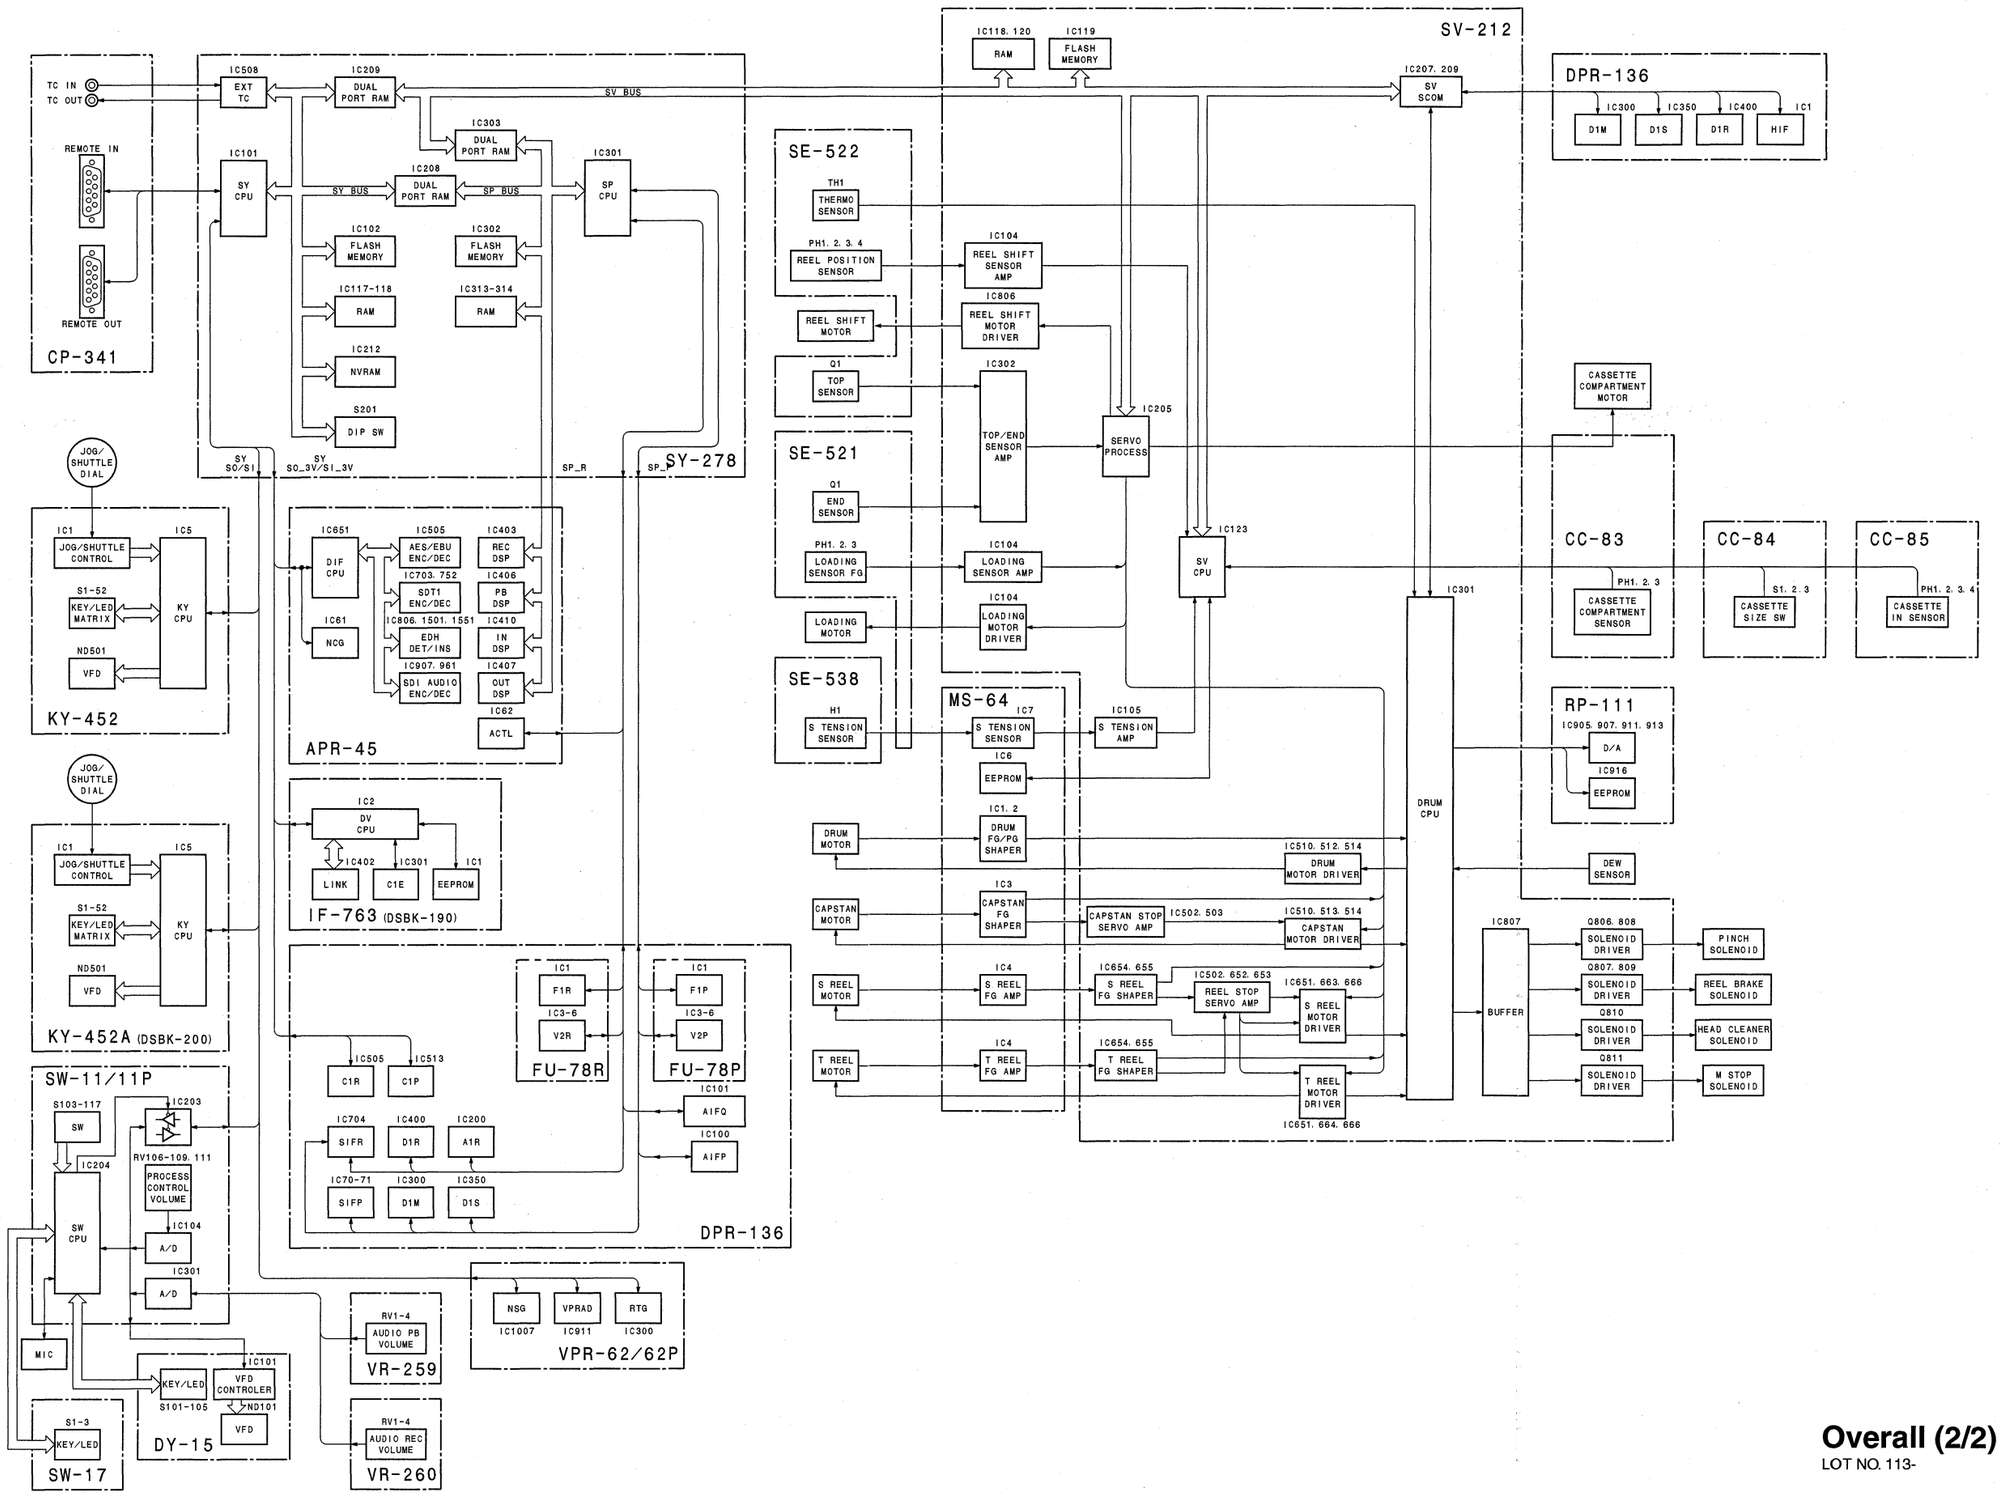

Overall (2/2)
LOT NO. 113-

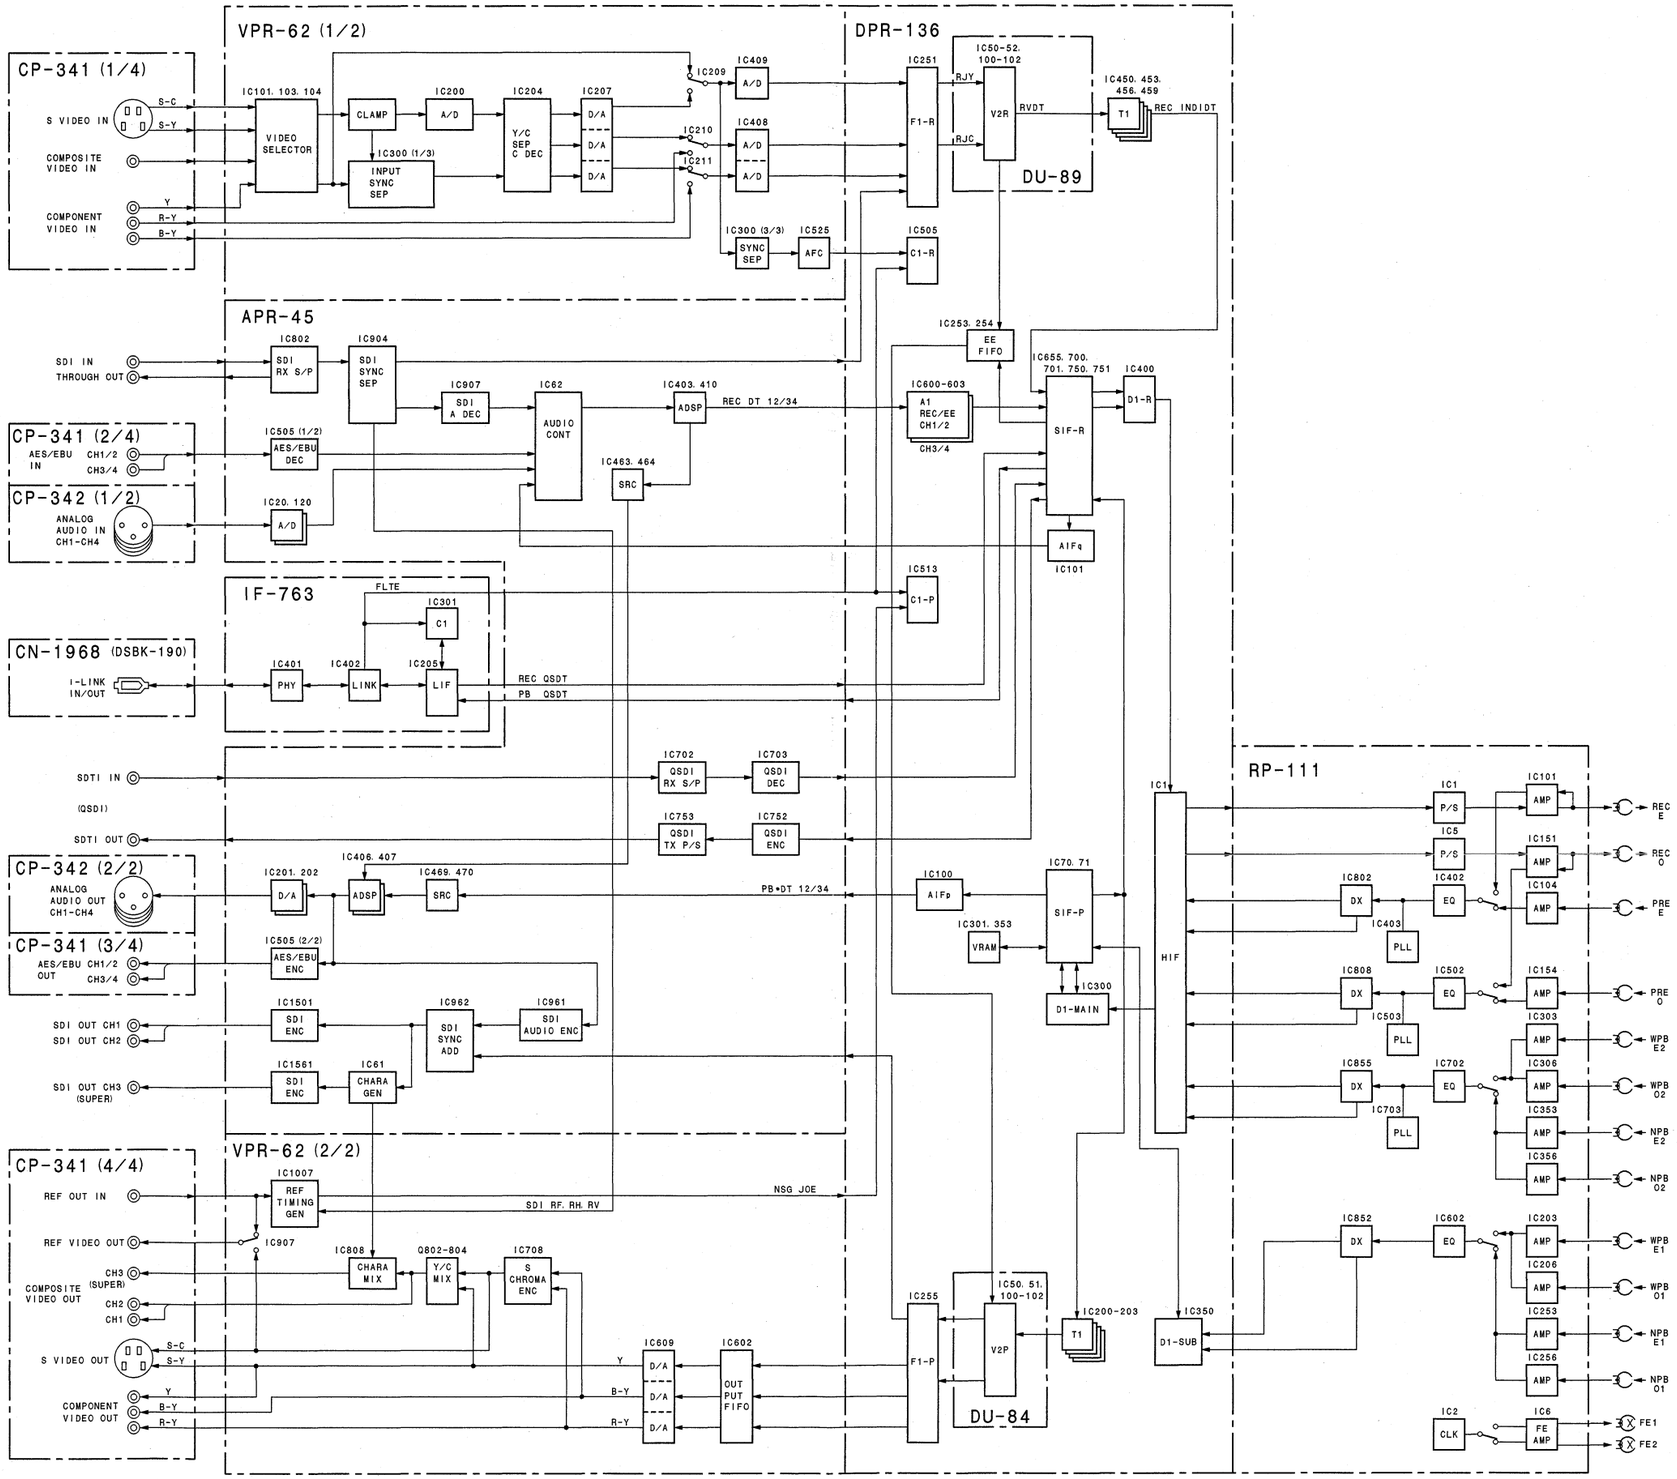

13-2 (a) 13-2 (a)

Overall (1/2)
LOT NO. 907-112

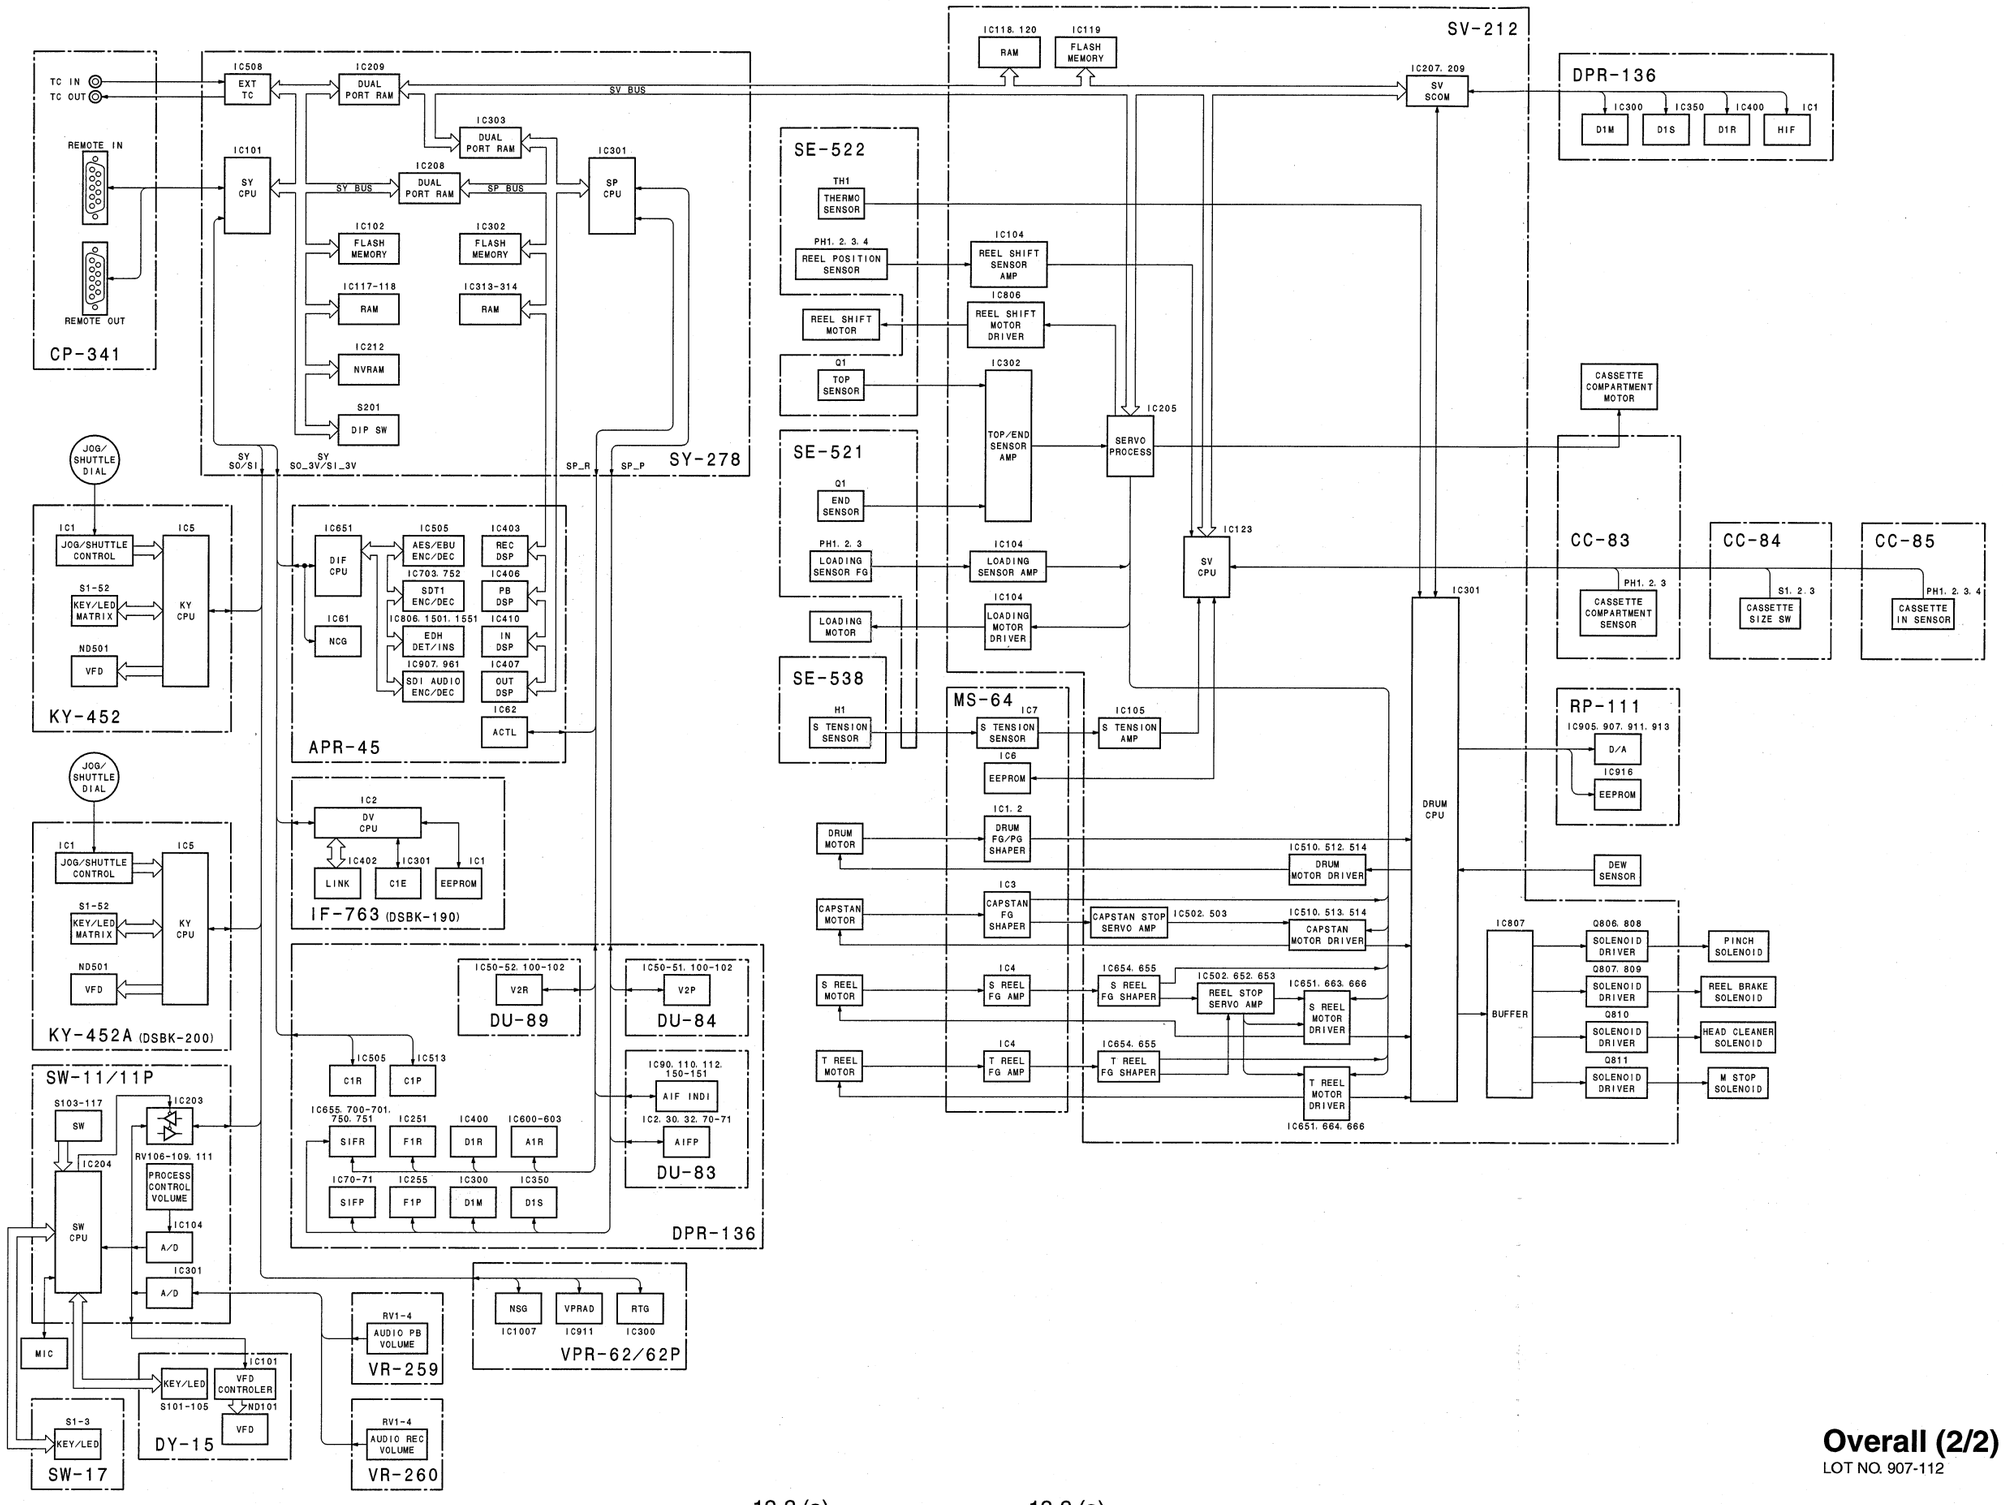

Overall (2/2)
LOT NO. 907-112

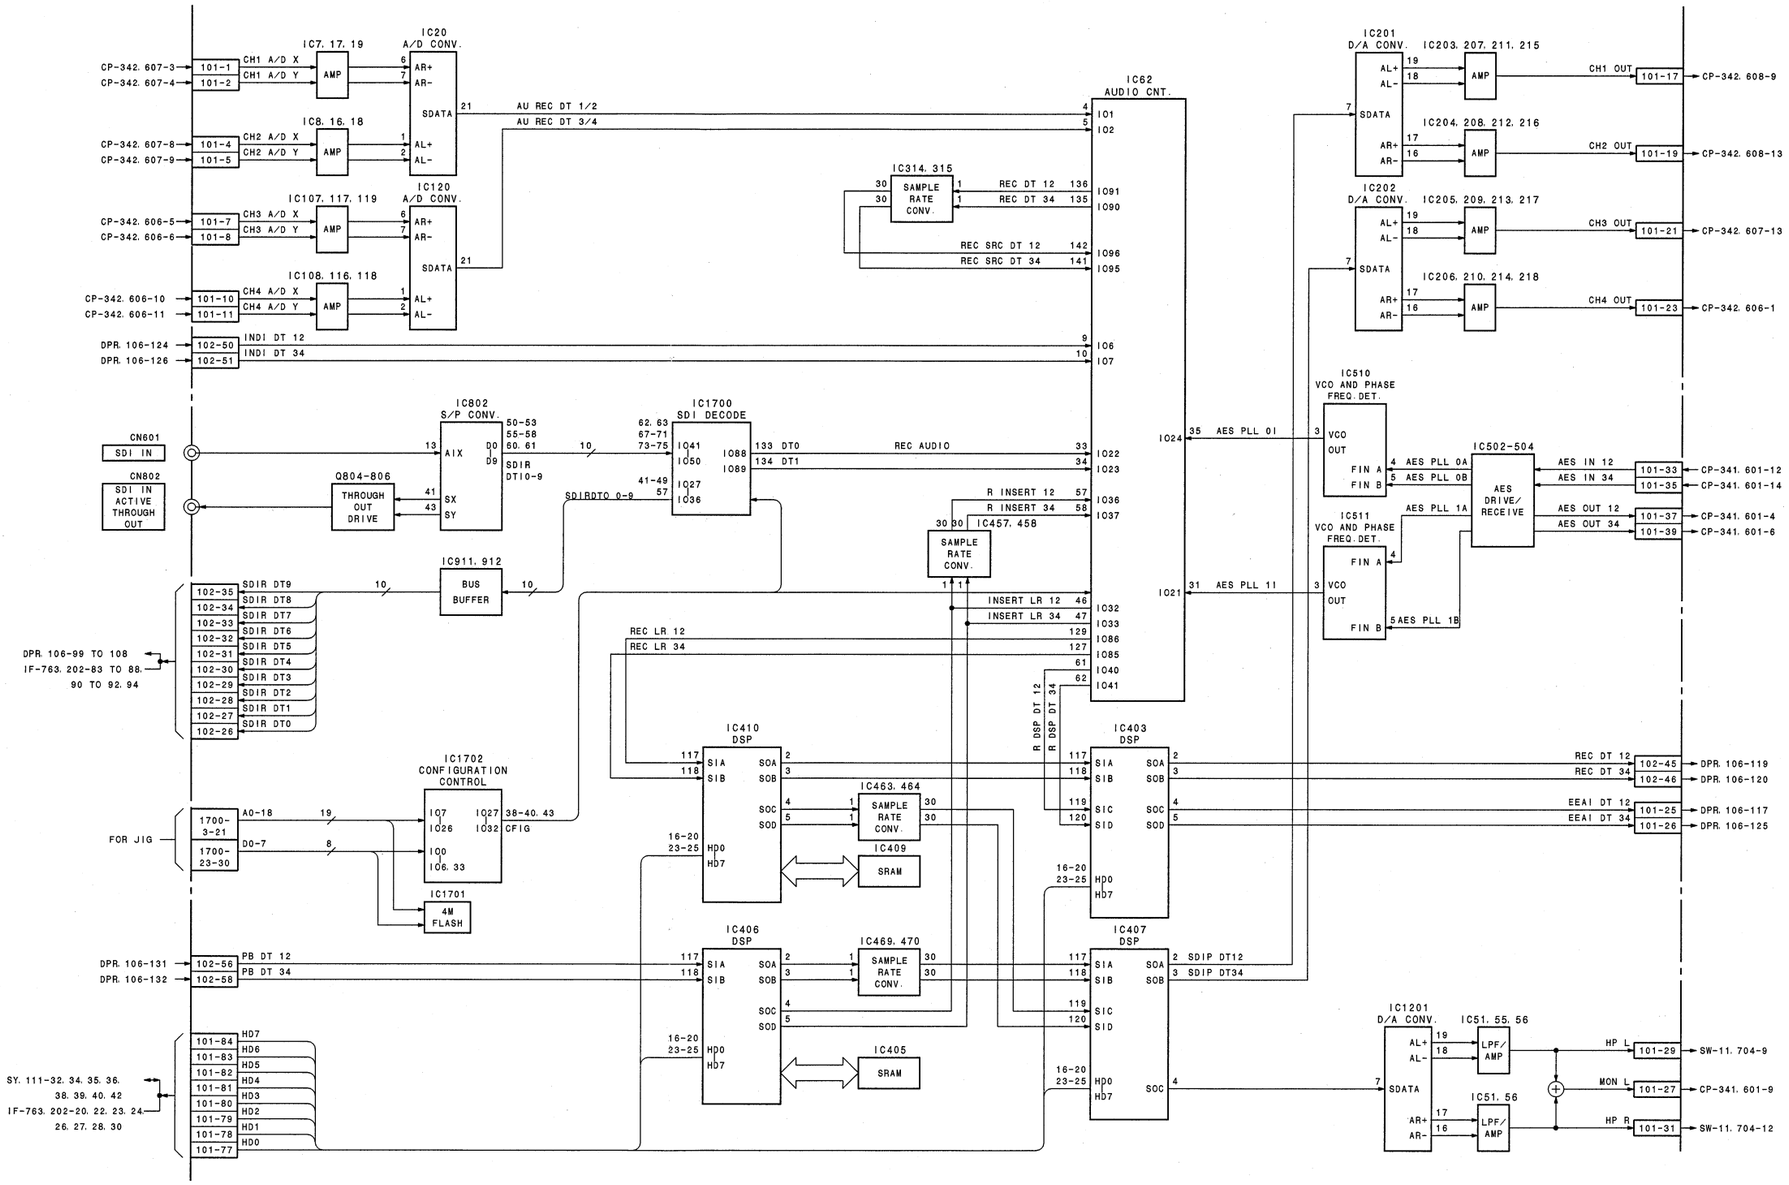
IC62
AUDIO CNT.
IC7. 17. 19
IC8. 16. 18
IC107. 117. 119
IC108. 116. 118
IC20
A/D CONV.
IC120
A/D CONV.
CH1 A/D X
CH1 A/D Y
CH2 A/D X
CH2 A/D Y
CH3 A/D X
CH3 A/D Y
CH4 A/D X
CH4 A/D Y
AMP
SDATA
AR+
AR-
AL+
AL-
CP-342. 607-3
CP-342. 607-4
CP-342. 607-8
CP-342. 607-9
CP-342. 606-5
CP-342. 606-6
CP-342. 606-10
CP-342. 606-11
AU REC DT 1/2
AU REC DT 3/4
IC314. 315
SAMPLE RATE CONV.
REC DT 12
REC DT 34
REC SRC DT 12
REC SRC DT 34
INDI DT 12
INDI DT 34
DPR. 106-124
DPR. 106-126
IC201
D/A CONV.
IC203. 207. 211. 215
IC204. 208. 212. 216
IC202
D/A CONV.
IC205. 209. 213. 217
IC206. 210. 214. 218
CH1 OUT
CH2 OUT
CH3 OUT
CH4 OUT
CP-342. 608-9
CP-342. 608-13
CP-342. 607-13
CP-342. 606-1
IC510
VCO AND PHASE FREQ. DET.
IC511
VCO AND PHASE FREQ. DET.
VCO
OUT
FIN A
FIN B
AES PLL 01
AES PLL 0A
AES PLL 0B
AES PLL 1A
AES PLL 1B
AES PLL 11
IC502-504
AES DRIVE/ RECEIVE
AES IN 12
AES IN 34
AES OUT 12
AES OUT 34
CP-341. 601-12
CP-341. 601-14
CP-341. 601-4
CP-341. 601-6
CN601
SDI IN
CN802
SDI IN ACTIVE THROUGH OUT
IC802
S/P CONV.
AIX
SDIR DTI0-9
Q804-806
THROUGH OUT DRIVE
SX
SY
IC1700
SDI DECODE
DT0
DT1
REC AUDIO
SDIRDT0 0-9
R INSERT 12
R INSERT 34
IC457. 458
SAMPLE RATE CONV.
INSERT LR 12
INSERT LR 34
REC LR 12
REC LR 34
R DSP DT 12
R DSP DT 34
IC911. 912
BUS BUFFER
SDIR DT9
SDIR DT8
SDIR DT7
SDIR DT6
SDIR DT5
SDIR DT4
SDIR DT3
SDIR DT2
SDIR DT1
SDIR DT0
DPR. 106-99 TO 108
IF-763. 202-83 TO 88. 90 TO 92. 94
IC1702
CONFIGURATION CONTROL
CFIG
FOR JIG
A0-18
D0-7
1700-3-21
1700-23-30
IC1701
4M FLASH
IC410
DSP
IC403
DSP
IC407
DSP
IC406
DSP
SIA
SIB
SIC
SID
SOA
SOB
SOC
SOD
HD0
HD7
IC453. 464
IC469. 470
IC409
IC405
SRAM
REC DT 12
REC DT 34
EEAI DT 12
EEAI DT 34
SDIP DT12
SDIP DT34
DPR. 106-119
DPR. 106-120
DPR. 106-117
DPR. 106-125
PB DT 12
PB DT 34
DPR. 106-131
DPR. 106-132
HD7
HD6
HD5
HD4
HD3
HD2
HD1
HD0
SY. 111-32. 34. 35. 36. 38. 39. 40. 42
IF-763. 202-20. 22. 23. 24. 26. 27. 28. 30
IC1201
D/A CONV.
IC51. 55. 56
IC51. 56
LPF/ AMP
HP L
MON L
HP R
SW-11. 704-9
CP-341. 601-9
SW-11. 704-12

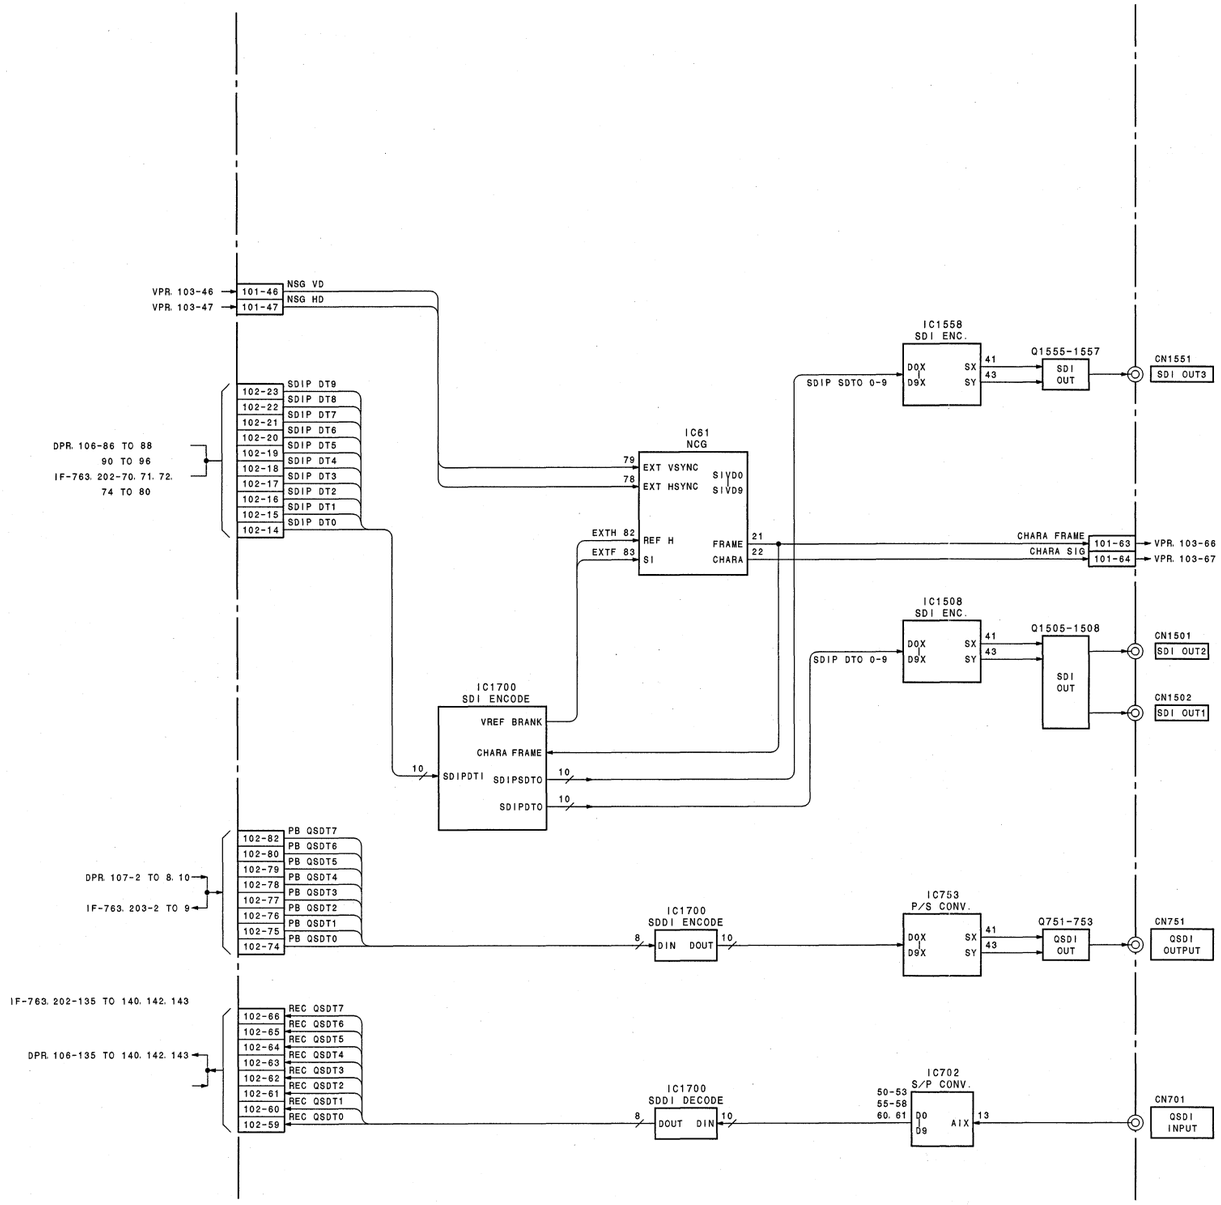

Audio process
APR-45
LOT NO. 0B2-

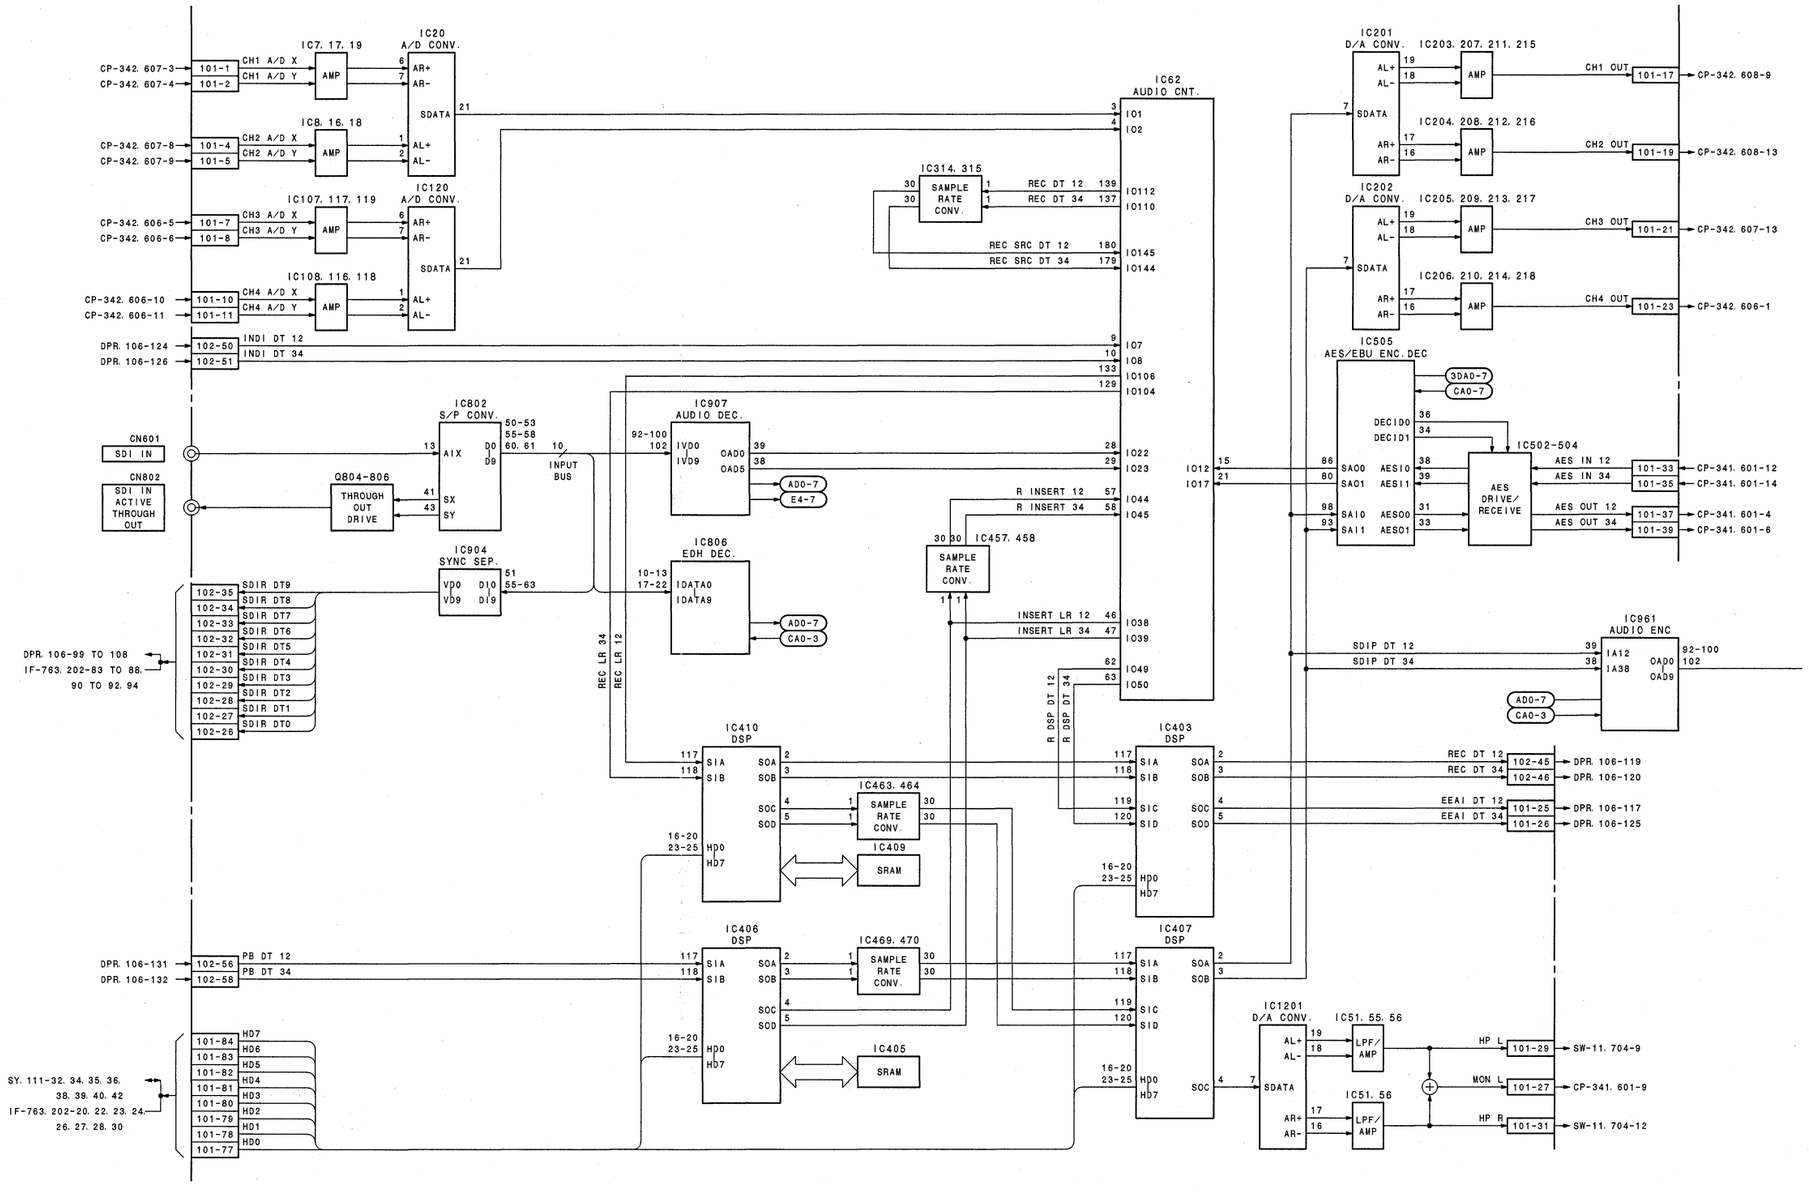
IC20 A/D CONV.
IC7. 17. 19
IC8. 16. 18
IC120 A/D CONV.
IC107. 117. 119
IC108. 116. 118
CP-342. 607-3
CP-342. 607-4
CP-342. 607-8
CP-342. 607-9
CP-342. 606-5
CP-342. 606-6
CP-342. 606-10
CP-342. 606-11
CH1 A/D X
CH1 A/D Y
CH2 A/D X
CH2 A/D Y
CH3 A/D X
CH3 A/D Y
CH4 A/D X
CH4 A/D Y
AMP
AR+
AR-
AL+
AL-
SDATA
DPR. 106-124
DPR. 106-126
INDI DT 12
INDI DT 34
IC62 AUDIO CNT.
IC314. 315
SAMPLE RATE CONV.
REC DT 12
REC DT 34
REC SRC DT 12
REC SRC DT 34
IC201 D/A CONV.
IC203. 207. 211. 215
IC204. 208. 212. 216
IC202 D/A CONV.
IC205. 209. 213. 217
IC206. 210. 214. 218
CH1 OUT
CH2 OUT
CH3 OUT
CH4 OUT
CP-342. 608-9
CP-342. 608-13
CP-342. 607-13
CP-342. 606-1
IC505 AES/EBU ENC. DEC
3DA0-7
CA0-7
DECID0
DECID1
IC502-504
AES DRIVE/ RECEIVE
SAO0
SAO1
SAI0
SAI1
AESI0
AESI1
AESO0
AESO1
AES IN 12
AES IN 34
AES OUT 12
AES OUT 34
CP-341. 601-12
CP-341. 601-14
CP-341. 601-4
CP-341. 601-6
CN601 SDI IN
CN802 SDI IN ACTIVE THROUGH OUT
IC802 S/P CONV.
Q804-806 THROUGH OUT DRIVE
INPUT BUS
IC907 AUDIO DEC.
AD0-7
E4-7
IC806 EDH DEC.
IC904 SYNC SEP.
SDIR DT9
SDIR DT8
SDIR DT7
SDIR DT6
SDIR DT5
SDIR DT4
SDIR DT3
SDIR DT2
SDIR DT1
SDIR DT0
DPR. 106-99 TO 108
IF-763. 202-83 TO 88. 90 TO 92. 94
REC LR 34
REC LR 12
IC457. 458 SAMPLE RATE CONV.
R INSERT 12
R INSERT 34
INSERT LR 12
INSERT LR 34
R DSP DT 12
R DSP DT 34
IC961 AUDIO ENC
SDIP DT 12
SDIP DT 34
IC410 DSP
IC403 DSP
IC463. 464 SAMPLE RATE CONV.
IC409 SRAM
REC DT 12
REC DT 34
EEAI DT 12
EEAI DT 34
DPR. 106-119
DPR. 106-120
DPR. 106-117
DPR. 106-125
IC406 DSP
IC407 DSP
IC469. 470 SAMPLE RATE CONV.
IC405 SRAM
PB DT 12
PB DT 34
DPR. 106-131
DPR. 106-132
HD7
HD6
HD5
HD4
HD3
HD2
HD1
HD0
SY. 111-32. 34. 35. 36. 38. 39. 40. 42
IF-763. 202-20. 22. 23. 24. 26. 27. 28. 30
IC1201 D/A CONV.
IC51. 55. 56 LPF/ AMP
IC51. 56 LPF/ AMP
HP L
MON L
HP R
SW-11. 704-9
CP-341. 601-9
SW-11. 704-12

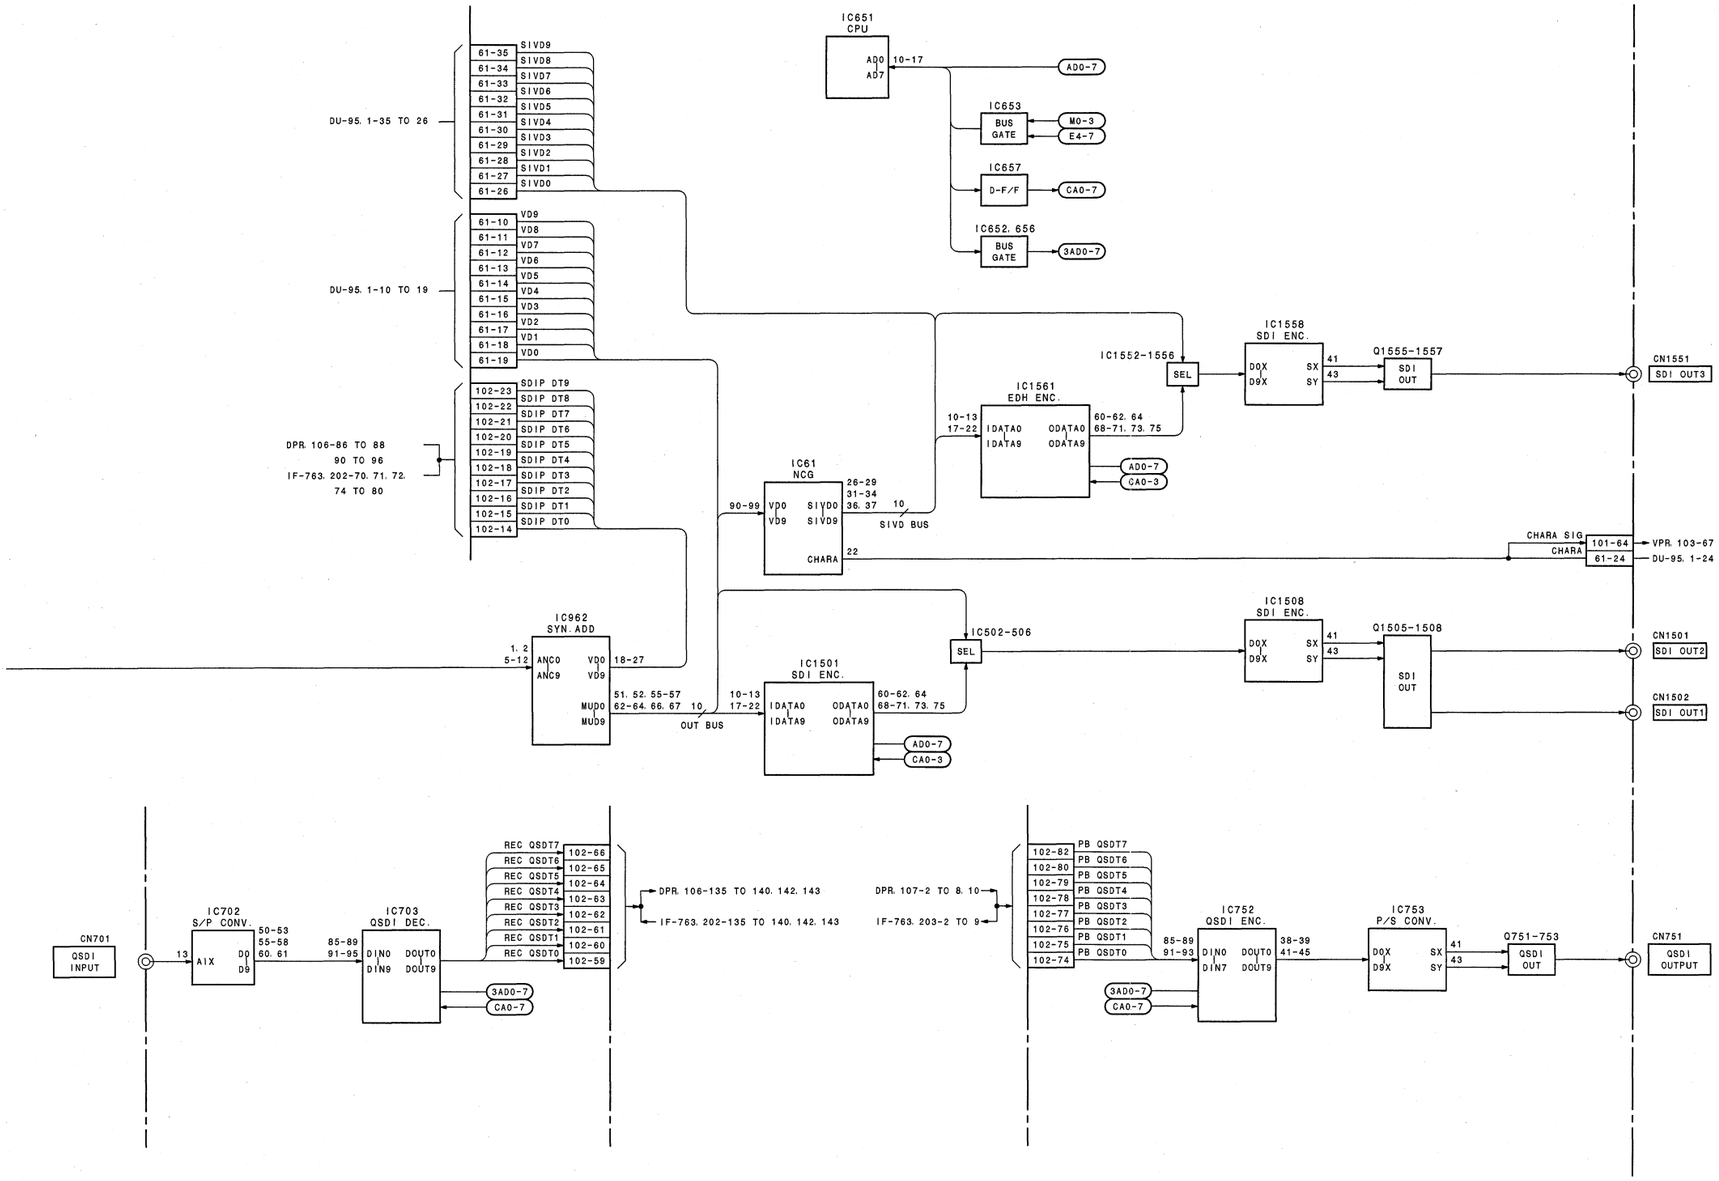

Audio process
APR-45
LOT NO. 907-0B1

DPR-136 (1/4)

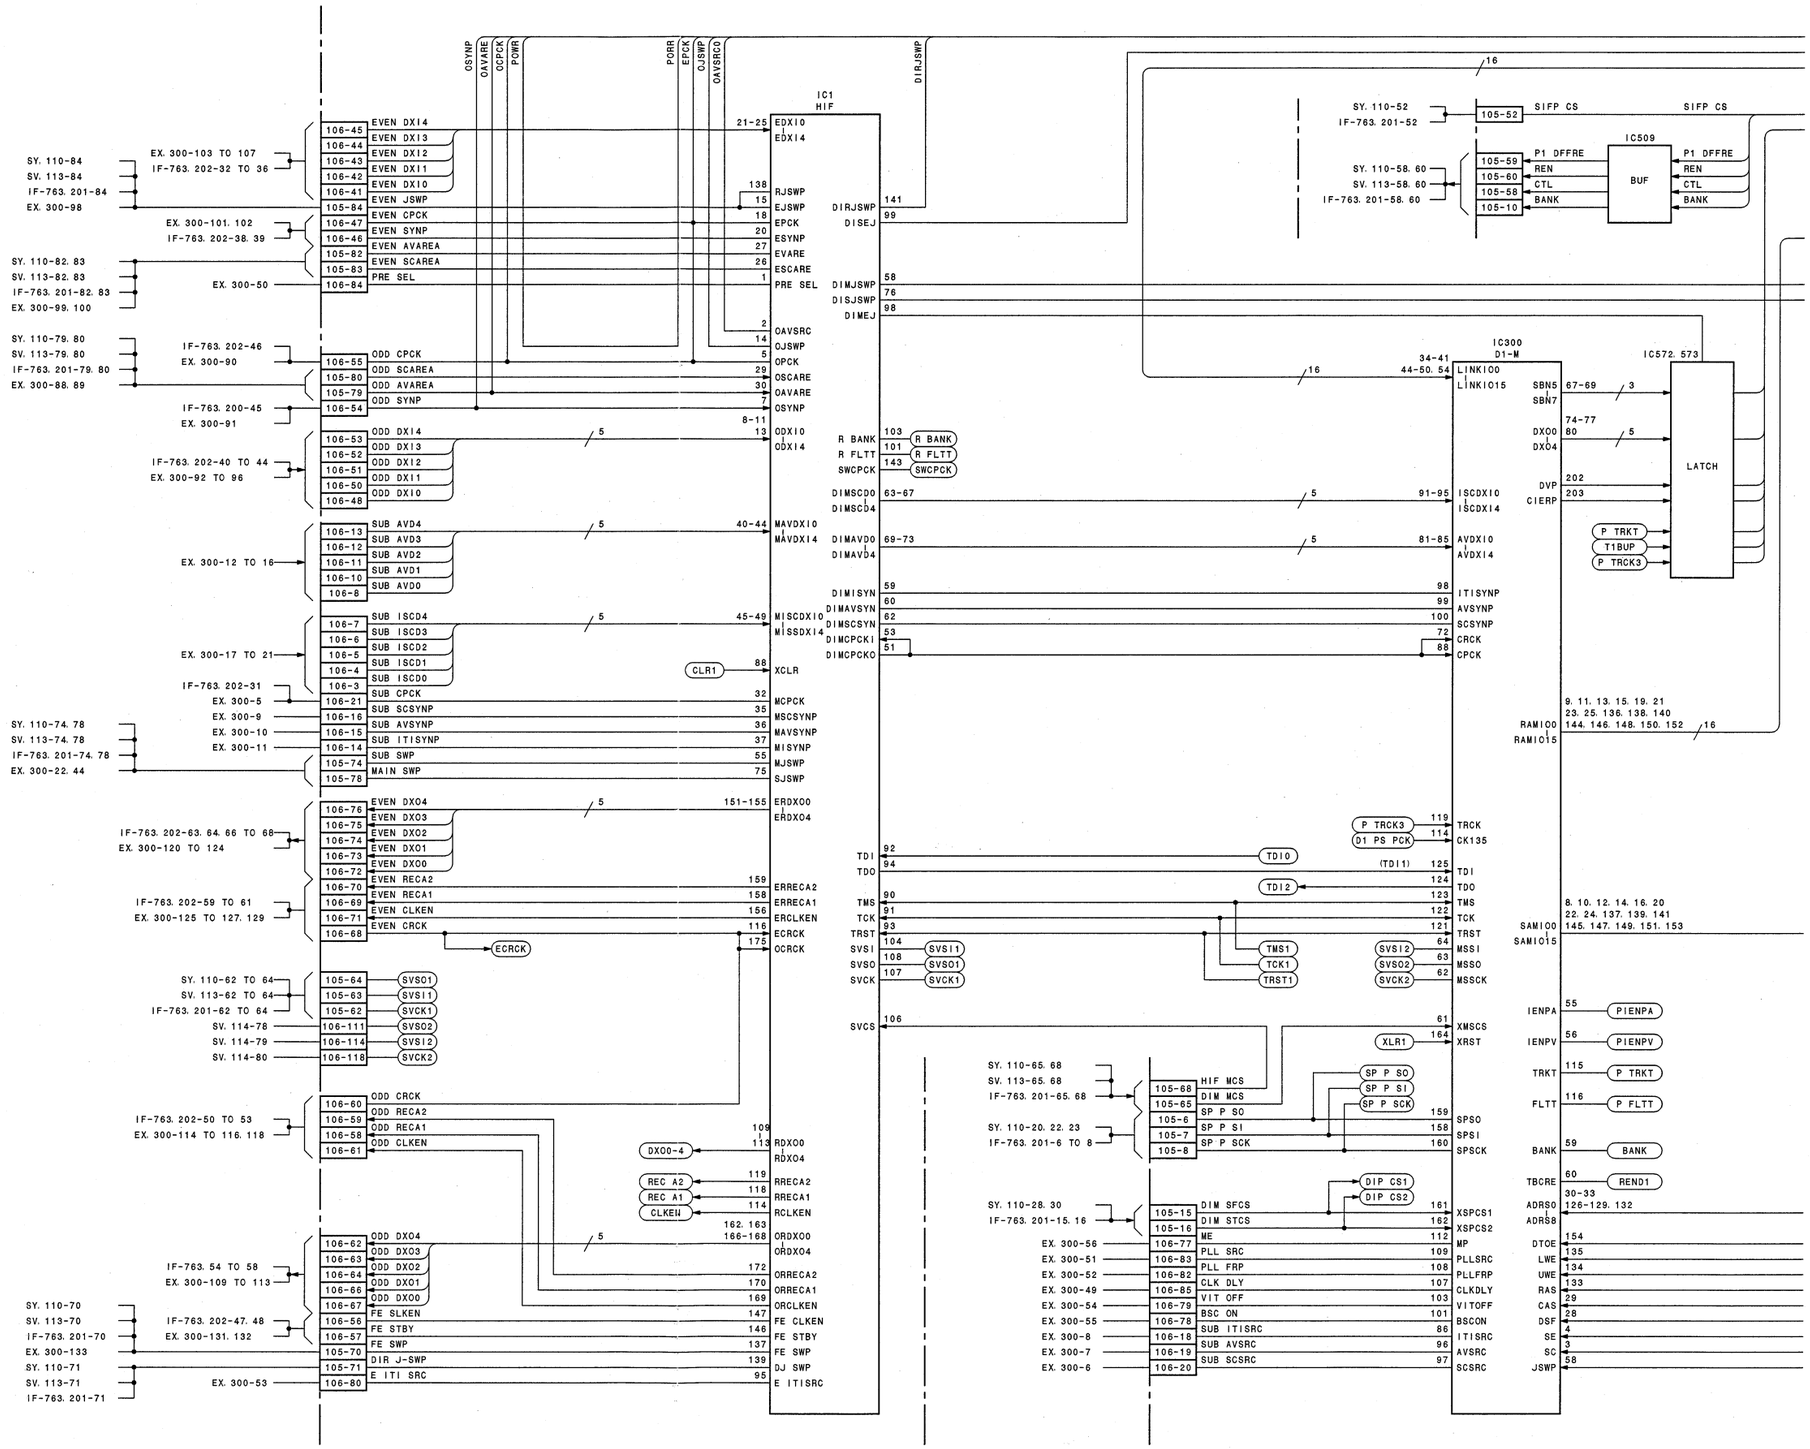

13-6 (b)

DPR-136 (1/4)

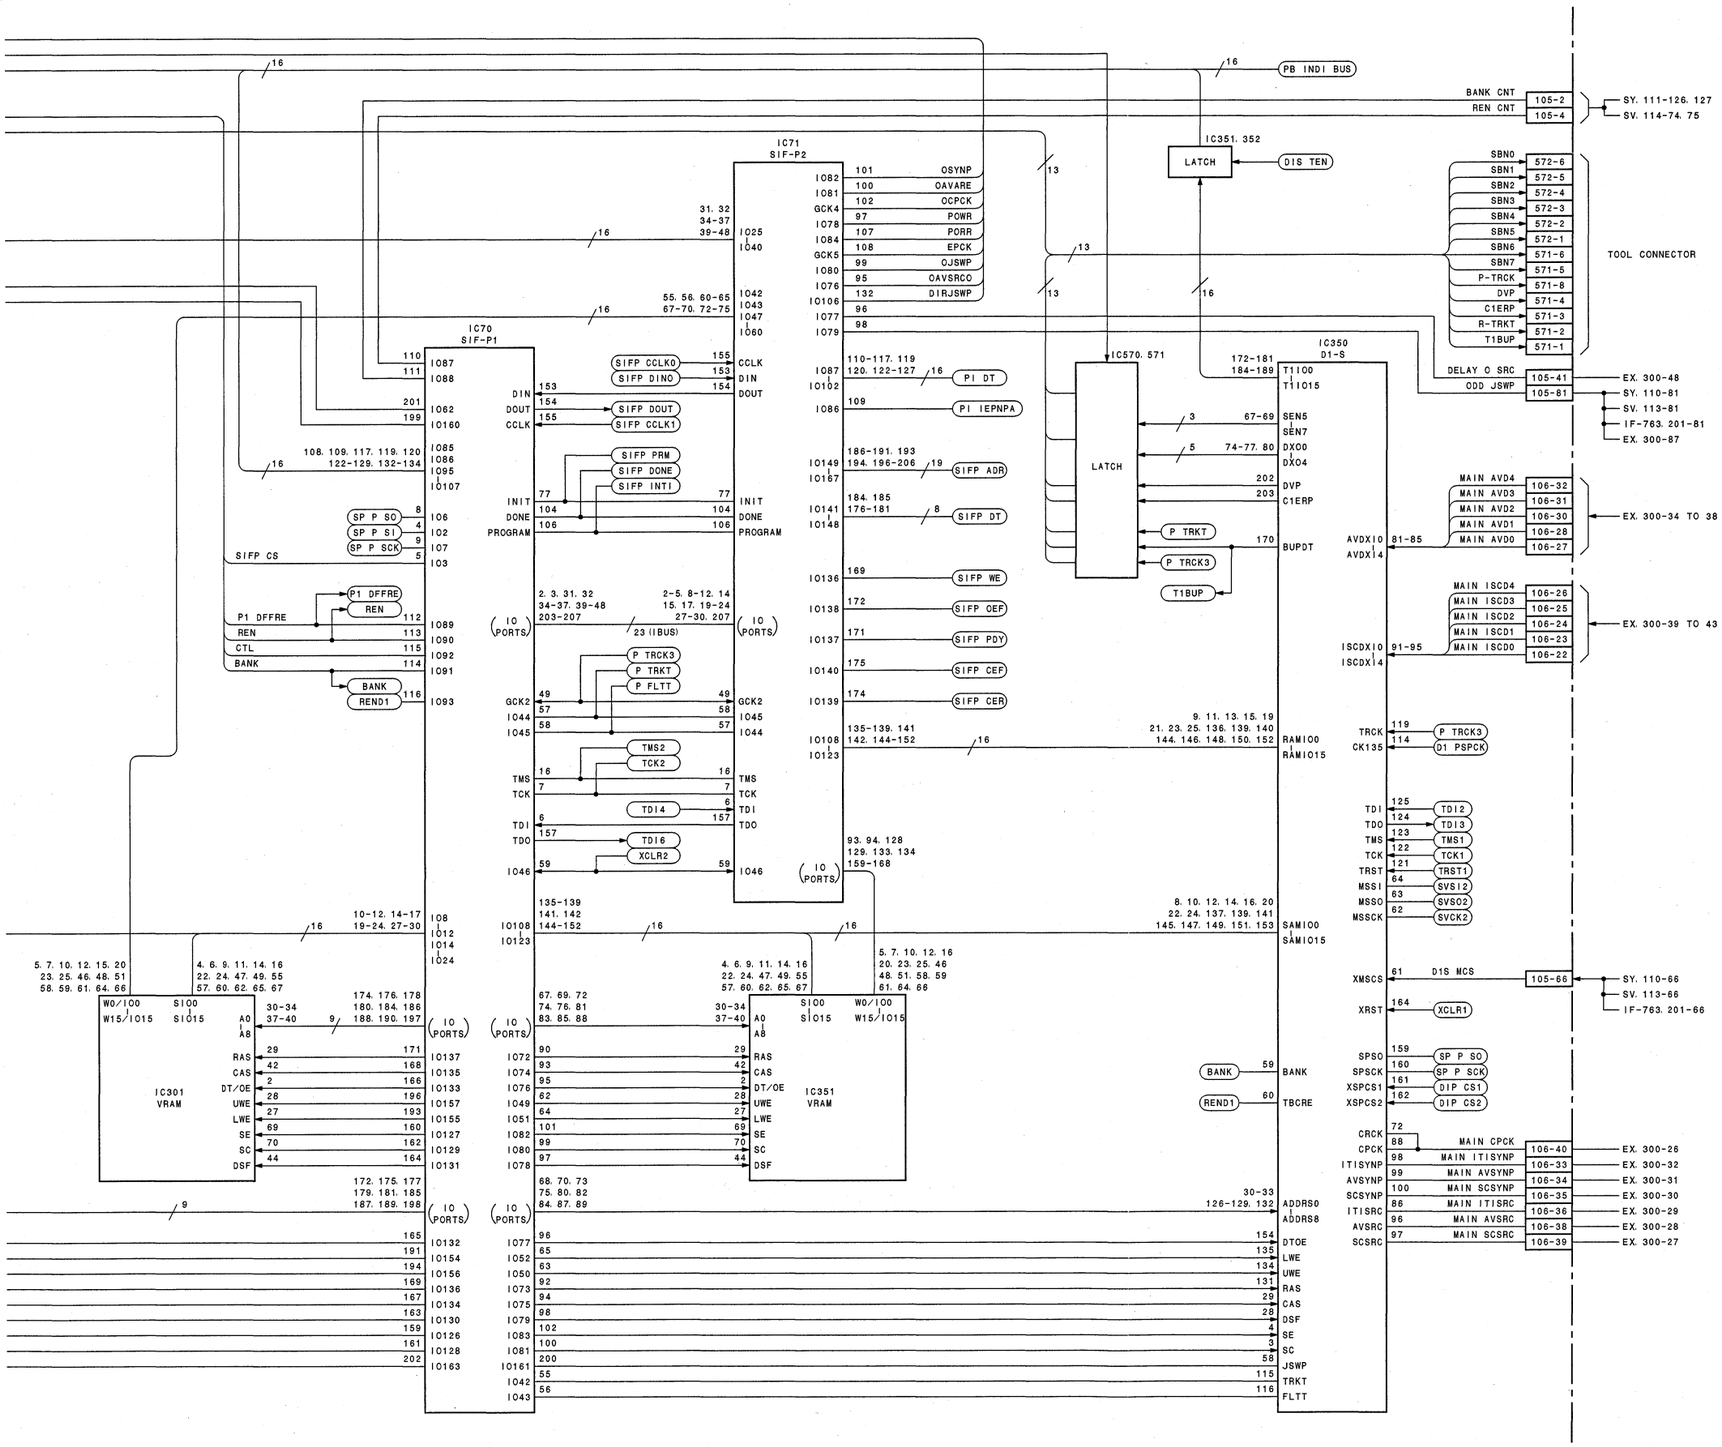

Digital process

DPR-136 (1/4)

LOT NO. 113-

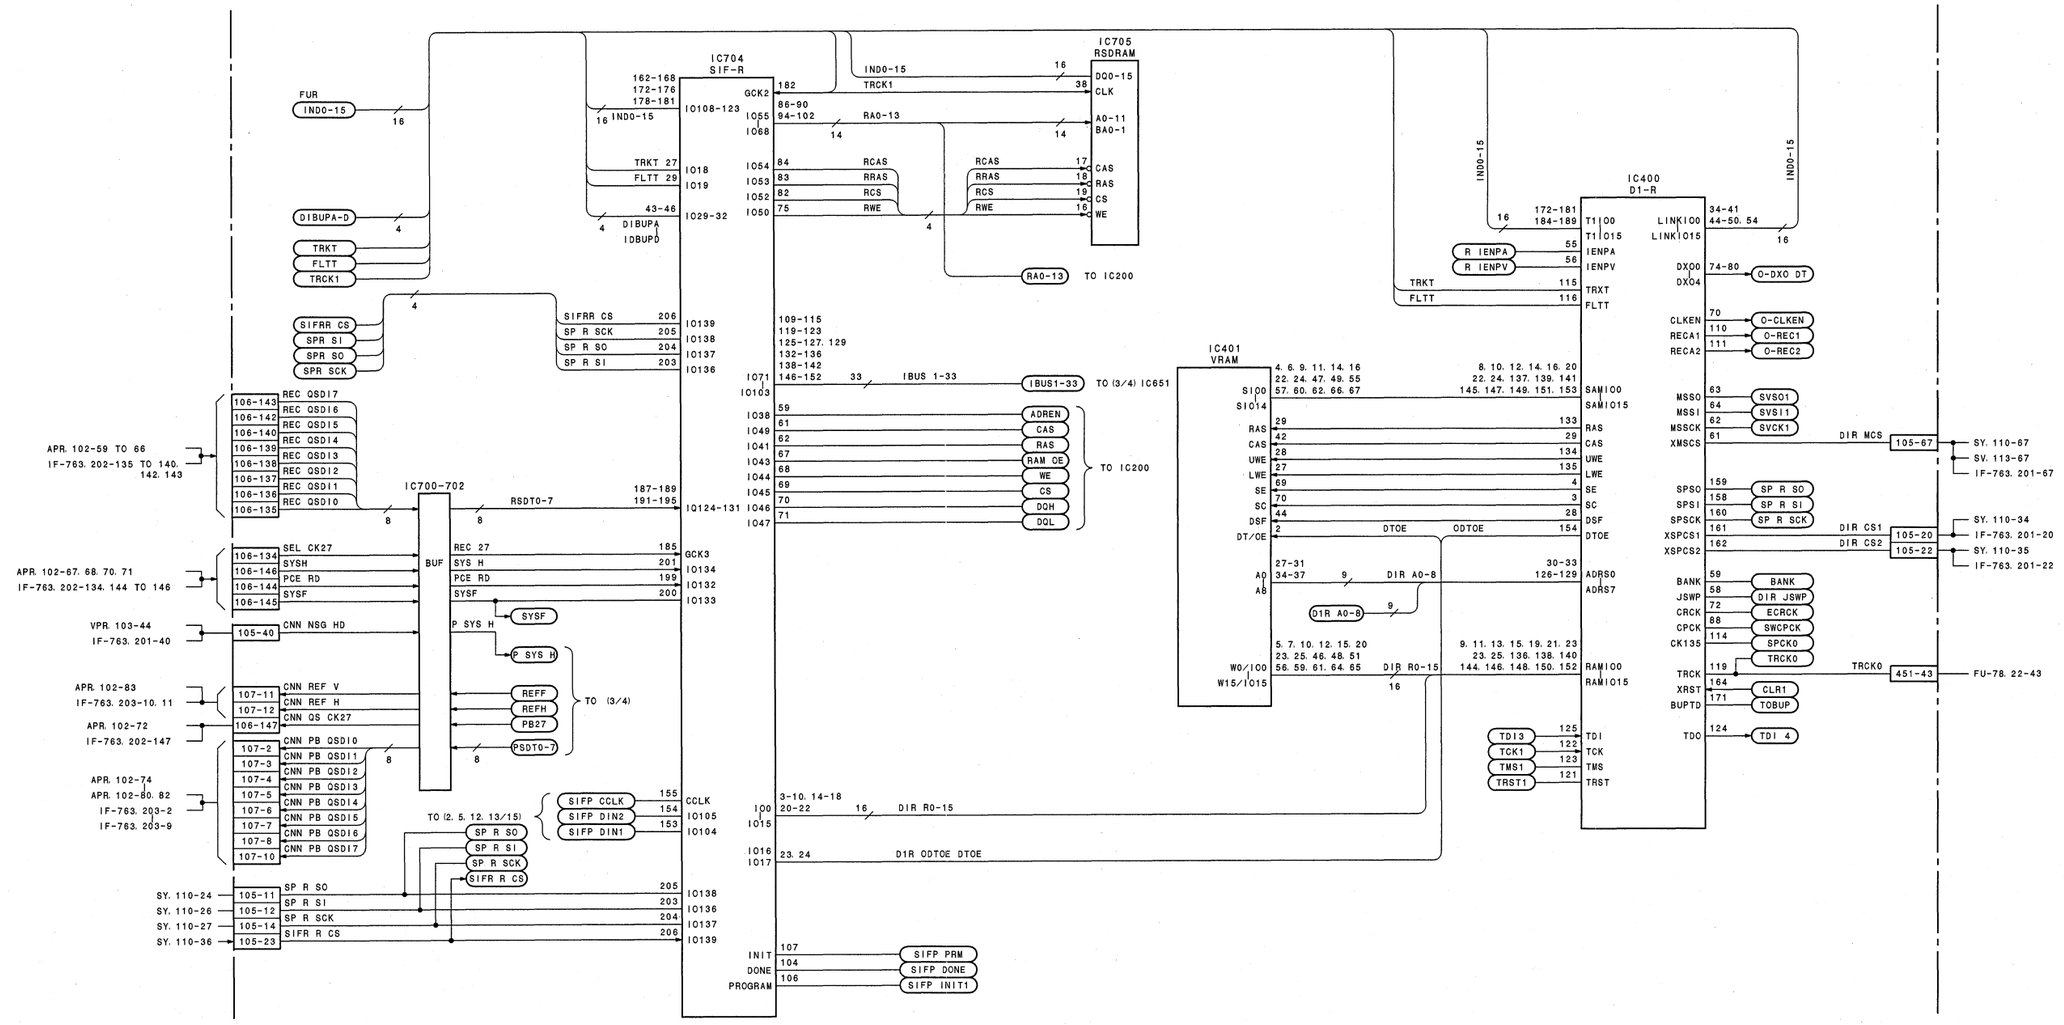

Digital process
DPR-136 (2/4)
LOT NO. 113-

DPR-136 (3/4)

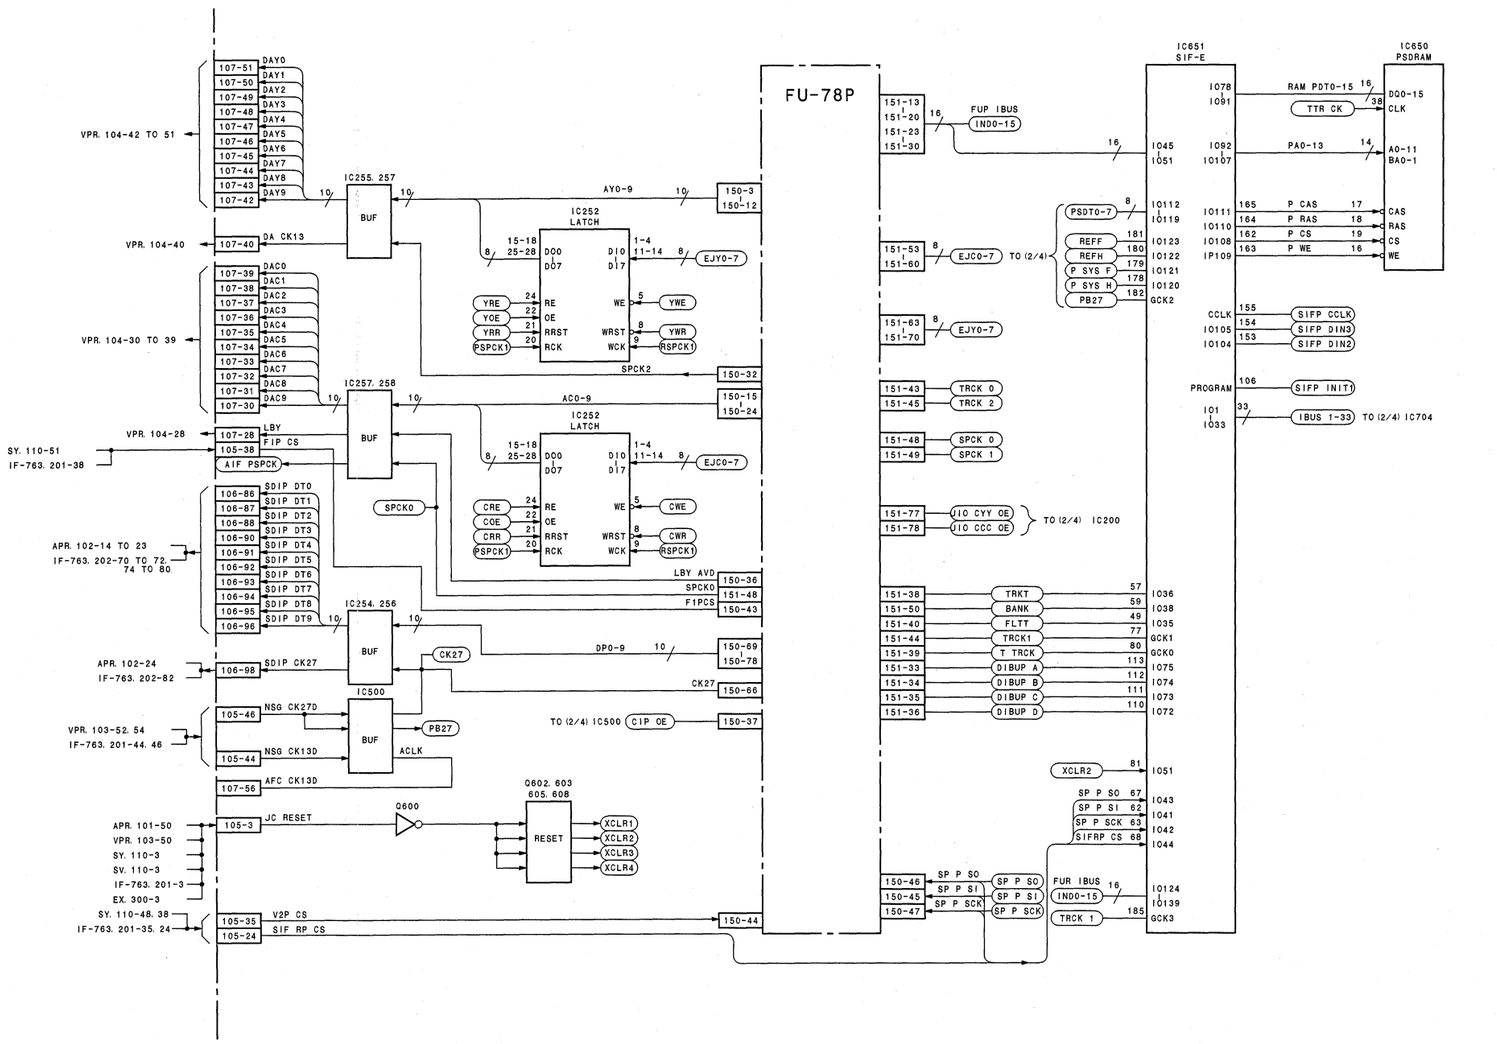

13-10 (b)

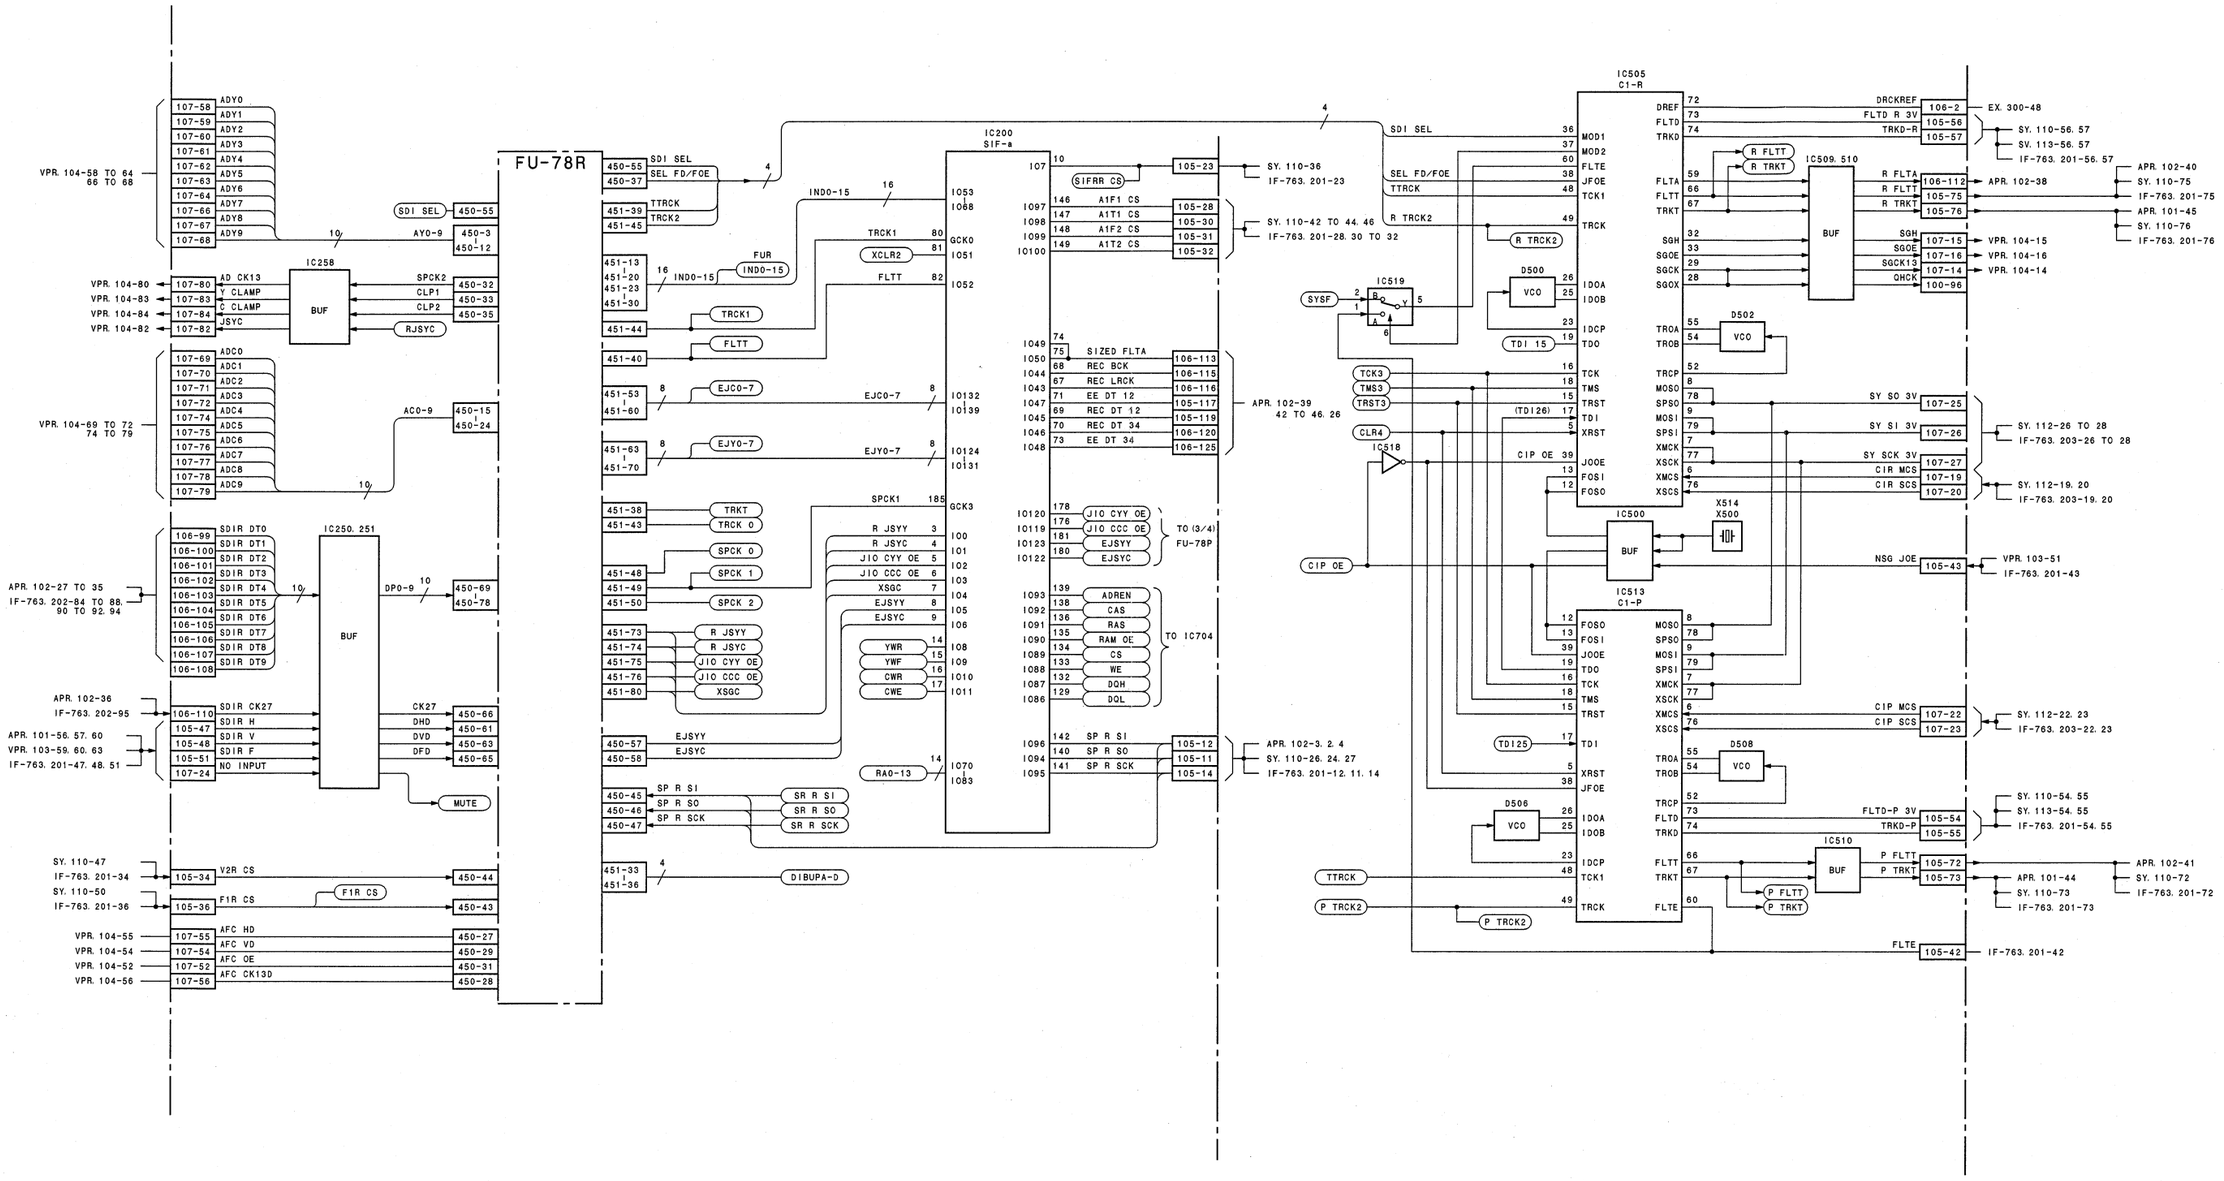

Digital process

DPR-136 (3/4)

LOT NO. 113-

DPR-136 (4/4)

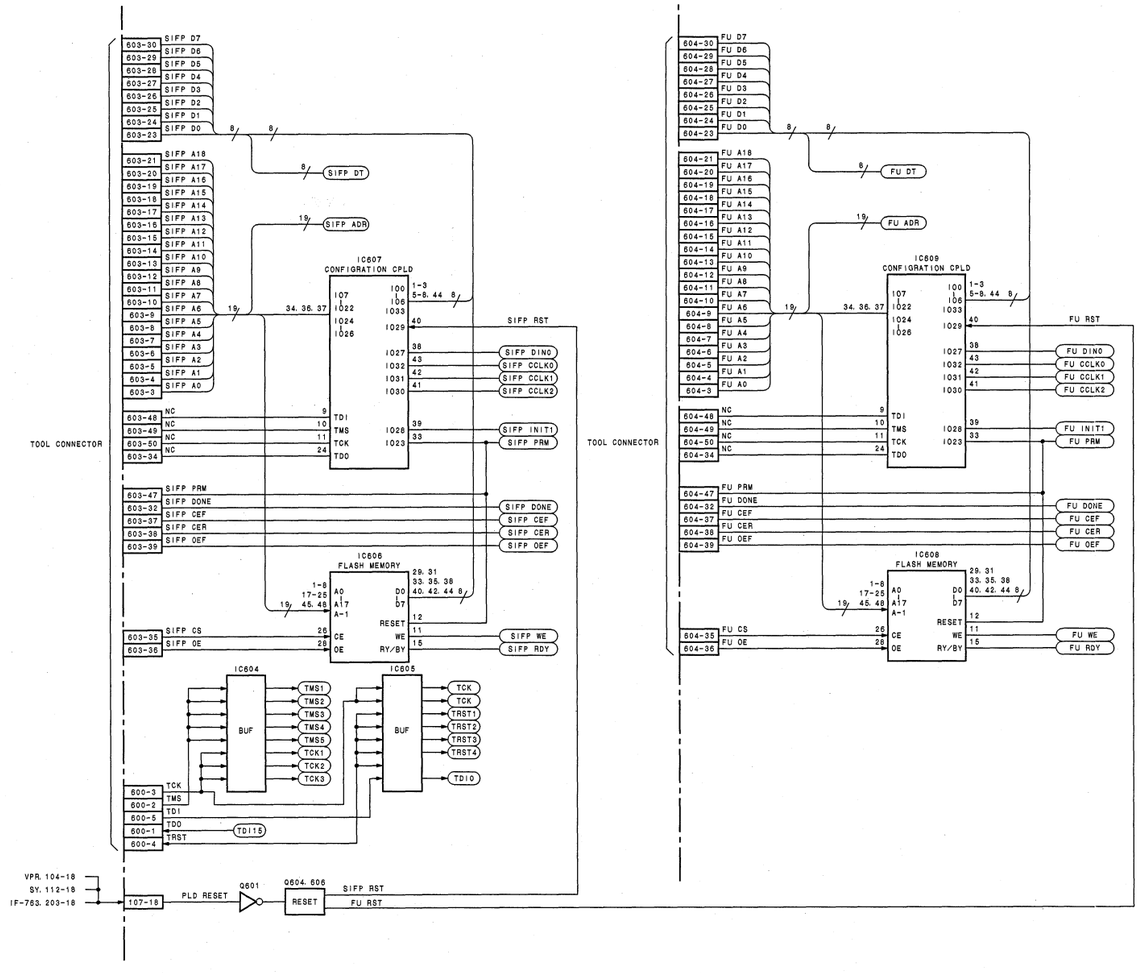
TOOL CONNECTOR
SIFP D7
SIFP D6
SIFP D5
SIFP D4
SIFP D3
SIFP D2
SIFP D1
SIFP D0
SIFP DT
SIFP ADR
IC607
CONFIGRATION CPLD
SIFP RST
SIFP DINO
SIFP CCLK0
SIFP CCLK1
SIFP CCLK2
SIFP INIT1
SIFP PRM
SIFP PRW
SIFP DONE
SIFP CEF
SIFP CER
SIFP OEF
IC606
FLASH MEMORY
SIFP CS
SIFP OE
SIFP WE
SIFP RDY
IC604
IC605
BUF
TMS1
TMS2
TMS3
TMS4
TMS5
TCK1
TCK2
TCK3
TCK
TMS
TDI
TDO
TRST
TRST1
TRST2
TRST3
TRST4
TDI0
TDI15
VPR. 104-18
SY. 112-18
IF-763. 203-18
PLD RESET
Q601
Q604. 606
RESET
SIFP RST
FU RST
TOOL CONNECTOR
FU D7
FU D6
FU D5
FU D4
FU D3
FU D2
FU D1
FU D0
FU DT
FU ADR
IC609
CONFIGRATION CPLD
FU RST
FU DINO
FU CCLK0
FU CCLK1
FU CCLK2
FU INIT1
FU PRM
FU PRW
FU DONE
FU CEF
FU CER
FU OEF
IC608
FLASH MEMORY
FU CS
FU OE
FU WE
FU RDY

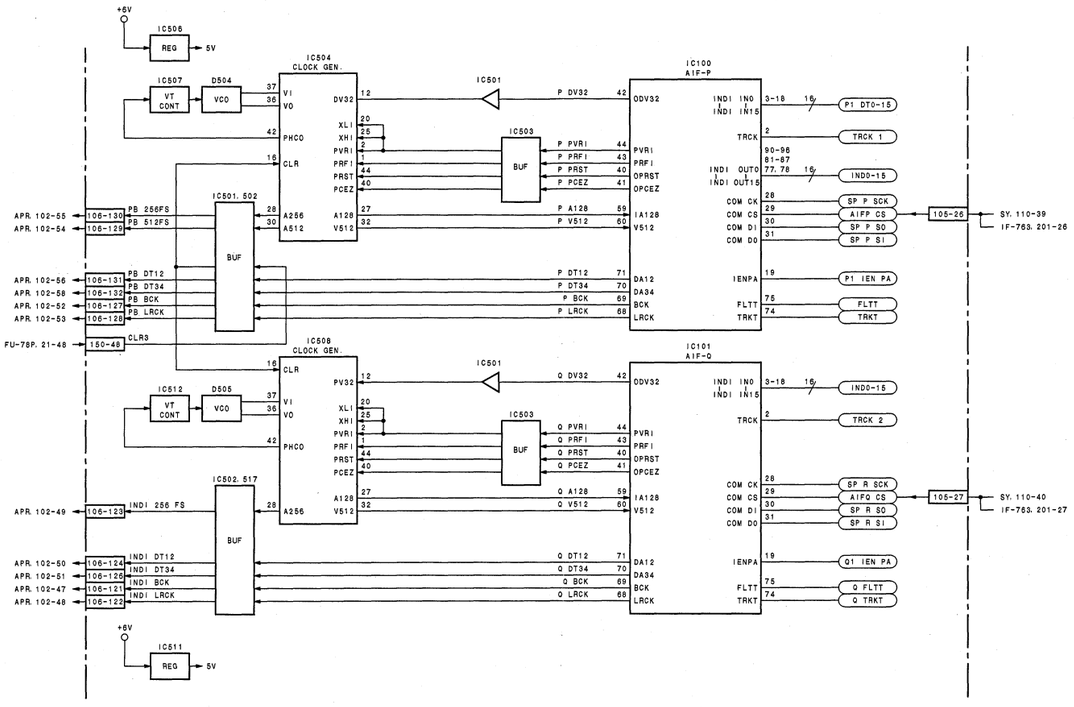
+6V
IC506
REG
5V
IC504
CLOCK GEN.
IC507
VT CONT
D504
VCO
IC501
IC503
BUF
IC100
A1F-P
P DV32
P PVRI
P PRFI
P PRST
P PCEZ
P A128
P V512
P DT12
P DT34
P BCK
P LRCK
P1 DT0-15
TRCK 1
IND0-15
SP P SCK
AIFP CS
SP P SO
SP P SI
SY. 110-39
IF-763. 201-26
P1 IEN PA
FLTT
TRKT
IC501. 502
IC508
CLOCK GEN.
IC512
D505
IC502. 517
IC101
A1F-Q
Q DV32
Q PVRI
Q PRFI
Q PRST
Q PCEZ
Q A128
Q V512
Q DT12
Q DT34
Q BCK
Q LRCK
TRCK 2
SP R SCK
AIFQ CS
SP R SO
SP R SI
SY. 110-40
IF-763. 201-27
Q1 IEN PA
Q FLTT
Q TRKT
IC511
APR. 102-55
APR. 102-54
APR. 102-56
APR. 102-58
APR. 102-52
APR. 102-53
FU-78P. 21-48
APR. 102-49
APR. 102-50
APR. 102-51
APR. 102-47
APR. 102-48
PB 256FS
PB 512FS
PB DT12
PB DT34
PB BCK
PB LRCK
CLR3
INDI 256 FS
INDI DT12
INDI DT34
INDI BCK
INDI LRCK

DPR-136 (1/4)

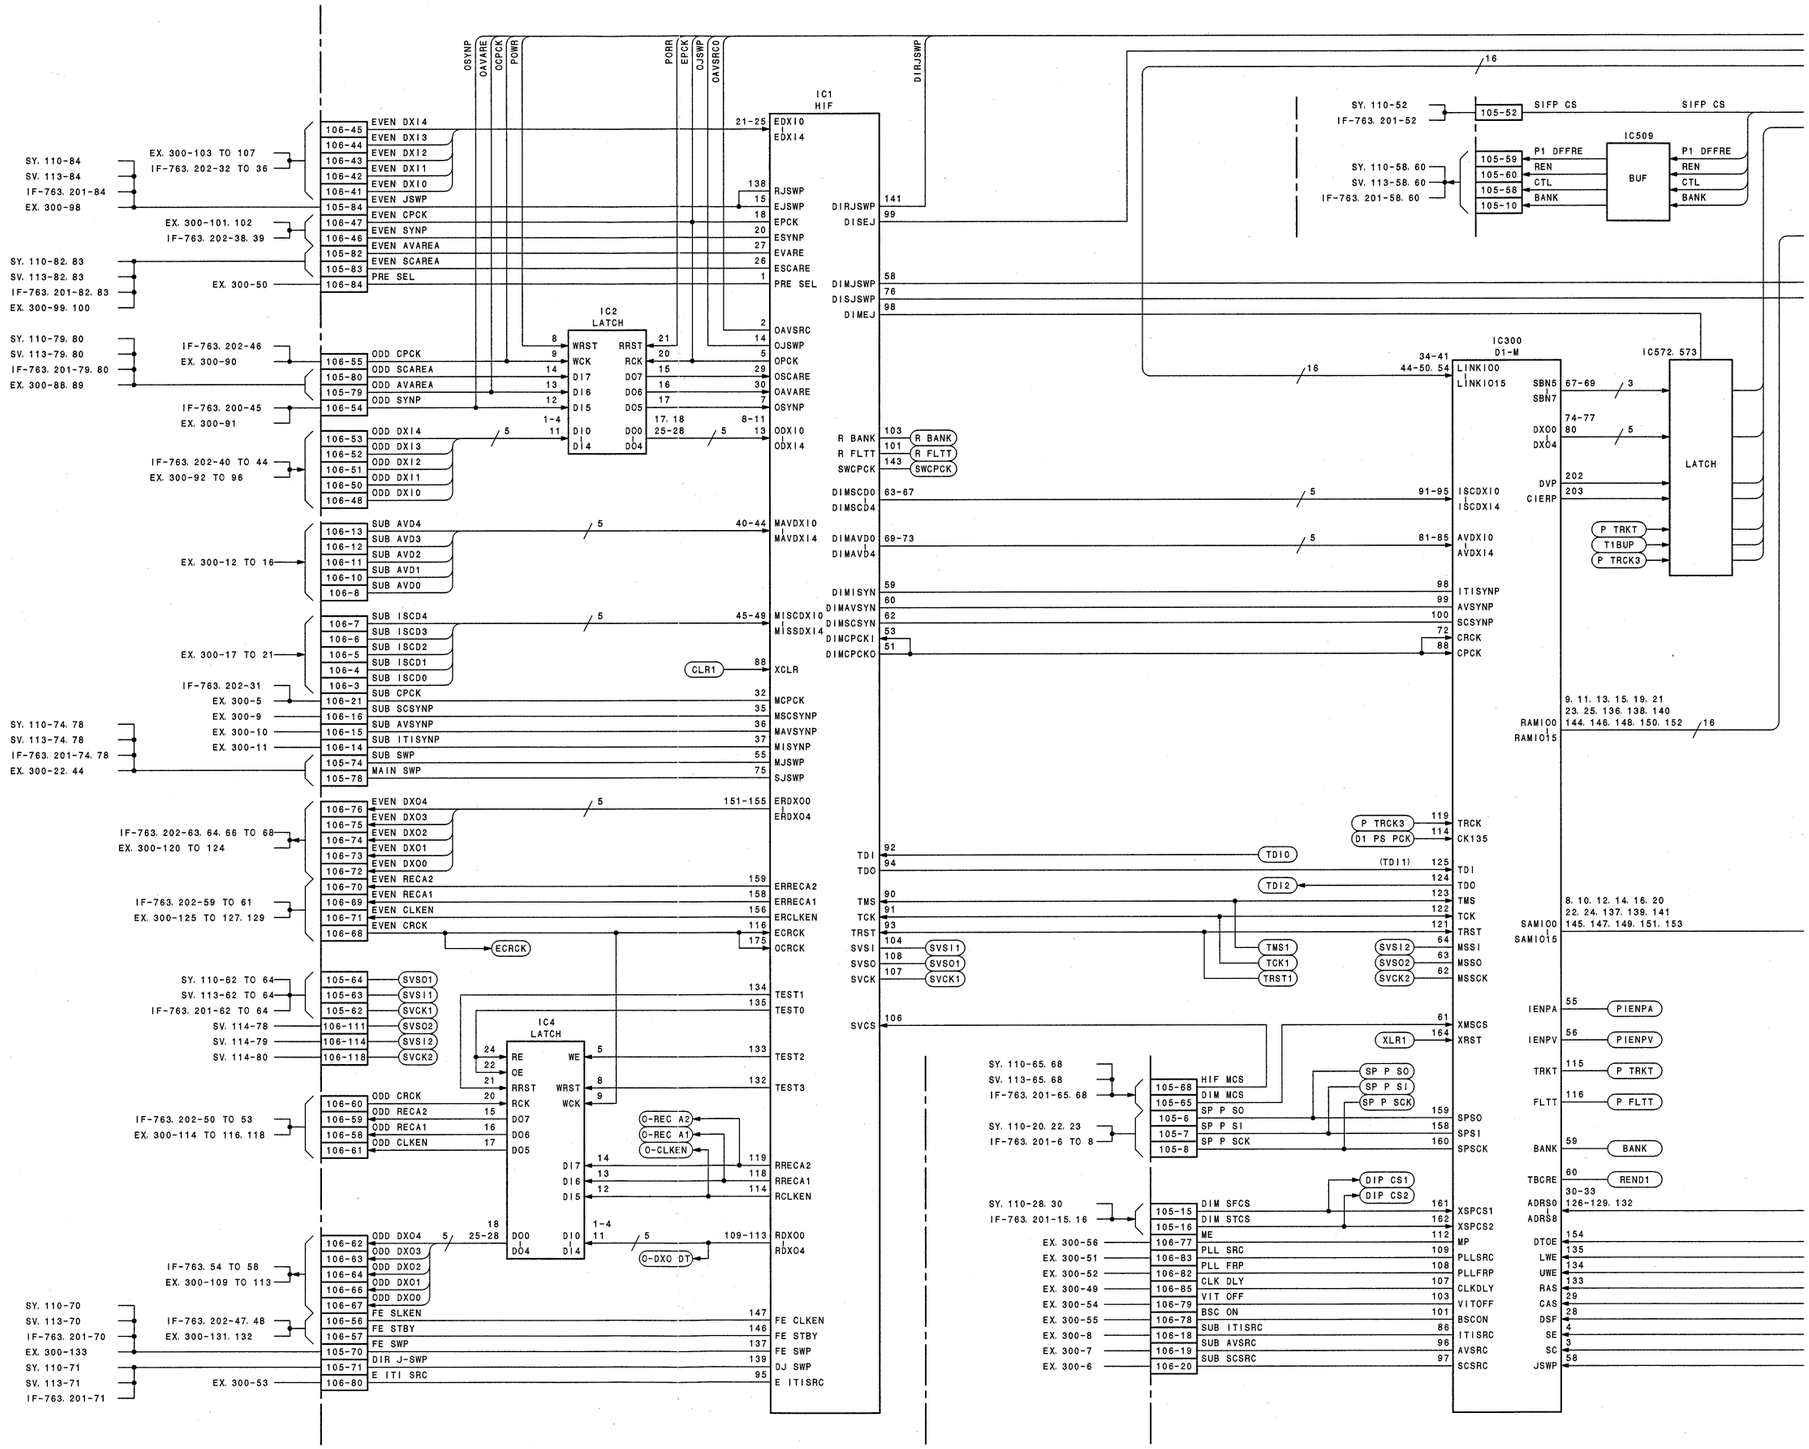

13-6 (a)

DPR-136 (1/4)

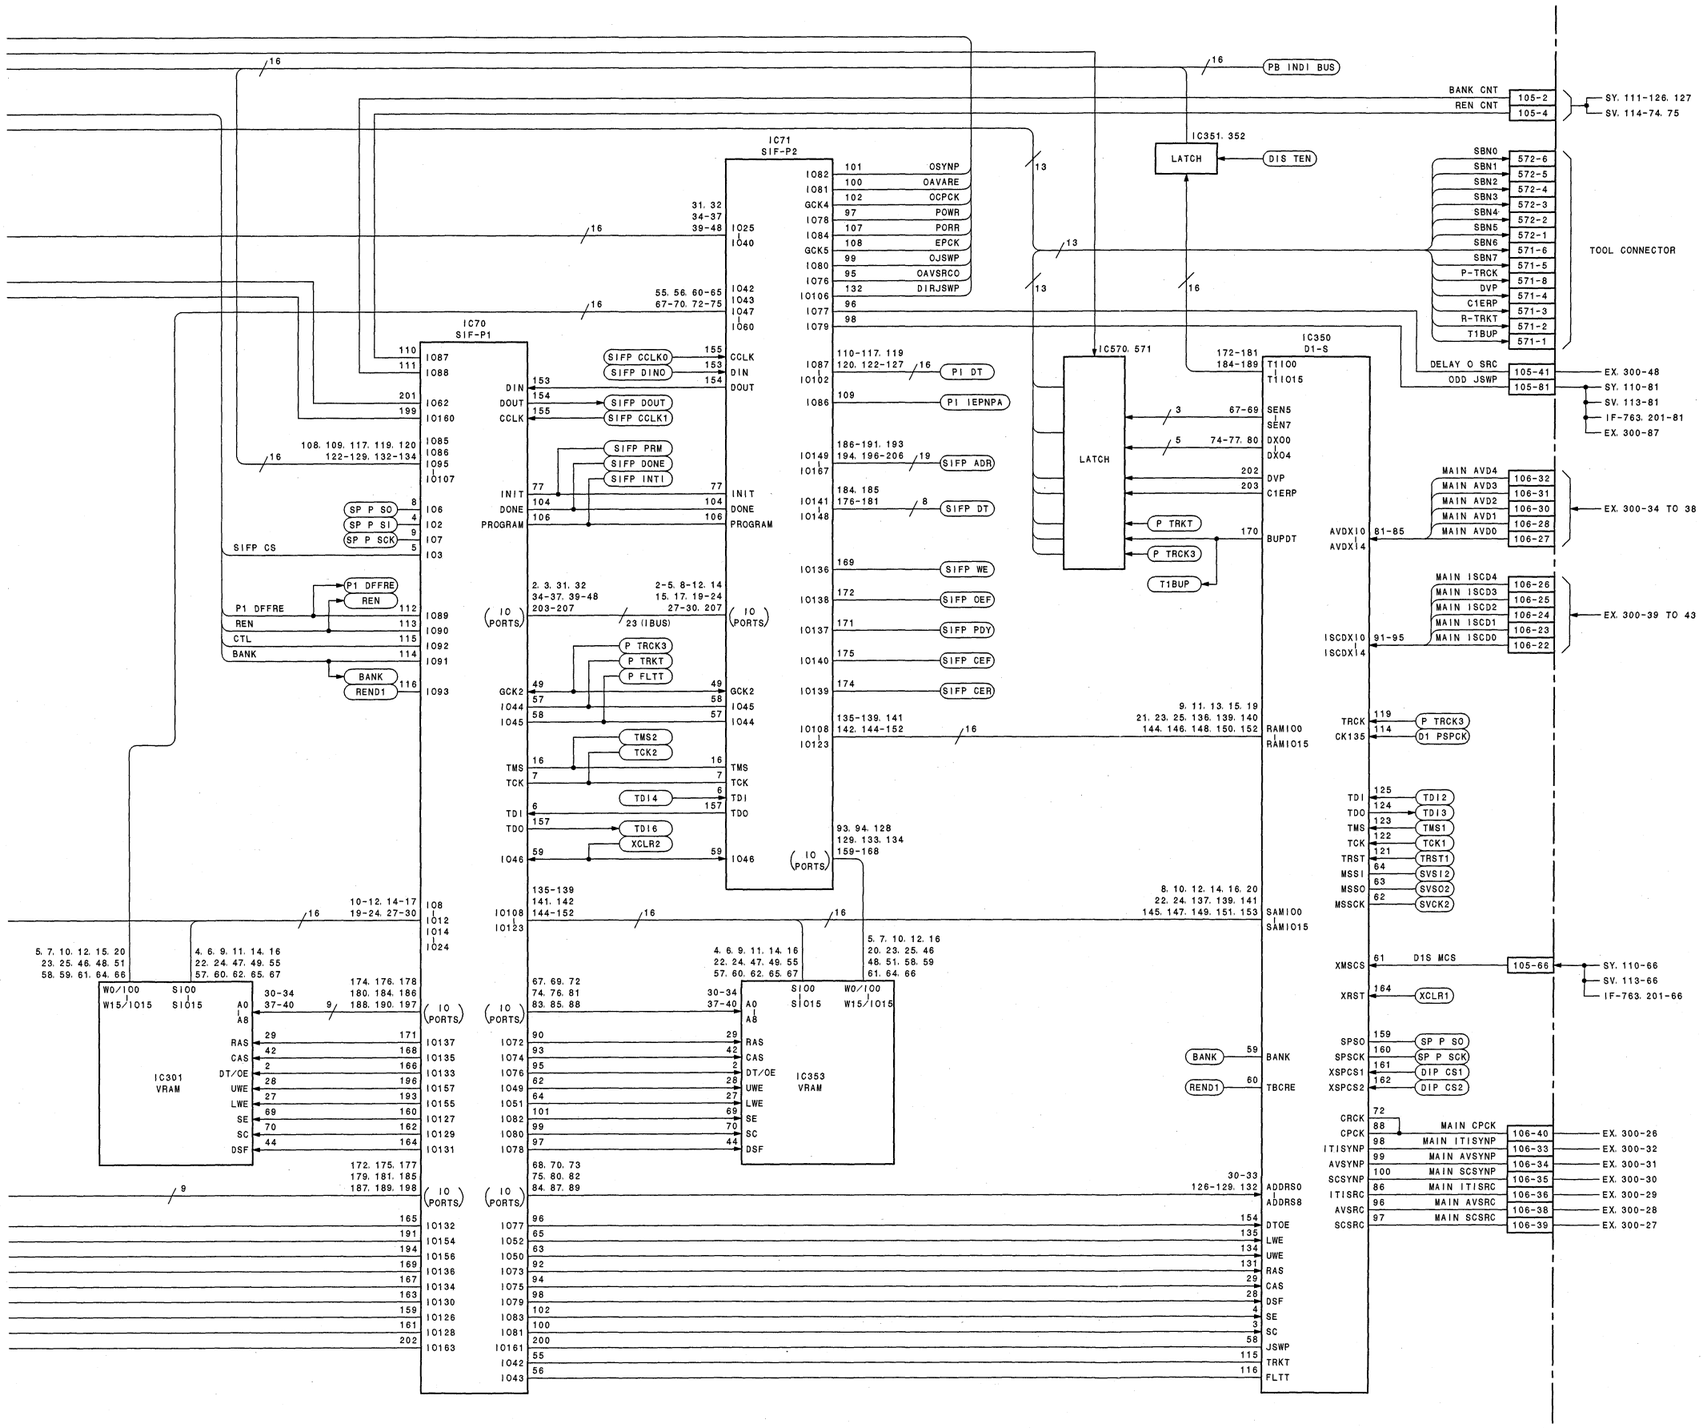

Digital process
DPR-136 (1/4)
LOT NO. 907-112

DPR-136 (2/4)

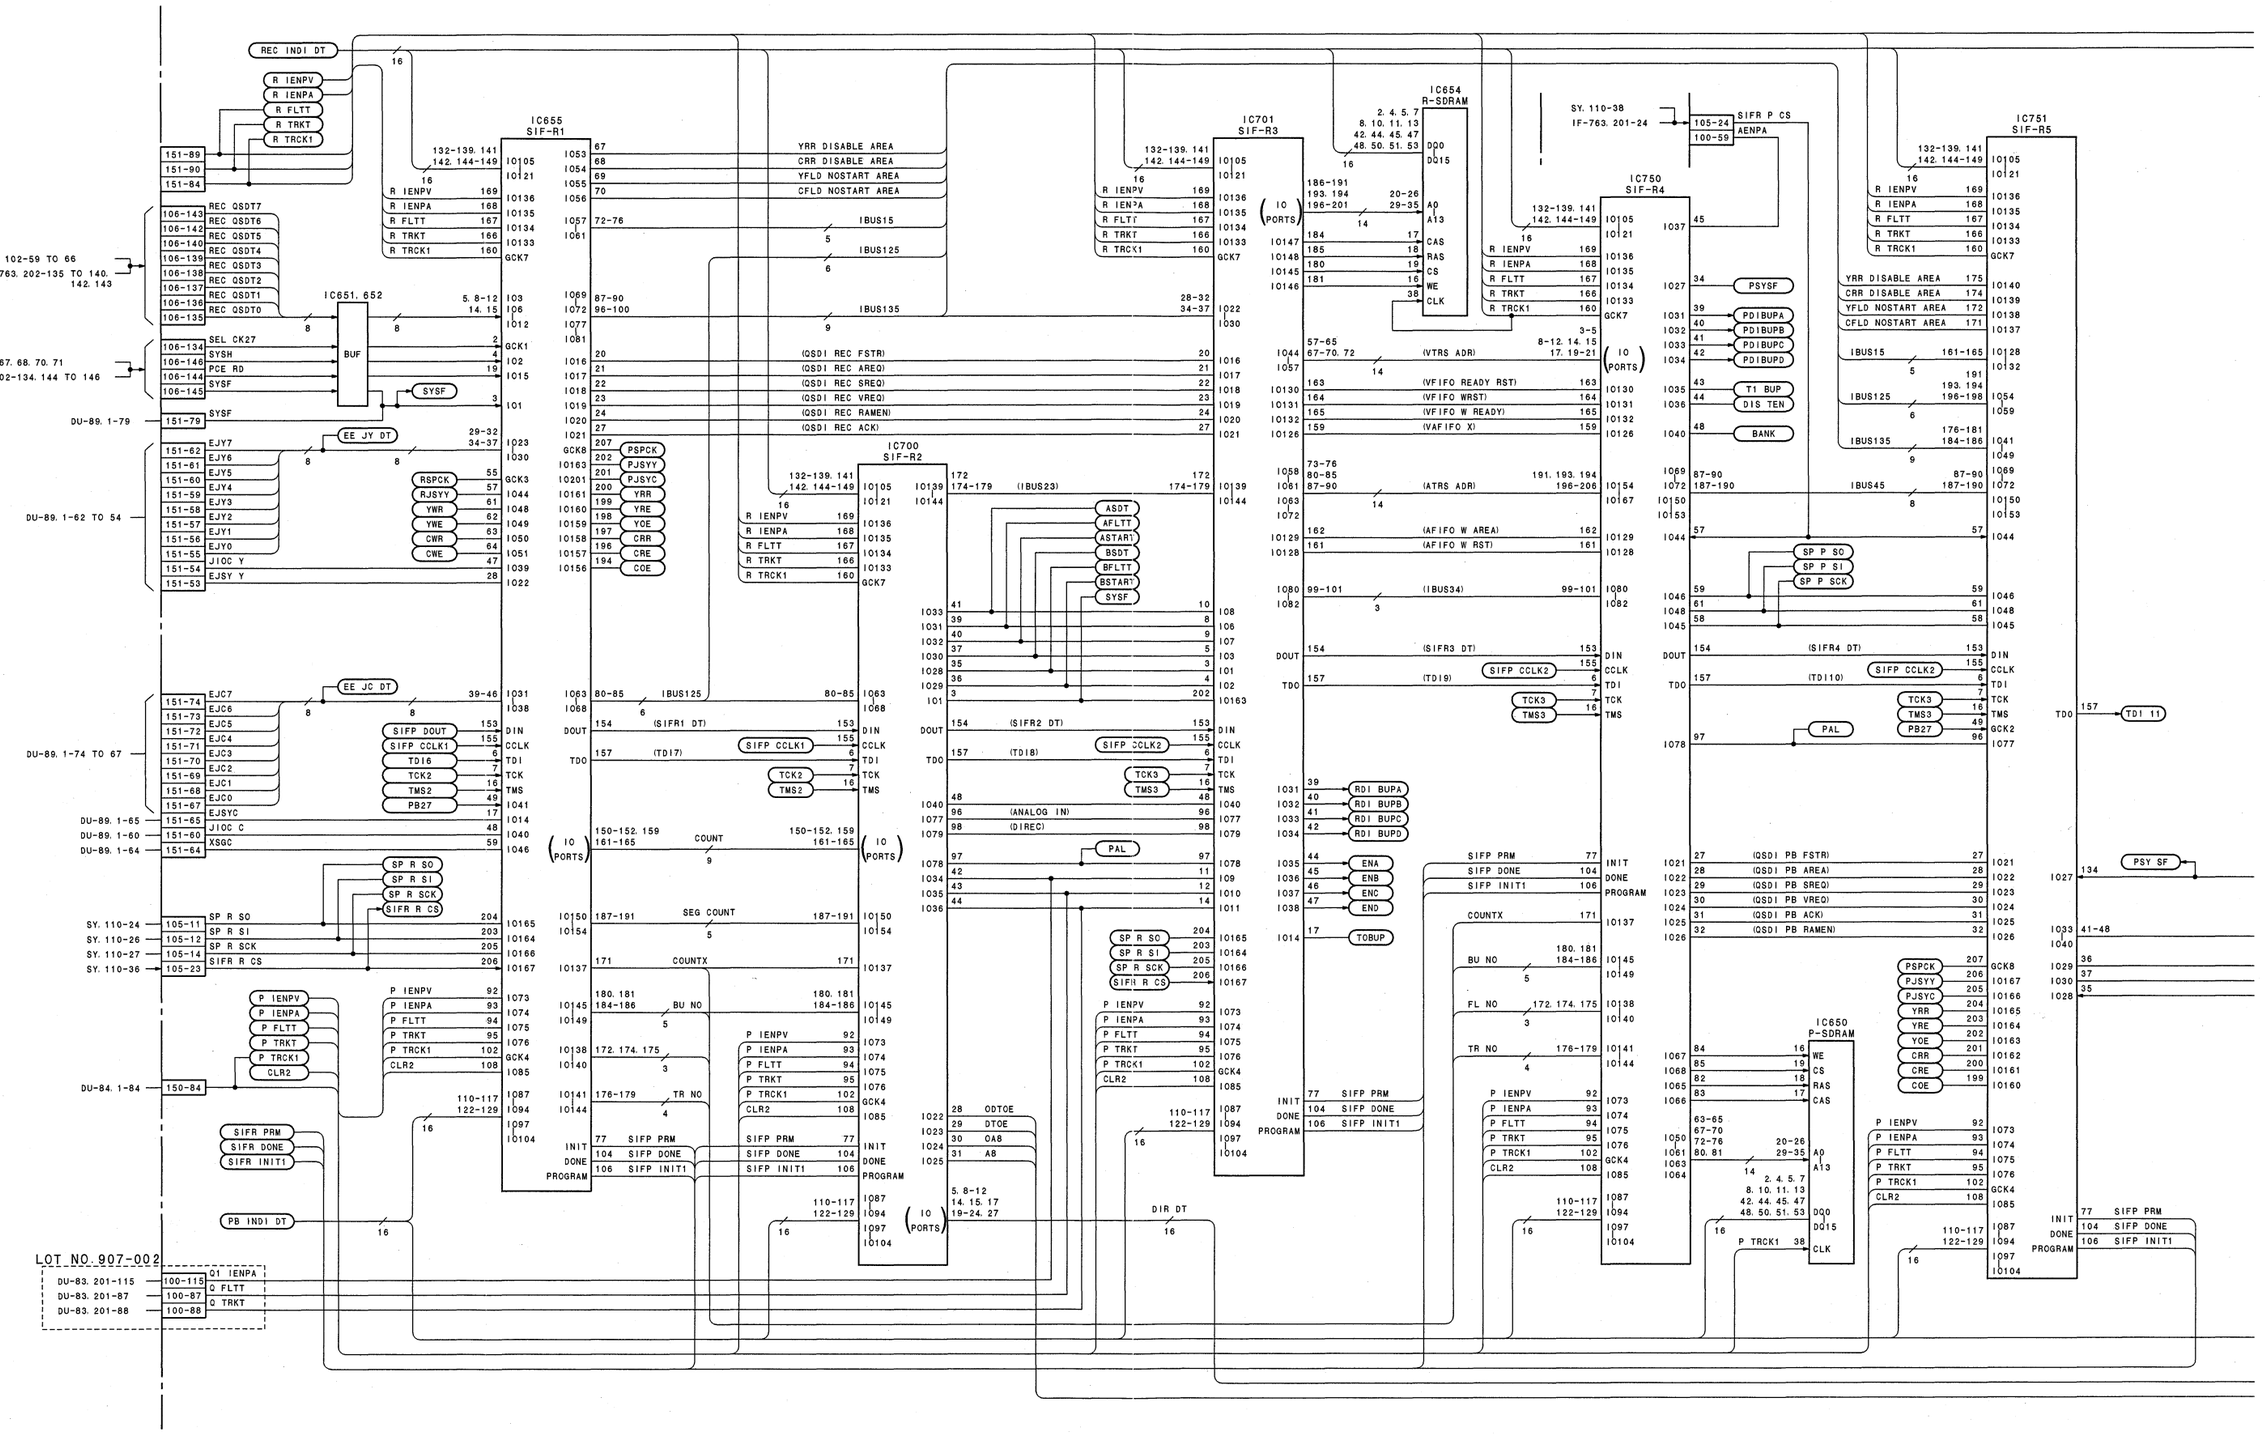

13-8 (a)

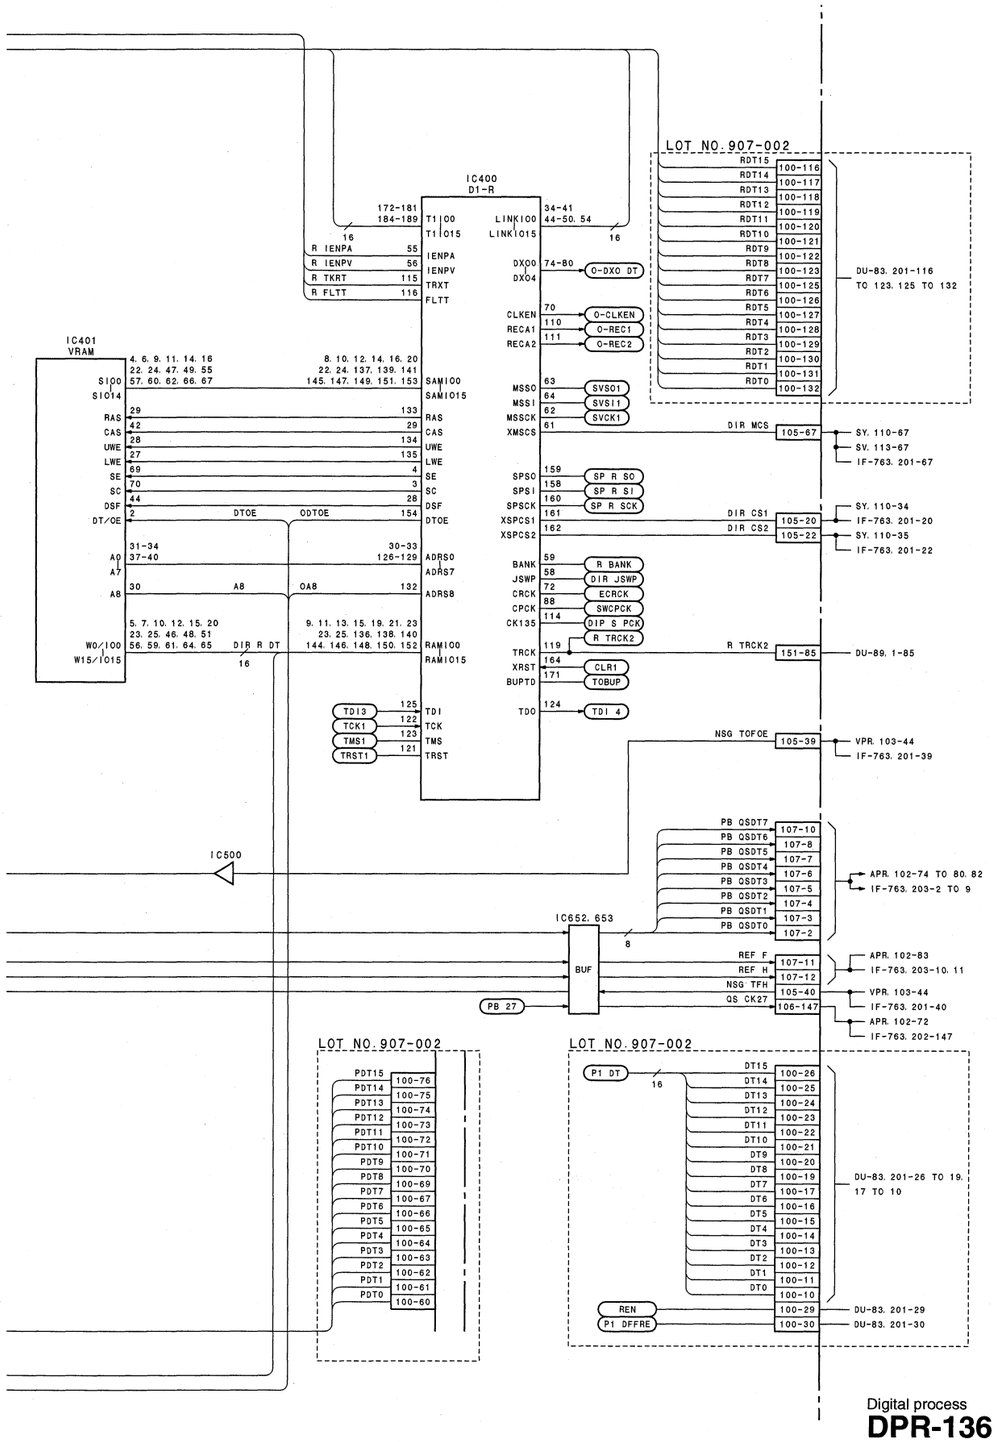

Digital process

DPR-136 (2/4)

LOT NO. 907-112

DPR-136 (3/4)

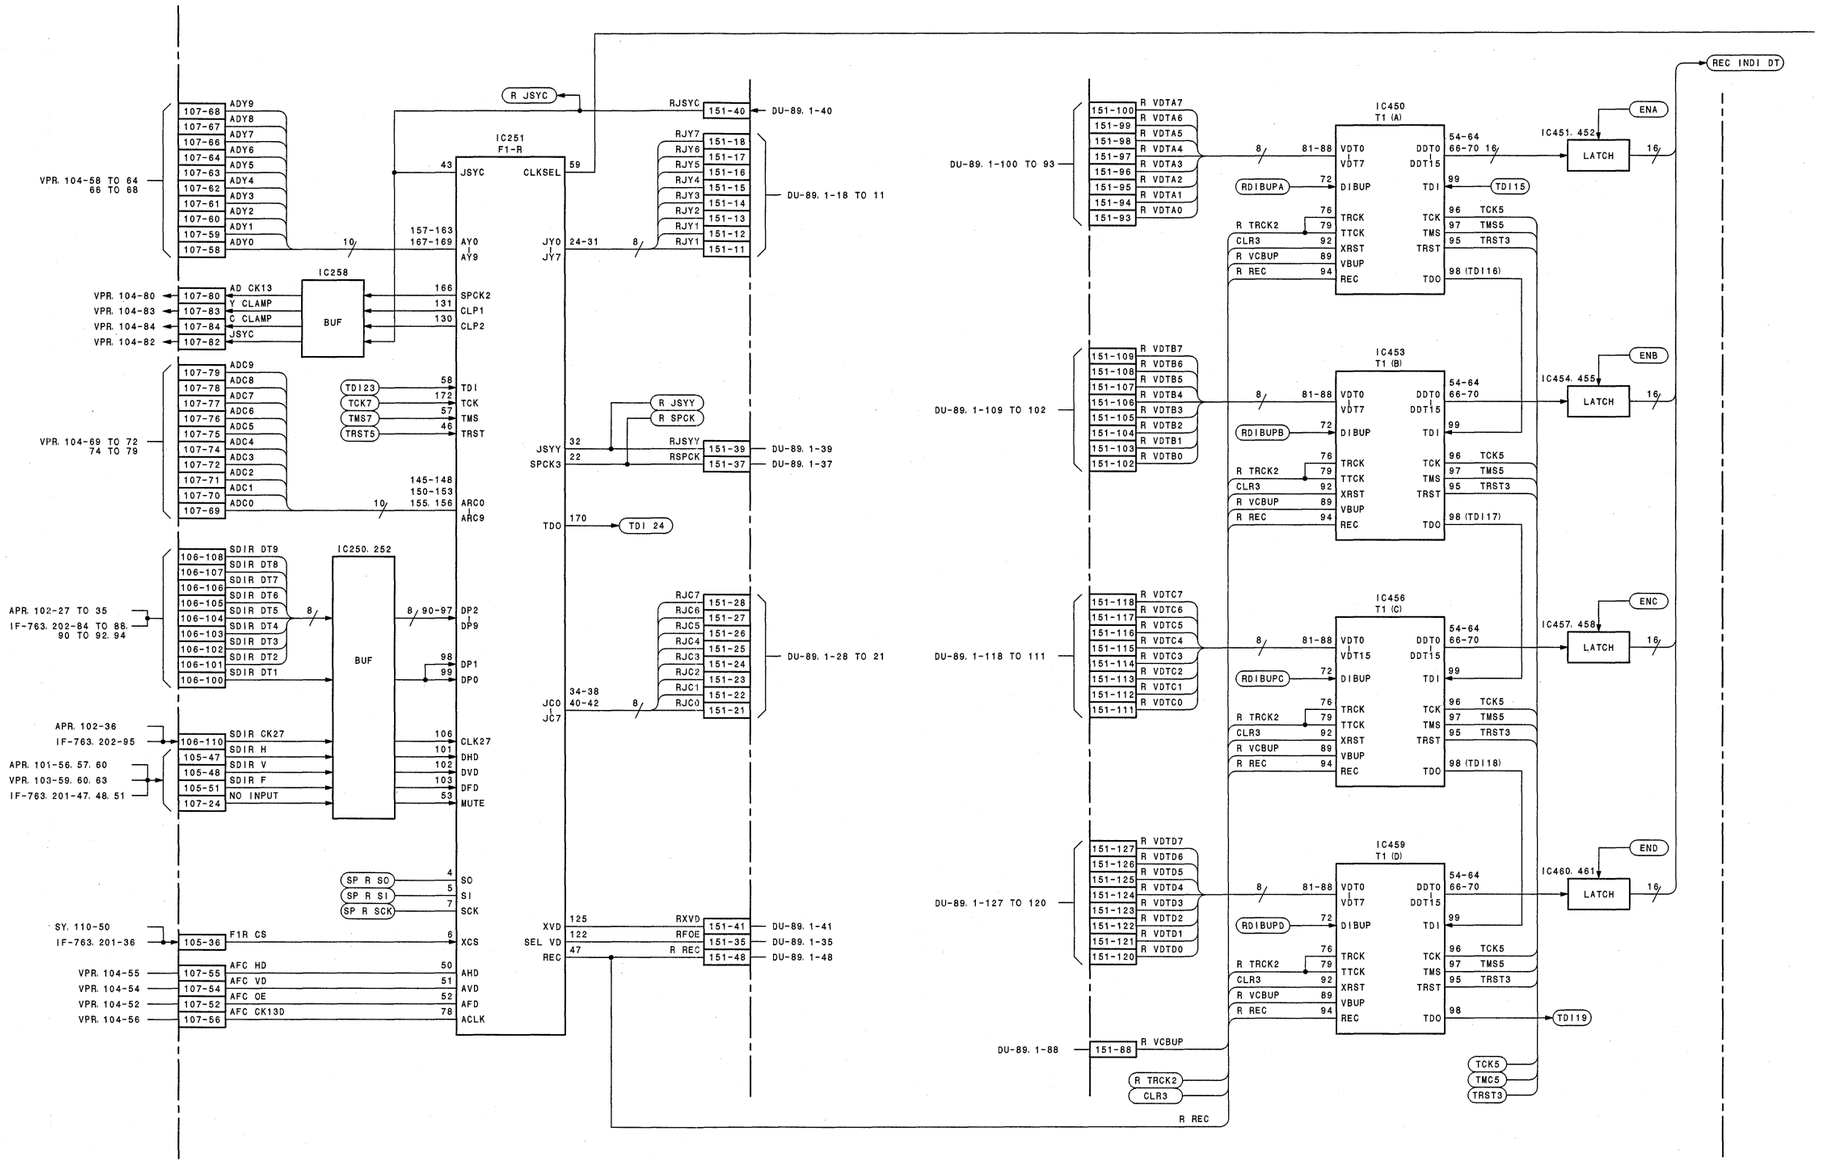

13-10 (a)

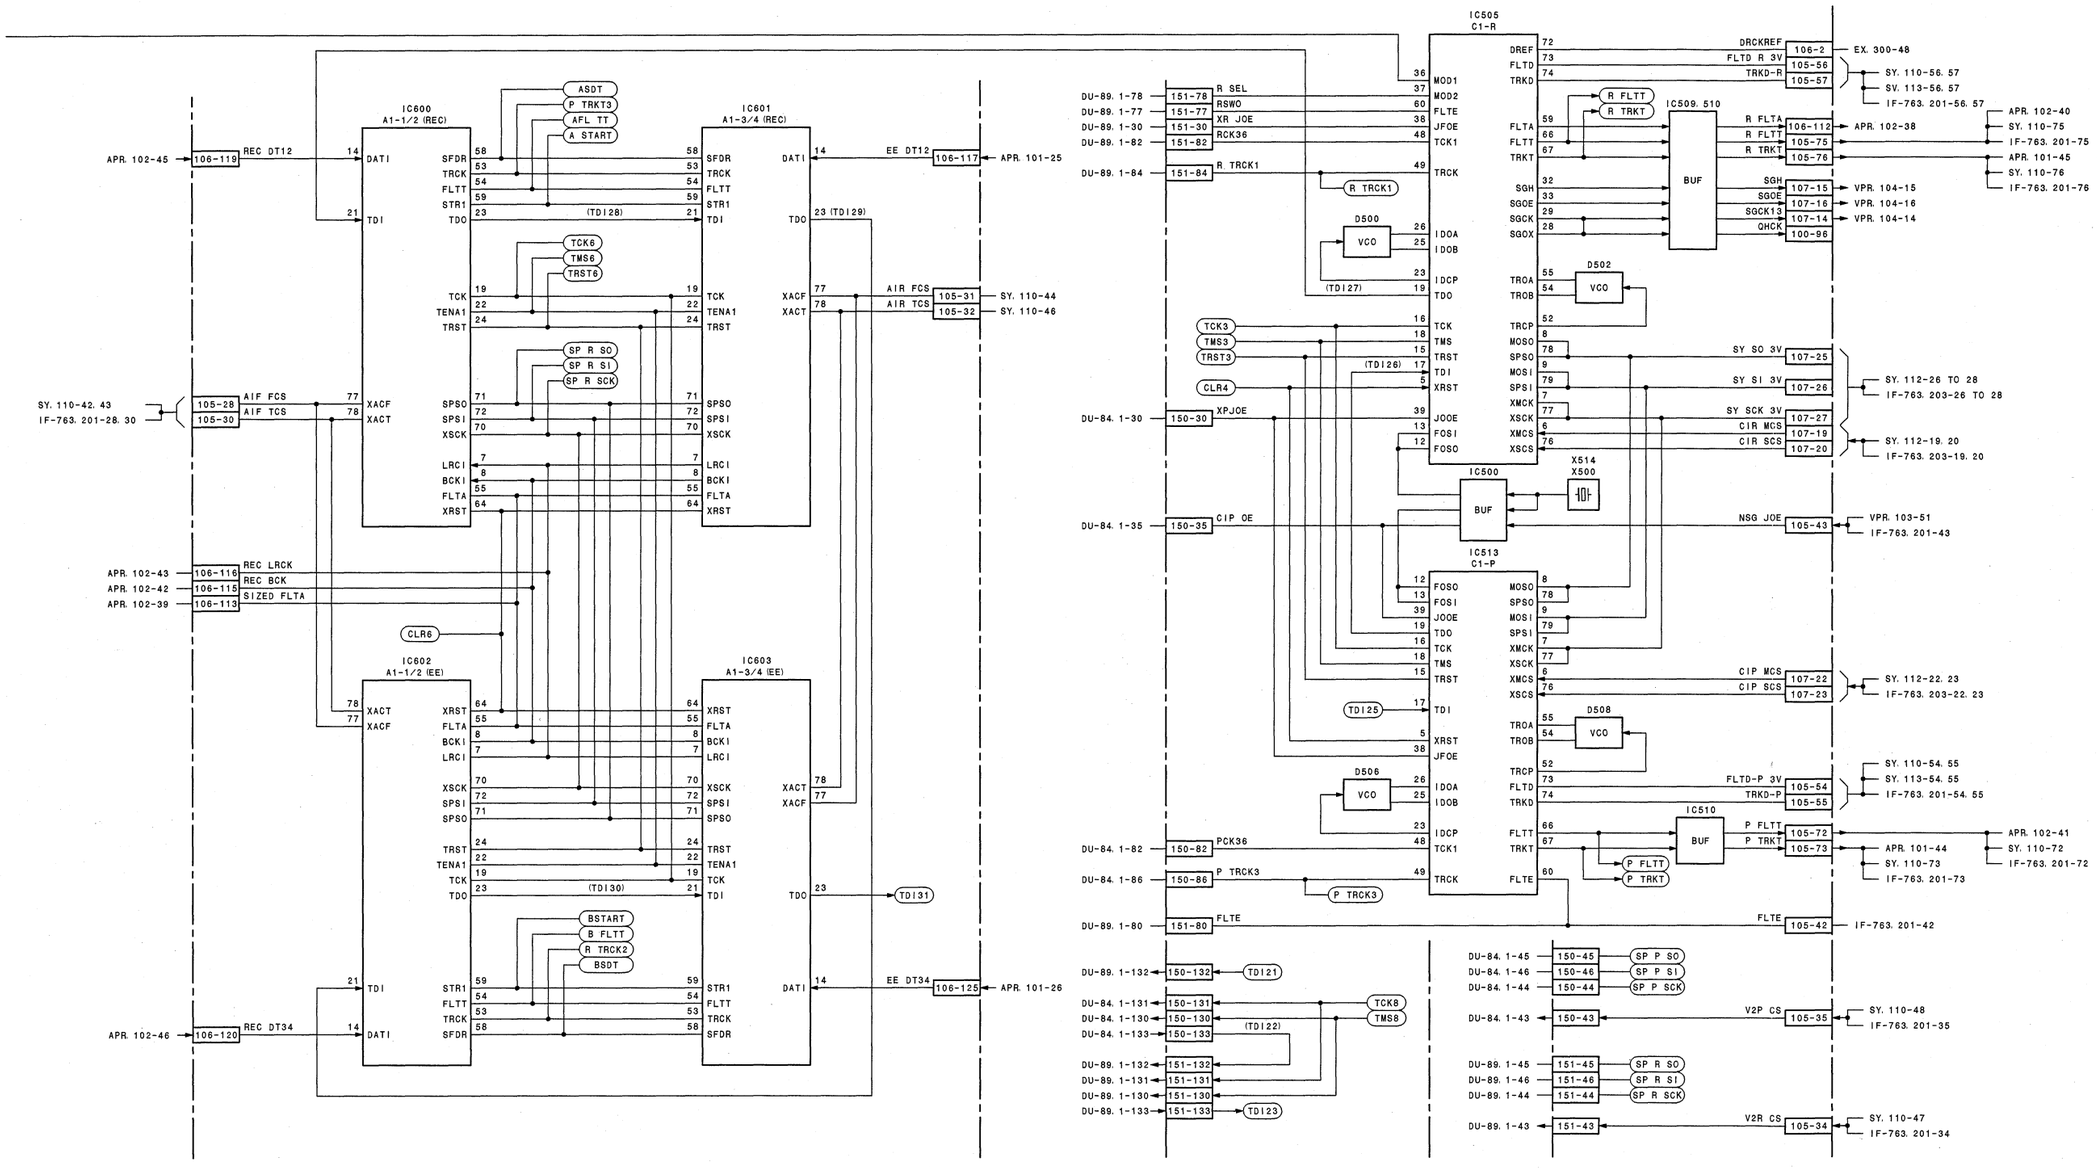
IC600 A1-1/2 (REC)
IC601 A1-3/4 (REC)
IC602 A1-1/2 (EE)
IC603 A1-3/4 (EE)
IC505 C1-R
IC513 C1-P
IC509, 510
IC500
IC510
ASDT
P TRKT3
AFL TT
A START
REC DT12
EE DT12
TCK6
TMS6
TRST6
AIF FCS
AIF TCS
SP R SO
SP R SI
SP R SCK
REC LRCK
REC BCK
SIZED FLTA
CLR6
BSTART
B FLTT
R TRCK2
BSDT
REC DT34
EE DT34
(TDI28)
(TDI29)
(TDI30)
(TDI31)
R SEL
RSWO
XR JOE
RCK36
R TRCK1
D500
D502
D506
D508
TCK3
TMS3
TRST3
CLR4
XPJOE
CIP OE
PCK36
P TRCK3
P TRCK1
(TDI27)
(TDI26)
(TDI22)
TDI25
TDI21
TDI23
R FLTT
R TRKT
P FLTT
P TRKT
BUF
VCO
X514 X500
DRCKREF
FLTD R 3V
TRKD-R
FLTD-P 3V
TRKD-P
SY SO 3V
SY SI 3V
SY SCK 3V
CIR MCS
CIR SCS
NSG JOE
CIP MCS
V2P CS
V2R CS
FLTE
R FLTT
R FLTT
R TRKT
SGH
SGOE
SGCK13
QHCK
SY. 110-42. 43
IF-763. 201-28. 30
APR. 102-45
APR. 102-43
APR. 102-42
APR. 102-39
APR. 102-46
APR. 101-25
APR. 101-26
SY. 110-44
SY. 110-46
EX. 300-48
SY. 110-56. 57
SY. 113-56. 57
IF-763. 201-56. 57
APR. 102-40
SY. 110-75
IF-763. 201-75
APR. 101-45
SY. 110-76
IF-763. 201-76
APR. 102-38
VPR. 104-15
VPR. 104-16
VPR. 104-14
SY. 112-26 TO 28
IF-763. 203-26 TO 28
SY. 112-19. 20
IF-763. 203-19. 20
VPR. 103-51
IF-763. 201-43
SY. 112-22. 23
IF-763. 203-22. 23
SY. 110-54. 55
SY. 113-54. 55
IF-763. 201-54. 55
APR. 102-41
SY. 110-72
IF-763. 201-72
APR. 101-44
SY. 110-73
IF-763. 201-73
IF-763. 201-42
SY. 110-48
IF-763. 201-35
SY. 110-47
IF-763. 201-34

DPR-136 (4/4)

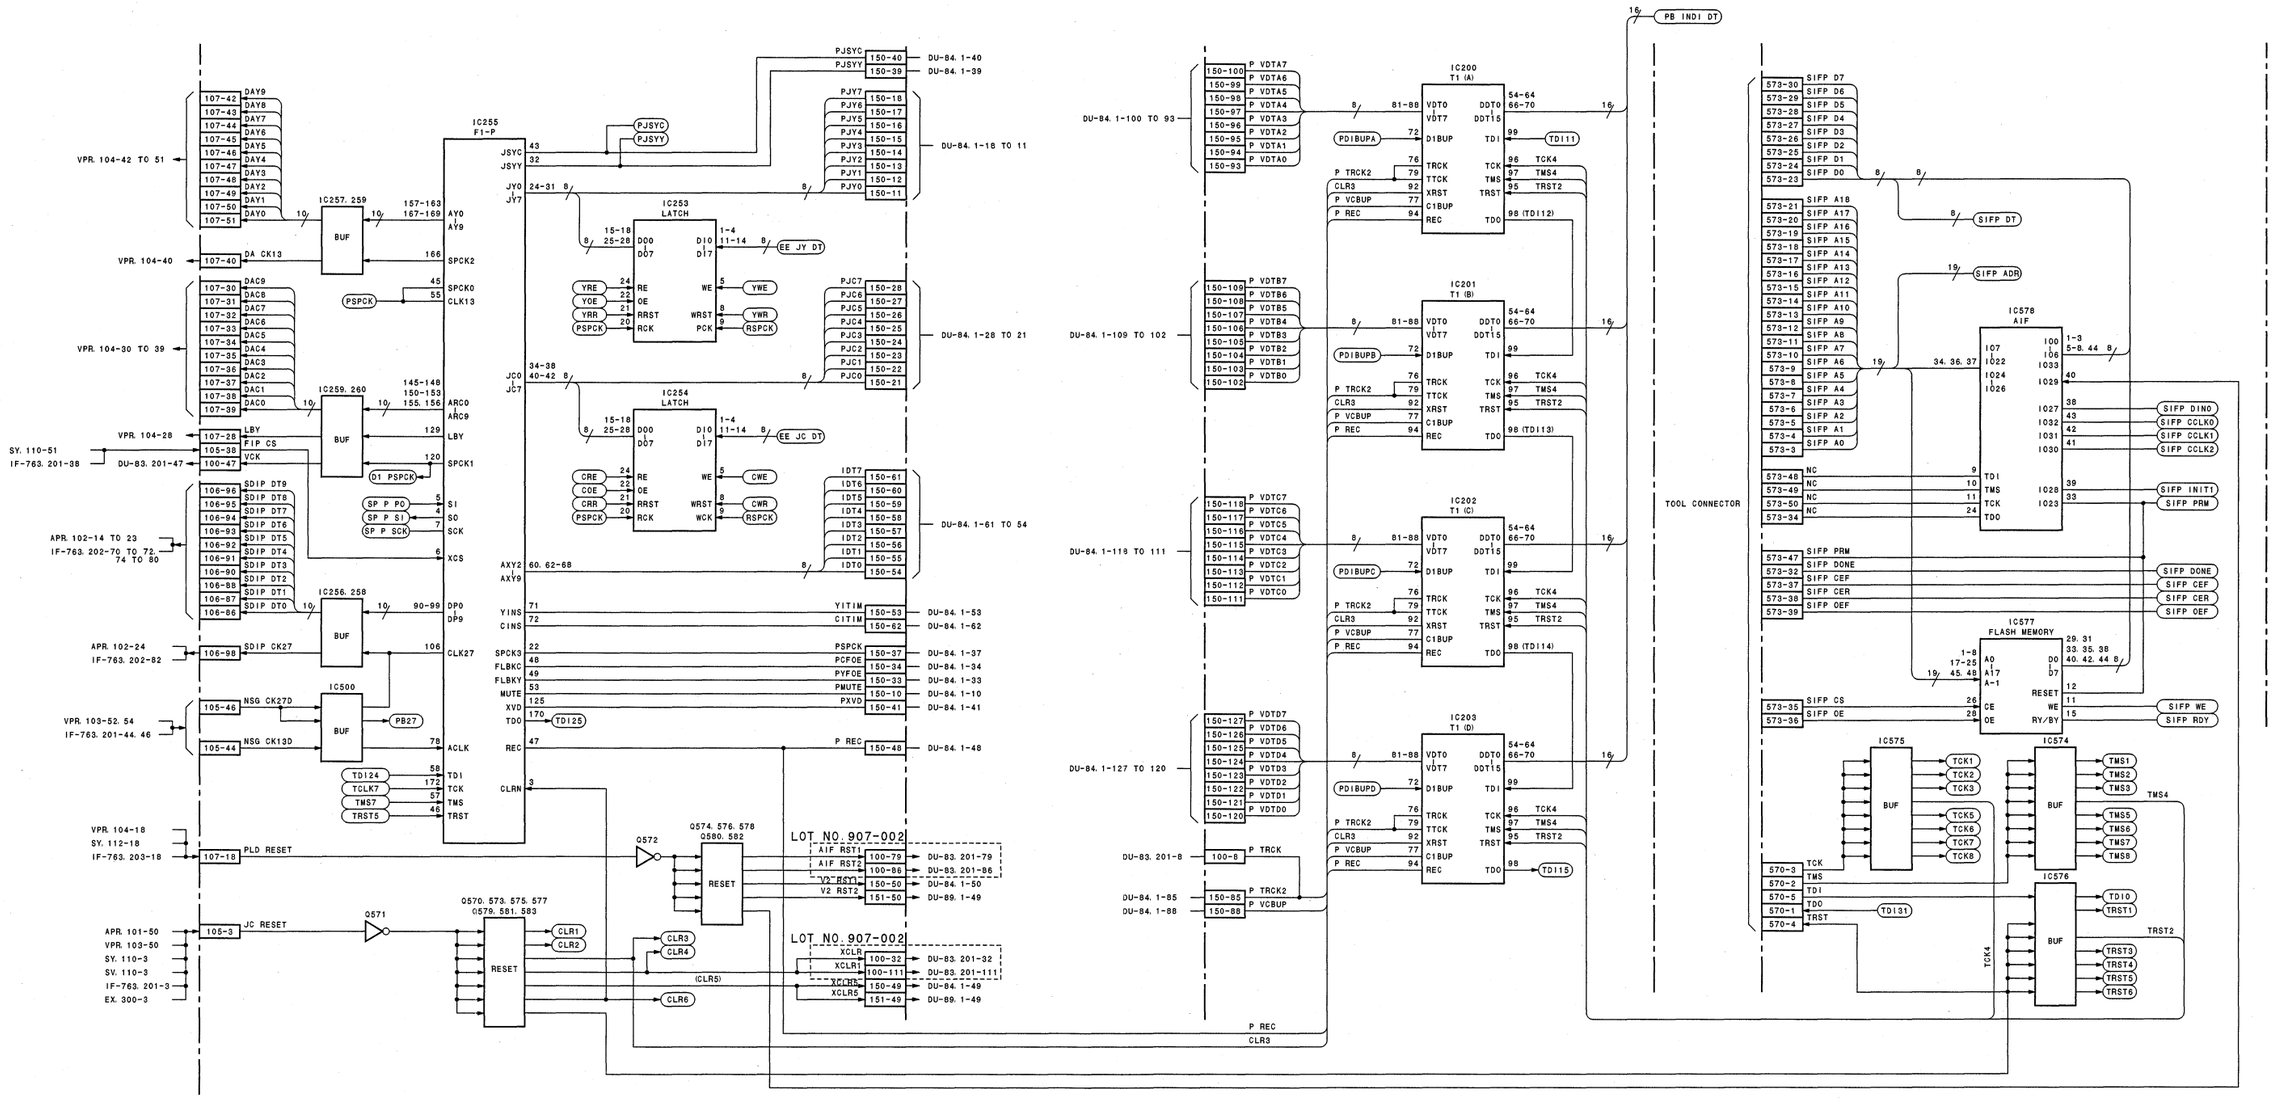

13-12 (a)

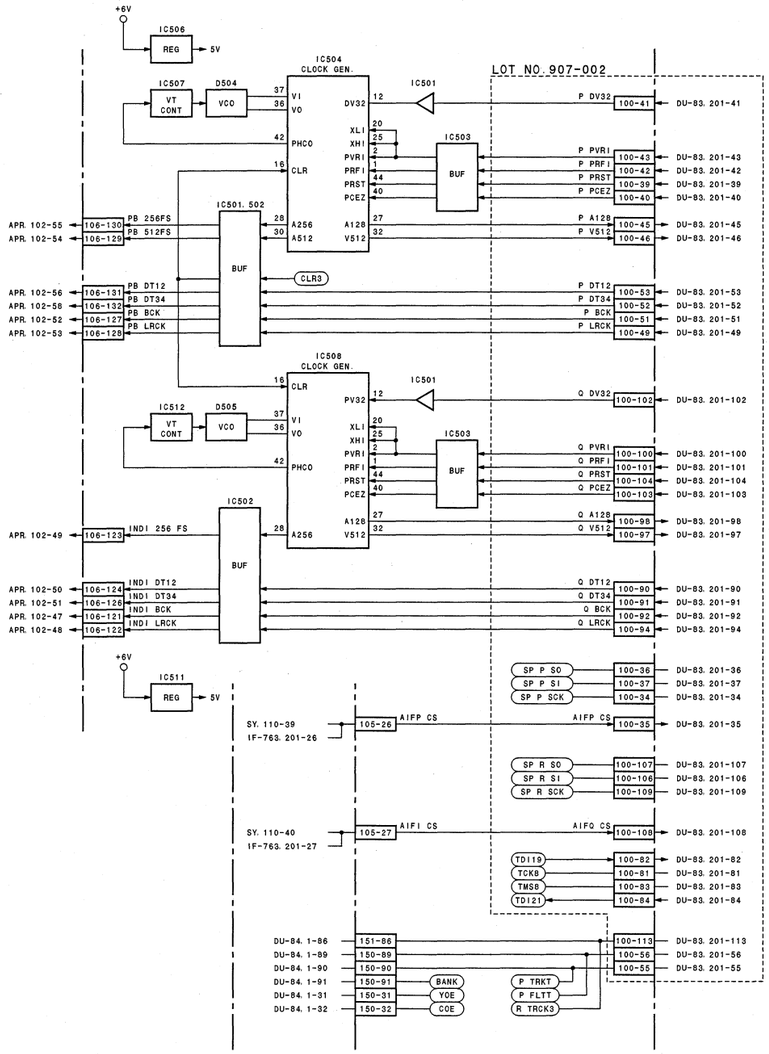

Digital process

DPR-136 (4/4)

LOT NO. 907-112

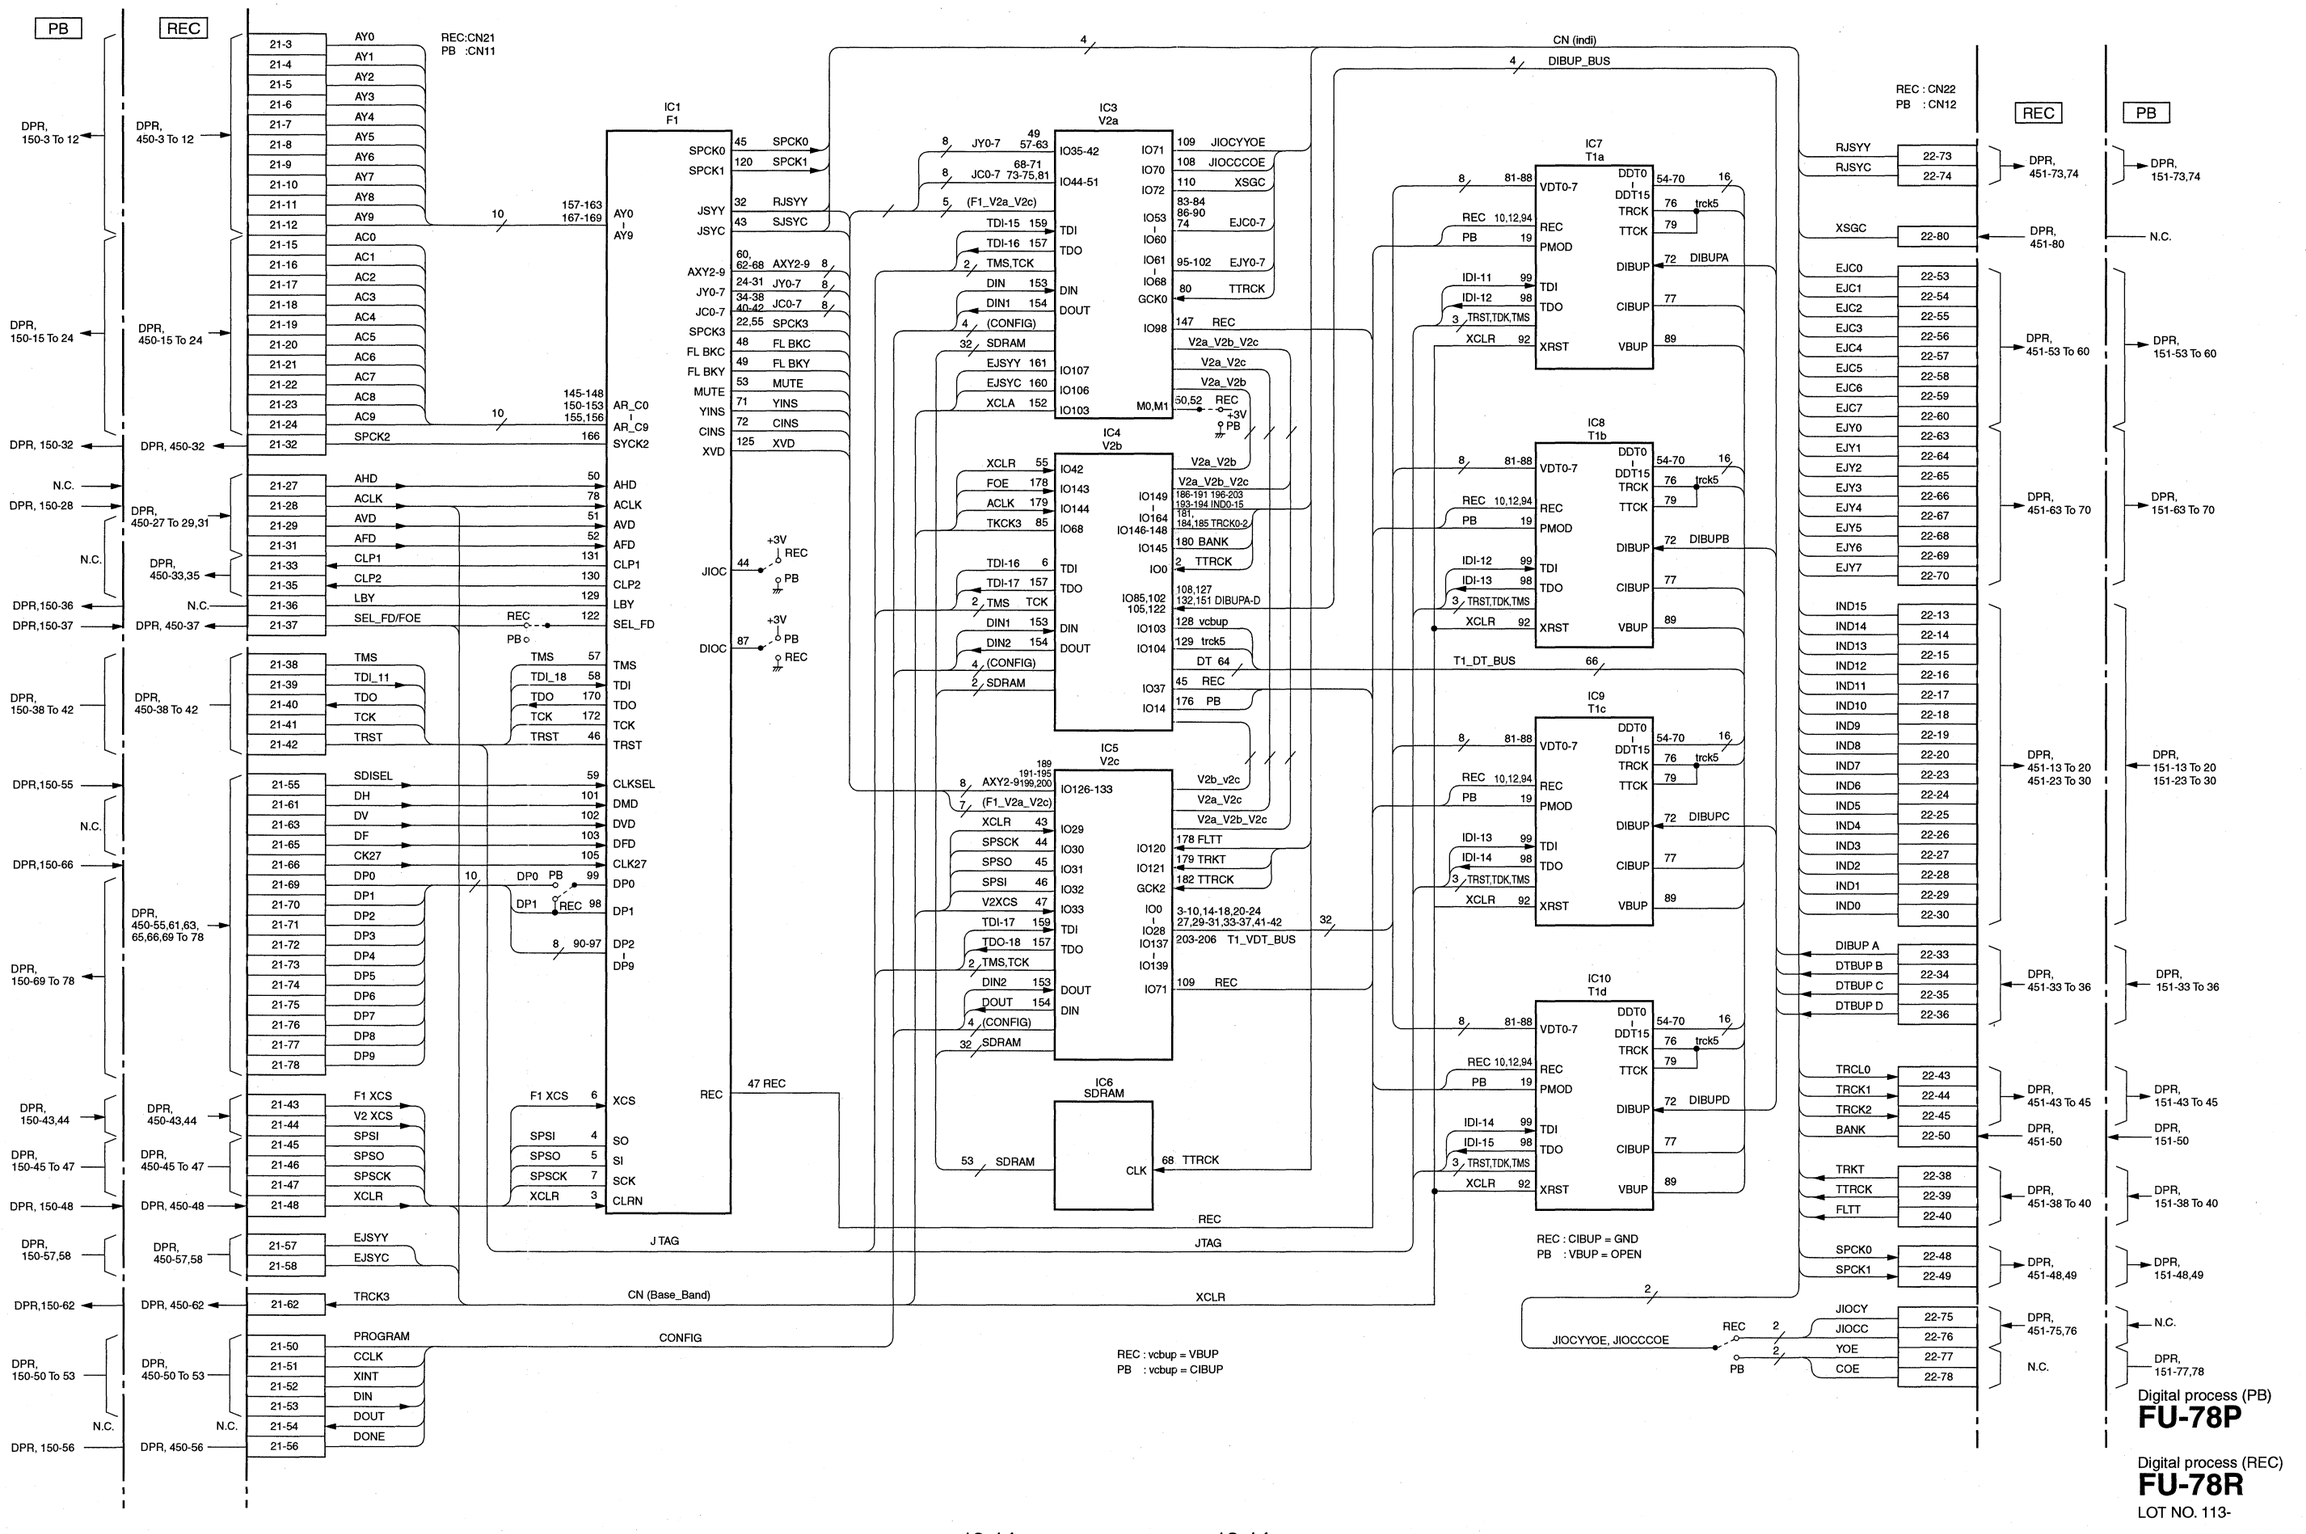
PB
REC
REC:CN21
PB :CN11
IC1
F1
IC3
V2a
IC4
V2b
IC5
V2c
IC6
SDRAM
CN (indi)
DIBUP_BUS
IC7
T1a
IC8
T1b
IC9
T1c
IC10
T1d
REC : CN22
PB : CN12
J TAG
JTAG
CN (Base_Band)
CONFIG
XCLR
T1_DT_BUS
REC : CIBUP = GND
PB : VBUP = OPEN
REC : vcbup = VBUP
PB : vcbup = CIBUP
JIOCYYOE, JIOCCCOE
Digital process (PB)
FU-78P
Digital process (REC)
FU-78R
LOT NO. 113-
DSR-2000/2000P

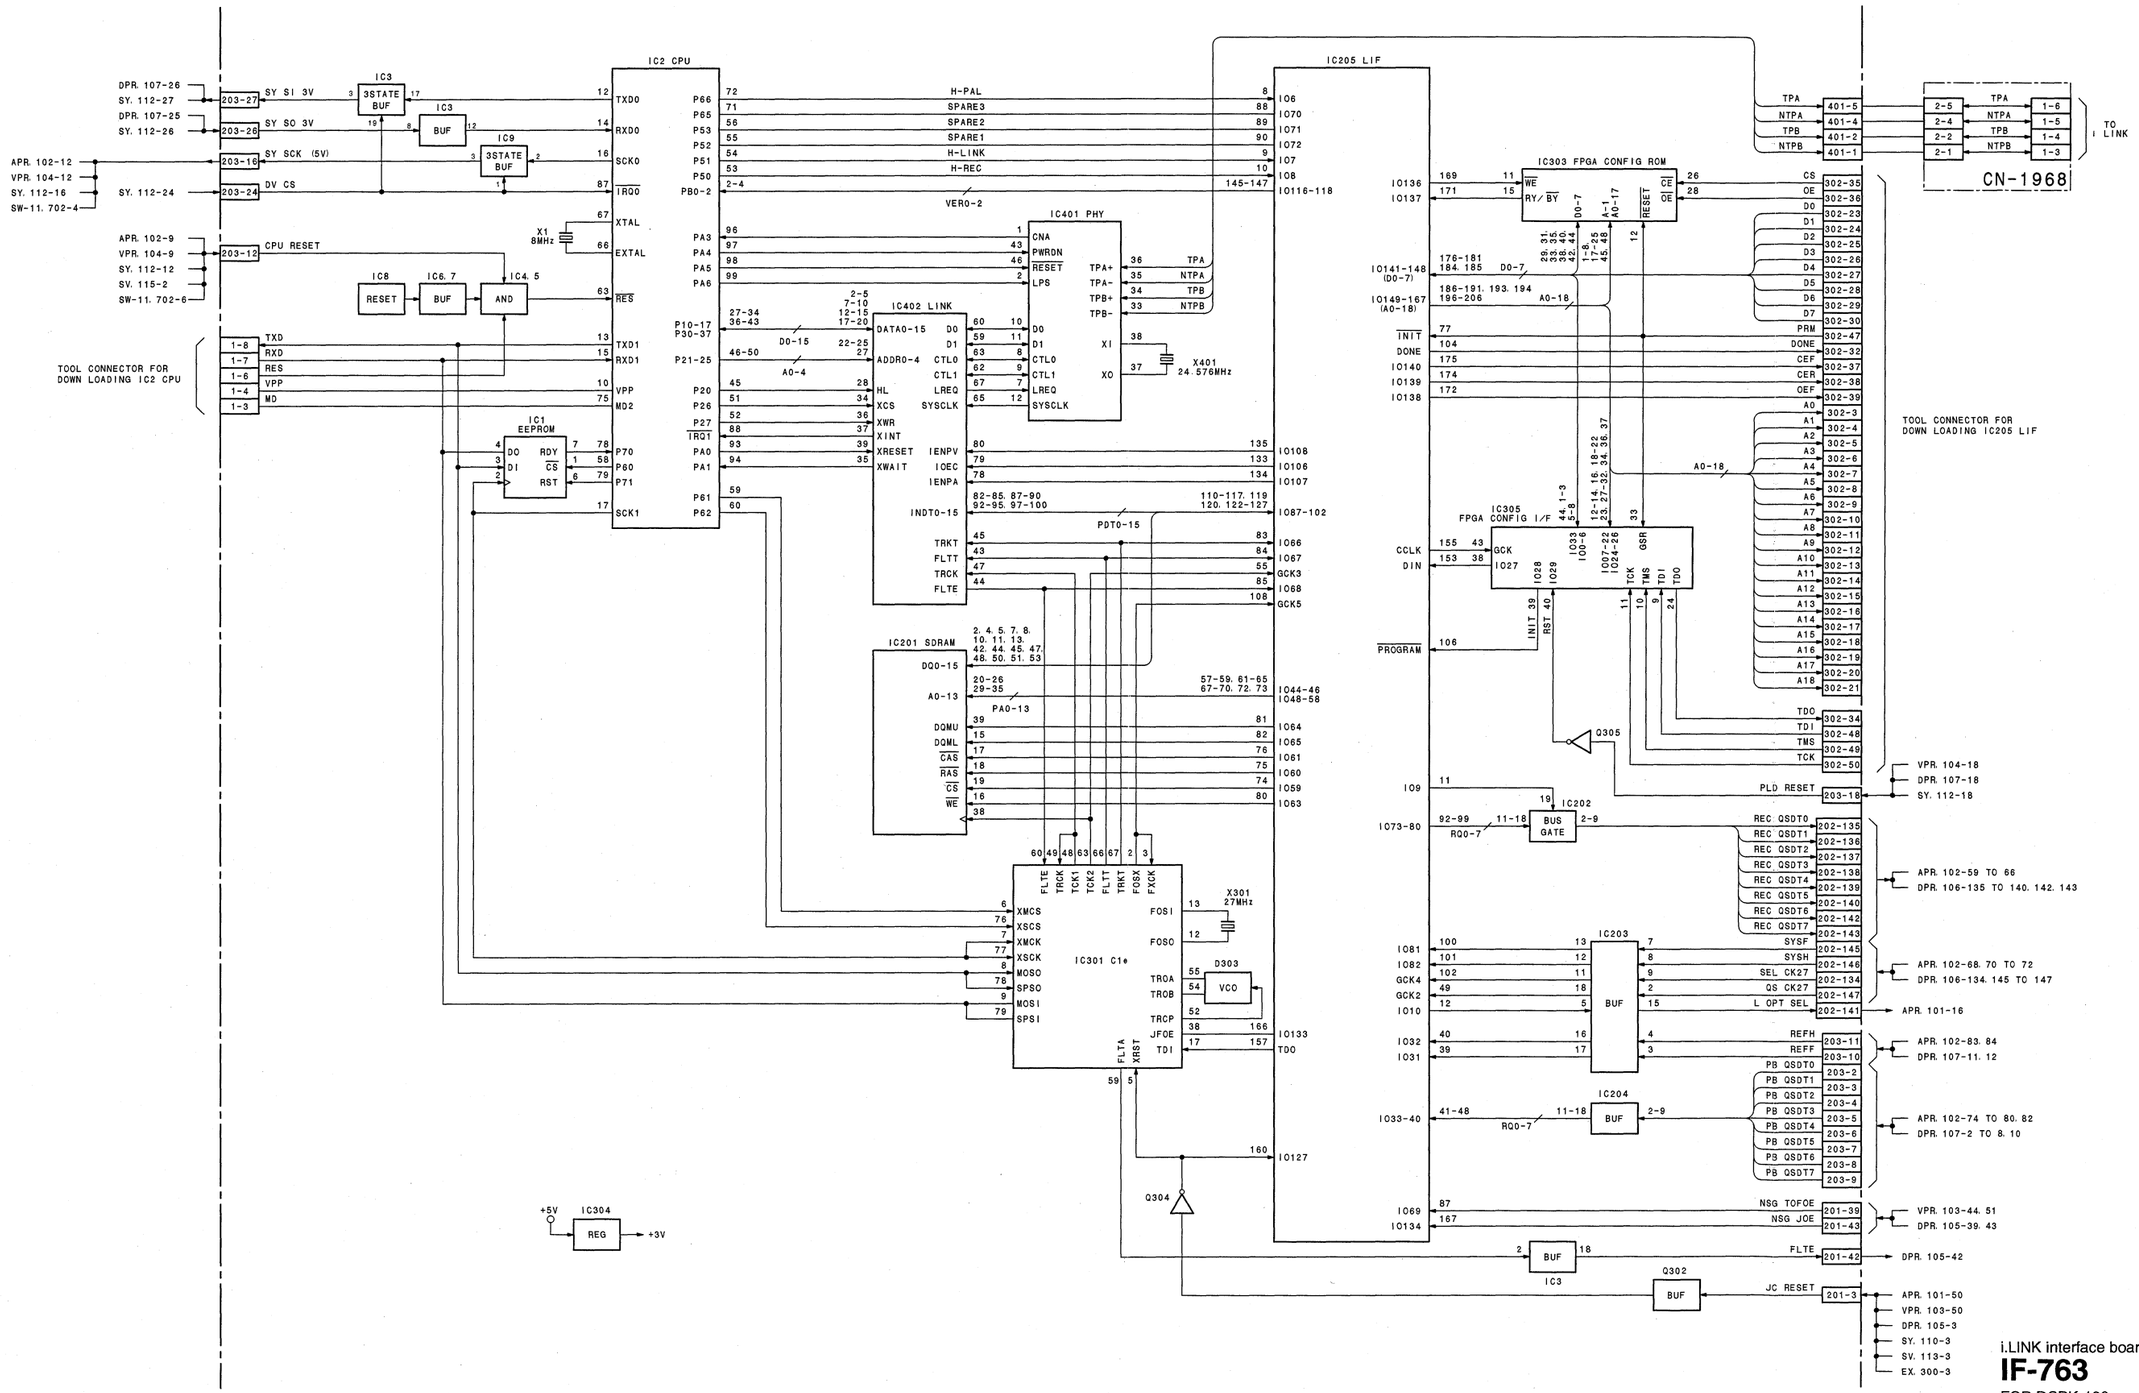

i.LINK interface board (Option: DSBK-190)

IF-763

FOR DSBK-190
LOT NO. 909-

RP-111 (1/3)

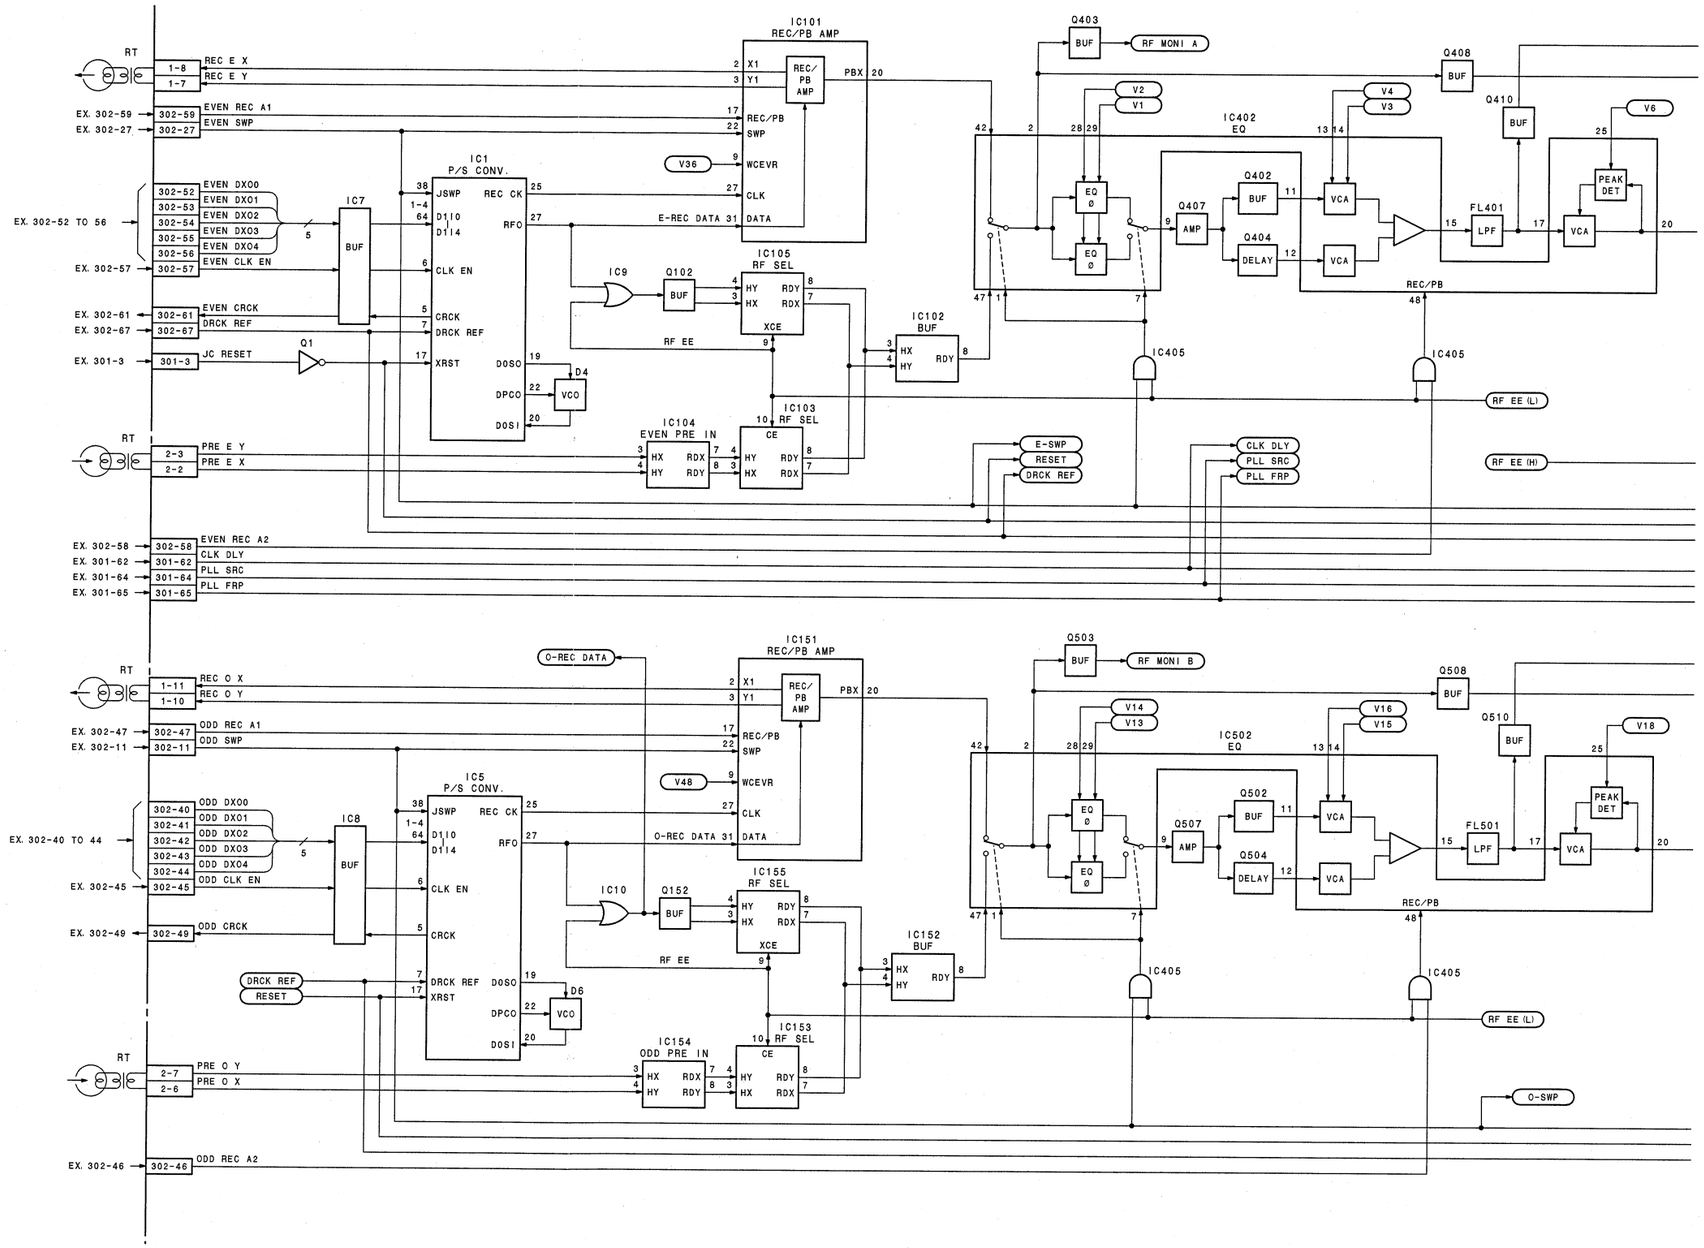

13-16

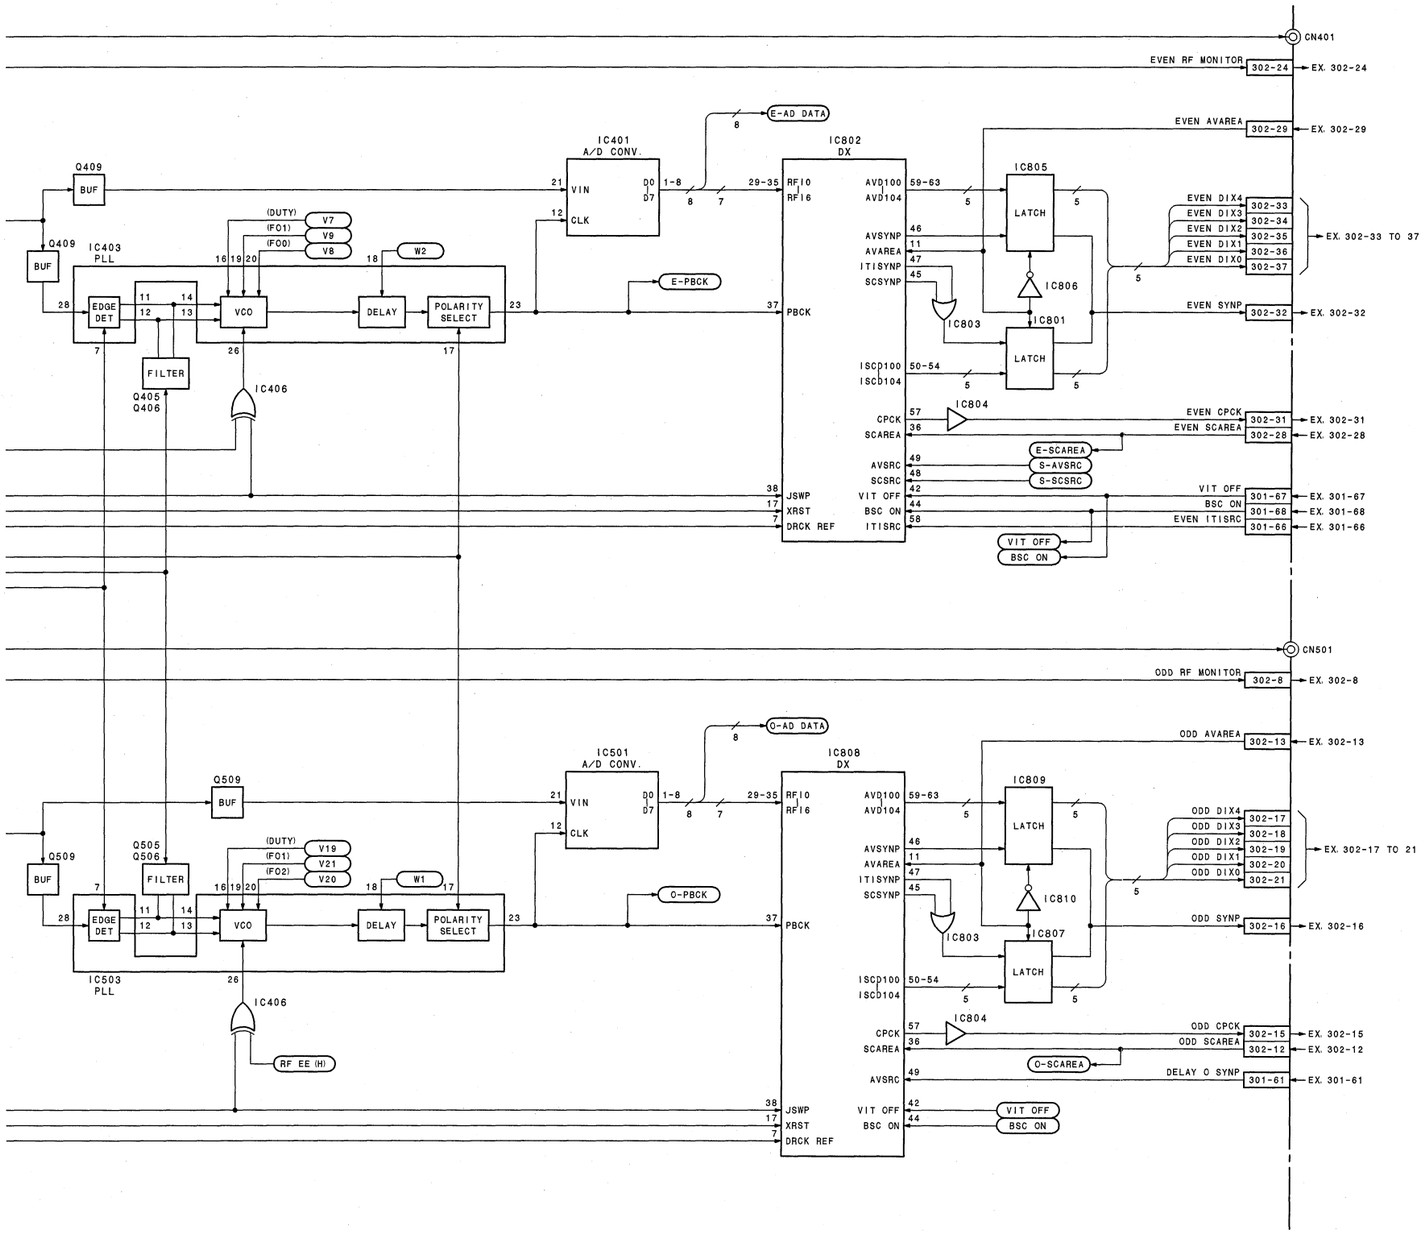

RF REC/PB, ATF detection
RP-111 (1/3)
LOT NO. 907-

RP-111 (2/3)

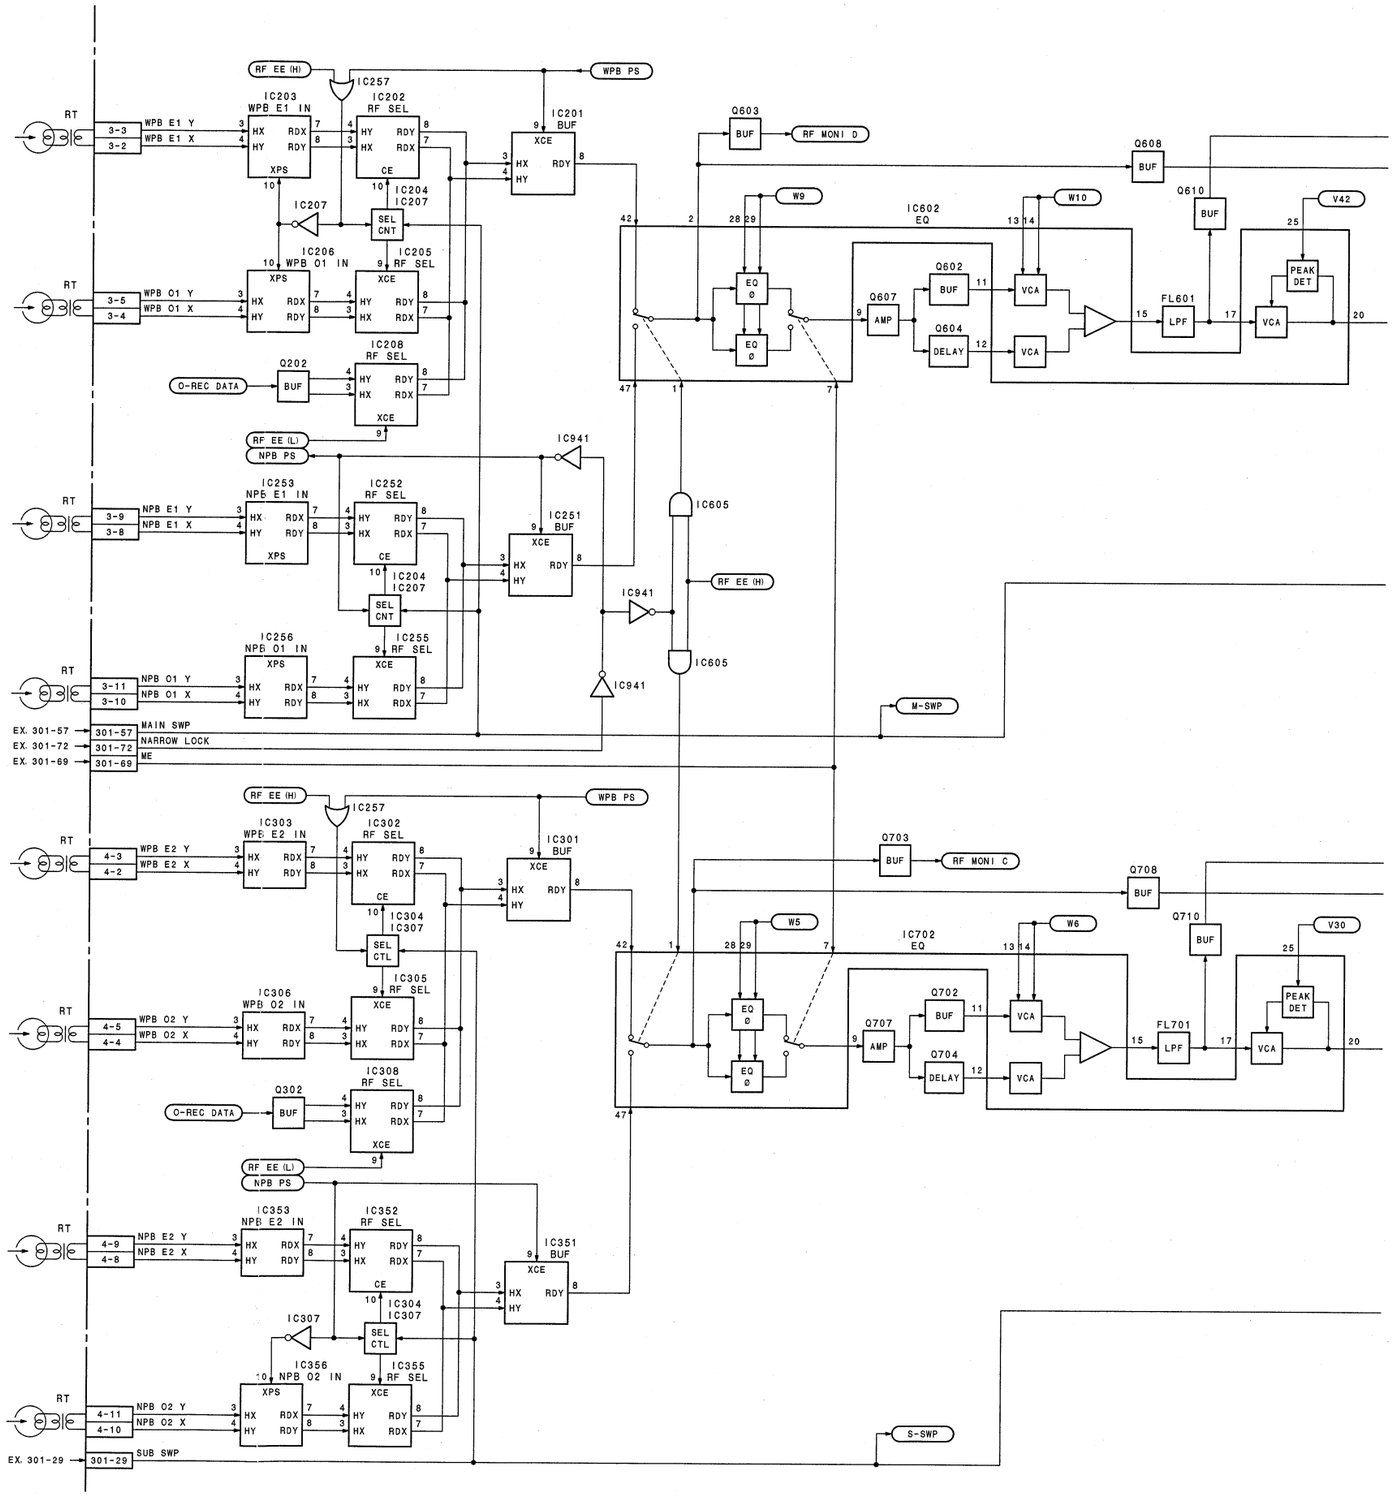

13-18

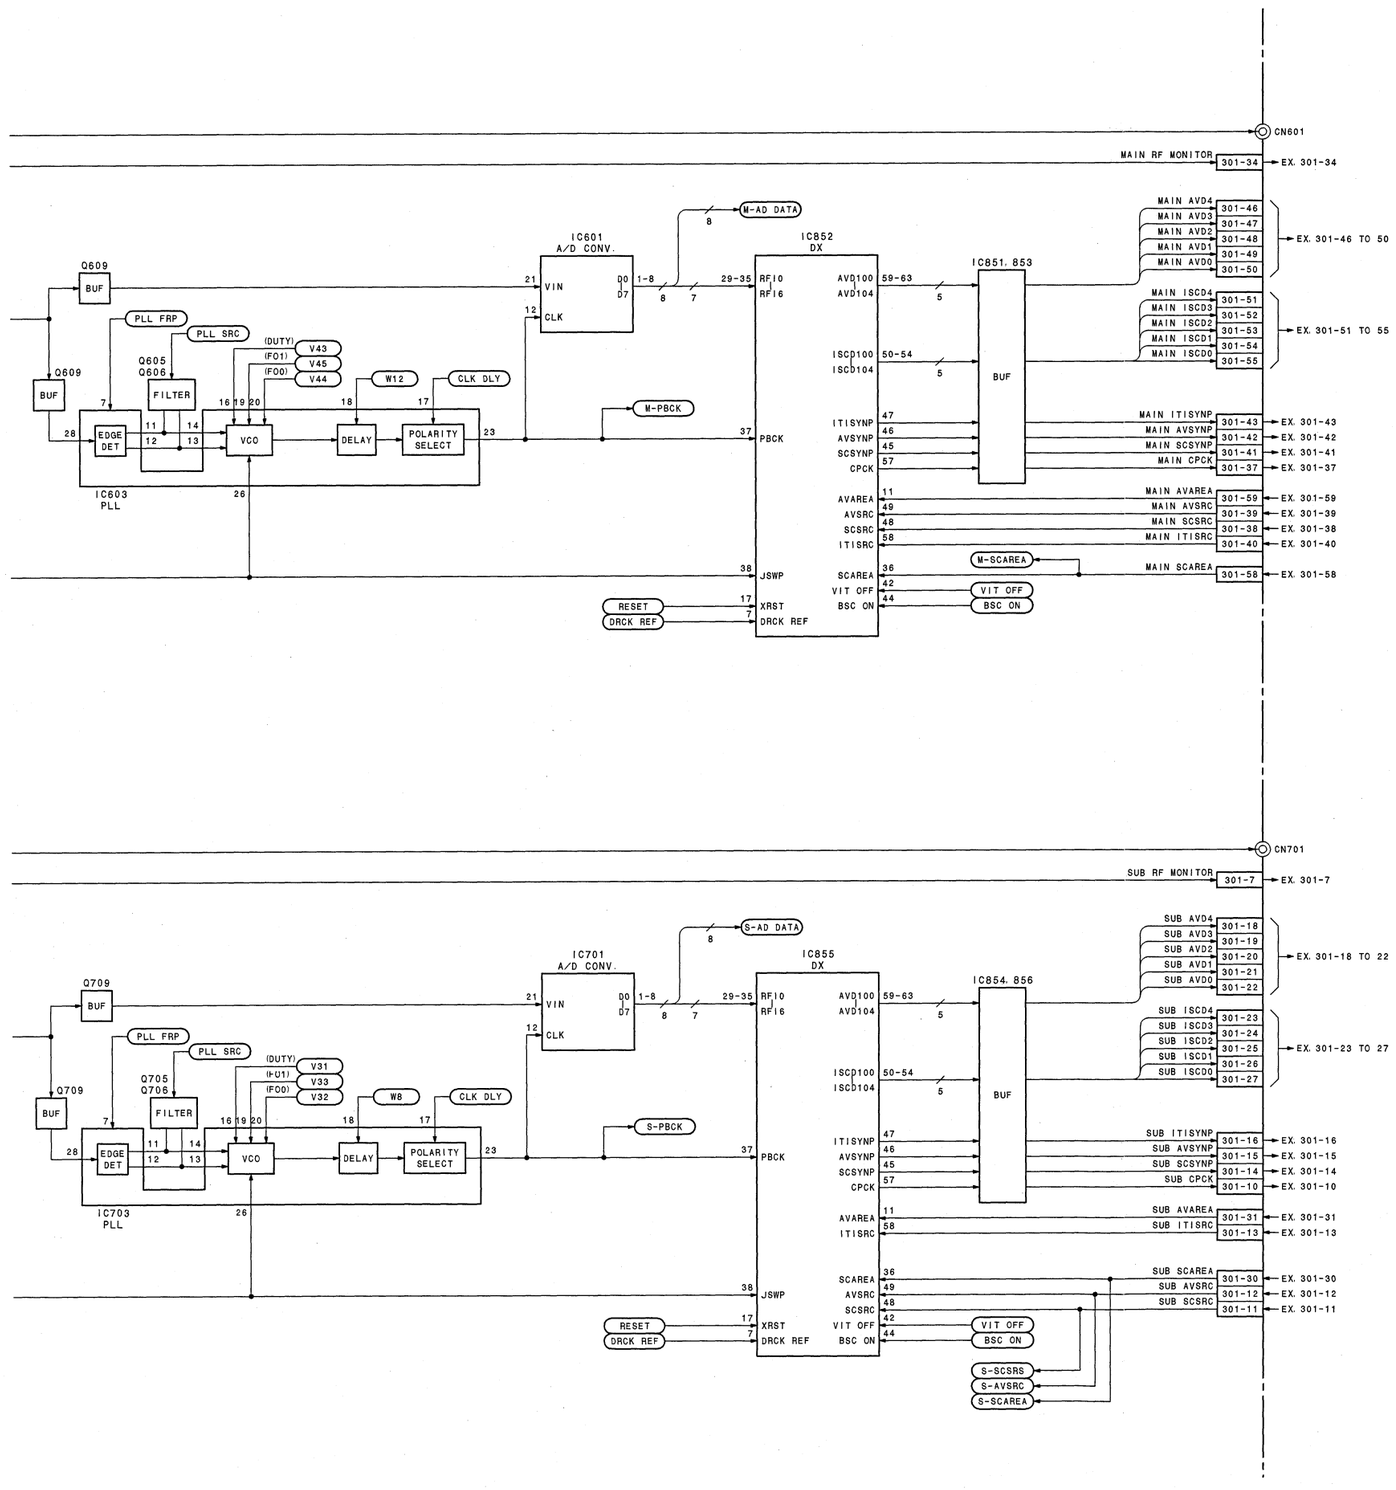

RF REC/PB, ATF detection
RP-111 (2/3)
LOT NO. 907-

RP-111 (3/3)

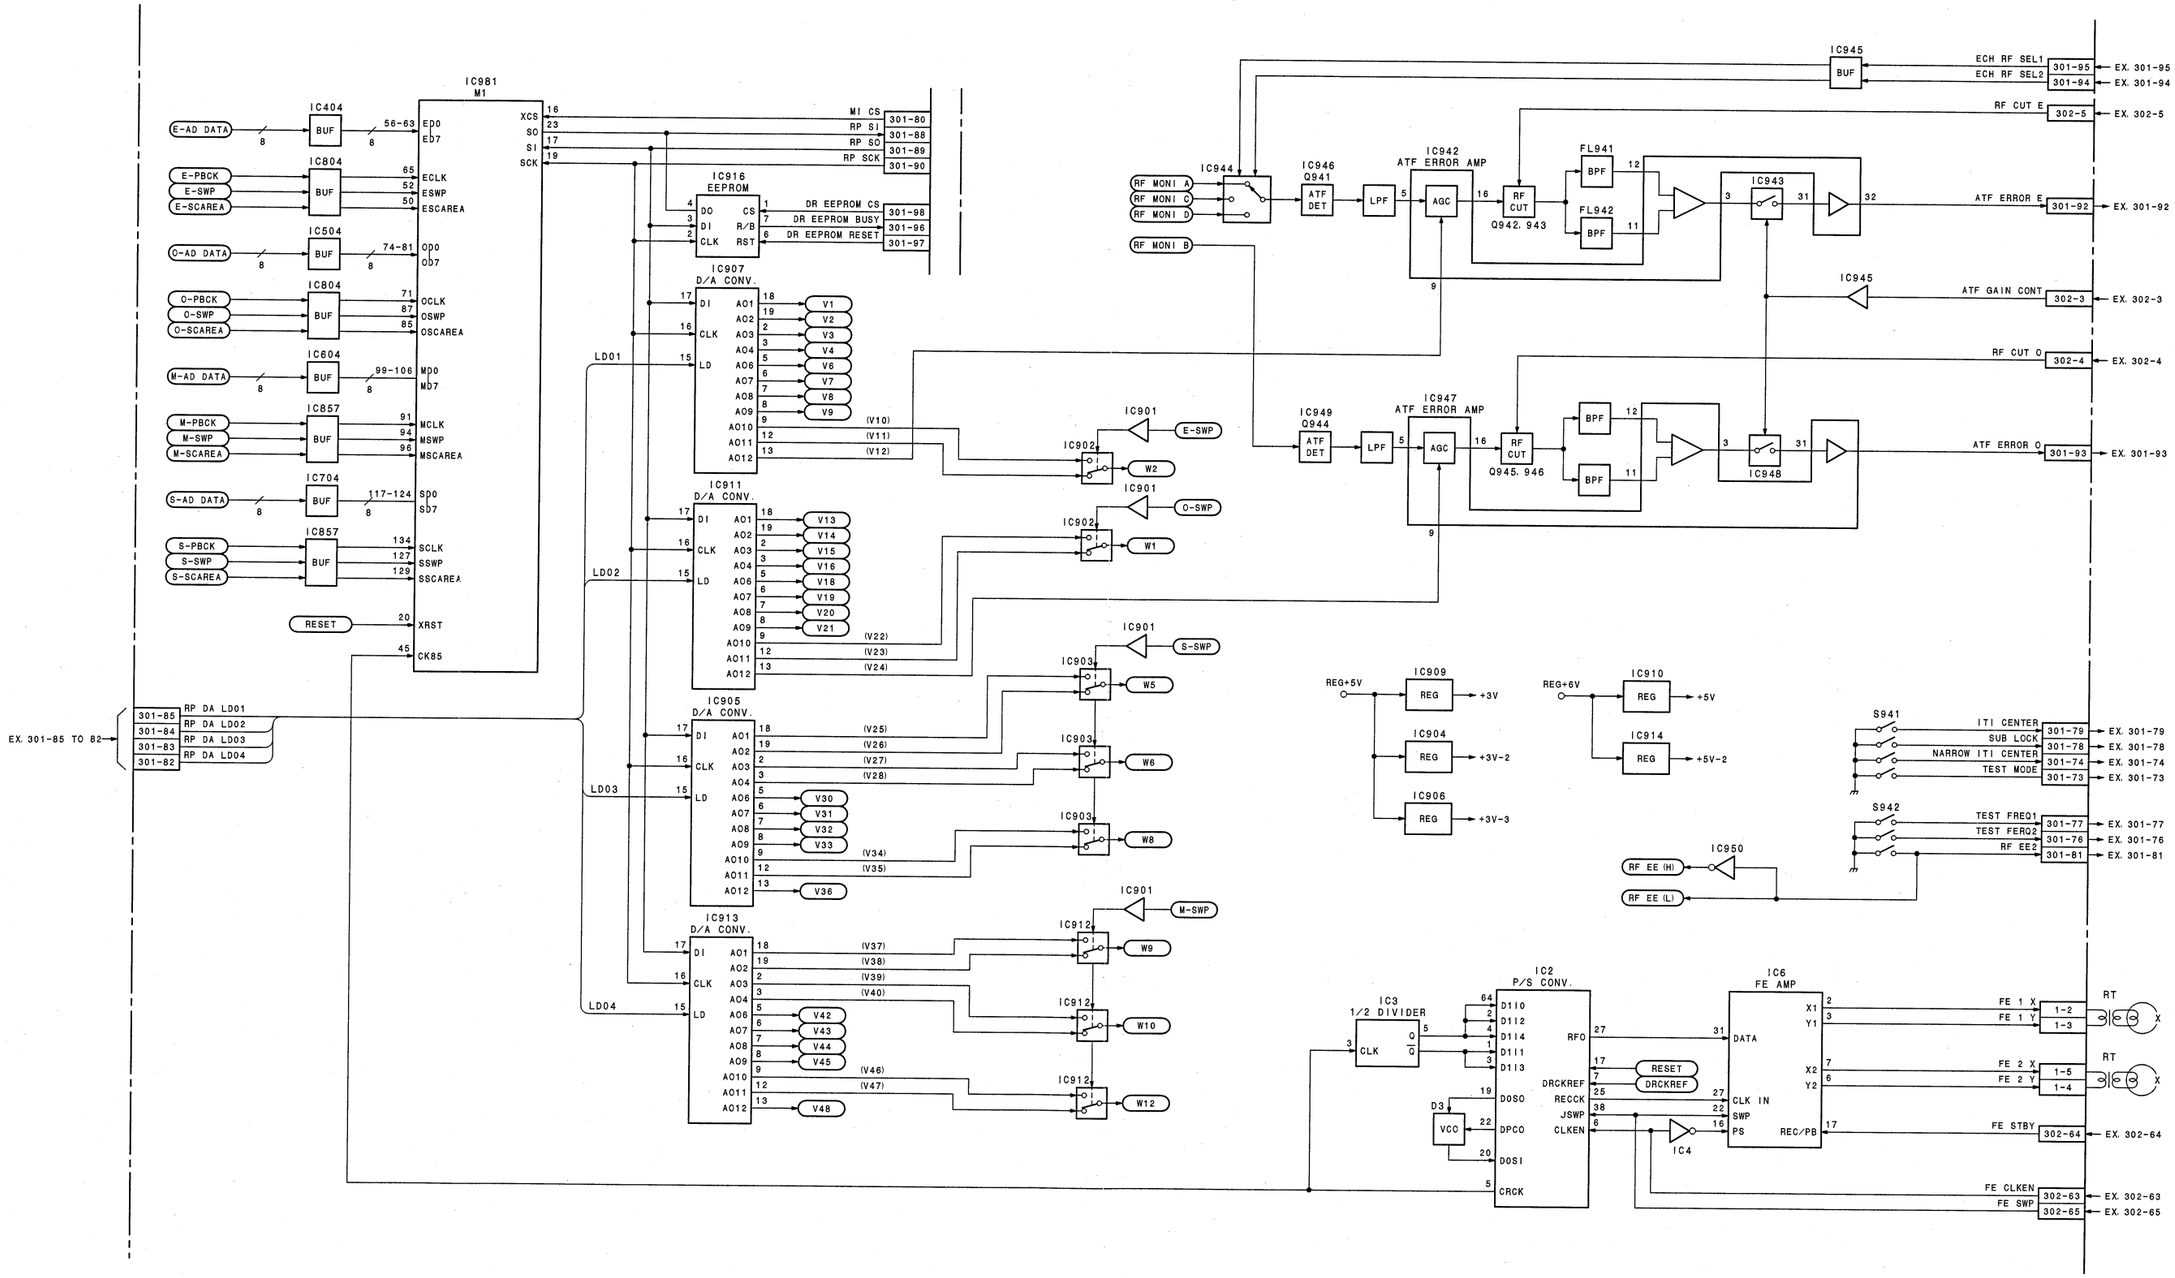

RF REC/PB, ATF detection

RP-111 (3/3)

LOT NO. 907-

13-20

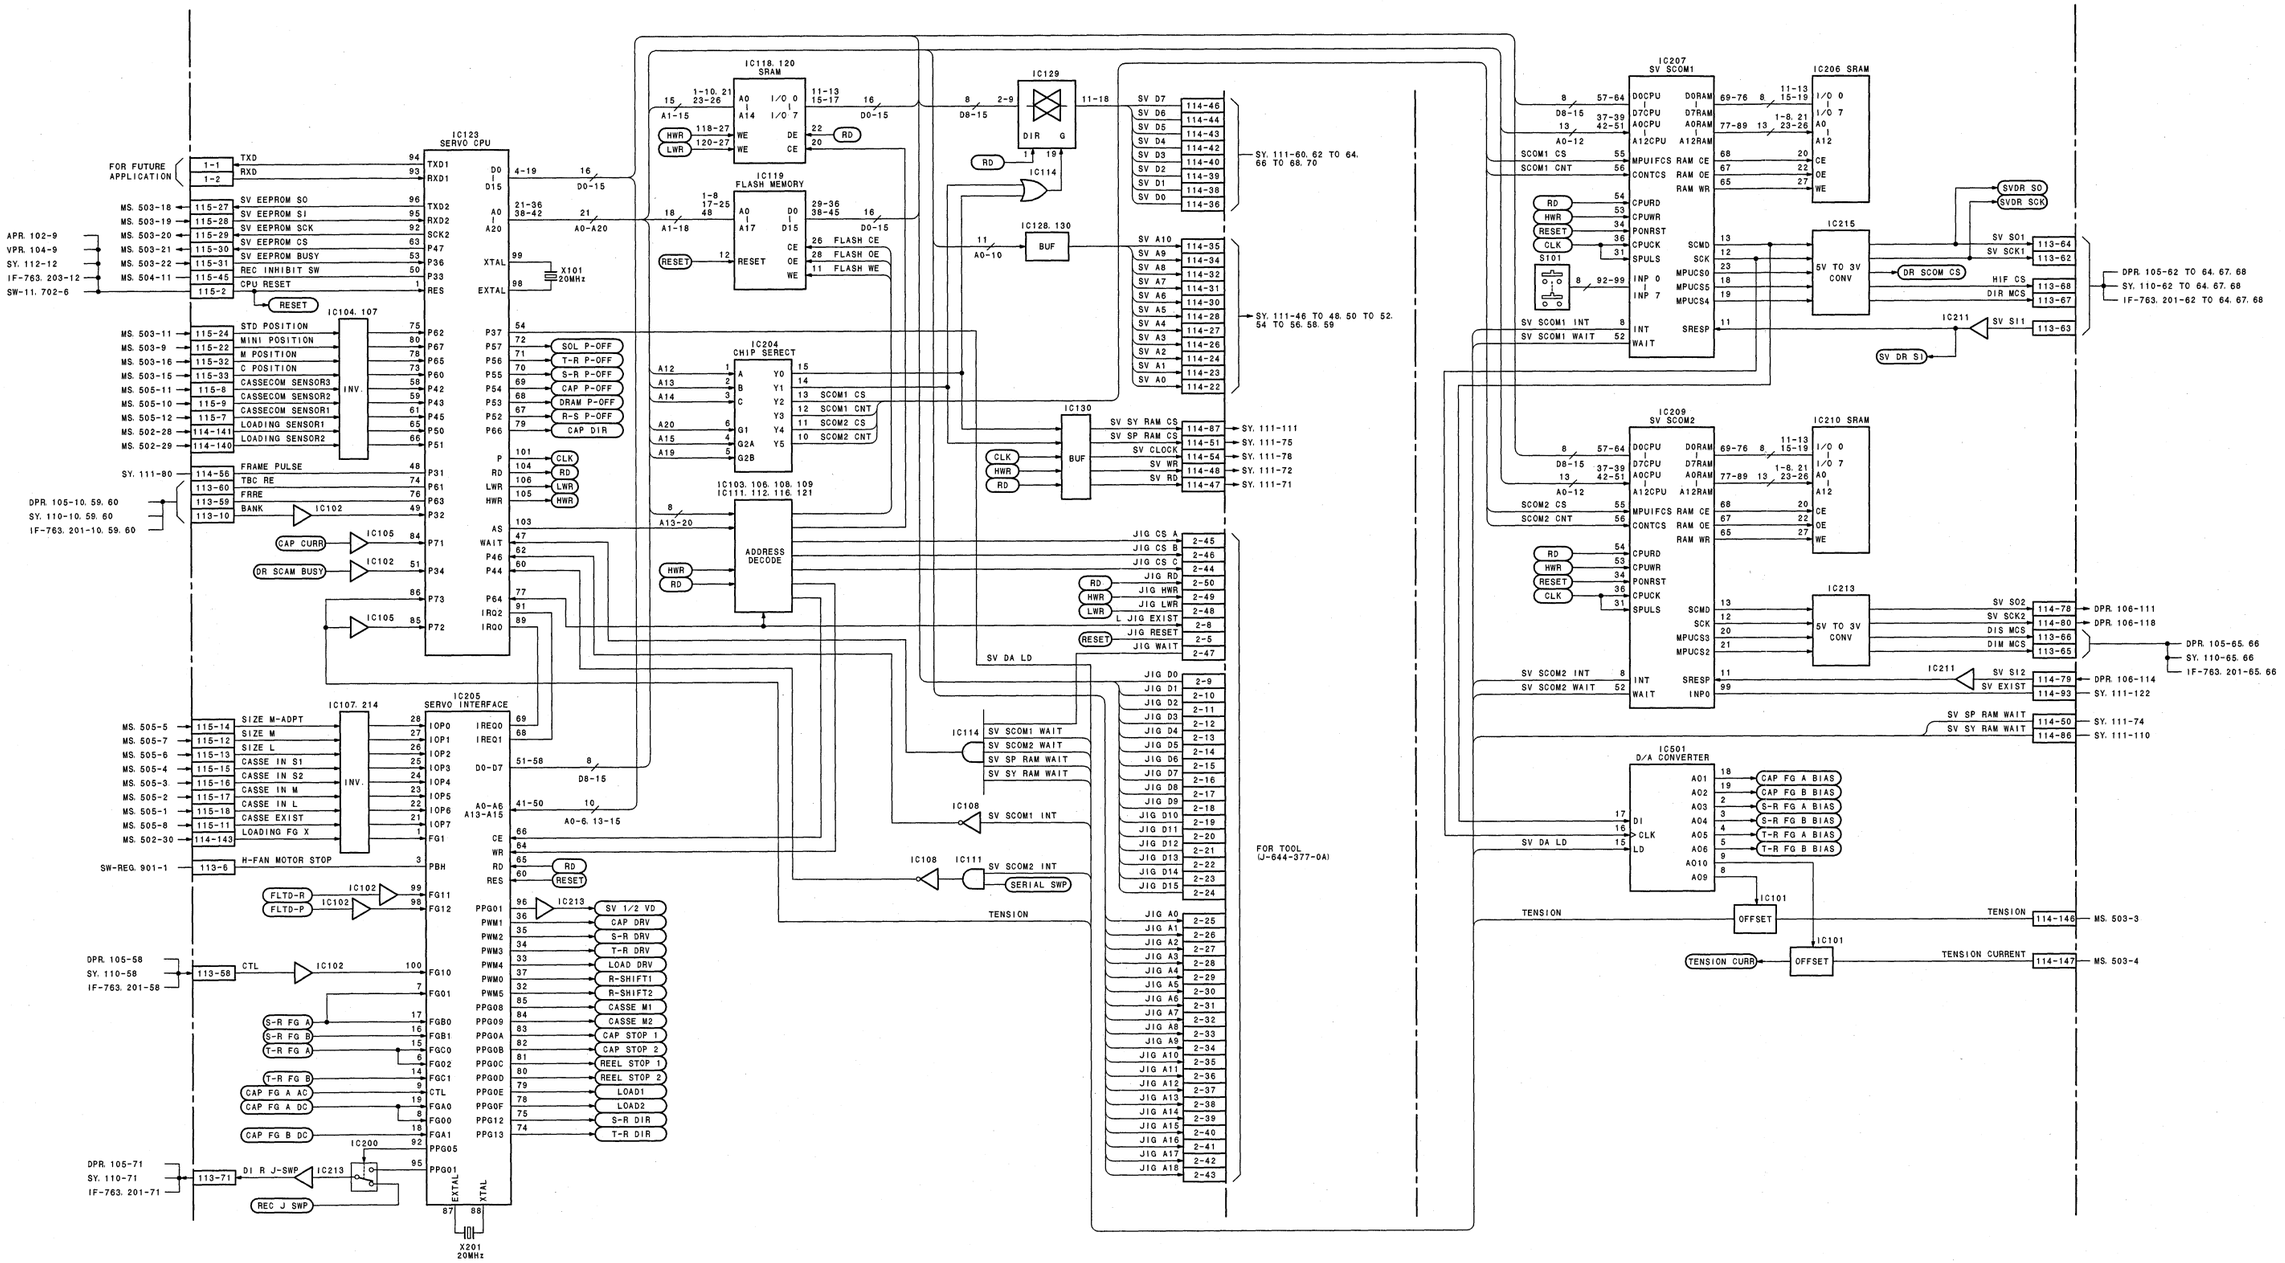

Servo/mechanism control

SV-212 (1/2)

LOT NO. 907-

SV-212 (2/2)

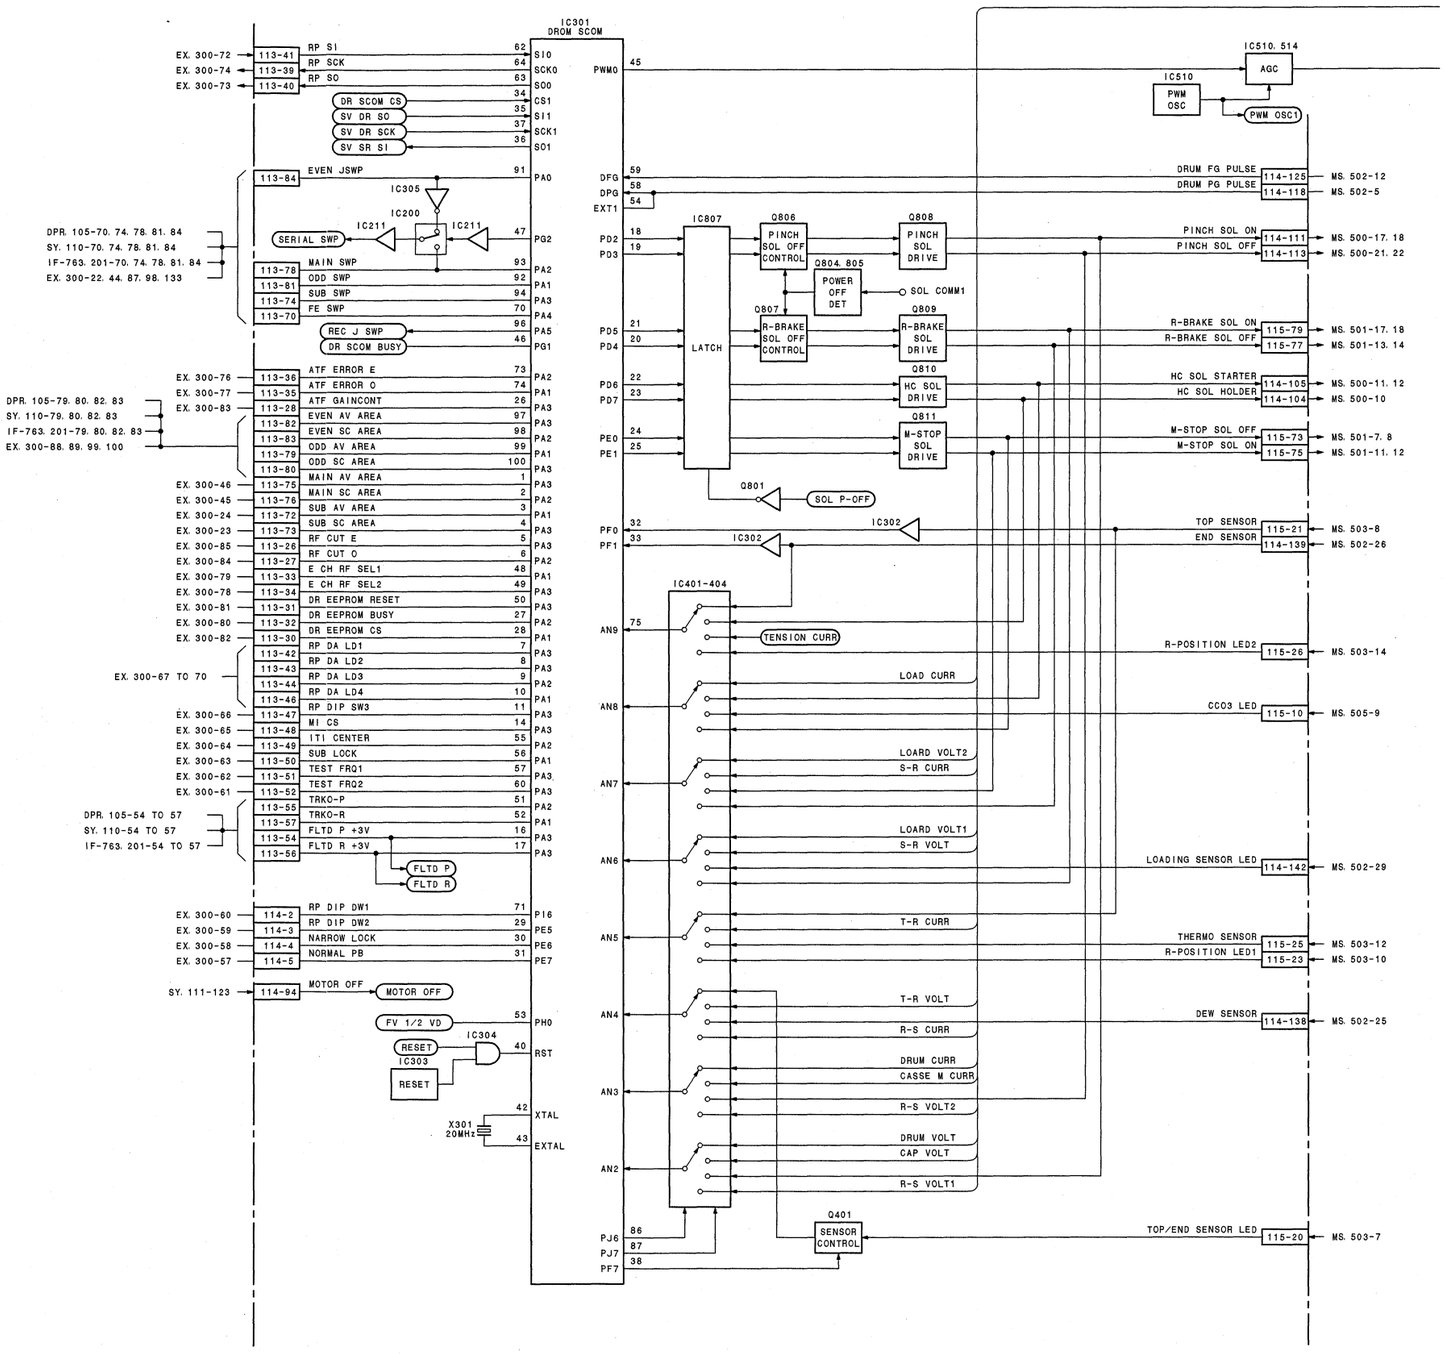

13-22

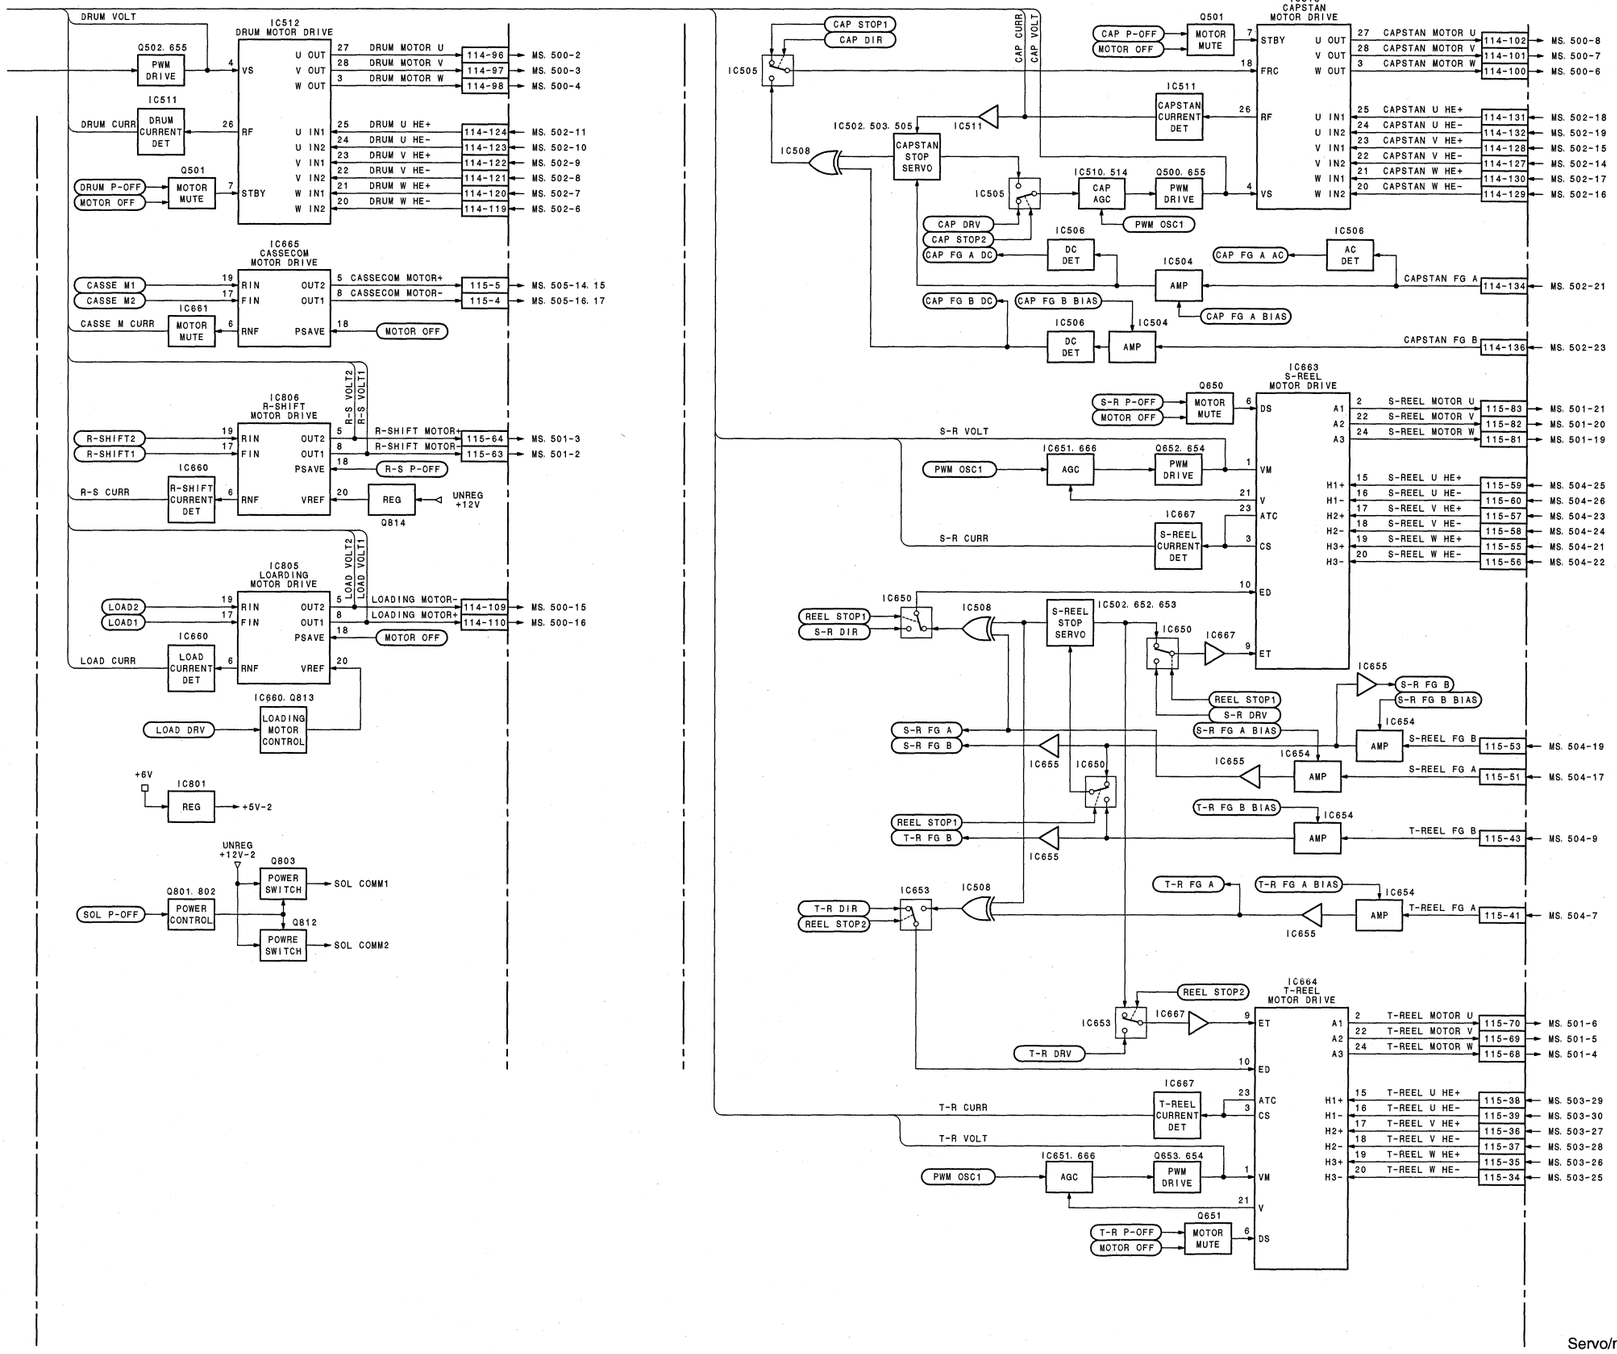

Servo/mechanism control

SV-212 (2/2)

LOT NO. 907-

SY-278 (1/2)

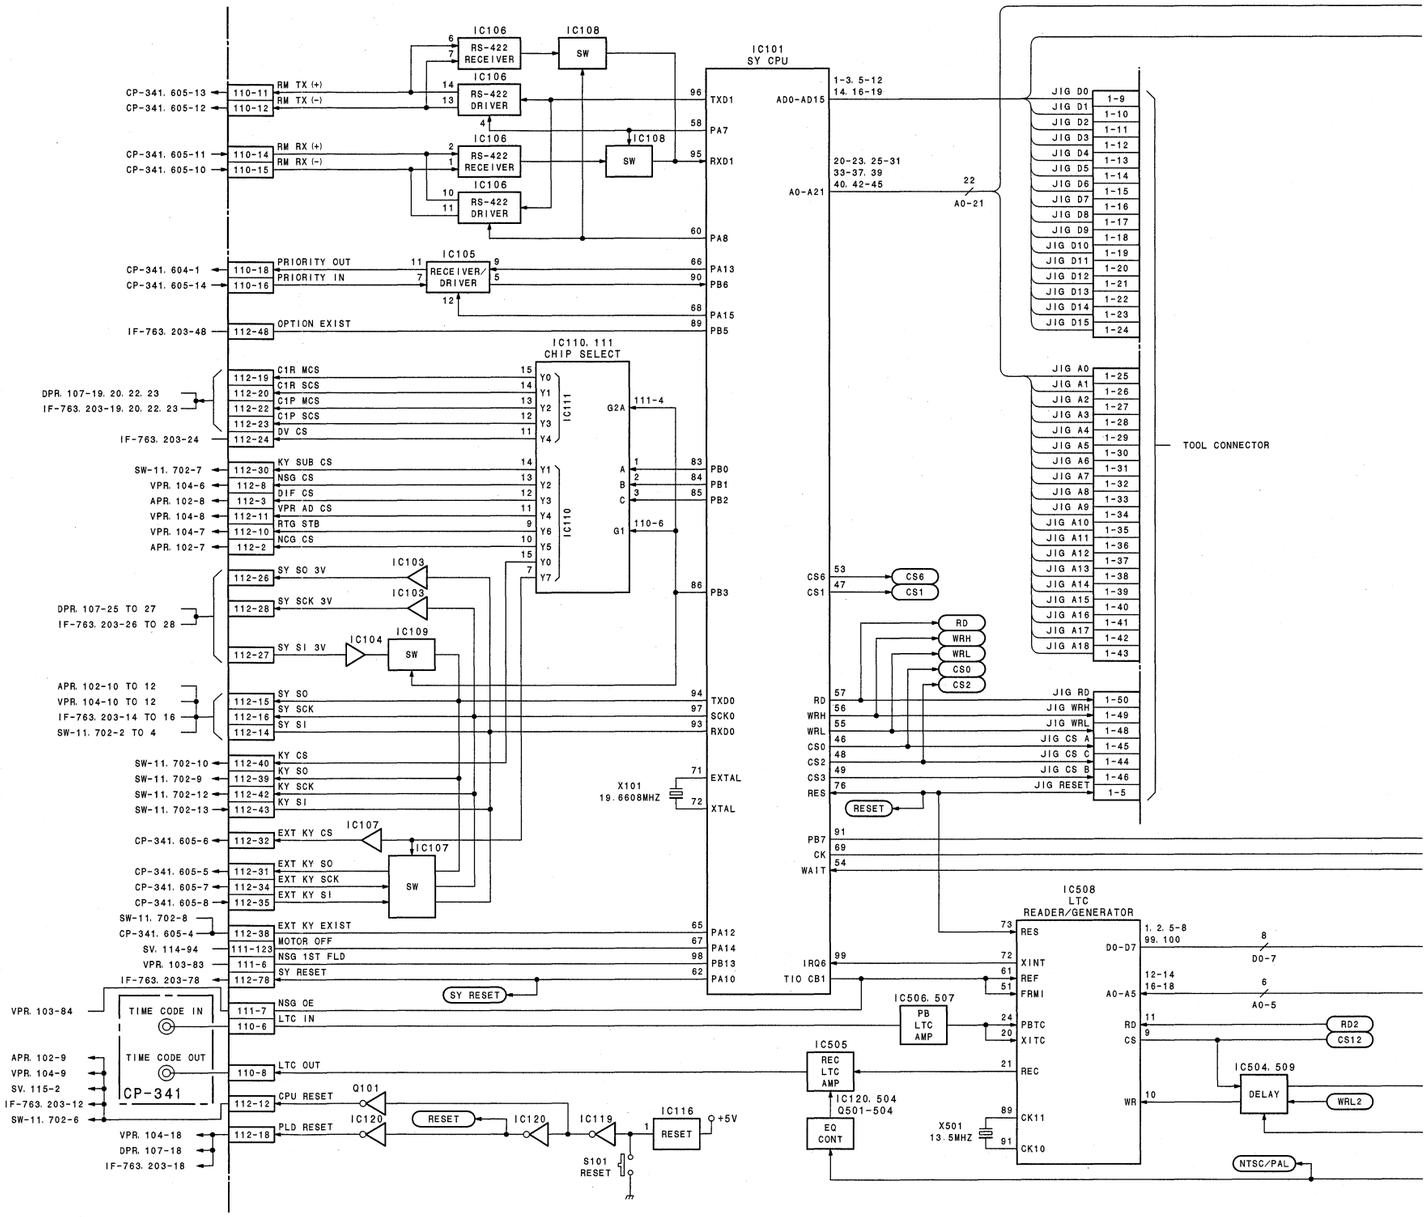

13-24

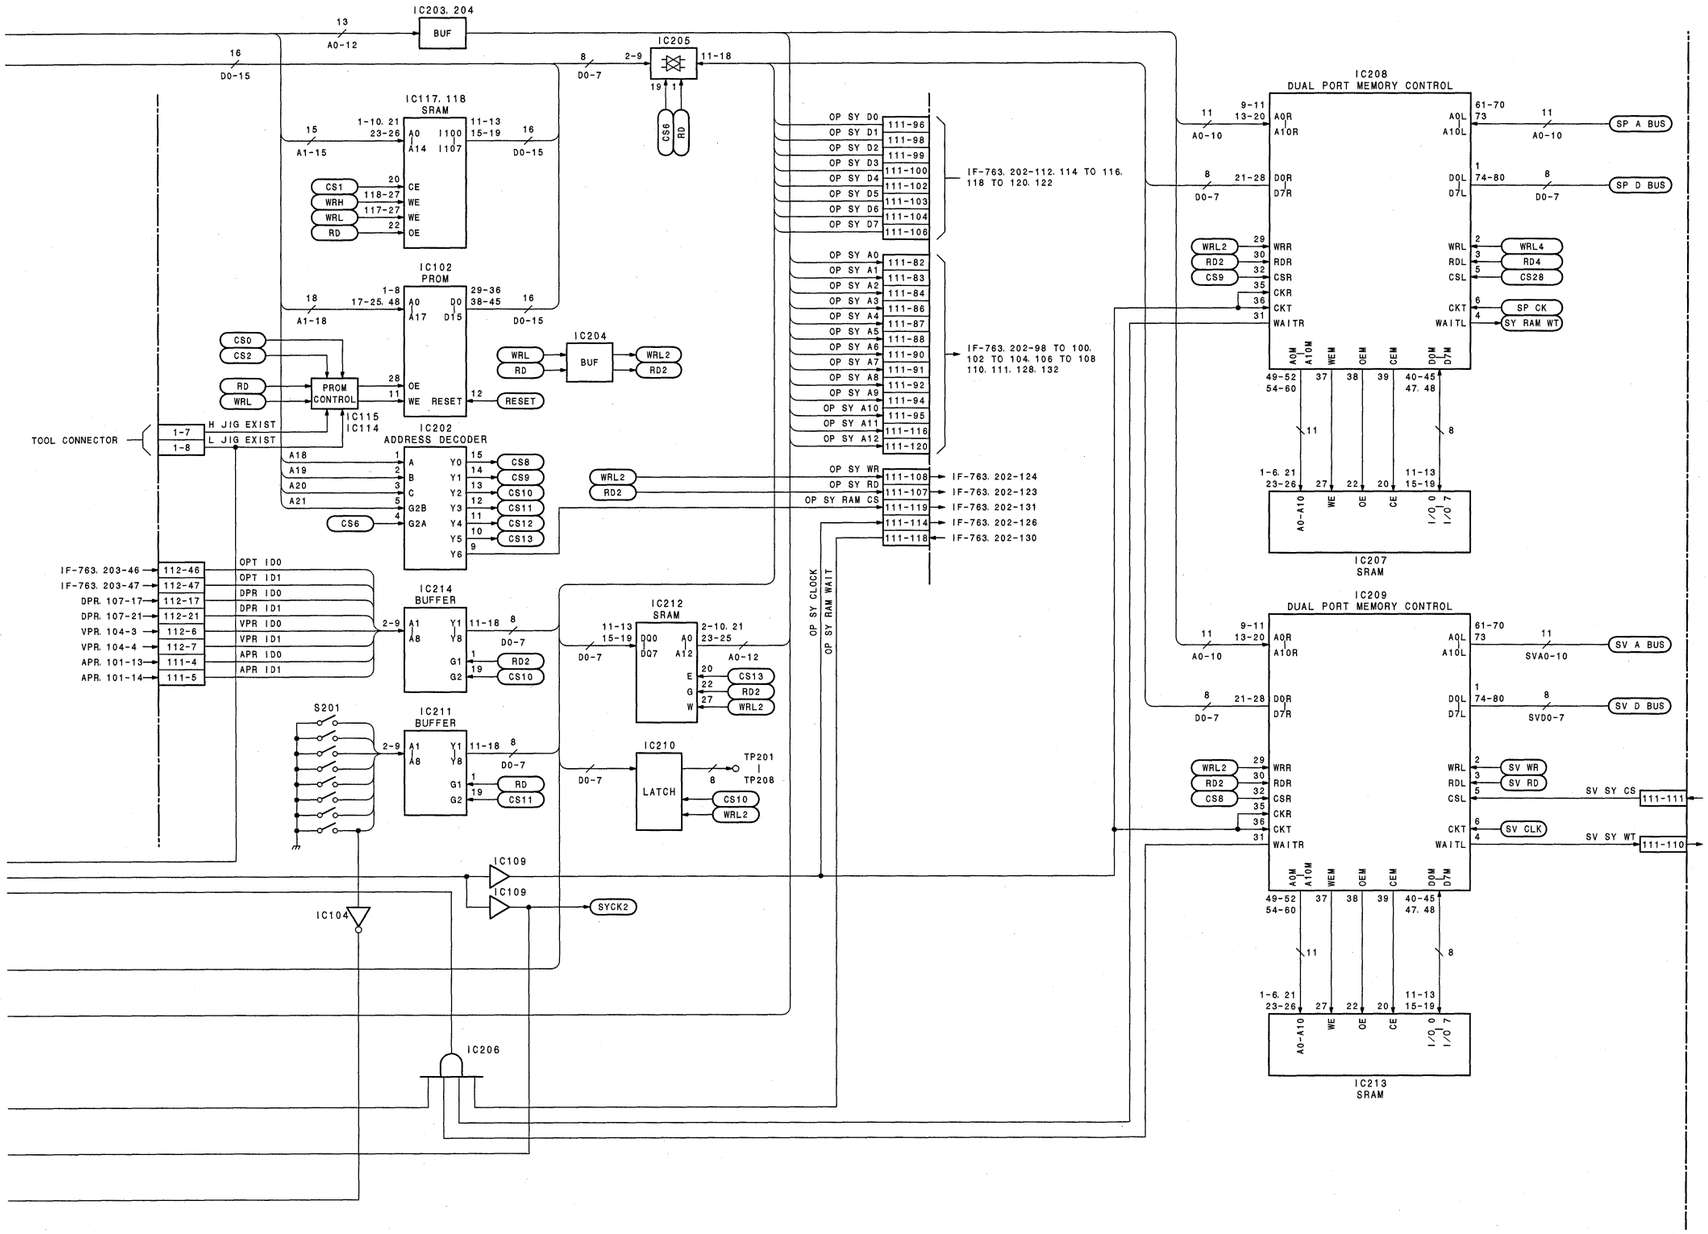
IC203, 204
BUF
A0-12
D0-15
IC205
D0-7
CS6
RD
IC117, 118
SRAM
A1-15
CS1
WRH
WRL
RD
CE
WE
OE
D0-15
IC102
PROM
A1-18
A17
D15
PROM CONTROL
CS0
CS2
RD
WRL
OE
WE
RESET
IC115
IC114
IC204
BUF
WRL
RD
WRL2
RD2
TOOL CONNECTOR
H JIG EXIST
L JIG EXIST
IC202
ADDRESS DECODER
A18
A19
A20
A21
CS6
G2B
G2A
CS8
CS9
CS10
CS11
CS12
CS13
OPT ID0
OPT ID1
DPR ID0
DPR ID1
VPR ID0
VPR ID1
APR ID0
APR ID1
IC214
BUFFER
IC211
BUFFER
S201
IC212
SRAM
IC210
LATCH
TP201
TP208
IC109
IC104
SYCK2
IC206
OP SY D0
OP SY D1
OP SY D2
OP SY D3
OP SY D4
OP SY D5
OP SY D6
OP SY D7
OP SY A0
OP SY A1
OP SY A2
OP SY A3
OP SY A4
OP SY A5
OP SY A6
OP SY A7
OP SY A8
OP SY A9
OP SY A10
OP SY A11
OP SY A12
OP SY WR
OP SY RD
OP SY RAM CS
OP SY CLOCK
OP SY RAM WAIT
IF-763. 202-112. 114 TO 116. 118 TO 120. 122
IF-763. 202-98 TO 100. 102 TO 104. 106 TO 108 110. 111. 128. 132
IF-763. 202-124
IF-763. 202-123
IF-763. 202-131
IF-763. 202-126
IF-763. 202-130
IC208
DUAL PORT MEMORY CONTROL
SP A BUS
SP D BUS
WRL4
RD4
CS28
SP CK
SY RAM WT
IC207
SRAM
IC209
DUAL PORT MEMORY CONTROL
SV A BUS
SV D BUS
SV WR
SV RD
SV CLK
SV SY CS
SV SY WT
SV. 114-87
SV. 114-86
IC213
SRAM

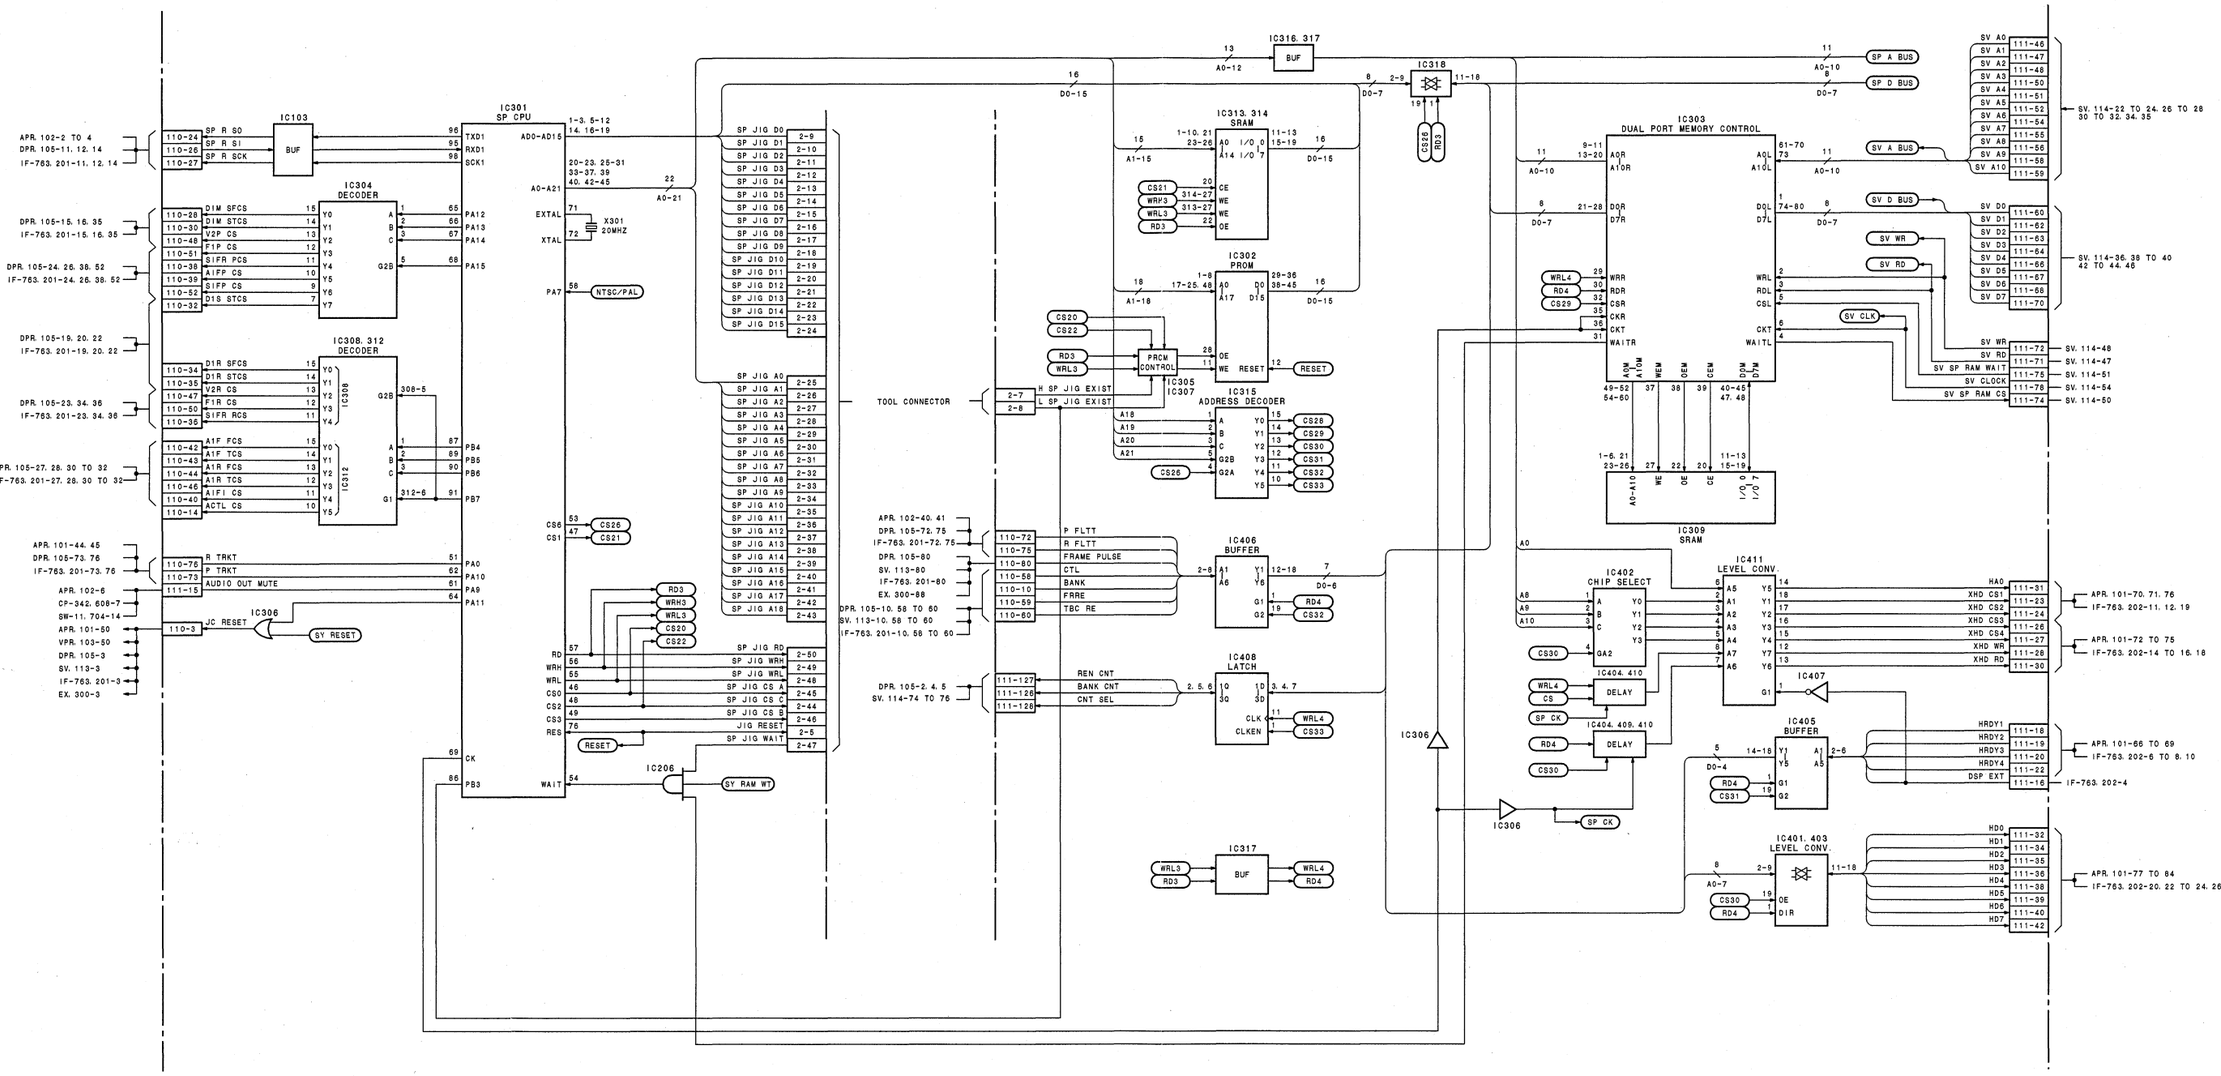

13-26

System control
SY-278 (2/2)
LOT NO. 907-

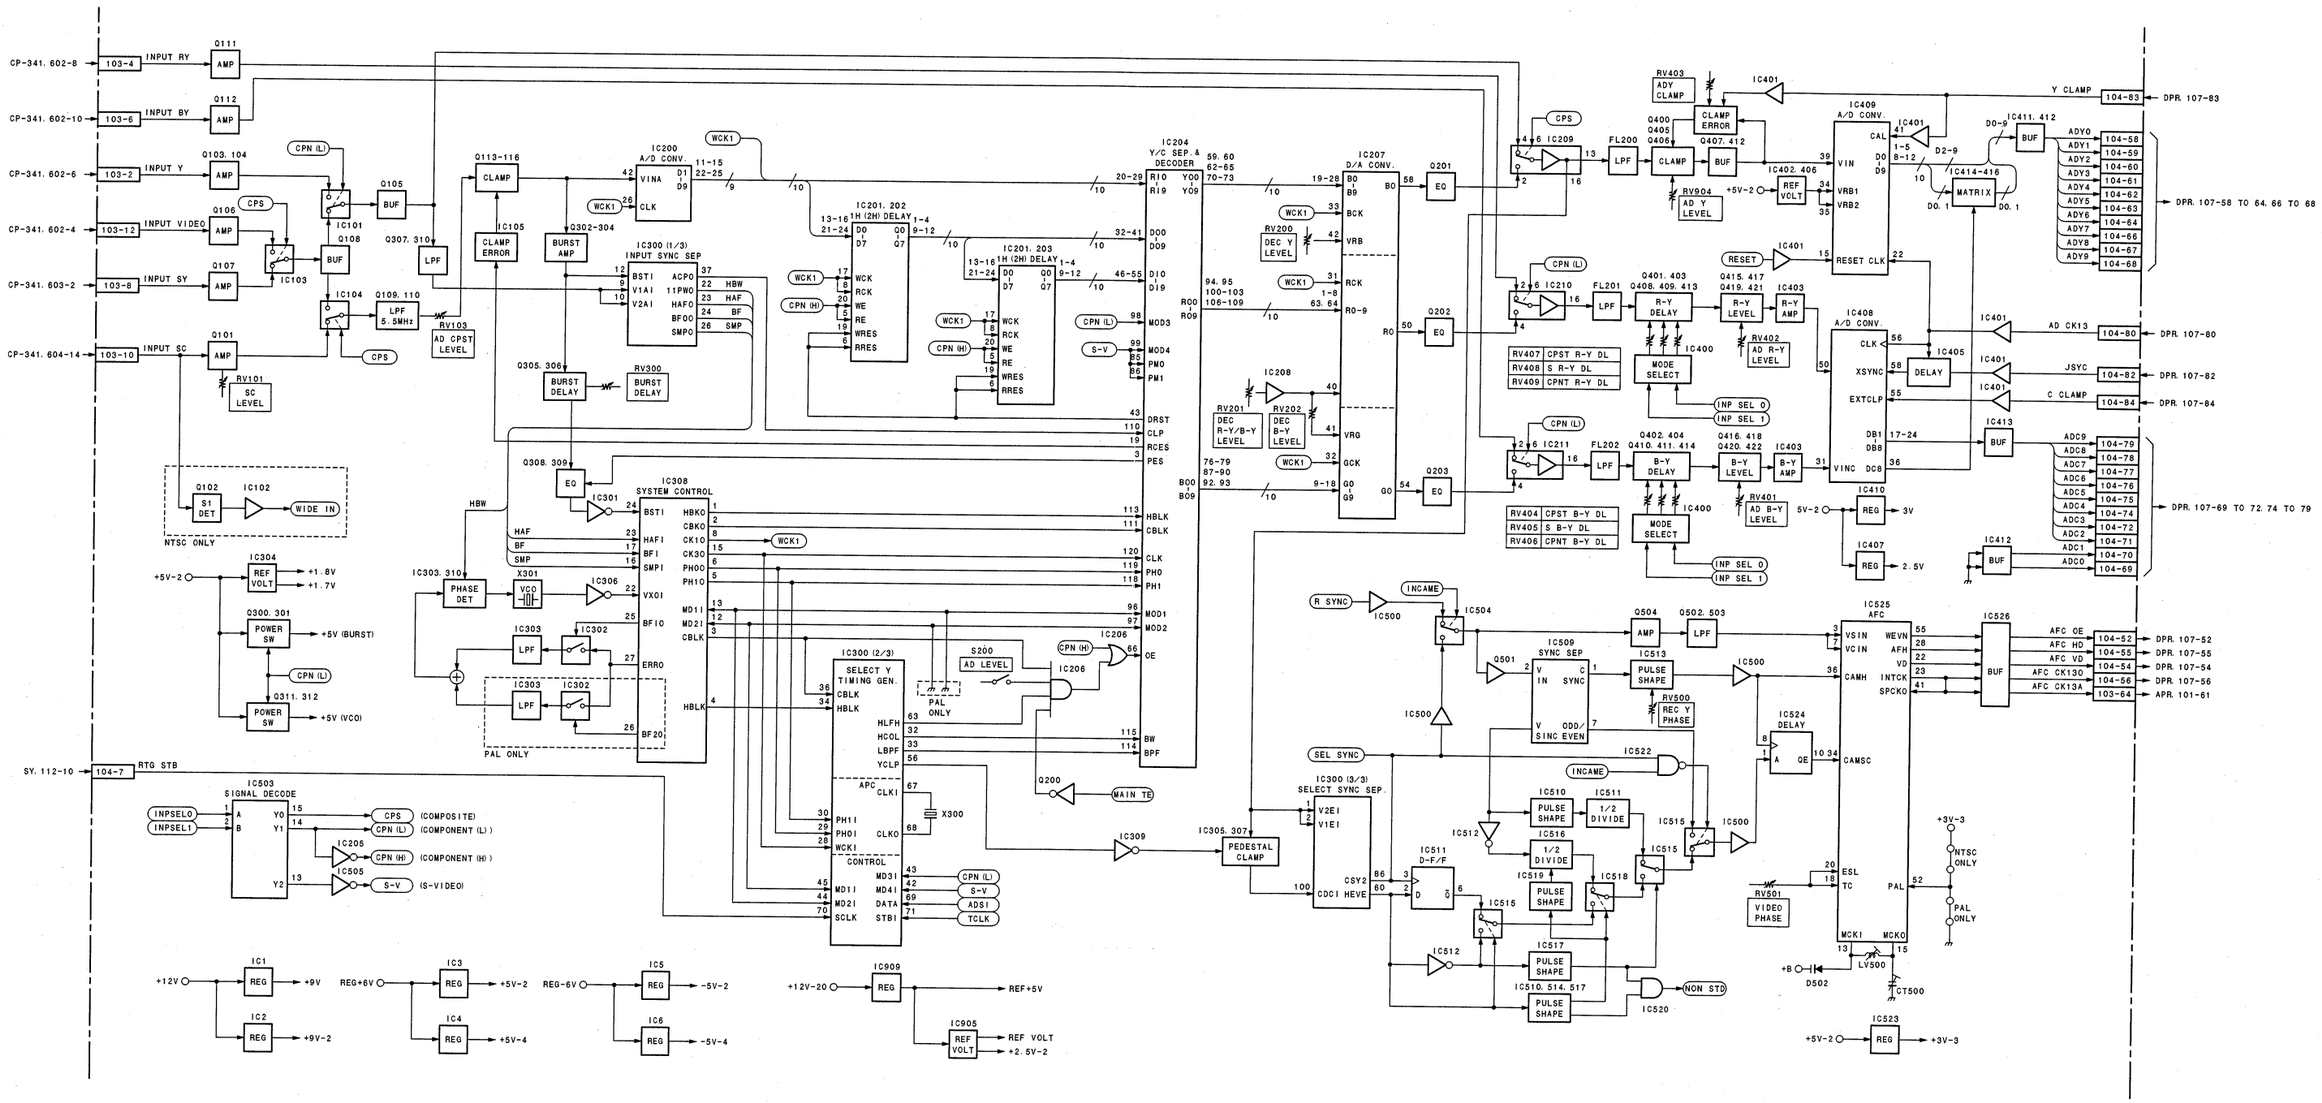

Analog video input • output process/reference

VPR-62/62P (1/2)

LOT NO. 907-

VPR-62/62P (2/2)

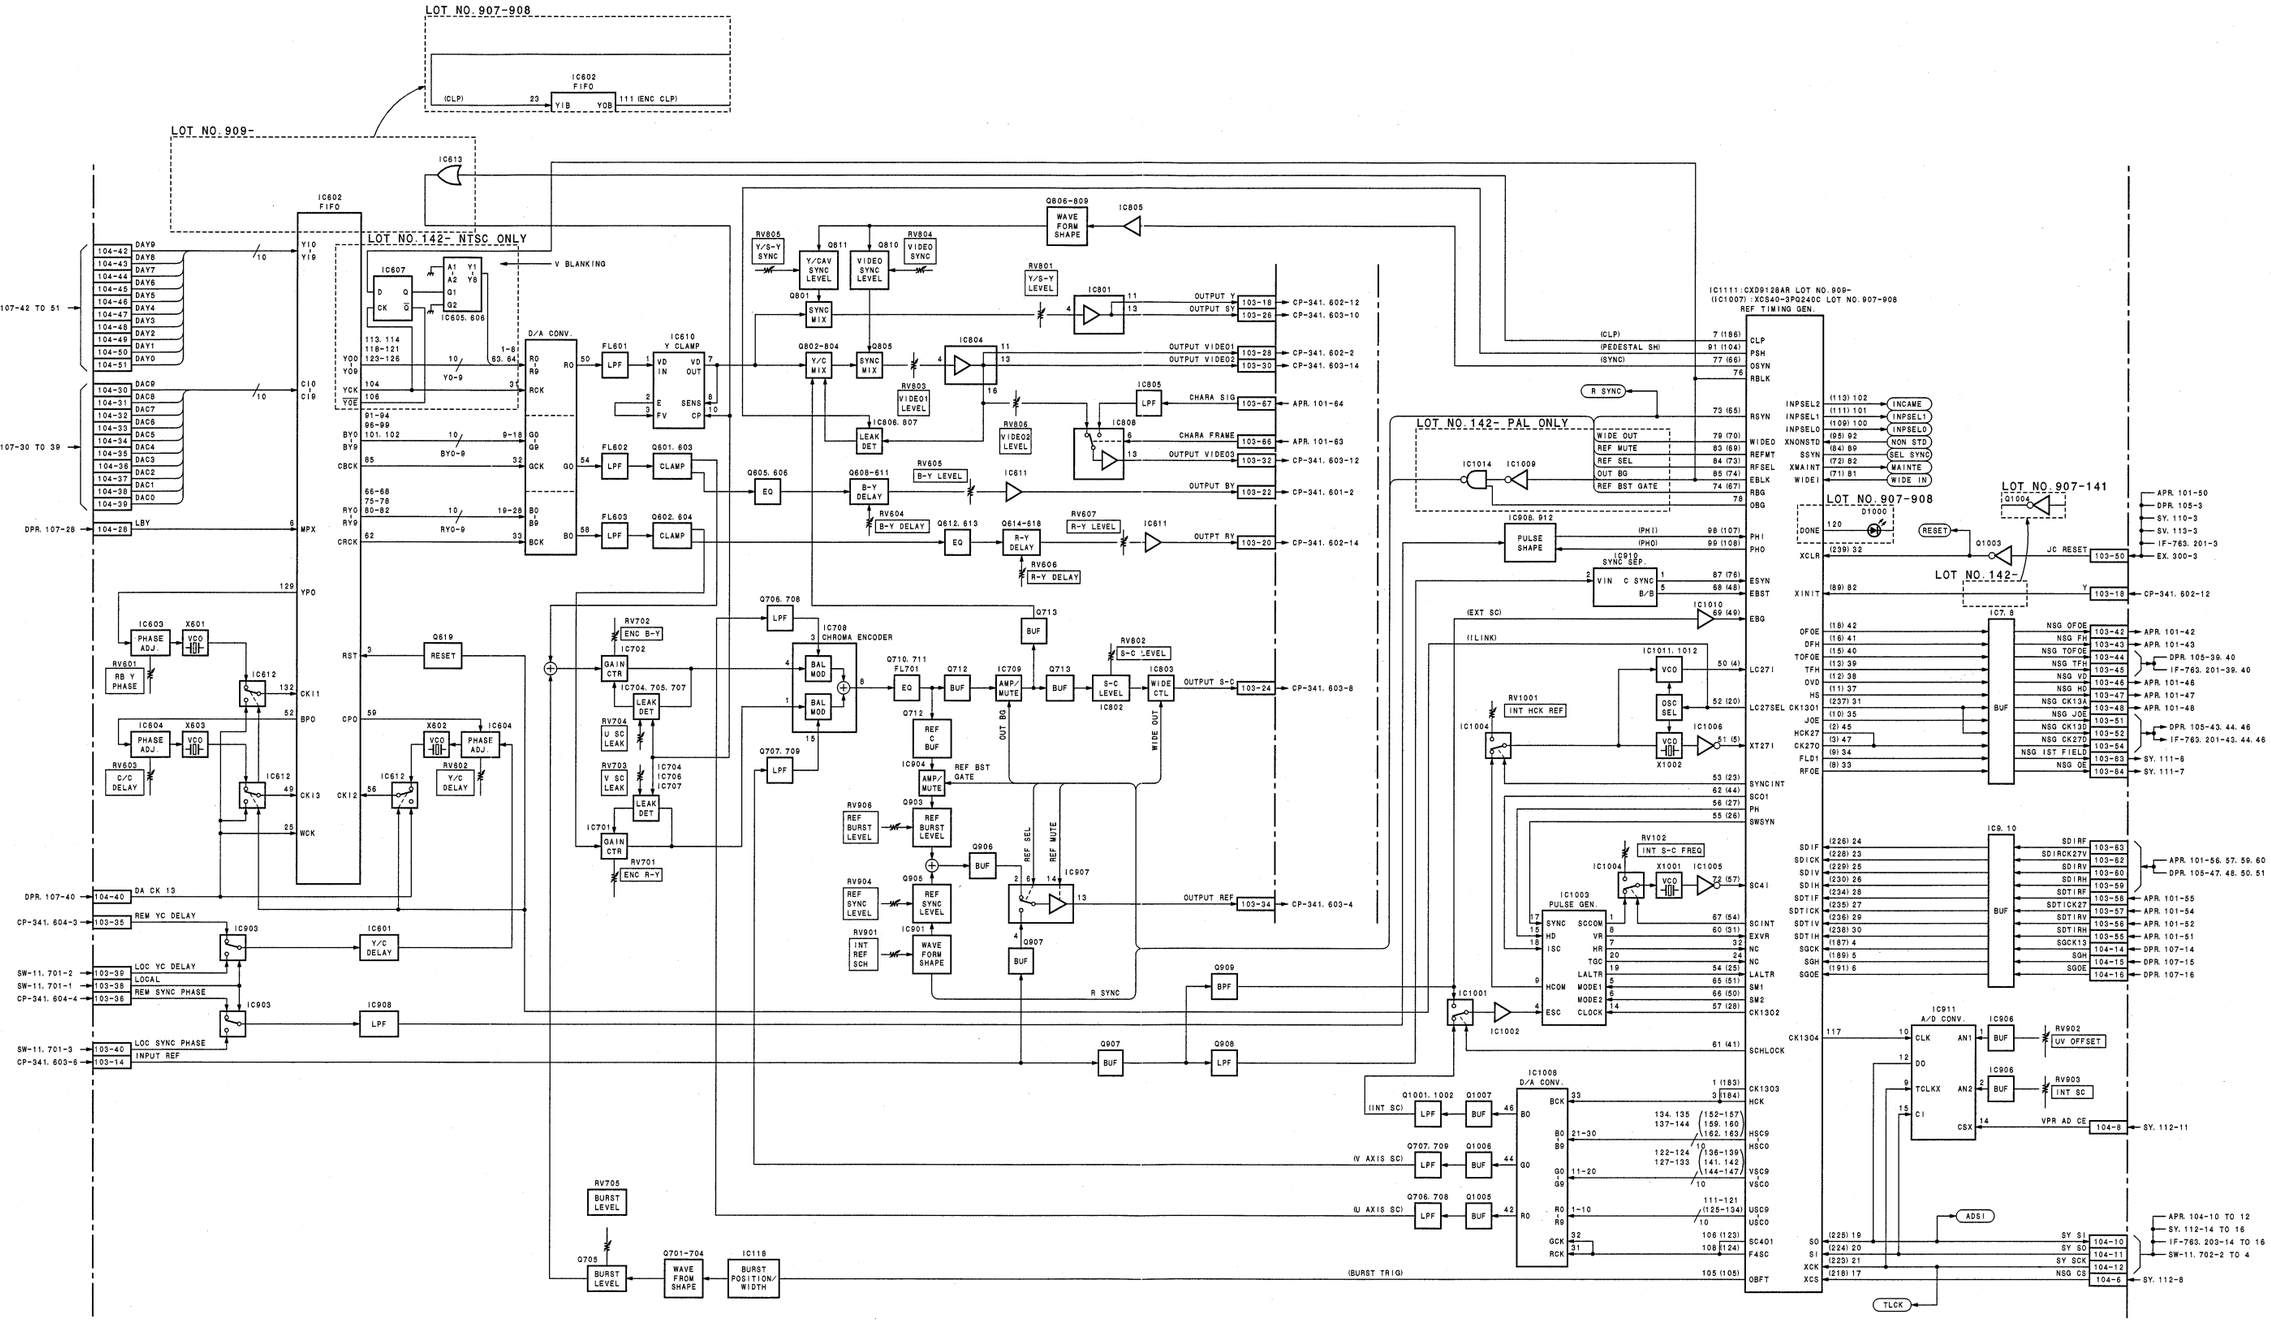

Analog video input • output process/reference

VPR-62/62P (2/2)

LOT NO. 907-

13-28

Section 14
Board Layouts

Index

Board Name	Circuit Configuration	Page
APR-45	Audio process	14-2
CC-83	Cassette compartment mode detection/intermediate board	14-6
CC-84	Cassette compartment cassette type detection	14-6
CC-85	Cassette compartment cassette in detection	14-6
CN-1863	Sensor input/output board	14-7
CN-1968	i.LINK connector board (Option: DSBK-190)	14-7
CN-2021	Intermediate board between CC-84 and CC-83	14-7
CN-2022	Intermediate board between CC-85 and CC-84	14-7
CP-341	Video/remote interface	14-8
CP-342/342A	Audio interface	14-10
DPR-136	Digital process	14-12
DU-83	Digital process	14-14
DU-84	Digital process	14-16
DU-89	Digital process	14-18
DU-95	SDI character generator	14-20
DY-15	Fluorescent display board/audio meter/input • output selection	14-21
EX-752	Intermediate board	14-22
FU-78P	Digital process (PB)	14-23
FU-78R	Digital process (REC)	14-23
HP-99	Headphone interface	14-25
IF-763	i.LINK interface board (Option: DSBK-190)	14-26
IF-778	Operation panel intermediate board (Option: DSBK-200)	14-28
KY-452	Operation panel	14-29
KY-452A	Operation panel board (Option: DSBK-200)	14-29
MB-859	Mother board	14-32
MS-64	Servo/mechanism control	14-34
PTC-100	Search dial sensor	14-37
RP-111	RF REC/PB, ATF detection	14-38
SE-521	Mode sensor/tape end sensor/loading motor FG sensor	14-42
SE-522	Tape top sensor/reel position sensor (Mini/M/Standard)	14-42
SE-525	LED signal board	14-42
SE-538	Tension sensor	14-42
SV-212	Servo/mechanism control	14-44
SW-11/11P	Switch	14-46
SW-17	Remote switch	14-47
SY-278	System control	14-48
VPR-62/62P	Analog video input • output process/reference	14-52
VR-259	Audio PB volume control	14-54
VR-260	Audio REC volume control	14-54

APR-45 (1-675-517-14)

C7	N2	C219	*K3	C374	*D4	C602	K6	C807	*C2	C1283	G4	C1707	*C3	CN701	A1	IC69	*G6	IC911	*B5	R7	*N6	R265	*L2	R431	*J4	R706	A2	R830	C1	R1135	P5	R1414	B6	R1707	A5
C8	M2	C220	*L3	C375	*D5	C603	M5	C808	*B1	C1284	E4	C1708	*C3	CN751	A1	IC70	*G2	IC912	*C5	R8	*N6	R266	*L2	R432	*J4	R707	B1	R831	C1	R1136	P4	R1415	B5	R1715	*C3
C9	N2	C221	*L3	C376	*E4	C604	L5	C809	*B2	C1285	F4	C1709	*D4	CN801	B1	IC72	G4	IC913	*E6	R25	*N2	R267	*L2	R433	*J4	R708	A2	R832	C1	R1137	*P5	R1501	*D2	R1716	*C3
C10	N2	C222	*M3	C377	*E4	C605	K5	C810	*B1	C1286	*F5	C1710	*D4	CN802	B1	IC73	F4	IC914	*M5	R26	*M2	R268	*L2	R434	*H5	R709	A1	R833	C1	R1138	P5	R1502	*D2	R1717	C4
C19	*M3	C223	*L3	C378	*D5	C606	L5	C811	C1	C1287	G5	C1711	*J2	CN1501	D1	IC74	F4	IC952	*D5	R28	*N2	R269	*L2	R435	*H5	R710	A1	R834	C1	R1139	P5	R1503	*D2	R1718	C4
C20	*N3	C224	*L3	C379	*D5	C607	L5	C812	B1	C1288	*F4	C1712	H2	CN1502	C1	IC107	P3	IC953	*C5	R29	*N2	R270	*L2	R436	*H5	R711	A2	R835	C1	R1140	P5	R1504	*D2		
C21	*N3	C225	*M3	C380	*D4	C608	K5	C813	B2	C1289	*G5	C1713	*J2	CN1551	F1	IC108	P3	IC954	*D5	R41	*N3	R271	*L2	R437	*H5	R712	*A1	R836	C1	R1141	P5	R1505	*D2	RB51	*N5
C22	*N3	C226	*M3	C381	*E5	C609	*L5	C814	*C2	C1510	D2	C1714	J2	CN1700	J1	IC116	P3	IC1201	N5	R42	*N3	R272	*L2	R438	*H5	R713	*A1	R837	C1	R1142	P5	R1506	*D2	RB201	*L4
C43	N3	C227	L3	C382	*E5	C610	*L5	C815	*C1	C1511	D2					IC117	P3	IC1507	*D3	R43	*N3	R273	*L2	R439	*H5	R714	*A2	R838	C1	R1143	N5	R1507	*D2	RB202	*M4
C44	M3	C228	K3	C383	*F5	C611	*L5	C816	*B2	C1512	*D2	CL61	F6	D2	M4	IC118	P4	IC1508	D2	R44	*N3	R274	*L2	R440	*H5	R715	A2	R839	C1	R1144	N5	R1508	*D2	RB301	*G3
C45	*N4	C229	L3	C401	H6	C612	*K5	C817	*B2	C1513	*D2	CL62	G6	D3	N4	IC119	P4	IC1557	*E3	R99	*N3	R275	*M2	R441	H5	R717	*A4	R840	C1	R1145	N5	R1509	*D2	RB653	*D4
C46	*N4	C230	L3	C402	H6	C613	L5	C818	B2	C1514	D2	CL63	G6	D57	P6	IC120	P4	IC1558	E2	R101	*N5	R276	*L2	R442	*H5	R718	*A5	R841	*B2	R1146	N5	R1510	*C2	RB701	*B2
C47	*M4	C231	M3	C403	*J5	C614	L5	C819	*C2	C1515	*D2	CL64	G6	D61	*F6	IC201	L4	IC1700	C4	R103	*N5	R277	*M2	R443	*H5	R719	*A5	R842	B1	R1201	*N5	R1511	*C2	RB702	*B2
C48	*M4	C232	L3	C404	*J5	C615	K5	C820	*C2	C1516	*D2	CL65	G6	D102	P4	IC202	L4	IC1701	*K1	R105	*P2	R278	*M2	R444	*H5	R720	A5	R846	G5	R1202	*N5	R1512	*D1	RB703	*B1
C49	*N4	C233	M3	C405	*L5	C651	M5	C821	*B2	C1517	*D2	CL66	G6	D103	P4	IC203	L3	IC1702	J2	R106	*P2	R279	*M2	R445	*H5	R721	*A5	R848	B2	R1203	P5	R1513	*D2	RB704	*B5
C50	*M4	C234	M3	C406	J6	C701	*A6	C822	B2	C1518	*D2	CL67	G5	D301	*D6	IC204	L3			R107	*N6	R280	*M2	R446	*H5	R722	*A5	R913	*M5	R1204	P5	R1514	*D2	RB705	*B5
C51	*N4	C235	*L3	C407	*J5	C702	*L5	C823	*B2	C1519	*D2	CL68	G5	D351	*D5	IC205	L3	L61	H2	R108	*N6	R281	*L2	R447	*H4	R723	*A5	R953	*C5	R1205	P6	R1515	*D2	RB751	*A2
C52	*M4	C236	*L3	C408	J6	C703	*A6	C824	*C2	C1520	*C2	CL69	G4	D501	M5	IC206	M3	L63	*F6	R109	*P2	R282	*L2	R448	*H4	R724	*A5	R955	*D5	R1206	P6	R1516	*D2	RB752	*A2
C53	*N4	C237	*L3	C409	*J5	C704	*L5	C825	B2	C1521	D2	CL70	G4	D502	N5	IC207	L2	L301	*E5	R110	*P2	R283	*L2	R449	*H4	R725	*A5	R956	*D5	R1207	P5	R1517	*D2	RB753	*A2
C54	*M4	C238	*M3	C410	*J5	C705	*A2	C826	B2	C1522	C2	CL71	G4	D503	M5	IC208	L2	L303	*G3	R125	*P2	R284	*L2	R450	H3	R726	*A4	R980	*C5	R1208	P5	R1518	*D2	RB801	*B2
C55	N4	C239	*L3	C411	*J5	C706	G1	C827	B2	C1523	*D2	CL72	G4	D504	M5	IC209	M2	L401	H6	R126	*P2	R285	*L2	R451	*H4	R729	*A5	R1001	*N3	R1209	P6	R1519	*C2	RB802	*B2
C56	N4	C240	*L3	C412	J4	C707	*A2	C828	*B2	C1524	*D2	CL73	G4	D505	*M6	IC210	M2	L402	J4	R128	*P2	R286	*L2	R452	*H4	R730	*A5	R1002	*N3	R1210	P6	R1520	*D2	RB803	*C2
C57	N4	C241	*L3	C413	J4	C708	A2	C829	*B2	C1525	*D2	CL74	F4	D506	*M6	IC211	L1	L403	H6	R129	*P2	R287	*M2	R453	*H5	R731	*A4	R1003	*N3	R1217	*P6	R1521	D1	RB951	*C5
C58	M4	C242	*M3	C414	*J4	C709	*A2	C830	*C2	C1526	*C2	CL75	F4	D601	L5	IC212	L1	L404	H4	R141	*P3	R288	*M2	R455	*H4	R751	*B6	R1004	*N3	R1219	*P5	R1522	D1	RB953	*C5
C59	N4	C243	L2	C415	*J4	C710	B1	C831	*C2	C1527	*D2	CL76	F4	D602	L5	IC213	L1	L451	*J3	R142	*P3	R289	*L1	R456	*H4	R752	*A6	R1005	*N3	R1221	*P6	R1523	D1	RB954	*C5
C60	N4	C244	L2	C416	J4	C711	A1	C832	B2	C1528	*D2	CL77	F4	D603	*L5	IC214	M1	L452	*H3	R143	*P3	R290	*L1	R457	M5	R753	*A6	R1006	*N3	R1222	*P6	R1524	*D1	RB956	*C5
C61	N4	C245	L2	C417	*J4	C712	A1	C833	*B1	C1529	*D2	CL78	F4	D801	B2	IC215	L2	L453	*K4	R144	*P3	R291	*M1	R458	M5	R754	*A6	R1007	*N3	R1223	*P6	R1525	D1	RB957	*C5
C62	*N4	C246	M2	C418	J4	C713	A2	C834	C2	C1530	*D2	CL79	F4	D1501	D2	IC216	L2	L454	*K3	R199	*P3	R292	*M1	R459	M5	R755	*A6	R1008	*M3	R1225	P6	R1526	D1	RB1503	*C2
C63	*N4	C247	*L1	C419	*J4	C714	*B2	C835	*C1	C1531	*D2	CL80	F6	D1551	F2	IC217	M2	L455	*J5	R201	*K4	R308	E6	R460	M5	R756	*A6	R1009	*M3	R1226	*P6	R1527	D1	RB1504	*C2
C64	N4	C248	*L1	C421	J4	C715	*A1	C836	*C1	C1532	*C2	CL85	H5	D1700	A5	IC218	M2	L456	*K5	R202	*L4	R309	E6	R461	*B5	R757	*A6	R1010	*M3	R1227	*P5	R1528	D1	RB1505	*D2
C65	N4	C249	*L1	C422	H4	C716	*B1	C837	C1	C1533	*D2	CL89	G6			IC303	E6	L501	A4	R203	*L4	R310	*E6	R462	*B5	R758	*A6	R1011	*M3	R1229	*P5	R1529	D1	RB1553	*E2
C66	N4	C250	*M1	C423	*J4	C717	*A2	C838	*B1	C1534	*D2	CL90	G6	E61	F6	IC305	D6	L502	A3	R204	*L4	R311	*D6	R463	B6	R759	*A6	R1012	*N3	R1230	*P6	R1530	C1	RB1554	*E2
C67	N5	C251	*L1	C424	H6	C718	A2	C839	B1	C1535	*D2	CL91	H5	E201	K3	IC306	*E6	L507	A4	R205	*L3	R312	*D6	R464	*B5	R760	*A6	R1013	*N3	R1231	*P6	R1531	D1	RB1555	*E2
C68	M4	C252	*L1	C425	H6	C719	*A1	C840	C1	C1536	*D2	CL401	J5	E202	M3	IC307	*D6	L601	L6	R206	*L3	R313	*D6	R465	B6	R761	*B6	R1014	*M3	R1232	*P6	R1532	D1		
C69	*N5	C253	*L1	C426	*H5	C720	A1	C841	C1	C1537	*D2	CL402	J5	E602	K6	IC314	*G3	L602	K6	R207	*L3	R314	*D6	R466	B6	R762	*A2	R1015	*M3	R1251	G2	R1533	D1	RV1	M3
C70	*N5	C254	*M1	C427	*H5	C721	*A1	C842	C1	C1538	C2	CL403	J5	E701	F1	IC315	*F3	L701	B1	R208	*M3	R315	*D6	R472	B5	R763	*A2	R1016	*N4	R1252	*G3	R1534	C1	RV4	N3
C71	*N5	C255	L1	C428	H6	C722	A2	C843	B1	C1539	D1	CL404	J5	E703	A4	IC316	*F3	L702	*A2	R209	*K3	R316	*D6	R473	B5	R764	*A2	R1017	*M4	R1254	G2	R1535	D1	RV101	P3
C107	P2	C256	L1	C429	*H5	C723	*A1	C844	C1	C1540	D1	CL406	J5	E704	A1	IC317	*G3	L801	B1	R210	*L3	R317	*G3	R482	B5	R765	*A2	R1018	*N4	R1255	G2	R1536	D1	RV104	P3
C108	P2	C257	L1	C430	H6	C724	*A1	C912	*B5	C1541	D1	CL407	J5	E801	B2	IC353	*E5	L1700	D3	R211	*L3	R318	F3	R483	B5	R766	*A2	R1019	*M4	R1256	G2	R1537	D1	RV201	L1
C109	P2	C258	M1	C431	*H5	C725	B1	C913	*B5	C1542	D1	CL408	J4	E802	D2	IC354	D4	L1701	H2	R212	*M3	R319	F3	R489	J3	R767	A2	R1020	*N4	R1258	G2	R1538	E1	RV202	L1
C110	P2	C259	*L2	C432	*H5	C726	*A2	C952	*D5	C1543	D1	CL409	J4	E1501	E1	IC355	*D5			R213	*L3	R323	*G3	R490	J3	R768	*A2	R1021	*M4	R1259	G2	R1539	D1	RV203	L1
C119	*P3	C260	*L2	C433	*H5	C727	A2	C953	*C5	C1544	D1	CL410	J4	E1551	F1	IC356	*E5	LV61	F6	R214	*L3	R324	*H4	R491	J3	R769	*A2	R1022	*N4	R1261	G4	R1540	D1	RV204	M1
C120	*P3	C261	*M2	C434	H4	C728	*A2	C1201	*P5	C1545	D1	CL411	J4			IC357	*E5	LV301	D6	R215	*L3	R325	*F3	R492	K5	R770	A1	R1023	*N4	R1262	G4	R1541	D1	RV701	A2
C121	*P3	C262	*M2	C435	H4	C729	*A1	C1202	P5	C1546	D1	CL413	J3	FB701	*B1	IC401	B5	LV351	D5	R216	*M3	R326	*G4	R493	K5	R771	A1	R1024	*M4	R1266	F6	R1542	D1	RV751	A1
C122	*P3	C263	*L2	C436	*H4	C730	*B2	C1203	P6	C1547	D1	CL414	J3	FB702	*B1	IC402	*L5			R217	*L3	R327	*G3	R494	K4	R772	A1	R1025	*M4	R1267	F6	R1543	*D2	RV801	C2
C143	P3	C264	*L2	C437	*H4	C731	B2	C1204	P6	C1548	D1	CL415	H5	FB703	B2	IC403	J5	PS701	*A6	R218	*L3	R328	*F3	R501	*D5	R773	*A1	R1026	N4	R1268	F6	R1551	*F2	RV1501	E1
C144	P3	C265	*L2	C438	H4	C732	*B2	C1205	N5	C1549	D1	CL416	H5	FB751	*A2	IC404	*F4	PS702	*L6	R219	*L3	R329	*F3	R502	M5	R774	*A1	R1027	M4	R1269	F6	R1552	*F2	RV1551	F1
C145	*P4	C266	*M2	C439	*H4	C733	*B2	C1206	*N5	C1550	D1	CL417	H5	FB752	*A1	IC405	*J4			R220	*M3	R330	*H3	R503	M5	R775	*A2	R1028	N4	R1270	F6	R1553	*F2		
C146	*P4	C267	*L2	C440	H4	C738	*A5	C1207	*N5	C1560	F2	CL418	H5	FB753	*A1	IC406	J4	Q51	*P6	R221	*L3	R331	*G3	R504	N5	R776	A1	R1029	M4	R1271	G6	R1554	*E2	TP301	D6
C147	*P4	C268	*L2	C441	*H4	C739	*B5	C1208	*P5	C1561	F2	CL420	H5	FB754	*A1	IC407	H5	Q53	*P6	R222	*L3	R332	*E6	R505	N5	R777	A1	R1030	N4	R1273	*F5	R1555	*E2	TP351	E5
C148	*N4	C269	*M2	C442	*G4	C740	*A5	C1209	*P5	C1562	*E2	CL421	H5	FB801	*C2	IC408	*G4	Q54	*P6	R223	*L3	R380	*M5	R506	M5	R778	A1	R1031	N4	R1274	*F5	R1556	*E2	TP701	A2
C149	*P4	C270	*M2	C443	H4	C741	*A5	C1210	*P5	C1563	*E2	CL422	H4	FB802	*C2	IC409	*H4	Q55	*P6	R224	*M3	R381	*M5	R507	M5	R779	A1	R1032	N4	R1275	*F5	R1557	*E2	TP751	A1
C150	*P4	C271	*L2	C444	G4	C742	*A4	C1211	P5	C1564	F2	CL423	H4	FB803	*C2	IC410	H4	Q601	L5	R225	*L3	R389	*D5	R508	*D5	R780	A1	R1033	M4	R1276	*F5	R1558	*E2	TP801	B1
C151	*P4	C272	*L2	C445	G4	C743	*A4	C1212	P5	C1565	*E2	CL424	H4	FB804	*C2	IC412	*J5	Q602	K5	R226	*M3	R390	*D5	R509	*C3	R781	A1	R1034	N4	R1277	*F5	R1559	*E2	TP802	B1
C152	*N4	C273	*M2	C447	*J5	C744	*A4	C1213	P5	C1566	*E2	CL426	H3	FB805	*C2	IC413	*J5	Q603	L5	R227	*L3	R391	*E5	R510	*C3	R782	A1	R1035	M5	R1278	*F5	R1560	*E2	TP1501	C2
C153	*P4	C274	*L2	C448	*J5	C751	*A5	C1214	P5	C1567	*E2	CL427	H3	FB806	C1	IC414	*J5	Q651	M5	R228	*L3	R392	*D5	R511	*D4	R783	A1	R1036	M4	R1279	*F5	R1561	*F1	TP1502	E1
C154	*N4	C300	E5	C454	*B5	C756	*A2	C1215	P6	C1568	*F2	CL428	H4	FB807	C1	IC415	*J5	Q652	M5	R229	*L3	R393	*D4	R512	*D4	R784	A1	R1037	*M5	R1280	*F5	R1562	*E2	TP1551	E2
C155	P4	C301	*E5	C455	*J3	C757	*A2	C1216	P6	C1569	*E2	CL429	J5	FB808	C1	IC452	*H2	Q751	A1	R230	*L3	R394	*D5	R514	A3	R785	A1	R1038	N5	R1281	*F4	R1563	*E2	TP1552	E1
C156	P4	C302	E6	C456	*H3	C758	*A2	C1217	P6	C1570	*E2	CL430	J5	FB809	B1	IC456	*B5	Q752	A1	R231	*L3	R395	*D5	R515	A3	R786	A1	R1101	*P3	R1282	*G5	R1564	*E2		
C157	P4	C303	E6	C457	*J3	C759	A2	C1218	P6	C1571	F2	CL431	J3	FB1501	*D2	IC457	J3	Q753	A1	R232	*M3	R396	*D5	R538	B3	R787	A1	R1102	*P3	R1283	*F5	R1565	*E2	X401	*J5
C158	N4	C304	*D6	C458	*H3	C760	*A2	C1250	E5	C1572	E2	CL432	J3	FB1502	*D2	IC458	H3	Q801	*C3	R233	*L3	R397	*D5	R539	B4	R788	*A5	R1103	*P3	R1284	*F6	R1566	*E2		
C159	P4	C305	*E6	C459	*J3	C761	*A2	C1251	*G3	C1573	*E2	CL433	H5	FB1503	*C1	IC463	K4	Q802	*C2	R234	*L3	R398	*D5	R546	A4	R789	*A4	R1104	*P3	R1285	*F5	R1567	*E2	*:B SIDE	
C160	P4	C306	*D5	C460	*H3	C762	*A2	C1252	G3	C1574	*E2	CL434	H4	FB1504	D1	IC464	K3	Q803	*B2	R235	*L3	R401	*J6	R547	A3	R790	A2	R1105	*P3	R1286	*G6	R1568	*E2		
C161	P4	C307	*D5	C464	*K3	C763	*A2	C1253	G3	C1575	*E2	CL435	H4	FB1505	D1	IC469	K5	Q804	C1	R236	*M3	R402	B6	R548	A4	R801	*B1	R1106	*P3	R1287	C6	R1569	*E2		
C162	*P4	C308	*D6	C465	*K3	C764	*A2	C1254	H3	C1576	*E2	CL451	B5	FB1506	D1	IC470	K4	Q805	C1	R237	*L2	R403	B6	R549	A4	R802	*C2	R1107	*P3	R1290	B6	R1570	E1		
C163	*P4	C309	*D6	C466	*J4	C765	*A2	C1255	*H3	C1577	*F2	CL453	B5	FB1551	*F2	IC471	*J3	Q806	C1	R238	*L2	R404	B5	R553	B3	R803	*C2	R1108	*P3	R1291	B6	R1571	E1		
C164	P4	C310	*D6	C467	*J3	C766	*A1	C1256	G3	C1578	*E2	CL454	B5	FB1552	*F2	IC472	*H3	Q807	B3	R239	*L2	R405	B6	R554	B4	R804	*C2	R1109	*P3	R1292	B6	R1572	E1		
C165	P4	C311	*D6	C468	*K4	C767	*A2	C1257	*F5	C1579	*E2	CL455	B5	FB1553	*E1	IC502	*M5	Q1501	*D3	R240	*L2	R406	*J5	R562	*M5	R805	*C2	R1110	*P3	R1294	G4	R1573	*F1		
C166	P4	C312	*E6	C469	*K3	C768	*A2	C1258	*G2	C1580	*E2	CL701	A6	FB1554	F1	IC503	B3	Q1502	*D2	R241	*L2	R407	*J5	R563	*M5	R806	*B2	R1111	*N3	R1295	G4	R1574	E1		
C167	P5	C313	*E5	C473	*K5	C769	*A2	C1259	E5	C1581	*F2	CL702	L5	FB1555	F1	IC504	A3	Q1503	*D2	R242	*L2	R408	*J5	R601	*K6	R807	*C2	R1112	*P3	R1299	F3	R1575	E1		
C168	P4	C314	*D6	C474	*K4	C770	*A2	C1261	F6	C1582	*E2	CL708	A4			IC507	A3	Q1504	*D1	R243	*L2	R409	*J5	R602	*L5	R808	*B2	R1113	*P3	R1300	F3	R1576	E1		
C169	*P5	C315	*D6	C475	*J5	C771	*A2	C1262	*F5	C1583	*F2	CL709	A4	FL901	*B5	IC510	B4	Q1505	D1	R244	*L2	R410	*J5	R603	*L5	R809	*B2	R1114	*P3	R1301	F3	R1577	E1		
C170	*P5	C316	*D5	C476	*J4	C772	*A2	C1263	F5	C1584	*E2	CL710	A5	FL902	*C5	IC511	B4	Q1506	C1	R245	*L2	R411	*J5	R604	*L5	R810	*C2	R1115	*N3	R1302	F3	R1578	E1		
C171	*P5	C317	*E6	C477	*K5	C773	*A1	C1264	*F5	C1585	*E2	CL711	A4			IC601	*K5	Q1507	D1	R246	*L2	R412	*J5	R605	*L5	R811	*B1	R1116	*P4	R1304	*E5	R1579	E1		
C201	*L3	C323	*G3	C478	*K5	C774	*A2	C1265	*F5	C1586	*E2	CL801	B2	IC7	N3	IC602	*L5	Q1508	C1	R247	*M2	R413	*J5	R606	*L5	R812	B1	R1117	*N4	R1354	*F5	R1580	E1		
C202	*M3	C324	*G3	C479	*H4	C775	*A2	C1266	*G6	C1587	*E2	CL802	B2	IC8	N3	IC603	*L5	Q1551	*F3	R248	*L2	R414	*J5	R607	*L5	R813	*B2	R1118	*P4	R1355	*E5	R1581	E1		
C203	*L4	C325	*G4	C480	*H4	C776	*A1	C1267	*G6	C1588	E2	CL901	C6	IC16	N3	IC651	D4	Q1552	*E2	R249	*M2	R415	*J5	R608	*K5	R814	*B2	R1119	*N4	R1356	*E5	R1582	E1		
C204	*L4	C326	*G3	C481	*H2	C777	A1	C1268	*G6	C1589	E1	CL902	C6	IC17	M3	IC701	F2	Q1553	*E2	R250	*M2	R416	*J5	R609	*K5	R815	*C2	R1120	*P4	R1358	*E5	R1583	E1		
C205	*L3	C327	*F4	C519	A3	C778	*A1	C1269	*F5	C1590	F1	CL1361	E5	IC18	N4	IC702	A2	Q1554	*E1	R251	*M2	R417	*J5	R651	*D4	R816	B2	R1121	*P4	R1359	*E5	R1584	E1		
C206	*L3	C328	*F3	C520	A4	C779	*A1	C1270	*F5	C1591	F1	CL1362	E5	IC19	M4	IC705	*A5	Q1555	E1	R252	*M2	R418	J5	R652	*D4	R817	*B2	R1122	*P4	R1360	*E5	R1585	F1		
C207	*L3	C329	*F3	C521	A3	C780	*A1	C1271	*F5	C1592	E1	CL1363	D5	IC20	N4	IC706	*B4	Q1556	E1	R253	*L2	R419	*J5	R653	M5	R818	*B2	R1123	*P4	R1402	J5	R1586	E1		
C208	*L3	C330	*G3	C522	A4	C781	A1	C1272	*F5	C1593	E1	CL1364	E5	IC51	P6	IC707	*A4	Q1557	E1	R254	*L2	R420	*H5	R654	M5	R819	B2	R1124	*N4	R1403	J3	R1587	F1		
C209	*L3	C331	*G3	C523	A4	C782	*A1	C1273	*G5	C1594	F1	CL1365	D5	IC55	*P5	IC708	*A4	Q1700	J2	R255	*L2	R421	*J5	R655	*D4	R820	*C2	R1125	*N4	R1404	H5	R1588	*E2		
C210	*M3	C333	*F3	C524	A4	C783	*A1	C1274	*G5	C1595	E1	CL1366	E5	IC56	*P5	IC709	*A4	Q1701	J2	R256	*L2	R422	*J5	R667	*D4	R821	B2	R1126	P4	R1405	H3	R1589	D2		
C211	K3	C364	*N5	C525	A4	C784	A1	C1275	*F5	C1596	E1	CL1367	E5	IC61	G3	IC710	*A4	Q1702	A5	R257	*L2	R423	*J5	R668	*D4	R822	B2	R1127	P4	R1406	*J5	R1590	E2		
C212	L3	C367	*D5	C526	A4	C786	*B5	C1276	*G6	C1700	D5	CL1701	B4	IC62	F5	IC711	*A4			R258	*L2	R424	*J4	R669	*D4	R823	*B2	R1128	P4	R1407	J3	R1700	*C4		
C213	L3	C368	*D5	C527	A4	C801	C2	C1277	*G6	C1701	*B4	CL1705	D4	IC63	G4	IC712	*A4	R1	*N5	R259	*M2	R425	*J4	R670	*D4	R824	*B2	R1129	P4	R1408	J3	R1701	*J1		
C214	L3	C369	*E5	C529	B3	C802	C2	C1278	*F5	C1702	*B3	CL1706	D3	IC64	E5	IC751	*A5	R2	*N2	R260	*M2	R426	*J4	R701	F1	R825	*C2	R1130	P4	R1409	*H5	R1702	*J1		
C215	L3	C370	*D4	C536	A3	C803	*C2	C1279	*G6	C1703	*B4	CL1707	B4	IC65	*F5	IC753	A2	R3	*N5	R261	*L1	R427	J3	R702	F1	R826	C1	R1131	P4	R1410	H3	R1703	*J1		
C216	L3	C371	*D4	C538	A4	C804	*C2	C1280	*F4	C1704	D3			IC66	*G5	IC754	*A5	R4	*N2	R262	*L1	R428	*J4	R703	*A2	R827	C1	R1132	P4	R1411	H3	R1704	*J1		
C217	M3	C372	*D4	C543	*M5	C805	C2	C1281	*F5	C1705	*C4	CN101	M6	IC67	*G6	IC801	*C3	R5	*N2	R263	*L1	R429	*J4	R704	*A2	R828	C1	R1133	P4	R1412	*J5	R1705	J2		
C218	M3	C373	*D5	C601	K6	C806	*C2	C1282	G4	C1706	*C4	CN102	B6	IC68	*F5	IC802	B2	R6	*N2	R264	*M1	R430	*J4	R705	B1	R829	C1	R1134	P4	R1413	*J5	R1706	J2		

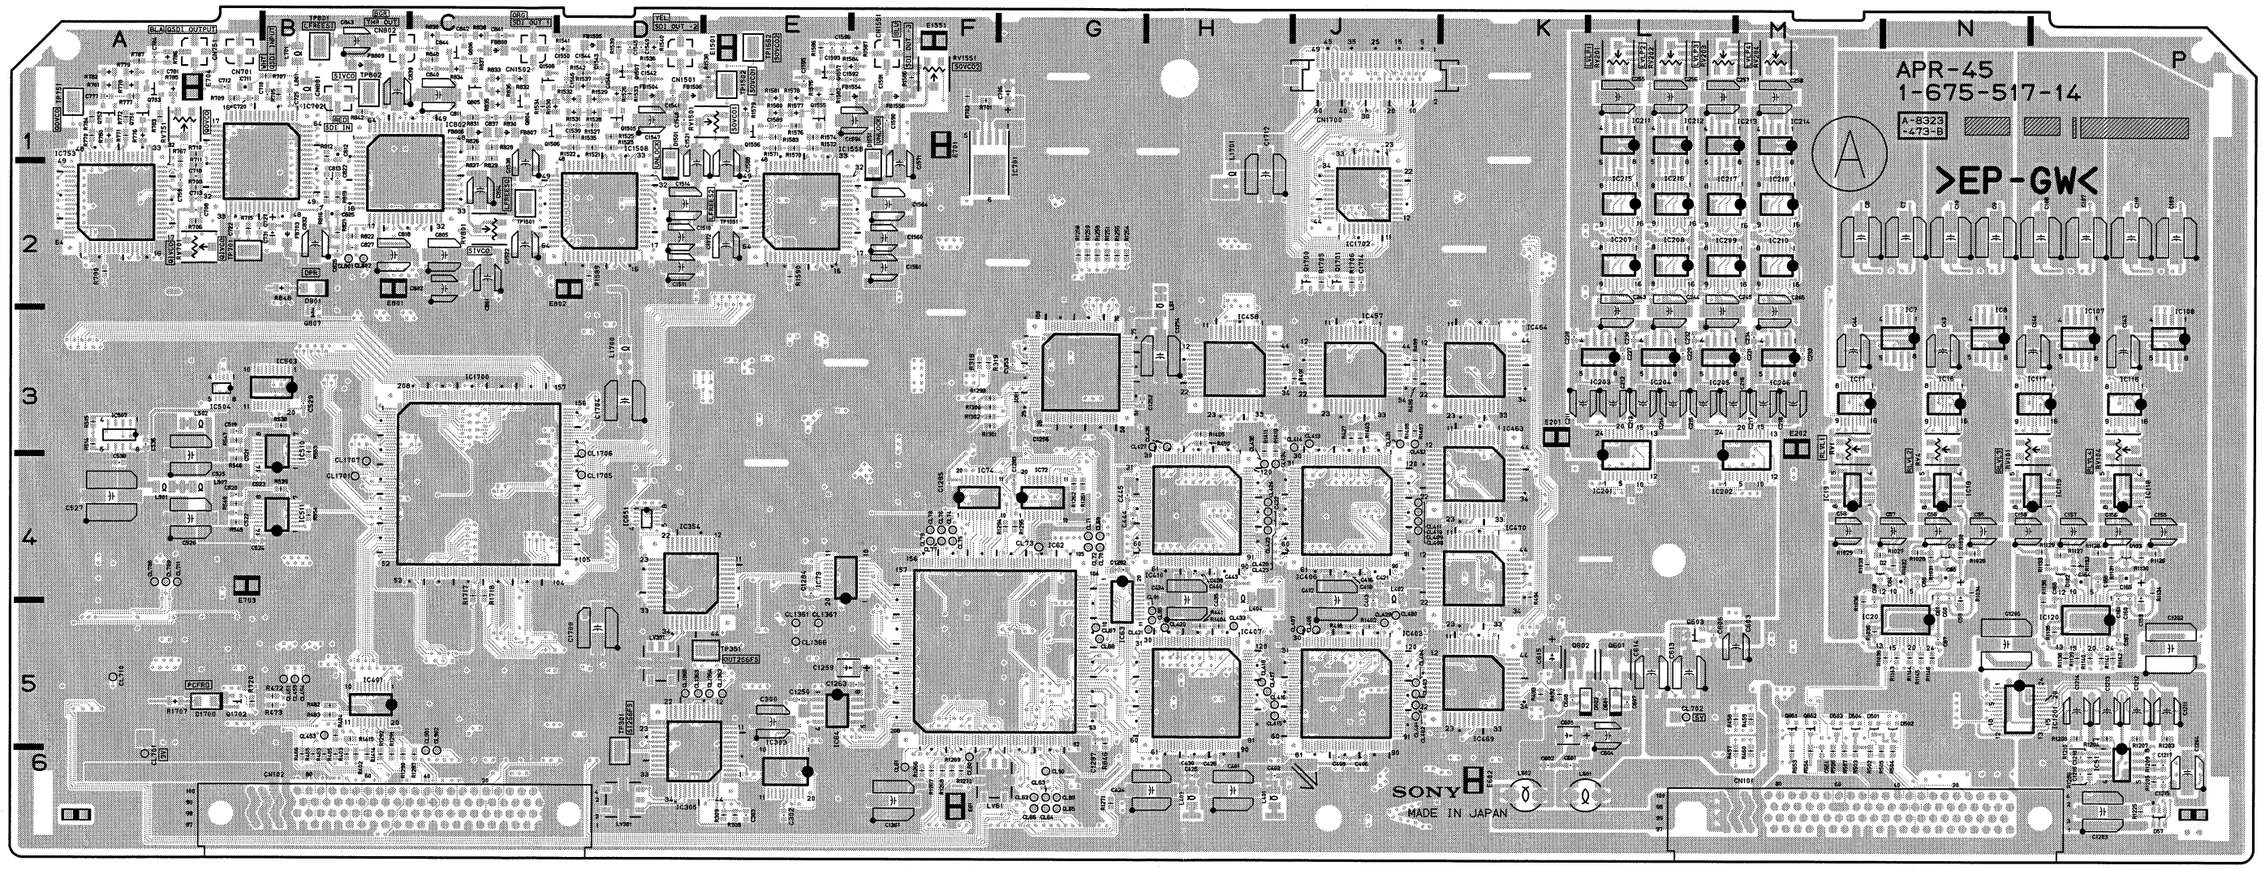

APR-45 -A SIDE-
SUFFIX: -14

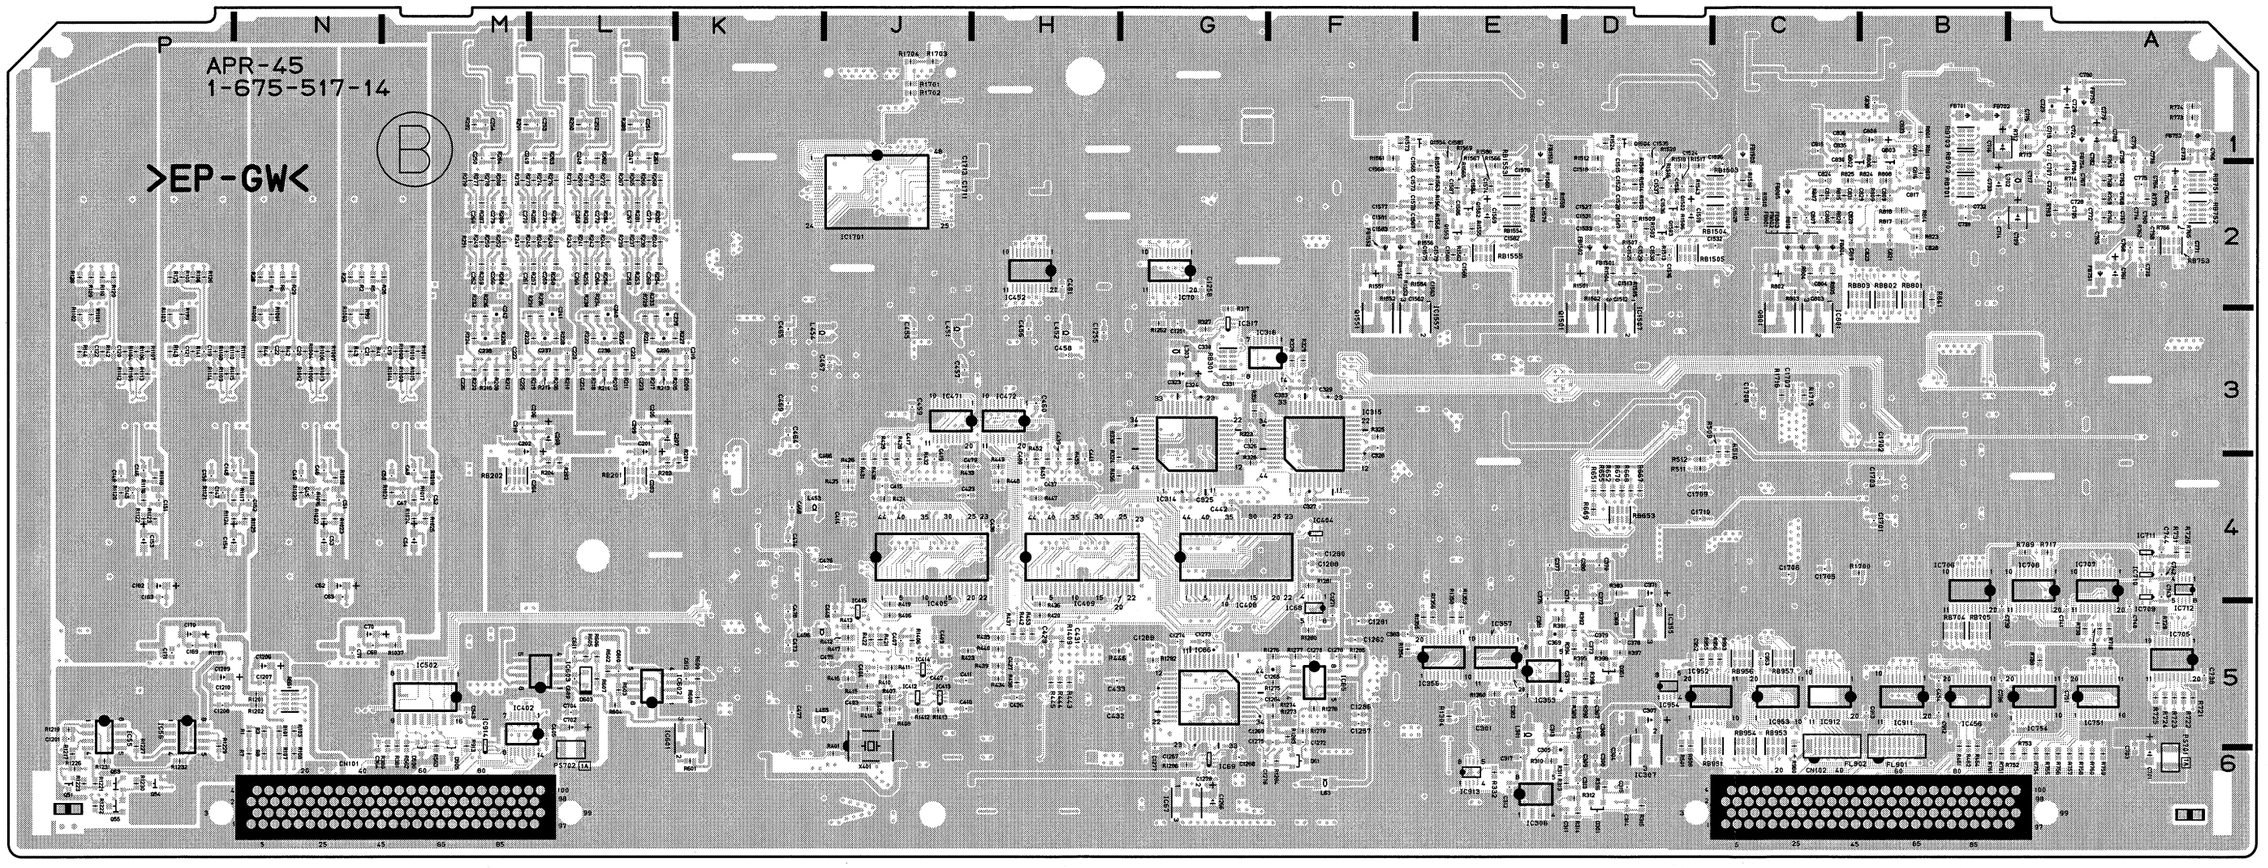

APR-45 -B SIDE-
SUFFIX: -14

APR-45 (1-675-517-12)

C7	N2	C219	*K3	C367	*D5	C480	*H4	C729	*A1	C841	C1	C1286	*F5	C1590	F1	CL701	A6	FB703	B2	IC313	*F4	IC752	A3	Q55	*P6	R222	*L3	R322	*G5	R464	*B5	R705	B1	R827	C1
C8	M2	C220	*L3	C368	*D5	C519	H2	C730	*B2	C842	C1	C1287	G5	C1591	F1	CL702	L5	FB704	*A5	IC314	*G3	IC753	A2	Q601	L5	R223	*L3	R323	*G3	R465	B6	R706	A2	R828	C1
C9	N2	C221	*L3	C369	*E5	C520	K2	C731	B2	C843	B1	C1288	G4	C1592	E1	CL703	B3	FB705	*L5	IC315	*F3	IC754	*A2	Q602	K5	R224	*M3	R324	*H4	R466	B6	R707	B1	R829	C1
C10	N2	C222	*M3	C370	*D4	C521	H2	C732	*B2	C844	C1	C1501	D2	C1593	E1	CL704	B3	FB751	*A2	IC316	*F3	IC755	*A5	Q603	L5	R225	*L3	R325	*F3	R467	*J2	R708	A2	R830	C1
C19	*M3	C223	*L3	C371	*D4	C522	K2	C733	*B2	C845	*B3	C1502	*C3	C1594	F1	CL705	A3	FB752	*A1	IC317	*G3	IC801	*C3	Q651	M5	R226	*M3	R326	*G4	R468	*J3	R709	A1	R831	C1
C20	*N3	C224	*L3	C372	*D4	C523	H2	C734	B2	C846	*B3	C1503	*D3	C1595	E1	CL706	A3	FB753	*A1	IC352	E5	IC802	B2	Q652	M5	R227	*L3	R327	*G3	R469	*J3	R710	A1	R832	C1
C21	*N3	C225	*M3	C373	*D5	C524	K2	C735	*A2	C847	*B3	C1504	*D3	C1596	E1	CL707	A3	FB754	*A1	IC353	*E5	IC803	*B2	Q653	F4	R228	*L3	R328	*F3	R470	*J2	R711	A2	R833	C1
C22	*N3	C226	*M3	C374	*D4	C525	J2	C736	*A3	C848	*C3	C1505	*D3			CL708	A4	FB801	*C2	IC354	D4	IC804	*B2	Q654	F4	R229	*L3	R329	*F3	R471	*K4	R712	*A1	R834	C1
C43	N3	C227	L3	C375	*D5	C526	K2	C737	*B3	C849	*B3	C1506	*D3	CL61	G6	CL709	A4	FB802	*C2	IC355	*D5	IC805	*B3	Q751	A1	R230	*L3	R330	*H3	R472	*A5	R713	*A1	R835	C1
C44	M3	C228	K3	C376	*E4	C527	K2	C738	*A3	C850	*B3	C1507	*D3	CL62	G6	CL710	A2	FB803	*C2	IC356	*E5	IC806	B3	Q752	A1	R231	*L3	R331	*G3	R473	*B5	R714	*A2	R836	C1
C45	*N4	C229	L3	C377	*E4	C528	H2	C739	*A3	C851	*C3	C1508	C2	CL63	G6	CL711	A4	FB804	*C2	IC357	*E5	IC807	*B3	Q753	A1	R232	*M3	R380	*E5	R474	*K3	R715	A2	R837	C1
C46	*N4	C230	L3	C378	*D5	C532	*K1	C740	*A3	C852	*C3	C1509	*D3	CL64	G6	CL754	A3	FB805	*C2	IC401	B5	IC808	*A3	Q801	*C3	R233	*L3	R381	*E5	R475	*K4	R716	A3	R838	C1
C47	*M4	C231	M3	C379	*D5	C536	*K2	C741	*A4	C853	*B3	C1510	D2	CL65	G6	CL755	A3	FB806	C1	IC402	*L5	IC901	*B4	Q802	*C2	R234	*L3	R382	*E5	R476	*K4	R717	*A3	R839	C1
C48	*M4	C232	L3	C380	*D4	C537	*J2	C742	B2	C854	*B3	C1511	D2	CL66	G6	CL756	A3	FB807	C1	IC403	J5	IC902	*B4	Q803	*B2	R235	*L3	R383	*E5	R477	*K4	R718	*A4	R840	C1
C49	*N4	C233	M3	C381	*E5	C538	*K2	C743	*A3	C901	*B4	C1512	*D2	CL67	G5	CL757	A3	FB808	C1	IC405	*J4	IC903	*B4	Q804	C1	R236	*M3	R384	*E5	R478	*K5	R719	*A4	R841	*B3
C50	*M4	C234	M3	C382	*E5	C542	*J2	C744	*B3	C902	*B5	C1513	*D2	CL68	G5	CL758	A3	FB809	B1	IC406	J4	IC904	B4	Q805	C1	R237	*L2	R385	*E5	R479	*K5	R720	A3	R842	*B3
C51	*N4	C235	*L3	C383	*F5	C543	*M5	C751	*A5	C903	*A5	C1514	D2	CL69	G4	CL801	B2	FB1501	*D2	IC407	H5	IC905	*B3	Q806	C1	R238	*L2	R386	*E5	R480	*K5	R721	*A3	R843	*B3
C52	*M4	C236	*L3	C401	H6	C544	*K1	C752	*A2	C904	*A5	C1515	*D2	CL70	G4	CL802	B2	FB1502	*D2	IC409	*H4	IC906	*A4	Q901	*B5	R239	*L2	R387	*E5	R481	*K5	R722	*A3	R844	*B3
C53	*N4	C237	*L3	C402	H6	C545	*K2	C753	*A3	C905	*A4	C1516	*D2	CL71	G4	CL901	C6	FB1503	*C1	IC410	H4	IC907	A5	Q902	*B4	R240	*L2	R388	*E5	R482	B5	R723	*A3	R845	*B2
C54	*M4	C238	*M3	C403	*J5	C546	*K2	C754	*A3	C906	*A5	C1517	*D2	CL72	G4	CL902	C6	FB1504	D1	IC411	*H5	IC908	*A5	Q951	*C4	R241	*L2	R389	*D5	R483	B5	R724	*A3	R846	*B3
C55	N4	C239	*L3	C404	*J5	C547	*H2	C755	*A2	C907	*A5	C1518	*D2	CL73	F4	CL951	C4	FB1505	D1	IC412	*J5	IC909	*A4	Q952	*C4	R242	*L2	R390	*D5	R484	*J3	R725	*A3	R847	*B2
C56	N4	C240	*L3	C405	*L5	C548	*J2	C756	*A2	C908	*A4	C1519	*D2	CL74	F4	CL1361	F5	FB1506	D1	IC413	*J5	IC910	*A5	Q1501	*D3	R243	*L2	R391	*E5	R485	*K4	R726	B2	R848	*B4
C57	N4	C241	*L3	C406	J6	C549	*J2	C757	*A2	C909	*A5	C1520	*C2	CL75	F4	CL1362	E5	FB1551	*F2	IC414	*J5	IC911	*B5	Q1502	*D2	R244	*L2	R392	*D5	R486	*K5	R727	*A3	R849	*B4
C58	M4	C242	*M3	C407	*J5	C550	*J2	C758	*A2	C910	*C5	C1521	D2	CL76	F4	CL1363	D5	FB1552	*F2	IC415	*J5	IC912	*C5	Q1503	*D2	R245	*L2	R393	*D4	R489	J3	R728	*A3	R850	*B4
C59	N4	C243	L2	C408	J6	C551	*J1	C759	A2	C911	*A5	C1522	C2	CL77	F4	CL1364	E5	FB1553	*E1	IC451	*J3	IC913	*C5	Q1504	*D1	R246	*L2	R394	*D5	R490	J3	R729	*A2	R851	*A4
C60	N4	C244	L2	C409	*J5	C552	*J1	C760	*A2	C912	*B5	C1523	*D2	CL78	F4	CL1365	D5	FB1554	F1	IC452	*H3	IC914	*M5	Q1505	D1	R247	*M2	R395	*D5	R491	J3	R730	*A4	R852	*A4
C61	N4	C245	L2	C410	*J5	C553	*H1	C761	*A2	C913	*B5	C1524	*D2	CL79	F5	CL1366	E5	FB1555	F1	IC453	*J3	IC951	*C5	Q1506	C1	R248	*L2	R396	*D5	R492	K5	R731	B2	R853	*A4
C62	*N4	C246	M2	C411	*J5	C554	*J1	C762	*A2	C914	*A5	C1525	*D2	CL80	F5					IC454	*J3	IC952	*C5	Q1507	D1	R249	*M2	R397	*D5	R493	K5	R751	*B6	R902	*B5
C63	*N4	C247	*L1	C412	J4	C555	*J1	C763	*A2	C915	*A5	C1526	*C2	CL81	F5	CN101	M6	FL901	*B5	IC455	*H3	IC953	*D5	Q1508	C1	R250	*M2	R398	*D5	R494	K4	R752	*A6	R903	*B4
C64	N4	C248	*L1	C413	J4	C556	*J1	C764	*A2	C916	*A5	C1527	*D2	CL82	F5	CN102	B6	FL902	*C5	IC456	*B5	IC954	*C5	Q1551	*F3	R251	*M2	R401	*J6	R501	*K2	R753	*A6	R904	*B4
C65	N4	C249	*L1	C414	*J4	C557	*H1	C765	*A2	C917	*B5	C1528	*D2	CL83	F5	CN701	A1			IC457	J3	IC955	*D5	Q1552	*E2	R252	*M2	R402	B6	R502	M5	R754	*A6	R905	*A5
C66	N4	C250	*M1	C415	*J4	C558	*J1	C766	*A1	C951	*C5	C1529	*D2	CL84	F5	CN751	A1	IC7	N3	IC458	H3	IC959	*C4	Q1553	*E2	R253	*L2	R403	B6	R503	M5	R755	*A6	R906	*A5
C67	N5	C251	*L1	C416	J4	C559	H1	C767	*A2	C952	*D5	C1530	*D2	CL85	H5	CN801	B1	IC8	N3	IC459	*K3	IC960	*C4	Q1554	*E1	R254	*L2	R404	B5	R504	N5	R756	*A6	R907	*A5
C68	M4	C252	*L1	C417	*J4	C560	J2	C768	*A2	C953	*C5	C1531	*D2	CL89	G6	CN802	B1	IC16	N3	IC460	*K4	IC961	C5	Q1555	E1	R255	*L2	R405	B6	R505	N5	R757	*A6	R908	*A4
C69	*N5	C253	*L1	C418	J4	C561	J1	C769	*A2	C954	*C5	C1532	*C2	CL90	G6	CN1501	D1	IC17	M3	IC461	*K3	IC962	C4	Q1556	E1	R256	*L2	R406	*J5	R506	M5	R758	*A6	R909	*A5
C70	*N5	C254	*M1	C419	*J4	C562	J2	C770	*A2	C957	*C4	C1533	*D2	CL91	H5	CN1502	C1	IC18	N4	IC462	*K3	IC1201	N5	Q1557	E1	R257	*L2	R407	*J5	R507	M5	R759	*A6	R910	A5
C71	*N5	C255	L1	C421	J4	C563	*K2	C771	*A2	C958	*C4	C1534	*D2	CL401	J5	CN1551	F1	IC19	M4	IC463	K4	IC1501	D3			R258	*L2	R408	*J5	R508	*D5	R760	*A6	R911	*C5
C107	P2	C256	L1	C422	H4	C601	K6	C772	*A2	C962	*C5	C1535	*D2	CL402	J5			IC20	N4	IC464	K3	IC1502	*C2	R1	*N5	R259	*M2	R409	*J5	R514	*K2	R761	*B6	R912	C5
C108	P2	C257	L1	C423	*J4	C602	K6	C773	*A1	C963	*C5	C1536	*D2	CL403	J5	D2	M4	IC51	P6	IC465	*K4	IC1503	*D2	R2	*N2	R260	*M2	R410	*J5	R515	*K2	R762	*A2	R913	*M5
C109	P2	C258	M1	C424	H6	C603	M5	C774	*A2	C964	*D5	C1537	*D2	CL404	J5	D3	N4	IC55	*P5	IC466	*K5	IC1504	*D3	R3	*N5	R261	*L1	R411	*J5	R538	H2	R763	*A2	R951	*C5
C110	P2	C259	*L2	C425	H6	C604	L5	C775	*A2	C965	*C4	C1538	C2	CL406	J5	D57	P6	IC56	*P5	IC467	*K5	IC1505	*D3	R4	*N2	R262	*L1	R412	*J5	R539	J2	R764	*A2	R952	*C5
C119	*P3	C260	*L2	C426	*H5	C605	K5	C776	*A1	C966	*C3	C1539	D1	CL407	J5	D61	*F6	IC61	G3	IC468	*K4	IC1506	*D3	R5	*N2	R263	*L1	R413	*J5	R546	H2	R765	*A2	R953	*C4
C120	*P3	C261	*M2	C427	*H5	C606	L5	C777	A1	C1201	*P5	C1540	D1	CL408	J4	D102	P4	IC62	F5	IC469	K5	IC1507	*D3	R6	*N2	R264	*M1	R414	*J5	R547	H2	R766	*A2	R955	*C5
C121	*P3	C262	*M2	C428	H6	C607	L5	C778	*A1	C1202	P5	C1541	D1	CL409	J4	D103	P4	IC63	G4	IC470	K4	IC1508	D2	R7	*N6	R265	*L2	R415	*J5	R548	K2	R767	A2	R956	*C5
C122	*P3	C263	*L2	C429	*H5	C608	K5	C779	*A1	C1203	P6	C1542	D1	CL410	J4	D301	*D6	IC64	*F2	IC471	*J3	IC1551	E3	R8	*N6	R266	*L2	R416	*J5	R549	K2	R768	*A2	R959	*C3
C143	P3	C264	*L2	C430	H6	C609	*L5	C780	*A1	C1204	P6	C1543	D1	CL411	J4	D351	*D5	IC65	*F5	IC472	*H3	IC1552	*E2	R25	*N2	R267	*L2	R417	*J5	R553	H2	R769	*A2	R961	*C4
C144	P3	C265	*L2	C431	*H5	C610	*L5	C781	A1	C1205	N5	C1544	D1	CL413	J3	D501	M5	IC66	*G5	IC501	*K1	IC1553	*E2	R26	*M2	R268	*L2	R418	J5	R554	J2	R770	A1	R962	*C4
C145	*P4	C266	*M2	C432	*H5	C611	*L5	C782	*A1	C1206	*N5	C1545	D1	CL414	J3	D502	N5	IC67	*G6	IC502	*M5	IC1554	*E3	R28	*N2	R269	*L2	R419	*J5	R560	*J2	R771	A1	R963	*B4
C146	*P4	C267	*L2	C433	*H5	C612	*K5	C783	*A1	C1207	*N5	C1546	D1	CL415	H5	D503	M5	IC68	*G4	IC503	*K1	IC1555	*E3	R29	*N2	R270	*L2	R420	*H5	R561	*J2	R772	A1	R969	*C4
C147	*P4	C268	*L2	C434	H4	C613	L5	C784	A1	C1208	*P5	C1547	D1	CL416	H5	D504	M5	IC69	*G6	IC504	K1	IC1556	*E3	R41	*N3	R271	*L2	R421	*J5	R562	*M5	R773	*A1	R973	C4
C148	*N4	C269	*M2	C435	H4	C614	L5	C785	*A2	C1209	*P5	C1548	D1	CL417	H5	D505	*M6	IC70	*H2	IC505	J1	IC1557	*E3	R42	*N3	R272	*L2	R422	*J5	R563	*M5	R774	*A1	R974	*C4
C149	*P4	C270	*M2	C436	*H4	C615	K5	C786	*A5	C1210	*P5	C1549	D1	CL418	H5	D506	*M6	IC71	*G2	IC506	*H1	IC1558	E2	R43	*N3	R273	*L2	R423	*J5	R564	K1	R775	*A2	R975	C4
C150	*P4	C271	*L2	C437	*H4	C651	M5	C801	C2	C1211	P5	C1550	D1	CL420	H5	D601	L5	IC72	G4	IC507	*K2			R44	*N3	R274	*L2	R424	*J4	R565	J1	R776	A1	R977	C4
C151	*P4	C272	*L2	C438	H4	C652	E4	C802	C2	C1212	P5	C1551	E2	CL421	H5	D602	L5	IC73	F5	IC508	*J1	L61	H2	R99	*N3	R275	*M2	R425	*J4	R566	*J2	R777	A1	R978	*D4
C152	*N4	C273	*M2	C439	*H4	C653	E4	C803	*C2	C1213	P5	C1552	*E3	CL422	H4	D603	*L5	IC74	F4	IC509	*H1	L63	*F6	R101	*N5	R276	*L2	R426	*J4	R567	*J2	R778	A1	R979	*C4
C153	*P4	C274	*L2	C440	H4	C654	*F4	C804	*C2	C1214	P5	C1553	*E3	CL423	H4	D701	A3	IC75	*G2	IC510	H2	L301	*E5	R103	*N5	R277	*M2	R427	J3	R568	*J2	R779	A1	R980	*C5
C154	*N4	C301	*F6	C441	*H4	C655	*E4	C805	C2	C1215	P6	C1554	*E3	CL424	H4	D801	B3	IC107	P3	IC511	J2	L302	*F6	R105	*P2	R278	*M2	R428	*J4	R569	*J2	R780	A1	R1001	*N3
C155	P4	C302	*E6	C443	H4	C656	*D4	C806	*C2	C1216	P6	C1555	*E3	CL426	H3	D802	B3	IC108	P3	IC512	*J2	L303	*G3	R106	*P2	R279	*M2	R429	*J4	R570	J2	R781	A1	R1002	*N3
C156	P4	C303	E6	C444	G4	C657	*D4	C807	*C2	C1217	P6	C1556	*E3	CL427	H3	D803	B3	IC116	P3	IC513	*J1	L351	*F5	R107	*N6	R280	*M2	R430	*J4	R571	K2	R782	A1	R1003	*N3
C157	P4	C304	*D6	C445	*H4	C658	*E4	C808	*B1	C1218	P6	C1557	*E3	CL428	H4	D804	A3	IC117	P3	IC514	*J2	L401	H6	R108	*N6	R281	*L2	R431	*J4	R572	J2	R783	A1	R1004	*N3
C158	N4	C305	*E6	C446	*H5	C659	*D4	C809	*B2	C1251	*G3	C1558	E2	CL429	J5	D805	A3	IC118	P4	IC515	*J1	L402	J4	R109	*P2	R282	*L2	R432	*J4	R573	J2	R784	A1	R1005	*N3
C159	P4	C306	*D5	C447	*J5	C660	D3	C810	*B1	C1252	G3	C1559	*E3	CL430	J5	D806	A3	IC119	P4	IC516	*J1	L403	H6	R110	*P2	R283	*L2	R433	*J4	R574	*K1	R785	A1	R1006	*N3
C160	P4	C307	*D5	C448	*J5	C661	D3	C811	C1	C1253	G3	C1560	F2	CL431	J3	D901	B4	IC120	P4	IC517	*J1	L404	H4	R125	*P2	R284	*L2	R434	*H5	R575	*K2	R786	A1	R1007	*N3
C161	P4	C308	*D6	C451	*H3	C662	*D4	C812	B1	C1254	H3	C1561	F2	CL432	J3	D902	A5	IC201	L4	IC518	*J1	L451	*J3	R126	*P2	R285	*L2	R435	*H5	R601	*K6	R787	A1	R1008	*M3
C162	*P4	C309	*D6	C452	*J3	C701	*A6	C813	B2	C1255	*H3	C1562	*E2	CL433	H5	D903	*A5	IC202	L4	IC519	*J1	L452	*H3	R128	*P2	R286	*L2	R436	*H5	R602	*L5	R788	*A5	R1009	*M3
C163	*P4	C310	*D6	C453	*J3	C702	*L5	C814	*C2	C1256	G3	C1563	*E2	CL434	H4	D904	*C5	IC203	L3	IC520	*J1	L453	*K4	R129	*P2	R287	*M2	R437	*H5	R603	*L5	R789	*A5	R1010	*M3
C164	P4	C311	*D6	C454	*B5	C703	*A6	C815	*C1	C1257	*F3	C1564	F2	CL435	H4	D951	*B4	IC204	L3	IC521	*J1	L454	*K3	R141	*P3	R288	*M2	R438	*H5	R604	*L5	R801	*B1	R1011	*M3
C165	P4	C312	*E6	C455	*J3	C704	*L5	C816	*B2	C1258	H2	C1565	*E2	CL436	H5	D1501	D2	IC205	L3	IC522	*J1	L455	*J5	R142	*P3	R289	*L1	R439	*H5	R605	*L5	R802	*C2	R1012	*N3
C166	P4	C313	*E5	C456	*H3	C705	*A2	C817	*B2	C1259	G2	C1566	*E2	CL437	H5	D1551	F2	IC206	M3	IC601	*K5	L456	*K5	R143	*P3	R290	*L1	R440	*H5	R606	*L5	R803	*C2	R1013	*N3
C167	P5	C314	*D6	C457	*J3	C706	A3	C818	B2	C1260	G2	C1567	*E2	CL438	H5			IC207	L2	IC602	*L5	L501	*K2	R144	*P3	R291	*M1	R441	H5	R607	*L5	R804	*C2	R1014	*M3
C168	P4	C315	*D6	C458	*H3	C707	*A2	C819	*C2	C1261	F6	C1568	*F2	CL439	H5	E61	F6	IC208	L2	IC603	*L5	L502	J2	R199	*P3	R292	*M1	R442	*H5	R608	*K5	R805	*C2	R1015	*M3
C169	*P5	C316	*D5	C459	*J3	C708	A2	C820	*C2	C1262	F4	C1569	*E2	CL440	H6	E201	K3	IC209	M2	IC651	E4	L505	*J2	R201	*K4	R301	*E5	R443	*H5	R609	*K5	R806	*B2	R1016	*N4
C170	*P5	C317	*E6	C460	*H3	C709	*A2	C821	*B2	C1264	*F5	C1570	*E2	CL451	B5	E202	M3	IC210	M2	IC652	*D3	L506	H1	R202	*L4	R302	*E6	R444	*H5	R651	*E4	R807	*C2	R1017	*M4
C171	*P5	C318	*F5	C461	*K3	C710	B1	C822	B2	C1265	*F5	C1571	F2	CL453	B5	E301	H3	IC211	L1	IC653	*E3	L507	*K2	R203	*L4	R303	*E6	R445	*H5	R652	*E4	R808	*B2	R1018	*N4
C201	*L3	C319	*G4	C462	*K4	C711	A1	C823	*B2	C1266	*G6	C1572	E2	CL454	B5	E501	K1	IC212	L1	IC654	E4	L601	L6	R204	*L4	R304	*E6	R446	*H5	R653	M5	R809	*B2	R1019	*M4
C202	*M3	C320	*F4	C463	*K4	C712	A1	C824	*C2	C1267	*G6	C1573	*E2	CL455	B5	E601	A6	IC213	L1	IC655	D4	L602	K6	R205	*L3	R305	*E6	R447	*H4	R654	M5	R810	*C2	R1020	*N4
C203	*L4	C321	*G5	C464	*K3	C713	A2	C825	B2	C1268	*G6	C1574	*E2	CL501	J2	E602	K6	IC214	M1	IC656	*D4	L701	B1	R206	*L3	R306	*E6	R448	*H4	R655	*E4	R811	*B1	R1021	*M4
C204	*L4	C322	*F5	C465	*K3	C714	*B2	C826	B2	C1269	*F5	C1575	*E2	CL502	J2	E651	F6	IC215	L2	IC657	*E3	L702	*A2	R207	*L3	R307	*E6	R449	*H4	R656	F4	R812	B1	R1022	*N4
C205	*L3	C323	*G3	C466	*J4	C715	*A1	C827	B2	C1270	*F5	C1576	*E2	CL503	J2	E701	A4	IC216	L2	IC659	D4	L703	*B3	R208	*M3	R308	E6	R450	H3	R657	F4	R813	*B2	R1023	*N4
C206	*L3	C324	*G3	C467	*J3	C716	*B1	C828	*B2	C1271	*G4	C1577	*F2	CL504	H1	E703	A3	IC217	M2	IC660	*D4	L751	*A2	R209	*K3	R309	E6	R451	*H4	R658	F4	R814	*B2	R1024	*M4
C207	*L3	C325	*G4	C468	*K4	C717	*A2	C829	*B2	C1272	*F5	C1578	*E2	CL505	J1	E704	A1	IC218	M2	IC701	A4	L801	B1	R210	*L3	R310	*E6	R452	*H4	R659	*E4	R815	*C2	R1025	*M4
C208	*L3	C326	*G3	C469	*K3	C718	A2	C830	*C2	C1273	*G5	C1579	*E2	CL506	H1	E801	B2	IC301	*E5	IC702	A2			R211	*L3	R311	*D6	R453	*H5	R660	*E4	R816	B2	R1026	N4
C209	*L3	C327	*F4	C470	*K4	C719	*A1	C831	*C2	C1274	*G5	C1580	*E2	CL507	J2	E802	B4	IC302	E6	IC703	A3	LV61	F6	R212	*M3	R312	*D6	R454	*H5	R661	*E4	R817	*B2	R1027	M4
C210	*M3	C328	*F3	C471	*K5	C720	A1	C832	B2	C1275	*F5	C1581	*F2	CL508	J2	E901	B4	IC304	*E6	IC705	*A3	LV301	D6	R213	*L3	R313	*D6	R455	*H4	R662	*E4	R818	*B2	R1028	N4
C211	K3	C329	*F3	C472	*K5	C721	*A1	C833	*B1	C1276	*G6	C1582	*E2	CL509	J1	E951	C4	IC305	D6	IC706	*A2	LV351	D5	R214	*L3	R314	*D6	R456	*H4	R663	E4	R819	B2	R1029	M4
C212	L3	C330	*G3	C473	*K5	C722	A2	C834	C2	C1277	*G6	C1583	*F2	CL510	J2	E1501	E1	IC306	*E6	IC707	*A3			R215	*L3	R315	*D6	R457	M5	R664	E4	R820	*C2	R1030	N4
C213	L3	C331	*G3	C474	*K4	C723	*A1	C835	*C1	C1278	*F5	C1584	*E2	CL651	F4	E1551	F1	IC307	*D6	IC708	*A3	PS701	*A6	R216	*M3	R316	*D6	R458	M5	R665	*D5	R821	B2	R1031	N4
C214	L3	C332	*F6	C475	*J5	C724	*A1	C836	*C1	C1279	*G6	C1585	*E2	CL652	F4			IC308	*G4	IC709	*A3	PS702	*L6	R217	*L3	R317	*F4	R459	M5	R666	*E3	R822	B2	R1032	N4
C215	L3	C333	*F3	C476	*J4	C725	B1	C837	C1	C1282	G4	C1586	*E2	CL653	F3	FB501	*J1	IC309	*F4	IC710	B2			R218	*L3	R318	*G4	R460	M5	R701	A3	R823	*B2	R1033	M4
C216	L3	C364	*E5	C477	*K5	C726	*A2	C838	*B1	C1283	G4	C1587	*E2	CL654	E4	FB502	*J1	IC310	*F4	IC711	*B2	Q51	*P6	R219	*L3	R319	*F5	R461	*B5	R702	A3	R824	*B2	R1034	N4
C217	M3	C365	*F5	C478	*K5	C727	A2	C839	B1	C1284	*F5	C1588	E2	CL656	D3	FB701	*B1	IC311	*F4	IC712	*A3	Q53	*P6	R220	*M3	R320	*F4	R462	*B5	R703	*A2	R825	*C2	R1035	M5
C218	M3	C366	E5	C479	*H4	C728	*A2	C840	C1	C1285	F4	C1589	E1	CL657	E4	FB702	*B1	IC312	*G4	IC751	*A5	Q54	*P6	R221	*L3	R321	*F4	R463	B6	R704	*A2	R826	C1	R1036	M4

R1037	*M5	R1273	*F5	R1535	D1	RV1	M3
R1038	N5	R1274	*F5	R1536	D1	RV4	N3
R1101	*P3	R1275	*F5	R1537	D1	RV101	P3
R1102	*P3	R1276	*F5	R1538	E1	RV104	P3
R1103	*P3	R1277	*F5	R1539	D1	RV201	L1
R1104	*P3	R1278	*F5	R1540	D1	RV202	L1
R1105	*P3	R1279	*F5	R1541	D1	RV203	L1
R1106	*P3	R1280	*G4	R1542	D1	RV204	M1
R1107	*P3	R1281	*G4	R1543	*D2	RV701	A2
R1108	*P3	R1282	*G4	R1551	*F2	RV751	A1
R1109	*P3	R1283	*F5	R1552	*F2	RV801	C2
R1110	*P3	R1284	*F6	R1553	*F2	RV1501	E1
R1111	*N3	R1285	*F5	R1554	*E2	RV1551	F1
R1112	*P3	R1286	*G6	R1555	*E2		
R1113	*P3	R1287	C6	R1556	*E2	TP301	E5
R1114	*P3	R1288	*G3	R1557	*E2	TP351	E5
R1115	*N3	R1289	*G3	R1558	*E2	TP701	A2
R1116	*P4	R1290	B6	R1559	*E2	TP751	A1
R1117	*N4	R1291	B6	R1560	*E2	TP801	B1
R1118	*P4	R1292	B6	R1561	*F1	TP802	B4
R1119	*N4	R1293	*G3	R1562	*E2	TP803	B3
R1120	*P4	R1294	F4	R1563	*E2	TP1501	C2
R1121	*P4	R1295	G4	R1564	*E2	TP1502	E1
R1122	*P4	R1296	*G3	R1565	*E2	TP1551	E2
R1123	*P4	R1297	*G3	R1566	*E2	TP1552	E1
R1124	*N4	R1298	F3	R1567	*E2		
R1125	*N4	R1299	F3	R1568	*E2	X401	*J5
R1126	P4	R1300	F3	R1569	*E2	X651	E4
R1127	P4	R1301	F3	R1570	E1		
R1128	P4	R1302	F3	R1571	E1	*:B SIDE	
R1129	P4	R1303	F3	R1572	E1		
R1130	P4	R1304	*G2	R1573	*F1		
R1131	P4	R1305	*G2	R1574	E1		
R1132	P4	R1306	G5	R1575	E1		
R1133	P4	R1307	G3	R1576	E1		
R1134	P4	R1354	*F5	R1577	E1		
R1135	P5	R1355	*F5	R1578	E1		
R1136	P4	R1356	*F5	R1579	E1		
R1137	*P5	R1357	*E5	R1580	E1		
R1138	P5	R1358	*F5	R1581	E1		
R1139	P5	R1359	*F5	R1582	E1		
R1140	P5	R1360	*E5	R1583	E1		
R1141	P5	R1361	*F5	R1584	E1		
R1142	P5	R1401	*H5	R1585	F1		
R1143	N5	R1402	J5	R1586	E1		
R1144	N5	R1403	J3	R1587	F1		
R1145	N5	R1404	H5	R1588	*E2		
R1146	N5	R1405	H3				
R1201	*N5	R1406	*J5	RB51	*N5		
R1202	*N5	R1407	J3	RB201	*L4		
R1203	P5	R1408	J3	RB202	*M4		
R1204	P5	R1409	*H5	RB301	*G3		
R1205	P6	R1410	H3	RB501	*J2		
R1206	P6	R1411	H3	RB502	*J2		
R1207	P5	R1412	*J5	RB651	*E4		
R1208	P5	R1413	*J5	RB652	*E4		
R1209	P6	R1414	B6	RB653	*E4		
R1210	P6	R1415	B5	RB701	*B2		
R1217	*P6	R1501	*D2	RB702	*B2		
R1219	*P5	R1502	*D2	RB703	*B1		
R1221	*P6	R1503	*D2	RB704	*A3		
R1222	*P6	R1504	*D2	RB705	*A3		
R1223	*P6	R1505	*D2	RB751	*A2		
R1225	P6	R1506	*D2	RB752	*A2		
R1226	*P6	R1507	*D2	RB753	*A2		
R1227	*P5	R1508	*D2	RB801	*B3		
R1229	*P5	R1509	*D2	RB802	*C3		
R1230	*P6	R1510	*C2	RB803	*B3		
R1231	*P6	R1511	*C2	RB804	*C3		
R1232	*P6	R1512	*D1	RB805	*C3		
R1251	G2	R1513	*D2	RB951	*C5		
R1252	G6	R1514	*D2	RB952	*C5		
R1253	G2	R1515	*D2	RB953	*C5		
R1254	H2	R1516	*D2	RB954	*C5		
R1255	H2	R1517	*D2	RB956	*C5		
R1256	H2	R1518	*D2	RB957	*C5		
R1257	H2	R1519	*C2	RB958	*C4		
R1258	H2	R1520	*D2	RB959	*C4		
R1259	H2	R1521	D1	RB960	*C4		
R1260	*H3	R1522	D1	RB961	*C3		
R1261	G4	R1523	D1	RB962	*D3		
R1262	G4	R1524	*D1	RB963	*D3		
R1263	*H3	R1525	D1	RB1501	*E3		
R1264	*G3	R1526	D1	RB1502	*D3		
R1265	*G3	R1527	D1	RB1503	*C2		
R1266	F6	R1528	D1	RB1504	*C2		
R1267	F6	R1529	D1	RB1505	*D2		
R1268	F6	R1530	C1	RB1551	*F3		
R1269	F6	R1531	D1	RB1552	*F3		
R1270	F6	R1532	D1	RB1553	*E2		
R1271	G6	R1533	D1	RB1554	*E2		
R1272	*G3	R1534	C1	RB1555	*E2		

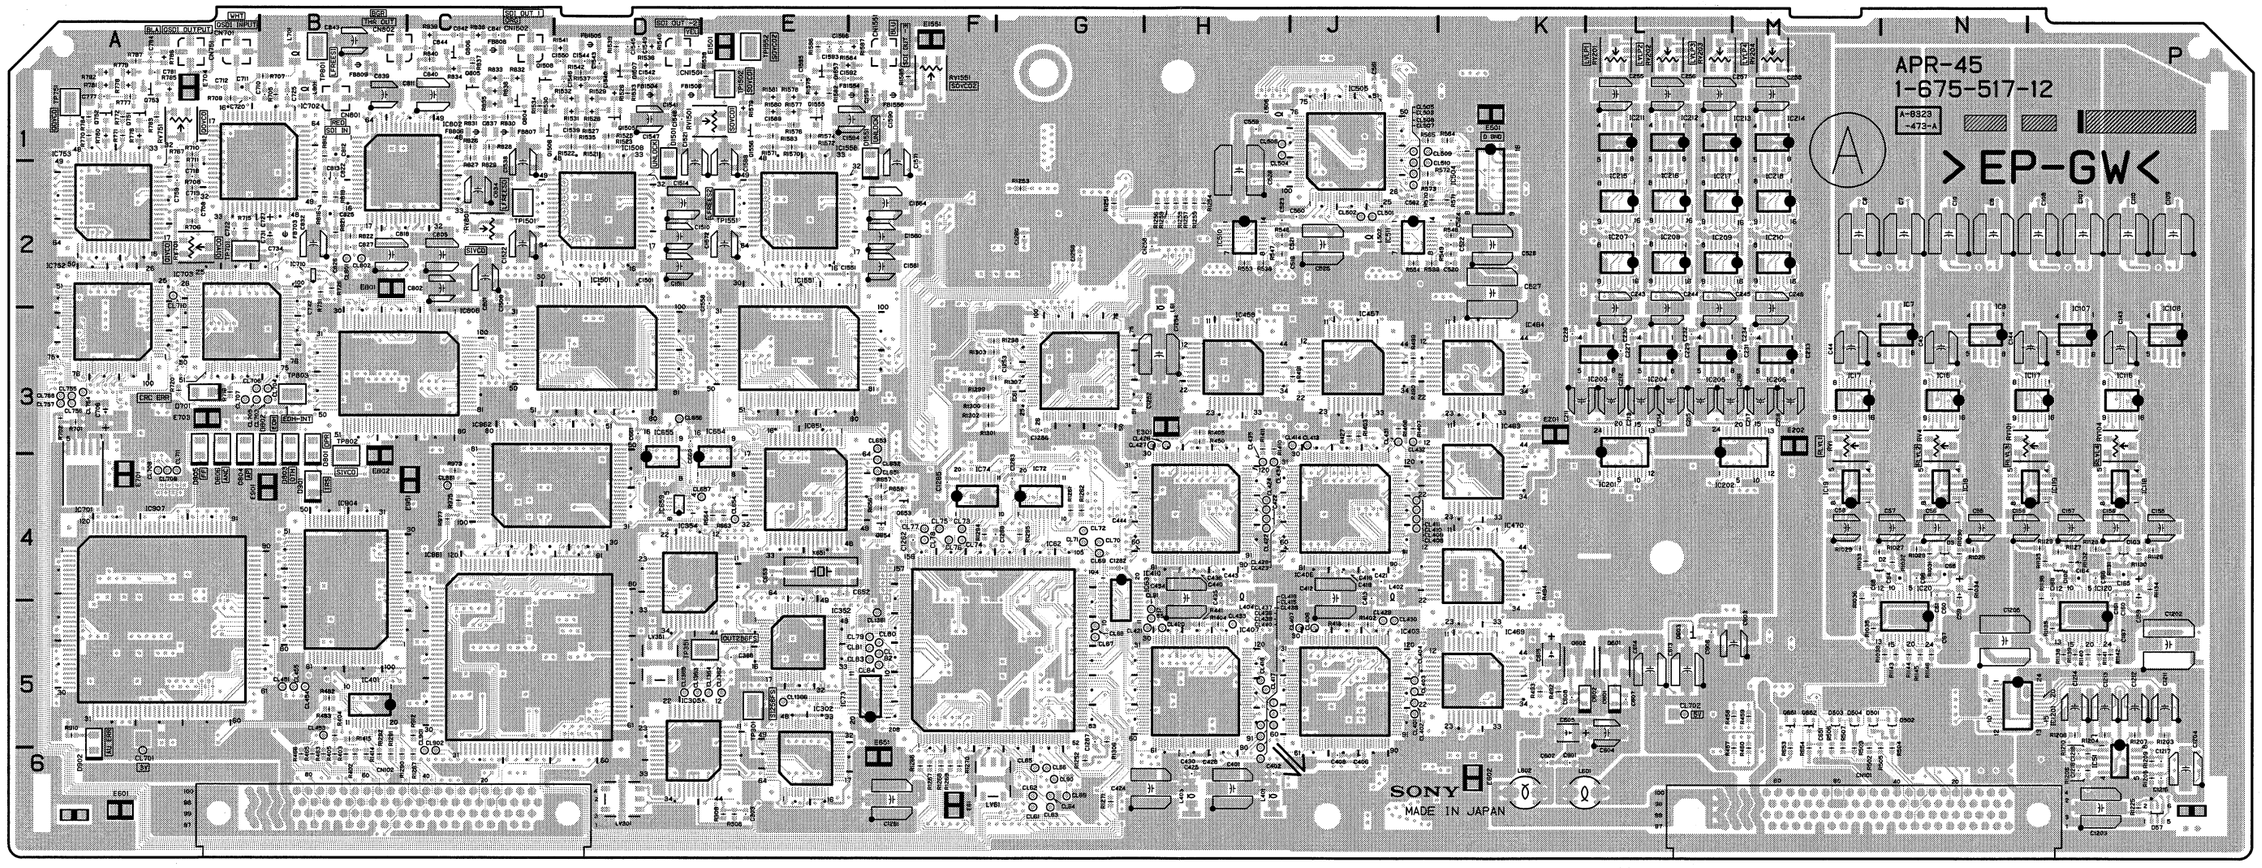

APR-45 -A SIDE-
SUFFIX: -12

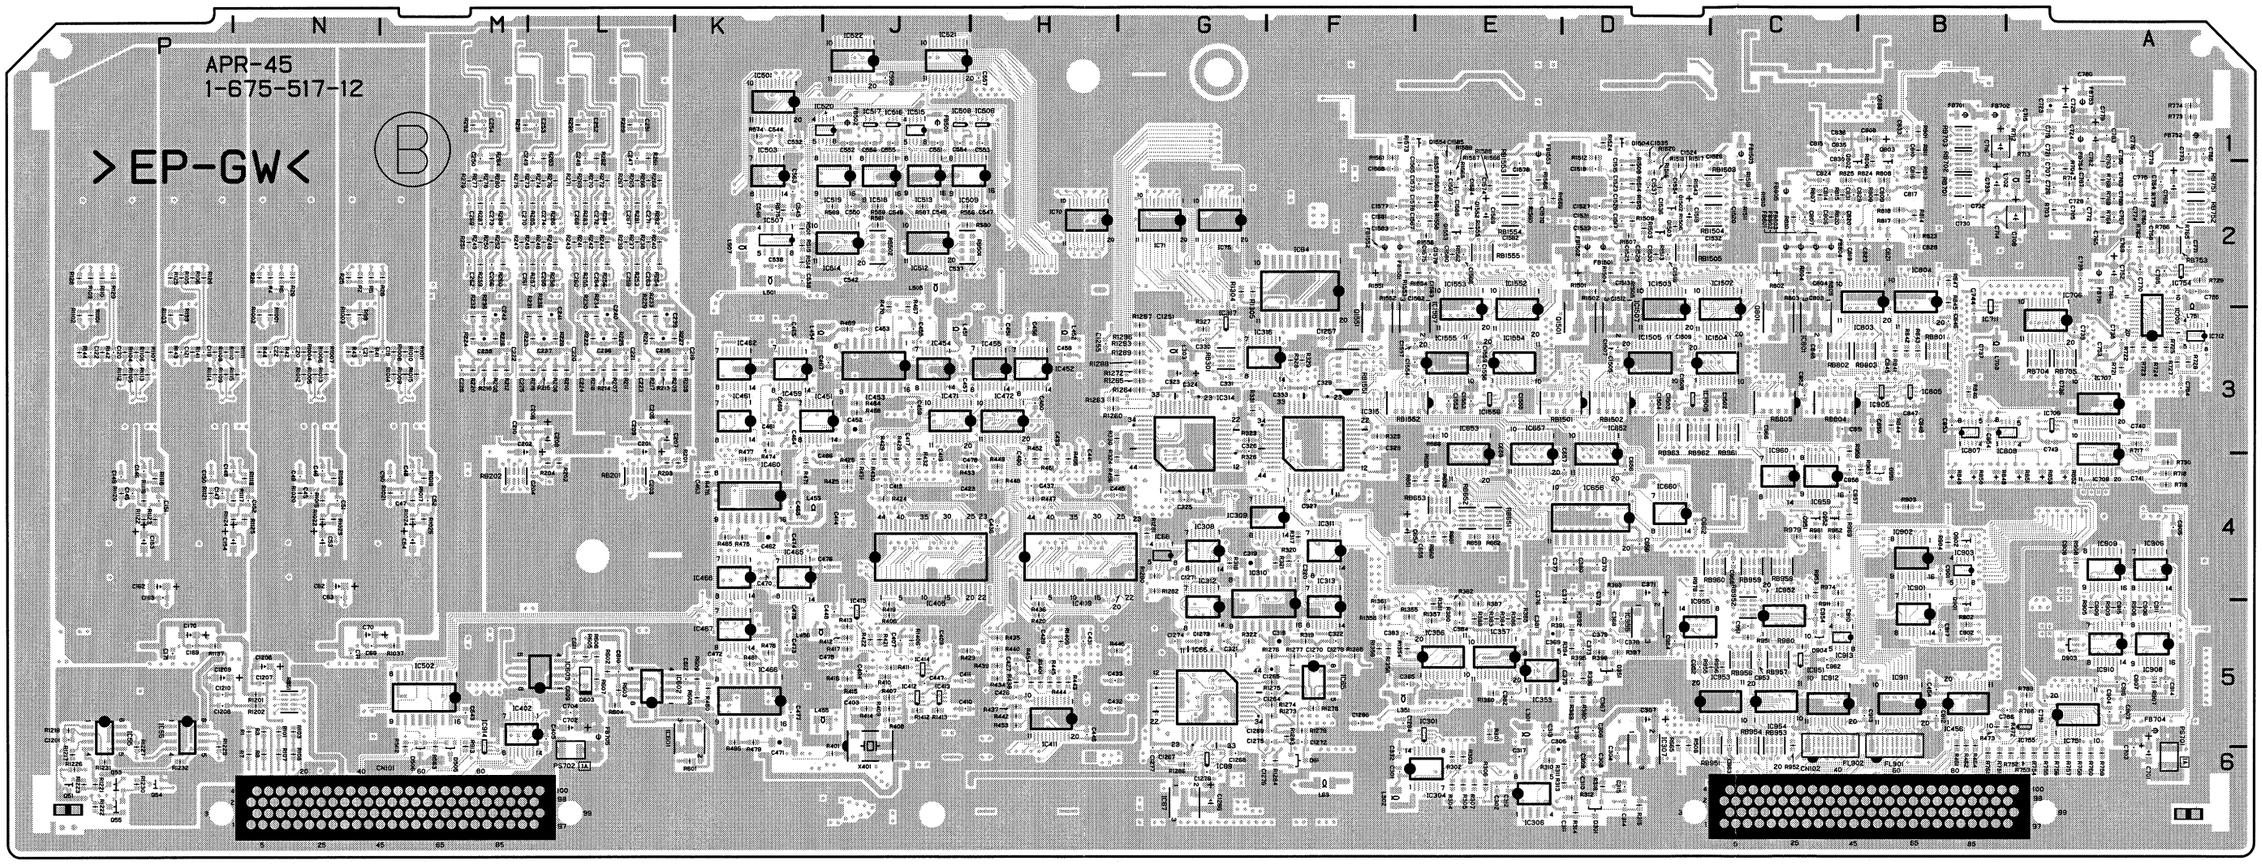

APR-45 -B SIDE-
SUFFIX: -12

APR-45 (1-675-517-11)

C7	N2	C219	*K3	C367	*D5	C480	*H4	C731	B2	C844	C1	C1506	*D3	CL61	G6	CL709	A4	FB803	*C2	IC402	*L5	IC902	*B4	Q803	*B2	R235	*L3	R383	*E5	R477	*K4	R718	*A4	R842	*B3
C8	M2	C220	*L3	C368	*D5	C519	H2	C732	*B2	C845	*B3	C1507	*D3	CL62	G6	CL710	A2	FB804	*C2	IC403	J5	IC903	*B4	Q804	C1	R236	*M3	R384	*E5	R478	*K5	R719	*A4	R843	*B3
C9	N2	C221	*L3	C369	*E5	C520	K2	C733	*B2	C846	*B3	C1508	C2	CL63	G6	CL711	A4	FB805	*C2	IC405	*J4	IC904	B4	Q805	C1	R237	*L2	R385	*E5	R479	*K5	R720	A3	R844	*B3
C10	N2	C222	*M3	C370	*D4	C521	H2	C734	B2	C847	*B3	C1509	*D3	CL64	G6	CL754	A3	FB806	C1	IC406	J4	IC905	*B3	Q806	C1	R238	*L2	R386	*E5	R480	*K5	R721	*A3	R845	*B2
C19	*M3	C223	*L3	C371	*D4	C522	K2	C735	*A2	C848	*C3	C1510	D2	CL65	G6	CL755	A3	FB807	C1	IC407	H5	IC906	*A4	Q901	*B5	R239	*L2	R387	*E5	R481	*K5	R722	*A3	R846	*B3
C20	*N3	C224	*L3	C372	*D4	C523	H2	C736	*A3	C849	*B3	C1511	D2	CL66	G6	CL756	A3	FB808	C1	IC409	*H4	IC907	A5	Q902	*B4	R240	*L2	R388	*E5	R482	B5	R723	*A3	R847	*B2
C21	*N3	C225	*M3	C373	*D5	C524	K2	C737	*B3	C850	*B3	C1512	*D2	CL67	G5	CL757	A3	FB809	B1	IC410	H4	IC908	*A5	Q951	*C4	R241	*L2	R389	*D5	R483	B5	R724	*A3	R848	*B4
C22	*N3	C226	*M3	C374	*D4	C525	J2	C738	*A3	C851	*C3	C1513	*D2	CL68	G5	CL758	A3	FB1501	*D2	IC411	*H5	IC909	*A4	Q952	*C4	R242	*L2	R390	*D5	R484	*J3	R725	*A3	R849	*B4
C43	N3	C227	L3	C375	*D5	C526	K2	C739	*A3	C852	*C3	C1514	D2	CL69	G4	CL801	B2	FB1502	*D2	IC412	*J5	IC910	*A5	Q1501	*D3	R243	*L2	R391	*E5	R485	*K4	R726	B2	R850	*B4
C44	M3	C228	K3	C376	*E4	C532	*K1	C740	*A3	C853	*B3	C1515	*D2	CL70	G4	CL802	B2	FB1503	*C1	IC413	*J5	IC911	*B5	Q1502	*D2	R244	*L2	R392	*D5	R486	*K5	R727	*A3	R851	*A4
C45	*N4	C229	L3	C377	*E4	C536	*K2	C741	*A4	C854	*B3	C1516	*D2	CL71	G4	CL901	C6	FB1504	D1	IC414	*J5	IC912	*C5	Q1503	*D2	R245	*L2	R393	*D4	R489	J3	R728	*A3	R852	*A4
C46	*N4	C230	L3	C378	*D5	C537	*J2	C742	B2	C901	*B4	C1517	*D2	CL72	G4	CL902	C6	FB1505	D1	IC415	*J5	IC913	*C5	Q1504	*D1	R246	*L2	R394	*D5	R490	J3	R729	*A2	R853	*A4
C47	*M4	C231	M3	C379	*D5	C538	*K2	C743	*A3	C902	*B5	C1518	*D2	CL73	F4	CL951	C4	FB1506	D1	IC451	*J3	IC914	*M5	Q1505	D1	R247	*M2	R395	*D5	R491	J3	R730	*A4	R902	*B5
C48	*M4	C232	L3	C380	*D4	C542	*J2	C744	*B3	C903	*A5	C1519	*D2	CL74	F4	CL1361	F5	FB1551	*F2	IC452	*H3	IC951	*C5	Q1506	C1	R248	*L2	R396	*D5	R492	K5	R731	B2	R903	*B4
C49	*N4	C233	M3	C381	*E5	C543	*M5	C751	*A5	C904	*A5	C1520	*C2	CL75	F4	CL1362	E5	FB1552	*F2	IC453	*J3	IC952	*C5	Q1507	D1	R249	*M2	R397	*D5	R493	K5	R751	*B6	R904	*B4
C50	*M4	C234	M3	C382	*E5	C544	*K1	C752	*A2	C905	*A4	C1521	D2	CL76	F4	CL1363	D5	FB1553	*E1	IC454	*J3	IC953	*D5	Q1508	C1	R250	*M2	R398	*D5	R494	K4	R752	*A6	R905	*A5
C51	*N4	C235	*L3	C383	*F5	C545	*K2	C753	*A3	C906	*A5	C1522	C2	CL77	F4	CL1364	E5	FB1554	F1	IC455	*H3	IC954	*C5	Q1551	*F3	R251	*M2	R401	*J6	R501	*K2	R753	*A6	R906	*A5
C52	*M4	C236	*L3	C401	H6	C546	*K2	C754	*A3	C907	*A5	C1523	*D2	CL78	F4	CL1365	D5	FB1555	F1	IC456	*B5	IC955	*D5	Q1552	*E2	R252	*M2	R402	B6	R502	M5	R754	*A6	R907	*A5
C53	*N4	C237	*L3	C402	H6	C547	*H2	C755	*A2	C908	*A4	C1524	*D2	CL79	F5	CL1366	E5			IC457	J3	IC959	*C4	Q1553	*E2	R253	*L2	R403	B6	R503	M5	R755	*A6	R908	*A4
C54	*M4	C238	*M3	C403	*J5	C548	*J2	C756	*A2	C909	*A5	C1525	*D2	CL80	F5			FL901	*B5	IC458	H3	IC960	*C4	Q1554	*E1	R254	*L2	R404	B5	R504	N5	R756	*A6	R909	*A5
C55	N4	C239	*L3	C404	*J5	C549	*J2	C757	*A2	C910	*C5	C1526	*C2	CL81	F5	CN61	G2	FL902	*C5	IC459	*K3	IC961	C5	Q1555	E1	R255	*L2	R405	B6	R505	N5	R757	*A6	R910	A5
C56	N4	C240	*L3	C405	*L5	C550	*J2	C758	*A2	C911	*A5	C1527	*D2	CL82	F5	CN101	M6			IC460	*K4	IC962	C4	Q1556	E1	R256	*L2	R406	*J5	R506	M5	R758	*A6	R911	*C5
C57	N4	C241	*L3	C406	J6	C551	*J1	C759	A2	C912	*B5	C1528	*D2	CL83	F5	CN102	B6	IC7	N3	IC461	*K3	IC1201	N5	Q1557	E1	R257	*L2	R407	*J5	R507	M5	R759	*A6	R912	C5
C58	M4	C242	*M3	C407	*J5	C552	*J1	C760	*A2	C913	*B5	C1529	*D2	CL84	F5	CN701	A1	IC8	N3	IC462	*K3	IC1501	D3			R258	*L2	R408	*J5	R508	*D5	R760	*A6	R913	*M5
C59	N4	C243	L2	C408	J6	C553	*H1	C761	*A2	C914	*A5	C1530	*D2	CL85	H5	CN751	A1	IC16	N3	IC463	K4	IC1502	*C2	R1	*N5	R259	*M2	R409	*J5	R514	*K2	R761	*B6	R951	*C5
C60	N4	C244	L2	C409	*J5	C554	*J1	C762	*A2	C915	*A5	C1531	*D2	CL89	G6	CN801	B1	IC17	M3	IC464	K3	IC1503	*D2	R2	*N2	R260	*M2	R410	*J5	R515	*K2	R762	*A2	R952	*C5
C61	N4	C245	L2	C410	*J5	C555	*J1	C763	*A2	C916	*A5	C1532	*C2	CL90	G6	CN802	B1	IC18	N4	IC465	*K4	IC1504	*D3	R3	*N5	R261	*L1	R411	*J5	R538	H2	R763	*A2	R953	*C4
C62	*N4	C246	M2	C411	*J5	C556	*J1	C764	*A2	C917	*B5	C1533	*D2	CL91	H5	CN1501	D1	IC19	M4	IC466	*K5	IC1505	*D3	R4	*N2	R262	*L1	R412	*J5	R539	J2	R764	*A2	R955	*C5
C63	*N4	C247	*L1	C412	J4	C557	*H1	C765	*A2	C951	*C5	C1534	*D2	CL401	J5	CN1502	C1	IC20	N4	IC467	*K5	IC1506	*D3	R5	*N2	R263	*L1	R413	*J5	R546	H2	R765	*A2	R956	*C5
C64	N4	C248	*L1	C413	J4	C558	*J1	C766	*A1	C952	*D5	C1535	*D2	CL402	J5	CN1551	F1	IC51	P6	IC468	*K4	IC1507	*D3	R6	*N2	R264	*M1	R414	*J5	R547	H2	R766	*A2	R959	*C3
C65	N4	C249	*L1	C414	*J4	C559	H1	C767	*A2	C953	*C5	C1536	*D2	CL403	J5			IC55	*P5	IC469	K5	IC1508	D2	R7	*N6	R265	*L2	R415	*J5	R548	K2	R767	A2	R961	*C4
C66	N4	C250	*M1	C415	*J4	C560	J2	C768	*A2	C954	*C5	C1537	*D2	CL404	J5	D2	M4	IC56	*P5	IC470	K4	IC1551	E3	R8	*N6	R266	*L2	R416	*J5	R549	K2	R768	*A2	R962	*C4
C67	N5	C251	*L1	C416	J4	C561	J1	C769	*A2	C957	*C4	C1538	C2	CL406	J5	D3	N4	IC61	G3	IC471	*J3	IC1552	*E2	R25	*N2	R267	*L2	R417	*J5	R553	H2	R769	*A2	R963	*B4
C68	M4	C252	*L1	C417	*J4	C562	J2	C770	*A2	C958	*C4	C1539	D1	CL407	J5	D57	P6	IC62	F5	IC472	*H3	IC1553	*E2	R26	*M2	R268	*L2	R418	J5	R554	J2	R770	A1	R969	*C4
C69	*N5	C253	*L1	C418	J4	C563	*K2	C771	*A2	C962	*C5	C1540	D1	CL408	J4	D61	*F6	IC63	G4	IC501	*K1	IC1554	*E3	R28	*N2	R269	*L2	R419	*J5	R560	*J2	R771	A1	R973	C4
C70	*N5	C254	*M1	C419	*J4	C601	K6	C772	*A2	C963	*C5	C1541	D1	CL409	J4	D102	P4	IC64	*F2	IC502	*M5	IC1555	*E3	R29	*N2	R270	*L2	R420	*H5	R561	*J2	R772	A1	R974	*C4
C71	*N5	C255	L1	C421	J4	C602	K6	C773	*A1	C964	*D5	C1542	D1	CL410	J4	D103	P4	IC65	*P5	IC503	*K1	IC1556	*E3	R41	*N3	R271	*L2	R421	*J5	R562	*M5	R773	*A1	R975	C4
C107	P2	C256	L1	C422	H4	C603	M5	C774	*A2	C965	*C4	C1543	D1	CL411	J4	D301	*D6	IC66	*G5	IC504	K1	IC1557	*E3	R42	*N3	R272	*L2	R422	*J5	R563	*M5	R774	*A1	R977	C4
C108	P2	C257	L1	C423	*J4	C604	L5	C775	*A2	C966	*C3	C1544	D1	CL413	J3	D351	*D5	IC67	*G6	IC505	J1	IC1558	E2	R43	*N3	R273	*L2	R423	*J5	R564	K1	R775	*A2	R978	*D4
C109	P2	C258	M1	C424	H6	C605	K5	C776	*A1	C1201	*P5	C1545	D1	CL414	J3	D501	M5	IC68	*G4	IC506	*H1			R44	*N3	R274	*L2	R424	*J4	R565	J1	R776	A1	R979	*C4
C110	P2	C259	*L2	C425	H6	C606	L5	C777	A1	C1203	P6	C1546	D1	CL415	H5	D502	N5	IC69	*G6	IC507	*K2	L61	H2	R99	*N3	R275	*M2	R425	*J4	R566	*J2	R777	A1	R1001	*N3
C119	*P3	C260	*L2	C426	*H5	C607	L5	C778	*A1	C1204	P6	C1547	D1	CL416	H5	D503	M5	IC72	G4	IC508	*J1	L63	*F6	R101	*N5	R276	*L2	R426	*J4	R567	*J2	R778	A1	R1002	*N3
C120	*P3	C261	*M2	C427	*H5	C608	K5	C779	*A1	C1206	*N5	C1548	D1	CL417	H5	D504	M5	IC73	F5	IC509	*H1	L301	*E5	R103	*N5	R277	*M2	R427	J3	R568	*J2	R779	A1	R1003	*N3
C121	*P3	C262	*M2	C428	H6	C609	*L5	C780	*A1	C1207	*N5	C1549	D1	CL418	H5	D505	*M6	IC74	F4	IC510	H2	L302	*F6	R105	*P2	R278	*M2	R428	*J4	R569	*J2	R780	A1	R1004	*N3
C122	*P3	C263	*L2	C429	*H5	C610	*L5	C781	A1	C1208	*P5	C1550	D1	CL420	H5	D506	*M6	IC107	P3	IC511	J2	L303	*G3	R106	*P2	R279	*M2	R429	*J4	R570	J2	R781	A1	R1005	*N3
C143	P3	C264	*L2	C430	H6	C611	*L5	C782	*A1	C1209	*P5	C1551	E2	CL421	H5	D601	L5	IC108	P3	IC512	*J2	L351	*F5	R107	*N6	R280	*M2	R430	*J4	R571	K2	R782	A1	R1006	*N3
C144	P3	C265	*L2	C431	*H5	C612	*K5	C783	*A1	C1210	*P5	C1552	*E3	CL422	H4	D602	L5	IC116	P3	IC513	*J1	L401	H6	R108	*N6	R281	*L2	R431	*J4	R572	J2	R783	A1	R1007	*N3
C145	*P4	C266	*M2	C432	*H5	C613	L5	C784	A1	C1211	P5	C1553	*E3	CL423	H4	D603	*L5	IC117	P3	IC514	*J2	L402	J4	R109	*P2	R282	*L2	R432	*J4	R573	J2	R784	A1	R1008	*M3
C146	*P4	C267	*L2	C433	*H5	C614	L5	C785	*A2	C1212	P5	C1554	*E3	CL424	H4	D701	A3	IC118	P4	IC515	*J1	L403	H6	R110	*P2	R283	*L2	R433	*J4	R574	*K1	R785	A1	R1009	*M3
C147	*P4	C268	*L2	C434	H4	C615	K5	C801	C2	C1213	P5	C1555	*E3	CL426	H3	D801	B3	IC119	P4	IC516	*J1	L404	H4	R125	*P2	R284	*L2	R434	*H5	R575	*K2	R786	A1	R1010	*M3
C148	*N4	C269	*M2	C435	H4	C651	M5	C802	C2	C1214	P5	C1556	*E3	CL427	H3	D802	B3	IC120	P4	IC517	*J1	L451	*J3	R126	*P2	R285	*L2	R435	*H5	R601	*K6	R787	A1	R1011	*M3
C149	*P4	C270	*M2	C436	*H4	C652	E4	C803	*C2	C1215	P6	C1557	*E3	CL428	H4	D803	B3	IC201	L4	IC518	*J1	L452	*H3	R128	*P2	R286	*L2	R436	*H5	R602	*L5	R801	*B1	R1012	*N3
C150	*P4	C271	*L2	C437	*H4	C653	E4	C804	*C2	C1216	P6	C1558	E2	CL429	J5	D804	A3	IC202	L4	IC519	*J1	L453	*K4	R129	*P2	R287	*M2	R437	*H5	R603	*L5	R802	*C2	R1013	*N3
C151	*P4	C272	*L2	C438	H4	C654	*F4	C805	C2	C1217	P6	C1559	*E3	CL430	J5	D805	A3	IC203	L3	IC520	*J1	L454	*K3	R141	*P3	R288	*M2	R438	*H5	R604	*L5	R803	*C2	R1014	*M3
C152	*N4	C273	*M2	C439	*H4	C655	*E4	C806	*C2	C1218	P6	C1560	F2	CL431	J3	D806	A3	IC204	L3	IC521	*J1	L455	*J5	R142	*P3	R289	*L1	R439	*H5	R605	*L5	R804	*C2	R1015	*M3
C153	*P4	C274	*L2	C440	H4	C656	*D4	C807	*C2	C1251	*G3	C1561	F2	CL432	J3	D901	B4	IC205	L3	IC522	*J1	L456	*K5	R143	*P3	R290	*L1	R440	*H5	R606	*L5	R805	*C2	R1016	*N4
C154	*N4	C301	*F6	C441	*H4	C657	*D4	C808	*B1	C1252	G3	C1562	*E2	CL433	H5	D902	A5	IC206	M3	IC601	*K5	L501	*K2	R144	*P3	R291	*M1	R441	H5	R607	*L5	R806	*B2	R1017	*M4
C155	P4	C302	*E6	C443	H4	C658	*E4	C809	*B2	C1253	G3	C1563	*E2	CL434	H4	D903	*A5	IC207	L2	IC602	*L5	L502	J2	R199	*P3	R292	*M1	R442	*H5	R608	*K5	R807	*C2	R1018	*N4
C156	P4	C303	E6	C444	G4	C659	*D4	C810	*B1	C1254	H3	C1564	F2	CL435	H4	D904	*C5	IC208	L2	IC603	*L5	L505	*J2	R201	*K4	R301	*E5	R443	*H5	R609	*K5	R808	*B2	R1019	*M4
C157	P4	C304	*D6	C445	*H4	C660	D3	C811	C1	C1255	*H3	C1565	*E2	CL436	H5	D951	*B4	IC209	M2	IC651	E4	L506	H1	R202	*L4	R302	*E6	R444	*H5	R651	*E4	R809	*B2	R1020	*N4
C158	N4	C305	*E6	C446	*H5	C661	D3	C812	B1	C1256	G3	C1566	*E2	CL437	H5	D1501	D2	IC210	M2	IC652	*D3	L507	*K2	R203	*L4	R303	*E6	R445	*H5	R652	*E4	R810	*C2	R1021	*M4
C159	P4	C306	*D5	C447	*J5	C662	*D4	C813	B2	C1257	*F3	C1567	*E2	CL438	H5	D1551	F2	IC211	L1	IC653	*E3	L601	L6	R204	*L4	R304	*E6	R446	*H5	R653	M5	R811	*B1	R1022	*N4
C160	P4	C307	*D5	C448	*J5	C701	*A6	C814	*C2	C1261	F6	C1568	*F2	CL439	H5			IC212	L1	IC654	E4	L602	K6	R205	*L3	R305	*E6	R447	*H4	R654	M5	R812	B1	R1023	*N4
C161	P4	C308	*D6	C451	*H3	C702	*L5	C815	*C1	C1262	F4	C1569	*E2	CL440	H6	E61	F6	IC213	L1	IC655	D4	L701	B1	R206	*L3	R306	*E6	R448	*H4	R655	*E4	R813	*B2	R1024	*M4
C162	*P4	C309	*D6	C452	*J3	C703	*A6	C816	*B2	C1264	*F5	C1570	*E2	CL451	B5	E201	K3	IC214	M1	IC656	*D4	L702	*A2	R207	*L3	R307	*E6	R449	*H4	R656	F4	R814	*B2	R1025	*M4
C163	*P4	C310	*D6	C453	*J3	C704	*L5	C817	*B2	C1265	*F5	C1571	F2	CL453	B5	E202	M3	IC215	L2	IC657	*E3	L703	*B3	R208	*M3	R308	E6	R450	H3	R657	F4	R815	*C2	R1026	N4
C164	P4	C311	*D6	C454	*B5	C705	*A2	C818	B2	C1266	*G6	C1572	E2	CL454	B5	E301	H3	IC216	L2	IC659	D4	L751	*A2	R209	*K3	R309	E6	R451	*H4	R658	F4	R816	B2	R1027	M4
C165	P4	C312	*E6	C455	*J3	C706	A3	C819	*C2	C1267	*G6	C1573	*E2	CL455	B5	E501	K1	IC217	M2	IC660	*D4	L801	B1	R210	*L3	R310	*E6	R452	*H4	R659	*E4	R817	*B2	R1028	N4
C166	P4	C313	*E5	C456	*H3	C707	*A2	C820	*C2	C1268	*G6	C1574	*E2	CL501	J2	E601	A6	IC218	M2	IC701	A4			R211	*L3	R311	*D6	R453	*H5	R660	*E4	R818	*B2	R1029	M4
C167	P5	C314	*D6	C457	*J3	C708	A2	C821	*B2	C1269	*F5	C1575	*E2	CL502	J2	E602	K6	IC301	*E5	IC702	A2	LV61	F6	R212	*M3	R312	*D6	R454	*H5	R661	*E4	R819	B2	R1030	N4
C168	P4	C315	*D6	C458	*H3	C709	*A2	C822	B2	C1270	*F5	C1576	*E2	CL503	J2	E651	F6	IC302	E6	IC703	A3	LV301	D6	R213	*L3	R313	*D6	R455	*H4	R662	*E4	R820	*C2	R1031	N4
C169	*P5	C316	*D5	C459	*J3	C710	B1	C823	*B2	C1271	*G4	C1577	*F2	CL504	H1	E701	A4	IC304	*E6	IC705	*A3	LV351	D5	R214	*L3	R314	*D6	R456	*H4	R663	E4	R821	B2	R1032	N4
C170	*P5	C317	*E6	C460	*H3	C711	A1	C824	*C2	C1272	*F5	C1578	*E2	CL505	J1	E703	A3	IC305	D6	IC706	*A2			R215	*L3	R315	*D6	R457	M5	R664	E4	R822	B2	R1033	M4
C171	*P5	C318	*F5	C461	*K3	C712	A1	C825	B2	C1273	*G5	C1579	*E2	CL506	H1	E704	A1	IC306	*E6	IC707	*A3	PS701	*A6	R216	*M3	R316	*D6	R458	M5	R665	*D5	R823	*B2	R1034	N4
C201	*L3	C319	*G4	C462	*K4	C713	A2	C826	B2	C1274	*G5	C1580	*E2	CL507	J2	E801	B2	IC307	*D6	IC708	*A3	PS702	*L6	R217	*L3	R317	*F4	R459	M5	R666	*E3	R824	*B2	R1035	M5
C202	*M3	C320	*F4	C463	*K4	C714	*B2	C827	B2	C1275	*F5	C1581	*F2	CL508	J2	E802	B4	IC308	*G4	IC709	*A3			R218	*L3	R318	*G4	R460	M5	R701	A3	R825	*C2	R1036	M4
C203	*L4	C321	*G5	C464	*K3	C715	*A1	C828	*B2	C1276	*G6	C1582	*E2	CL509	J1	E901	B4	IC309	*F4	IC710	B2	Q51	*P6	R219	*L3	R319	*F5	R461	*B5	R702	A3	R826	C1	R1037	*M5
C204	*L4	C322	*F5	C465	*K3	C716	*B1	C829	*B2	C1277	*G6	C1583	*F2	CL510	J2	E951	C4	IC310	*F4	IC711	*B2	Q53	*P6	R220	*M3	R320	*F4	R462	*B5	R703	*A2	R827	C1	R1038	N5
C205	*L3	C323	*G3	C466	*J4	C717	*A2	C830	*C2	C1278	*F5	C1584	*E2	CL651	F4	E1501	E1	IC311	*F4	IC712	*A3	Q54	*P6	R221	*L3	R321	*F4	R463	B6	R704	*A2	R828	C1	R1101	*P3
C206	*L3	C324	*G3	C467	*J3	C718	A2	C831	*C2	C1279	*G6	C1585	*E2	CL652	F4	E1551	F1	IC312	*G4	IC751	*A5	Q55	*P6	R222	*L3	R322	*G5	R464	*B5	R705	B1	R829	C1	R1102	*P3
C207	*L3	C325	*G4	C468	*K4	C719	*A1	C832	B2	C1282	G4	C1586	*E2	CL653	F3			IC313	*F4	IC752	A3	Q601	L5	R223	*L3	R323	*G3	R465	B6	R706	A2	R830	C1	R1103	*P3
C208	*L3	C326	*G3	C469	*K3	C720	A1	C833	*B1	C1283	G4	C1587	*E2	CL654	E4	FB501	*J1	IC314	*G3	IC753	A2	Q602	K5	R224	*M3	R324	*H4	R466	B6	R707	B1	R831	C1	R1104	*P3
C209	*L3	C327	*F4	C470	*K4	C721	*A1	C834	C2	C1284	*F5	C1588	E2	CL656	D3	FB502	*J1	IC315	*F3	IC754	*A2	Q603	L5	R225	*L3	R325	*F3	R467	*J2	R708	A2	R832	C1	R1105	*P3
C210	*M3	C328	*F3	C471	*K5	C722	A2	C835	*C1	C1285	F4	C1589	E1	CL657	E4	FB701	*B1	IC316	*F3	IC801	*C3	Q651	M5	R226	*M3	R326	*G4	R468	*J3	R709	A1	R833	C1	R1106	*P3
C211	K3	C329	*F3	C472	*K5	C723	*A1	C836	*C1	C1286	*F5	C1590	F1	CL701	A6	FB702	*B1	IC317	*G3	IC802	B2	Q652	M5	R227	*L3	R327	*G3	R469	*J3	R710	A1	R834	C1	R1107	*P3
C212	L3	C330	*G3	C473	*K5	C724	*A1	C837	C1	C1287	G5	C1591	F1	CL702	L5	FB703	B2	IC352	E5	IC803	*B2	Q653	F4	R228	*L3	R328	*F3	R470	*J2	R711	A2	R835	C1	R1108	*P3
C213	L3	C331	*G3	C474	*K4	C725	B1	C838	*B1	C1288	G4	C1592	E1	CL703	B3	FB751	*A2	IC353	*E5	IC804	*B2	Q654	F4	R229	*L3	R329	*F3	R471	*K4	R712	*A1	R836	C1	R1109	*P3
C214	L3	C332	*F6	C475	*J5	C726	*A2	C839	B1	C1501	D2	C1593	E1	CL704	B3	FB752	*A1	IC354	D4	IC805	*B3	Q751	A1	R230	*L3	R330	*H3	R472	*A5	R713	*A1	R837	C1	R1110	*P3
C215	L3	C333	*F3	C476	*J4	C727	A2	C840	C1	C1502	*C3	C1594	F1	CL705	A3	FB753	*A1	IC355	*D5	IC806	B3	Q752	A1	R231	*L3	R331	*G3	R473	*B5	R714	*A2	R838	C1	R1111	*N3
C216	L3	C364	*E5	C477	*K5	C728	*A2	C841	C1	C1503	*D3	C1595	E1	CL706	A3	FB754	*A1	IC356	*E5	IC807	*B3	Q753	A1	R232	*M3	R380	*E5	R474	*K3	R715	A2	R839	C1	R1112	*P3
C217	M3	C365	*F5	C478	*K5	C729	*A1	C842	C1	C1504	*D3	C1596	E1	CL707	A3	FB801	*C2	IC357	*E5	IC808	*A3	Q801	*C3	R233	*L3	R381	*E5	R475	*K4	R716	A3	R840	C1	R1113	*P3
C218	M3	C366	E5	C479	*H4	C730	*B2	C843	B1	C1505	*D3			CL708	A4	FB802	*C2	IC401	B5	IC901	*B4	Q802	*C2	R234	*L3	R382	*E5	R476	*K4	R717	*A3	R841	*B3	R1114	*P3

R1115	*N3	R1289	*G3	R1561	*F1	TP802	B4
R1116	*P4	R1290	B6	R1562	*E2	TP803	B3
R1117	*N4	R1291	B6	R1563	*E2	TP1501	C2
R1118	*P4	R1292	B6	R1564	*E2	TP1502	E1
R1119	*N4	R1293	*G3	R1565	*E2	TP1551	E2
R1120	*P4	R1294	F4	R1566	*E2	TP1552	E1
R1121	*P4	R1295	G4	R1567	*E2		
R1122	*P4	R1296	*G3	R1568	*E2	X401	*J5
R1123	*P4	R1297	*G3	R1569	*E2	X651	E4
R1124	*N4	R1298	F3	R1570	E1		
R1125	*N4	R1299	F3	R1571	E1	*:B SIDE	
R1126	P4	R1300	F3	R1572	E1		
R1127	P4	R1301	F3	R1573	*F1		
R1128	P4	R1302	F3	R1574	E1		
R1129	P4	R1303	F3	R1575	E1		
R1130	P4	R1304	*G2	R1576	E1		
R1131	P4	R1305	*G2	R1577	E1		
R1132	P4	R1306	G5	R1578	E1		
R1133	P4	R1354	*F5	R1579	E1		
R1134	P4	R1355	*F5	R1580	E1		
R1135	P5	R1356	*F5	R1581	E1		
R1136	P4	R1357	*E5	R1582	E1		
R1137	*P5	R1358	*F5	R1583	E1		
R1138	P5	R1359	*F5	R1584	E1		
R1139	P5	R1360	*E5	R1585	F1		
R1140	P5	R1361	*F5	R1586	E1		
R1141	P5	R1401	*H5	R1587	F1		
R1142	P5	R1402	J5				
R1143	N5	R1403	J3	RB51	*N5		
R1144	N5	R1404	H5	RB201	*L4		
R1145	N5	R1405	H3	RB202	*M4		
R1146	N5	R1406	*J5	RB301	*G3		
R1201	*N5	R1407	J3	RB501	*J2		
R1202	*N5	R1408	J3	RB502	*J2		
R1203	P5	R1409	*H5	RB651	*E4		
R1204	P5	R1410	H3	RB652	*E4		
R1205	P6	R1411	H3	RB653	*E4		
R1206	P6	R1412	*J5	RB701	*B2		
R1207	P5	R1413	*J5	RB702	*B2		
R1208	P5	R1414	B6	RB703	*B1		
R1209	P6	R1501	*D2	RB704	*A3		
R1210	P6	R1502	*D2	RB705	*A3		
R1217	*P6	R1503	*D2	RB751	*A2		
R1219	*P5	R1504	*D2	RB752	*A2		
R1221	*P6	R1505	*D2	RB753	*A2		
R1222	*P6	R1506	*D2	RB801	*B3		
R1223	*P6	R1507	*D2	RB802	*C3		
R1225	P6	R1508	*D2	RB803	*B3		
R1226	*P6	R1509	*D2	RB804	*C3		
R1227	*P5	R1510	*C2	RB805	*C3		
R1229	*P5	R1511	*C2	RB951	*C5		
R1230	*P6	R1512	*D1	RB952	*C5		
R1231	*P6	R1513	*D2	RB953	*C5		
R1232	*P6	R1514	*D2	RB954	*C5		
R1251	G2	R1515	*D2	RB956	*C5		
R1252	G6	R1516	*D2	RB957	*C5		
R1253	F3	R1517	*D2	RB958	*C4		
R1254	G2	R1518	*D2	RB959	*C4		
R1255	G2	R1519	*C2	RB960	*C4		
R1256	G2	R1520	*D2	RB961	*C3		
R1257	G2	R1521	D1	RB962	*D3		
R1258	G2	R1522	D1	RB963	*D3		
R1259	G2	R1523	D1	RB1501	*E3		
R1260	*H3	R1524	*D1	RB1502	*D3		
R1261	G4	R1525	D1	RB1503	*C2		
R1262	G4	R1526	D1	RB1504	*C2		
R1263	*H3	R1527	D1	RB1505	*D2		
R1264	*G3	R1528	D1	RB1551	*F3		
R1265	*G3	R1529	D1	RB1552	*F3		
R1266	F6	R1530	C1	RB1553	*E2		
R1267	F6	R1531	D1	RB1554	*E2		
R1268	F6	R1532	D1	RB1555	*E2		
R1269	F6	R1533	D1				
R1270	F6	R1534	C1	RV1	M3		
R1271	G6	R1535	D1	RV4	N3		
R1272	*G3	R1536	D1	RV101	P3		
R1273	*F5	R1537	D1	RV104	P3		
R1274	*F5	R1538	E1	RV201	L1		
R1275	*F5	R1539	D1	RV202	L1		
R1276	*F5	R1540	D1	RV203	L1		
R1277	*F5	R1541	D1	RV204	M1		
R1278	*F5	R1542	D1	RV701	A2		
R1279	*F5	R1551	*F2	RV751	A1		
R1280	*G4	R1552	*F2	RV801	C2		
R1281	*G4	R1553	*F2	RV1501	E1		
R1282	*G4	R1554	*E2	RV1551	F1		
R1283	*F5	R1555	*E2				
R1284	*F6	R1556	*E2	TP301	E5		
R1285	*F5	R1557	*E2	TP351	E5		
R1286	*G6	R1558	*E2	TP701	A2		
R1287	C6	R1559	*E2	TP751	A1		
R1288	*G3	R1560	*E2	TP801	B1		

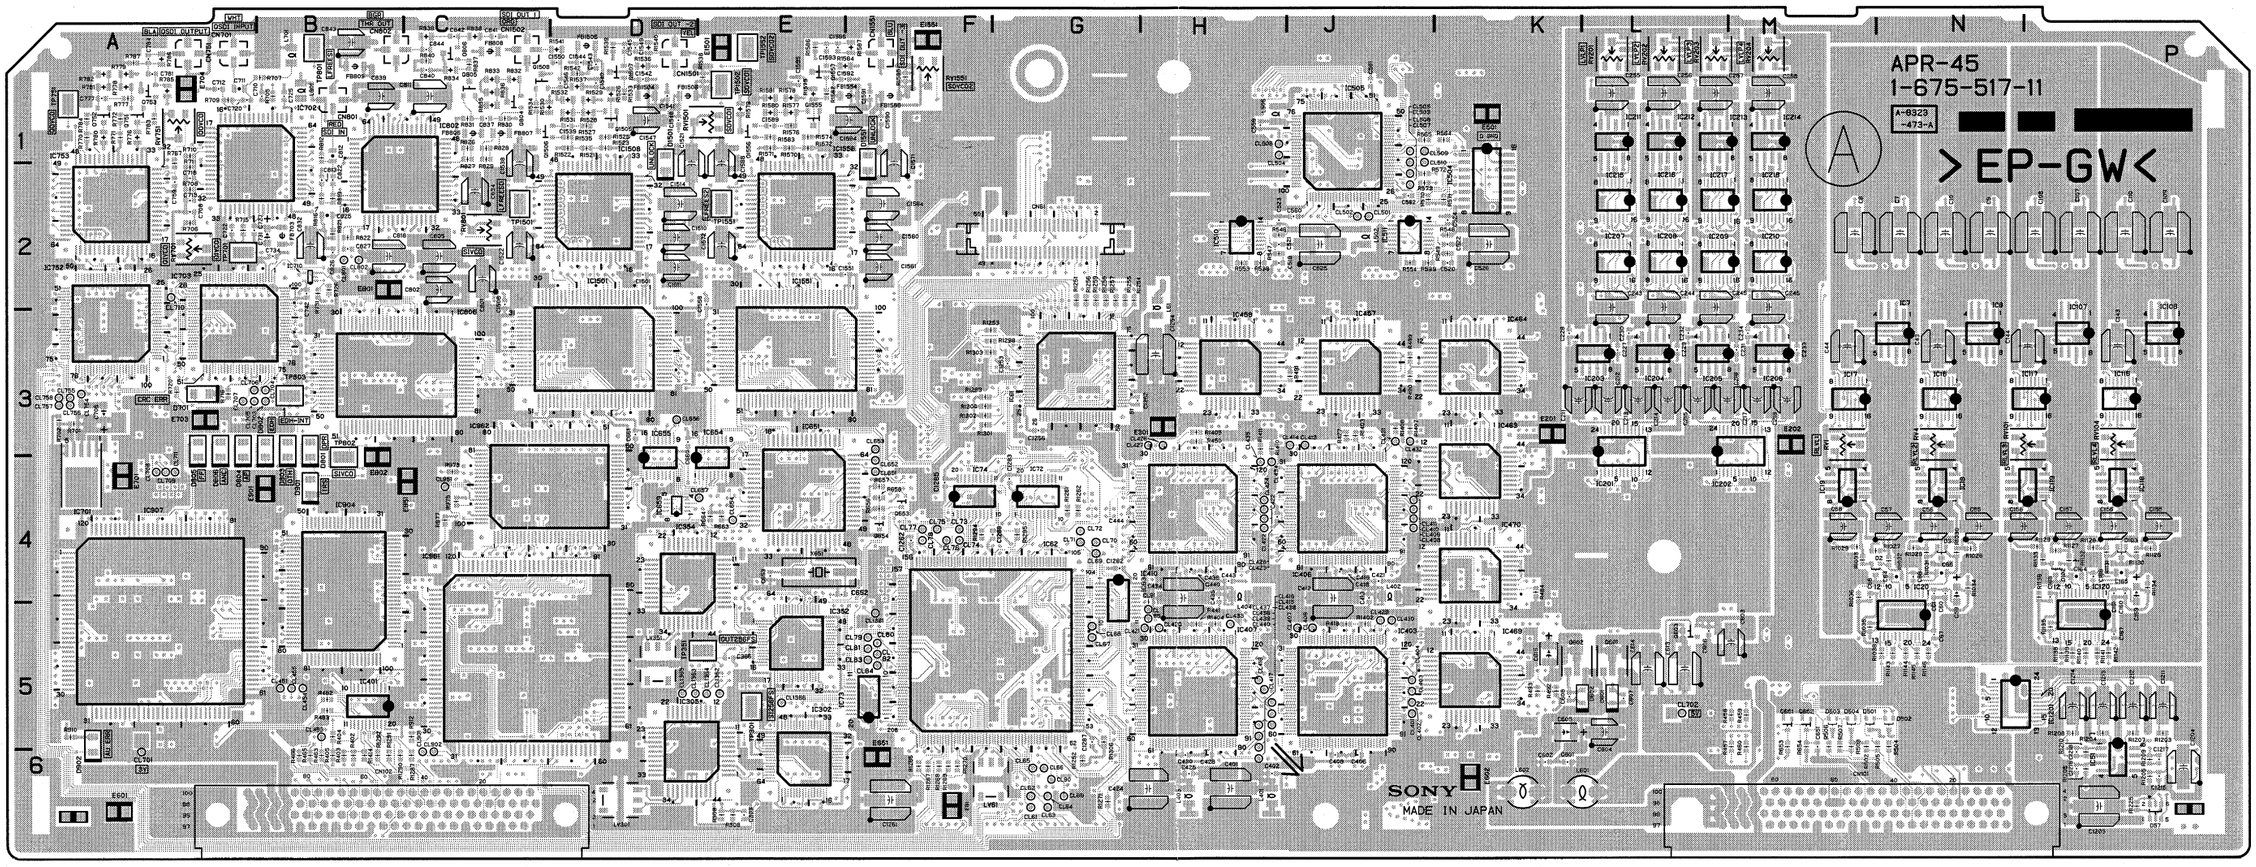

APR-45 -A SIDE-
SUFFIX: -11

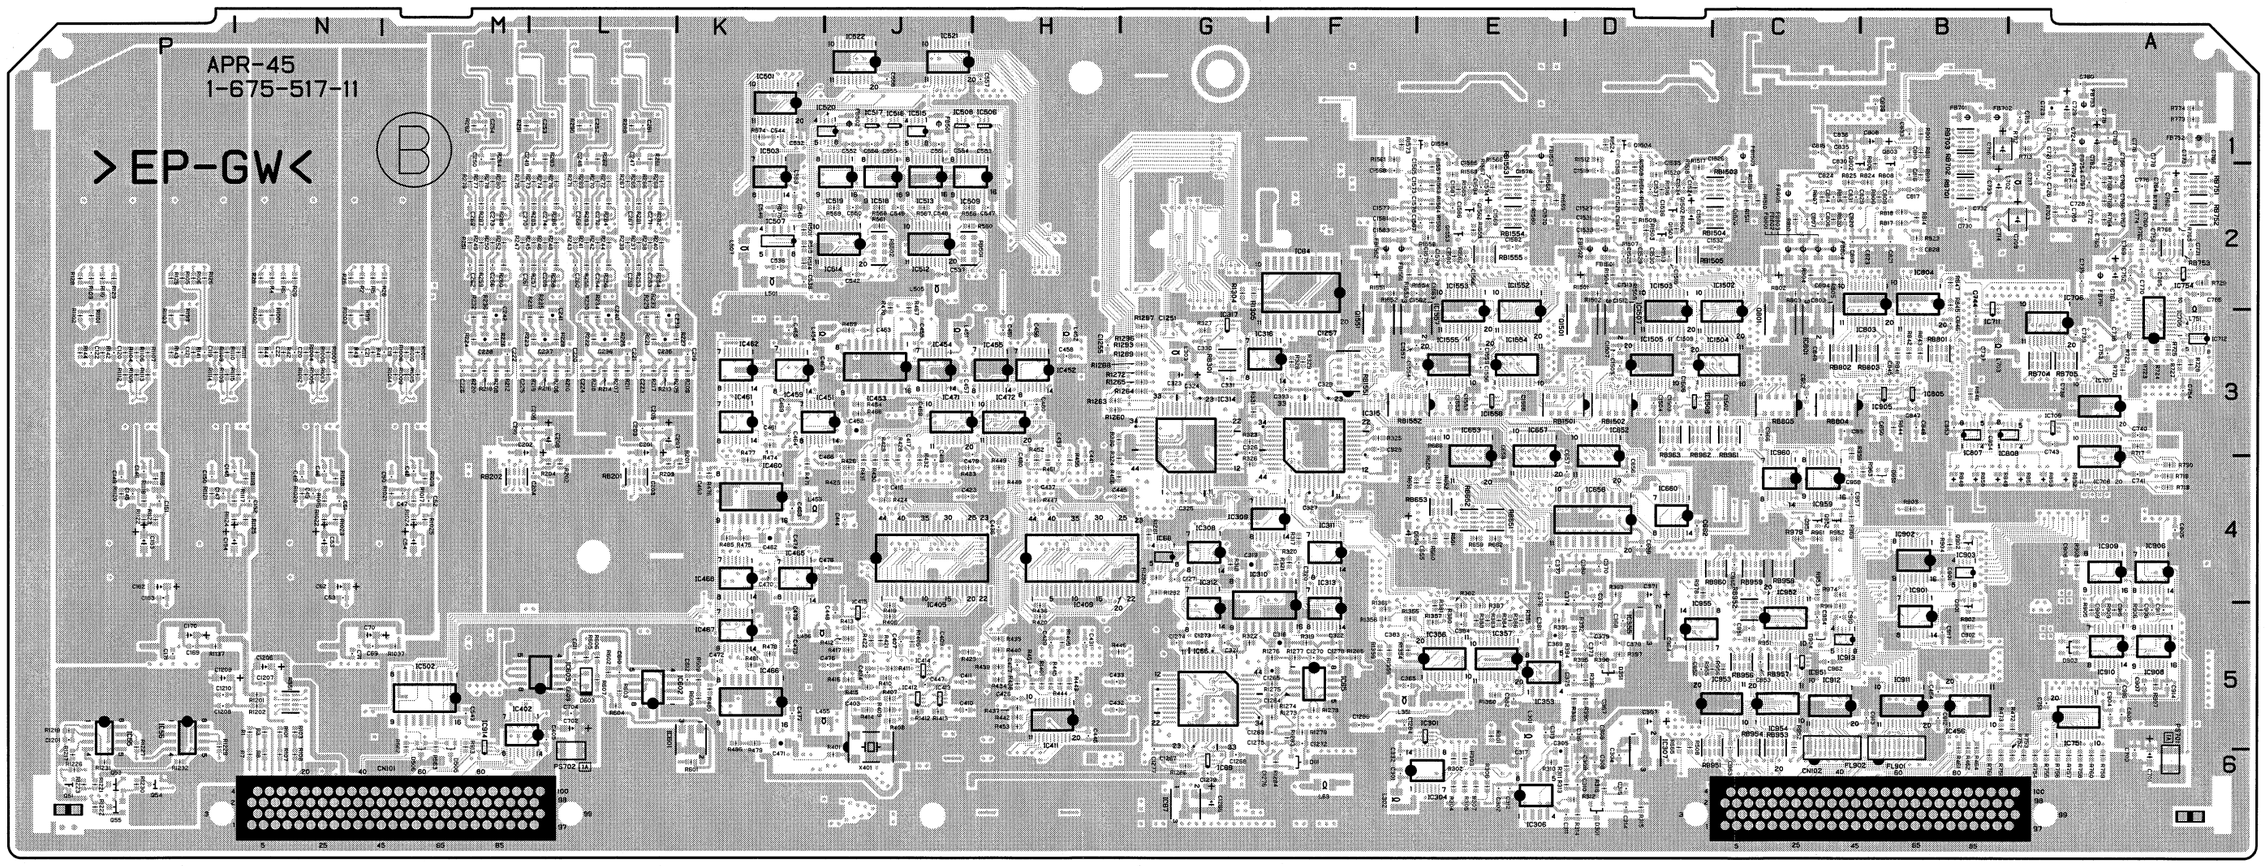

APR-45 -B SIDE-
SUFFIX: -11

CC-83, CC-84, CC-85

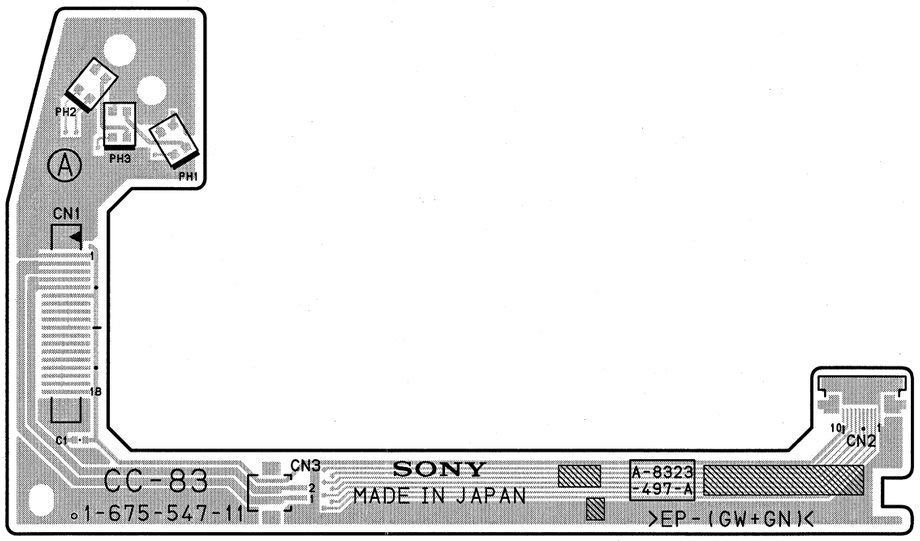

CC-83 -A SIDE-
SUFFIX: -11

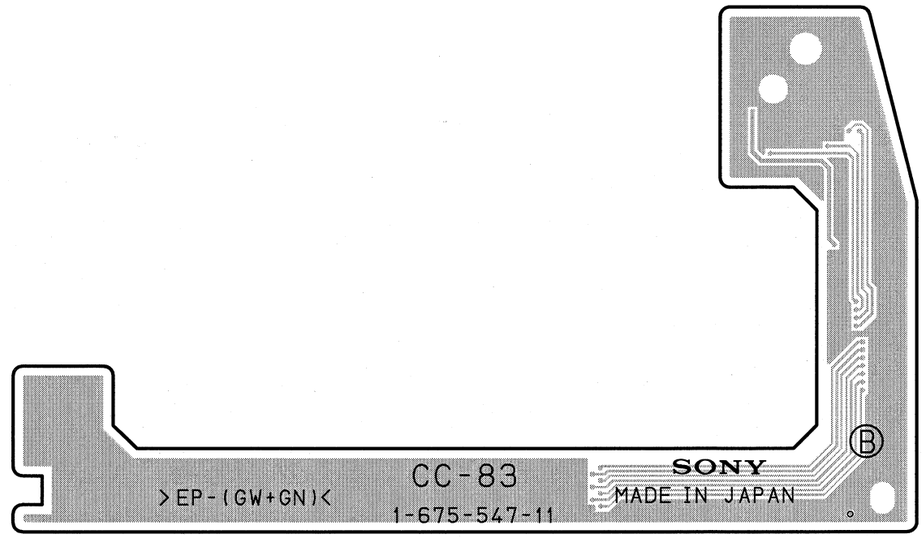

CC-83 -B SIDE-
SUFFIX: -11



CC-84 -A SIDE-
SUFFIX: -11



CC-84 -B SIDE-
SUFFIX: -11

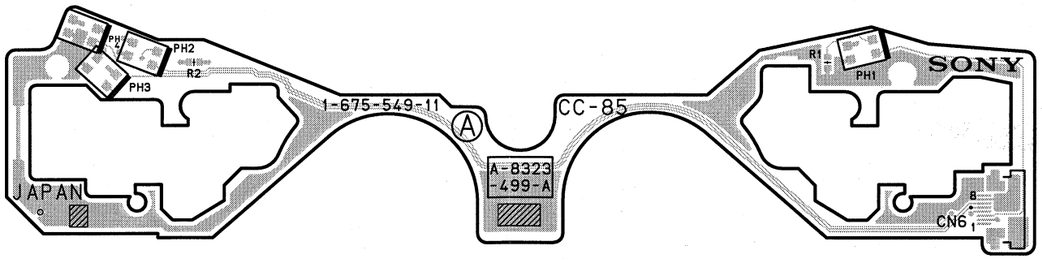

CC-85 -A SIDE-
SUFFIX: -11

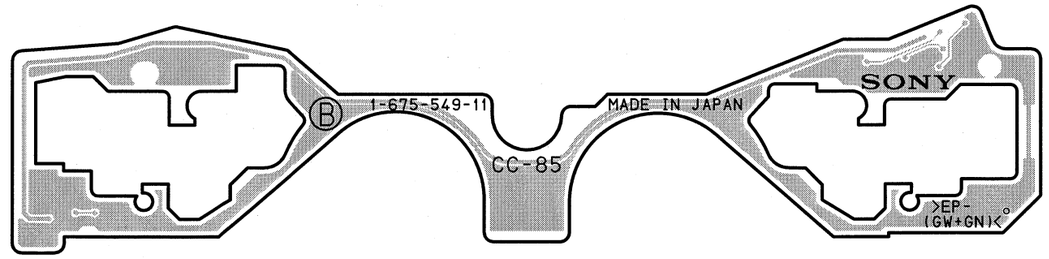

CC-85 -B SIDE-
SUFFIX: -11

14-6

CN-1863, CN-1968, CN-2021, CN-2022

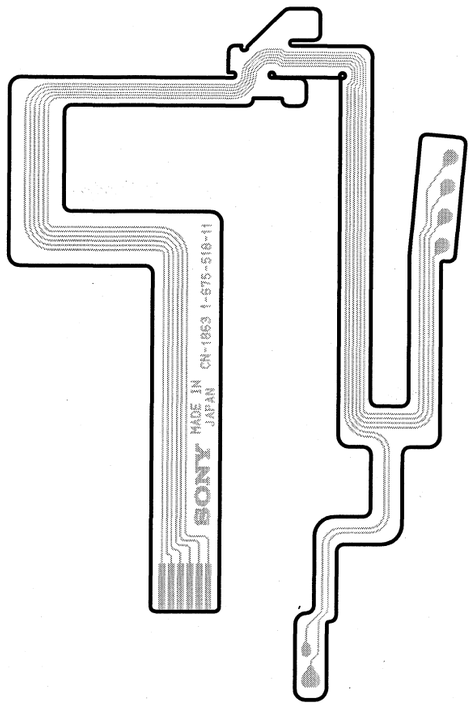

CN-1863 -A SIDE-
SUFFIX: -11

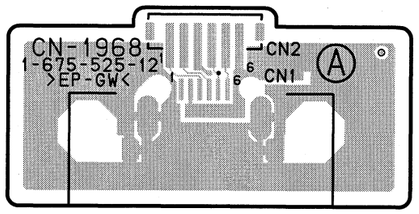

CN-1968 -A SIDE-
SUFFIX: -11, 12
FOR DSBK-190

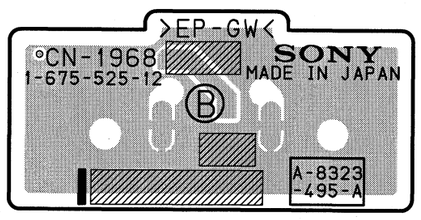

CN-1968 -B SIDE-
SUFFIX: -11, 12
FOR DSBK-190



CN-2021 -A SIDE-
SUFFIX: -11



CN-2022 -A SIDE-
SUFFIX: -11

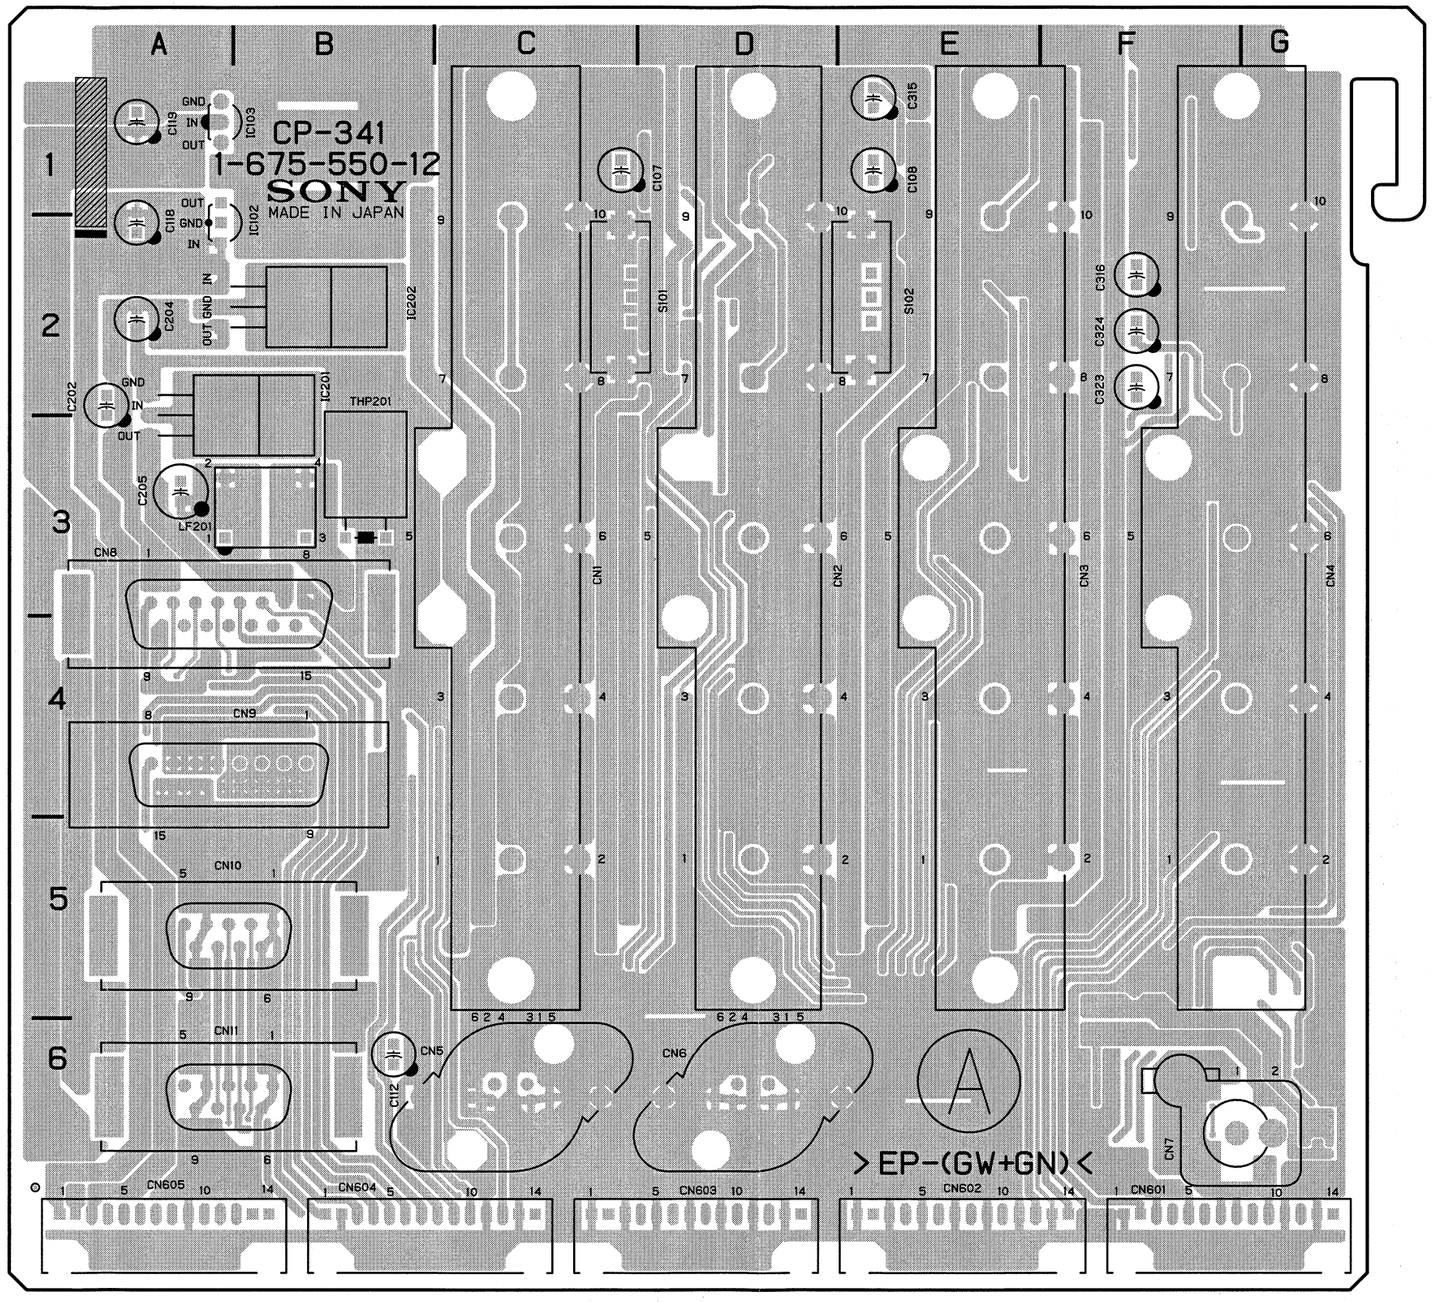

CP-341 -A SIDE-
SUFFIX: -12

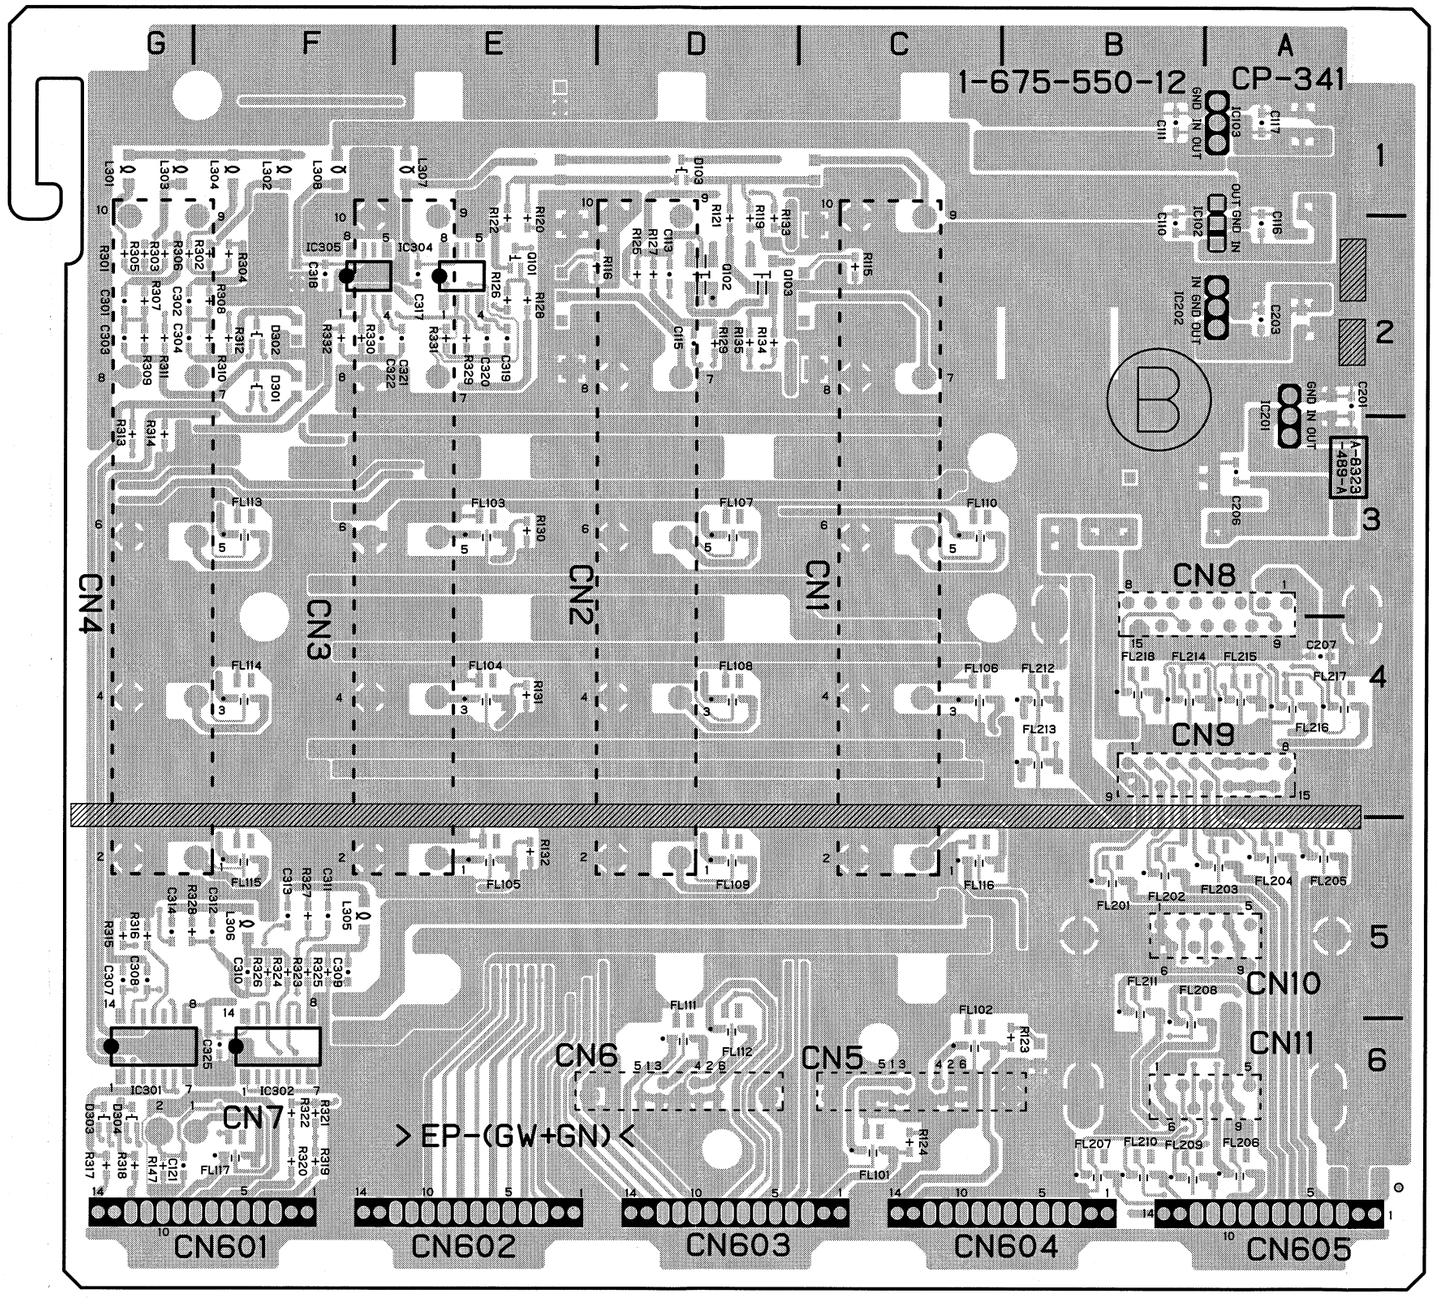

CP-341 -B SIDE-
SUFFIX: -12

CP-341 (1-675-550-12)

C107	C1	FL210	*B6
C108	E1	FL211	*B5
C110	*B2	FL212	*B4
C111	*B1	FL213	*B4
C112	B6	FL214	*B4
C113	*D2	FL215	*A4
C115	*D2	FL216	*A4
C116	*A2	FL217	*A4
C117	*A1	FL218	*B4
C118	A2		
C119	A1	IC102	A2
C121	*G6	IC103	A1
C201	*A2	IC301	*G6
C202	A2	IC302	*F6
C203	*A2	IC304	*E2
C204	A2	IC305	*F2
C205	A3		
C206	*A3	L301	*G1
C207	*A4	L302	*F1
C301	*G2	L303	*G1
C302	*G2	L304	*F1
C303	*G2	L305	*F5
C304	*G2	L306	*F5
C307	*G5	L307	*E1
C308	*G5	L308	*F1
C309	*F5		
C310	*F5	LF201	B3
C311	*F5		
C312	*F5	Q101	*E2
C313	*F5	Q102	*D2
C314	*G5	Q103	*D2
C315	E1		
C316	F2	R115	*C2
C317	*E2	R116	*D2
C318	*F2	R119	*D2
C319	*E2	R120	*E2
C320	*E2	R121	*D2
C321	*E2	R122	*E2
C322	*F2	R123	*B6
C323	F2	R124	*C6
C324	F2	R125	*D2
C325	*F6	R126	*E2
		R127	*D2
CN1	C3	R128	*E2
CN2	D3	R129	*D2
CN3	E3	R130	*E3
CN4	G3	R131	*E4
CN5	C6	R132	*E5
CN6	D6	R133	*D2
CN7	F6	R134	*D2
CN8	A3	R135	*D2
CN9	A4	R147	*G6
CN10	A5	R301	*G2
CN11	A6	R302	*F2
CN601	F6	R303	*G2
CN602	E6	R304	*F2
CN603	D6	R305	*G2
CN604	B6	R306	*G2
CN605	A6	R307	*G2
		R308	*F2
D103	*D1	R309	*G2
D301	*F2	R310	*F2
D302	*F2	R311	*G2
D303	*G6	R312	*F2
D304	*G6	R313	*G3
		R314	*G3
FL101	*C6	R315	*G5
FL102	*C6	R316	*G5
FL103	*E3	R317	*G6
FL104	*E4	R318	*G6
FL105	*E5	R319	*F6
FL106	*C4	R320	*F6
FL107	*D3	R321	*F6
FL108	*D4	R322	*F6
FL109	*D5	R323	*F5
FL110	*C3	R324	*F5
FL111	*D6	R325	*F5
FL112	*D6	R326	*F5
FL113	*F3	R327	*F5
FL114	*F4	R328	*F5
FL115	*F5	R329	*E2
FL116	*C5	R330	*F2
FL117	*F6	R331	*E2
FL201	*B5	R332	*F2
FL202	*B5		
FL203	*A5	S101	C2
FL204	*A5	S102	E2
FL205	*A5		
FL206	*A6	*:B SIDE	
FL207	*B6		
FL208	*B5		
FL209	*B6		

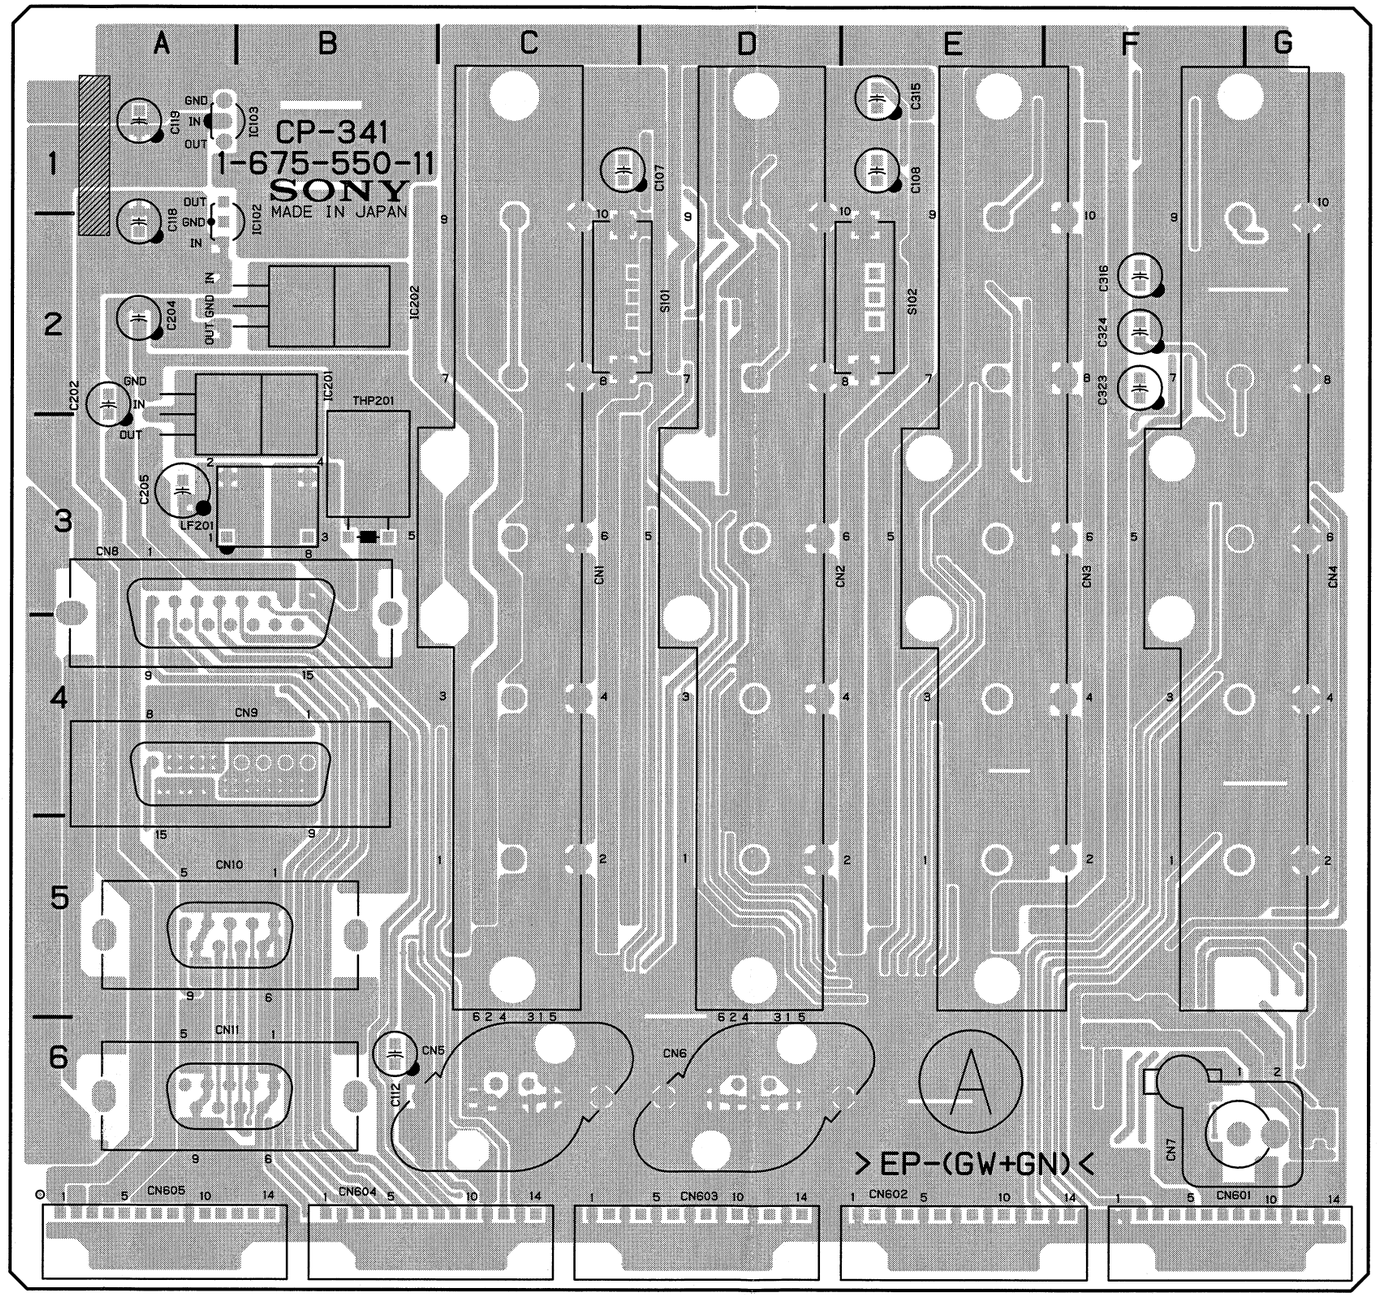

CP-341 -A SIDE-
SUFFIX: -11

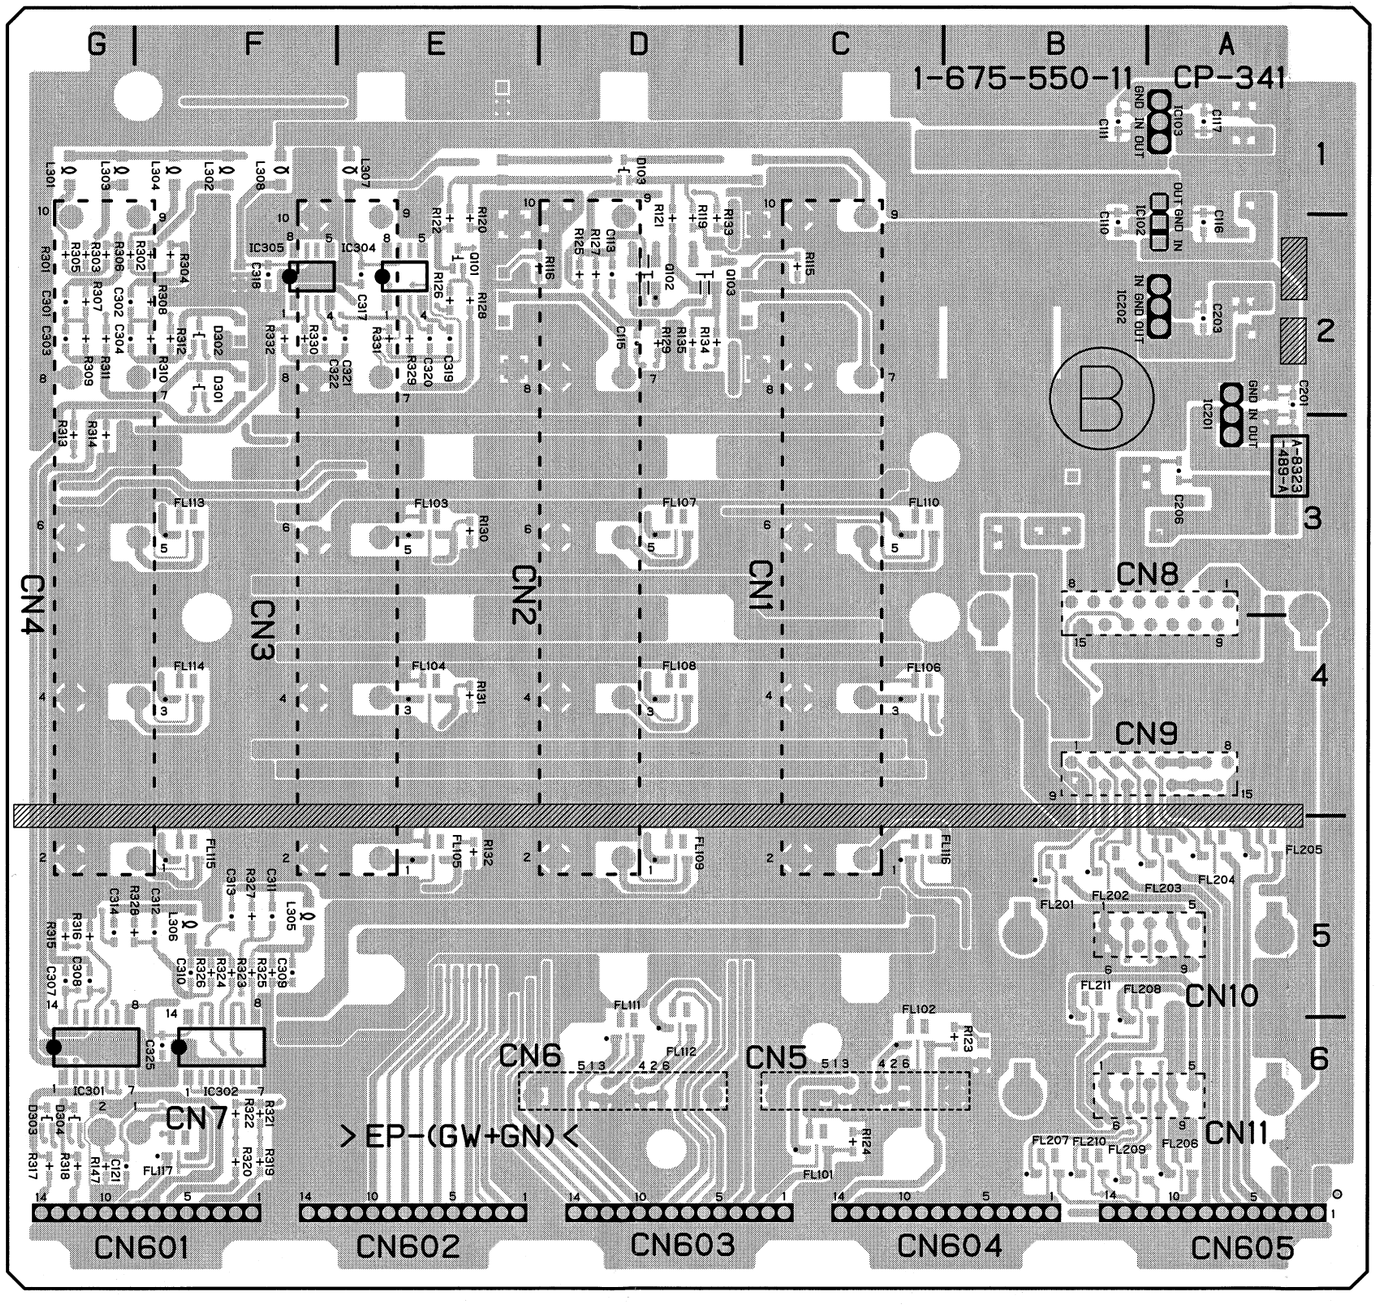

CP-341 -B SIDE-
SUFFIX: -11

CP-341 (1-675-550-11)

C107	C1	FL211	*B5
C108	E1		
C110	*B2	IC102	A2
C111	*B1	IC103	A1
C112	B6	IC201	A2
C113	*D2	IC202	A2
C115	*D2	IC301	*G6
C116	*A2	IC302	*F6
C117	*A1	IC304	*E2
C118	A2	IC305	*F2
C119	A1		
C121	*G6	L301	*G1
C201	*A2	L302	*F1
C202	A2	L303	*G1
C203	*A2	L304	*F1
C204	A2	L305	*F5
C205	A3	L306	*F5
C206	*A3	L307	*E1
C301	*G2	L308	*F1
C302	*G2		
C303	*G2	LF201	B3
C304	*G2		
C307	*G5	Q101	*E2
C308	*G5	Q102	*D2
C309	*F5	Q103	*D2
C310	*F5		
C311	*F5	R115	*C2
C312	*F5	R116	*D2
C313	*F5	R119	*D2
C314	*G5	R120	*E2
C315	E1	R121	*D2
C316	F2	R122	*E2
C317	*E2	R123	*B6
C318	*F2	R124	*C6
C319	*E2	R125	*D2
C320	*E2	R126	*E2
C321	*E2	R127	*D2
C322	*F2	R128	*E2
C323	F2	R129	*D2
C324	F2	R130	*E3
C325	*F6	R131	*E4
		R132	*E5
CN1	C3	R133	*D2
CN2	D3	R134	*D2
CN3	E3	R135	*D2
CN4	G3	R147	*G6
CN5	C6	R301	*G2
CN6	D6	R302	*F2
CN7	F6	R303	*G2
CN8	A3	R304	*F2
CN9	A4	R305	*G2
CN10	A5	R306	*G2
CN11	A6	R307	*G2
CN601	F6	R308	*F2
CN602	E6	R309	*G2
CN603	D6	R310	*F2
CN604	B6	R311	*G2
CN605	A6	R312	*F2
		R313	*G3
D103	*D1	R314	*G3
D301	*F2	R315	*G5
D302	*F2	R316	*G5
D303	*G6	R317	*G6
D304	*G6	R318	*G6
		R319	*F6
FL101	*C6	R320	*F6
FL102	*C6	R321	*F6
FL103	*E3	R322	*F6
FL104	*E4	R323	*F5
FL105	*E5	R324	*F5
FL106	*C4	R325	*F5
FL107	*D3	R326	*F5
FL108	*D4	R327	*F5
FL109	*D5	R328	*F5
FL110	*C3	R329	*E2
FL111	*D6	R330	*F2
FL112	*D6	R331	*E2
FL113	*F3	R332	*F2
FL114	*F4		
FL115	*F5	S101	C2
FL116	*C5	S102	E2
FL117	*F6		
FL201	*B5	THP201	B3
FL202	*B5		
FL203	*A5	*:B SIDE	
FL204	*A5		
FL205	*A5		
FL206	*A6		
FL207	*B6		
FL208	*B5		
FL209	*B6		
FL210	*B6		

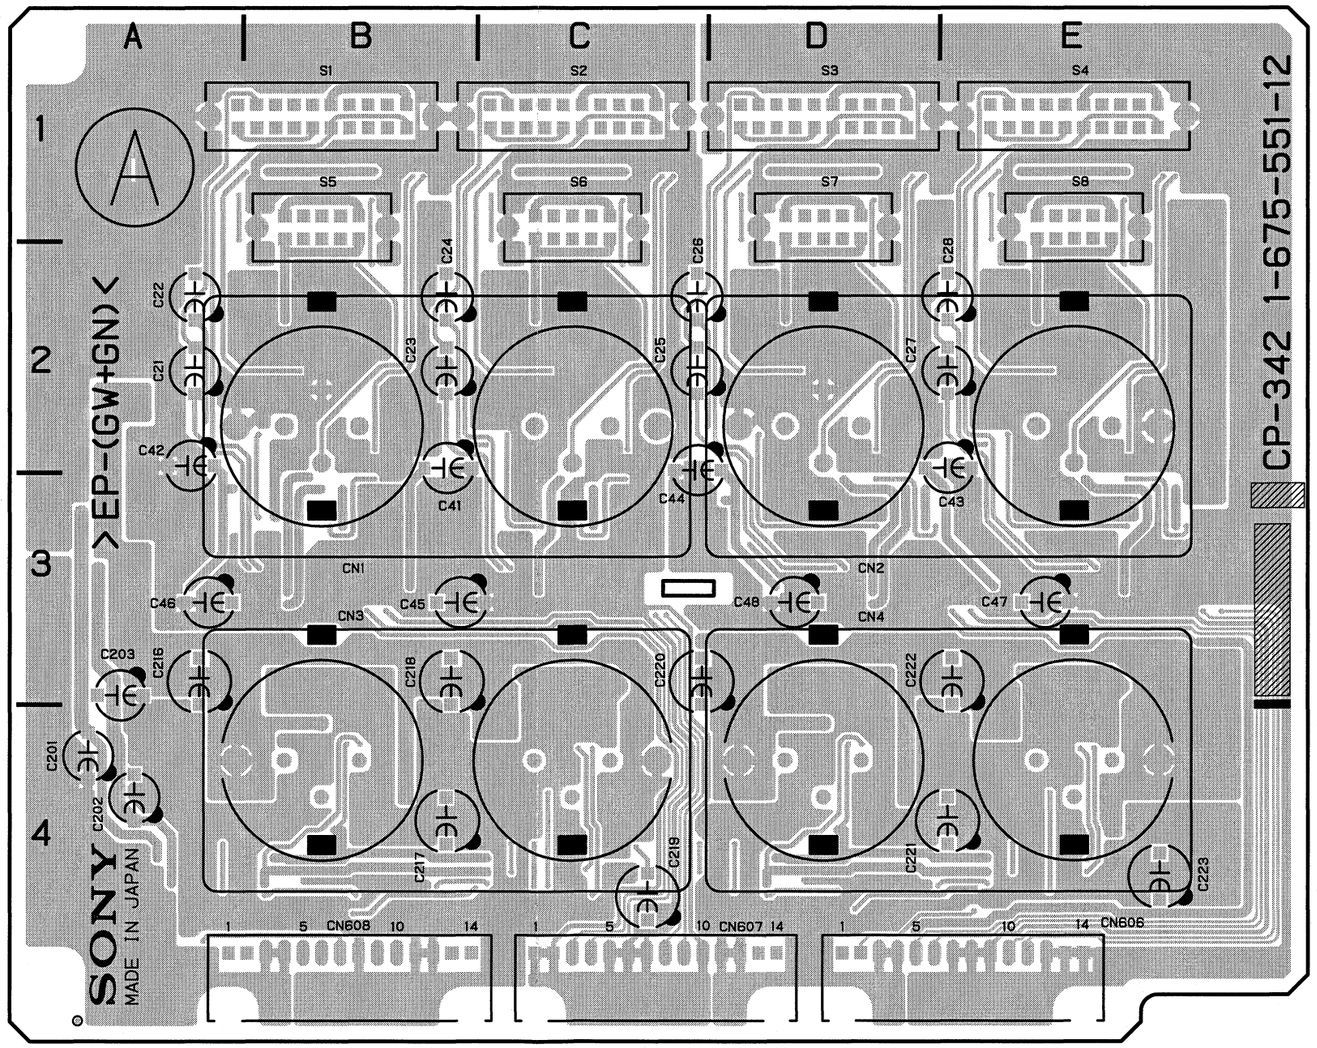

CP-342 -A SIDE-
SUFFIX: -12

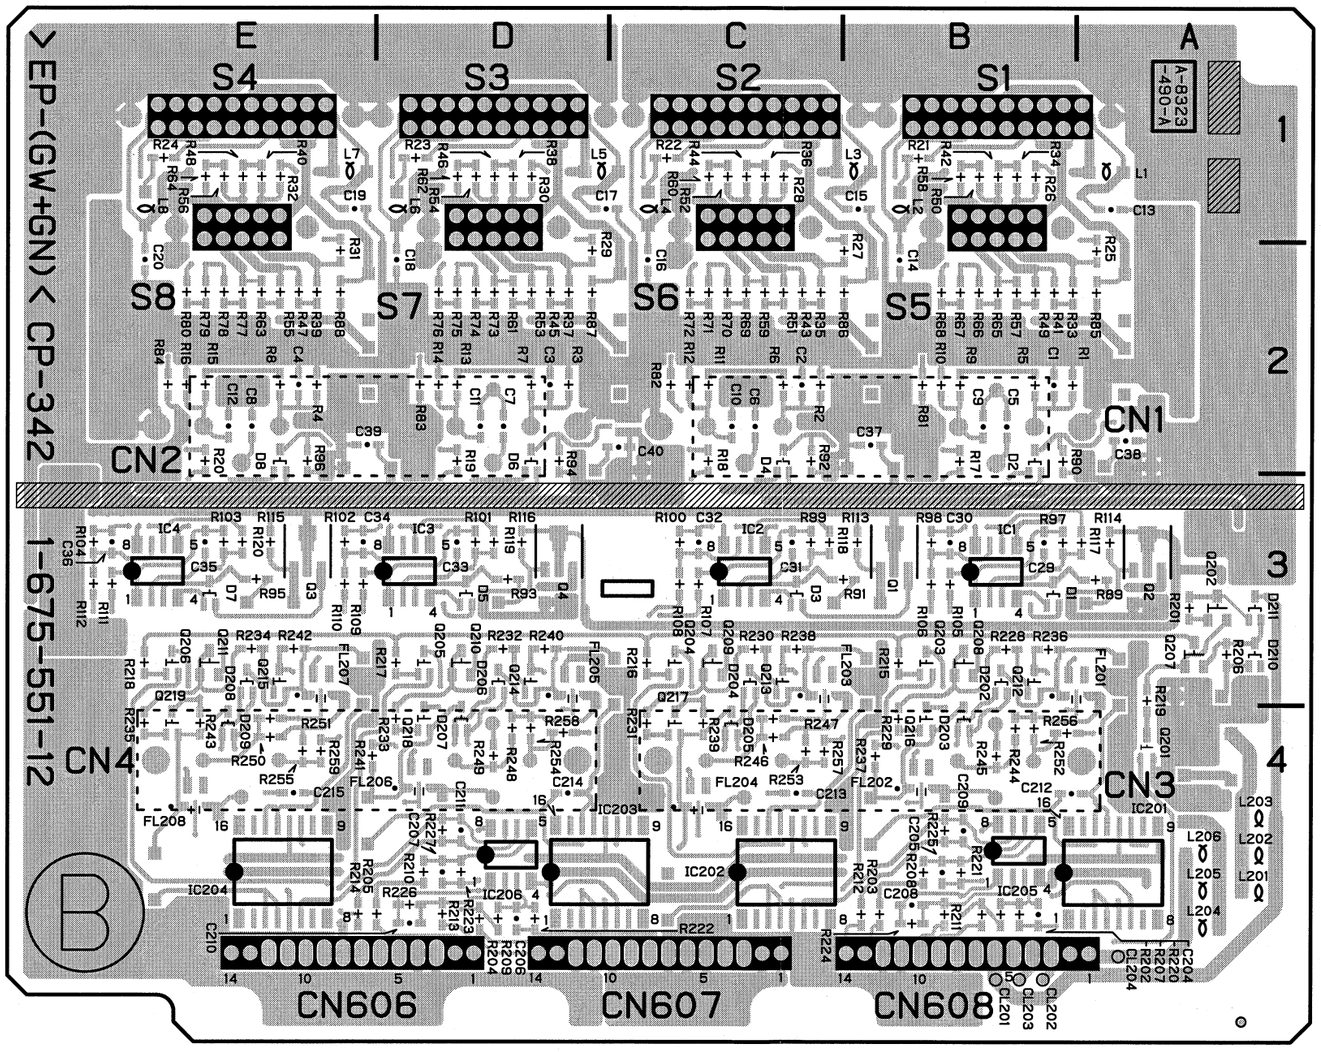

CP-342 -B SIDE-
SUFFIX: -12

CP-342 (1-675-551-12)

C1	*B2	D8	*E2	R22	*C1	R114	*A3
C2	*C2	D202	*B3	R23	*D1	R115	*E3
C3	*D2	D203	*B4	R24	*E1	R116	*D3
C4	*E2	D204	*C3	R25	*A2	R117	*A3
C5	*B2	D205	*C4	R26	*B1	R118	*C3
C6	*C2	D206	*D3	R27	*B2	R119	*D3
C7	*D2	D207	*D4	R28	*C1	R120	*E3
C8	*E2	D208	*E3	R29	*D2	R201	*A3
C9	*B2	D209	*E4	R30	*D1	R202	*B4
C10	*C2	D210	*A3	R31	*E2	R203	*B4
C11	*D2	D211	*A3	R32	*E1	R204	*D4
C12	*E2			R33	*B2	R205	*D4
C13	*A1	FL201	*A3	R34	*B1	R206	*A3
C14	*B2	FL202	*B4	R35	*C2	R207	*B4
C15	*B1	FL203	*C3	R36	*C1	R208	*B4
C16	*C2	FL204	*C4	R37	*D2	R209	*D4
C17	*D1	FL205	*D3	R38	*D1	R210	*D4
C18	*D2	FL206	*D4	R39	*E2	R211	*B4
C19	*E1	FL207	*E3	R40	*E1	R212	*B4
C20	*E2	FL208	*E4	R41	*B2	R213	*D4
C21	A2			R42	*B1	R214	*E4
C22	A2	IC1	*B3	R43	*C2	R215	*B3
C23	B2	IC2	*C3	R44	*C1	R216	*C3
C24	B2	IC3	*D3	R45	*D2	R217	*D3
C25	C2	IC4	*E3	R46	*D1	R218	*E3
C26	C2	IC201	*B4	R47	*E2	R219	*A3
C27	E2	IC202	*C4	R48	*E1	R220	*B4
C28	E2	IC203	*D4	R49	*B2	R221	*B4
C29	*B3	IC204	*E4	R50	*B1	R222	*D4
C30	*B3	IC205	*B4	R51	*C2	R223	*D4
C31	*C3	IC206	*D4	R52	*C1	R224	*B4
C32	*C3			R53	*D2	R225	*B4
C33	*D3	L1	*A1	R54	*D1	R226	*D4
C34	*E3	L2	*B1	R55	*E2	R227	*D4
C35	*E3	L3	*B1	R56	*E1	R228	*B3
C36	*E3	L4	*C1	R57	*B2	R229	*B4
C37	*B2	L5	*D1	R58	*B1	R230	*C3
C38	*A2	L6	*D1	R59	*C2	R231	*C4
C39	*E2	L7	*E1	R60	*C1	R232	*D3
C40	*C2	L8	*E1	R61	*D2	R233	*D4
C41	B2	L201	*A4	R62	*D1	R234	*E3
C42	A2	L202	*A4	R63	*E2	R235	*E4
C43	E2	L203	*A4	R64	*E1	R236	*B3
C44	C2	L204	*A4	R65	*B2	R237	*B4
C45	B3	L205	*A4	R66	*B2	R238	*C3
C46	A3	L206	*A4	R67	*B2	R239	*C4
C47	E3			R68	*B2	R240	*D3
C48	D3	Q1	*B3	R69	*C2	R241	*E4
C201	A4	Q2	*A3	R70	*C2	R242	*E3
C202	A4	Q3	*E3	R71	*C2	R243	*E4
C203	A3	Q4	*D3	R72	*C2	R244	*B4
C204	*B4	Q201	*A4	R73	*D2	R245	*B4
C205	*B4	Q202	*A3	R74	*D2	R246	*C4
C206	*D4	Q203	*B3	R75	*D2	R247	*C4
C207	*D4	Q204	*C3	R76	*D2	R248	*D4
C208	*B4	Q205	*D3	R77	*E2	R249	*D4
C209	*B4	Q206	*E3	R78	*E2	R250	*E4
C210	*D4	Q207	*A3	R79	*E2	R251	*E4
C211	*D4	Q208	*B3	R80	*E2	R252	*B4
C212	*B4	Q209	*C3	R81	*B2	R253	*C4
C213	*C4	Q210	*D3	R82	*C2	R254	*D4
C214	*D4	Q211	*E3	R83	*D2	R255	*E4
C215	*E4	Q212	*B3	R84	*E2	R256	*B4
C216	A3	Q213	*C3	R85	*A2	R257	*C4
C217	B4	Q214	*D3	R86	*B2	R258	*D4
C218	B3	Q215	*E3	R87	*D2	R259	*E4
C219	C4	Q216	*B4	R88	*E2		
C220	C3	Q217	*C4	R89	*A3	S1	B1
C221	E4	Q218	*D4	R90	*B2	S2	C1
C222	E3	Q219	*E4	R91	*B3	S3	D1
C223	E4			R92	*C2	S4	E1
		R1	*B2	R93	*D3	S5	B1
CL201	*B4	R2	*C2	R94	*D2	S6	C1
CL202	*B4	R3	*D2	R95	*E3	S7	D1
CL203	*B4	R4	*E2	R96	*E2	S8	E1
CL204	*A4	R5	*B2	R97	*B3		
		R6	*C2	R98	*B3	*:B SIDE	
CN1	B2	R7	*D2	R99	*C3		
CN2	E2	R8	*E2	R100	*C3		
CN3	B4	R9	*B2	R101	*D3		
CN4	E4	R10	*B2	R102	*E3		
CN606	E4	R11	*C2	R103	*E3		
CN607	C4	R12	*C2	R104	*E3		
CN608	B4	R13	*D2	R105	*B3		
		R14	*D2	R106	*B3		
D1	*B3	R15	*E2	R107	*C3		
D2	*B2	R16	*E2	R108	*C3		
D3	*C3	R17	*B2	R109	*E3		
D4	*C2	R18	*C2	R110	*E3		
D5	*D3	R19	*D2	R111	*E3		
D6	*D2	R20	*E2	R112	*E3		
D7	*E3	R21	*B1	R113	*B3		

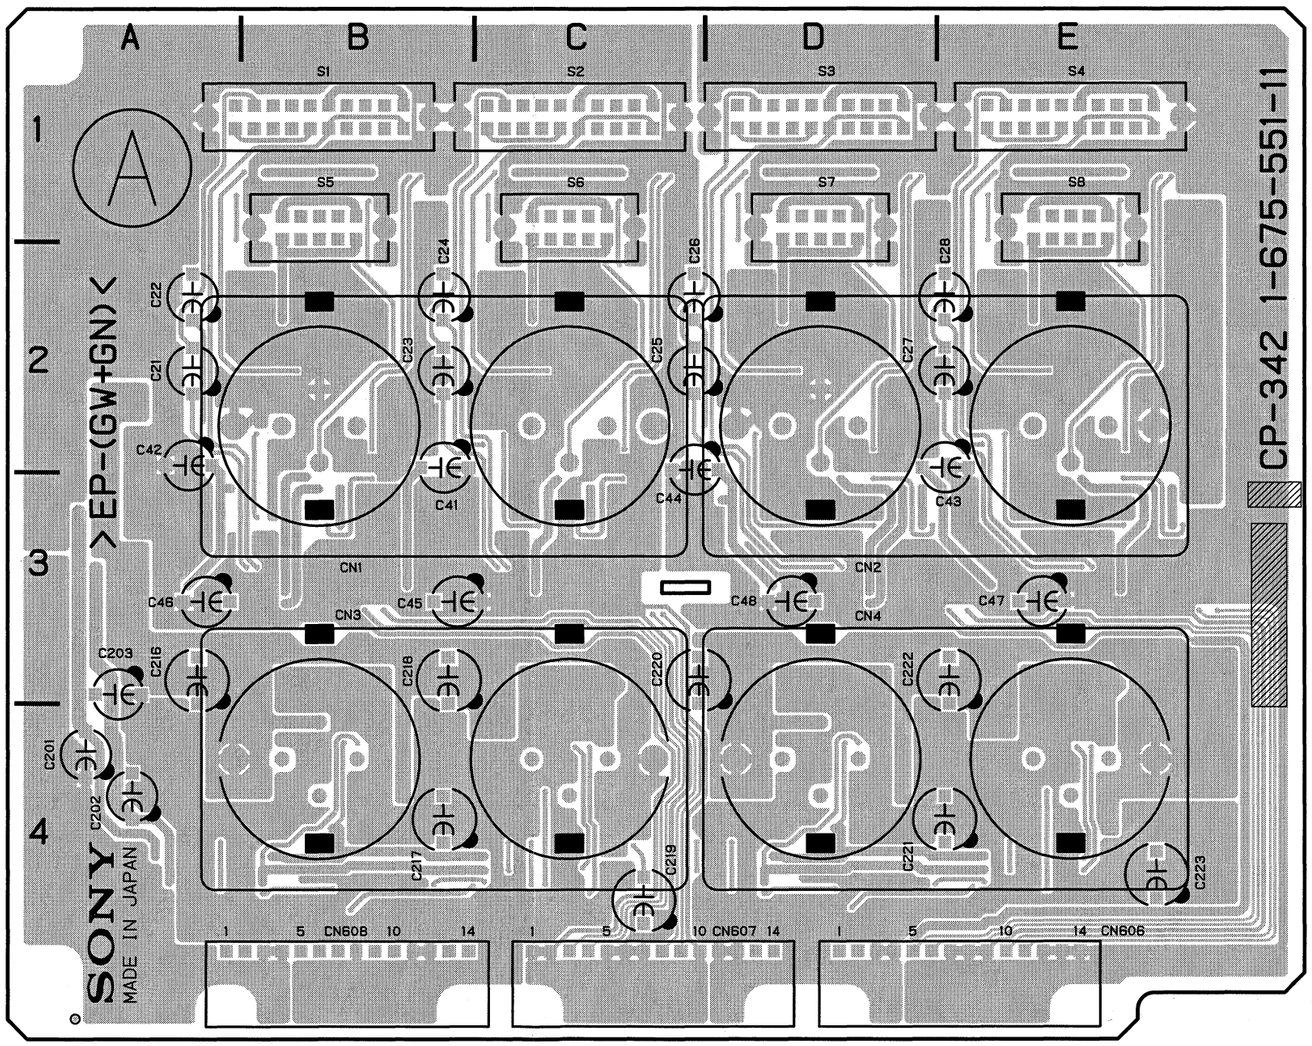

CP-342 -A SIDE-
SUFFIX: -11

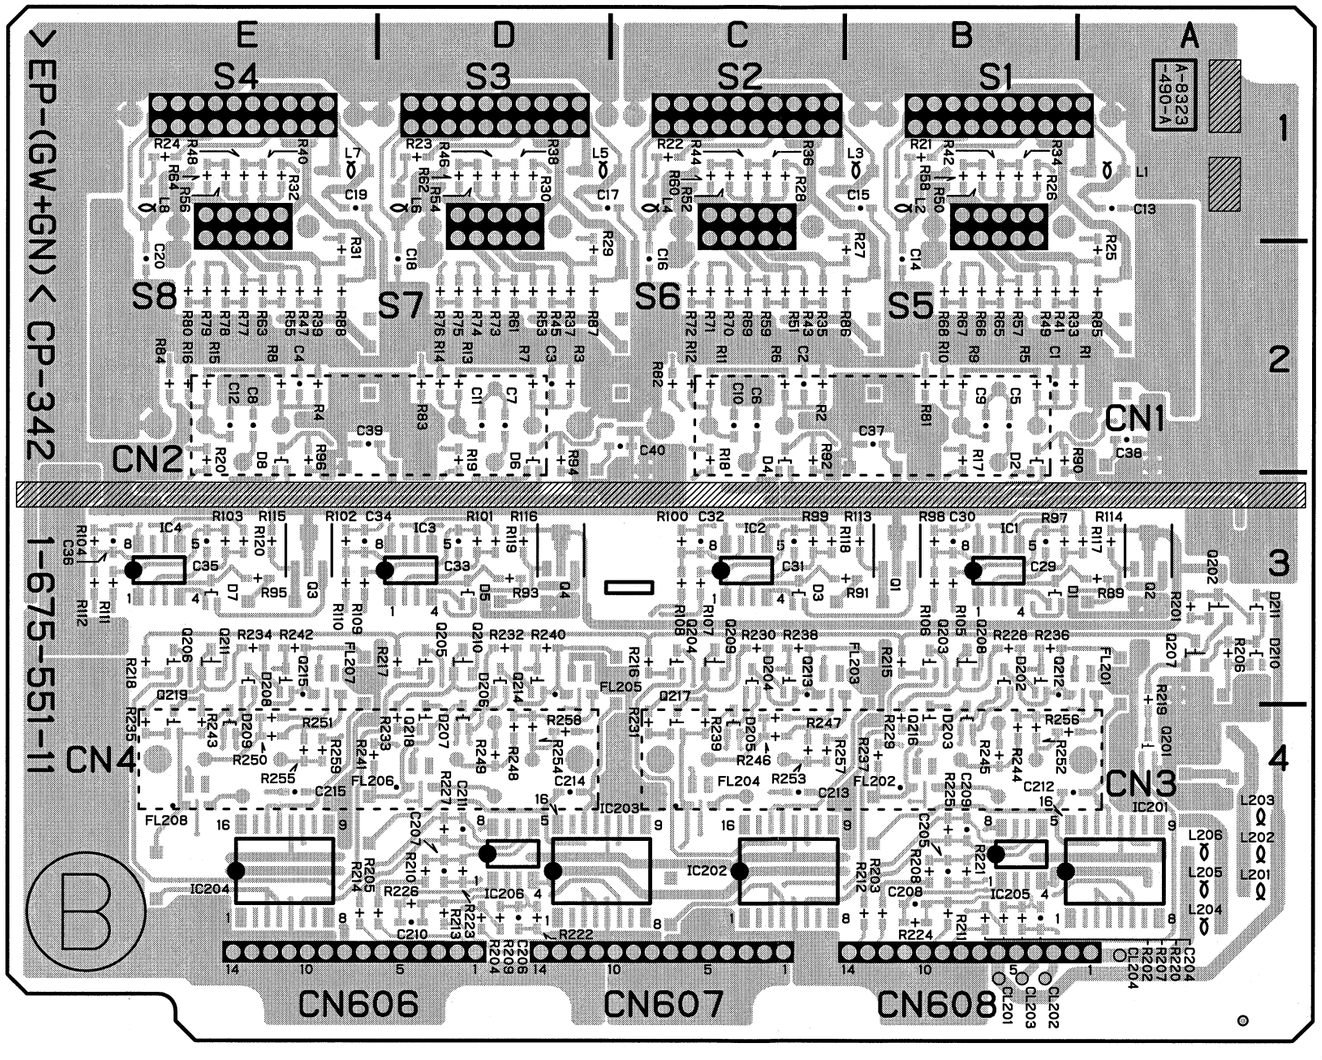

CP-342 -B SIDE-
SUFFIX: -11

C1	*B2	D8	*E2	R22	*C1	R114	*A3
C2	*C2	D202	*B3	R23	*D1	R115	*E3
C3	*D2	D203	*B4	R24	*E1	R116	*D3
C4	*E2	D204	*C3	R25	*A2	R117	*A3
C5	*B2	D205	*C4	R26	*B1	R118	*C3
C6	*C2	D206	*D3	R27	*B2	R119	*D3
C7	*D2	D207	*D4	R28	*C1	R120	*E3
C8	*E2	D208	*E3	R29	*D2	R201	*A3
C9	*B2	D209	*E4	R30	*D1	R202	*B4
C10	*C2	D210	*A3	R31	*E2	R203	*B4
C11	*D2	D211	*A3	R32	*E1	R204	*D4
C12	*E2			R33	*B2	R205	*D4
C13	*A1	FL201	*A3	R34	*B1	R206	*A3
C14	*B2	FL202	*B4	R35	*C2	R207	*B4
C15	*B1	FL203	*C3	R36	*C1	R208	*B4
C16	*C2	FL204	*C4	R37	*D2	R209	*D4
C17	*D1	FL205	*D3	R38	*D1	R210	*D4
C18	*D2	FL206	*D4	R39	*E2	R211	*B4
C19	*E1	FL207	*E3	R40	*E1	R212	*B4
C20	*E2	FL208	*E4	R41	*B2	R213	*D4
C21	A2			R42	*B1	R214	*E4
C22	A2	IC1	*B3	R43	*C2	R215	*B3
C23	B2	IC2	*C3	R44	*C1	R216	*C3
C24	B2	IC3	*D3	R45	*D2	R217	*D3
C25	C2	IC4	*E3	R46	*D1	R218	*E3
C26	C2	IC201	*B4	R47	*E2	R219	*A3
C27	E2	IC202	*C4	R48	*E1	R220	*B4
C28	E2	IC203	*D4	R49	*B2	R221	*B4
C29	*B3	IC204	*E4	R50	*B1	R222	*D4
C30	*B3	IC205	*B4	R51	*C2	R223	*D4
C31	*C3	IC206	*D4	R52	*C1	R224	*B4
C32	*C3			R53	*D2	R225	*B4
C33	*D3	L1	*A1	R54	*D1	R226	*D4
C34	*E3	L2	*B1	R55	*E2	R227	*D4
C35	*E3	L3	*B1	R56	*E1	R228	*B3
C36	*E3	L4	*C1	R57	*B2	R229	*B4
C37	*B2	L5	*D1	R58	*B1	R230	*C3
C38	*A2	L6	*D1	R59	*C2	R231	*C4
C39	*E2	L7	*E1	R60	*C1	R232	*D3
C40	*C2	L8	*E1	R61	*D2	R233	*D4
C41	B2	L201	*A4	R62	*D1	R234	*E3
C42	A2	L202	*A4	R63	*E2	R235	*E4
C43	E2	L203	*A4	R64	*E1	R236	*B3
C44	C2	L204	*A4	R65	*B2	R237	*B4
C45	B3	L205	*A4	R66	*B2	R238	*C3
C46	A3	L206	*A4	R67	*B2	R239	*C4
C47	E3			R68	*B2	R240	*D3
C48	D3	Q1	*B3	R69	*C2	R241	*E4
C201	A4	Q2	*A3	R70	*C2	R242	*E3
C202	A4	Q3	*E3	R71	*C2	R243	*E4
C203	A3	Q4	*D3	R72	*C2	R244	*B4
C204	*B4	Q201	*A4	R73	*D2	R245	*B4
C205	*B4	Q202	*A3	R74	*D2	R246	*C4
C206	*D4	Q203	*B3	R75	*D2	R247	*C4
C207	*D4	Q204	*C3	R76	*D2	R248	*D4
C208	*B4	Q205	*D3	R77	*E2	R249	*D4
C209	*B4	Q206	*E3	R78	*E2	R250	*E4
C210	*D4	Q207	*A3	R79	*E2	R251	*E4
C211	*D4	Q208	*B3	R80	*E2	R252	*B4
C212	*B4	Q209	*C3	R81	*B2	R253	*C4
C213	*C4	Q210	*D3	R82	*C2	R254	*D4
C214	*D4	Q211	*E3	R83	*D2	R255	*E4
C215	*E4	Q212	*B3	R84	*E2	R256	*B4
C216	A3	Q213	*C3	R85	*A2	R257	*C4
C217	B4	Q214	*D3	R86	*B2	R258	*D4
C218	B3	Q215	*E3	R87	*D2	R259	*E4
C219	C4	Q216	*B4	R88	*E2		
C220	C3	Q217	*C4	R89	*A3	S1	B1
C221	E4	Q218	*D4	R90	*B2	S2	C1
C222	E3	Q219	*E4	R91	*B3	S3	D1
C223	E4			R92	*C2	S4	E1
		R1	*B2	R93	*D3	S5	B1
CL201	*B4	R2	*C2	R94	*D2	S6	C1
CL202	*B4	R3	*D2	R95	*E3	S7	D1
CL203	*B4	R4	*E2	R96	*E2	S8	E1
CL204	*A4	R5	*B2	R97	*B3		
		R6	*C2	R98	*B3	*:B SIDE	
CN1	B2	R7	*D2	R99	*C3		
CN2	E2	R8	*E2	R100	*C3		
CN3	B4	R9	*B2	R101	*D3		
CN4	E4	R10	*B2	R102	*E3		
CN606	E4	R11	*C2	R103	*E3		
CN607	C4	R12	*C2	R104	*E3		
CN608	B4	R13	*D2	R105	*B3		
		R14	*D2	R106	*B3		
D1	*B3	R15	*E2	R107	*C3		
D2	*B2	R16	*E2	R108	*C3		
D3	*C3	R17	*B2	R109	*E3		
D4	*C2	R18	*C2	R110	*E3		
D5	*D3	R19	*D2	R111	*E3		
D6	*D2	R20	*E2	R112	*E3		
D7	*E3	R21	*B1	R113	*B3		

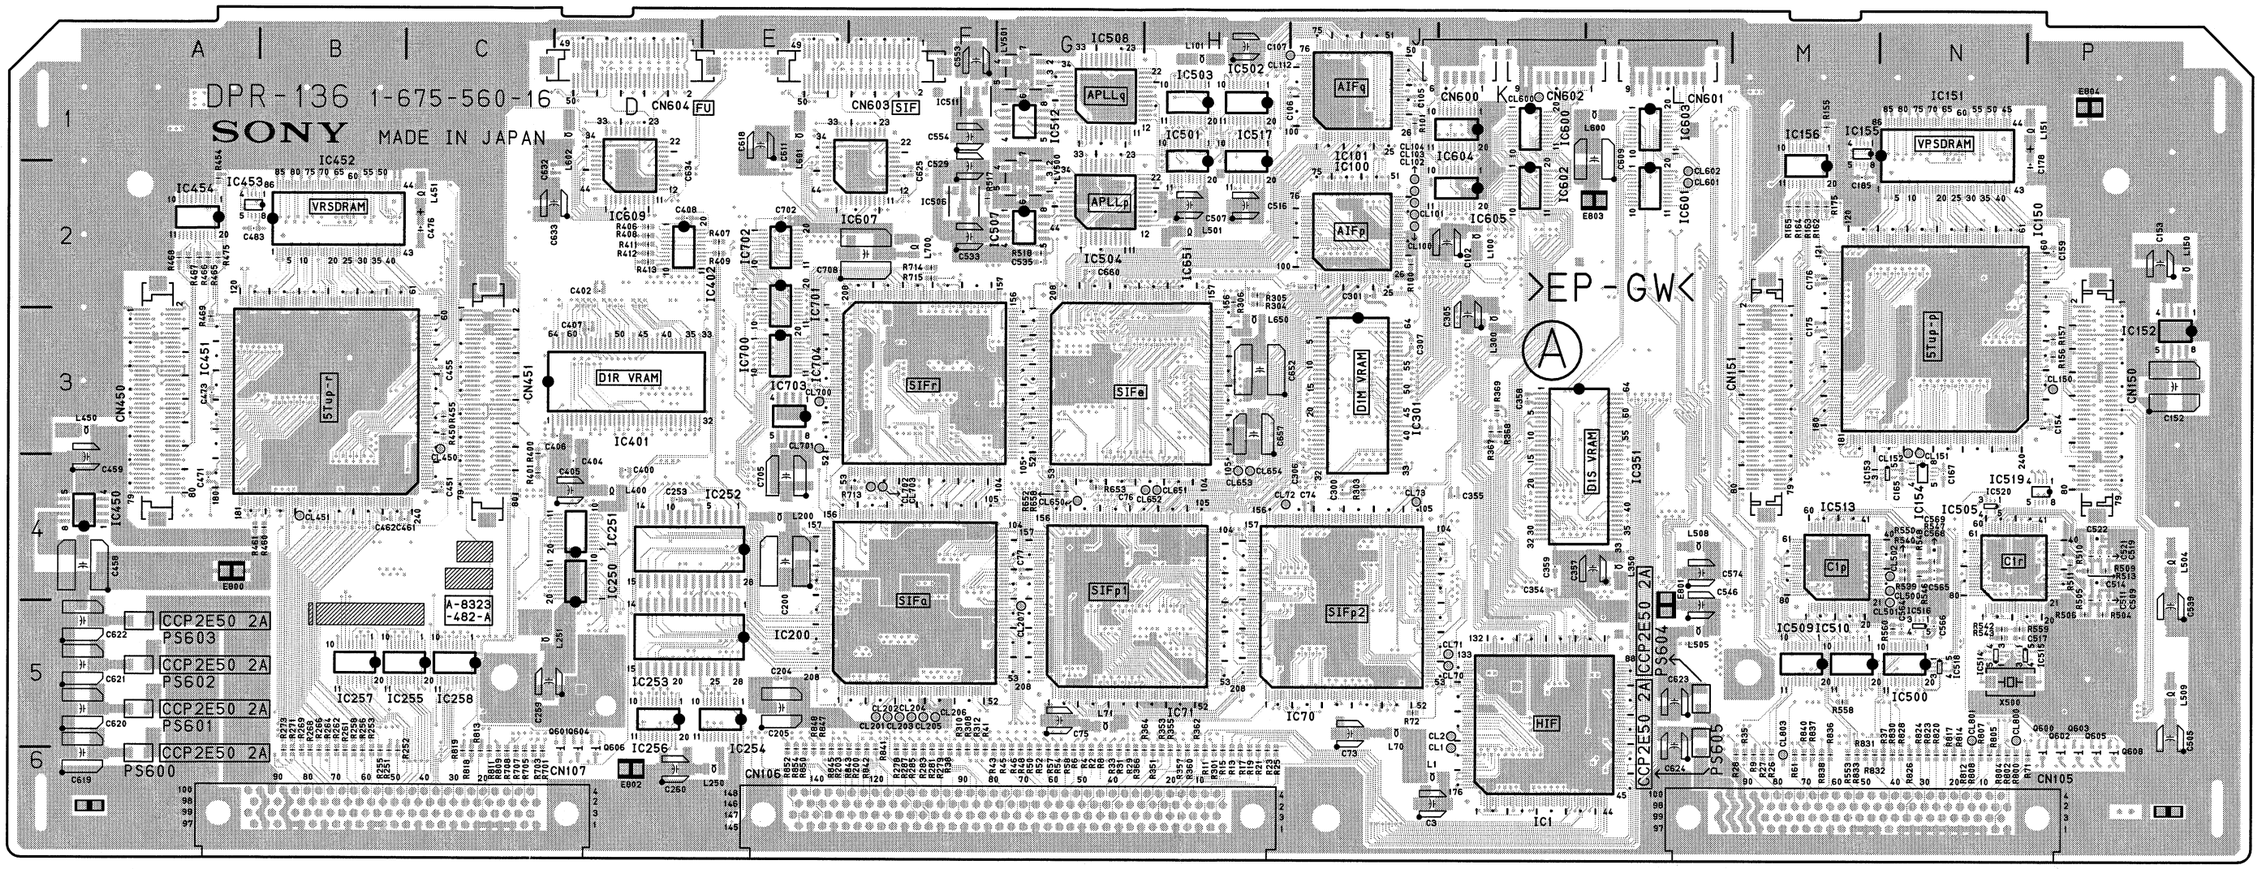

DPR-136 -A SIDE-
SUFFIX: -16

DPR-136 (1-675-560-16)

C1	*K6	C155	*P3	C183	*N1	C302	*K3	C455	C3	C483	A2	C527	*G2	C555	*G1	C608	*K1	C651	*C3	C715	*G3	CL202	F5	CN105	M6	IC1	K5	IC402	D2	IC601	L2	L300	K3	PS605	L5
C2	*L5	C156	*P3	C184	*N1	C303	*H3	C456	*C3	C500	*N5	C528	*G2	C556	*G1	C609	L1	C652	H3	C716	*F3	CL203	F5	CN106	G6	IC70	J5	IC450	A4	IC602	K2	L350	L4		
C3	J6	C157	*P2	C185	M2	C304	*K3	C457	*C2	C501	*N5	C529	F2	C557	*G1	C610	*K2	C653	*G3	C717	*F3	CL204	F5	CN107	B6	IC71	G5	IC451	B3	IC603	L1	L400	D4	Q600	P5
C4	*K6	C158	*P2	C200	E4	C305	K3	C458	A4	C502	*N5	C530	*N4	C558	*G1	C611	E2	C654	*G3			CL205	F5	CN150	P3	IC100	J2	IC452	B2	IC604	K1	L450	A3	Q601	D5
C5	*K5	C159	P2	C201	*P5	C306	J4	C459	A4	C503	*H1	C531	*N4	C559	*G1	C612	*A6	C655	*G3	CL1	K5	CL206	F5	CN151	M3	IC101	J1	IC453	A2	IC605	K2	L451	C2	Q602	P5
C70	*J5	C160	*N2	C202	*P5	C307	J3	C460	*C2	C504	*N5	C532	*N5	C560	*G1	C613	*A5	C656	*G3	CL2	K5	CL207	G5	CN450	A3	IC150	N3	IC454	A2	IC606	*F1	L500	*H2	Q603	P5
C71	*H5	C161	*N3	C203	*E4	C352	*K3	C461	B4	C505	P5	C533	F2	C561	*G1	C614	*A5	C657	H3	CL70	K5	CL400	*C3	CN451	C3	IC151	N2	IC500	N5	IC607	F2	L501	H2	Q604	D5
C72	*J5	C162	*N3	C204	E5	C353	*L4	C462	B4	C506	*H2	C534	*G2	C562	*F1	C615	*A5	C658	*H2	CL71	K5	CL450	C3	CN600	K1	IC152	P2	IC501	H1	IC608	*D1	L502	*P4	Q605	P5
C73	J5	C163	*N3	C205	E5	C354	K4	C463	*B4	C507	H2	C535	G2	C563	*N4	C616	*L5	C659	*G4	CL72	H4	CL451	B4	CN601	L1	IC153	N4	IC502	H1	IC609	D2	L503	*P4	Q606	D5
C74	J4	C164	*N2	C206	*E5	C355	K4	C464	*B2	C508	*P4	C536	*P4	C564	N5	C617	*L5	C660	G2	CL73	J4	CL500	N4	CN602	K1	IC154	N4	IC503	H1	IC650	*G2	L504	P4	Q607	*J2
C75	G5	C165	N4	C207	*P5	C356	*L5	C465	*B2	C509	P4	C537	*G2	C565	N4	C618	E1	C661	*G4	CL100	J2	CL501	N4	CN603	F1	IC155	M1	IC504	G2	IC651	G3	L505	L5	Q608	P5
C76	G4	C166	*N2	C208	*E4	C357	L4	C466	*B2	C510	*P4	C538	*G2	C566	N5	C619	A6	C662	*H3	CL101	J2	CL502	N4	CN604	D1	IC156	M1	IC505	N4	IC700	E3	L507	*N4		
C77	G4	C167	N4	C209	*P5	C358	K3	C467	*B4	C511	P4	C539	P4	C567	*N4	C620	A5	C663	*H3	CL102	J2	CL600	K1			IC200	F4	IC506	F2	IC701	E2	L508	L4	R1	*G5
C100	*J2	C168	*N2	C210	*F4	C359	K4	C468	*A2	C512	*H1	C540	*F2	C568	N4	C621	A5	C700	*E3	CL103	J2	CL601	L2	D500	*P5	IC250	D4	IC507	G2	IC702	E2	L509	P5	R2	G5
C101	*J2	C169	*N3	C211	*F4	C400	D4	C469	*A4	C513	*N5	C541	*G1	C569	N4	C622	A5	C701	*E2	CL104	J2	CL602	L2	D501	*P4	IC251	D4	IC508	G1	IC703	E3	L600	L1	R3	*G5
C102	K2	C170	*M2	C250	*D4	C401	*E3	C470	*A2	C514	P4	C542	*G2	C570	*M4	C623	L5	C702	E2	CL105	*J2	CL650	G4	D502	*P4	IC252	E4	IC509	M5	IC704	F3	L601	E1	R4	G5
C103	*K2	C171	*M3	C251	*D4	C402	D2	C471	A4	C515	*H2	C543	*F2	C571	*M4	C624	L5	C703	*E3	CL106	*J2	CL651	H4	D503	*P4	IC253	E5	IC510	M5	IC705	*F3	L602	D1	R5	*G5
C104	*J2	C172	*M2	C252	*D4	C403	*C3	C472	*A4	C516	H2	C544	*M5	C572	*M5	C625	F2	C704	*E4	CL107	*J1	CL652	H4	D504	*G2	IC254	E5	IC511	F1			L650	H3	R6	G5
C105	J1	C173	*M3	C253	D4	C404	D4	C473	A3	C517	N5	C545	*M5	C573	*M4	C626	*A6	C705	E4	CL108	*J1	CL653	H4	D505	*G1	IC255	C5	IC512	G1	L1	J6	L700	P2	R7	*M6
C106	H1	C174	*M3	C254	*C5	C405	D4	C474	*A3	C518	*P4	C546	L4	C574	L4	C627	*A5	C706	*E3	CL109	*J1	CL654	H4	D508	*N4	IC256	D5	IC513	M4	L70	J5			R8	G5
C107	H1	C175	M3	C255	*E5	C406	D3	C475	*A3	C519	P4	C547	*G1	C600	*L2	C628	*A5	C707	*E3	CL110	*J1	CL700	E3	D509	*N4	IC257	B5	IC514	N5	L71	G5	LV500	G2	R9	M6
C108	*H1	C176	M2	C256	*B5	C407	D3	C476	C2	C520	*P4	C548	*G1	C601	*K1	C629	*A5	C708	F2	CL111	*J1	CL701	E3			IC258	C5	IC515	N5	L100	K2	LV501	G1	R10	*G5
C109	*J1	C177	*M2	C257	*C5	C408	D2	C477	*B2	C521	P4	C549	*G1	C602	*K1	C630	*L5	C709	*F2	CL112	H1	CL702	F4	E800	A4	IC300	*J3	IC516	N5	L101	H1			R11	H5
C150	*P2	C178	P1	C258	*D5	C450	*A4	C478	*B2	C522	P4	C550	*H1	C603	*K2	C631	*L5	C710	*F3	CL113	*J1	CL703	F4	E801	L4	IC301	J3	IC517	H1	L150	P2	PS600	A6	R12	*M6
C151	*P3	C179	*N2	C259	C5	C451	C4	C479	*B2	C523	*H2	C551	*G1	C604	*K2	C632	C2	C711	*F4	CL150	P3	CL800	N5	E802	D6	IC350	*K4	IC518	N5	L151	P1	PS601	A5	R13	H5
C152	P3	C180	*N2	C260	D6	C452	*A4	C480	*B2	C524	*G2	C552	*G1	C605	*L1	C633	C2	C712	*E3	CL151	N3	CL801	N5	E803	L2	IC351	K3	IC519	P4	L200	E4	PS602	A5	R14	*H5
C153	P2	C181	*N2	C300	J4	C453	*C3	C481	*B2	C525	*G2	C553	F1	C606	*K2	C634	D2	C713	*F4	CL152	N3	CL802	*N5	E804	P1	IC400	*D3	IC520	N4	L250	E6	PS603	A5	R15	H5
C154	P3	C182	*N1	C301	J2	C454	*C3	C482	*B2	C526	*G2	C554	F1	C607	*K2	C650	*G2	C714	*G3	CL201	F5	CL803	M6			IC401	C3	IC600	K1	L251	C5	PS604	L5	R16	*H5

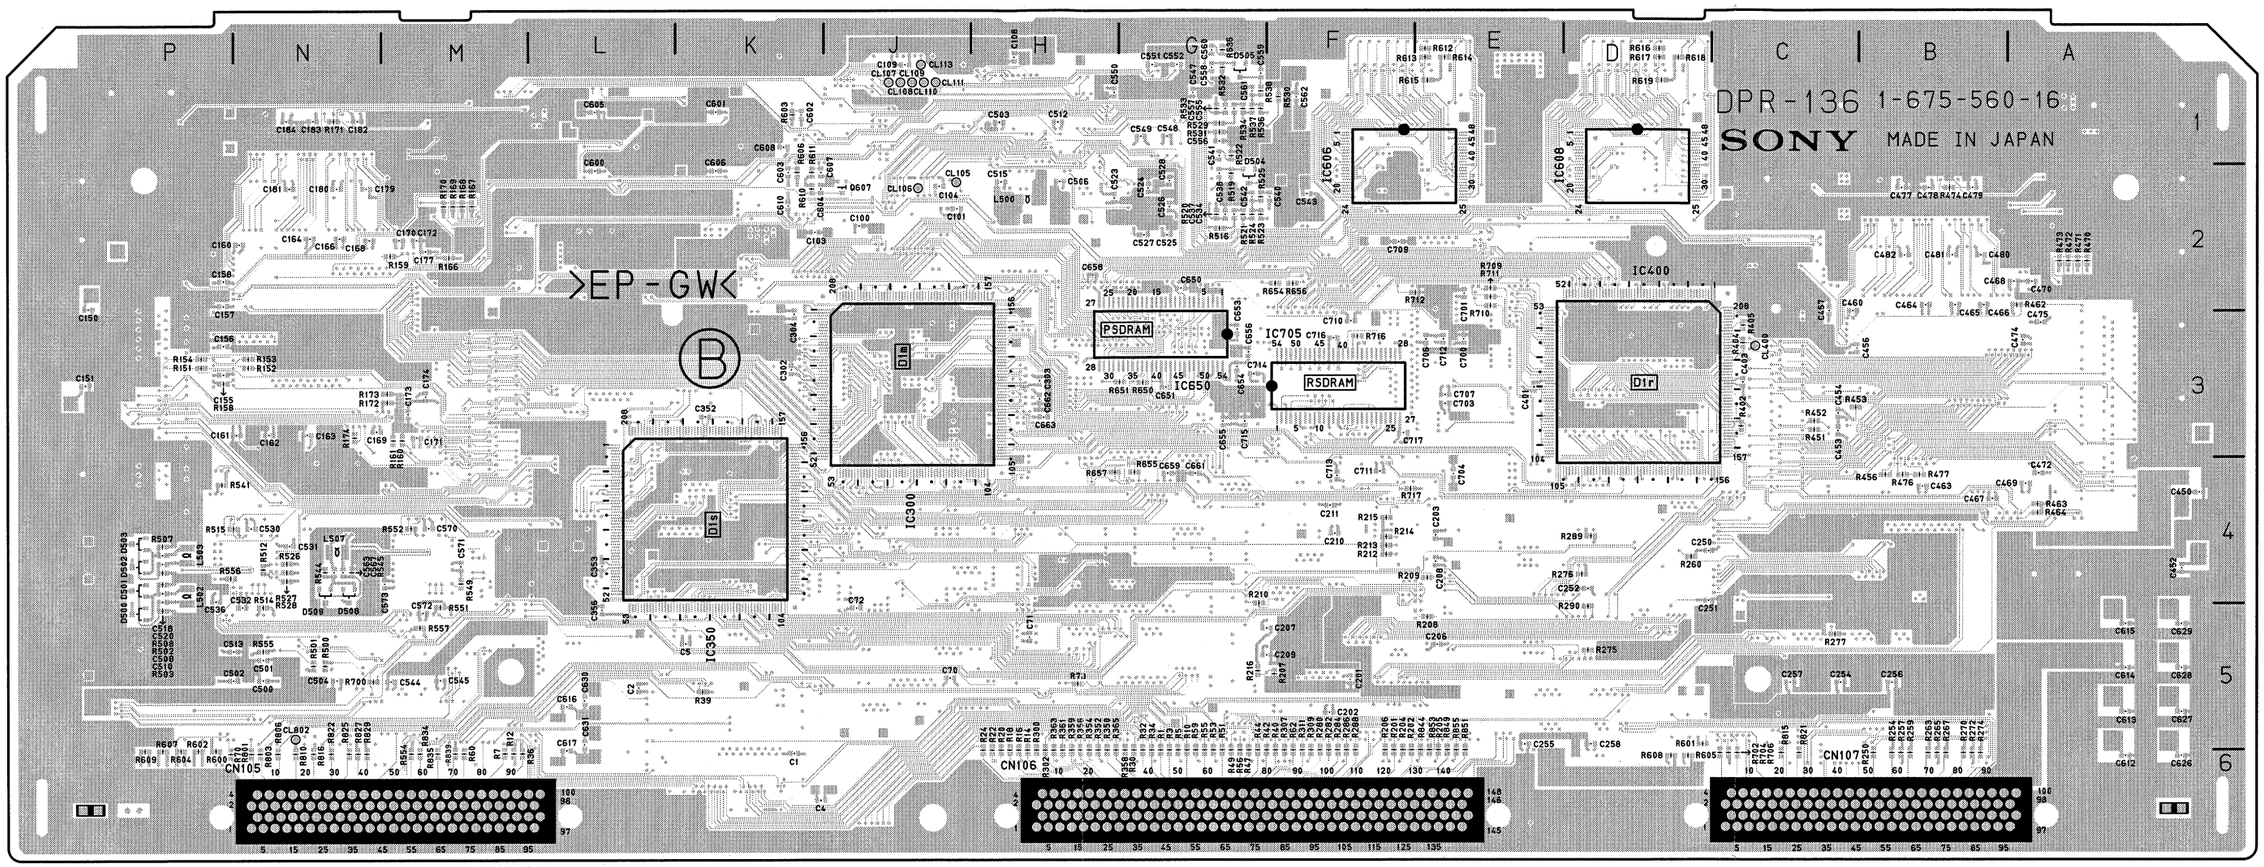

DPR-136 -B SIDE-
SUFFIX: -16

R17	H5	R45	G5	R155	M1	R207	*F5	R269	B6	R306	H2	R401	C4	R470	*A2	R520	*G2	R548	N4	R615	*E1	R714	F2	R824	N6	R853	*E5
R18	*H5	R46	G5	R156	P3	R208	*E5	R270	*B6	R307	*F5	R402	*C3	R471	*A2	R521	*G2	R549	*M4	R616	*D1	R715	F2	R825	*N6	R854	E5
R19	H5	R47	*G5	R157	P3	R209	*E4	R271	B6	R308	F5	R404	*C3	R472	*A2	R522	*G1	R550	N4	R617	*D1	R716	*F3	R826	N6	R855	*E5
R20	*H5	R48	G5	R158	*P3	R210	*G4	R272	*B6	R309	*F5	R405	*C3	R473	*A2	R523	*G2	R551	*M5	R618	*D1	R717	*F4	R827	*N6		
R21	H5	R49	*G5	R159	*M2	R212	*F4	R273	B6	R310	F5	R406	D2	R474	*B2	R524	*G2	R552	*M4	R619	*D1	R800	N6	R828	N6	X500	N5
R22	*H5	R50	G5	R160	*M3	R213	*F4	R274	*B6	R311	*F5	R407	E2	R475	A2	R525	*G2	R553	M6	R650	*G3	R801	*N6	R829	*N6		
R23	H5	R51	*G5	R161	*M3	R214	*F4	R275	*D5	R312	F5	R408	D2	R476	*B4	R526	*N4	R554	*M6	R651	*G3	R802	N6	R830	N6	*:B SIDE	
R24	*H5	R52	G5	R162	M2	R215	*F4	R276	*D4	R350	*H5	R409	E2	R477	*B4	R527	*N4	R555	*N5	R652	G4	R803	*N6	R831	M6		
R25	H5	R53	*G5	R163	M2	R216	*G5	R277	*C5	R351	H5	R411	D2	R500	*N5	R528	*N4	R556	*P4	R653	G4	R804	N6	R832	M6		
R26	M6	R54	G5	R164	M2	R250	*B6	R278	F5	R352	*H5	R412	D2	R501	*N5	R529	*G1	R557	*M5	R654	*F2	R805	N6	R833	M6		
R27	M6	R55	*G5	R165	M2	R251	B6	R279	F5	R353	H5	R413	D2	R502	*P4	R530	*F1	R558	M5	R655	*G4	R806	*N6	R834	*M6		
R28	M6	R56	*G5	R166	*M2	R252	B6	R280	*F5	R354	*H5	R450	C3	R503	*P5	R531	*G1	R559	N5	R656	*F2	R807	N6	R835	*M6		
R29	G5	R57	G5	R167	*M2	R253	B6	R281	F5	R355	H5	R451	*C3	R504	P5	R532	*G1	R560	N5	R657	*H4	R808	N6	R836	M6		
R30	*G5	R58	G5	R168	*M2	R254	*B6	R282	*F5	R356	*H5	R452	*C3	R505	P4	R533	*G1	R600	*P5	R658	G4	R809	C6	R837	M6		
R31	G5	R59	*G5	R169	*M2	R255	B6	R283	F5	R357	H5	R453	*C3	R506	P5	R534	*G1	R601	*D5	R700	*N5	R810	*N6	R838	M6		
R32	*G5	R60	*M6	R170	*M2	R256	B6	R284	*F5	R358	*G5	R454	A2	R507	*P4	R535	*G1	R602	*P5	R701	C6	R811	C6	R839	*M6		
R33	G5	R61	M6	R171	*N1	R257	*B6	R285	F5	R359	*H5	R455	C3	R508	*P4	R536	*G1	R603	*K1	R702	*C6	R812	N6	R840	M6		
R34	*G5	R62	*F5	R172	*M3	R258	B6	R286	*F5	R360	H5	R456	*B4	R509	P4	R537	*G1	R604	*P5	R703	C6	R813	C6	R841	F5		
R35	M6	R70	*P6	R173	*M3	R259	*B6	R287	F5	R361	*H5	R460	B4	R510	P4	R538	*G1	R605	*D6	R704	*C6	R814	N6	R842	F5		
R36	*M6	R71	P6	R174	*N3	R260	*D4	R288	*F5	R362	H5	R461	A4	R511	P4	R539	N4	R606	*K2	R705	C6	R815	*C6	R843	F5		
R37	N6	R72	J5	R175	M2	R261	B6	R289	*D4	R363	*H5	R462	*A2	R512	*N4	R540	N4	R607	*P5	R706	*C6	R816	*N6	R844	*E5		
R38	F5	R73	*H5	R200	F5	R262	B6	R290	*D5	R364	H5	R463	*A4	R513	P4	R541	*P4	R608	*D6	R707	C6	R817	N6	R845	E5		
R39	*K5	R100	J2	R201	*F5	R263	*B6	R300	*H5	R365	*H5	R464	*A4	R514	*N5	R542	N5	R609	*P5	R708	C6	R818	C6	R847	E5		
R40	*F5	R101	J1	R202	*F5	R264	B6	R301	H5	R366	G5	R465	A2	R515	*N4	R543	N5	R610	*K2	R709	*E2	R819	C6	R848	E5		
R41	F5	R151	*P3	R203	E5	R265	*B6	R302	*H5	R367	K3	R466	A2	R516	*G2	R544	*N4	R611	*K2	R710	*E2	R820	N6	R849	*E5		
R42	*F5	R152	*N3	R204	*P5	R266	B6	R303	J4	R368	K3	R467	A2	R517	F2	R545	*N4	R612	*E1	R711	*E2	R821	*C6	R850	E5		
R43	F5	R153	*N3	R205	*E5	R267	*B6	R304	H2	R369	K3	R468	A2	R518	G2	R546	N4	R613	*E1	R712	*E2	R822	*N6	R851	*E5		
R44	*G5	R154	*P3	R206	*F5	R268	B6	R305	H2	R400	C3	R469	A3	R519	*G2	R547	N4	R614	*E1	R713	F4	R823	N6	R852	E5		

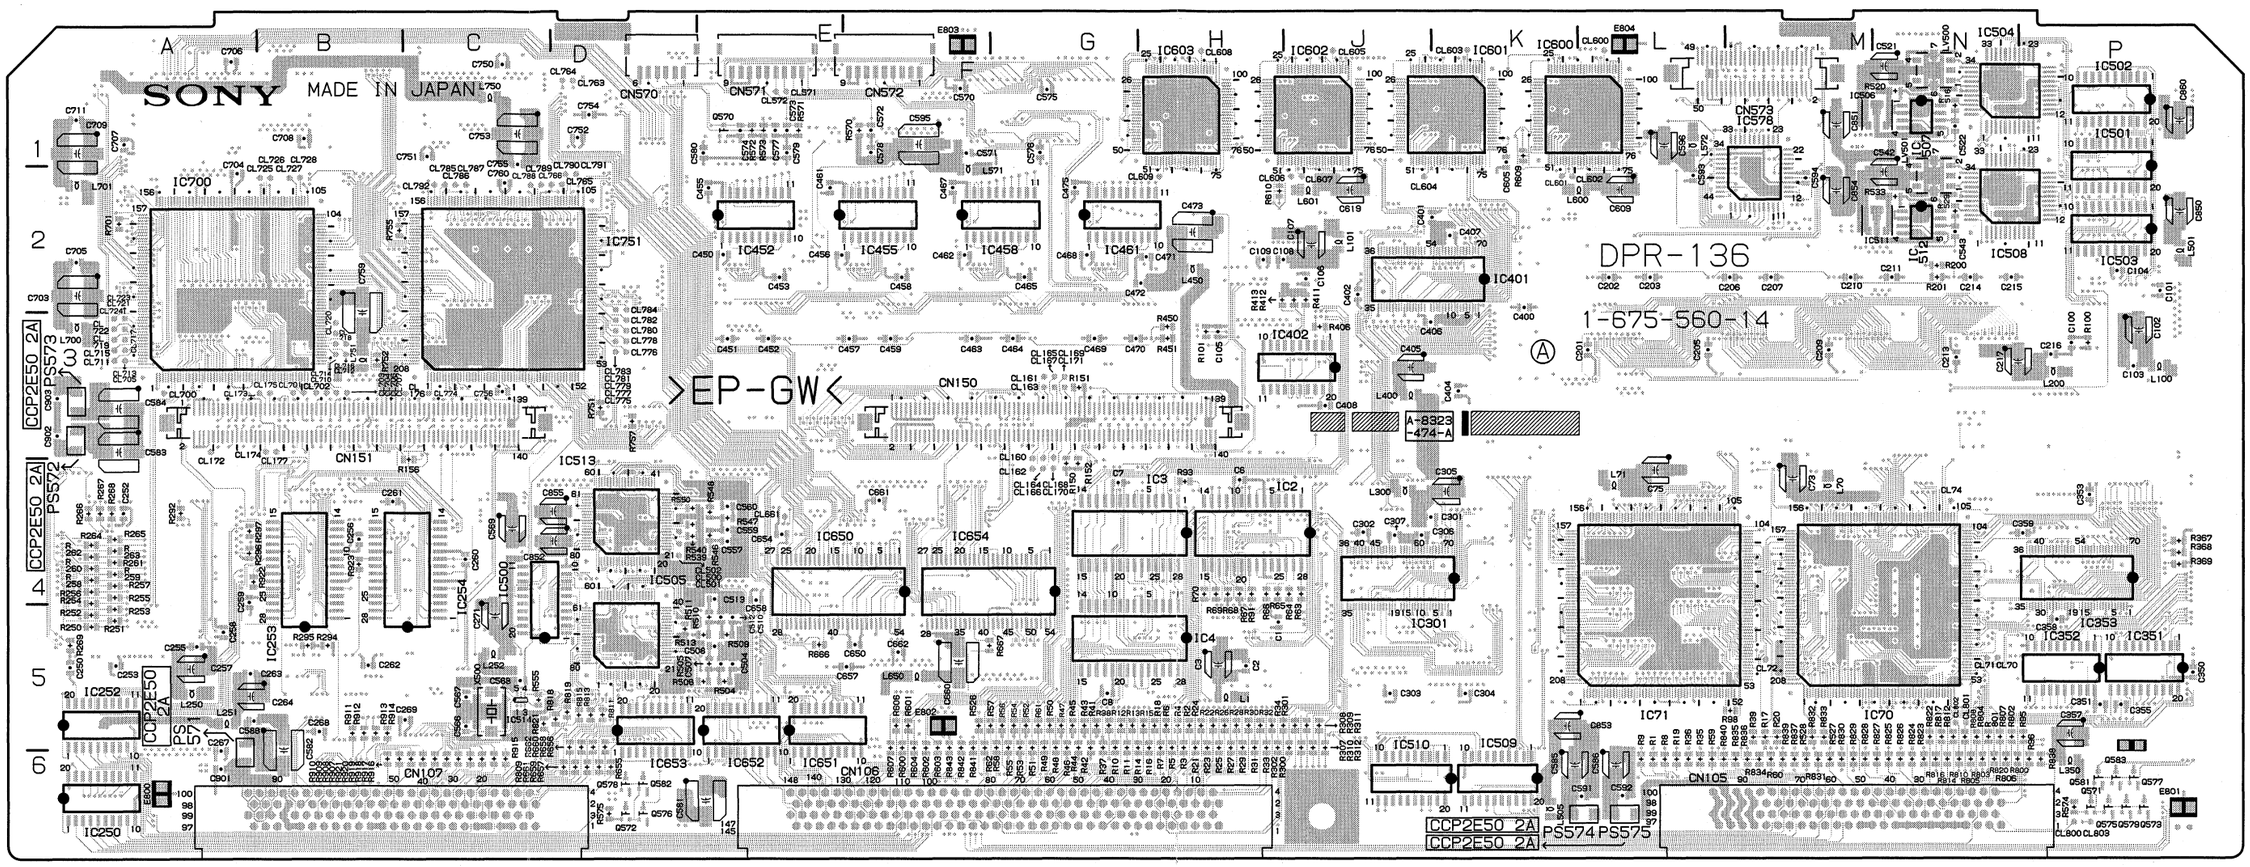

DPR-136 -A SIDE-
SUFFIX: -14

DPR-136 (1-675-560-14)

C1	H5	C202	L2	C262	B5	C400	K2	C469	G3	C521	N1	C549	*N2	C583	A3	C614	*H1	C709	A1	C902	A3	CL113	*J2	CL571	E1	CL703	B3	CL731	*A1	CL763	D1	CL791	D2	E802	F5
C2	H5	C203	L2	C263	A5	C401	K2	C470	G3	C522	N1	C550	*N2	C584	A3	C615	*H1	C710	*A2	C903	A3	CL114	*H2	CL572	E1	CL704	B3	CL732	*B1	CL764	D1	CL792	C2	E803	F1
C3	H5	C204	*L2	C264	A5	C402	J2	C471	H2	C523	*N1	C556	*E4	C585	K6	C616	*H1	C711	A1	C904	*L6	CL115	*H2	CL600	L1	CL705	A3	CL733	*B1	CL765	D2	CL800	P6	E804	L1
C4	*H4	C205	L3	C265	*C4	C403	*K3	C472	H2	C524	*N1	C557	E4	C586	L6	C617	*H1	C750	C1	C905	*L6	CL160	G4	CL601	K2	CL706	B3	CL734	*A1	CL766	D2	CL801	N5		
C5	*H5	C206	M2	C266	*C5	C404	K3	C473	H2	C525	*N1	C558	*E4	C587	*E6	C618	*J2	C751	C1			CL161	G3	CL602	K2	CL707	B3	CL735	*B1	CL767	*C2	CL802	N5	IC1	*H4
C6	H4	C207	M2	C267	A6	C405	J3	C474	*H2	C526	*N1	C559	E4	C588	A5	C619	J2	C752	D1	CL1	*G4	CL162	G4	CL603	K1	CL708	*B3	CL736	*B1	CL768	*C2	CL803	P6	IC2	J4
C7	G4	C208	*M2	C268	B5	C406	J3	C475	G2	C527	*N1	C560	E4	C589	*A3	C650	F5	C753	C1	CL2	*G4	CL163	G3	CL604	J2	CL709	*B3	CL737	*B1	CL769	*C2			IC3	H4
C8	G5	C209	M3	C269	C5	C407	K2	C500	*P1	C528	*D5	C562	*D4	C590	*A3	C651	*E5	C754	D1	CL11	*H5	CL164	G4	CL605	J1	CL710	B3	CL738	*A2	CL770	*C2	CN105	M6	IC4	H5
C70	*N4	C210	M2	C270	*C4	C408	J3	C501	*C5	C529	*N1	C563	*D4	C591	L6	C652	*E5	C755	C1	CL12	*H5	CL165	G3	CL606	J2	CL711	A3	CL739	*A2	CL771	*C2	CN106	G6	IC70	N5
C71	*N4	C211	N2	C271	C5	C450	E2	C502	*P2	C530	*D5	C564	*D4	C592	L6	C653	*D5	C756	C3	CL13	*H5	CL166	G4	CL607	J2	CL712	B3	CL740	*A2	CL772	*D2	CN107	B6	IC71	L5
C72	*N5	C212	*N2	C300	*K4	C451	E3	C503	*E5	C531	*N1	C565	*D4	C593	L2	C654	E4	C757	*B3	CL70	N5	CL167	G3	CL608	H1	CL713	A3	CL741	*A2	CL773	*D2	CN150	G3	IC100	*P3
C73	M4	C213	N3	C301	J4	C452	E3	C504	E5	C532	*D4	C566	C5	C594	M2	C655	*G5	C758	*D2	CL71	N5	CL168	G4	CL609	H2	CL714	B3	CL742	*B2	CL774	C3	CN151	B3	IC101	*H2
C74	*M4	C214	N2	C302	J4	C453	E2	C505	*P2	C533	*D5	C567	C5	C595	F1	C656	*G4	C759	B3	CL72	M5	CL169	G3	CL650	*E4	CL715	A3	CL743	*B2	CL775	D3	CN570	D1	IC200	*L3
C75	L4	C215	N2	C303	J5	C454	*E2	C506	*E5	C534	*N2	C568	C5	C596	L1	C657	F5	C760	C2	CL73	*M4	CL170	G4	CL651	*E4	CL716	B3	CL744	*B2	CL776	D3	CN571	E1	IC201	*M3
C76	*L5	C216	P3	C304	K5	C455	E2	C507	E5	C535	*P2	C569	C4	C600	*L1	C658	E4	C761	*B3	CL74	N4	CL171	G3	CL653	*E4	CL717	A3	CL745	*B2	CL777	D3	CN572	F1	IC202	*M3
C77	*L4	C217	N3	C305	K4	C456	E2	C508	E5	C536	*K6	C570	F1	C601	*L1	C659	*F4	C850	P2	CL100	*P2	CL172	A3	CL654	*E4	CL718	B3	CL750	*B1	CL778	D3	CN573	M1	IC203	*N3
C100	P3	C250	A5	C306	J4	C457	F3	C509	*E5	C537	*P2	C571	F1	C602	*K1	C660	F5	C851	M1	CL101	*P2	CL173	B3	CL655	*E5	CL719	A3	CL751	*C1	CL779	D3			IC250	A6
C101	P2	C251	*A6	C307	J4	C458	F2	C510	E5	C538	*K6	C572	F1	C603	*K1	C661	F4	C852	D4	CL102	*P2	CL174	B3	CL656	*F4	CL720	B3	CL752	*C1	CL780	D3	D500	*E5	IC251	*A4
C102	P3	C252	A4	C350	P5	C459	F3	C511	*E5	C539	*N2	C573	E1	C604	*K1	C662	F5	C853	K5	CL103	*P2	CL175	B3	CL657	*F4	CL721	A3	CL753	*C1	CL781	D3	D501	*E5	IC252	A5
C103	P3	C253	A5	C351	P5	C460	*F2	C512	E5	C540	*N2	C574	E1	C605	K1	C700	*A3	C854	M2	CL104	*P2	CL176	C3	CL658	*F4	CL722	A3	CL754	*C1	CL782	D3	D502	*E5	IC253	B5
C104	P2	C254	*A5	C352	*P4	C461	E2	C513	E4	C541	*N2	C575	G1	C606	*J1	C701	*A2	C855	D4	CL105	*P2	CL177	B3	CL659	*F4	CL723	A3	CL755	*C1	CL783	D2	D503	*E5	IC254	C5
C105	H3	C255	A5	C353	P4	C462	F2	C514	*D5	C542	N2	C576	G1	C607	*J1	C702	*B2	C856	*D5	CL106	*P2	CL250	*A4	CL660	*F4	CL724	A3	CL756	*D1	CL784	D2	D504	*N1	IC255	*B4
C106	J2	C256	B4	C354	*N4	C463	F3	C515	*N1	C543	N2	C577	E1	C608	*L2	C703	A2	C857	*D4	CL107	*P2	CL251	*B4	CL661	E4	CL725	B2	CL757	*D1	CL785	C2	D505	*N2	IC256	*C5
C107	J2	C257	A5	C355	P5	C464	G3	C516	*P1	C544	*N2	C578	F1	C609	L2	C704	A2	C858	*D5	CL108	*H2	CL400	*K3	CL662	*E5	CL726	B2	CL758	*D1	CL786	C2	D508	*E4	IC257	*A5
C108	H2	C258	A5	C356	*P5	C465	G2	C517	*P1	C545	*N2	C579	E1	C610	*J1	C705	A2	C859	*P1	CL109	*H2	CL500	D4	CL663	*F4	CL727	B2	CL759	*B1	CL787	C2	D509	*E4	IC258	*C4
C109	H2	C259	A4	C357	P5	C466	*G2	C518	*N1	C546	*N2	C580	E1	C611	*J1	C706	A1	C860	P1	CL110	*H2	CL501	D4	CL700	A3	CL728	B2	CL760	*D1	CL788	C2			IC259	*B5
C200	*K2	C260	C4	C358	P5	C467	F2	C519	*N1	C547	*N2	C581	E6	C612	*J1	C707	A1	C900	*E6	CL111	*H2	CL502	D4	CL701	B3	CL729	*A1	CL761	*D1	CL789	C2	E800	A6	IC260	*B5
C201	L3	C261	B4	C359	P4	C468	G2	C520	*N1	C548	*N2	C582	B6	C613	*J1	C708	B1	C901	A6	CL112	*H2	CL570	*F1	CL702	B3	CL730	*A1	CL762	*D1	CL790	D2	E801	P6	IC300	*J5

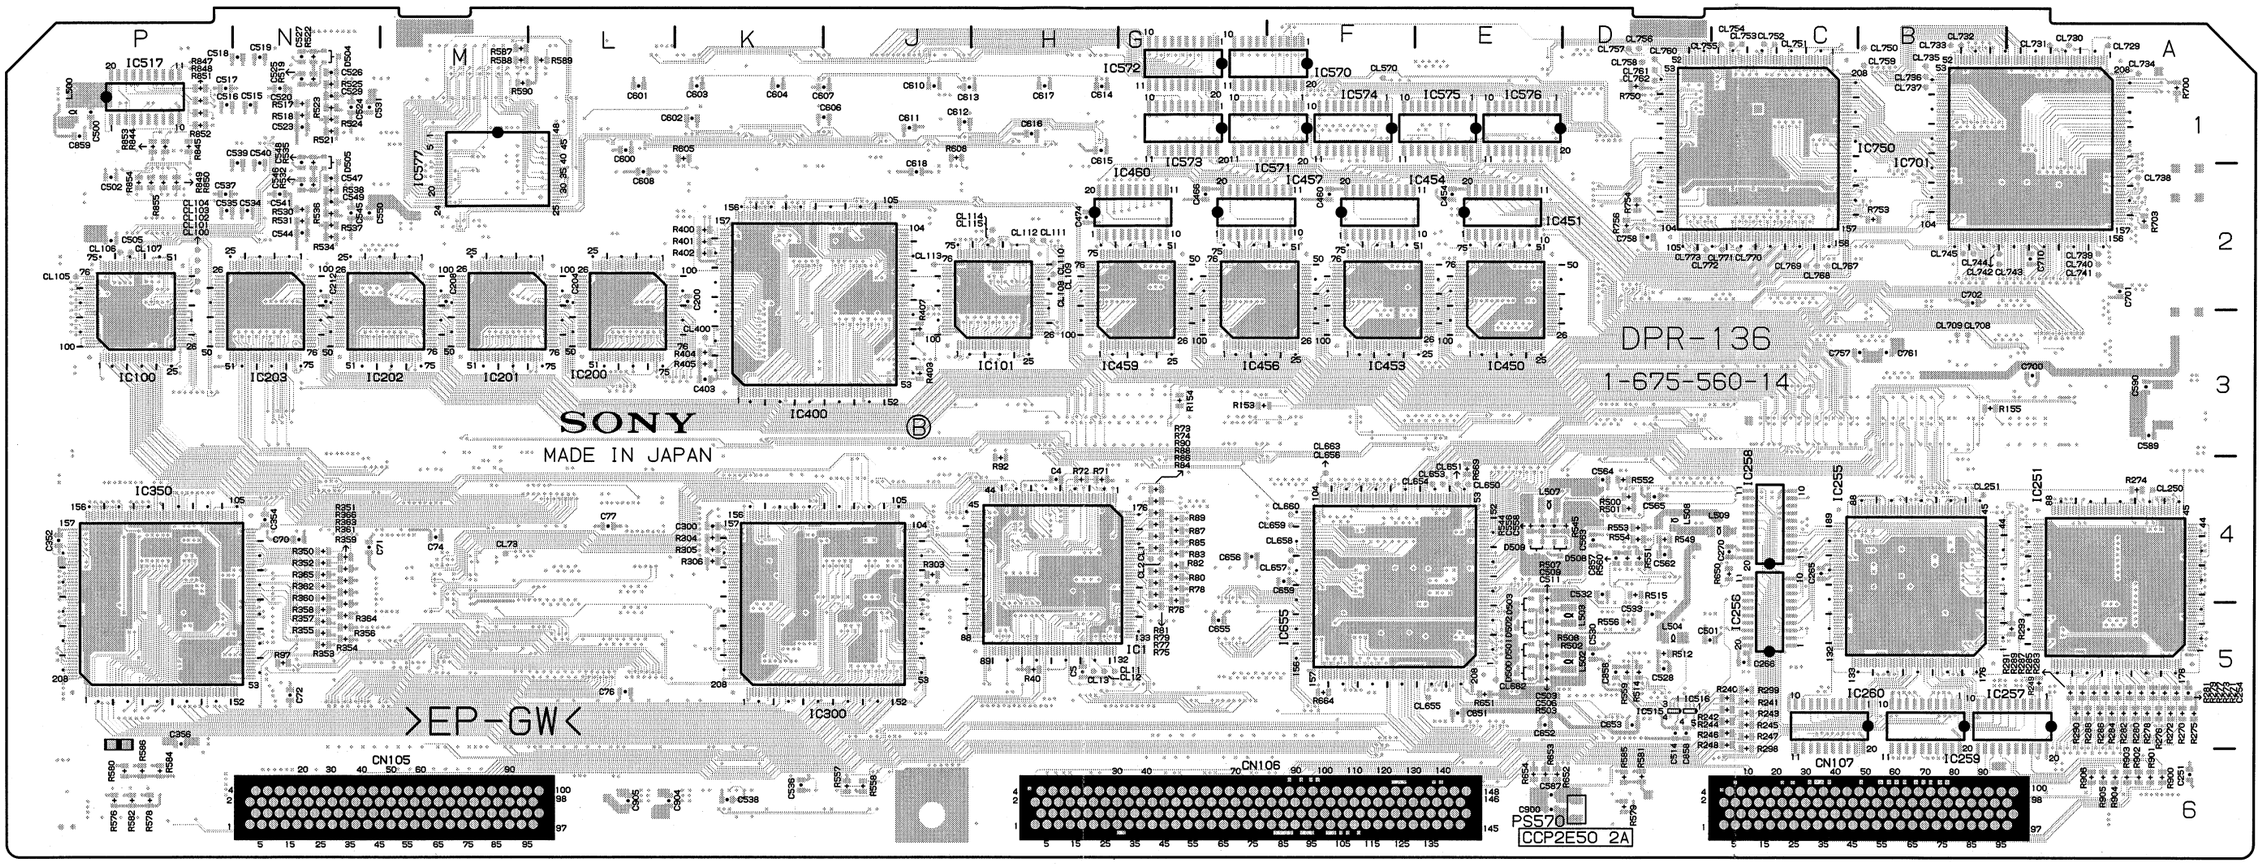

DPR-136 -B SIDE-
SUFFIX: -14

IC301	K4	IC508	N2	IC655	*F4	L571	F2	Q579	P6	R24	H5	R52	G5	R80	*G4	R201	N2	R267	A4	R295	B5	R360	*N4	R505	E5	R533	N2	R573	E1	R651	*E5	R801	N5	R829	M6	R902	*A6
IC350	*P5	IC509	K6	IC700	A2	L572	L1	Q581	P6	R25	H5	R53	G5	R81	*G4	R240	*C5	R268	A4	R296	A4	R361	*N4	R506	E5	R534	*N2	R574	P6	R652	*E6	R802	N5	R830	M6	R903	*A6
IC351	P5	IC510	K6	IC701	*A1	L600	L2	Q582	D6	R26	H5	R54	G5	R82	*G4	R241	*C5	R269	A5	R297	A4	R362	*N4	R507	*E4	R535	*N2	R575	D6	R653	*E6	R803	N6	R831	M6	R904	*A6
IC352	P5	IC511	N2	IC750	*C1	L601	J2	Q583	P6	R27	H5	R55	G5	R83	*G4	R242	*C5	R270	*A5	R298	*C6	R363	*N4	R508	*E5	R536	*N2	R576	*P6	R654	*E6	R804	N5	R832	M5	R905	*A6
IC353	P4	IC512	N2	IC751	C2	L650	F5			R28	H5	R56	G5	R84	*G4	R243	*C5	R271	*A5	R299	*C5	R364	*N5	R509	E5	R537	*N2	R578	*P6	R655	D6	R805	N6	R833	M5	R906	*A6
IC400	*K2	IC513	D4			L700	A3	R1	L6	R29	H5	R57	F5	R85	*G4	R244	*C5	R272	*A5	R300	J5	R365	*N4	R510	E5	R538	*N2	R579	*D6	R656	D5	R806	N6	R834	M6	R907	C6
IC401	K2	IC514	C5	L1	H5	L701	A2	R2	H5	R30	H5	R58	G5	R86	*G4	R245	*C5	R273	*A5	R301	H5	R366	*N4	R511	D5	R539	D4	R580	*P6	R657	D6	R807	N5	R835	M6	R908	C6
IC402	J3	IC515	*D5	L70	M4	L750	C1	R3	H5	R31	H5	R59	L6	R87	*G4	R246	*C5	R274	*A4	R302	H5	R367	P4	R512	*D5	R540	D4	R581	*D6	R658	D5	R808	N5	R836	M6	R909	B6
IC450	*E2	IC516	*D5	L71	L4	L751	B3	R4	H5	R32	H5	R60	M6	R88	*G4	R247	*C5	R275	*A5	R303	*J4	R368	P4	R513	E5	R544	*E4	R582	*P6	R659	D6	R809	D6	R837	M6	R910	B6
IC451	*E2	IC517	*P1	L100	P3			R5	H5	R33	H5	R61	G5	R89	*G4	R248	*C5	R276	*A5	R304	*K4	R369	P4	R514	*D5	R545	*D4	R584	*P6	R660	D5	R810	N6	R838	P6	R911	B5
IC452	E2	IC570	*F1	L101	J2	LV500	N1	R6	H5	R34	H5	R62	F5	R90	*G4	R249	*A5	R277	*A5	R305	*K4	R400	*K2	R515	*D4	R546	E4	R585	*D6	R661	D6	R811	D5	R839	M6	R912	B5
IC453	*F2	IC571	*F1	L200	P3	LV501	N2	R7	H5	R35	L6	R63	J4	R91	H4	R250	A5	R278	*A5	R306	*K4	R401	*K2	R516	N1	R547	E4	R586	*P6	R662	D5	R812	N5	R840	L6	R913	B5
IC454	*F2	IC572	*G1	L250	A5			R8	L6	R36	L6	R64	J4	R92	*H4	R251	A5	R279	*A5	R307	J5	R402	*K2	R517	*N1	R548	E4	R587	*M1	R664	*F5	R813	D5	R841	F5	R914	B5
IC455	F2	IC573	*G1	L251	A5	PS570	*D6	R9	L6	R37	G5	R65	H4	R93	H4	R252	A5	R280	*A5	R308	J5	R403	*J3	R518	*N1	R549	*D4	R588	*M1	R666	E5	R814	N6	R842	F5	R915	C6
IC456	*G2	IC574	*F1	L252	C5	PS571	A6	R10	G5	R38	G5	R66	H4	R95	P5	R253	A5	R281	*A5	R309	J5	R404	*K3	R519	*N1	R550	D4	R589	*L1	R667	F5	R815	D5	R843	F5	R916	C6
IC457	*G2	IC575	*E1	L300	J4	PS572	A3	R11	G5	R39	M5	R67	H4	R96	P6	R254	A4	R282	*A5	R310	J5	R405	*K3	R520	N1	R551	*D4	R590	*M1	R669	*E4	R816	N6	R844	*P1	R917	C6
IC458	F2	IC576	*E1	L350	P6	PS573	A3	R12	G5	R40	*H5	R68	H4	R97	*N5	R255	A4	R283	*A5	R311	J5	R406	J3	R521	*N1	R552	*D4	R600	F5	R700	*A1	R817	N5	R845	*P1	R918	C6
IC459	*G2	IC577	*M1	L400	J3	PS574	L6	R13	G5	R41	G5	R69	H4	R98	M5	R256	A4	R284	*A5	R312	J5	R407	*J3	R522	*N1	R553	*D4	R601	F5	R701	A2	R818	D5	R847	*P1	R919	C6
IC460	*H2	IC578	M2	L450	H2	PS575	L6	R14	G5	R42	G5	R70	H4	R100	P3	R257	A4	R285	*A5	R350	*N4	R411	J2	R523	*N1	R554	*D4	R602	F5	R703	*A2	R819	D5	R848	*P1	R920	C6
IC461	G2	IC600	L1	L500	*P1			R15	H5	R43	G5	R71	*H4	R101	H3	R258	A4	R286	*A5	R351	*N4	R412	J2	R524	*N1	R555	C5	R603	F5	R750	*D1	R820	N6	R849	*P2	R921	C6
IC500	D5	IC601	K1	L501	P2	Q570	E1	R16	H5	R44	G5	R72	*H4	R150	G4	R259	A4	R287	*A5	R352	*N4	R413	H2	R525	*N1	R556	*D5	R604	F5	R751	D3	R821	C5	R850	*P2	R922	A4
IC501	P1	IC602	J1	L502	*D5	Q571	P6	R17	M5	R45	G5	R73	*G4	R151	G3	R260	A4	R288	*A5	R353	*N5	R450	H3	R526	F5	R557	*J6	R605	*K1	R752	B3	R822	N5	R851	*P1	R923	B4
IC502	P1	IC603	H1	L503	*D5	Q572	D6	R18	H5	R46	G5	R74	*G4	R152	G4	R261	A4	R289	*A5	R354	*N5	R451	H3	R527	M6	R558	*J6	R606	F5	R753	*B2	R823	N6	R852	*P1		
IC503	P2	IC650	F4	L504	*D5	Q573	P6	R19	L6	R47	G5	R75	*G5	R153	*G3	R262	A4	R290	*A5	R355	*N5	R500	*D4	R528	M6	R559	*D5	R607	F5	R754	*D2	R824	N6	R853	*P1	X500	C5
IC504	N1	IC651	E6	L505	K6	Q575	P6	R20	M5	R48	G5	R76	*G4	R154	*G3	R263	A4	R291	*A5	R356	*N5	R501	*D4	R529	N2	R560	*D4	R608	*J1	R755	B2	R825	N6	R854	*P2		
IC505	D5	IC652	E6	L507	*E4	Q576	D6	R21	H5	R49	G5	R77	*G4	R155	*B3	R264	A4	R292	A4	R357	*N5	R502	*E5	R530	*N2	R570	F1	R609	K1	R756	*D2	R826	N6	R855	*P2	*:B SIDE	
IC506	N1	IC653	D6	L508	*D4	Q577	P6	R22	H5	R50	G5	R78	*G4	R156	C4	R265	A4	R293	*A5	R358	*N5	R503	*E5	R531	*N2	R571	E1	R610	H2	R757	D3	R827	N6	R900	*A6		
IC507	N1	IC654	G4	L509	*C4	Q578	D6	R23	H5	R51	G5	R79	*G4	R200	N2	R266	A4	R294	B5	R359	*N5	R504	E5	R532	*N2	R572	E1	R650	*C4	R800	N6	R828	M6	R901	*A6		

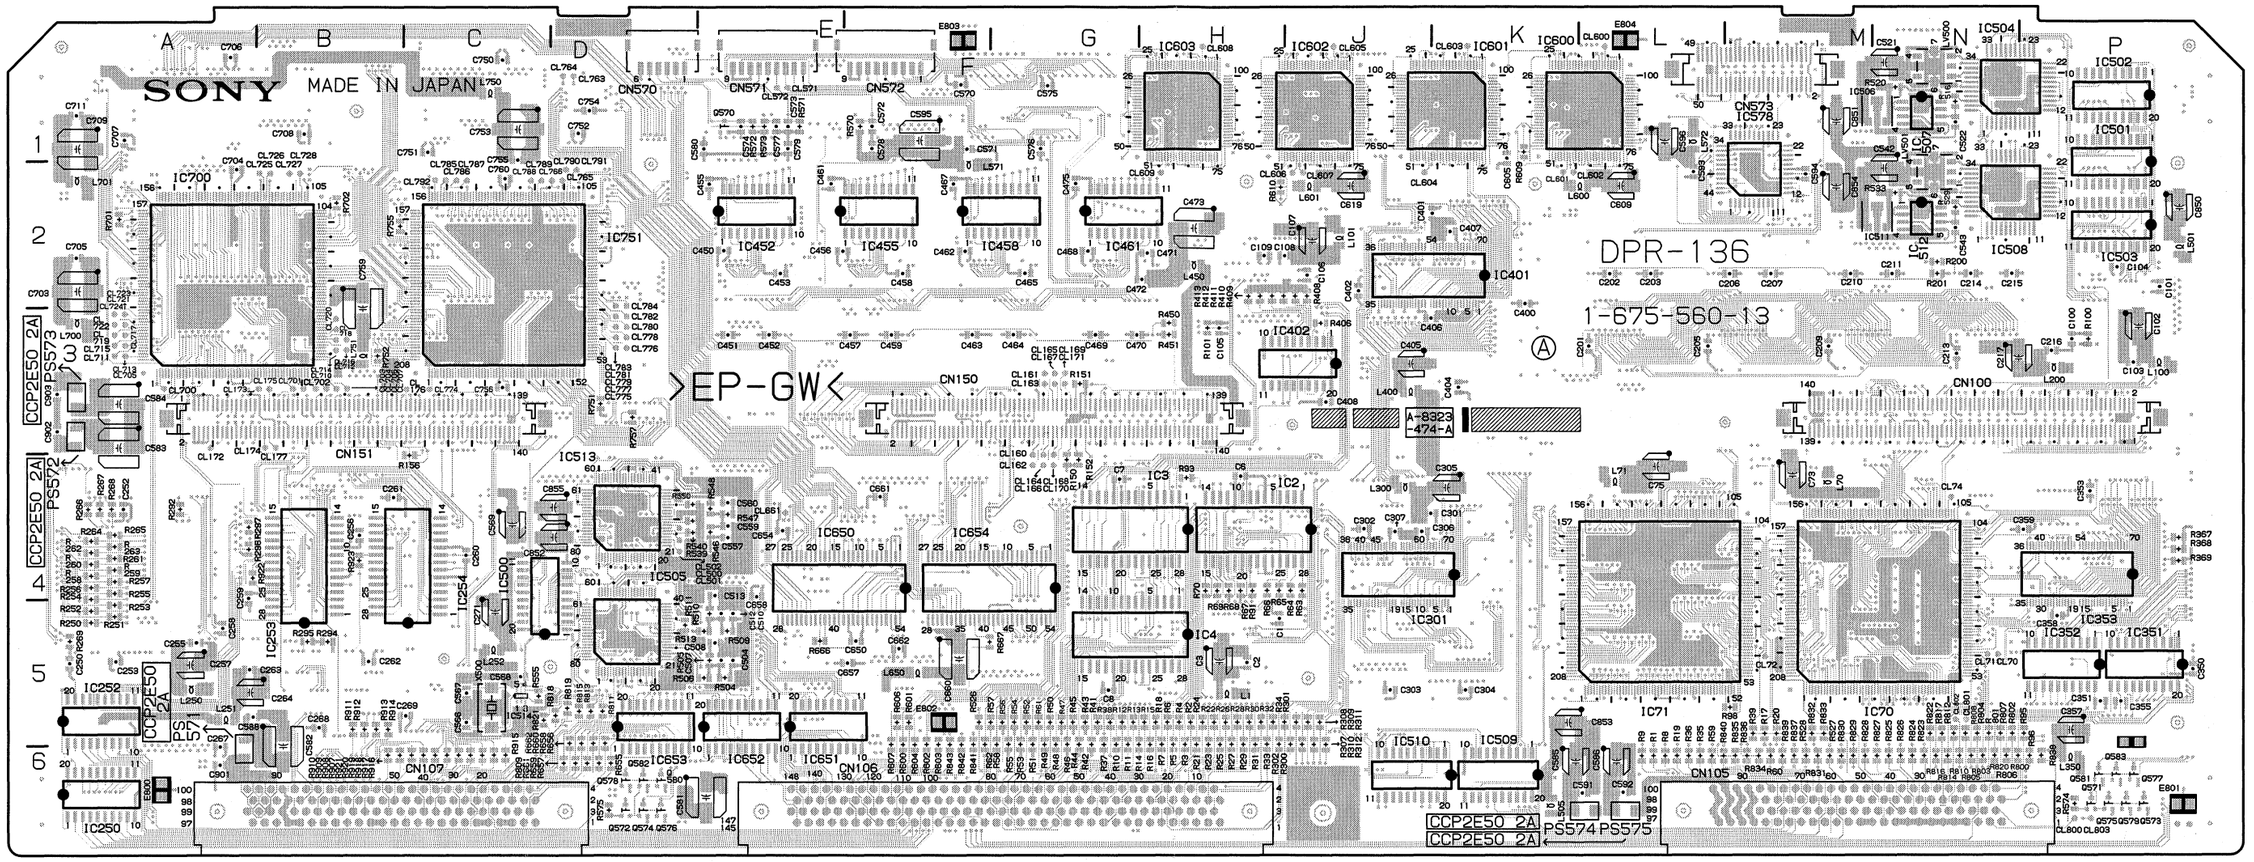

DPR-136 -A SIDE-
SUFFIX: -13

DPR-136 (1-675-560-13)

C1	H5	C202	L2	C262	B5	C400	K2	C469	G3	C521	N1	C549	*N2	C583	A3	C614	*H1	C709	A1	C904	*L6	CL115	*H2	CL600	L1	CL705	A3	CL733	*B1	CL765	D2	CL800	P6	E803	F1
C2	H5	C203	L2	C263	A5	C401	K2	C470	G3	C522	N1	C550	*N2	C584	A3	C615	*H1	C710	*A2	C905	*L6	CL160	G4	CL601	K2	CL706	B3	CL734	*A1	CL766	D2	CL801	N5	E804	L1
C3	H5	C204	*L2	C264	A5	C402	J2	C471	H2	C523	*N1	C556	*E4	C585	K6	C616	*H1	C711	A1			CL161	G3	CL602	K2	CL707	B3	CL735	*B1	CL767	*C2	CL802	N5		
C4	*H4	C205	L3	C265	*C4	C403	*K3	C472	H2	C524	*N1	C557	E4	C586	L6	C617	*H1	C750	C1	CL1	*G4	CL162	G4	CL603	K1	CL708	*B3	CL736	*B1	CL768	*C2	CL803	P6	IC1	*H4
C5	*H5	C206	M2	C266	*C5	C404	K3	C473	H2	C525	*N1	C558	*E4	C587	*E6	C618	*J2	C751	C1	CL2	*G4	CL163	G3	CL604	J2	CL709	*B3	CL737	*B1	CL769	*C2			IC2	J4
C6	H4	C207	M2	C267	A6	C405	J3	C474	*H2	C526	*N1	C559	E4	C588	A5	C619	J2	C752	D1	CL11	*H5	CL164	G4	CL605	J1	CL710	B3	CL738	*A2	CL770	*C2	CN100	N3	IC3	H4
C7	G4	C208	*M2	C268	B5	C406	J3	C475	G2	C527	*N1	C560	E4	C589	*A3	C650	F5	C753	C1	CL12	*H5	CL165	G3	CL606	J2	CL711	A3	CL739	*A2	CL771	*C2	CN105	M6	IC4	H5
C8	G5	C209	M3	C269	C5	C407	K2	C500	*P1	C528	*D5	C562	*D4	C590	*A3	C651	*E5	C754	D1	CL13	*H5	CL166	G4	CL607	J2	CL712	B3	CL740	*A2	CL772	*D2	CN106	G6	IC70	N5
C70	*N4	C210	M2	C270	*C4	C408	J3	C501	*C5	C529	*N1	C563	*D4	C591	L6	C652	*E5	C755	C1	CL70	N5	CL167	G3	CL608	H1	CL713	A3	CL741	*A2	CL773	*D2	CN107	B6	IC71	L5
C71	*N4	C211	N2	C271	C5	C450	E2	C502	*P2	C530	*D5	C564	*D4	C592	L6	C653	*D5	C756	C3	CL71	N5	CL168	G4	CL609	H2	CL714	B3	CL742	*B2	CL774	C3	CN150	G3	IC100	*P3
C72	*N5	C212	*N2	C300	*K4	C451	E3	C503	*E5	C531	*N1	C565	*D4	C593	L2	C654	E4	C757	*B3	CL72	M5	CL169	G3	CL650	*E4	CL715	A3	CL743	*B2	CL775	D3	CN151	B3	IC101	*H2
C73	M4	C213	N3	C301	J4	C452	E3	C504	E5	C532	*D4	C566	C5	C594	M2	C655	*G5	C758	*D2	CL73	*M4	CL170	G4	CL651	*E4	CL716	B3	CL744	*B2	CL776	D3	CN570	D1	IC200	*L3
C74	*M4	C214	N2	C302	J4	C453	E2	C505	*P2	C533	*D5	C567	C5	C595	F1	C656	*G4	C759	B3	CL74	N4	CL171	G3	CL653	*E4	CL717	A3	CL745	*B2	CL777	D3	CN571	E1	IC201	*M3
C75	L4	C215	N2	C303	J5	C454	*E2	C506	*E5	C534	*N2	C568	C5	C596	L1	C657	F5	C760	C2	CL100	*P2	CL172	A3	CL654	*E4	CL718	B3	CL750	*B1	CL778	D3	CN572	F1	IC202	*M3
C76	*L5	C216	P3	C304	K5	C455	E2	C507	E5	C535	*P2	C569	C4	C600	*L1	C658	E4	C761	*B3	CL101	*P2	CL173	B3	CL655	*E5	CL719	A3	CL751	*C1	CL779	D3	CN573	M1	IC203	*N3
C77	*L4	C217	N3	C305	K4	C456	E2	C508	E5	C536	*K6	C570	F1	C601	*L1	C659	*F4	C850	P2	CL102	*P2	CL174	B3	CL656	*F4	CL720	B3	CL752	*C1	CL780	D3			IC250	A6
C100	P3	C250	A5	C306	J4	C457	F3	C509	*E5	C537	*P2	C571	F1	C602	*K1	C660	F5	C851	M1	CL103	*P2	CL175	B3	CL657	*F4	CL721	A3	CL753	*C1	CL781	D3	D500	*E5	IC251	*A4
C101	P2	C251	*A6	C307	J4	C458	F2	C510	E5	C538	*K6	C572	F1	C603	*K1	C661	F4	C852	D4	CL104	*P2	CL176	C3	CL658	*F4	CL722	A3	CL754	*C1	CL782	D3	D501	*E5	IC252	A5
C102	P3	C252	A4	C350	P5	C459	F3	C511	*E5	C539	*N2	C573	E1	C604	*K1	C662	F5	C853	K5	CL105	*P2	CL177	B3	CL659	*F4	CL723	A3	CL755	*C1	CL783	D2	D502	*E5	IC253	B5
C103	P3	C253	A5	C351	P5	C460	*F2	C512	E5	C540	*N2	C574	E1	C605	K1	C700	*A3	C854	M2	CL106	*P2	CL250	*A4	CL660	*F4	CL724	A3	CL756	*D1	CL784	D2	D503	*E5	IC254	C5
C104	P2	C254	*A5	C352	*P4	C461	E2	C513	E4	C541	*N2	C575	G1	C606	*J1	C701	*A2	C855	D4	CL107	*P2	CL251	*B4	CL661	E4	CL725	B2	CL757	*D1	CL785	C2	D504	*N1	IC255	*B4
C105	H3	C255	A5	C353	P4	C462	F2	C514	*D5	C542	N2	C576	G1	C607	*J1	C702	*B2	C856	*D5	CL108	*H2	CL400	*K3	CL662	*E5	CL726	B2	CL758	*D1	CL786	C2	D505	*N2	IC256	*C5
C106	J2	C256	B4	C354	*N4	C463	F3	C515	*N1	C543	N2	C577	E1	C608	*L2	C703	A2	C857	*D4	CL109	*H2	CL500	D4	CL663	*F4	CL727	B2	CL759	*B1	CL787	C2	D508	*E4	IC257	*A5
C107	J2	C257	A5	C355	P5	C464	G3	C516	*P1	C544	*N2	C578	F1	C609	L2	C704	A2	C858	*D5	CL110	*H2	CL501	D4	CL700	A3	CL728	B2	CL760	*D1	CL788	C2	D509	*E4	IC258	*C4
C108	H2	C258	A5	C356	*P5	C465	G2	C517	*P1	C545	*N2	C579	E1	C610	*J1	C705	A2	C900	*E6	CL111	*H2	CL502	D4	CL701	B3	CL729	*A1	CL761	*D1	CL789	C2			IC259	*B5
C109	H2	C259	A4	C357	P5	C466	*G2	C518	*N1	C546	*N2	C580	E1	C611	*J1	C706	A1	C901	A6	CL112	*H2	CL570	*F1	CL702	B3	CL730	*A1	CL762	*D1	CL790	D2	E800	A6	IC260	*B5
C200	*K2	C260	C4	C358	P5	C467	F2	C519	*N1	C547	*N2	C581	E6	C612	*J1	C707	A1	C902	A3	CL113	*J2	CL571	E1	CL703	B3	CL731	*A1	CL763	D1	CL791	D2	E801	P6	IC300	*J5
C201	L3	C261	B4	C359	P4	C468	G2	C520	*N1	C548	*N2	C582	B6	C613	*J1	C708	B1	C903	A3	CL114	*H2	CL572	E1	CL704	B3	CL732	*B1	CL764	D1	CL792	C2	E802	F5	IC301	K4

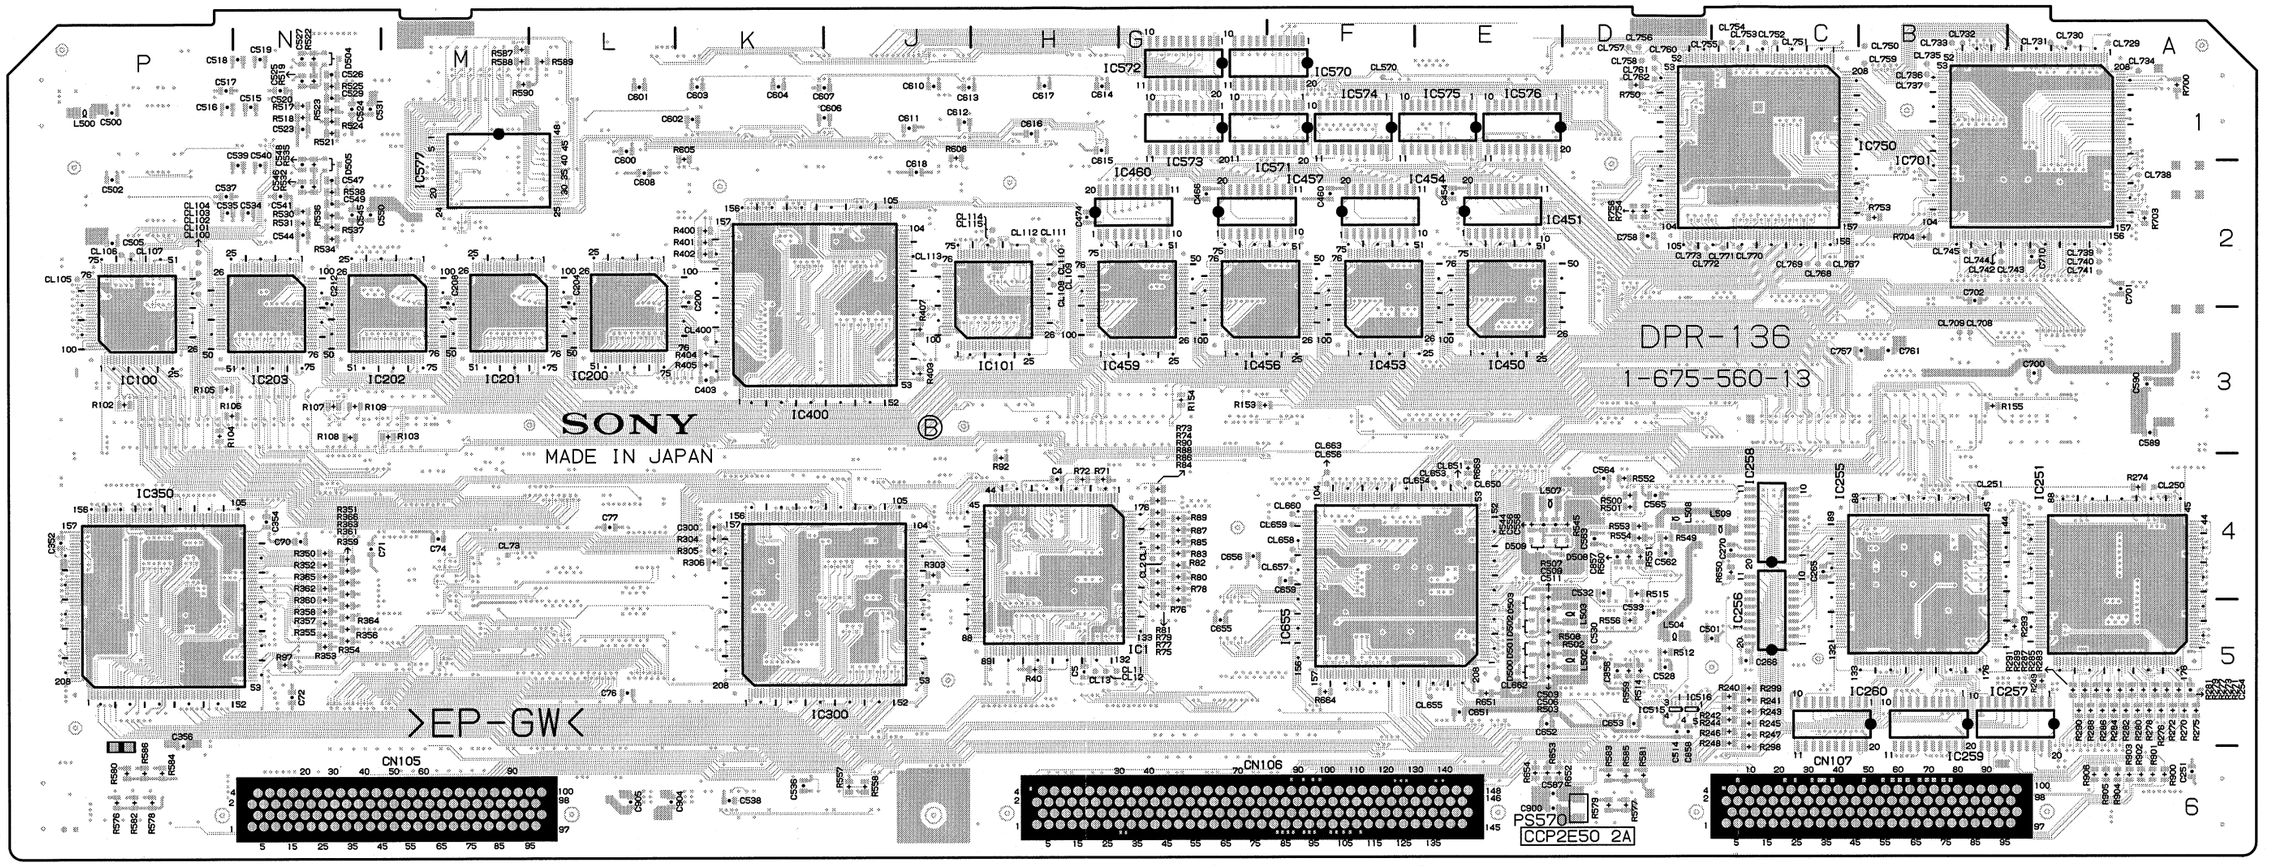

DPR-136 -B SIDE-
SUFFIX: -13

IC350	*P5	IC509	K6	IC701	*A1	L600	L2	Q580	D6	R24	H5	R52	G5	R80	*G4	R150	G4	R259	A4	R287	*A5	R352	*N4	R410	H2	R522	*N1	R553	*D4	R590	*M1	R669	*E4	R814	N6	R842	F5
IC351	P5	IC510	K6	IC750	*C1	L601	J2	Q581	P6	R25	H5	R53	G5	R81	*G4	R151	G3	R260	A4	R288	*A5	R353	*N5	R411	H2	R523	*N1	R554	*D4	R600	F5	R700	*A1	R815	D5	R843	F5
IC352	P5	IC511	N2	IC751	C2	L650	F5	Q582	D6	R26	H5	R54	G5	R82	*G4	R152	G4	R261	A4	R289	*A5	R354	*N5	R412	H2	R524	*N1	R555	C5	R601	F5	R701	A2	R816	N6	R900	*A6
IC353	P4	IC512	N2			L700	A3	Q583	P6	R27	H5	R55	G5	R83	*G4	R153	*G3	R262	A4	R290	*A5	R355	*N5	R413	H2	R525	*N1	R556	*D5	R602	F5	R702	B2	R817	N5	R901	*A6
IC400	*K2	IC513	D4	L1	H5	L701	A2			R28	H5	R56	G5	R84	*G4	R154	*G3	R263	A4	R291	*A5	R356	*N5	R450	H3	R526	F5	R557	*J6	R603	F5	R703	*A2	R818	D5	R902	*A6
IC401	K2	IC514	C5	L70	M4	L750	C1	R1	L6	R29	H5	R57	F5	R85	*G4	R155	*B3	R264	A4	R292	A4	R357	*N5	R451	H3	R527	M6	R558	*J6	R604	F5	R704	*B2	R819	D5	R903	*A6
IC402	J3	IC515	*D5	L71	L4	L751	B3	R2	H5	R30	H5	R58	G5	R86	*G4	R156	C4	R265	A4	R293	*A5	R358	*N5	R500	*D4	R528	M6	R559	*D5	R605	*K1	R750	*D1	R820	N6	R904	*A6
IC450	*E2	IC516	*D5	L100	P3			R3	H5	R31	H5	R59	L6	R87	*G4	R200	N2	R266	A4	R294	B5	R359	*N5	R501	*D4	R529	N2	R560	*D4	R606	F5	R751	D3	R821	C5	R905	*A6
IC451	*E2	IC570	*F1	L101	J2	LV500	N1	R4	H5	R32	H5	R60	M6	R88	*G4	R201	N2	R267	A4	R295	B5	R360	*N4	R502	*E5	R530	*N2	R570	F1	R607	F5	R752	B3	R822	N5	R906	*A6
IC452	E2	IC571	*F1	L200	P3	LV501	N2	R5	H5	R33	H5	R61	G5	R89	*G4	R240	*C5	R268	A4	R296	A4	R361	*N4	R503	*E5	R531	*N2	R571	E1	R608	*J1	R753	*B2	R823	N6	R907	C6
IC453	*F2	IC572	*G1	L250	A5			R6	H5	R34	H5	R62	F5	R90	*G4	R241	*C5	R269	A5	R297	A4	R362	*N4	R504	E5	R532	*N2	R572	E1	R609	K1	R754	*D2	R824	N6	R908	C6
IC454	*F2	IC573	*G1	L251	A5	PS570	*D6	R7	H5	R35	L6	R63	J4	R91	H4	R242	*C5	R270	*A5	R298	*C6	R363	*N4	R505	E5	R533	N2	R573	E1	R610	H2	R755	B2	R825	N6	R909	B6
IC455	F2	IC574	*F1	L252	C5	PS571	A6	R8	L6	R36	L6	R64	J4	R92	*H4	R243	*C5	R271	*A5	R299	*C5	R364	*N5	R506	E5	R534	*N2	R574	P6	R650	*C4	R756	*D2	R826	N6	R910	B6
IC456	*G2	IC575	*E1	L300	J4	PS572	A3	R9	L6	R37	G5	R65	H4	R93	H4	R244	*C5	R272	*A5	R300	J5	R365	*N4	R507	*E4	R535	*N2	R575	D6	R651	*E5	R757	D3	R827	N6	R911	B5
IC457	*G2	IC576	*E1	L350	P6	PS573	A3	R10	G5	R38	G5	R66	H4	R95	P5	R245	*C5	R273	*A5	R301	H5	R366	*N4	R508	*E5	R536	*N2	R576	*P6	R652	*E6	R800	N6	R828	M6	R912	B5
IC458	F2	IC577	*M1	L400	J3	PS574	L6	R11	G5	R39	M5	R67	H4	R96	P6	R246	*C5	R274	*A4	R302	H5	R367	P4	R509	E5	R537	*N2	R577	*D6	R653	*E6	R801	N5	R829	M6	R913	B5
IC459	*G2	IC578	M2	L450	H2	PS575	L6	R12	G5	R40	*H5	R68	H4	R97	*N5	R247	*C5	R275	*A5	R303	*J4	R368	P4	R510	E5	R538	*N2	R578	*P6	R654	*E6	R802	N5	R830	M6	R914	B5
IC460	*H2	IC600	L1	L500	*P1			R13	G5	R41	G5	R69	H4	R98	M5	R248	*C5	R276	*A5	R304	*K4	R369	P4	R511	D5	R539	D4	R579	*D6	R655	D6	R803	N6	R831	M6	R915	C6
IC461	G2	IC601	K1	L501	P2	Q570	E1	R14	G5	R42	G5	R70	H4	R100	P3	R249	*A5	R277	*A5	R305	*K4	R400	*K2	R512	*D5	R540	D4	R580	*P6	R656	D5	R804	N5	R832	M5	R916	C6
IC500	D5	IC602	J1	L502	*D5	Q571	P6	R15	H5	R43	G5	R71	*H4	R101	H3	R250	A5	R278	*A5	R306	*K4	R401	*K2	R513	E5	R544	*E4	R581	*D6	R657	D6	R805	N6	R833	M5	R917	C6
IC501	P1	IC603	H1	L503	*D5	Q572	D6	R16	H5	R44	G5	R72	*H4	R102	*P3	R251	A5	R279	*A5	R307	J5	R402	*K2	R514	*D5	R545	*D4	R582	*P6	R658	D5	R806	N6	R834	M6	R918	C6
IC502	P1	IC650	F4	L504	*D5	Q573	P6	R17	M5	R45	G5	R73	*G4	R103	*M3	R252	A5	R280	*A5	R308	J5	R403	*J3	R515	*D4	R546	E4	R583	*D6	R659	D6	R807	N5	R835	M6	R919	C6
IC503	P2	IC651	E6	L505	K6	Q574	D6	R18	H5	R46	G5	R74	*G4	R104	*P3	R253	A5	R281	*A5	R309	J5	R404	*K3	R516	N1	R547	E4	R584	*P6	R660	D5	R808	N5	R836	M6	R920	C6
IC504	N1	IC652	E6	L507	*E4	Q575	P6	R19	L6	R47	G5	R75	*G5	R105	*P3	R254	A4	R282	*A5	R310	J5	R405	*K3	R517	*N1	R548	E4	R585	*D6	R661	D6	R809	D6	R837	M6	R921	C6
IC505	D5	IC653	D6	L508	*D4	Q576	D6	R20	M5	R48	G5	R76	*G4	R106	*P3	R255	A4	R283	*A5	R311	J5	R406	J3	R518	*N1	R549	*D4	R586	*P6	R662	D5	R810	N6	R838	P6	R922	A4
IC506	N1	IC654	G4	L509	*C4	Q577	P6	R21	H5	R49	G5	R77	*G4	R107	*N3	R256	A4	R284	*A5	R312	J5	R407	*J3	R519	*N1	R550	D4	R587	*M1	R664	*F5	R811	D5	R839	M6	R923	B4
IC507	N1	IC655	*F4	L571	F2	Q578	D6	R22	H5	R50	G5	R78	*G4	R108	*N3	R257	A4	R285	*A5	R350	*N4	R408	J2	R520	N1	R551	*D4	R588	*M1	R666	E5	R812	N5	R840	L6		
IC508	N2	IC700	A2	L572	L1	Q579	P6	R23	H5	R51	G5	R79	*G4	R109	*N3	R258	A4	R286	*A5	R351	*N4	R409	J2	R521	*N1	R552	*D4	R589	*L1	R667	F5	R813	D5	R841	F5	X500	C5

*:B SIDE

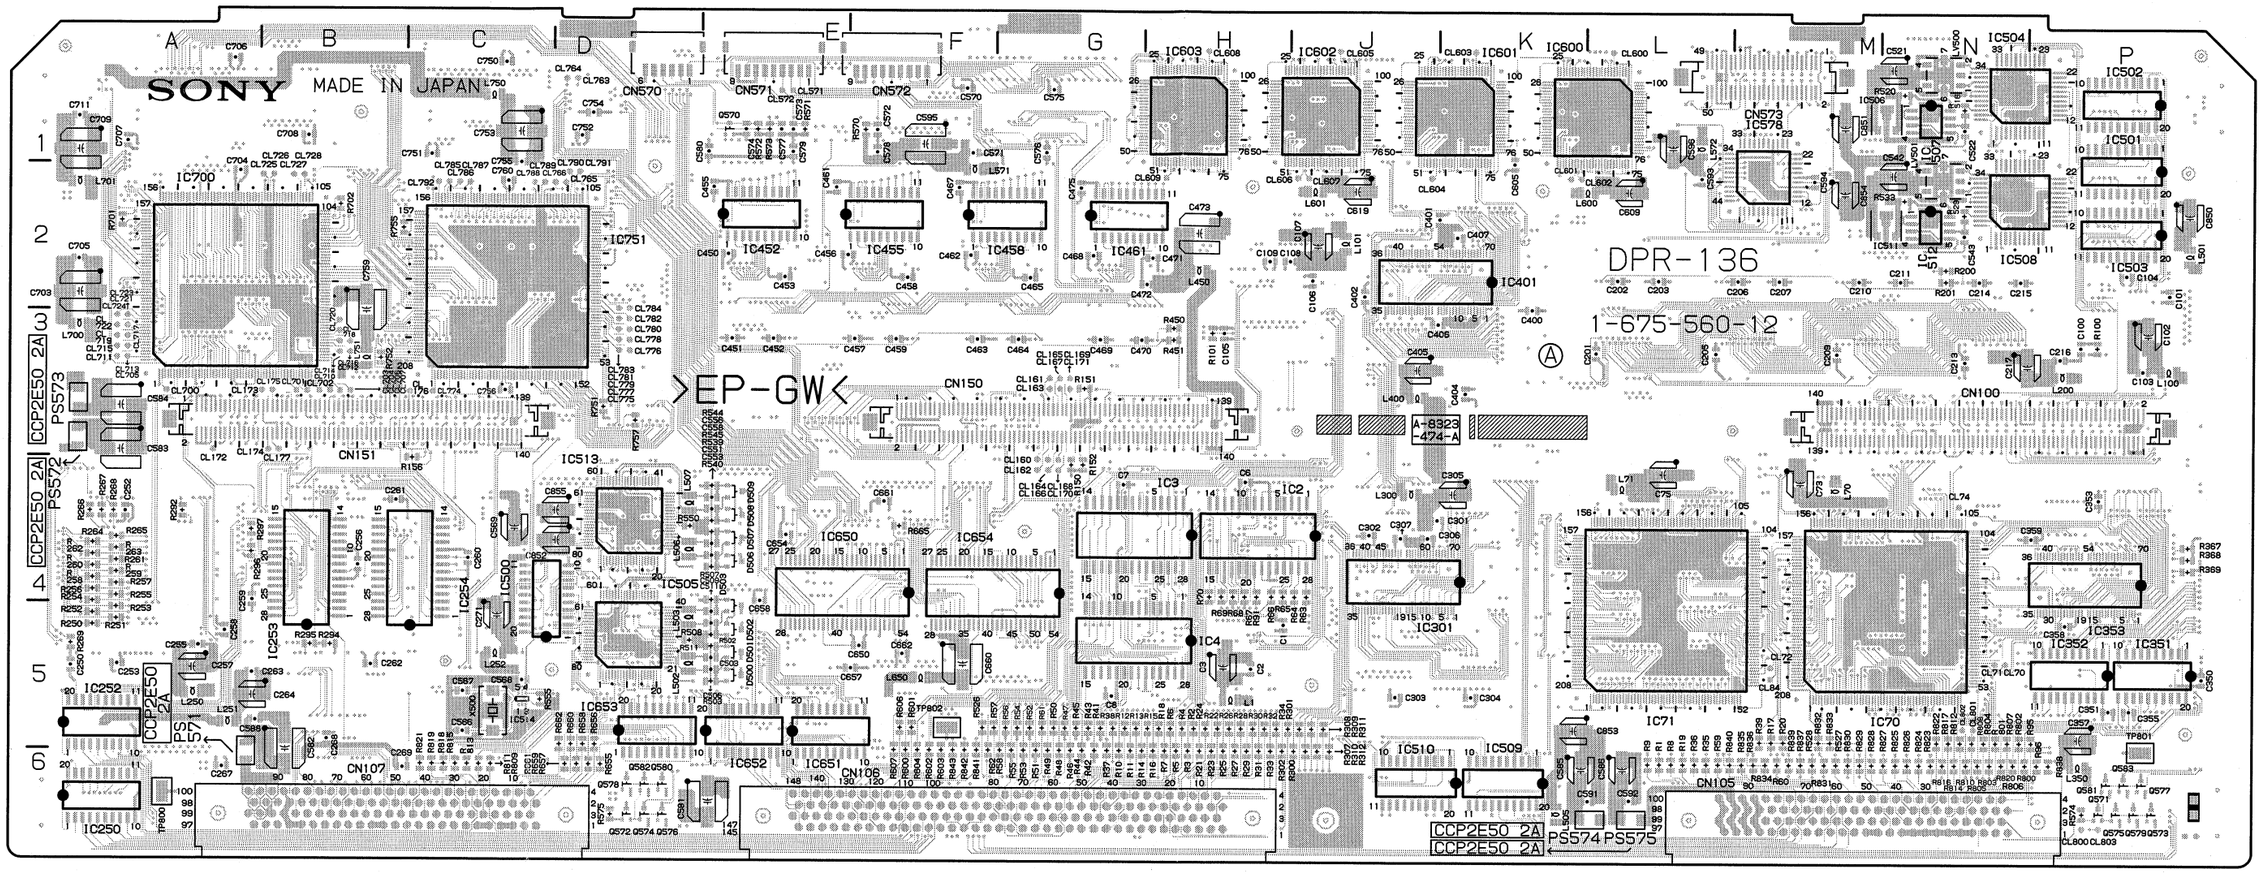

DPR-136 -A SIDE-
SUFFIX: -12

DPR-136 (1-675-560-12)

C1	H5	C202	L2	C262	B5	C400	K2	C470	G3	C522	N1	C550	*N2	C578	F1	C609	L2	C704	A2	CL2	*G4	CL109	*H2	CL572	E1	CL707	B3	CL735	*B1	CL767	*C2	CL802	N5	IC4	H5
C2	H5	C203	L2	C263	A5	C401	K2	C471	H2	C523	*N1	C551	E4	C579	E1	C610	*J1	C705	A2	CL11	*H5	CL110	*H2	CL600	L1	CL708	*B3	CL736	*B1	CL768	*C2	CL803	P6	IC70	N5
C3	H5	C204	*L2	C264	A5	C402	J2	C472	H2	C524	*N1	C552	*E4	C580	E1	C611	*J1	C706	A1	CL12	*H5	CL111	*H2	CL601	K2	CL709	*B3	CL737	*B1	CL769	*C2			IC71	L5
C4	*H4	C205	L3	C265	*C4	C403	*K3	C473	H2	C525	*N1	C553	E4	C581	E6	C612	*J1	C707	A1	CL13	*H5	CL112	*H2	CL602	K2	CL710	B3	CL738	*A2	CL770	*C2	CN100	N3	IC100	*P3
C5	*H5	C206	M2	C266	*C5	C404	K3	C474	*H2	C526	*N1	C554	*E4	C582	B6	C613	*J1	C708	B1	CL70	N5	CL113	*J2	CL603	K1	CL711	A3	CL739	*A2	CL771	*C2	CN105	M6	IC101	*H2
C6	H4	C207	M2	C267	A6	C405	J3	C475	G2	C527	*N1	C555	*E4	C583	A3	C614	*H1	C709	A1	CL71	N5	CL114	*H2	CL604	J2	CL712	B3	CL740	*A2	CL772	*D2	CN106	G6	IC200	*L3
C7	G4	C208	*M2	C268	B5	C406	J3	C500	*P1	C528	*D5	C556	E4	C584	A3	C615	*H1	C710	*A2	CL72	M5	CL115	*H2	CL605	J1	CL713	A3	CL741	*A2	CL773	*D2	CN107	B6	IC201	*M3
C8	G5	C209	M3	C269	B6	C407	K2	C501	*C5	C529	*N1	C557	*E4	C585	K6	C616	*H1	C711	A1	CL73	*M5	CL160	G4	CL606	J2	CL714	B3	CL742	*B2	CL774	C3	CN150	G3	IC202	*M3
C70	*N4	C210	M2	C270	*C4	C450	E2	C502	*P2	C530	*D5	C558	E4	C586	L6	C617	*H1	C750	C1	CL74	N4	CL161	G3	CL607	J2	CL715	A3	CL743	*B2	CL775	D3	CN151	B3	IC203	*N3
C71	*N4	C211	N2	C271	C5	C451	E3	C503	E5	C531	*N1	C559	*E4	C587	*E6	C618	*J2	C751	C1	CL75	*L5	CL162	G4	CL608	H1	CL716	B3	CL744	*B2	CL776	D3	CN570	D1	IC250	A6
C72	*N5	C212	*N2	C300	*K4	C452	E3	C504	*E5	C532	*D4	C560	*E4	C588	A5	C619	J2	C752	D1	CL76	*L5	CL163	G3	CL609	H2	CL717	A3	CL745	*B2	CL777	D3	CN571	E1	IC251	*A4
C73	M4	C213	N3	C301	J4	C453	E2	C505	*P2	C533	*D5	C561	*D4	C589	*A3	C650	F5	C753	C1	CL77	*L4	CL164	G4	CL650	*E4	CL718	B3	CL750	*B1	CL778	D3	CN572	F1	IC252	A5
C74	*M4	C214	N2	C302	J4	C454	*E2	C506	E5	C534	*N2	C562	*D4	C590	*A3	C651	*E5	C754	D1	CL78	*L4	CL165	G3	CL651	*E4	CL719	A3	CL751	*C1	CL779	D3	CN573	M1	IC253	B5
C75	L4	C215	N2	C303	J5	C455	E2	C507	*E5	C535	*P2	C563	*D4	C591	L6	C652	*E5	C755	C1	CL79	*L4	CL166	G4	CL653	*E4	CL720	B3	CL752	*C1	CL780	D3			IC254	C5
C76	*L5	C216	P3	C304	K5	C456	E2	C508	*E5	C536	*K6	C564	*D4	C592	L6	C653	*D5	C756	C3	CL80	*L4	CL167	G3	CL654	*E4	CL721	A3	CL753	*C1	CL781	D3	D500	E5	IC255	*B4
C77	*L4	C217	N3	C305	K4	C457	F3	C509	E5	C537	*P2	C565	*D4	C593	L2	C654	E4	C757	*B3	CL81	*L4	CL168	G4	CL655	*E5	CL722	A3	CL754	*C1	CL782	D3	D501	E5	IC256	*C5
C100	P3	C250	A5	C306	J4	C458	F2	C510	*E5	C538	*K6	C566	C5	C594	M2	C655	*G5	C758	*D2	CL82	*L4	CL169	G3	CL656	*F4	CL723	A3	CL755	*C1	CL783	D2	D502	E5	IC257	*A5
C101	P2	C251	*A6	C307	J4	C459	F3	C511	E5	C539	*N2	C567	C5	C595	F1	C656	*G4	C759	B3	CL83	*L4	CL170	G4	CL657	*F4	CL724	A3	CL756	*D1	CL784	D2	D503	E5	IC258	*C4
C102	P3	C252	A4	C350	P5	C460	*P2	C512	*E5	C540	*N2	C568	C5	C596	L1	C657	F5	C760	C2	CL84	M5	CL171	G3	CL658	*F4	CL725	B2	CL757	*D1	CL785	C2	D504	*N1	IC259	*B5
C103	P3	C253	A5	C351	P5	C461	E2	C513	*E5	C541	*N2	C569	C4	C600	*L1	C658	E4	C761	*B3	CL100	*P2	CL172	A3	CL659	*F4	CL726	B2	CL758	*D1	CL786	C2	D505	*N2	IC260	*B5
C104	P2	C254	*A5	C352	*P4	C462	F2	C514	*D5	C542	N2	C570	F1	C601	*L1	C659	*F4	C850	P2	CL101	*P2	CL173	B3	CL660	*F4	CL727	B2	CL759	*B1	CL787	C2	D506	E4	IC300	*J5
C105	H3	C255	A5	C353	P4	C463	F3	C515	*N1	C543	N2	C571	F1	C602	*K1	C660	F5	C851	M1	CL102	*P2	CL174	B3	CL700	A3	CL728	B2	CL760	*D1	CL788	C2	D507	E4	IC301	K4
C106	J2	C256	B4	C354	*N4	C464	G3	C516	*P1	C544	*N2	C572	F1	C603	*K1	C661	F4	C852	D4	CL103	*P2	CL175	B3	CL701	B3	CL729	*A1	CL761	*D1	CL789	C2	D508	E4	IC350	*P5
C107	J2	C257	A5	C355	P5	C465	G2	C517	*P1	C545	*N2	C573	E1	C604	*K1	C662	F5	C853	K5	CL104	*P2	CL176	C3	CL702	B3	CL730	*A1	CL762	*D1	CL790	D2	D509	E4	IC351	P5
C108	H2	C258	A5	C356	*P5	C466	*G2	C518	*N1	C546	*N2	C574	E1	C605	K1	C700	*A3	C854	M2	CL105	*P2	CL177	B3	CL703	B3	CL731	*A1	CL763	D1	CL791	D2			IC352	P5
C109	H2	C259	A4	C357	P5	C467	F2	C519	*N1	C547	*N2	C575	G1	C606	*J1	C701	*A2	C855	D4	CL106	*P2	CL400	*K3	CL704	B3	CL732	*B1	CL764	D1	CL792	C2	IC1	*H4	IC353	P4
C200	*K2	C260	C4	C358	P5	C468	G2	C520	*N1	C548	*N2	C576	G1	C607	*J1	C702	*B2			CL107	*P2	CL570	*F1	CL705	A3	CL733	*B1	CL765	D2	CL800	P6	IC2	J4	IC400	*K2
C201	L3	C261	B4	C359	P4	C469	G3	C521	N1	C549	*N2	C577	E1	C608	*L2	C703	A2	CL1	*G4	CL108	*H2	CL571	E1	CL706	B3	CL734	*A1	CL766	D2	CL801	N5	IC3	H4	IC401	K2

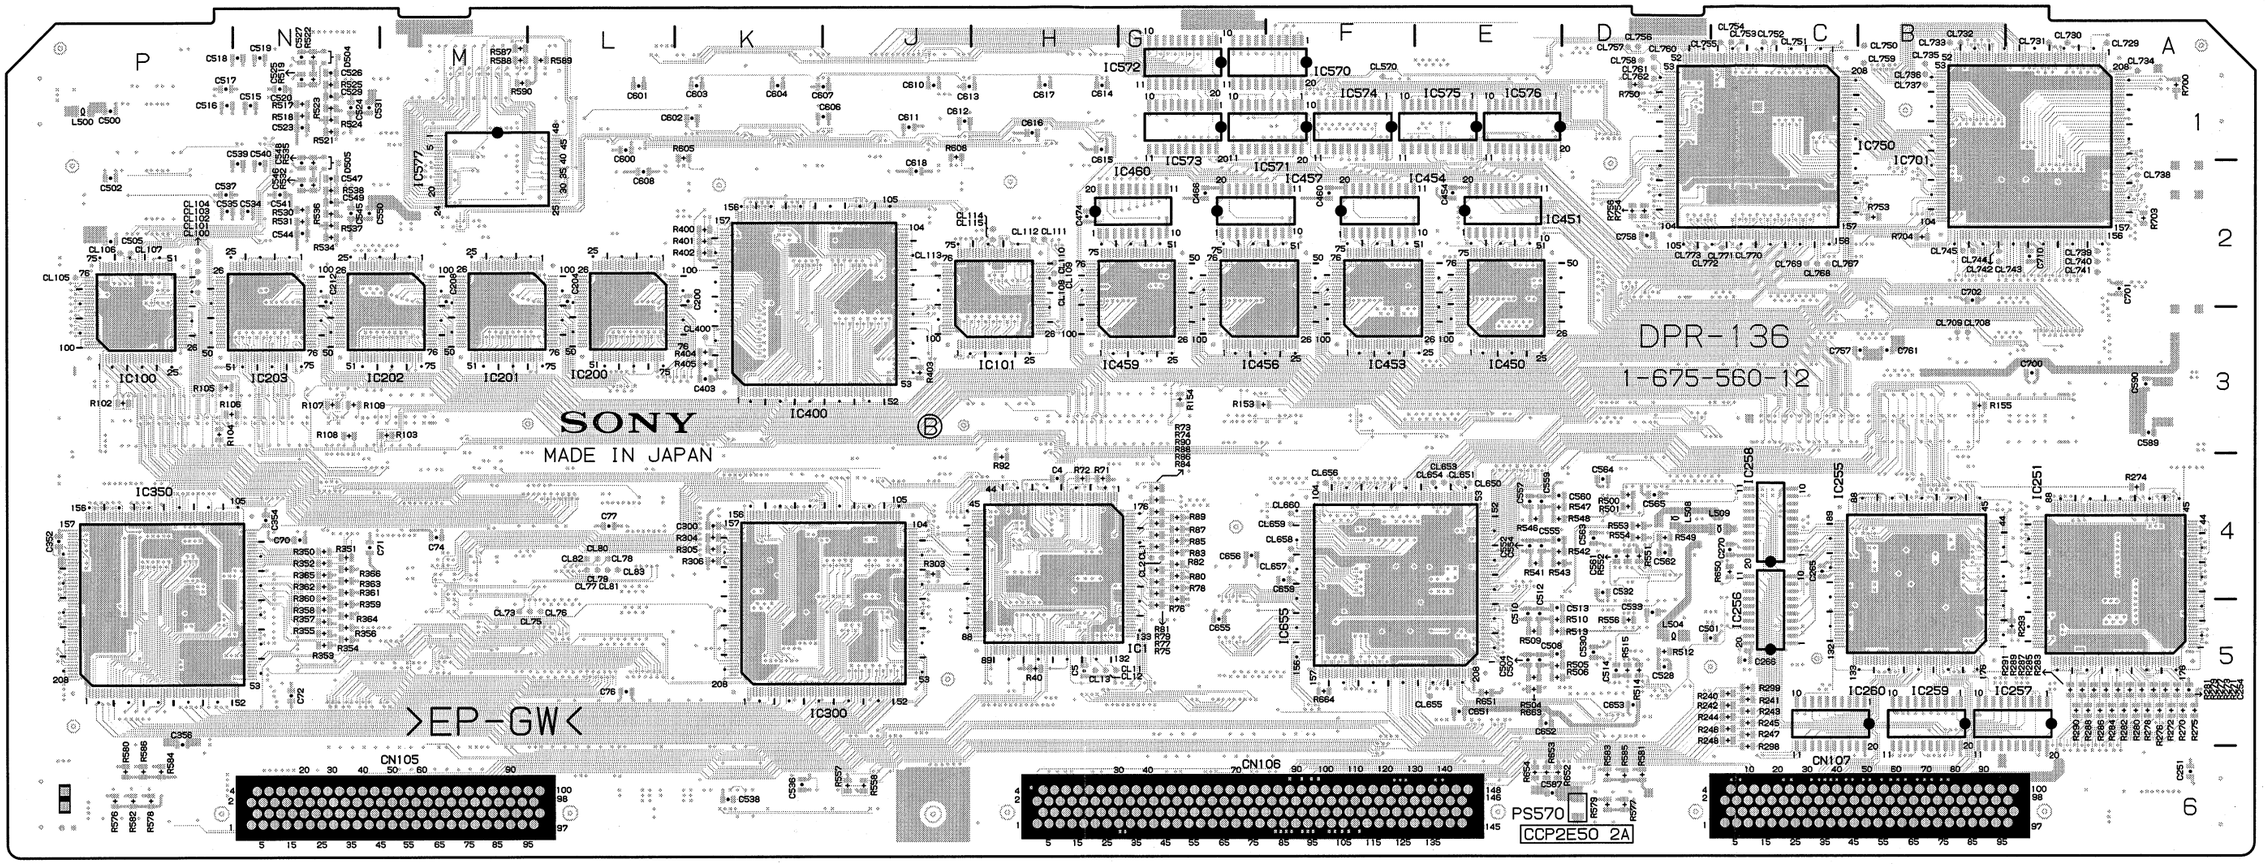

DPR-136 -B SIDE-

SUFFIX: -12

IC450	*E2	IC571	*F1	L200	P3	LV500	N1	R4	H5	R32	H5	R60	M6	R88	*G4	R242	*C5	R271	*A5	R299	*C5	R364	*N5	R514	*D5	R542	*E4	R581	*D6	R659	D6	R808	N5	R836	M6
IC451	*E2	IC572	*G1	L250	A5	LV501	N2	R5	H5	R33	H5	R61	G5	R89	*G4	R243	*C5	R272	*A5	R300	J5	R365	*N4	R515	*D5	R543	*E4	R582	*P6	R660	D5	R809	C6	R837	M6
IC452	E2	IC573	*G1	L251	A5			R6	H5	R34	H5	R62	F5	R90	*G4	R244	*C5	R273	*A5	R301	H5	R366	*N4	R516	N1	R544	E4	R583	*D6	R661	D6	R810	N6	R838	P6
IC453	*F2	IC574	*F1	L252	C5	PS570	*D6	R7	H5	R35	L6	R63	J4	R91	H4	R245	*C5	R274	*A4	R302	H5	R367	P4	R517	*N1	R545	E4	R584	*P6	R662	D5	R811	C6	R839	M6
IC454	*F2	IC575	*E1	L300	J4	PS571	A6	R8	L6	R36	L6	R64	J4	R92	*H4	R246	*C5	R275	*A5	R303	*J4	R368	P4	R518	*N1	R546	*E4	R585	*D6	R663	*E5	R812	N5	R840	L6
IC455	F2	IC576	*E1	L350	P6	PS572	A3	R9	L6	R37	G5	R65	H4	R95	P5	R247	*C5	R276	*A5	R304	*K4	R369	P4	R519	*N1	R547	*E4	R586	*P6	R664	*F5	R813	C6	R841	F5
IC456	*G2	IC577	*M1	L400	J3	PS573	A3	R10	G5	R38	G5	R66	H4	R96	P6	R248	*C5	R277	*A5	R305	*K4	R400	*K2	R520	N1	R548	*E4	R587	*M1	R665	F4	R814	N6	R842	F5
IC457	*G2	IC578	M2	L450	H2	PS574	L6	R11	G5	R39	M5	R67	H4	R100	P3	R250	A5	R278	*A5	R306	*K4	R401	*K2	R521	*N1	R549	*D4	R588	*M1	R700	*A1	R815	C6	R843	F5
IC458	F2	IC600	L1	L500	*P1	PS575	L6	R12	G5	R40	*H5	R68	H4	R101	H3	R251	A5	R279	*A5	R307	J5	R402	*K2	R522	*N1	R550	D4	R589	*L1	R701	A2	R816	N6		
IC459	*G2	IC601	K1	L501	P2			R13	G5	R41	G5	R69	H4	R102	*P3	R252	A5	R280	*A5	R308	J5	R403	*J3	R523	*N1	R551	*D4	R590	*M1	R702	B2	R817	N5	TP800	A6
IC460	*H2	IC602	J1	L502	D5	Q570	E1	R14	G5	R42	G5	R70	H4	R103	*M3	R253	A5	R281	*A5	R309	J5	R404	*K3	R524	*N1	R552	*D4	R600	F5	R703	*A2	R818	C6	TP801	P5
IC461	G2	IC603	H1	L503	D5	Q571	P6	R15	H5	R43	G5	R71	*H4	R104	*P3	R254	A4	R282	*A5	R310	J5	R405	*K3	R525	*N1	R553	*D4	R601	F5	R704	*B2	R819	C6	TP802	F5
IC500	D5	IC650	F4	L504	*D5	Q572	D6	R16	H5	R44	G5	R72	*H4	R105	*P3	R255	A4	R283	*A5	R311	J5	R450	H3	R526	F5	R554	*D4	R602	F5	R750	*D1	R820	N6		
IC501	P1	IC651	E6	L505	K6	Q573	P6	R17	M5	R45	G5	R73	*G4	R106	*P3	R256	A4	R284	*A5	R312	J5	R451	H3	R527	M6	R555	C5	R603	F5	R751	D3	R821	C6	X500	C5
IC502	P1	IC652	E6	L506	D4	Q574	D6	R18	H5	R46	G5	R74	*G4	R107	*N3	R257	A4	R285	*A5	R350	*N4	R500	*D4	R528	M6	R556	*D5	R604	F5	R752	B3	R822	N5		
IC503	P2	IC653	D6	L507	D4	Q575	P6	R19	L6	R47	G5	R75	*G5	R108	*N3	R258	A4	R286	*A5	R351	*N4	R501	*D4	R529	N2	R557	*J6	R605	*K1	R753	*B2	R823	N6	*:B SIDE	
IC504	N1	IC654	G4	L508	*D4	Q576	D6	R20	M5	R48	G5	R76	*G4	R109	*N3	R259	A4	R287	*A5	R352	*N4	R502	E5	R530	*N2	R558	*J6	R606	F5	R754	*D2	R824	N6		
IC505	D5	IC655	*F4	L509	*C4	Q577	P6	R21	H5	R49	G5	R77	*G4	R150	G4	R260	A4	R288	*A5	R353	*N5	R503	E5	R531	*N2	R570	F1	R607	F5	R755	B2	R825	N6		
IC506	N1	IC700	A2	L571	F2	Q578	D6	R22	H5	R50	G5	R78	*G4	R151	G3	R261	A4	R289	*A5	R354	*N5	R504	*E5	R532	*N2	R571	E1	R608	*J1	R756	*D2	R826	N6		
IC507	N1	IC701	*A1	L572	L1	Q579	P6	R23	H5	R51	G5	R79	*G4	R152	G4	R262	A4	R290	*A5	R355	*N5	R505	*E5	R533	N2	R572	E1	R650	*C4	R757	D3	R827	N6		
IC508	N2	IC750	*C1	L600	L2	Q580	D6	R24	H5	R52	G5	R80	*G4	R153	*G3	R263	A4	R291	*A5	R356	*N5	R506	*E5	R534	*N2	R573	E1	R651	*E5	R800	N6	R828	M6		
IC509	K6	IC751	C2	L601	J2	Q581	P6	R25	H5	R53	G5	R81	*G4	R154	*G3	R264	A4	R292	A4	R357	*N5	R507	E4	R535	*N2	R574	P6	R652	*E6	R801	N5	R829	M6		
IC510	K6			L650	F5	Q582	D6	R26	H5	R54	G5	R82	*G4	R155	*B3	R265	A4	R293	*A5	R358	*N5	R508	E5	R536	*N2	R575	D6	R653	*E6	R802	N5	R830	M6		
IC511	N2	L1	H5	L700	A3	Q583	P6	R27	H5	R55	G5	R83	*G4	R156	C4	R266	A4	R294	B5	R359	*N5	R509	*E5	R537	*N2	R576	*P6	R654	*E6	R803	N6	R831	M6		
IC512	N2	L70	M4	L701	A2			R28	H5	R56	G5	R84	*G4	R200	N2	R267	A4	R295	B5	R360	*N4	R510	*E5	R538	*N2	R577	*D6	R655	D6	R804	N5	R832	M5		
IC513	D4	L71	L4	L750	C1	R1	L6	R29	H5	R57	F5	R85	*G4	R201	N2	R268	A4	R296	A4	R361	*N4	R511	D5	R539	E4	R578	*P6	R656	D5	R805	N6	R833	M5		
IC514	C5	L100	P3	L751	B3	R2	H5	R30	H5	R58	G5	R86	*G4	R240	*C5	R269	A5	R297	A4	R362	*N4	R512	*D5	R540	E4	R579	*D6	R657	D6	R806	N6	R834	M6		
IC570	*F1	L101	J2			R3	H5	R31	H5	R59	L6	R87	*G4	R241	*C5	R270	*A5	R298	*C6	R363	*N4	R513	*E5	R541	*E4	R580	*P6	R658	D5	R807	N5	R835	M6		

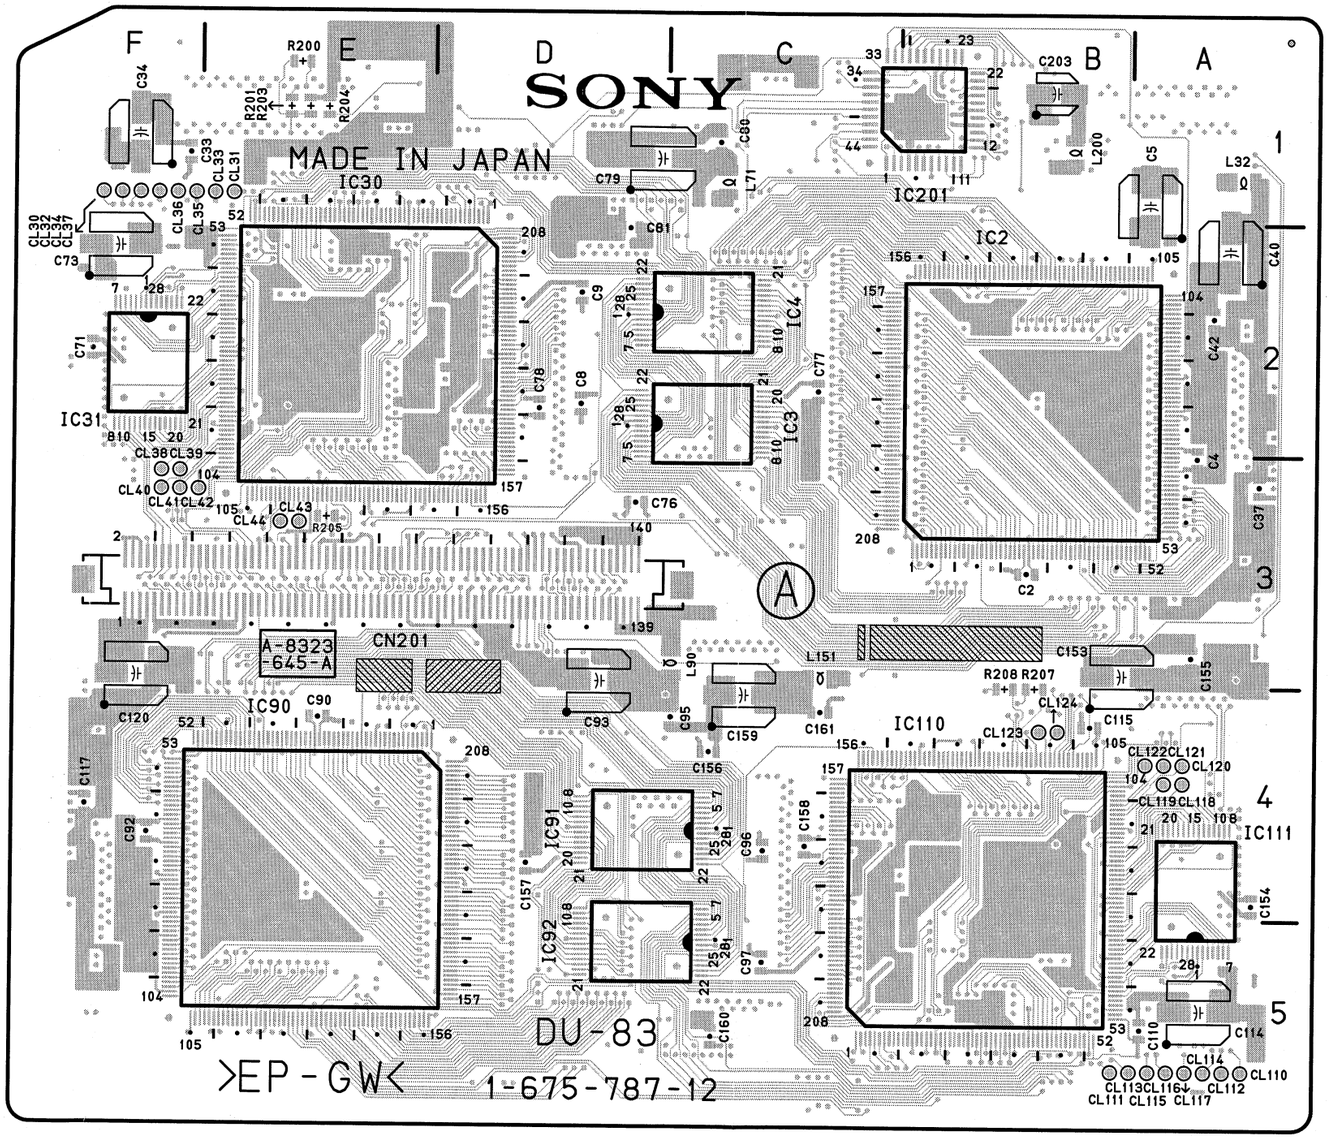

DU-83 -A SIDE-
SUFFIX: -12

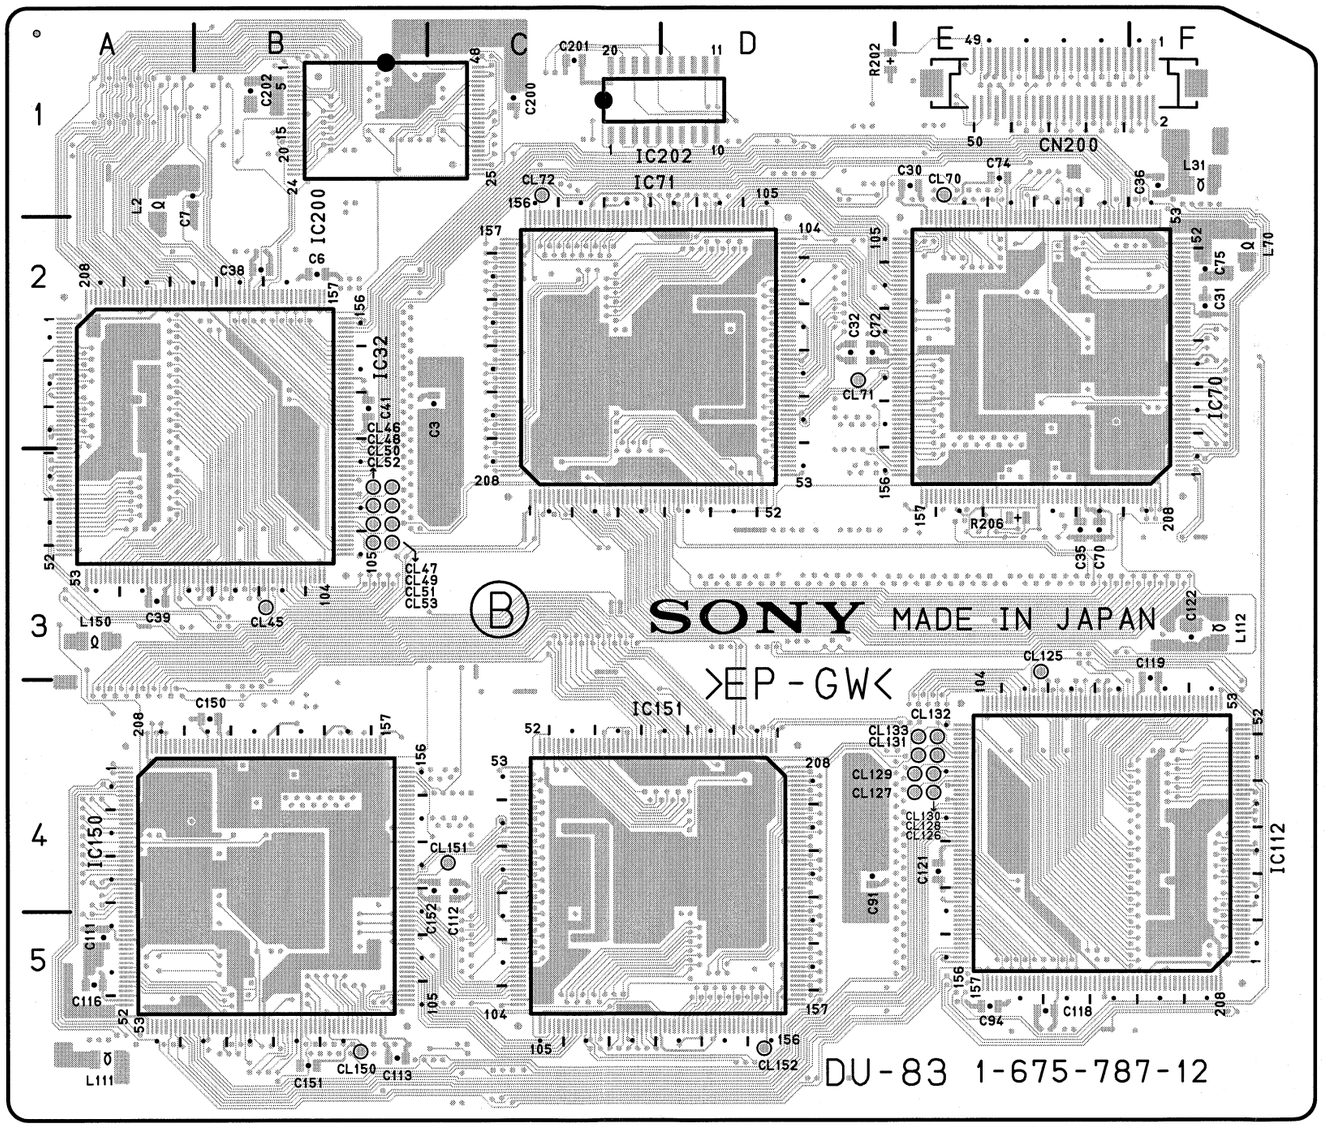

DU-83 -B SIDE-
SUFFIX: -12

DU-83 (1-675-787-12)

C2	B3	CL51	*B3
C3	*C2	CL52	*B3
C4	A3	CL53	*B3
C5	A1	CL70	*E1
C6	*B2	CL71	*D2
C7	*A1	CL72	*C1
C8	D2	CL110	A5
C9	D2	CL111	B5
C30	*E1	CL112	A5
C31	*F2	CL113	A5
C32	*D2	CL114	A5
C33	F1	CL115	A5
C34	F1	CL116	A5
C35	*E3	CL117	A5
C36	*F1	CL118	A4
C37	A3	CL119	A4
C38	*B2	CL120	A4
C39	*A3	CL121	A4
C40	A2	CL122	A4
C41	*B2	CL123	B4
C42	A2	CL124	B4
C70	*E3	CL125	*E3
C71	F2	CL126	*E4
C72	*D2	CL127	*E4
C73	F2	CL128	*E4
C74	*E1	CL129	*E4
C75	*F2	CL130	*E4
C76	D3	CL131	*E4
C77	C2	CL132	*E4
C78	D2	CL133	*E4
C79	D1	CL150	*B5
C80	C1	CL151	*C4
C81	D2	CL152	*D5
C90	E4		
C91	*D4	CN200	*E1
C92	F4	CN201	E3
C93	D3		
C94	*E5	IC2	B2
C95	C4	IC3	D2
C96	C4	IC4	D2
C97	C5	IC30	E2
C110	A5	IC31	F2
C111	*A5	IC32	*B2
C112	*C4	IC70	*E2
C113	*B5	IC71	*C2
C114	A5	IC90	E4
C115	B4	IC91	C4
C116	*A5	IC92	C5
C117	F4	IC110	B4
C118	*E5	IC111	A5
C119	*F3	IC112	*E4
C120	F3	IC150	*B4
C121	*B4	IC151	*C4
C122	*F3	IC200	*B1
C150	*B4	IC201	B1
C151	*B5	IC202	*C1
C152	*C4		
C153	B3	L2	*A1
C154	A4	L31	*F1
C155	A3	L32	A1
C156	C4	L70	*F2
C157	D4	L71	C1
C158	C4	L90	C3
C159	C4	L111	*A5
C160	C5	L112	*F3
C161	C4	L150	*A3
C200	*C1	L151	C3
C201	*C1	L200	B1
C202	*B1		
C203	B1	R200	E1
		R201	E1
CL30	F1	R202	*D1
CL31	E1	R203	E1
CL32	F1	R204	E1
CL33	E1	R205	E3
CL34	F1	R206	*E3
CL35	F1	R207	B4
CL36	F1	R208	B4
CL37	F1		
CL38	F3	*:B SIDE	
CL39	F3		
CL40	F3		
CL41	F3		
CL42	F3		
CL43	E3		
CL44	E3		
CL45	*B3		
CL46	*B3		
CL47	*B3		
CL48	*B3		
CL49	*B3		
CL50	*B3		

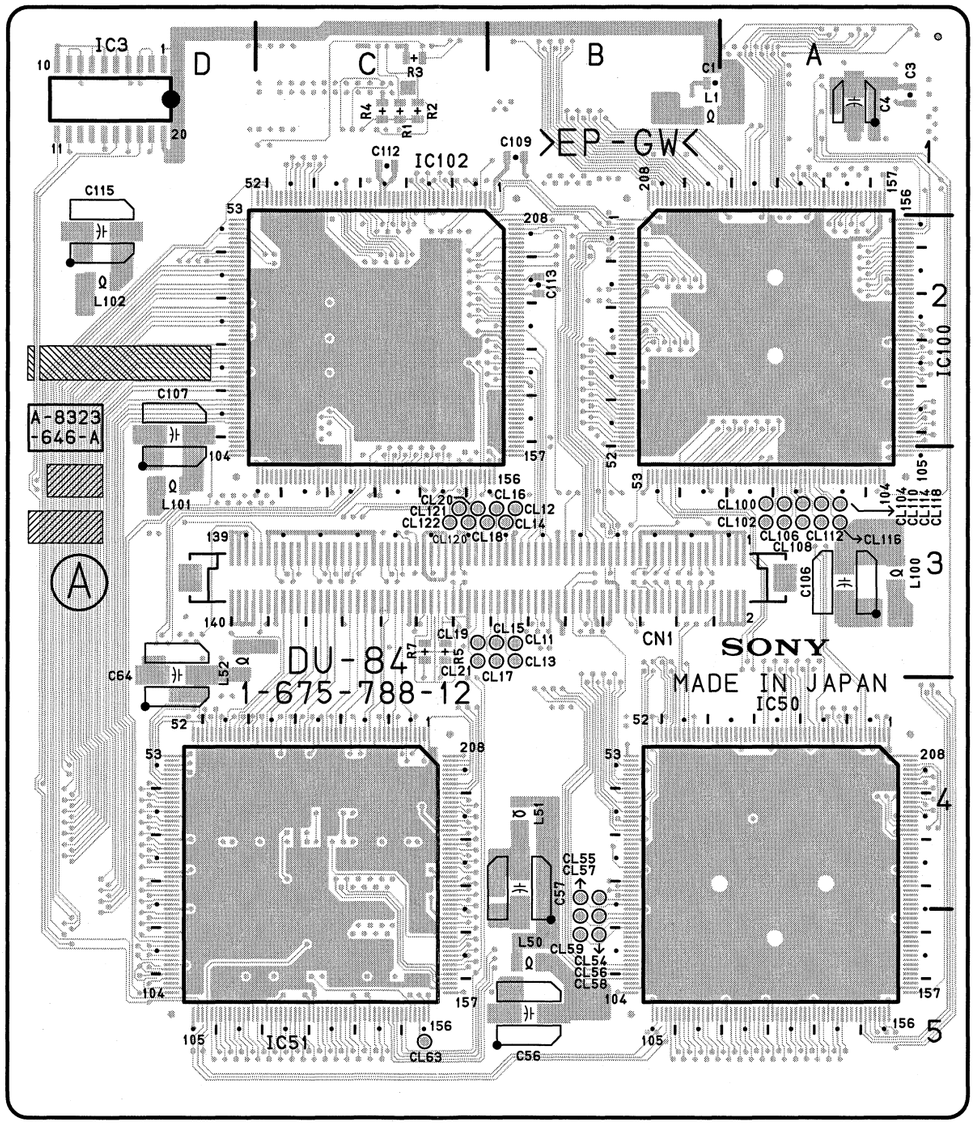

DU-84 -A SIDE-
SUFFIX: -12

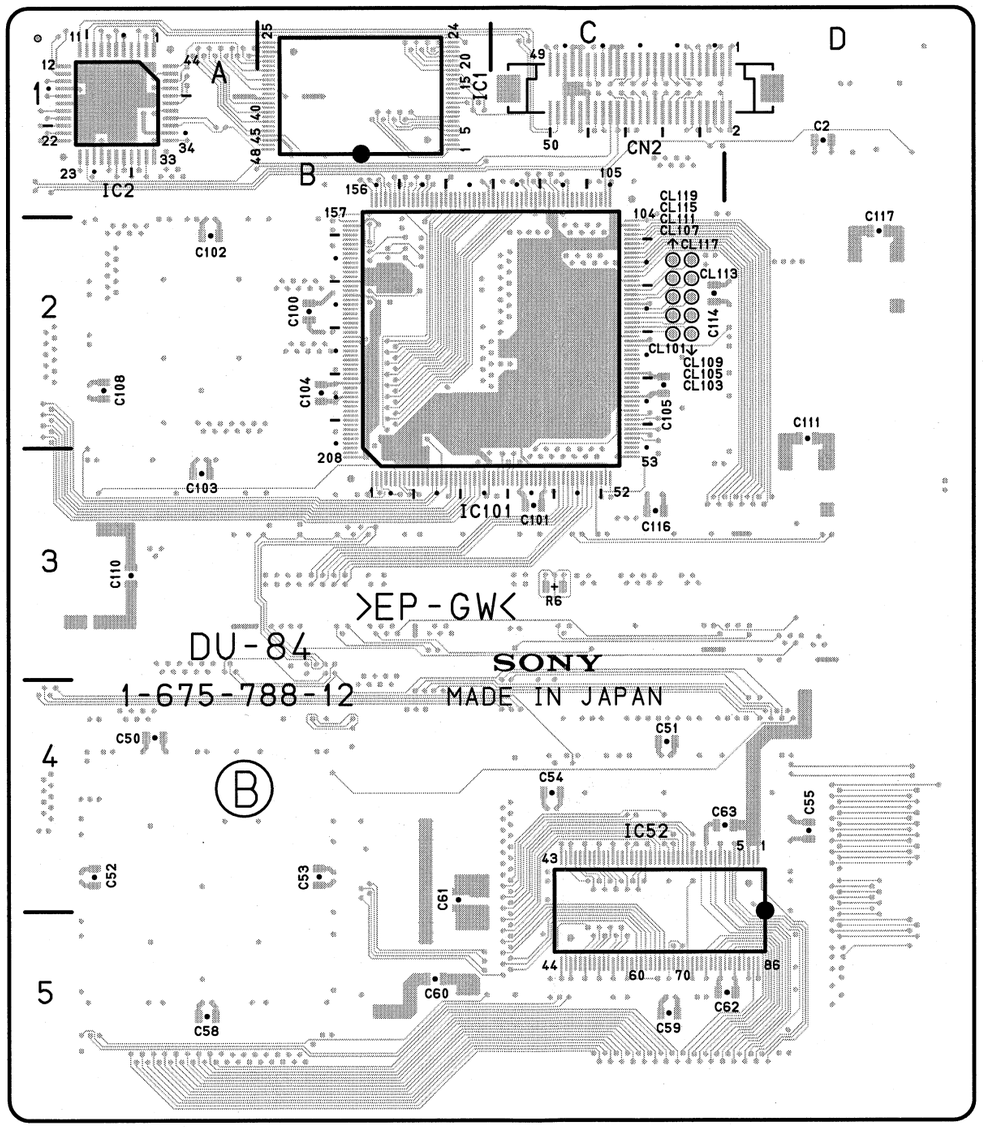

DU-84 -B SIDE-
SUFFIX: -12

DU-84 (1-675-788-12)

C1	B1	L1	B1
C2	*D1	L50	B5
C3	A1	L51	B4
C4	A1	L52	D3
C50	*A4	L100	A3
C51	*C4	L101	D3
C52	*A4	L102	D2
C53	*B4		
C54	*C4	R1	C1
C55	*D4	R2	C1
C56	B5	R3	C1
C57	B4	R4	C1
C58	*A5	R5	C3
C59	*C5	R7	C3
C60	*B5	R6	*C3
C61	*B4		
C62	*D5	*:B SIDE	
C63	*C4		
C64	D3		
C100	*B2		
C101	*C3		
C102	*A2		
C103	*A3		
C104	*B2		
C105	*C2		
C106	A3		
C107	D2		
C108	*A2		
C109	B1		
C110	*A3		
C111	*D2		
C112	C1		
C113	B2		
C114	*C2		
C115	D2		
C116	*C3		
C117	*D2		
CL11	B3		
CL12	B3		
CL13	B3		
CL14	B3		
CL15	B3		
CL16	B3		
CL17	B3		
CL18	B3		
CL19	C3		
CL20	C3		
CL21	C3		
CL54	B4		
CL55	B4		
CL56	B5		
CL57	B5		
CL58	B5		
CL59	B5		
CL63	C5		
CL100	A3		
CL101	*C2		
CL102	A3		
CL103	*C2		
CL104	A3		
CL105	*C2		
CL106	A3		
CL107	*C2		
CL108	A3		
CL109	*C2		
CL110	A3		
CL111	*C2		
CL112	A3		
CL113	*C2		
CL114	A3		
CL115	*C2		
CL116	A3		
CL117	*C2		
CL118	A3		
CL119	*C2		
CL120	C3		
CL121	C3		
CL122	C3		
CN1	B3		
CN2	*C1		
IC1	*B1		
IC2	*A1		
IC3	D1		
IC50	A4		
IC51	C4		
IC52	*D4		
IC101	*B2		
IC100	A2		
IC102	C2		

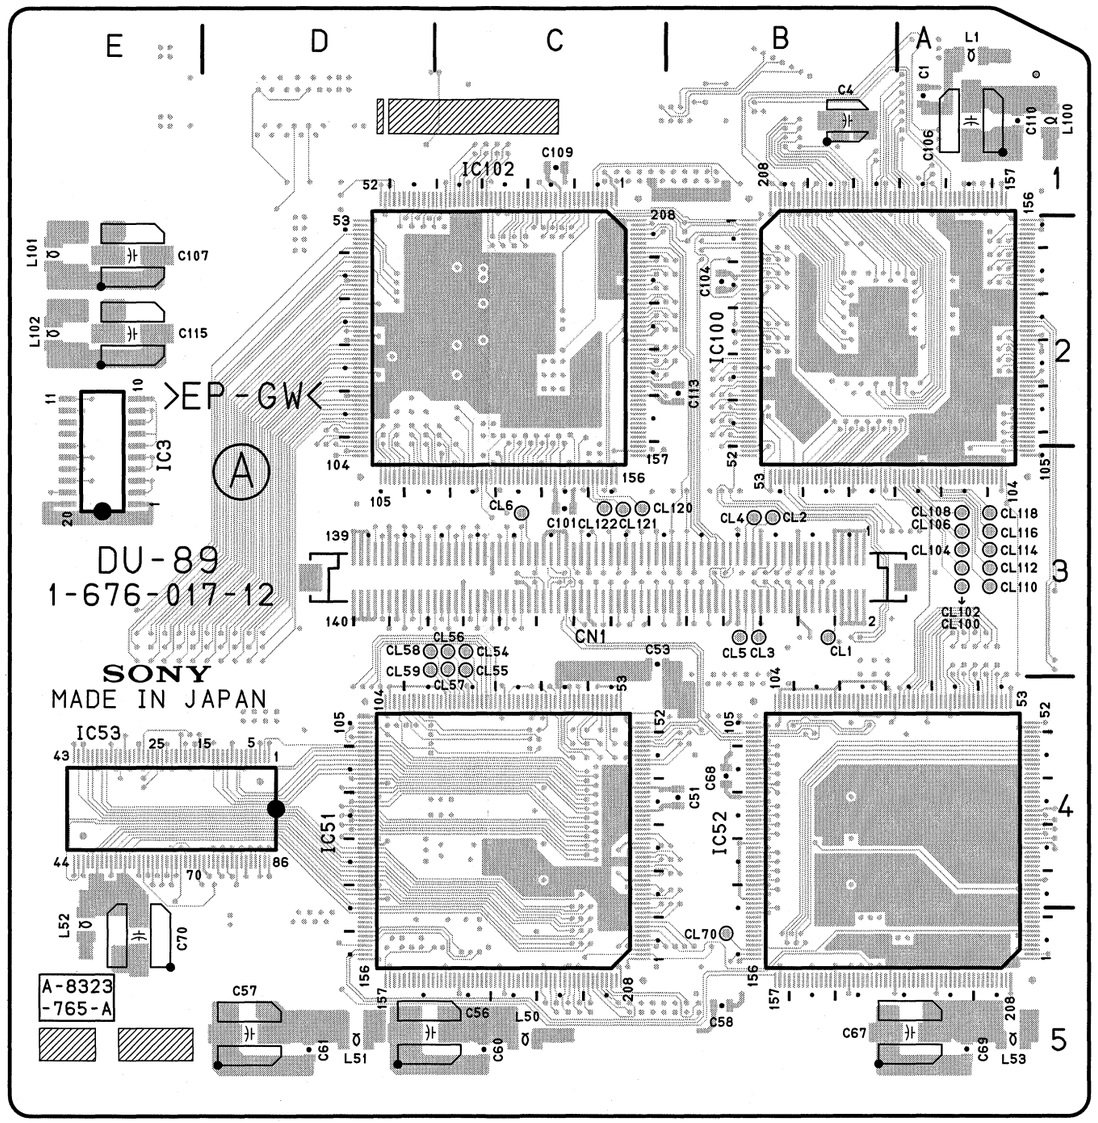

DU-89 -A SIDE-
SUFFIX: -12

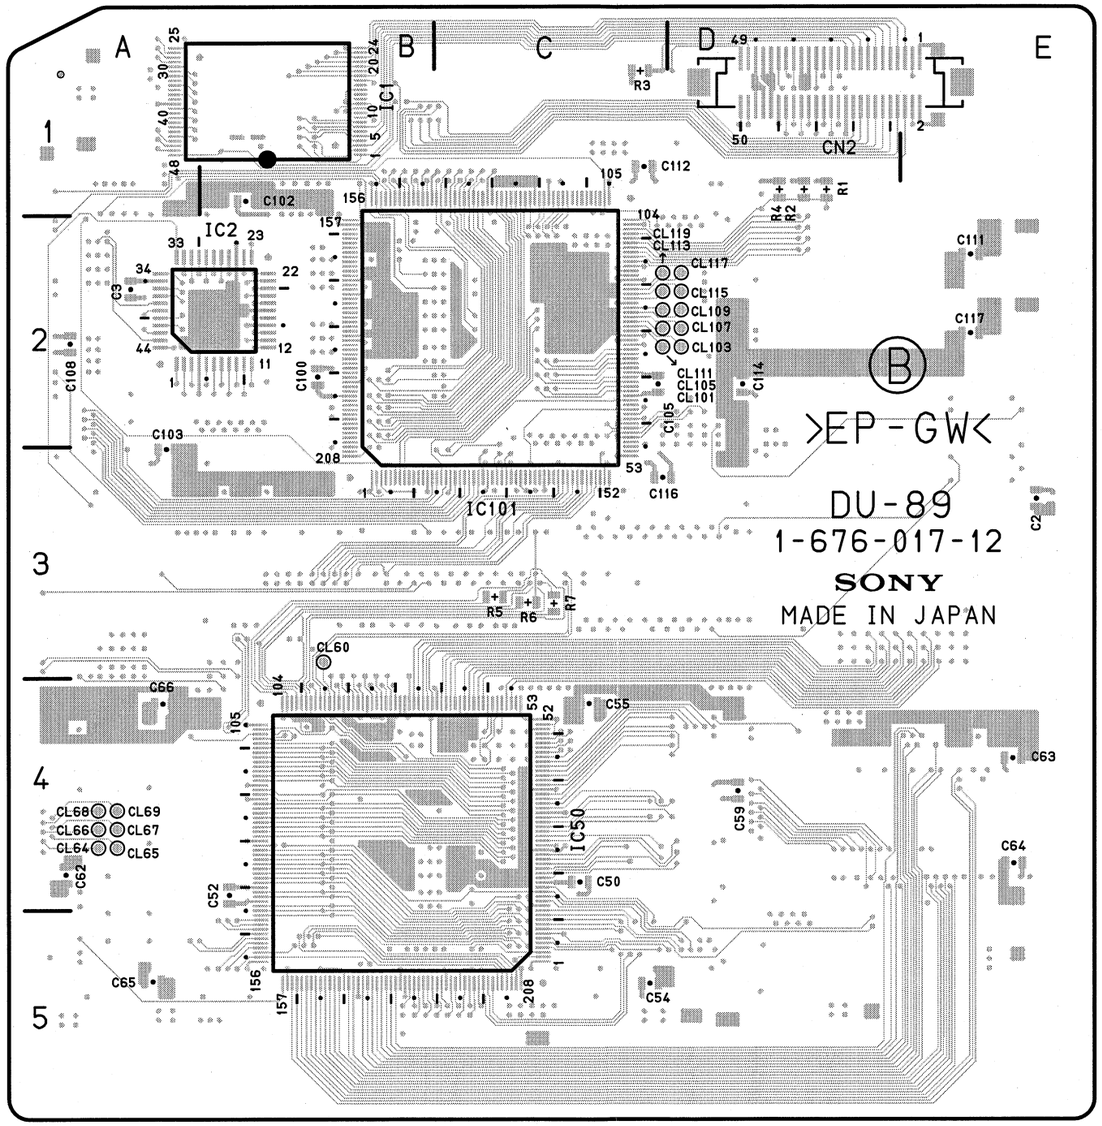

DU-89 -B SIDE-
SUFFIX: -12

DU-89 (1-676-017-12)

C1	A1	IC2	*B2
C2	*E3	IC3	E3
C3	*A2	IC50	*B4
C4	B1	IC51	C4
C50	*C4	IC52	B4
C51	B4	IC53	D4
C52	*B4	IC100	B2
C53	C3	IC101	*C2
C54	*C5	IC102	C2
C55	*C4		
C56	D5	L1	A1
C57	D5	L50	C5
C58	B5	L51	D5
C59	*D4	L52	E5
C60	C5	L53	A5
C61	D5	L100	A1
C62	*A4	L101	E2
C63	*E4	L102	E2
C64	*E4		
C65	*A5	R1	*D1
C66	*A4	R2	*D1
C67	A5	R3	*C1
C68	B4	R4	*D1
C69	A5	R5	*C3
C70	E5	R6	*C3
C100	*B2	R7	*C3
C101	C3		
C102	*B1	*:B SIDE	
C103	*A3		
C104	B2		
C105	*C2		
C106	A1		
C107	E2		
C108	*A2		
C109	C1		
C110	A1		
C111	*E2		
C112	*C1		
C113	B2		
C114	*D2		
C115	E2		
C116	*C3		
C117	*E2		
CL1	B3		
CL2	B3		
CL3	B3		
CL4	B3		
CL5	B3		
CL6	C3		
CL54	C3		
CL55	C3		
CL56	C3		
CL57	C3		
CL58	D3		
CL59	D3		
CL60	*B3		
CL64	*A4		
CL65	*A4		
CL66	*A4		
CL67	*A4		
CL68	*A4		
CL69	*A4		
CL70	B5		
CL100	A3		
CL101	*C2		
CL102	A3		
CL103	*D2		
CL104	A3		
CL105	*C2		
CL106	A3		
CL107	*D2		
CL108	A3		
CL109	*D2		
CL110	A3		
CL111	*C2		
CL112	A3		
CL113	*C2		
CL114	A3		
CL115	*D2		
CL116	A3		
CL117	*D2		
CL118	A3		
CL119	*C2		
CL120	C3		
CL121	C3		
CL122	C3		
CN1	C3		
CN2	*D1		
IC1	*B1		

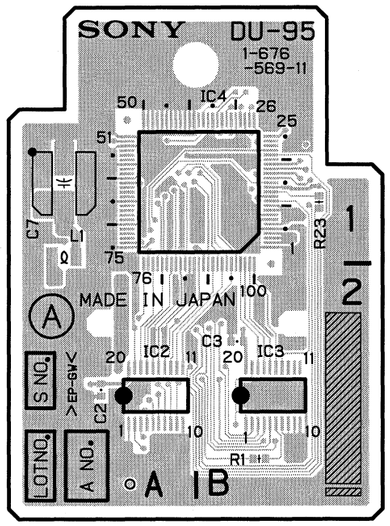

DSR-2000 (UC) : S/N 10001 through 100290
DSR-2000 (J) : S/N 30001 through 300240
DSR-2000P (CE) : S/N 40001 through 400300

DU-95 -A SIDE-

SUFFIX: -11

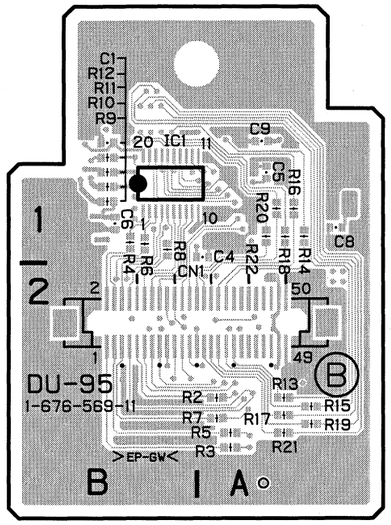

DU-95 -B SIDE-

SUFFIX: -11

DU-95 (1-676-569-11)

C1	*B1
C2	A2
C3	B2
C4	*A1
C5	*A1
C6	*B1
C7	A1
C8	*A1
C9	*A1
CN1	*A2
IC1	*B1
IC2	A2
IC3	B2
IC4	B1
L1	A1
R1	B2
R2	*A2
R3	*A2
R4	*B1
R5	*A2
R6	*B1
R7	*A2
R8	*B1
R9	*B1
R10	*B1
R11	*B1
R12	*B1
R13	*A2
R14	*A1
R15	*A2
R16	*A1
R17	*A2
R18	*A1
R19	*A2
R20	*A1
R21	*A2
R22	*A1
R23	B1

*:B SIDE

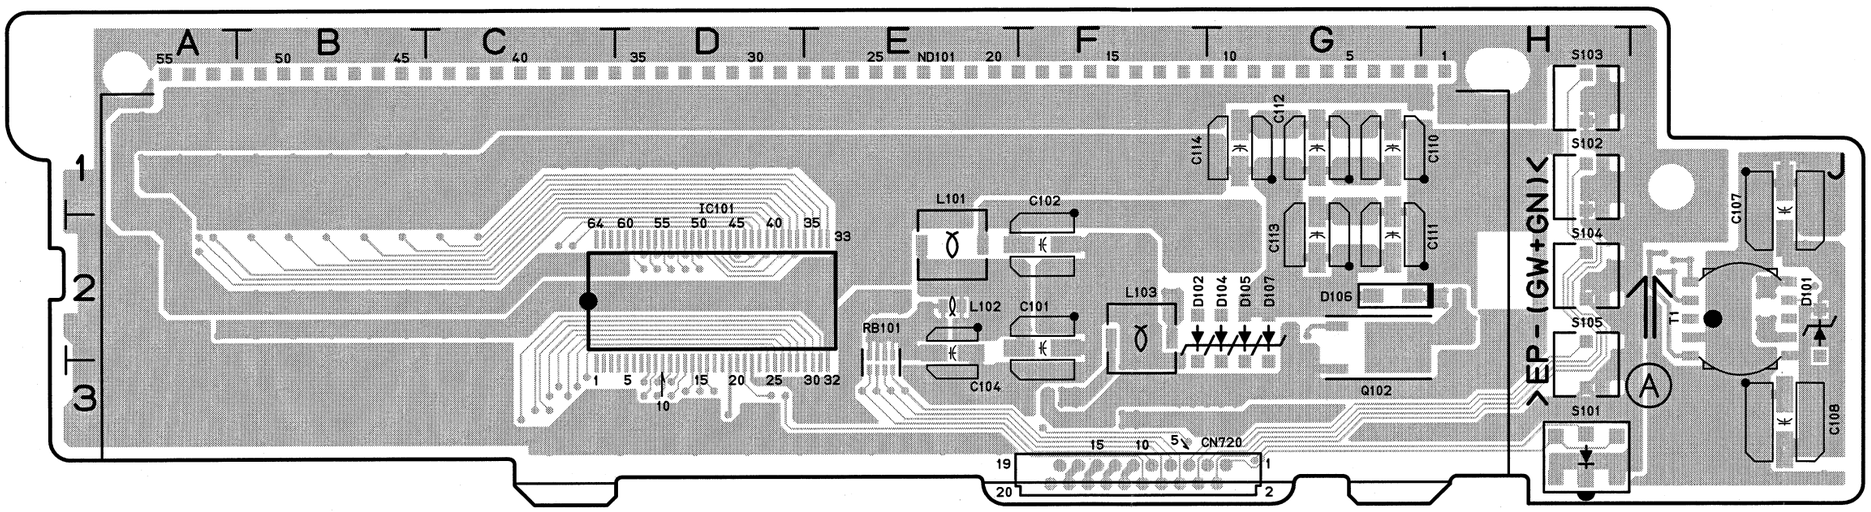

DY-15 -A SIDE-
SUFFIX: -11

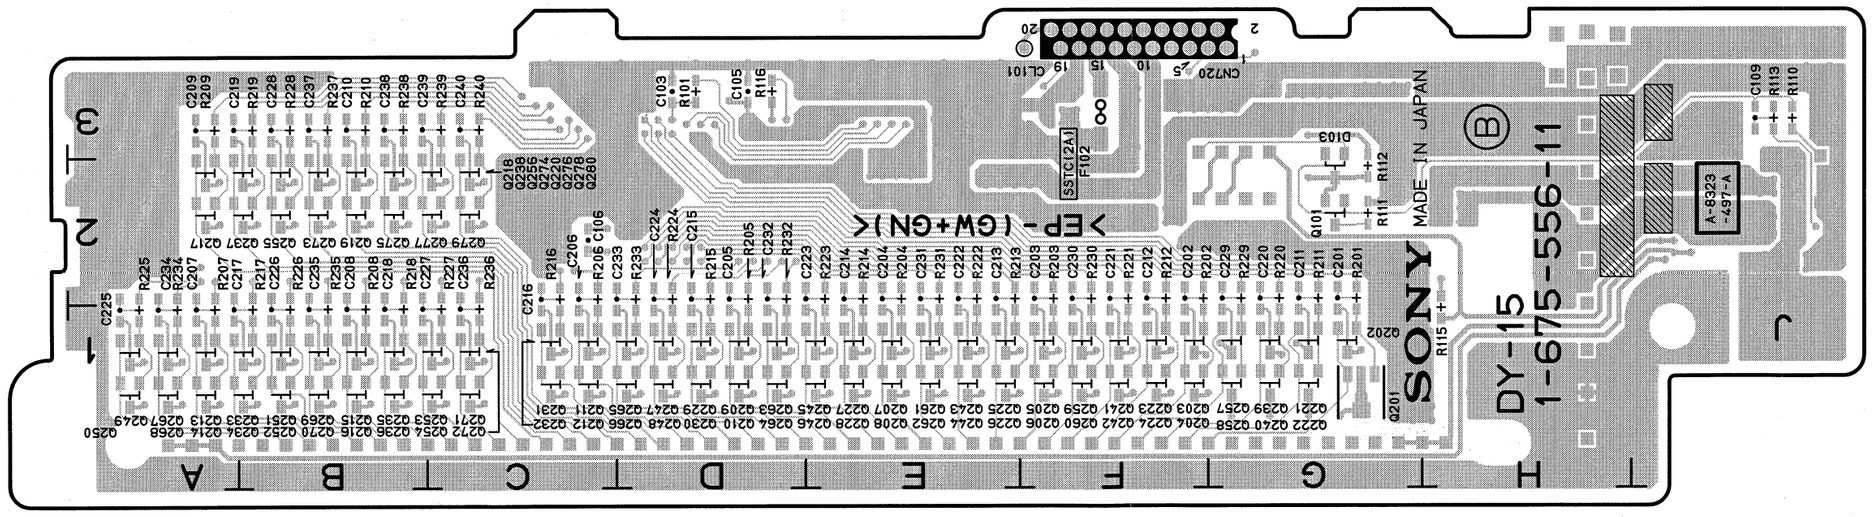

DY-15 -B SIDE-
SUFFIX: -11

DY-15 (1-675-556-11)

C101	F2	Q214	*A1	R218	*B1
C102	F2	Q215	*B1	R219	*B3
C103	*D3	Q216	*B1	R220	*G2
C104	E2	Q217	*A2	R221	*F2
C105	*D3	Q218	*A2	R222	*E2
C106	*C2	Q219	*B2	R223	*E2
C107	J1	Q220	*B2	R224	*D2
C108	J3	Q221	*G1	R225	*A1
C109	*J3	Q222	*G1	R226	*B1
C110	G1	Q223	*F1	R227	*C1
C111	G2	Q224	*F1	R228	*B3
C112	G1	Q225	*E1	R229	*G2
C113	G2	Q226	*E1	R230	*F2
C114	G1	Q227	*E1	R231	*E2
C201	*G2	Q228	*E1	R232	*D2
C202	*F2	Q229	*D1	R233	*D2
C203	*F2	Q230	*D1	R234	*A1
C204	*E2	Q231	*C1	R235	*B1
C205	*D2	Q232	*C1	R236	*C1
C206	*C2	Q233	*B1	R237	*B3
C207	*A1	Q234	*B1	R238	*B3
C208	*B1	Q235	*B1	R239	*C3
C209	*A3	Q236	*B1	R240	*C3
C210	*B3	Q237	*B2		
C211	*G2	Q238	*B2	RB101	E3
C212	*F2	Q239	*G1		
C213	*E2	Q240	*G1	S101	H3
C214	*E2	Q241	*F1	S102	H1
C215	*D2	Q242	*F1	S103	H1
C216	*C2	Q243	*E1	S104	H2
C217	*A1	Q244	*E1	S105	H3
C218	*B1	Q245	*E1		
C219	*A3	Q246	*E1	T1	J2
C220	*G2	Q247	*D1		
C221	*F2	Q248	*D1	*:B SIDE	
C222	*E2	Q249	*A1		
C223	*D2	Q250	*A1		
C224	*D2	Q251	*B1		
C225	*A1	Q252	*B1		
C226	*B1	Q253	*C1		
C227	*B1	Q254	*C1		
C228	*B3	Q255	*B2		
C229	*G2	Q256	*B2		
C230	*F2	Q257	*G1		
C231	*E2	Q258	*G1		
C232	*D2	Q259	*F1		
C233	*C2	Q260	*F1		
C234	*A1	Q261	*E1		
C235	*B1	Q262	*E1		
C236	*C1	Q263	*D1		
C237	*B3	Q264	*D1		
C238	*B3	Q265	*D1		
C239	*B3	Q266	*D1		
C240	*C3	Q267	*A1		
		Q268	*A1		
CL101	*F3	Q269	*B1		
		Q270	*B1		
CN720	F3	Q271	*C1		
		Q272	*C1		
D101	J2	Q273	*B2		
D102	F2	Q274	*B2		
D103	*G2	Q275	*B2		
D104	G2	Q276	*B2		
D105	G2	Q277	*C2		
D106	G2	Q278	*C2		
D107	G2	Q279	*C2		
		Q280	*C2		
F102	*F3				
		R101	*D3		
IC101	C3	R110	*J3		
		R111	*G2		
L101	E2	R112	*G2		
L102	E2	R113	*J3		
L103	F2	R115	*H1		
		R116	*D3		
ND101	E1	R201	*G2		
		R202	*F2		
Q101	*G2	R203	*F2		
Q102	G2	R204	*E2		
Q201	*G1	R205	*D2		
Q202	*G1	R206	*C2		
Q203	*F1	R207	*A1		
Q204	*F1	R208	*B1		
Q205	*F1	R209	*A3		
Q206	*F1	R210	*B3		
Q207	*E1	R211	*G2		
Q208	*E1	R212	*F2		
Q209	*D1	R213	*E2		
Q210	*D1	R214	*E2		
Q211	*C1	R215	*D2		
Q212	*C1	R216	*C2		
Q213	*A1	R217	*B1		

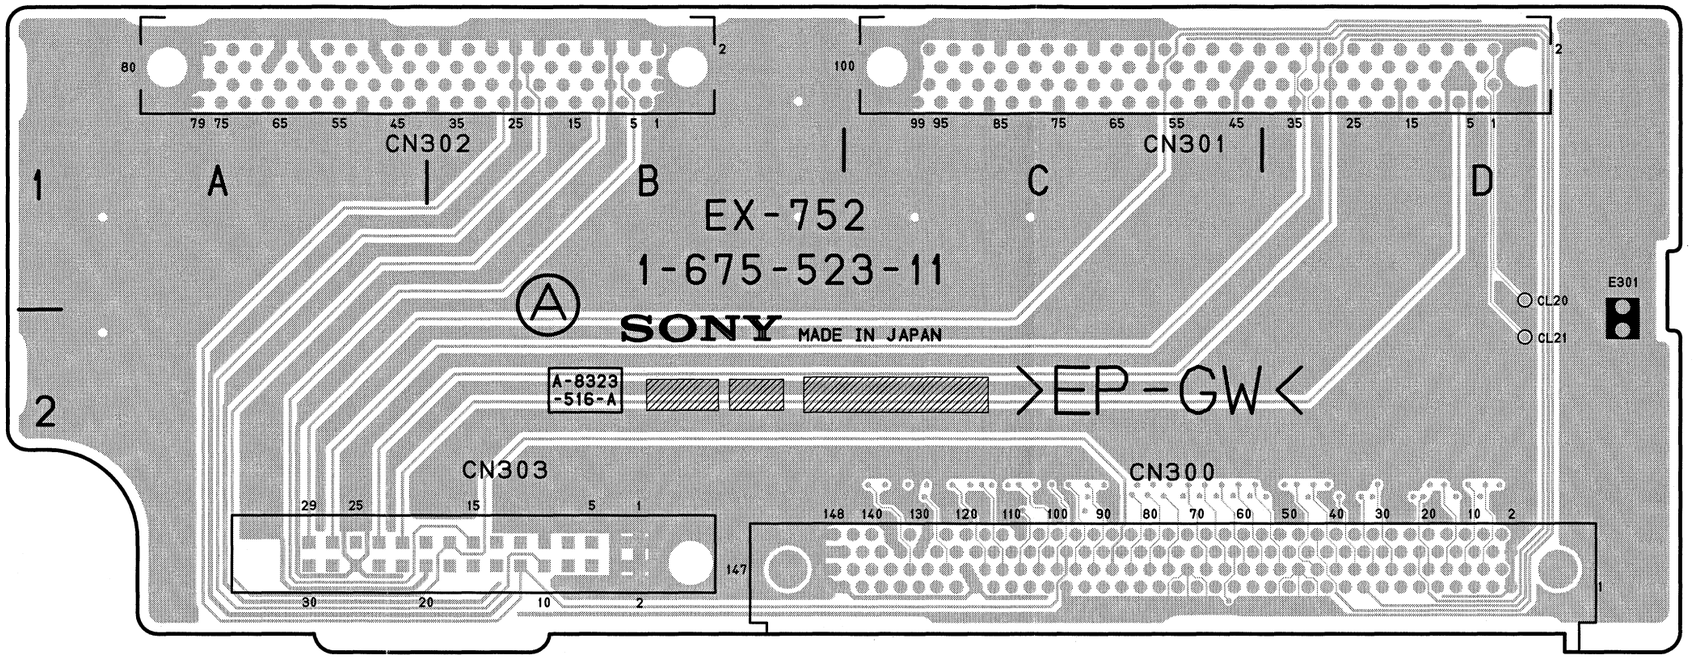

EX-752 (1-675-523-11)

CL20	D1
CL21	D2
CN300	C2
CN301	C1
CN302	A1
CN303	B2
E301	D2

EX-752 -A SIDE-
SUFFIX: -11

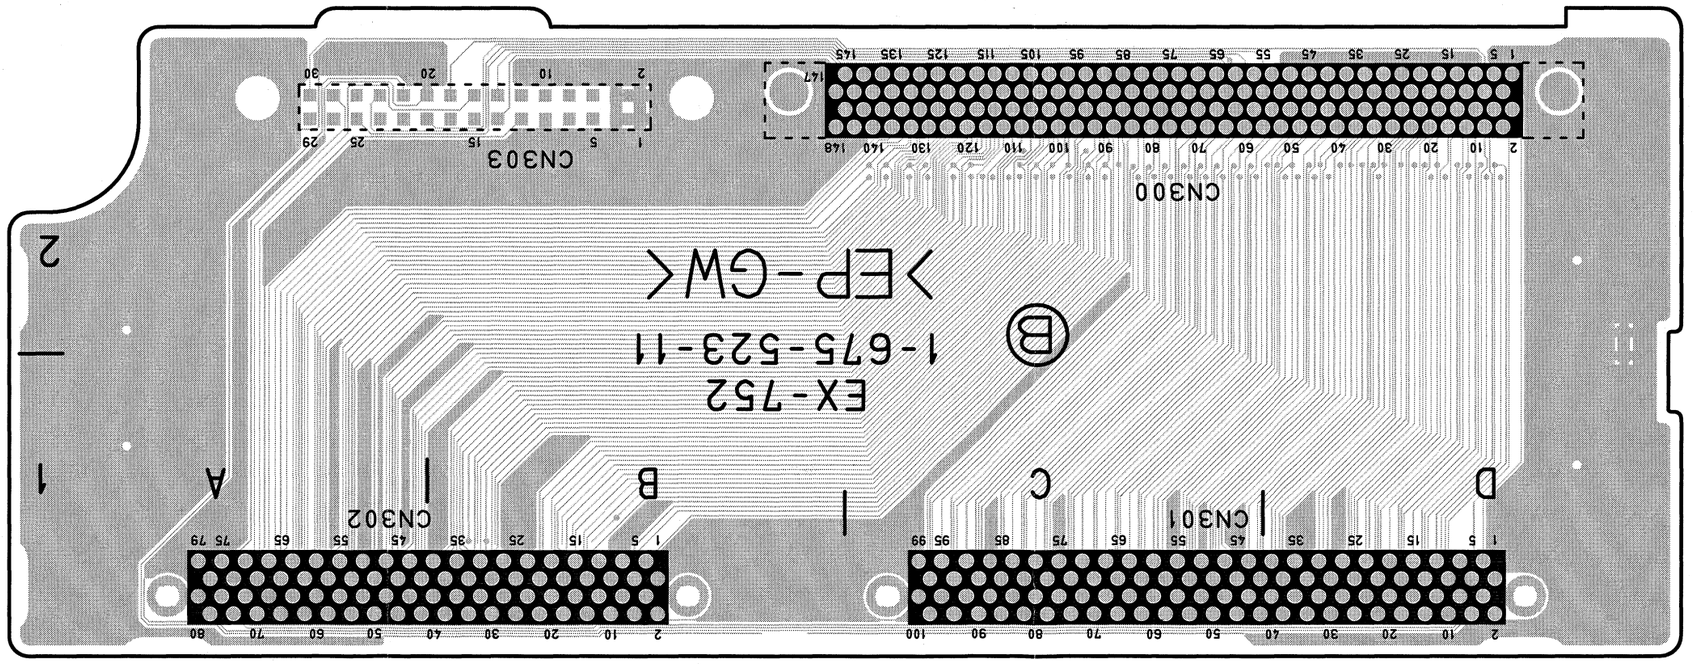

EX-752 -B SIDE-
SUFFIX: -11

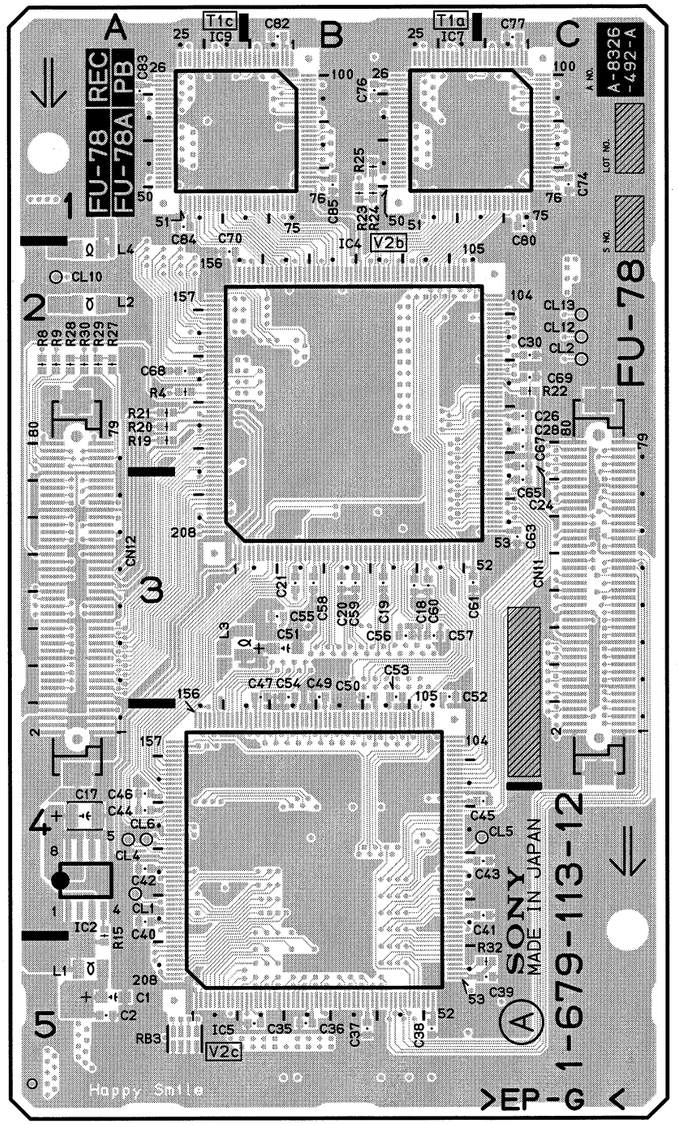

FU-78P/78R -A SIDE-
SUFFIX: -12

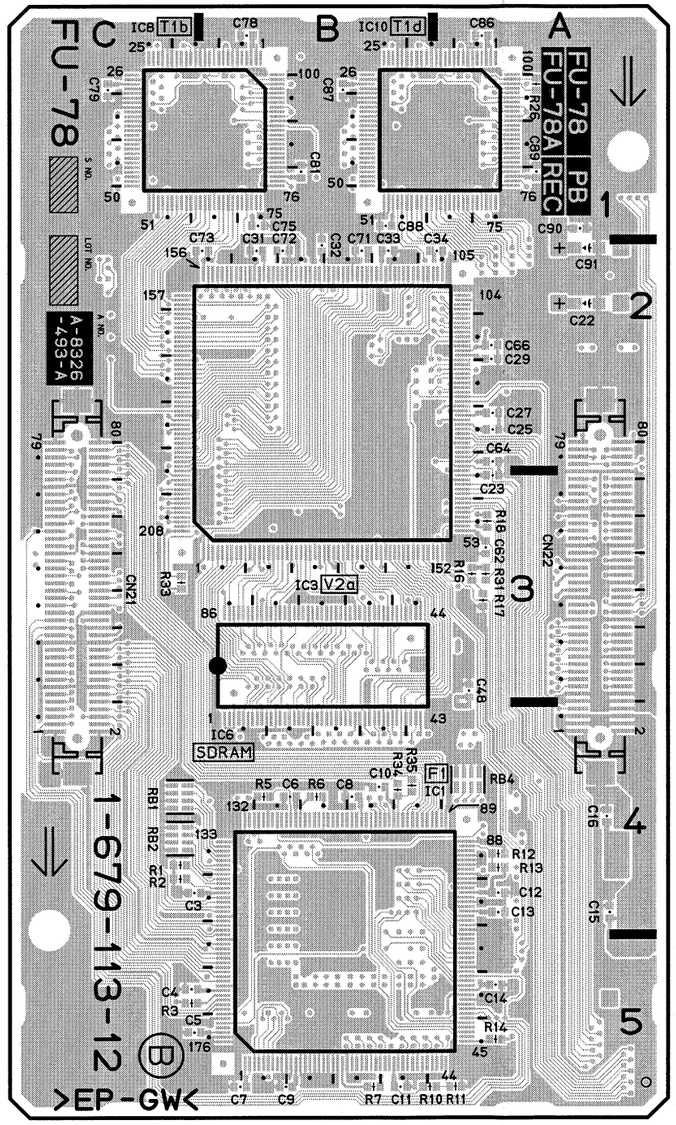

FU-78P/78R -B SIDE-
SUFFIX: -12

FU-78P/78R (1-679-113-12)

C1	A5	CL1	A4
C2	A5	CL2	C2
C3	*C4	CL4	A4
C4	*C5	CL5	C4
C5	*C5	CL6	A4
C6	*B4	CL10	A2
C7	*B5	CL12	C2
C8	*B4	CL13	C2
C9	*B5		
C10	*B4	CN11	C3
C11	*B5	CN12	A3
C12	*A4	CN21	*C3
C13	*A4	CN22	*A3
C14	*A5		
C15	*A4	IC1	*B5
C16	*A4	IC2	A4
C17	A4	IC3	*B2
C18	B3	IC4	B2
C19	B3	IC5	B4
C20	B3	IC6	*B4
C21	B3	IC7	B1
C22	*A2	IC8	*B1
C23	*A3	IC9	A1
C24	C2	IC10	*A1
C25	*A2		
C26	C2	L1	A5
C27	*A2	L2	A2
C28	C2	L3	A3
C29	*A2	L4	A2
C30	C2		
C31	*B2	R1	*C4
C32	*B2	R2	*C4
C33	*B2	R3	*C5
C34	*A2	R4	A2
C35	B5	R5	*B4
C36	B5	R6	*B4
C37	B5	R7	*B5
C38	B5	R8	A2
C39	C5	R9	A2
C40	A4	R10	*B5
C41	C4	R11	*A5
C42	A4	R12	*A4
C43	C4	R13	*A4
C44	A4	R14	*A5
C45	C4	R15	A4
C46	A4	R16	*A3
C47	B3	R17	*A3
C48	*A3	R18	*A3
C49	B3	R19	A2
C50	B3	R20	A2
C51	B3	R21	A2
C52	B3	R22	C2
C53	B3	R23	B1
C54	B3	R24	B1
C55	B3	R25	B1
C56	B3	R26	*A1
C57	B3	R27	A2
C58	B3	R28	A2
C59	B3	R29	A2
C60	B3	R30	A2
C61	B3	R31	*A3
C62	*A3	R32	C5
C63	C3	R33	*C3
C64	*A2	R34	*B4
C65	C3	R35	*B4
C66	*A2		
C67	C2	RB1	*C4
C68	A2	RB2	*C4
C69	C2	RB3	A5
C70	A2	RB4	*A4
C71	*B2		
C72	*B2	*:B SIDE	
C73	*B2		
C74	C1		
C75	*B1		
C76	B1		
C77	C1		
C78	*B1		
C79	*C1		
C80	C1		
C81	*B1		
C82	B1		
C83	A1		
C84	A1		
C85	B1		
C86	*A1		
C87	*B1		
C88	*B1		
C89	*A1		
C90	*A1		
C91	*A2		

HP-99 (1-675-555-12)

C1	*B1	R1	*B2
C2	*B1	R2	*B1
C4	B2	R5	*B2
C5	B2	R6	*B1
C6	*A1	R7	*B1
C7	*A1	R8	B2
C8	A2	R9	B2
C9	A1	R10	*A1
C10	*A1	R11	*A1
C11	*A1	R12	*B1
C12	*A1	R13	*A1
C13	B1	R14	*A1
C14	B1	R15	*A1
C15	B1	R16	*A1
C16	B2	R17	*B1
C17	B2	R18	*B1
C18	*B2	R19	*A1
CN1	A1	RV1	B2
CN2	B1	S1	C2
IC1	B1	*:B SIDE	
Q1	*B1		
Q2	*B1		
Q5	*A1		
Q6	*A2		
Q8	*B1		
Q9	*B1		
Q10	*B1		
Q11	*B1		

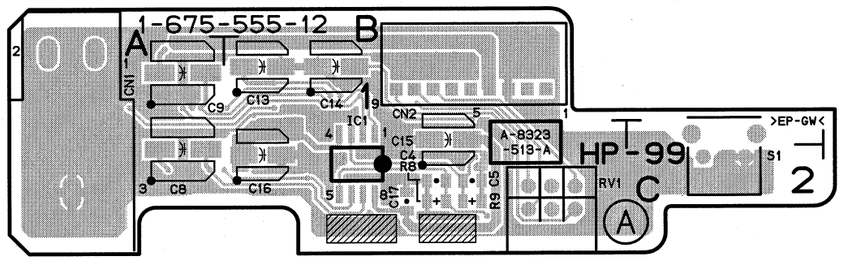

HP-99 -A SIDE-
SUFFIX: -12

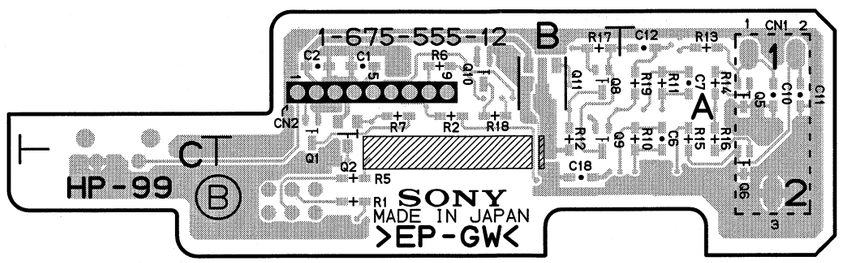

HP-99 -B SIDE-
SUFFIX: -12

HP-99 (1-675-555-11)

C1	*B1	R1	*B2
C2	*B1	R2	*B1
C4	B2	R5	*B2
C5	B2	R6	*B1
C6	*A1	R7	*B1
C7	*A1	R8	B2
C8	A2	R9	B2
C9	A1	R10	*A1
C10	*A1	R11	*A1
C11	*A1	R12	*B1
C12	*A1	R13	*A1
C13	B1	R14	*A1
C14	B1	R15	*A1
C15	B1	R16	*A1
C16	B2	R17	*B1
C17	B2	R18	*B1
C18	*B2	R19	*A1
CN1	A1	RV1	B2
CN2	B1	S1	C2
IC1	B1	*:B SIDE	
Q1	*B1		
Q2	*B1		
Q5	*A1		
Q6	*A2		
Q8	*B1		
Q9	*B1		
Q10	*B1		
Q11	*B1		

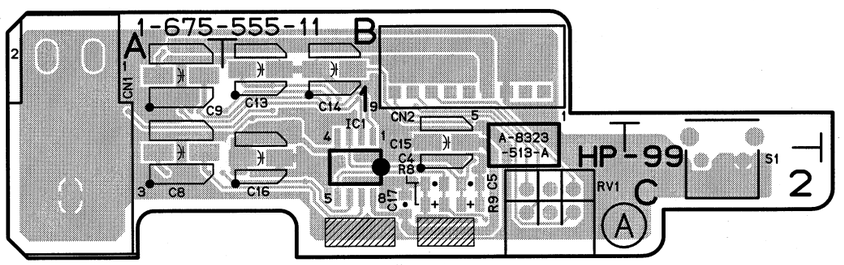

HP-99 -A SIDE-
SUFFIX: -11

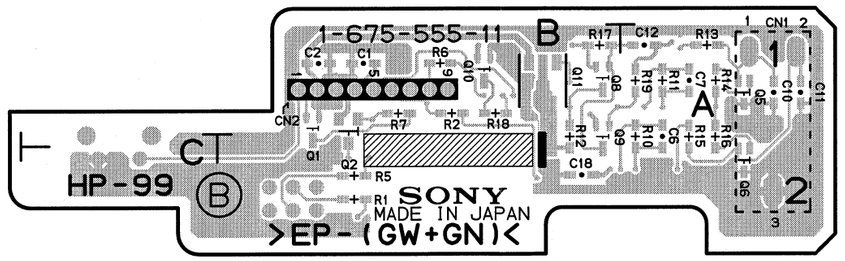

HP-99 -B SIDE-
SUFFIX: -11

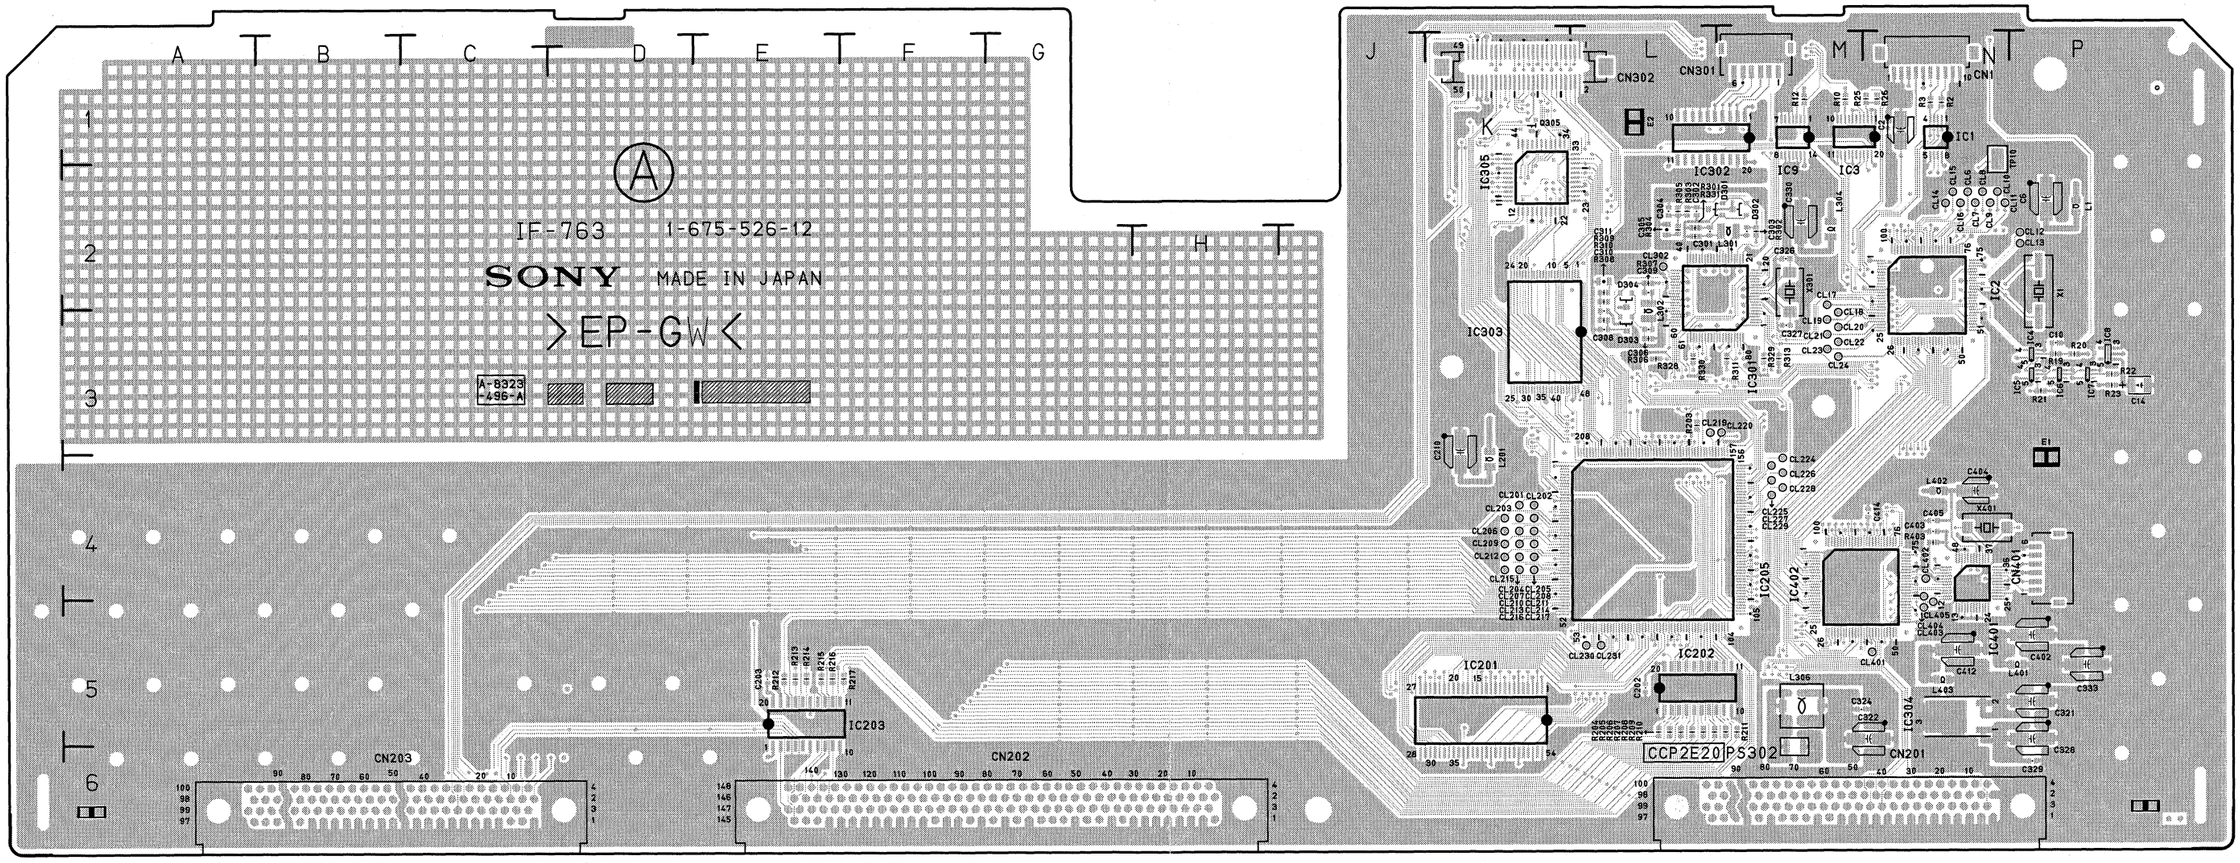

IF-763 -A SIDE-
SUFFIX: -12
FOR DSBK-190

IF-763 (1-675-526-12)

C1	*N1	C207	*L4	C317	*M2	C403	N4	CL13	P2	CL210	K4	CL403	N5	IC1	N1	L1	P2	R5	*N2	R206	L5	R302	M2	R325	*K1	R417	*N4
C2	N1	C208	*L5	C318	*L2	C404	N4	CL14	N2	CL211	K4	CL404	N5	IC2	N2	L201	K4	R6	*N2	R207	L5	R303	L2	R328	L3	R418	*N5
C3	*N1	C209	*M5	C319	*L2	C405	N4	CL15	N2	CL212	K4	CL405	N5	IC3	N1	L301	M2	R8	*N2	R208	L5	R304	L2	R329	M3		
C4	*N1	C210	K4	C320	*L3	C406	*N4	CL16	N2	CL213	K4			IC4	P3	L302	L3	R10	M1	R209	L5	R305	L2	R330	L3	RB1	*N1
C5	*N3	C211	*M4	C321	P5	C407	*N4	CL17	M3	CL214	K4	CN1	N1	IC5	P3	L304	M2	R11	*N2	R210	M5	R306	L3	R331	L2	RB2	*N2
C6	P2	C301	L2	C322	N5	C408	*N4	CL18	M3	CL215	K4	CN201	M6	IC6	P3	L306	M5	R12	M1	R211	M5	R307	L2	R401	*N4		
C7	*P2	C302	L2	C323	*P5	C409	*P4	CL19	M3	CL216	K4	CN202	G6	IC7	P3	L401	P5	R13	*N2	R212	E5	R308	L3	R402	*N4	TP10	N2
C8	*P2	C303	M2	C324	M5	C410	*P5	CL20	M3	CL217	K4	CN203	B6	IC8	P3	L402	N4	R14	*N2	R213	E5	R309	L2	R403	N4		
C9	*P3	C304	L2	C325	*K2	C411	*M5	CL21	M3	CL219	L3	CN301	M1	IC9	M1	L403	N5	R17	*N2	R214	E5	R310	L2	R404	*N4	X1	P2
C10	P3	C305	L2	C326	M2	C412	N5	CL22	M3	CL220	M3	CN302	K1	IC201	K5			R18	*N2	R215	E5	R311	M3	R405	*N4	X301	M2
C11	*P3	C306	L3	C327	M3	C413	*M5	CL23	M3	CL224	M4	CN401	P4	IC202	L5	PS302	M6	R19	P3	R216	E5	R313	M3	R406	*N4	X401	N4
C12	*P3	C307	*K3	C328	P5	C414	N4	CL24	M3	CL225	M4			IC203	E6			R20	P3	R217	F5	R314	*K1	R407	*P4		
C13	*P3	C308	L3	C329	P6	C415	*N4	CL201	K4	CL226	M4	D1	*N1	IC204	*D6	Q301	*L1	R21	P3	R218	*D5	R316	*M1	R408	*P4	*:B SIDE	
C14	P3	C309	L2	C330	M2			CL202	K4	CL227	M4	D2	*N2	IC205	L4	Q302	*L1	R22	P3	R219	*C5	R317	*M1	R409	*P4		
C15	*M1	C310	L3	C331	*L2	CL6	N2	CL203	K4	CL228	M4	D301	L2	IC301	L2	Q304	*L1	R23	P3	R220	*C5	R318	*M1	R410	*P4		
C201	*K5	C311	L2	C332	*K1	CL7	N2	CL204	K4	CL229	M4	D302	M2	IC302	M1	Q305	K1	R25	N1	R221	*C5	R319	*L1	R411	*P4		
C202	L5	C312	*M1	C333	P5	CL8	N2	CL205	K4	CL230	L5	D303	L3	IC303	L2			R26	N1	R222	*C5	R320	*L1	R412	*P4		
C203	E5	C313	*M1	C334	*M6	CL9	N2	CL206	K4	CL231	L5	D304	L2	IC304	N5	R1	*N1	R201	*L5	R223	*C5	R321	*K1	R413	*M5		
C204	*D5	C314	*M1	C335	*P5	CL10	N2	CL207	K4	CL302	L2			IC305	K2	R2	N1	R203	L3	R224	*C5	R322	*L2	R414	*N5		
C205	*K6	C315	*L1	C401	*N4	CL11	N2	CL208	K4	CL401	N5	E1	P4	IC401	N4	R3	N1	R204	L5	R225	*C5	R323	*K1	R415	*N5		
C206	*K4	C316	*M1	C402	P5	CL12	P2	CL209	K4	CL402	N4	E2	L1	IC402	M4	R4	*N2	R205	L5	R301	L2	R324	*K1	R416	*N5		

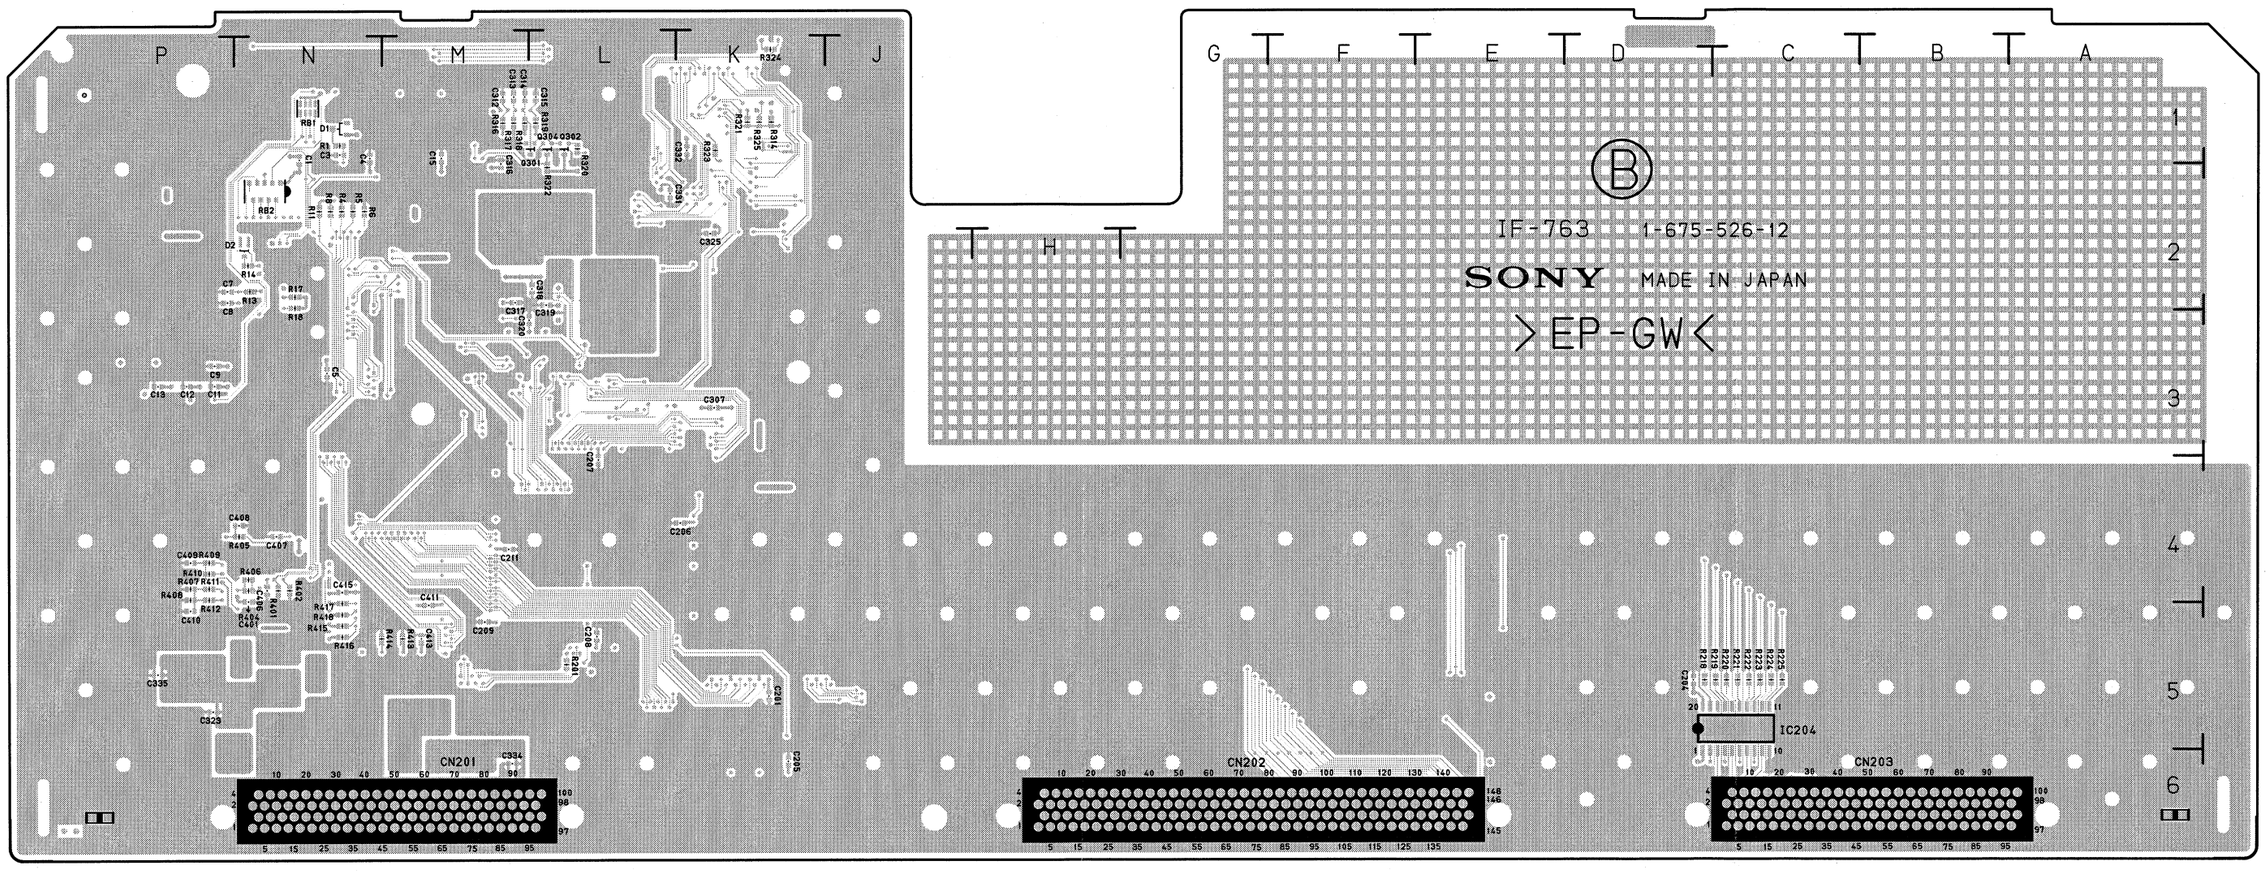

IF-763 -B SIDE-
SUFFIX: -12
FOR DSBK-190

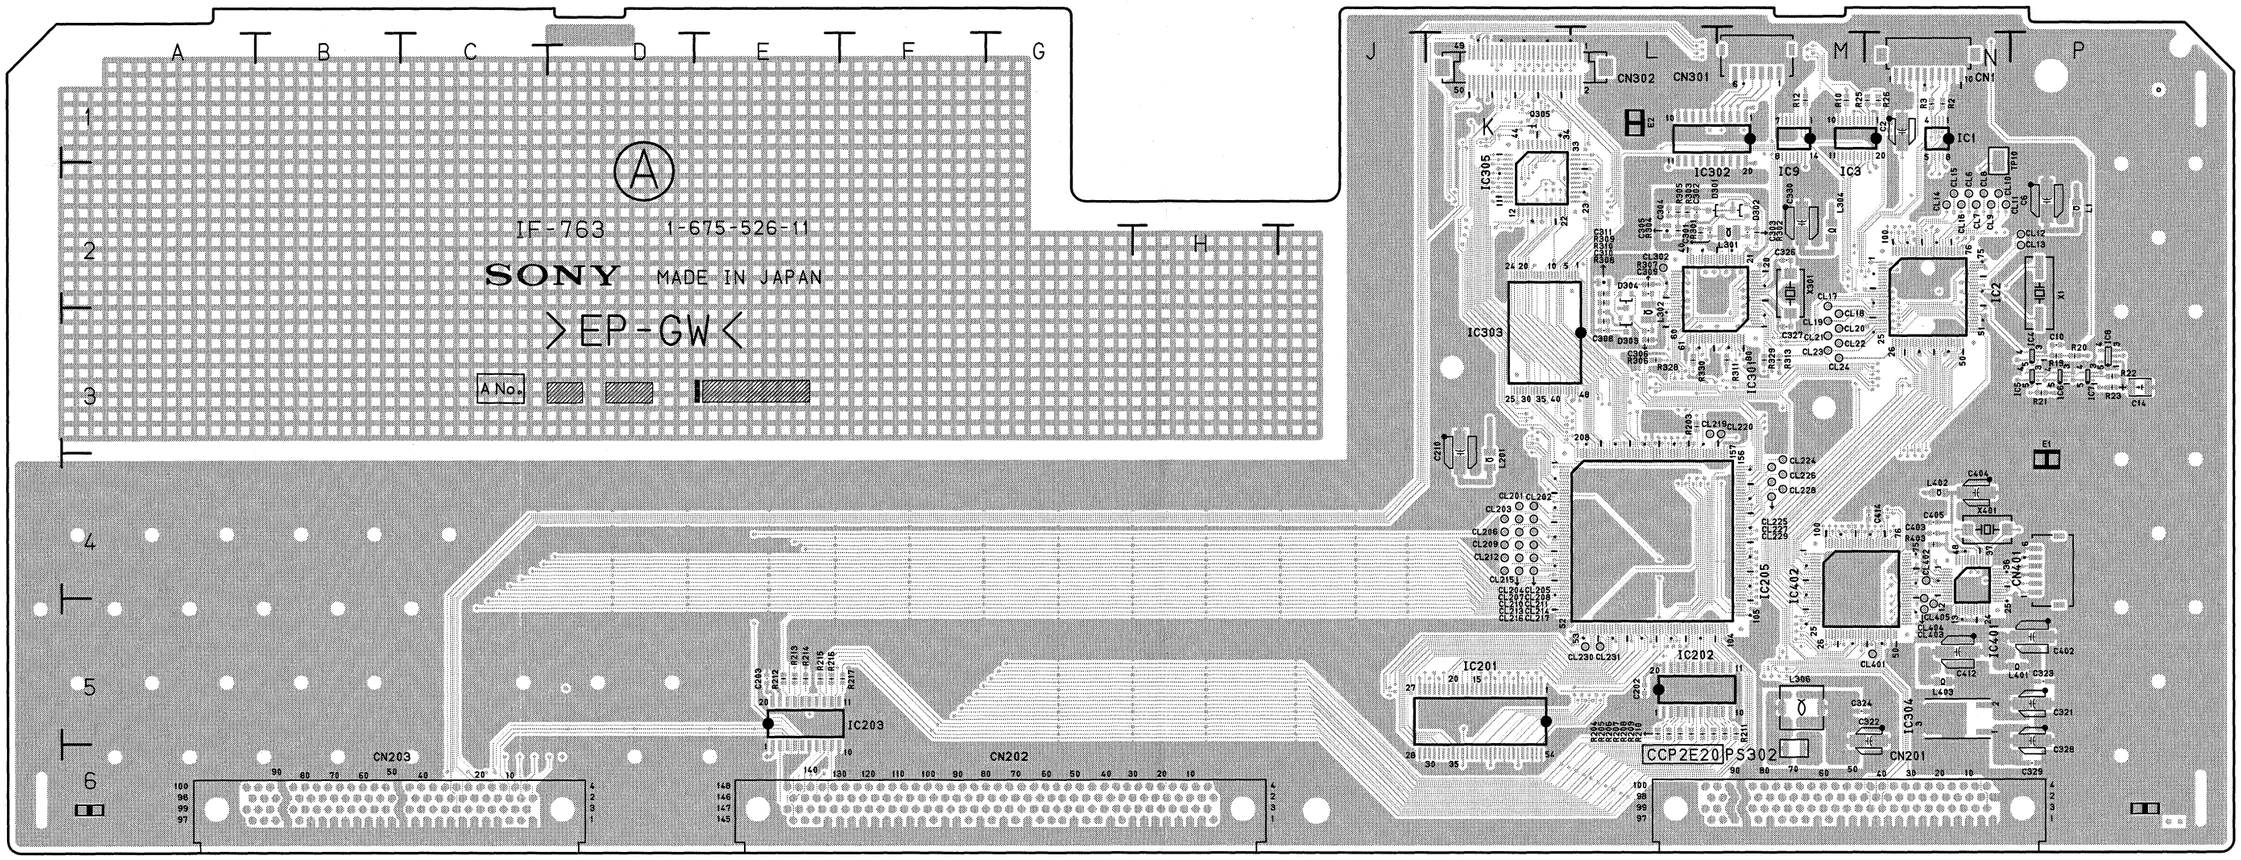

IF-763 -A SIDE-

SUFFIX: -11

FOR DSBK-190

IF-763 (1-675-526-11)

C1	*N1	C207	*L4	C317	*M2	C406	*N4	CL16	N2	CL213	K4	CN1	N1	IC4	P3	L301	M2	R8	*N2	R208	L5	R304	L2	R325	*K1	R418	*N5
C2	N1	C208	*L5	C318	*L2	C407	*N4	CL17	M3	CL214	K4	CN201	M6	IC5	P3	L302	L3	R10	M1	R209	L5	R305	L2	R328	L3		
C3	*N1	C209	*M5	C319	*L2	C408	*N4	CL18	M3	CL215	K4	CN202	G6	IC6	P3	L304	M2	R11	*N2	R210	M5	R306	L3	R329	M3	RB1	*N1
C4	*N1	C210	K4	C320	*L3	C409	*P4	CL19	M3	CL216	K4	CN203	B6	IC7	P3	L306	M5	R12	M1	R211	M5	R307	L2	R330	L3	RB2	*N2
C5	*N3	C211	*M4	C321	P5	C410	*P5	CL20	M3	CL217	K4	CN301	M1	IC8	P3	L401	P5	R13	*N2	R212	E5	R308	L3	R401	*N4		
C6	P2	C301	L2	C322	N5	C411	*M5	CL21	M3	CL219	L3	CN302	K1	IC9	M1	L402	N4	R14	*N2	R213	E5	R309	L2	R402	*N4	TP10	N2
C7	*P2	C302	L2	C323	P5	C412	N5	CL22	M3	CL220	M3	CN401	P4	IC201	K5	L403	N5	R17	*N2	R214	E5	R310	L2	R403	N4		
C8	*P2	C303	M2	C324	M5	C413	*M5	CL23	M3	CL224	M4			IC202	L5			R18	*N2	R215	E5	R311	M3	R404	*N4	X1	P2
C9	*P3	C304	L2	C325	*K2	C414	N4	CL24	M3	CL225	M4	D1	*N1	IC203	E6	PS302	M6	R19	P3	R216	E5	R312	*L2	R405	*N4	X301	M2
C10	P3	C305	L2	C326	M2	C415	*N4	CL201	K4	CL226	M4	D2	*N2	IC204	*D6			R20	P3	R217	F5	R313	M3	R406	*N4	X401	N4
C11	*P3	C306	L3	C327	M3			CL202	K4	CL227	M4	D301	L2	IC205	L4	Q301	*L1	R21	P3	R218	*D5	R314	*K1	R407	*P4		
C12	*P3	C307	*K3	C328	P5	CL6	N2	CL203	K4	CL228	M4	D302	M2	IC301	L2	Q302	*L1	R22	P3	R219	*C5	R315	*L2	R408	*P4	*:B SIDE	
C13	*P3	C308	L3	C329	P6	CL7	N2	CL204	K4	CL229	M4	D303	L3	IC302	M1	Q304	*L1	R23	P3	R220	*C5	R316	*M1	R409	*P4		
C14	P3	C309	L2	C330	M2	CL8	N2	CL205	K4	CL230	L5	D304	L2	IC303	L2	Q305	K1	R25	N1	R221	*C5	R317	*M1	R410	*P4		
C15	*M1	C310	L3	C331	*L2	CL9	N2	CL206	K4	CL231	L5			IC304	N5			R26	N1	R222	*C5	R318	*M1	R411	*P4		
C201	*K5	C311	L2	C332	*K1	CL10	N2	CL207	K4	CL302	L2	E1	P4	IC305	K2	R1	*N1	R201	*L5	R223	*C5	R319	*L1	R412	*P4		
C202	L5	C312	*M1	C401	*N4	CL11	N2	CL208	K4	CL401	N5	E2	L1	IC401	N4	R2	N1	R203	L3	R224	*C5	R320	*L1	R413	*M5		
C203	E5	C313	*M1	C402	P5	CL12	P2	CL209	K4	CL402	N4			IC402	M4	R3	N1	R204	L5	R225	*C5	R321	*K1	R414	*N5		
C204	*D5	C314	*M1	C403	N4	CL13	P2	CL210	K4	CL403	N5	IC1	N1			R4	*N2	R205	L5	R301	L2	R322	*L2	R415	*N5		
C205	*K6	C315	*L1	C404	N4	CL14	N2	CL211	K4	CL404	N5	IC2	N2	L1	P2	R5	*N2	R206	L5	R302	M2	R323	*K1	R416	*N5		
C206	*K4	C316	*M1	C405	N4	CL15	N2	CL212	K4	CL405	N5	IC3	N1	L201	K4	R6	*N2	R207	L5	R303	L2	R324	*K1	R417	*N4		

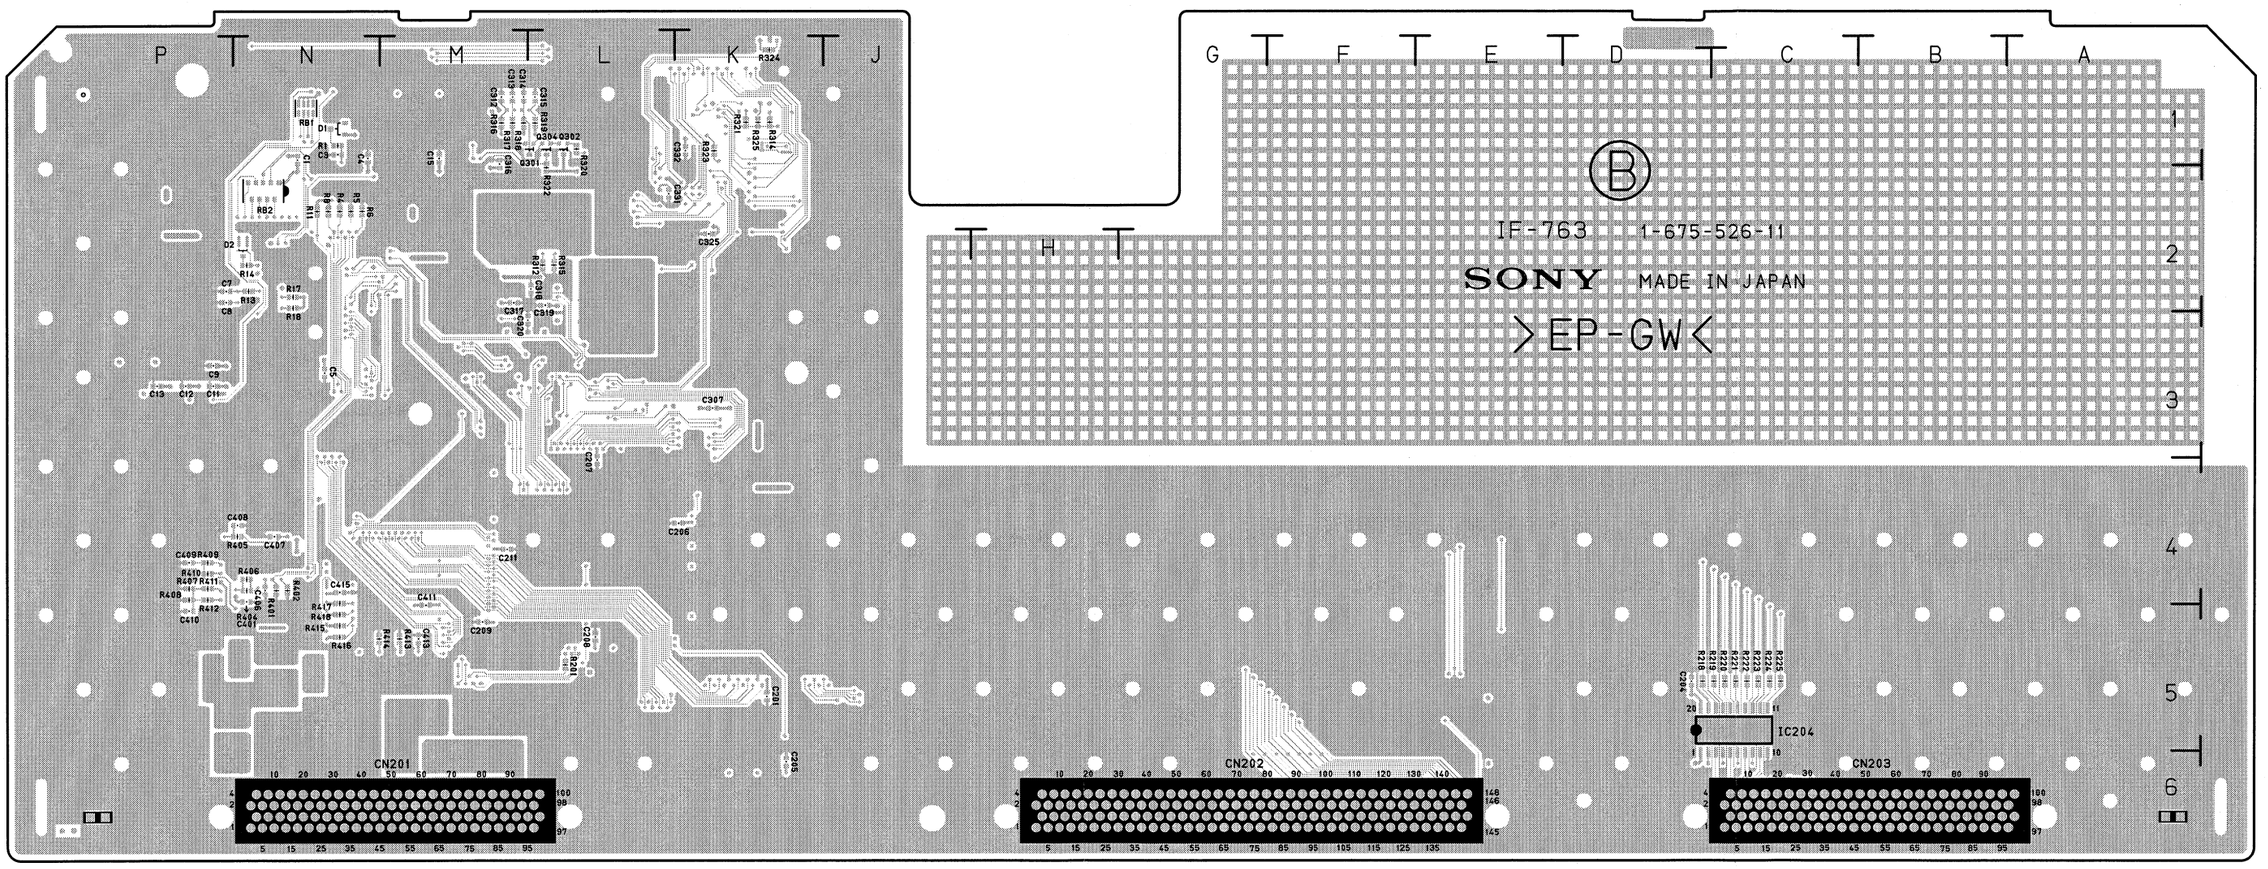

IF-763 -B SIDE-
SUFFIX: -11
FOR DSBK-190

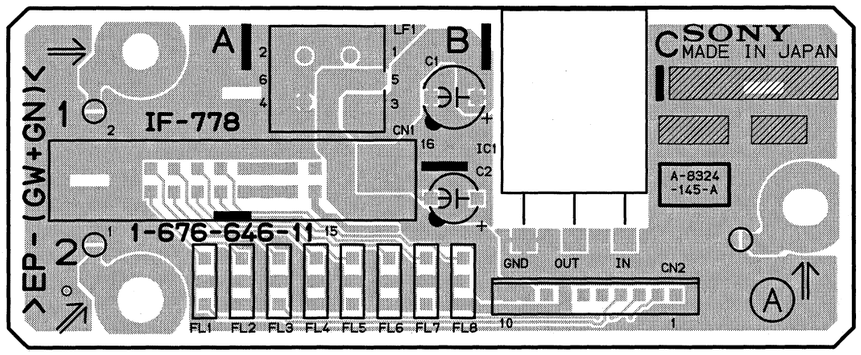

IF-778 -A SIDE-
SUFFIX: -11
FOR DSBK-200

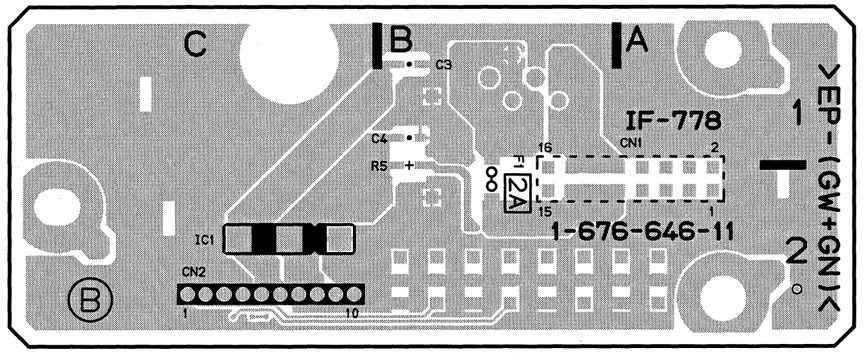

IF-778 -B SIDE-
SUFFIX: -11
FOR DSBK-200

IF-778 (1-676-646-11)

C1	B1
C2	B2
C3	*B1
C4	*B1
CN1	A2
CN2	C2
F1	*B2
FL1	A2
FL2	A2
FL3	B2
FL4	B2
FL5	B2
FL6	B2
FL7	B2
FL8	B2
IC1	C2
LF1	B1
R5	*B1
SL1	A1
SL2	A2
SL3	C2

*:B SIDE

KY-452/452A (1-675-552-13,14)

C2	*C1	C521	*H1	F1	E1	Q369	*H2	Q555	*H1	R332	*A2	R427	*H3	RB4	E4
C3	C1	C522	*H1			Q370	*C3	Q556	*H1	R333	*B4	R428	*H3	RB14	*G2
C7	*H3	C523	*H1	IC1	H3	Q371	F3	Q557	*H1	R334	*D4	R429	*H3	RB15	G2
C8	*H3	C524	*H1	IC2	G4	Q372	*H4	Q558	*H1	R335	F3	R430	*H3	RB16	H1
C9	*H3	C525	*H1	IC3	*G3	Q373	*C2	Q559	*H1	R336	F3	R431	*H3	RB17	H1
C10	*H3	C526	*H1	IC5	G3	Q374	*H2	Q560	*H1	R337	*G4	R432	*H3	RB18	*G3
C11	*H3	C527	*H1	IC6	H3	Q375	*C3	Q561	*H1	R338	*G3	R433	*H3	RB201	*G3
C12	*G3	C528	*H1	IC201	E3	Q376	F3	Q562	*H1	R339	*A3	R434	*H3	RB301	*E2
C15	*G3	C529	*H1	IC301	E2	Q377	*E3	Q563	H2	R340	*B4	R435	*H3		
C16	*G3	C530	*H1			Q379	*E2	Q564	H2	R341	*D4	R436	*D1	S1	E4
C17	H3	C531	*H1	L1	E1	Q380	*H2	Q565	H2	R342	*G4	R437	*D1	S2	F3
C18	*H3	C532	H2	L4	F2	Q381	*D3	Q566	H2	R343	*F2	R438	*C1	S3	A3
C19	*H3	C533	H2			Q382	*E3	Q567	H2	R344	*B2	R439	*D1	S4	F3
C20	*H3	C534	H2	ND501	H2	Q384	*E1	Q568	H2	R345	*B4	R440	*D1	S5	D4
C21	*H3	C535	H2			Q385	*H2	Q569	H2	R346	*D3	R441	*D1	S6	G4
C22	F2	C536	H3	PS2	F2	Q386	*D3	Q570	H2	R347	*G4	R442	*D1	S7	G3
C23	G2	C537	*F1			Q387	*H3	Q571	H3	R348	*F2	R443	*D1	S8	A2
C24	*F1	C538	*F1	Q201	*E3	Q388	*H3	Q572	H3	R349	*B2	R444	*D1	S9	B4
C25	*F1	C539	*F2	Q202	*E3	Q389	*H3	Q573	*F1	R350	*B4	R445	*E1	S10	D4
C26	*A4	C540	*F2	Q203	*E3	Q390	*D1	Q574	*F1	R351	*D2	R446	*E1	S11	G4
C27	*A3	C541	*F2	Q204	*E3	Q391	*D1	Q575	*F1	R352	F3	R447	*E1	S12	F2
C28	*C1	C542	*F2	Q205	*E3	Q392	*D1	Q576	*F1	R353	F3	R448	*C1	S13	B2
C29	*E1	C543	*F2	Q206	*E3	Q393	*E1	Q577	*F2	R354	*G4	R449	*C1	S14	B4
C30	*H1	C544	*F2	Q207	*E3	Q394	*C1	Q578	*F2	R355	*F2	R450	*D2	S15	D3
C31	*H1	C545	*F2	Q301	E3	Q395	*D1	Q579	*F2	R356	*A3	R451	*D1	S16	F4
C201	E3	C546	*G2	Q302	F3	Q396	*D1	Q580	*F2	R357	*B4	R452	*D1	S17	E2
C301	E4	C547	*G2	Q303	*E4	Q397	*D1	Q581	*F2	R358	*D2	R453	*D1	S18	B2
C302	F2	C548	*G2	Q304	*F3	Q398	*H3	Q582	*F2	R359	*F4	R454	*D1	S19	C4
C303	A3	C549	*F1	Q305	*A3	Q399	*H3	Q583	*F2	R360	*E2	R455	*D1	S20	D3
C304	F2	C550	*F1	Q306	*F3	Q400	*H3	Q584	*F2	R361	*B2	R456	*D1	S25	D2
C305	D4	C551	E3	Q307	*D4	Q401	*D1	Q585	*F2	R362	*C4	R457	*D1	S26	D2
C306	H4	C552	*D2	Q308	F3	Q402	*D1	Q586	*F2	R363	*D3	R458	*D1	S27	G2
C307	G2	C553	D2	Q309	*E4	Q403	*D1	Q587	*F2	R364	*F4	R459	*D1	S28	G2
C308	A3	C554	F2	Q310	*F3	Q404	*E1	Q588	*F2	R365	*E2	R501	*G1	S29	G2
C309	A4	C555	G2	Q311	*A3	Q405	*C1	Q589	*F2	R366	*B2	R502	*G1	S30	F2
C310	E4			Q312	*F3	Q406	*D1	Q590	*F2	R367	*C4	R503	*G1	S31	F2
C311	G3	CL1	*H4	Q313	*D4	Q407	*D1	Q591	*G2	R368	*D2	R504	*G1	S32	F4
C312	F2	CL2	*H4	Q314	F3	Q408	*D1	Q592	*G2	R369	F3	R505	*H1	S33	B2
C313	B3	CL3	*H3	Q315	*G4	Q501	*G1	Q593	*G2	R370	F3	R506	*H2	S34	B3
C314	B4	CL4	*H3	Q316	*G3	Q502	*G1	Q594	*G2	R371	*F3	R507	*H1	S35	H4
C315	D3	CL5	*H3	Q317	*A3	Q503	*G1	Q595	*G2	R372	*F2	R508	*H1	S36	B2
C316	E3	CL6	*H3	Q318	*B4	Q504	*G1	Q596	*G2	R373	*B3	R509	*H1	S37	H4
C317	E2	CL7	*G3	Q319	*D4	Q505	*G1	Q597	*F1	R374	*C4	R510	*H1	S38	C2
C318	B2	CL8	*G3	Q320	F3	Q506	*G1	Q598	*F1	R375	*D2	R511	*H2	S39	H2
C319	C4			Q321	*G4	Q507	*H1	Q599	*F1	R376	*F4	R512	*H2	S40	C3
C320	D3	CN710	F1	Q322	*G3	Q508	*G1	Q600	*F1	R377	*B2	R513	*H2	S41	E3
C321	E3	CN711	H3	Q323	*A2	Q509	*H1	Q601	*D2	R378	*B3	R514	*H2	S42	E2
C322	B2	CN712	A4	Q324	*B4	Q510	*H1	Q602	D2	R379	*F4	R515	*H2	S43	H2
C323	B3	CN713	B2	Q325	*D4	Q511	*H2			R380	*B2	R516	*H1	S44	D3
C324	H4	CN714	B2	Q326	F3	Q512	*H2	R2	*F1	R381	*B3	R517	*H1	S45	D1
C325	C3	CN715	F1	Q327	*G4	Q513	*H1	R3	*F1	R382	F3	R518	*H1	S46	D1
C326	B3			Q328	*F2	Q514	*H1	R4	*G2	R383	F3	R519	*H1	S47	D1
C327	H4	D201	*E4	Q329	*B3	Q515	*H1	R5	*G2	R384	*F3	R520	*H1	S48	D1
C328	C2	D202	*F3	Q330	*B4	Q516	*H1	R6	*G3	R385	*B3	R521	*H1	S49	D1
C329	H3	D203	*A3	Q331	*D3	Q517	*H1	R7	*G2	R386	*B3	R522	*H1	S50	D1
C330	C3	D204	*E3	Q332	F3	Q518	*H1	R8	*G3	R387	*H4	R523	*H1	S51	D1
C331	D3	D205	*D4	Q333	*G4	Q519	*H1	R10	*G3	R388	*C2	R524	*H1	S52	D1
C333	E2	D206	G2	Q334	*F2	Q520	*H1	R11	*G3	R389	*B3	R525	*H1		
C334	H2	D207	*F3	Q335	*A2	Q521	*H2	R25	*H3	R390	*H4	R526	*H1	T501	D2
C335	D3	D208	*E2	Q336	*B4	Q522	*H2	R27	*G1	R391	*C2	R527	*H1	TP1	H4
C336	*E2	D209	*B3	Q337	*D3	Q523	*H2	R28	*G1	R392	*B3	R528	*H1		
C337	H3	D210	*C4	Q338	F3	Q524	*H2	R33	H3	R393	F3	R529	*H1	X1	G3
C338	H3	D211	*D2	Q339	*F4	Q525	*H2	R34	*G3	R394	F3	R530	*H1		
C339	H3	D212	G2	Q340	*E2	Q526	*H2	R35	*G3	R395	*H4	R531	*H1	*:B SIDE	
C340	D1	D213	*F3	Q341	*B2	Q527	*H2	R201	*B4	R396	*B3	R532	H2		
C341	D1	D215	*B3	Q342	*C4	Q528	*H2	R202	*G2	R397	*B3	R533	H2		
C342	D1	D216	*B4	Q343	*D3	Q529	*H2	R305	E3	R398	*H4	R534	H2		
C343	D1	D217	*D2	Q344	F3	Q530	*H2	R306	F3	R399	*C2	R535	H2		
C344	C2	D218	F2	Q345	*F4	Q531	*H1	R308	*E4	R400	*H3	R536	H3		
C345	D2	D219	*E3	Q346	*E2	Q532	*H1	R309	*F3	R401	*C3	R537	*E1		
C346	D2	D221	*C3	Q347	*B2	Q533	*H1	R310	*A3	R402	*H4	R538	*F1		
C347	D1	D222	*H2	Q348	*C4	Q534	*H1	R311	*F3	R403	*C2	R539	*F2		
C501	*G1	D223	*D3	Q349	*D3	Q535	*H1	R312	*D4	R404	*H2	R540	*F2		
C502	*G1	D224	D1	Q350	F3	Q536	*H1	R313	*E4	R405	*C3	R541	*F2		
C503	*G1	D225	D1	Q351	*F4	Q537	*H1	R314	*F3	R406	F3	R542	*F2		
C504	*H1	D226	*D2	Q352	*B2	Q538	*H1	R315	*A3	R407	F3	R543	*F2		
C505	*H1	D227	*D2	Q353	*B3	Q539	*H1	R316	*F3	R408	*H4	R544	*F2		
C506	*H2	D301	B3	Q354	F3	Q540	*H1	R317	*D4	R409	*C3	R545	*F2		
C507	*H1	D302	H2	Q355	*F4	Q541	*H1	R318	F3	R410	*H2	R546	*G2		
C508	*H1	D303	H2	Q356	*B2	Q542	*H1	R319	F3	R411	*C3	R547	*G2		
C509	*H1	D304	H2	Q357	*B3	Q543	*H1	R320	*E3	R412	*E3	R548	*G2		
C510	*H1	D501	D2	Q358	F3	Q544	*H1	R321	*F3	R414	*E1	R549	*F1		
C511	*H2	D502	C2	Q359	*H4	Q545	*H1	R322	*A3	R415	*H3	R550	*F1		
C512	*H2	D503	*D2	Q360	*C2	Q546	*H1	R323	*F3	R416	*D3	R551	*D2		
C513	*H2	D504	C2	Q361	*B3	Q547	*H1	R324	*D4	R417	*E3	R552	*D2		
C514	*H2	D505	C2	Q362	F3	Q548	*H1	R325	*G4	R419	*E1	R553	*D2		
C515	*H2	D506	D2	Q363	*H4	Q549	*H1	R326	*G3	R420	*H2	R554	*D2		
C516	*H1	D507	D3	Q364	*C2	Q550	*H1	R327	*A2	R421	*D3	R555	*G1		
C517	*H1			Q365	*B3	Q551	*H1	R328	*B4	R422	*E3	R557	*D3		
C518	*H1	E1	B3	Q366	F3	Q552	*H1	R329	*D4	R424	*E2				
C519	*H1	E2	H2	Q367	*H4	Q553	*H1	R330	*G4	R425	*H2	RB1	H3		
C520	*H1			Q368	*C2	Q554	*H1	R331	*G3	R426	*D3	RB2	H4		

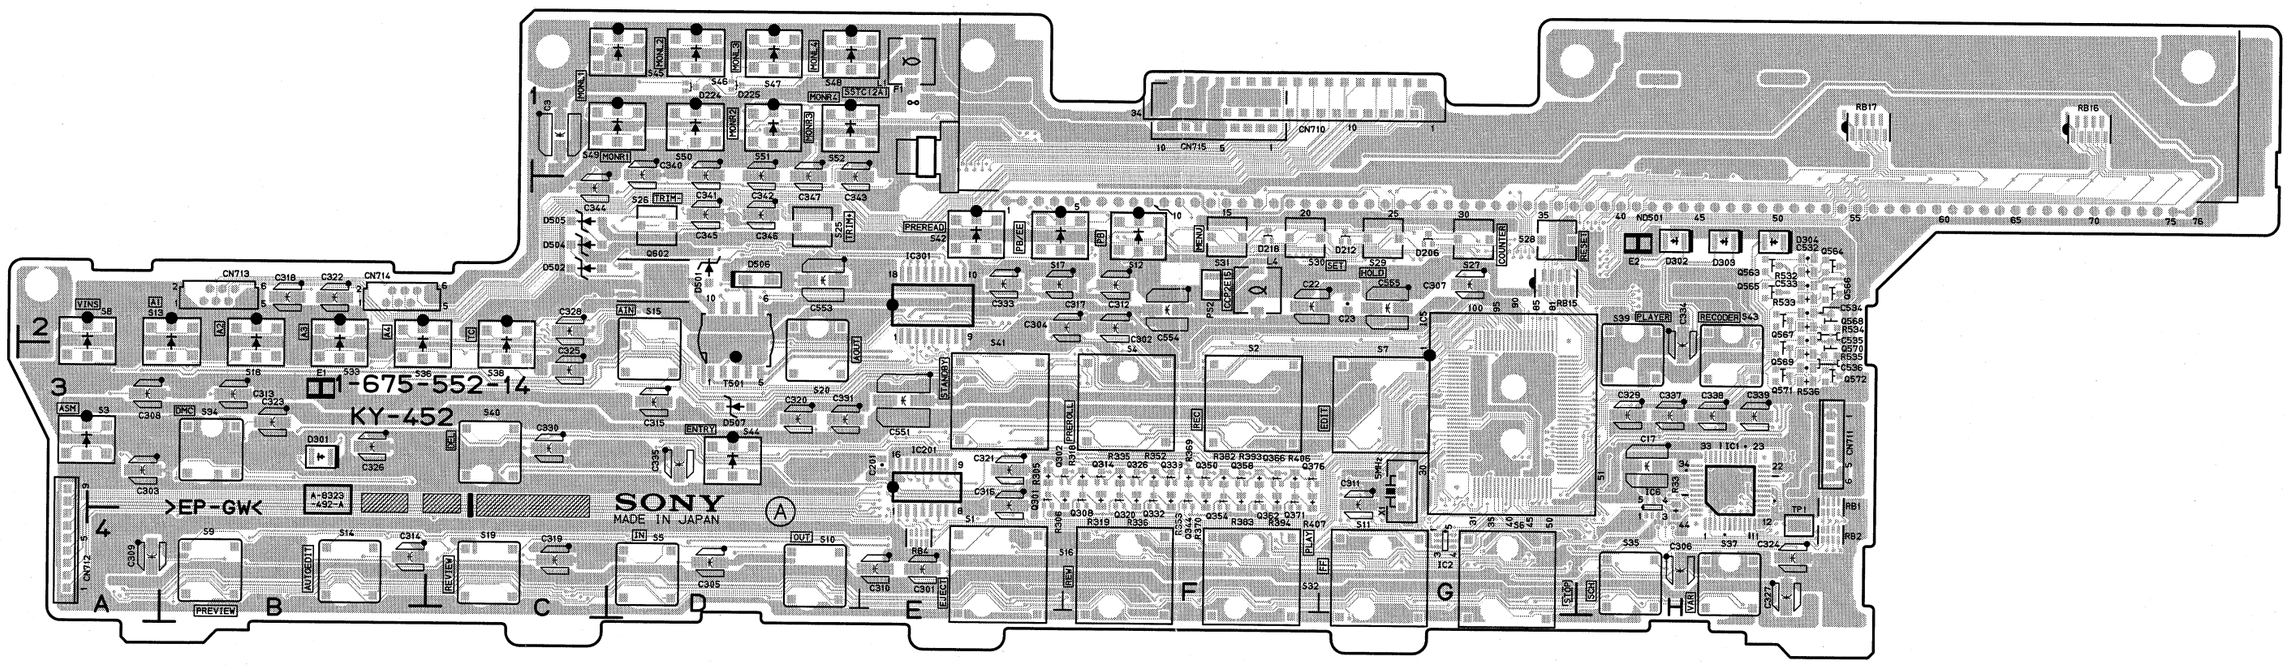

KY-452/452A -A SIDE-

SUFFIX: -13, 14

KY-452: FOR DSR-2000/2000P
KY-452A: FOR DSBK-200

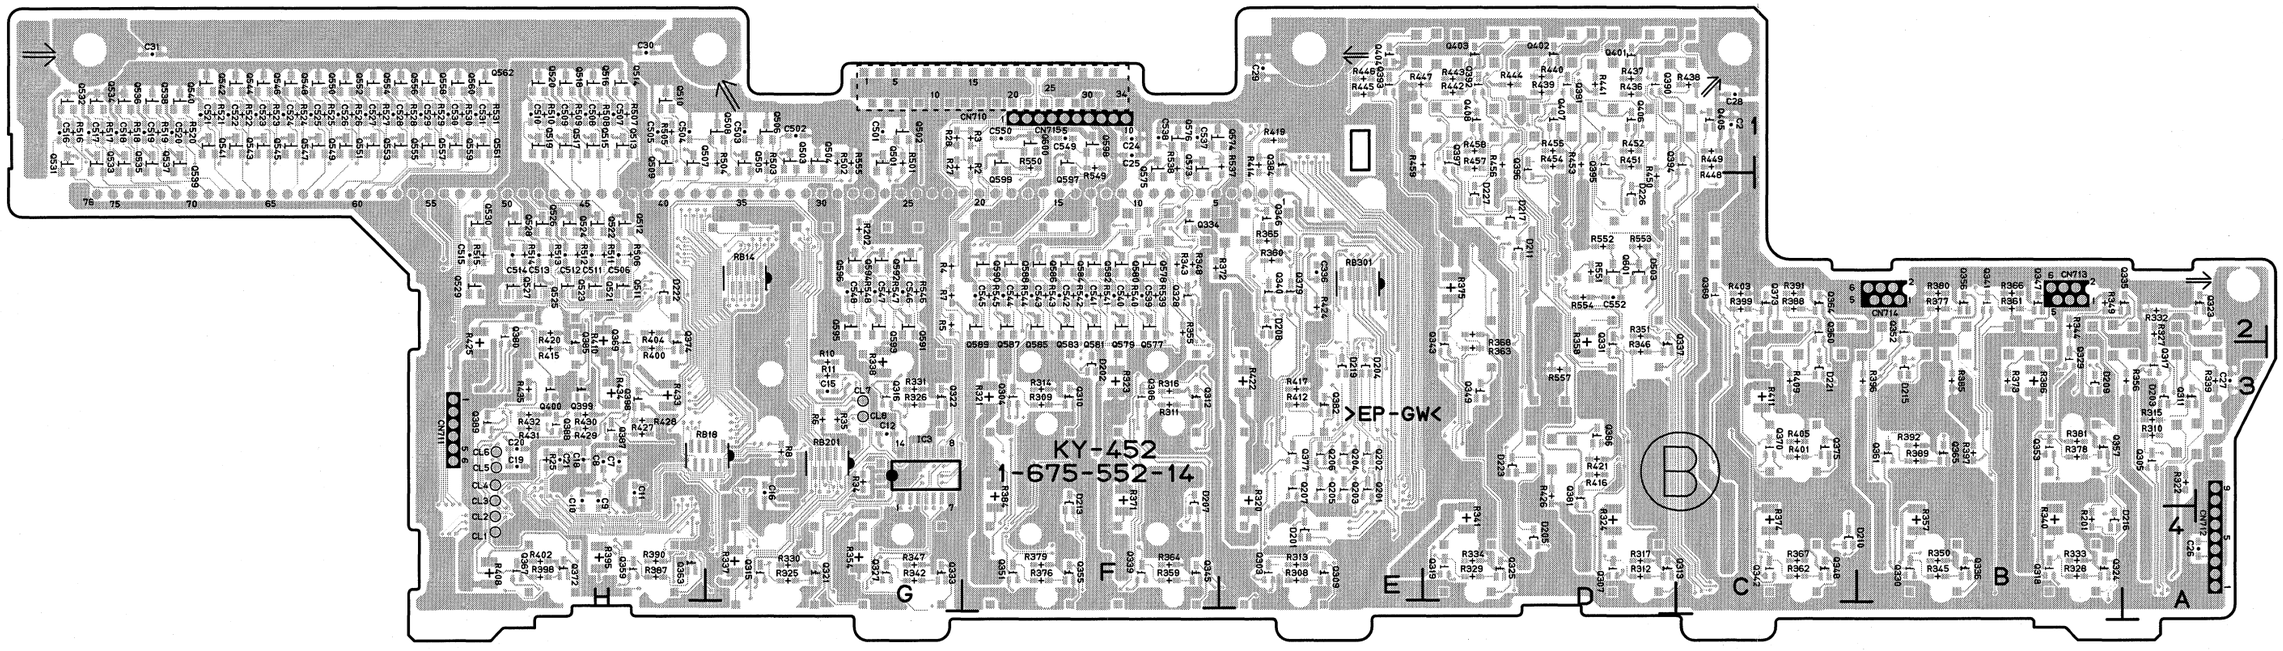

KY-452/452A -B SIDE-

SUFFIX: -13, 14

KY-452: FOR DSR-2000/2000P
KY-452A: FOR DSBK-200

KY-452/452A (1-675-552-12)

C2	*C1	C529	*H1	IC201	E3	Q376	F3	Q562	*H1	R341	*D4	R436	*D1	RB301	*E2
C3	C1	C530	*H1	IC301	E2	Q377	*E3	Q563	H2	R342	*G4	R437	*D1		
C7	*H3	C531	*H1			Q379	*E2	Q564	H2	R343	*F2	R438	*C1	S1	E4
C8	*H3	C532	H2	L1	E1	Q380	*H2	Q565	H2	R344	*B2	R439	*D1	S2	F3
C9	*H3	C533	H2	L4	F2	Q381	*D3	Q566	H2	R345	*B4	R440	*D1	S3	A3
C10	*H3	C534	H2			Q382	*E3	Q567	H2	R346	*D3	R441	*D1	S4	F3
C11	*H3	C535	H2	ND501	H2	Q384	*E1	Q568	H2	R347	*G4	R442	*D1	S5	D4
C12	*G3	C536	H3			Q385	*H2	Q569	H2	R348	*F2	R443	*D1	S6	G4
C15	*G3	C537	*F1	PS2	F2	Q386	*D3	Q570	H2	R349	*B2	R444	*D1	S7	G3
C16	*G3	C538	*F1			Q387	*H3	Q571	H3	R350	*B4	R445	*E1	S8	A2
C17	H3	C539	*F2	Q201	*E3	Q388	*H3	Q572	H3	R351	*D2	R446	*E1	S9	B4
C18	*H3	C540	*F2	Q202	*E3	Q389	*H3	Q573	*F1	R352	F3	R447	*E1	S10	D4
C19	*H3	C541	*F2	Q203	*E3	Q390	*D1	Q574	*F1	R353	F3	R448	*C1	S11	G4
C20	*H3	C542	*F2	Q204	*E3	Q391	*D1	Q575	*F1	R354	*G4	R449	*C1	S12	F2
C21	*H3	C543	*F2	Q205	*E3	Q392	*D1	Q576	*F1	R355	*F2	R450	*D2	S13	B2
C22	F2	C544	*F2	Q206	*E3	Q393	*E1	Q577	*F2	R356	*A3	R451	*D1	S14	B4
C23	G2	C545	*F2	Q207	*E3	Q394	*C1	Q578	*F2	R357	*B4	R452	*D1	S15	D3
C201	E3	C546	*G2	Q301	E3	Q395	*D1	Q579	*F2	R358	*D2	R453	*D1	S16	F4
C301	E4	C547	*G2	Q302	F3	Q396	*D1	Q580	*F2	R359	*F4	R454	*D1	S17	E2
C302	F2	C548	*G2	Q303	*E4	Q397	*D1	Q581	*F2	R360	*E2	R455	*D1	S18	B2
C303	A3	C549	*F1	Q304	*F3	Q398	*H3	Q582	*F2	R361	*B2	R456	*D1	S19	C4
C304	F2	C550	*F1	Q305	*A3	Q399	*H3	Q583	*F2	R362	*C4	R457	*D1	S20	D3
C305	D4	C551	E3	Q306	*F3	Q400	*H3	Q584	*F2	R363	*D3	R458	*D1	S25	D2
C306	H4	C552	*D2	Q307	*D4	Q401	*D1	Q585	*F2	R364	*F4	R459	*D1	S26	D2
C307	G2	C553	D2	Q308	F3	Q402	*D1	Q586	*F2	R365	*E2	R462	D1	S27	G2
C308	A3	C554	F2	Q309	*E4	Q403	*D1	Q587	*F2	R366	*B2	R501	*G1	S28	G2
C309	A4	C555	G2	Q310	*F3	Q404	*E1	Q588	*F2	R367	*C4	R502	*G1	S29	G2
C310	E4			Q311	*A3	Q405	*C1	Q589	*F2	R368	*D2	R503	*G1	S30	F2
C311	G3	CL1	*H4	Q312	*F3	Q406	*D1	Q590	*F2	R369	F3	R504	*G1	S31	F2
C312	F2	CL2	*H4	Q313	*D4	Q407	*D1	Q591	*G2	R370	F3	R505	*H1	S32	F4
C313	B3	CL3	*H3	Q314	F3	Q408	*D1	Q592	*G2	R371	*F3	R506	*H2	S33	B2
C314	B4	CL4	*H3	Q315	*G4	Q501	*G1	Q593	*G2	R372	*F2	R507	*H1	S34	B3
C315	D3	CL5	*H3	Q316	*G3	Q502	*G1	Q594	*G2	R373	*B3	R508	*H1	S35	H4
C316	E3	CL6	*H3	Q317	*A3	Q503	*G1	Q595	*G2	R374	*C4	R509	*H1	S36	B2
C317	E2	CL7	*G3	Q318	*B4	Q504	*G1	Q596	*G2	R375	*D2	R510	*H1	S37	H4
C318	B2	CL8	*G3	Q319	*D4	Q505	*G1	Q597	*F1	R376	*F4	R511	*H2	S38	C2
C319	C4			Q320	F3	Q506	*G1	Q598	*F1	R377	*B2	R512	*H2	S39	H2
C320	D3	CN710	F1	Q321	*G4	Q507	*H1	Q599	*F1	R378	*B3	R513	*H2	S40	C3
C321	E3	CN711	H3	Q322	*G3	Q508	*G1	Q600	*F1	R379	*F4	R514	*H2	S41	E3
C322	B2	CN712	A4	Q323	*A2	Q509	*H1	Q601	*D2	R380	*B2	R515	*H2	S42	E2
C323	B3	CN713	B2	Q324	*B4	Q510	*H1	Q602	D2	R381	*B3	R516	*H1	S43	H2
C324	H4	CN714	B2	Q325	*D4	Q511	*H2			R382	F3	R517	*H1	S44	D3
C325	C3	CN715	F1	Q326	F3	Q512	*H2	R2	*F1	R383	F3	R518	*H1	S45	D1
C326	B3			Q327	*G4	Q513	*H1	R3	*F1	R384	*F3	R519	*H1	S46	D1
C327	H4	D201	*E4	Q328	*F2	Q514	*H1	R4	*G2	R385	*B3	R520	*H1	S47	D1
C328	C2	D202	*F3	Q329	*B3	Q515	*H1	R5	*G2	R386	*B3	R521	*H1	S48	D1
C329	H3	D203	*A3	Q330	*B4	Q516	*H1	R6	*G3	R387	*H4	R522	*H1	S49	D1
C330	C3	D204	*E3	Q331	*D3	Q517	*H1	R10	*G3	R388	*C2	R523	*H1	S50	D1
C331	D3	D205	*D4	Q332	F3	Q518	*H1	R11	*G3	R389	*B3	R524	*H1	S51	D1
C333	E2	D206	G2	Q333	*G4	Q519	*H1	R22	*H3	R390	*H4	R525	*H1	S52	D1
C334	H2	D207	*F3	Q334	*F2	Q520	*H1	R25	*H3	R391	*C2	R526	*H1		
C335	D3	D208	*E2	Q335	*A2	Q521	*H2	R27	*G1	R392	*B3	R527	*H1	SL1	*H1
C336	*E2	D209	*B3	Q336	*B4	Q522	*H2	R28	*G1	R393	F3	R528	*H1	SL2	*H1
C337	H3	D210	*C4	Q337	*D3	Q523	*H2	R33	H3	R394	F3	R529	*H1	SL3	*E1
C338	H3	D211	*D2	Q338	F3	Q524	*H2	R34	*G3	R395	*H4	R530	*H1	SL4	*C1
C339	H3	D212	G2	Q339	*F4	Q525	*H2	R201	*B4	R396	*B3	R531	*H1	SL5	*A3
C340	D1	D213	*F3	Q340	*E2	Q526	*H2	R202	*G2	R397	*B3	R532	H2		
C341	D1	D215	*B3	Q341	*B2	Q527	*H2	R305	E3	R398	*H4	R533	H2	T501	D2
C342	D1	D216	*B4	Q342	*C4	Q528	*H2	R306	F3	R399	*C2	R534	H2		
C343	D1	D217	*D2	Q343	*D3	Q529	*H2	R308	*E4	R400	*H3	R535	H2	TP1	H4
C344	C2	D218	F2	Q344	F3	Q530	*H2	R309	*F3	R401	*C3	R536	H3		
C345	D2	D219	*E3	Q345	*F4	Q531	*H1	R310	*A3	R402	*H4	R537	*E1	X1	G3
C346	D2	D221	*C3	Q346	*E2	Q532	*H1	R311	*F3	R403	*C2	R538	*F1		
C347	D1	D222	*H2	Q347	*B2	Q533	*H1	R312	*D4	R404	*H2	R539	*F2	*:B SIDE	
C501	*G1	D223	*D3	Q348	*C4	Q534	*H1	R313	*E4	R405	*C3	R540	*F2		
C502	*G1	D224	D1	Q349	*D3	Q535	*H1	R314	*F3	R406	F3	R541	*F2		
C503	*G1	D225	D1	Q350	F3	Q536	*H1	R315	*A3	R407	F3	R542	*F2		
C504	*H1	D226	*D2	Q351	*F4	Q537	*H1	R316	*F3	R408	*H4	R543	*F2		
C505	*H1	D227	*D2	Q352	*B2	Q538	*H1	R317	*D4	R409	*C3	R544	*F2		
C506	*H2	D301	B3	Q353	*B3	Q539	*H1	R318	F3	R410	*H2	R545	*F2		
C507	*H1	D302	H2	Q354	F3	Q540	*H1	R319	F3	R411	*C3	R546	*G2		
C508	*H1	D303	H2	Q355	*F4	Q541	*H1	R320	*E3	R412	*E3	R547	*G2		
C509	*H1	D304	H2	Q356	*B2	Q542	*H1	R321	*F3	R414	*E1	R548	*G2		
C510	*H1	D305	D1	Q357	*B3	Q543	*H1	R322	*A3	R415	*H3	R549	*F1		
C511	*H2	D501	D2	Q358	F3	Q544	*H1	R323	*F3	R416	*D3	R550	*F1		
C512	*H2	D502	C2	Q359	*H4	Q545	*H1	R324	*D4	R417	*E3	R551	*D2		
C513	*H2	D503	*D2	Q360	*C2	Q546	*H1	R325	*G4	R419	*E1	R552	*D2		
C514	*H2	D504	C2	Q361	*B3	Q547	*H1	R326	*G3	R420	*H2	R553	*D2		
C515	*H2	D505	C2	Q362	F3	Q548	*H1	R327	*A2	R421	*D3	R554	*D2		
C516	*H1	D506	D2	Q363	*H4	Q549	*H1	R328	*B4	R422	*E3	R555	*G1		
C517	*H1	D507	D3	Q364	*C2	Q550	*H1	R329	*D4	R424	*E2	R557	*D3		
C518	*H1			Q365	*B3	Q551	*H1	R330	*G4	R425	*H2				
C519	*H1	E1	B3	Q366	F3	Q552	*H1	R331	*G3	R426	*D3	RB1	H3		
C520	*H1	E2	H2	Q367	*H4	Q553	*H1	R332	*A2	R427	*H3	RB2	H4		
C521	*H1			Q368	*C2	Q554	*H1	R333	*B4	R428	*H3	RB3	H3		
C522	*H1	F1	E1	Q369	*H2	Q555	*H1	R334	*D4	R429	*H3	RB4	E4		
C523	*H1			Q370	*C3	Q556	*H1	R335	F3	R430	*H3	RB14	*G2		
C524	*H1	IC1	H3	Q371	F3	Q557	*H1	R336	F3	R431	*H3	RB15	G2		
C525	*H1	IC2	G4	Q372	*H4	Q558	*H1	R337	*G4	R432	*H3	RB16	H1		
C526	*H1	IC3	*G3	Q373	*C2	Q559	*H1	R338	*G3	R433	*H3	RB17	H1		
C527	*H1	IC5	G3	Q374	*H2	Q560	*H1	R339	*A3	R434	*H3	RB18	*G3		
C528	*H1	IC6	H3	Q375	*C3	Q561	*H1	R340	*B4	R435	*H3	RB201	*G3		

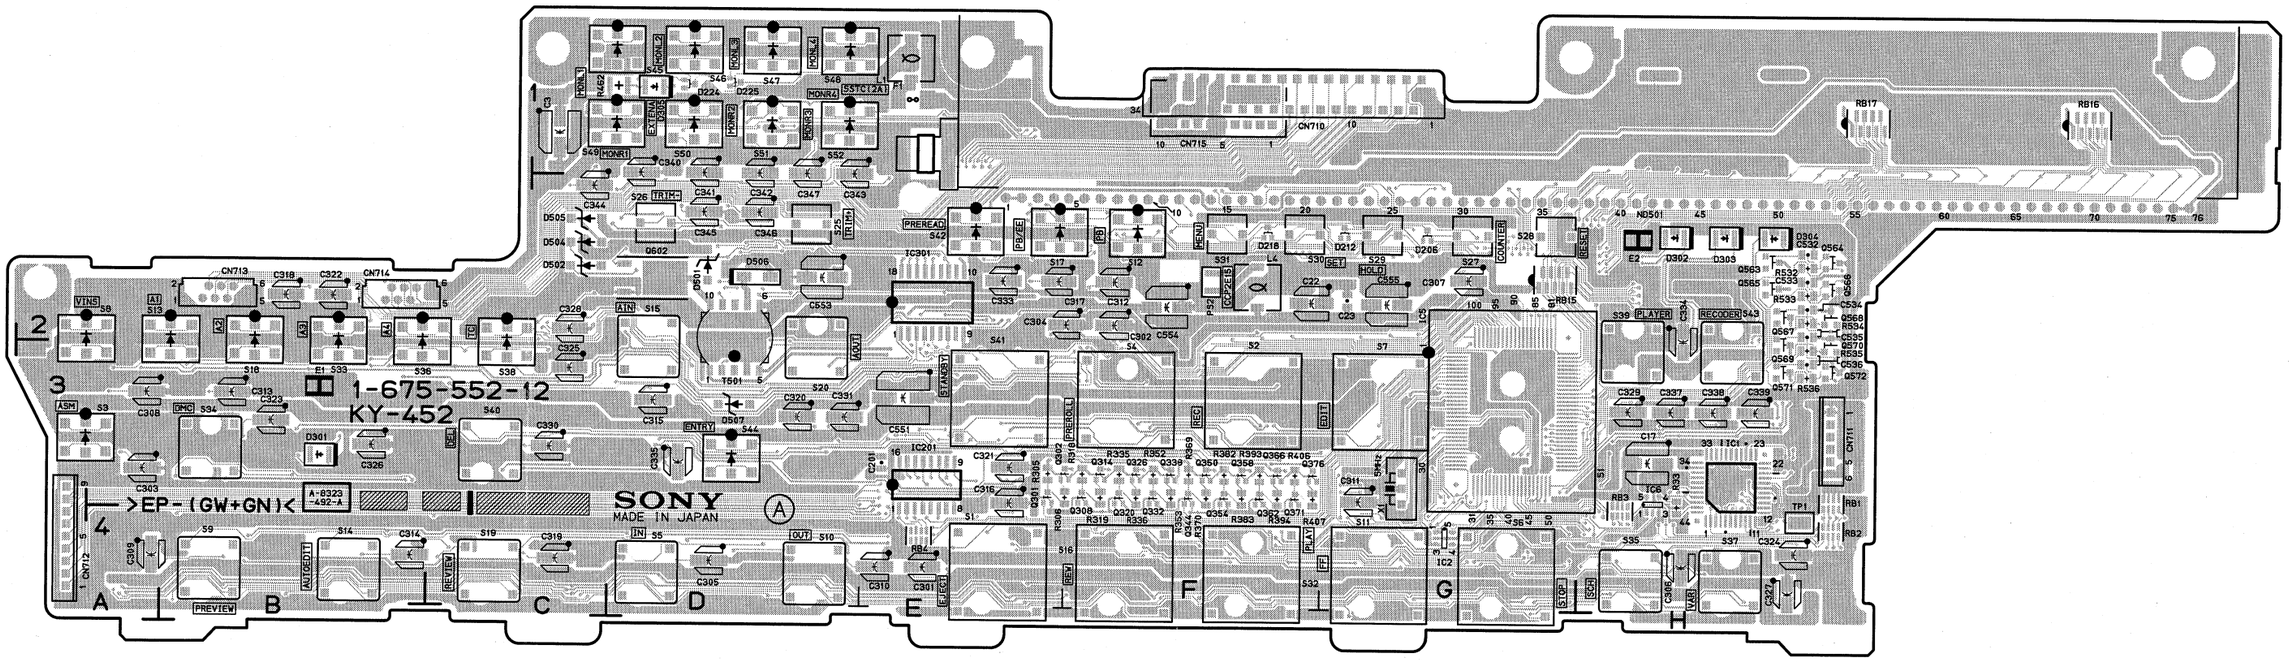

KY-452/452A -A SIDE-

SUFFIX: -12

KY-452: FOR DSR-2000/2000P
KY-452A: FOR DSBK-200

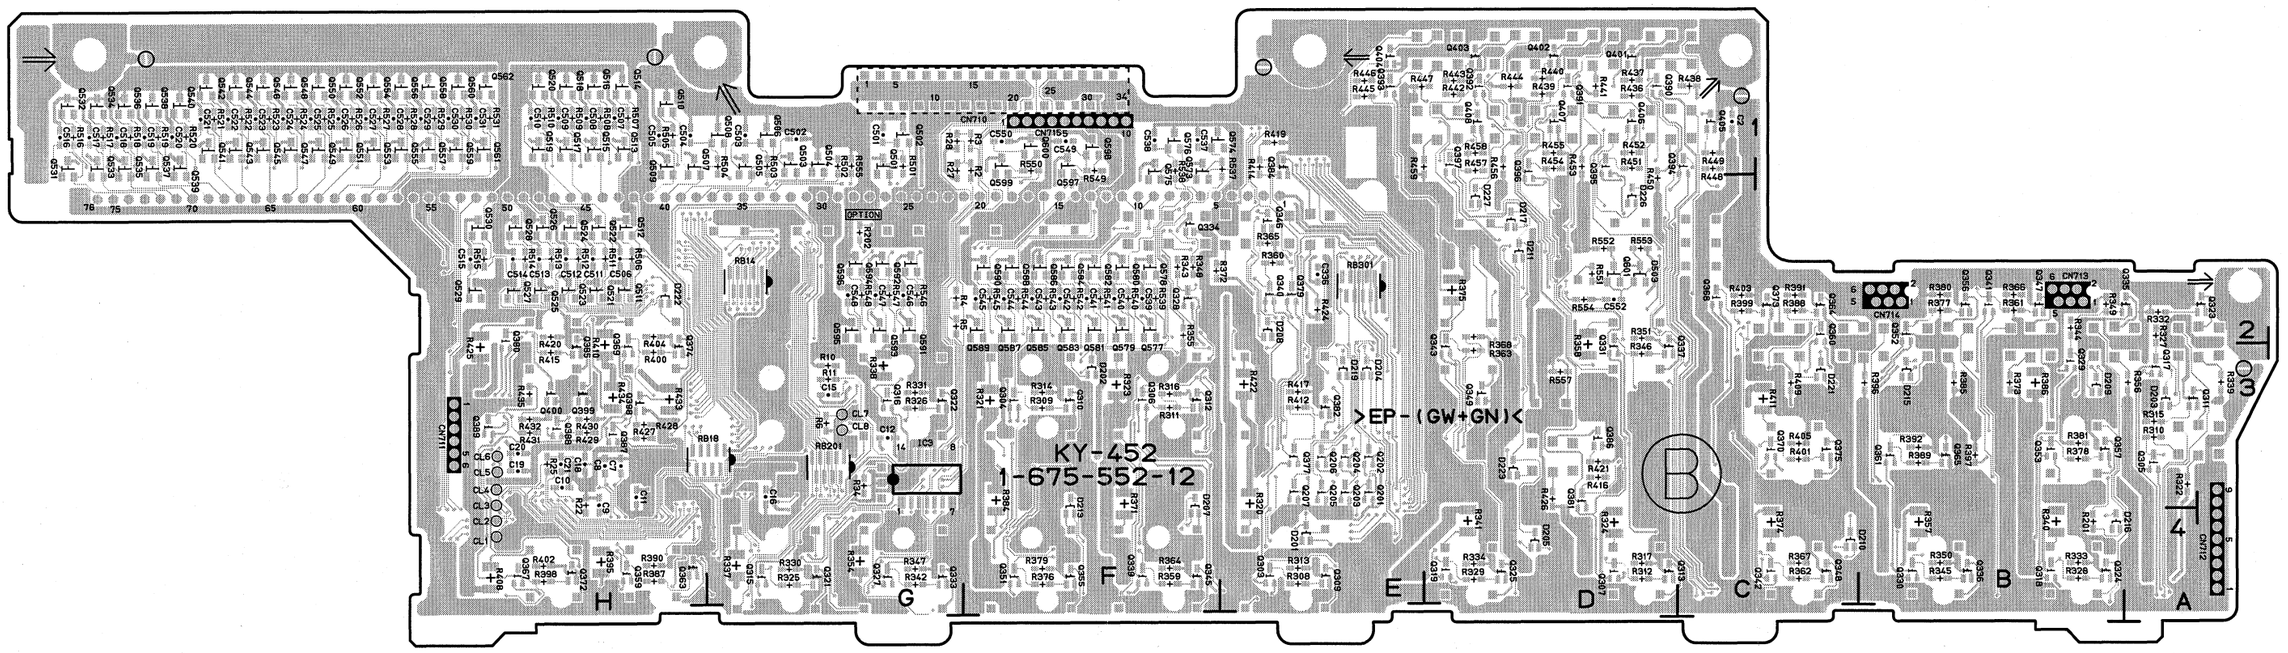

KY-452/452A -B SIDE-

SUFFIX: -12

KY-452: FOR DSR-2000/2000P
KY-452A: FOR DSBK-200

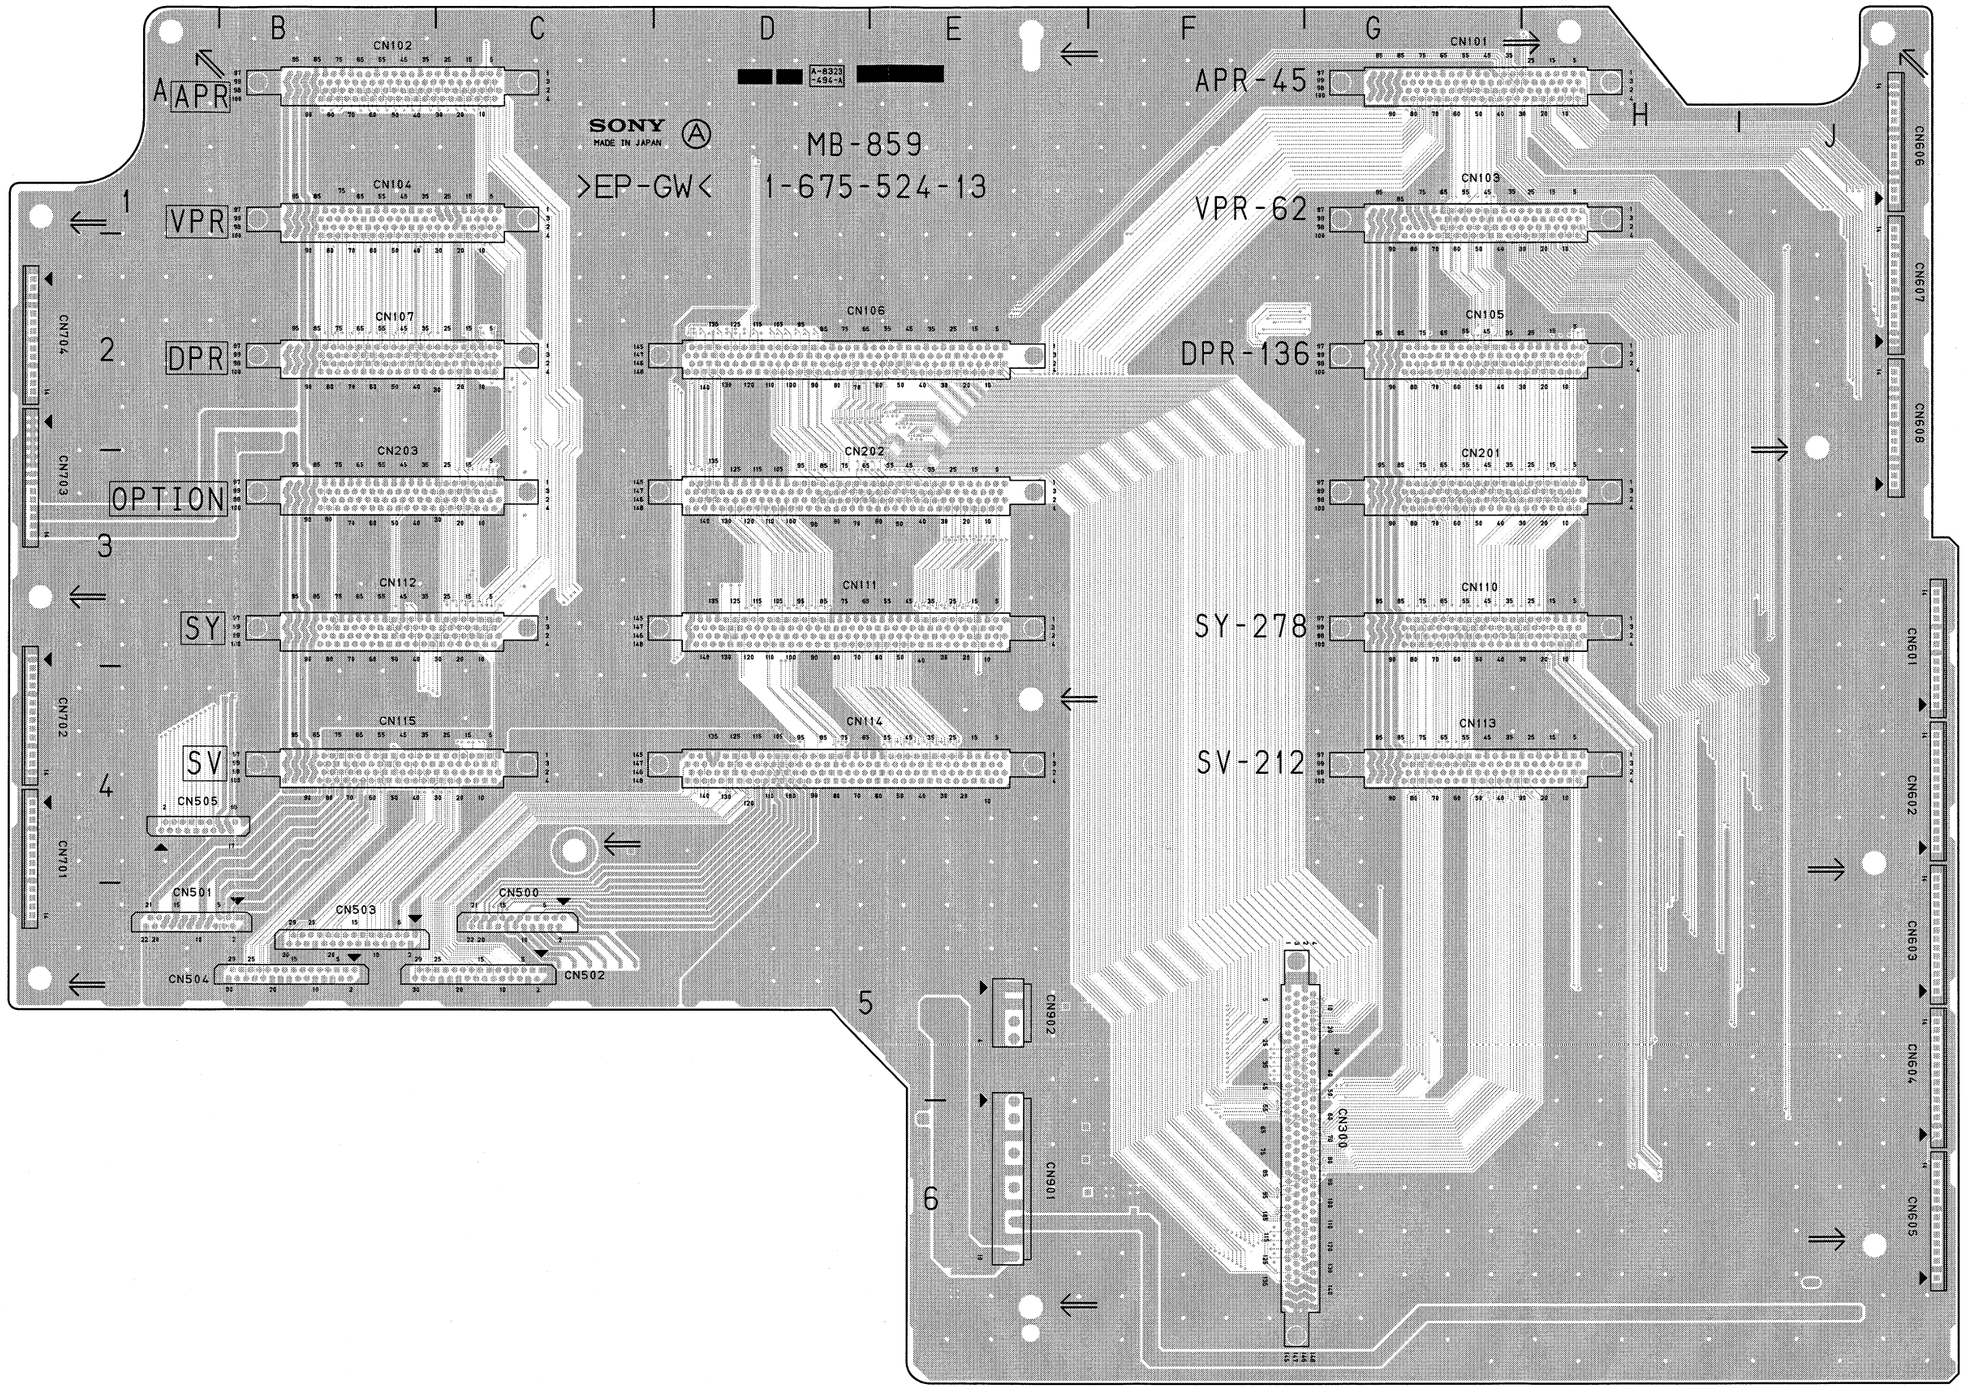

MB-859 -A SIDE-
SUFFIX: -11, 12, 13

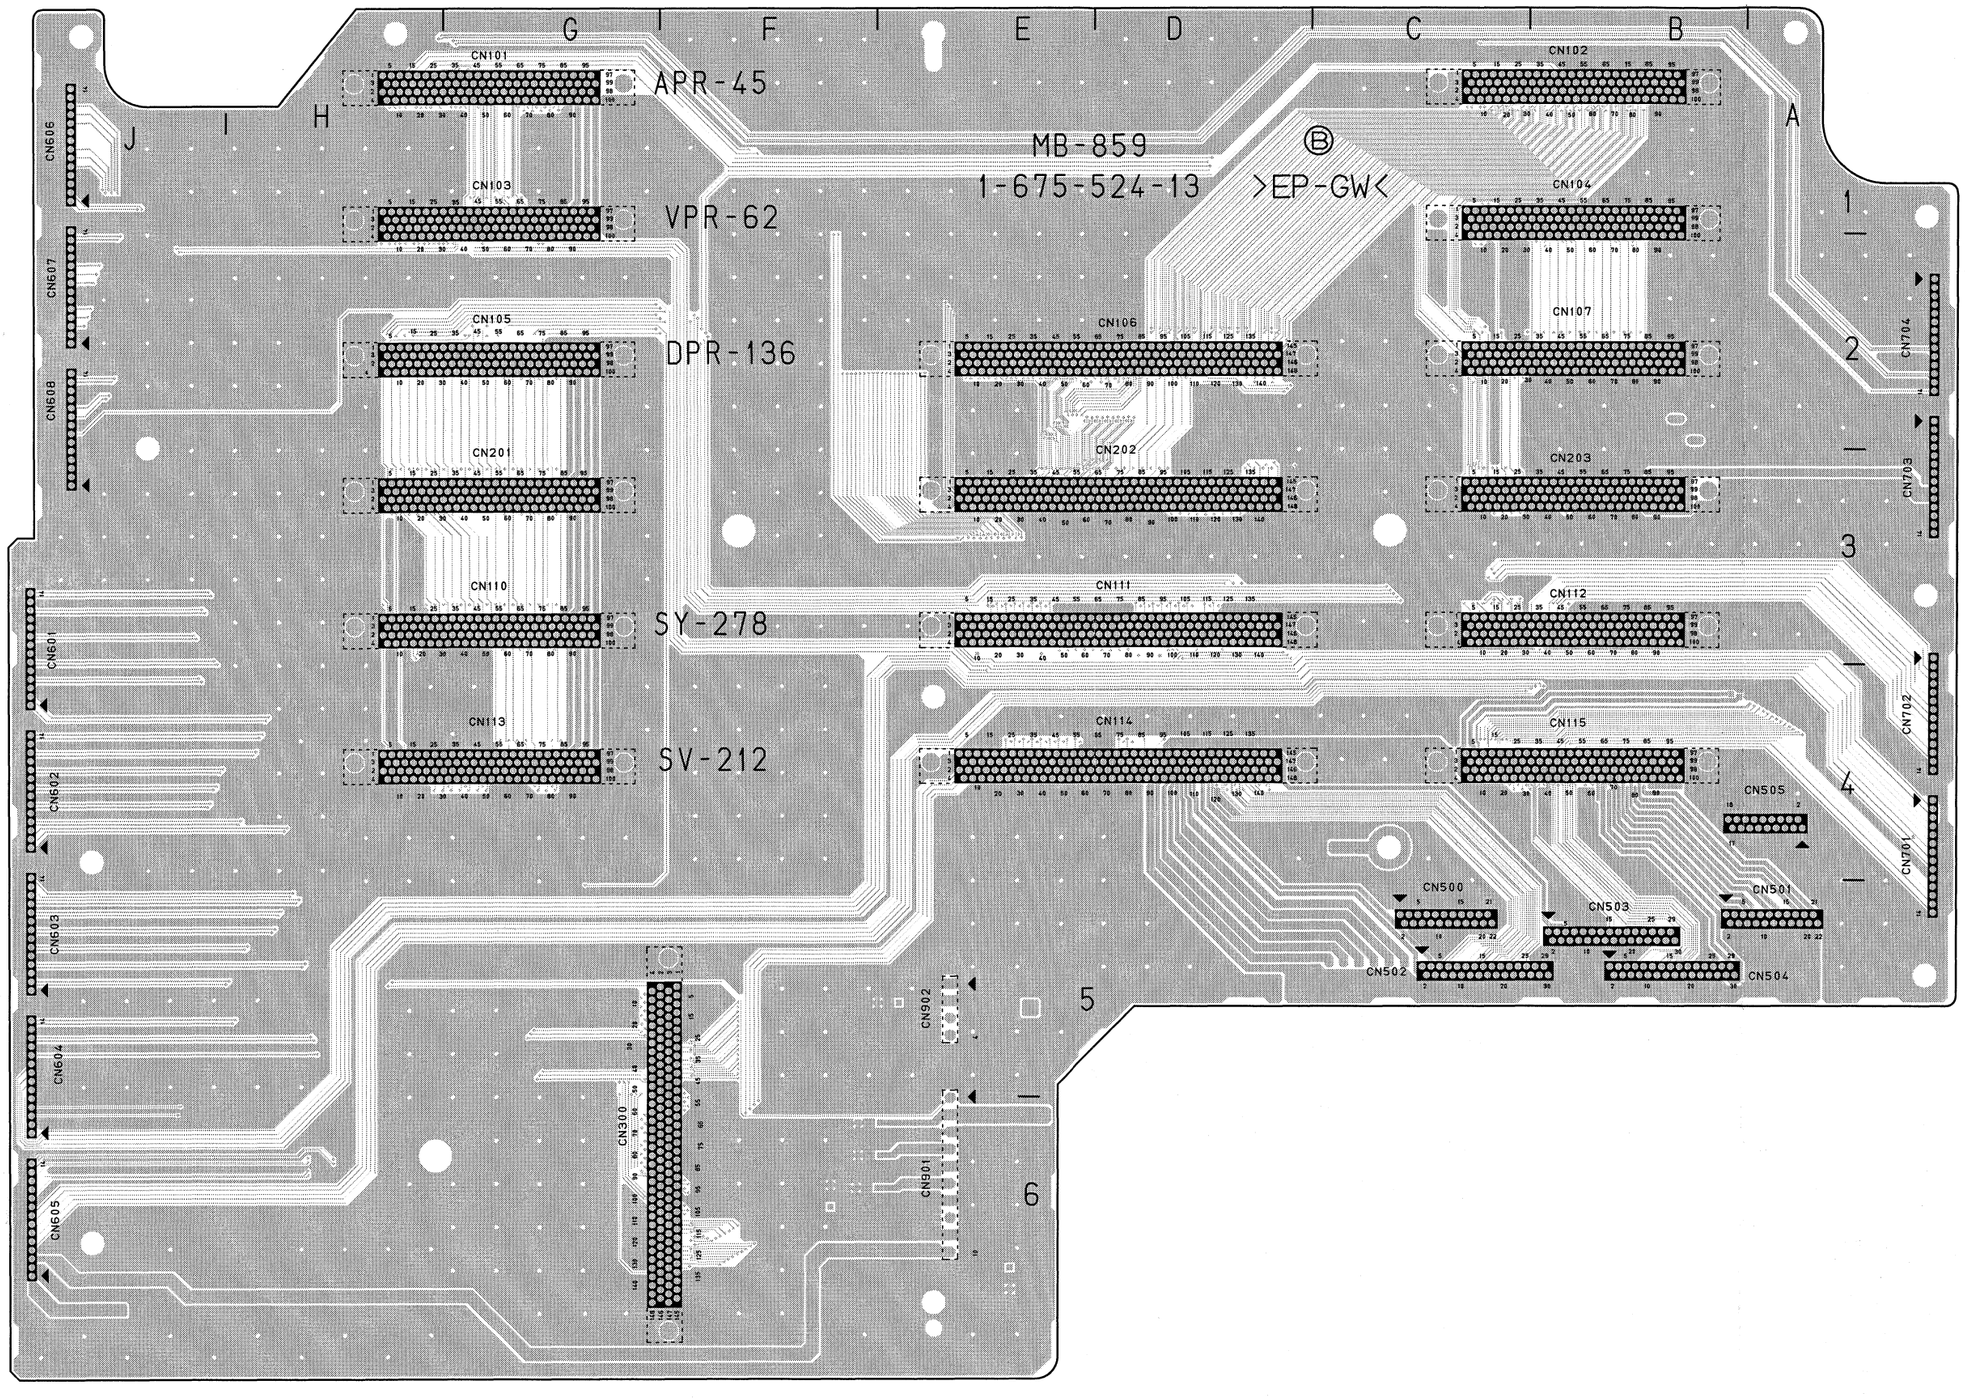

MB-859 (1-675-524-11,12,13)

CN101	G1
CN102	B1
CN103	G1
CN104	B1
CN105	G2
CN106	D2
CN107	B2
CN110	G3
CN111	D3
CN112	B3
CN113	G4
CN114	D4
CN115	B4
CN201	G3
CN202	D3
CN203	B3
CN300	F6
CN500	C5
CN501	A5
CN502	C5
CN503	B5
CN504	B5
CN505	A4
CN601	J3
CN602	J4
CN603	J5
CN604	J5
CN605	J6
CN606	J1
CN607	J2
CN608	J2
CN701	A4
CN702	A4
CN703	A3
CN704	A2
CN901	E6
CN902	E5

MB-859 -B SIDE-
SUFFIX: -11, 12, 13

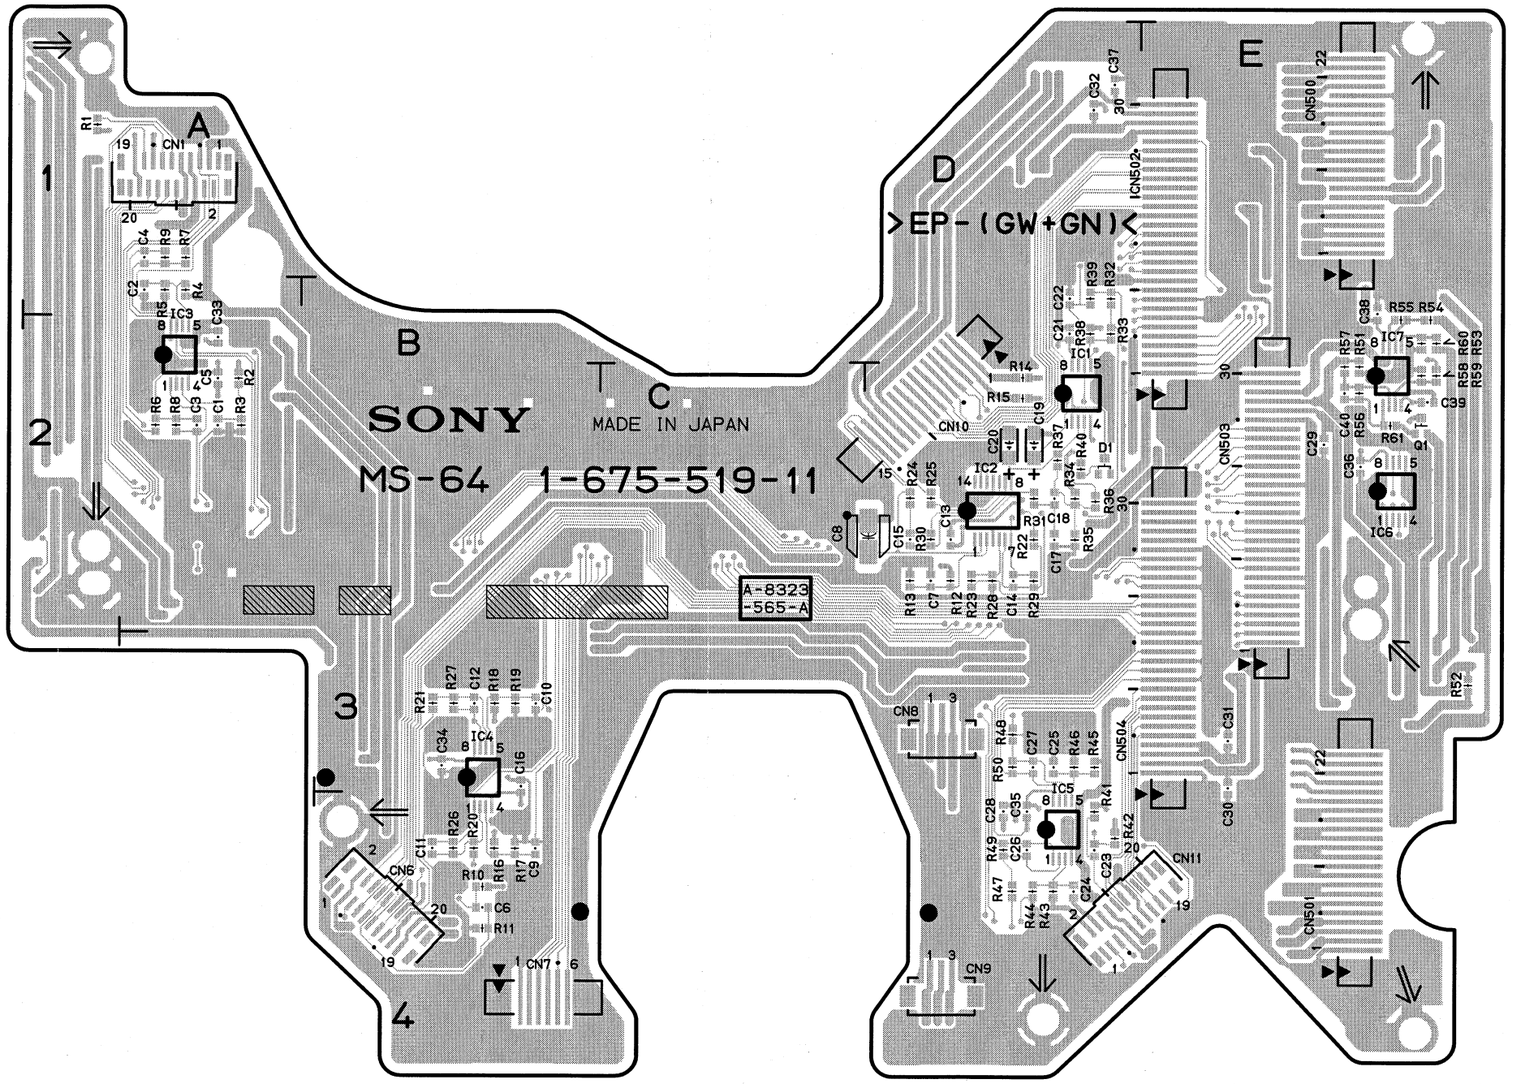

MS-64 -A SIDE-
SUFFIX: -11

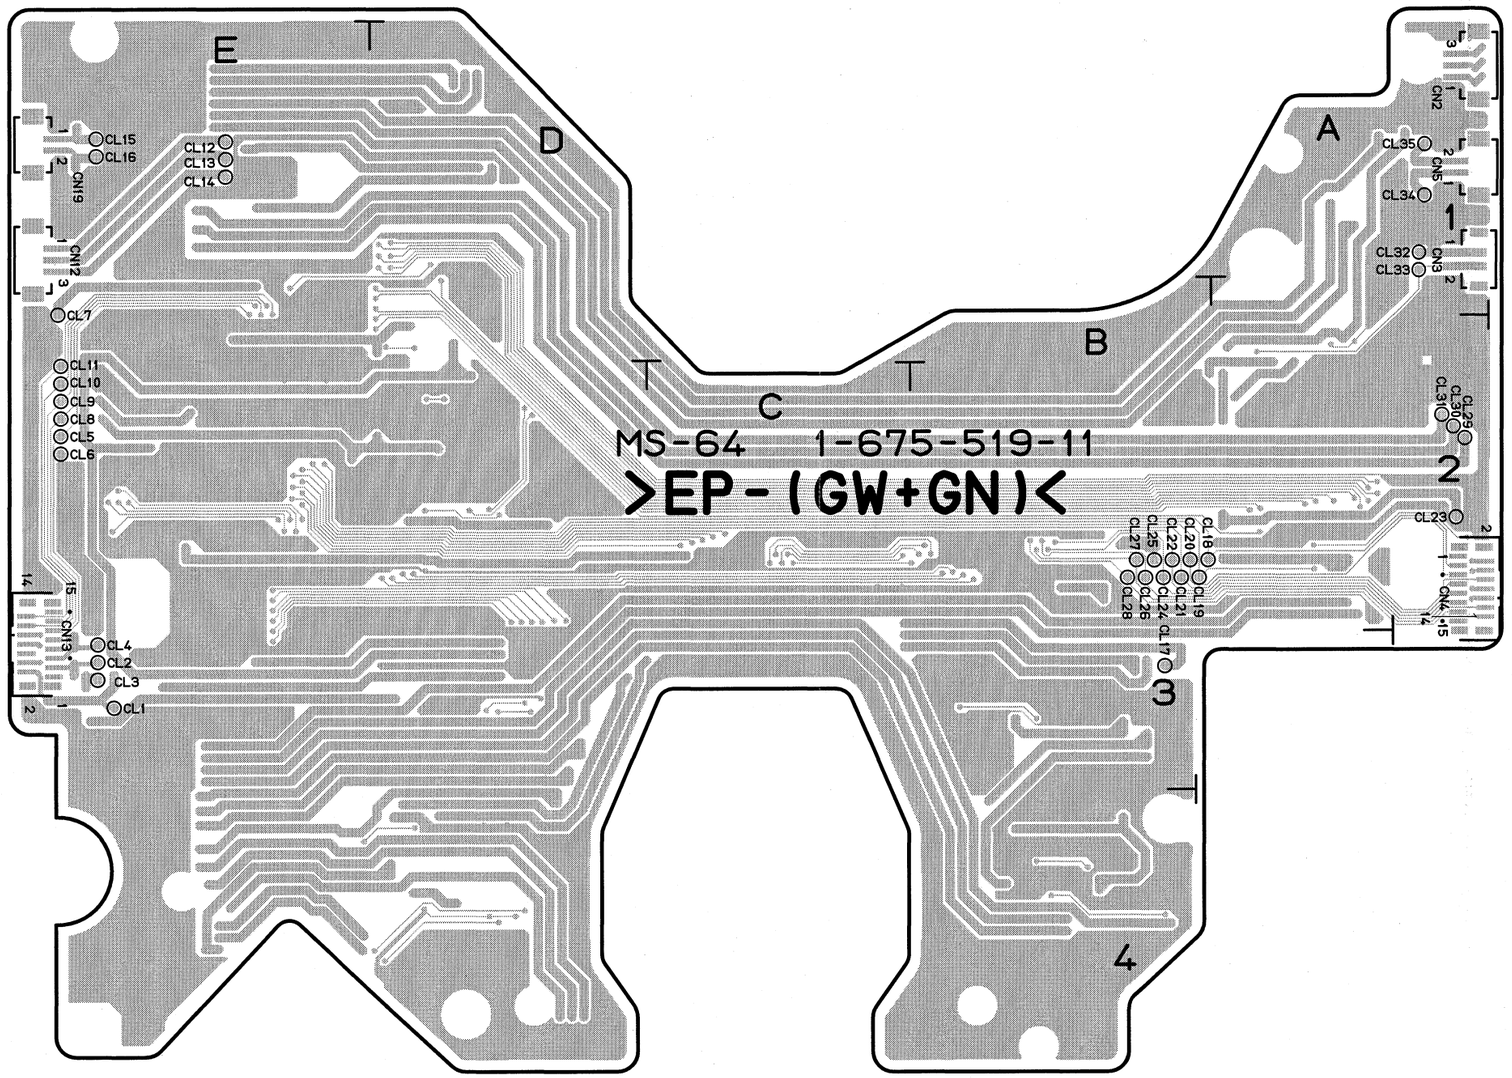

MS-64 -B SIDE-
SUFFIX: -11

MS-64 (1-675-519-11)

C1	A2	CN501	E4
C2	A1	CN502	E1
C3	A2	CN503	E2
C4	A1	CN504	E3
C5	A2		
C6	B4	D1	D2
C7	D2		
C8	D2	IC1	D2
C9	B4	IC2	D2
C10	B3	IC3	A2
C11	B4	IC4	B4
C12	B3	IC5	D4
C13	D2	IC6	E2
C14	D2	IC7	E2
C15	D2		
C16	B3	Q1	E2
C17	D2		
C18	D2	R1	A1
C19	D2	R2	A2
C20	D2	R3	A2
C21	D2	R4	A1
C22	D1	R5	A1
C23	D4	R6	A2
C24	D4	R7	A1
C25	D3	R8	A2
C26	D4	R9	A1
C27	D3	R10	B4
C28	D4	R11	B4
C29	E2	R12	D2
C30	E3	R13	D2
C31	E3	R14	D2
C32	D1	R15	D2
C33	A2	R16	B4
C34	B3	R17	B4
C35	D4	R18	B3
C36	E2	R19	B3
C37	D1	R20	B4
C38	E1	R21	B3
C39	E2	R22	D2
C40	E2	R23	D2
		R24	D2
CL1	*E3	R25	D2
CL2	*E3	R26	B4
CL3	*E3	R27	B3
CL4	*E3	R28	D2
CL5	*E2	R29	D2
CL6	*E2	R30	D2
CL7	*E1	R31	D2
CL8	*E2	R32	D1
CL9	*E2	R33	D2
CL10	*E2	R34	D2
CL11	*E2	R35	D2
CL12	*E1	R36	D2
CL13	*E1	R37	D2
CL14	*E1	R38	D2
CL15	*E1	R39	D1
CL16	*E1	R40	D2
CL17	*B3	R41	D4
CL18	*B2	R42	D4
CL19	*B2	R43	D4
CL20	*B2	R44	D4
CL21	*B2	R45	D3
CL22	*B2	R46	D3
CL23	*A2	R47	D4
CL24	*B2	R48	D3
CL25	*B2	R49	D4
CL26	*B2	R50	D3
CL27	*B2	R51	E2
CL28	*B2	R52	E3
CL29	*A2	R53	E2
CL30	*A2	R54	E2
CL31	*A2	R55	E2
CL32	*A1	R56	E2
CL33	*A1	R57	E2
CL34	*A1	R58	E2
CL35	*A1	R59	E2
		R60	E2
CN1	A1	R61	E2
CN2	*A1		
CN3	*A1	*:B SIDE	
CN4	*A2		
CN5	*A1		
CN6	B4		
CN7	B4		
CN8	D3		
CN9	D4		
CN10	D2		
CN11	D4		
CN12	*E1		
CN13	*E3		
CN19	*E1		
CN500	E1		

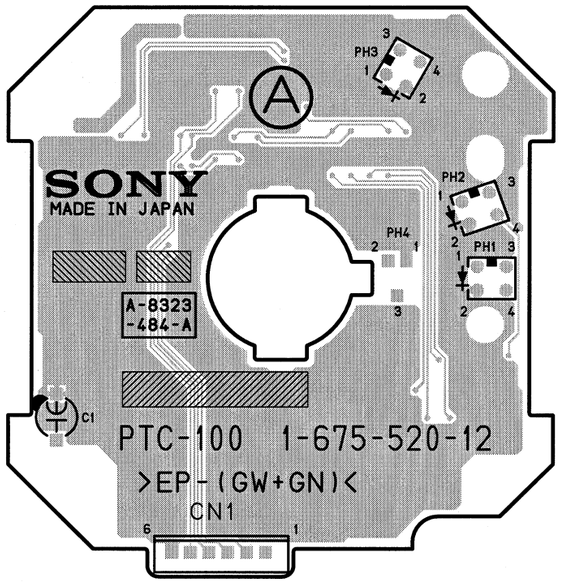

PTC-100 -A SIDE-

SUFFIX: -12, 13

FOR DSR-2000/2000P
FOR DSBK-200

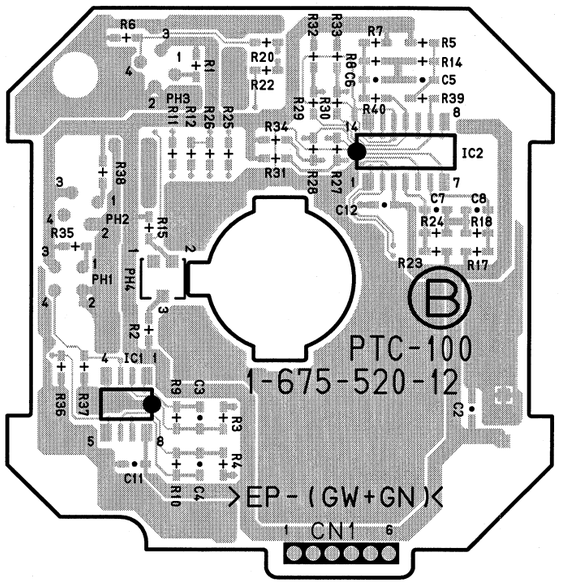

PTC-100 -B SIDE-

SUFFIX: -12, 13

FOR DSR-2000/2000P
FOR DSBK-200

RP-111 (1-675-521-13)

C1	*D4	C154	D4	C277	*B4	C402	*D3	C521	C3	C640	*B2	C761	*A3	C920	*A4	CL202	B3	IC10	C4	IC945	*C1	Q202	*C4	R44	C3	R175	*C4	R301	B4	R421	*E1	R550	C2	R710	*A2
C2	*E3	C156	*C4	C278	*B4	C403	*D3	C522	*C3	C641	B2	C762	*A3	C921	*B1	CL301	B3	IC101	*D4	IC946	*B3	Q302	*B4	R45	*D1	R178	C4	R302	B4	R422	D3	R551	*C2	R711	A3
C3	*E3	C157	*D4	C279	*B4	C404	*D3	C523	C3	C642	B2	C763	*A1	C922	D1	CL302	A3	IC102	C3	IC947	B2	Q401	*D3	R46	*E4	R180	C4	R303	*B4	R423	D3	R552	C2	R712	*A3
C4	*D3	C158	*D4	C280	B4	C405	*D3	C524	*C3	C643	B2	C764	*A2	C923	E1	CL401	D2	IC103	C4	IC948	B3	Q402	*D3	R47	*D4	R181	*C4	R304	B3	R424	*D2	R553	C2	R713	*A3
C5	*E3	C159	*D4	C281	B4	C406	*D3	C525	*C3	C644	B2	C765	A2	C924	*E1	CL402	D2	IC104	C4	IC949	*B2	Q403	D3	R48	D3	R182	*C4	R305	B3	R425	*D2	R554	C1	R714	*A2
C6	*D3	C160	*C4	C282	B4	C407	*D3	C526	*C3	C645	B3	C767	*A2	C925	*E1	CL403	D2	IC105	*C4	IC950	*E2	Q404	*D3	R49	*D3	R184	*C3	R306	*B4	R426	D2	R555	*C3	R715	A3
C7	*E3	C161	C3	C283	B4	C408	*D3	C527	*C3	C646	*B2	C768	A3	C926	*D1	CL501	C2	IC151	*D4	IC981	B2	Q405	*D2	R50	D3	R185	*C3	R307	*B3	R427	D3	R556	*C3	R716	A3
C8	D3	C162	C3	C284	B4	C409	*D2	C528	*C2	C647	B2	C769	A2	C927	C2	CL502	C2	IC152	C3			Q406	*D2	R51	*D1	R187	*C4	R308	B3	R428	*D3	R557	*C3	R717	A3
C9	D3	C163	C4	C285	B4	C410	*D2	C529	C2	C648	B2	C775	*A2	C928	D1	CL503	C2	IC153	C4	L1	*D4	Q407	*D3	R52	*D3	R188	*C4	R309	B3	R429	*D3	R558	*C3	R718	A3
C10	*D3	C164	C4	C286	*C4	C411	*D2	C530	C2	C649	*B2	C776	*A2	C929	*B1	CL601	B2	IC154	C4	L2	*E3	Q408	D3	R53	D3	R189	*C4	R310	B4	R430	D2	R559	C2	R719	A3
C11	*E3	C165	*C3	C287	*B4	C412	*D2	C531	*C3	C650	B2	C777	A2	C930	E1	CL602	B2	IC155	*C4	L3	*E3	Q409	D2	R54	D3	R190	*C4	R311	B3	R431	D2	R575	*C2	R720	A2
C12	*D3	C166	C3	C288	*B4	C413	*D2	C532	*C2	C651	B2	C801	*D1	C931	*A3	CL603	B2	IC201	C3	L4	E3	Q410	D2	R55	D3	R191	*C4	R312	B3	R432	*D3	R576	*C2	R721	*A3
C13	*D3	C167	C4	C289	*C4	C414	*D2	C533	*C3	C652	B2	C802	*D1	C932	*A3	CL701	A2	IC202	C4	L5	D3	Q501	*C3	R56	*D4	R192	*C4	R313	B3	R433	D3	R577	*C2	R722	*A2
C14	*D3	C168	C4	C290	*C4	C415	*D2	C534	C3	C653	B2	C803	C1	C933	B1	CL702	A2	IC203	C4	L6	*D4	Q502	*D3	R57	*D3	R193	*C4	R314	B4	R434	D3	R578	*D2	R724	*A3
C15	*E3	C169	C4	C291	*C4	C416	D3	C535	*C2	C654	B2	C804	*D2	C934	D1	CL703	A2	IC204	B3	L7	D4	Q503	D3	R58	E2	R194	*C4	R315	*B3	R435	D2	R579	D2	R725	A3
C16	*E3	C170	C3	C292	*C4	C417	*D3	C536	*C3	C655	B2	C805	*D2	C935	*C2	CL801	D2	IC205	B4	L8	E4	Q504	*D3	R59	E2	R195	*C4	R316	*B3	R436	D2	R580	D2	R726	A3
C17	*E3	C171	C3	C293	*A3	C418	D3	C537	*C2	C656	*B3	C806	D1	C936	C1	CL802	C2	IC206	B4	L9	D3	Q505	*D2	R60	E2	R196	*C4	R319	B4	R437	D3	R601	B3	R727	*A2
C18	E3	C172	C4	C301	*B3	C419	D3	C538	*C3	C657	B3	C807	*D1	C937	*C2	CL851	B2	IC207	B3	L10	*E2	Q506	*D2	R61	E2	R197	*C4	R320	B4	R438	D3	R602	B3	R728	*A2
C19	E3	C173	C4	C302	*B3	C420	D2	C539	C3	C658	*B3	C808	*D2	C938	C2	CL852	A2	IC208	*C4	L11	*E2	Q507	*C3	R62	D1	R198	*C4	R323	*B3	R439	D3	R603	A3	R729	A2
C20	*E3	C174	C4	C303	B4	C421	D3	C540	*C3	C659	*B3	C809	*D2	C941	A4	CL901	D1	IC251	B3	L101	D4	Q508	D3	R63	D1	R199	*C4	R324	*B3	R440	*D3	R604	A3	R730	A3
C21	*E3	C175	C4	C304	B4	C422	*D3	C541	*C3	C660	*B3	C810	*D2	C942	*C3	CL902	E2	IC252	B4	L102	D4	Q509	C2	R64	*D4	R201	C4	R329	*B4	R441	*D3	R605	A3	R731	*A3
C22	D3	C176	C4	C305	*B3	C423	D3	C542	*C2	C661	B3	C811	*D2	C943	*C3	CL903	E2	IC253	B4	L103	C3	Q510	D2	R65	*D4	R202	C4	R330	B4	R442	*D3	R606	*A3	R732	*A3
C23	E3	C177	C4	C308	B3	C424	*D3	C543	*C2	C662	*B3	C812	*D1	C944	B3	CL904	D1	IC255	B4	L151	D4	Q601	*B3	R66	*C4	R203	*C4	R331	*B4	R444	D3	R607	*B2	R733	A2
C24	*D3	C178	C4	C309	*B4	C425	*D3	C544	D2	C663	*B1	C813	*D1	C945	*B3	CL905	D1	IC256	B4	L152	D4	Q602	*B3	R101	D4	R204	B3	R332	*B4	R445	*E1	R608	*B2	R734	A2
C25	*D3	C179	C4	C310	*B4	C426	*D3	C545	D2	C664	*B2	C814	*C1	C946	*B3	CL906	A1	IC257	*A4	L153	C3	Q603	B3	R102	*D4	R205	B3	R333	B4	R446	D2	R609	*B2	R735	*A3
C26	D3	C181	*C3	C311	*B4	C427	*D3	C546	D2	C665	A2	C815	*C1	C947	*C3	CL907	B1	IC301	B3	L201	*C3	Q604	*B3	R103	*D4	R206	*C4	R334	B4	R447	D2	R610	*B2	R736	A3
C27	D3	C183	*C4	C312	B3	C428	*D2	C547	D2	C667	*A3	C816	*D1	C948	*C3	CL908	C2	IC302	B4	L202	*C4	Q605	*B2	R104	*D4	R207	*C3	R335	B4	R448	D2	R611	A3	R737	A3
C28	E4	C184	*C4	C313	B3	C429	D2	C548	C3	C668	B3	C817	*C1	C949	B3	CL909	A3	IC303	B4	L251	*B3	Q606	*B2	R105	*D4	R208	C3	R336	B4	R449	*D2	R612	*B3	R738	A2
C29	E4	C185	*C4	C314	B4	C430	D2	C549	*C2	C669	B2	C818	*C2	C950	*C1	CL941	A3	IC304	B3	L301	*B3	Q607	*B3	R106	*D4	R209	C3	R337	A1	R450	D2	R613	*B3	R739	A2
C30	E4	C186	*C4	C315	B4	C431	*D3	C550	D2	C675	*B2	C821	*C1	C951	*B3	CL944	B1	IC305	B4	L302	*A4	Q608	B3	R107	D4	R210	C4	R338	*B3	R451	*D2	R614	*B2	R740	A3
C31	E4	C187	*C4	C316	B4	C432	*D2	C551	D2	C676	*B2	C822	*C1	C952	*B3	CL945	D2	IC306	B4	L351	*A3	Q609	B2	R108	*D1	R211	C3	R339	*B4	R452	D2	R615	B3	R741	A3
C32	*D4	C188	*C4	C317	B4	C433	*D3	C552	*C2	C677	B2	C823	*C2	C953	*C3	CL946	A3	IC307	B3	L401	*D3	Q610	B2	R109	*D4	R212	C3	R340	*B4	R453	D2	R616	B3	R742	A3
C33	*D3	C189	*C4	C318	B4	C434	D3	C553	D2	C701	*A2	C824	*C2	C954	*C3	CL947	A1	IC308	*B4	L402	*D3	Q701	*A3	R110	*D4	R213	C3	R341	*B4	R454	D1	R617	B3	R743	*A3
C34	*C3	C190	*C4	C319	B4	C435	*D2	C554	D2	C702	*A3	C825	C1	C955	*C3	CL948	B1	IC351	A3	L403	*D2	Q702	*A3	R111	*D4	R214	C4	R342	*B4	R455	*D3	R618	B3	R744	*A3
C35	*D3	C201	*C3	C320	B4	C436	*D3	C555	D2	C703	*A3	C826	*C1	C956	*C3	CL951	C2	IC352	A4	L404	*D2	Q703	A3	R112	*D1	R215	*B3	R343	*B4	R456	*D3	R619	B3	R745	*A3
C36	*D3	C202	*C3	C321	B4	C437	*D2	C556	D2	C704	*A3	C827	*C2	C957	*B3	CL952	C2	IC353	A4	L405	*D2	Q704	*A3	R113	C4	R216	*C3	R344	*B4	R457	*D3	R620	B2	R747	A3
C37	*D3	C203	C4	C323	*B3	C438	*D3	C557	D2	C705	*A3	C828	*C2	C958	*C3	CL953	C2	IC355	A4	L406	D2	Q705	*A2	R114	C4	R219	C4	R345	*B4	R458	*D3	R621	*B3	R748	A2
C38	*D3	C204	C4	C324	B4	C439	D3	C558	D2	C706	*A3	C829	*C2	C959	*C3	CL954	C2	IC356	A4	L407	D1	Q706	*A2	R115	C4	R220	C4	R346	*B4	R459	D2	R622	*B2	R749	A2
C39	*D4	C205	*C3	C326	*B4	C440	*D3	C559	*C3	C707	*A3	C830	*C2	C960	*B3	CL955	C2	IC401	*D2	L408	*D3	Q707	*A3	R116	*C3	R223	*C3	R347	*B4	R475	*D2	R623	*B2	R750	A2
C40	D3	C208	B3	C327	*B4	C441	*D3	C560	C3	C708	*A3	C831	*C1	C961	*C2	CL957	B1	IC402	D3	L409	*D3	Q708	A3	R117	C4	R224	*C3	R348	*B4	R476	*D2	R624	*A3	R751	*A2
C41	*D3	C209	*C4	C328	*B4	C442	*D2	C561	*C3	C709	*A2	C832	*C1	C962	*C2			IC403	D2	L501	*C3	Q709	A2	R118	C4	R229	*B4	R349	*B4	R477	*D2	R625	A3	R752	A2
C42	*D3	C210	*C4	C329	*B4	C443	*D2	C562	*C3	C710	*A2	C838	*D2	C963	B2	CN1	*D4	IC404	*D1	L502	*C3	Q710	A2	R119	C4	R230	B4	R350	*B4	R478	*D2	R626	A3	R753	*A2
C43	D3	C211	*C4	C330	B4	C444	D2	C563	*D3	C711	*A2	C839	*C2	C964	*B3	CN2	*C4	IC405	*E1	L503	*C2	Q941	*B3	R120	C3	R231	*B4	R351	A4	R479	D2	R627	*B2	R754	A2
C44	D3	C212	C3	C331	B4	C445	D2	C564	*C3	C712	*A2	C840	*C1	C965	*B2	CN3	*B4	IC406	*E1	L504	*D2	Q942	*C3	R121	C4	R232	*B4	R352	A4	R480	D2	R628	*B2	R755	A2
C45	D3	C213	C3	C332	B4	C446	D2	C565	*D1	C713	*A2	C851	*B1	C966	*C2	CN4	*B4	IC501	*C2	L505	*C2	Q943	*C3	R122	C4	R233	B4	R354	A3	R501	C3	R629	B2	R756	*A3
C46	*E3	C214	C4	C333	B4	C447	D2	C566	*C2	C714	*A2	C852	*B1	C967	*C2	CN301	*B1	IC502	C3	L506	D2	Q944	*B3	R123	C4	R234	B4	R355	A3	R502	C3	R630	B3	R758	A1
C47	*E2	C215	C4	C334	B4	C448	D3	C567	C2	C715	*A2	C853	A1	C968	B3	CN302	*D1	IC503	C2	L507	C1	Q945	*C2	R124	*C4	R235	B4	R356	*A4	R503	C3	R631	*B3	R759	*A3
C48	*E2	C216	C4	C335	B4	C449	*D2	C569	*E1	C716	A3	C854	*A2	C969	*B2	CN401	D2	IC504	*D1	L508	*C3	Q946	*C2	R125	*C4	R236	B4	R357	*A3	R504	C3	R632	*B3	R760	*A3
C49	C4	C217	C4	C336	*A4	C450	D2	C570	C3	C717	A3	C855	*B2	C970	*B2	CN501	D2	IC601	*B2	L509	*C3			R128	C4	R237	B1	R358	A3	R505	C3	R633	B2	R761	*A3
C50	D4	C218	C4	C337	*A4	C451	D2	C571	C2	C718	A2	C856	*A2	C971	*C2	CN601	B2	IC602	B3	L601	*B3	R1	*E2	R130	C4	R238	*B3	R359	A3	R506	*C3	R634	B2	R762	*A3
C51	*D2	C219	C4	C338	*B3	C452	*D2	C575	*C2	C719	A3	C857	*B1	C972	*C2	CN701	A2	IC603	B2	L602	*B3	R2	E3	R131	*C4	R239	*C4	R360	A4	R507	*C2	R635	*B3	R763	A2
C52	*D2	C220	C4	C339	*A3	C453	D2	C576	*D2	C720	*A3	C858	*B1	C973	*C2			IC604	*B1	L603	*A2	R3	E3	R132	*C4	R240	*C4	R361	A3	R508	*C2	R636	B3	R775	*A2
C101	D4	C221	C4	C340	*A3	C454	D2	C577	D2	C721	A3	C859	*B2	C974	*C2	D1	*E3	IC605	*A3	L604	*B2	R4	D4	R134	*C3	R241	*C4	R362	A3	R509	*C2	R637	B3	R776	*A2
C102	*D4	C223	*C3	C351	*A3	C455	D2	C601	*B2	C722	*A3	C860	*B2	C975	*C2	D2	*D3	IC701	*A2	L605	*B2	R5	E3	R135	*C3	R242	*C4	R363	A3	R510	*C2	R638	B2	R777	*A2
C103	*D4	C224	B4	C352	*A3	C456	D2	C602	*B3	C723	*A3	C861	*B2	C976	*C3	D3	*E3	IC702	A3	L606	B2	R6	*D1	R137	*C4	R243	*C4	R364	A4	R511	*C3	R639	B2	R778	*A2
C104	D4	C226	*B4	C353	A4	C457	D2	C603	*B3	C724	*A3	C862	*B2	C977	*B2	D4	*D3	IC703	A2	L607	B1	R7	*E2	R138	*C4	R244	*C4	R365	*A3	R512	*D2	R640	B3	R779	A2
C106	*D4	C227	*B4	C354	A4	C458	D2	C604	*B3	C725	*A3	C863	*A2	C978	*E1	D5	*D3	IC704	*A1	L608	*A3	R8	*D1	R139	*C4	R245	*C4	R366	*A3	R513	*D1	R641	B3	R780	A2
C107	*D4	C228	*B4	C355	*A3	C459	*D3	C605	*B3	C726	*A2	C867	*A1	C979	*E1	D6	*D3	IC801	*D1	L609	*B3	R9	E4	R140	*C4	R246	*C4	R369	A4	R514	C3	R642	B3	R801	*D1
C108	*D4	C229	*B4	C358	A3	C460	D3	C606	*B3	C727	A3	C868	*A1	C981	*B2	D101	*D4	IC802	D2	L701	*A3	R10	*D1	R141	*C4	R247	*C4	R370	B4	R515	C3	R643	*B3	R802	*D1
C109	*D4	C230	B4	C359	*A4	C461	*D3	C607	*A3	C728	A2	C869	A1	C982	*C2	D151	*D4	IC803	C1	L702	*A3	R11	*D3	R142	*C4	R248	*C4	R373	*A3	R516	C3	R644	*B3	R803	*D1
C110	*D4	C231	B4	C360	*A4	C462	*D3	C608	*B3	C729	A2	C870	*A2	C983	*B2			IC804	C1	L703	*A2	R12	D3	R143	*C4	R249	*B4	R374	*A3	R517	C2	R645	*B3	R804	*D1
C111	C3	C232	B4	C361	*A4	C463	*D3	C609	*B2	C730	*A2	C871	*A2	C984	*B2	DL403	D3	IC805	D1	L704	*A2	R13	D3	R144	*C4	R250	*C4	R379	*A4	R518	*C3	R647	B3	R805	*D1
C112	C3	C233	B4	C362	A3	C464	*D3	C610	*B2	C731	*A3	C872	*A2	C985	*C1	DL503	D3	IC806	*D1	L705	*A2	R14	D3	R145	*C4	R251	B4	R380	A4	R519	*C2	R648	B2	R806	*D1
C113	C4	C234	B4	C363	A3	C465	*D1	C611	*B2	C732	A3	C873	*A1	C986	*B1	DL603	B3	IC807	*C1	L706	A2	R15	E3	R146	*C4	R252	B4	R381	*A4	R520	*C2	R649	B2	R807	*B1
C114	C4	C235	B4	C364	A4	C466	*D2	C612	*B2	C733	*A2	C874	*A1	C987	*C1	DL703	A3	IC808	C2	L707	A1	R16	D3	R147	C4	R254	B3	R382	*A4	R521	*E1	R650	B2	R808	*B1
C115	*C3	C236	C4	C365	A4	C467	D2	C613	*B2	C734	*A3	C875	*A2	C988	C1			IC809	C1	L708	*A3	R17	E3	R148	*C4	R255	B3	R383	A4	R522	C3	R651	*B2	R809	*D1
C116	C3	C237	C4	C366	A4	C469	*E1	C614	*B2	C735	*A2	C876	*A2	C989	C1	E401	D3	IC810	*C1	L709	*A3	R18	*E3	R149	*D1	R256	*B4	R384	A4	R523	C3	R652	B2	R810	*D2
C117	C4	C238	*B3	C367	A4	C470	D3	C615	*B2	C736	*A3	C877	*A2			E501	C3	IC851	*B1	L801	*D1	R19	A1	R150	*D1	R257	*B3	R385	A4	R524	*C2	R653	*A2	R811	D1
C118	C4	C239	*B3	C368	A4	C471	D2	C616	A3	C737	A3	C883	*B2	CL1	D4	E502	C1	IC852	B2	L802	*D2	R20	E3	R151	C4	R258	B3	R386	B4	R525	*D2	R654	A2	R812	*C1
C119	C4	C240	*B3	C369	A4	C475	*D2	C617	A3	C738	*A3	C884	*A2	CL2	D4	E601	A3	IC853	A1	L803	*C1	R21	E3	R152	*D4	R259	B3	R387	B4	R526	C2	R655	A2	R814	D2
C120	C3	C251	*B3	C370	A4	C476	*D2	C618	B2	C739	*A3	C885	B1	CL3	E3	E701	A3	IC854	*A1	L805	*C1	R22	E3	R153	*D4	R260	B4	R388	A4	R527	C3	R656	*A3	R821	*C1
C121	C3	C252	*B3	C371	A4	C477	D2	C619	A3	C740	*A2	C886	B1	CL4	E3	E702	A1	IC855	A2	L806	*C2	R23	E3	R154	*C4	R261	B3	R389	*B4	R528	*C3	R657	A1	R822	*C1
C122	C4	C253	B4	C373	*A3	C501	*C2	C620	*B3	C741	*A2	C887	B1	CL5	D4	E941	C3	IC856	A1	L851	*B1	R24	D3	R155	*D4	R262	B3	R401	D3	R529	*D3	R658	*A3	R823	*C1
C123	C4	C254	B4	C374	A4	C502	*D3	C621	B3	C742	A2	C901	*A1	CL6	E3			IC857	B1	L852	*A2	R25	*D3	R156	*C4	R263	B3	R402	D3	R530	D2	R659	*B3	R824	*C1
C124	C4	C255	*B3	C376	*A4	C503	*C3	C622	*B3	C743	A2	C902	D1	CL7	D3	FL401	D2	IC901	D1	L854	*A1	R26	*E3	R157	D4	R264	B4	R403	D3	R531	D2	R660	*B3	R825	*C1
C125	C4	C258	B3	C377	*A4	C504	*C3	C623	*B3	C744	A2	C903	*D1	CL8	E3	FL501	C2	IC902	D1	L855	*A2	R27	*E3	R158	*C1	R265	*B3	R404	D3	R532	*D3	R661	*B3	R826	*C1
C126	C4	C259	*B4	C378	*A4	C505	*C3	C624	*B3	C745	A2	C904	A1	CL9	D3	FL601	B2	IC903	A1	L857	B1	R28	E3	R159	*C4	R266	*B3	R405	D3	R533	C3	R663	B2	R827	*C2
C127	C4	C260	*B4	C379	*A4	C506	*C3	C625	*B3	C746	A3	C905	*E2	CL10	D4	FL701	A2	IC904	E3	L901	*D1	R29	D3	R160	*C4	R269	B4	R406	*D3	R534	D3	R675	*B2	R828	C1
C128	C4	C261	*B4	C380	A4	C507	*C3	C626	*B2	C747	*A2	C906	*E2	CL11	D4	FL941	C3	IC905	A1	L902	E2	R30	*D3	R161	*C4	R270	B4	R407	*D2	R535	D2	R676	*B2	R831	C2
C129	C4	C262	B3	C381	A4	C508	*C3	C627	B2	C748	A2	C907	*E2	CL12	C4	FL942	C3	IC906	C2	L903	E1	R31	*E3	R162	*D1	R273	*B3	R408	*D2	R536	D2	R677	*B2	R837	C1
C131	*C3	C263	B3	C382	A4	C509	*C2	C628	B2	C749	A2	C908	*A1	CL13	D3	FL943	C2	IC907	D1	L941	*C3	R32	D3	R163	C4	R274	*B3	R409	*D2	R537	C3	R678	*B2	R838	C1
C133	*C4	C264	B4	C383	A4	C510	*C2	C629	*B2	C750	*A2	C909	D1	CL14	D4	FL944	C2	IC909	E3	L942	*B3	R33	D3	R164	C4	R279	*B4	R410	*D2	R538	D3	R679	B2	R839	C1
C134	*C4	C265	B4	C384	A4	C511	*C2	C630	*B3	C751	A2	C910	*D1	CL15	D4			IC910	E1	L943	*C3	R34	D3	R165	C4	R280	B4	R411	*D3	R539	D3	R680	B2	R840	C1
C135	*C4	C266	B4	C385	A4	C512	*C2	C631	B3	C752	A2	C911	*E2	CL20	A1	IC1	D4	IC911	C1	L944	*B2	R35	*D3	R166	*C3	R281	*B4	R412	*D2	R540	*C3	R701	A3	R841	C1
C136	*C4	C267	B4	C386	*B4	C513	*C2	C632	*B2	C753	A2	C912	D1	CL21	A1	IC2	E3	IC912	B1	L981	C1	R36	*E2	R167	C4	R282	*B4	R413	*D1	R541	*C3	R702	A3	R842	C1
C137	*C4	C268	B4	C387	*B4	C514	*C2	C633	*B3	C754	A2	C913	*A1	CL101	D4	IC3	E3	IC913	B1			R37	C4	R168	C4	R283	B4	R414	D3	R542	*D3	R703	A3	R851	B1
C138	*C4	C269	B4	C388	*B4	C515	*C2	C634	*B2	C755	A2	C914	*E2	CL102	D4	IC4	D3	IC914	A3	PS901	E2	R38	*D1	R169	C4	R284	B4	R415	D3	R544	D3	R704	A3	R852	B1
C139	*C4	C270	B4	C389	*B4	C516	C3	C635	*B3	C756	A2	C915	*E2	CL103	C4	IC5	D4	IC916	B1	PS903	D1	R39	*E2	R170	C3	R285	B4	R416	D3	R545	*E1	R705	A3	R853	*B1
C140	*C4	C271	B4	C390	*B4	C517	*C3	C636	B3	C757	*A3	C916	*E2	CL104	D4	IC6	*E4	IC941	A3			R40	*D4	R171	C4	R286	B4	R417	D2	R546	C2	R706	*A3	R854	*A1
C151	D4	C273	*B3	C391	*B4	C518	C3	C637	*B3	C758	A3	C917	*E2	CL105	C3	IC7	*E2	IC942	B3	Q1	D3	R41	*E4	R172	C4	R287	C4	R418	*D3	R547	C2	R707	*A2	R855	*A1
C152	*D4	C274	B4	C392	*B4	C519	C3	C638	*B3	C759	*A3	C918	*A4	CL106	C3	IC8	*E2	IC943	B3	Q102	*C4	R42	*C3	R173	C4	R288	B4	R419	*D2	R548	C2	R708	*A2	R857	B1
C153	*D4	C276	*B4	C401	*D2	C520	D2	C639	*B2	C760	*A3	C919	*B1	CL201	C3	IC9	D4	IC944	B3	Q152	*C4	R43	C3	R174	*C4	R289	*C4	R420	*D2	R549	*C2	R709	*A2	R858	B1

R859	*B2	R991	*C2
R860	*A2	R992	*C2
R861	B2	R993	*C2
R862	B1	R994	*C2
R863	B1	R995	*C3
R864	B1	R996	E2
R865	B1	R997	A3
R866	B1	R998	*E2
R867	B1	R999	*E2
R868	A1	R1000	A4
R869	*A1	R1001	B3
R870	*A1	R1002	B3
R871	*A1	R1003	*B1
R872	A1	R1004	B1
R873	A1	R1012	*C2
R874	B1	R1013	*C2
R876	A2	R1014	*C1
R901	*E2	R1015	*B1
R902	*E2	R1016	*C1
R903	*D2	R1017	*B1
R904	*D2	R1018	*B1
R905	C1	R1019	*B1
R906	C2	R1024	C2
R907	C2		
R921	*B2	RB1	*E2
R922	*B1	RB2	*E2
R923	B1	RB3	E2
R924	B1	RB4	E2
R925	B1	RB801	*D1
R926	B1	RB802	*D1
R927	*B1	RB803	D2
R928	A1	RB804	D2
R929	B1	RB805	C2
R930	B1	RB806	C2
R931	E2	RB851	*B1
R932	B1	RB852	*B1
R933	B1	RB853	B1
R934	B1	RB854	*A1
R937	*B1	RB855	*A1
R938	*B1	RB856	A1
R939	*B1	RB857	B2
R940	A3	RB858	B2
R941	A3	RB859	A2
R942	A4	RB860	A2
R943	E2	RB901	C1
R944	E2	RB902	B1
R945	B3	RB903	B1
R946	B3	RB945	*B1
R947	B3	RB981	C2
R948	B3	RB982	C1
R949	*B3	RB983	C1
R950	B3	RB984	C1
R951	*C3	RB985	B1
R952	*B3	RB986	B1
R953	*B3	RB987	*B2
R954	*B3	RB988	*B1
R955	*B3		
R956	*C3	S941	E2
R957	*C3	S942	E2
R958	C3		
R959	*B3	TP401	D3
R960	C3	TP402	D2
R961	*B3	TP403	D1
R962	*C3	TP404	D3
R963	*C3	TP405	D2
R964	*C3	TP501	C3
R965	*C3	TP502	C2
R966	*C3	TP503	D1
R967	*C3	TP504	D3
R968	*C3	TP505	C2
R969	*C3	TP601	B3
R970	B3	TP602	B2
R971	B2	TP603	A2
R972	*C1	TP604	B3
R973	B2	TP605	B2
R974	B3	TP701	A3
R975	*B2	TP702	A2
R976	B2	TP703	A2
R977	*C2	TP704	A3
R978	*B2	TP705	A2
R979	*B2		
R980	*B2	*:B SIDE	
R981	*B2		
R982	*C2		
R983	*C2		
R984	C3		
R985	*B2		
R986	C3		
R987	*B2		
R988	*C2		
R989	*C2		
R990	*C2		

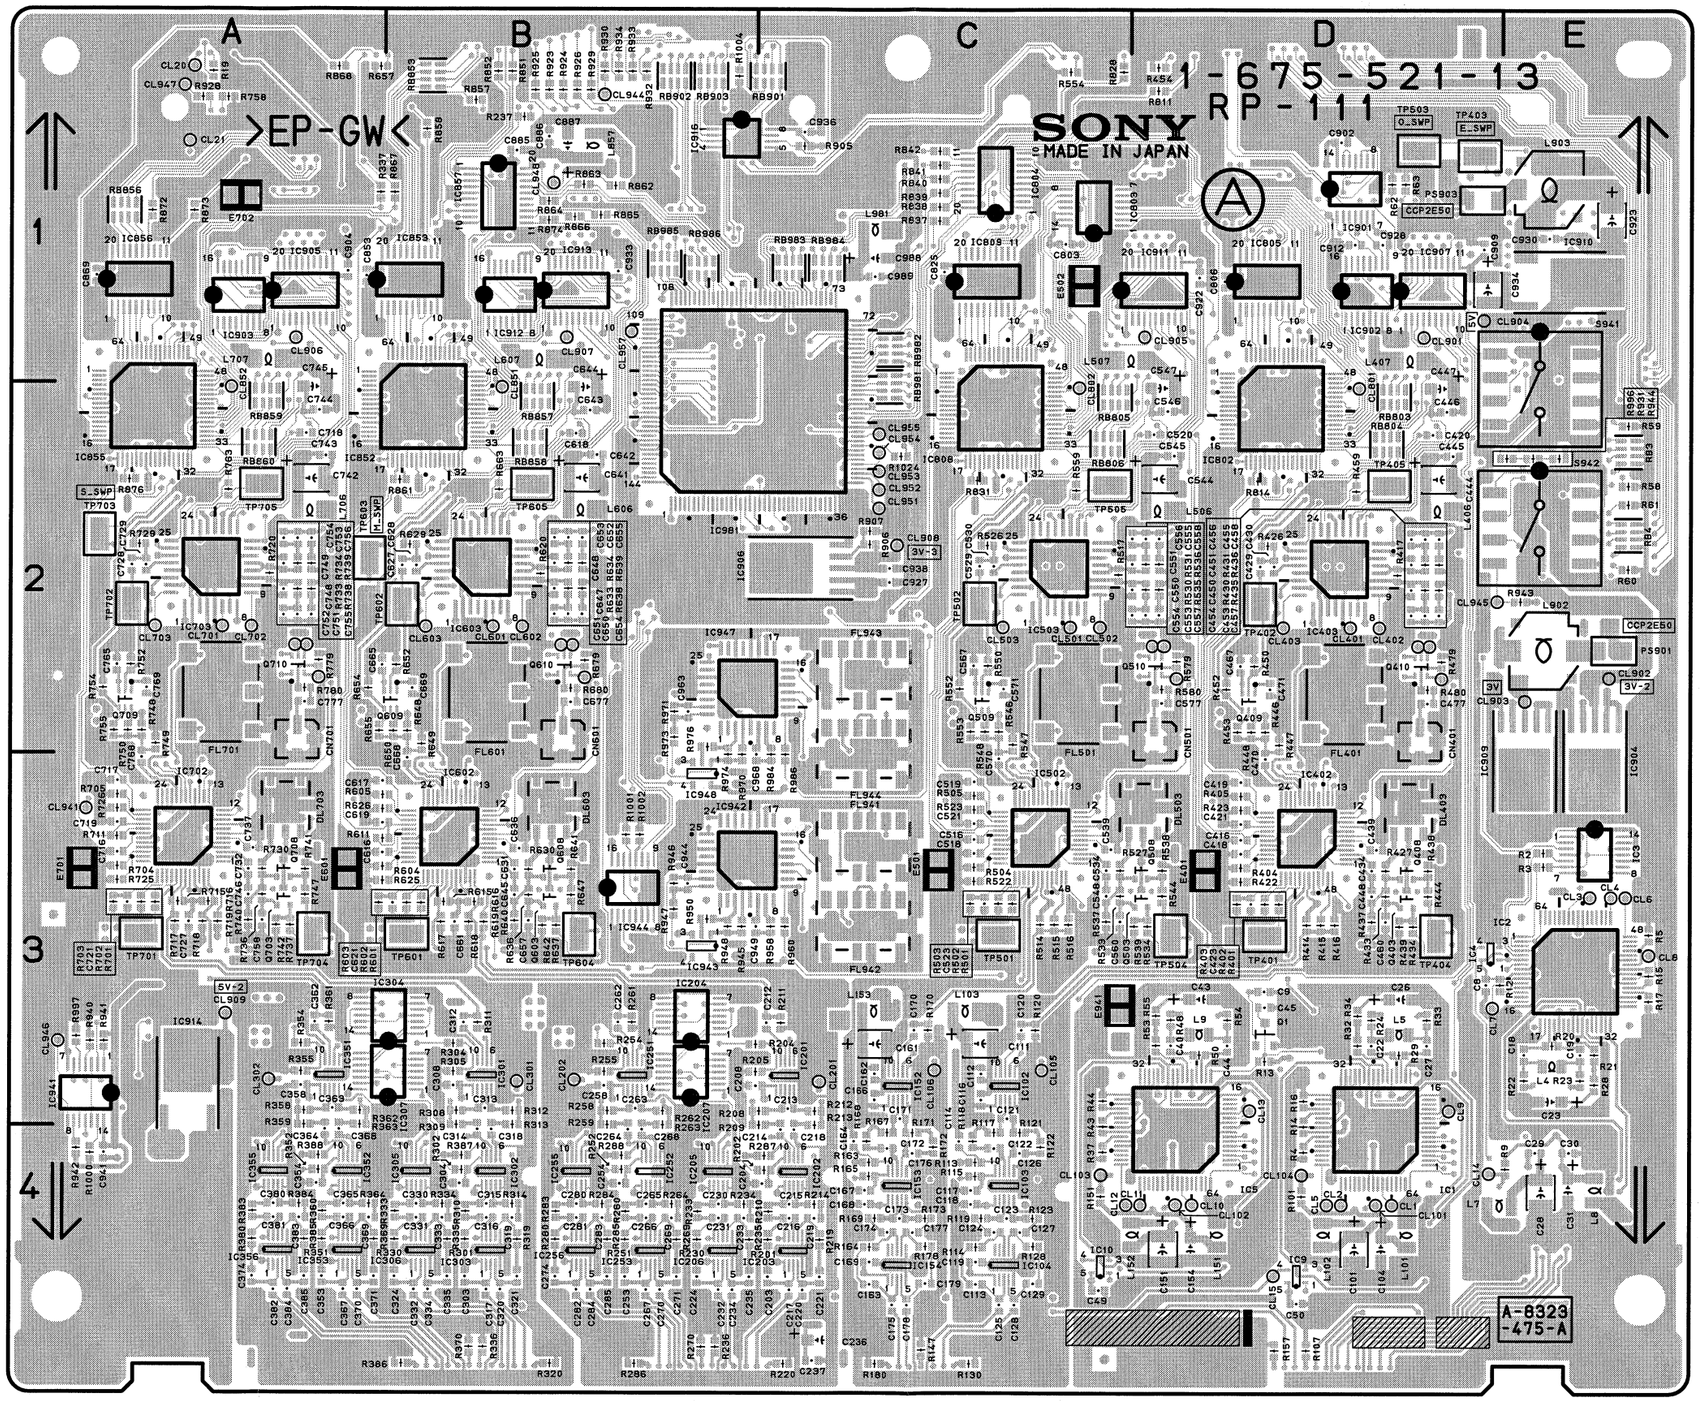

RP-111 -A SIDE-
SUFFIX: -13

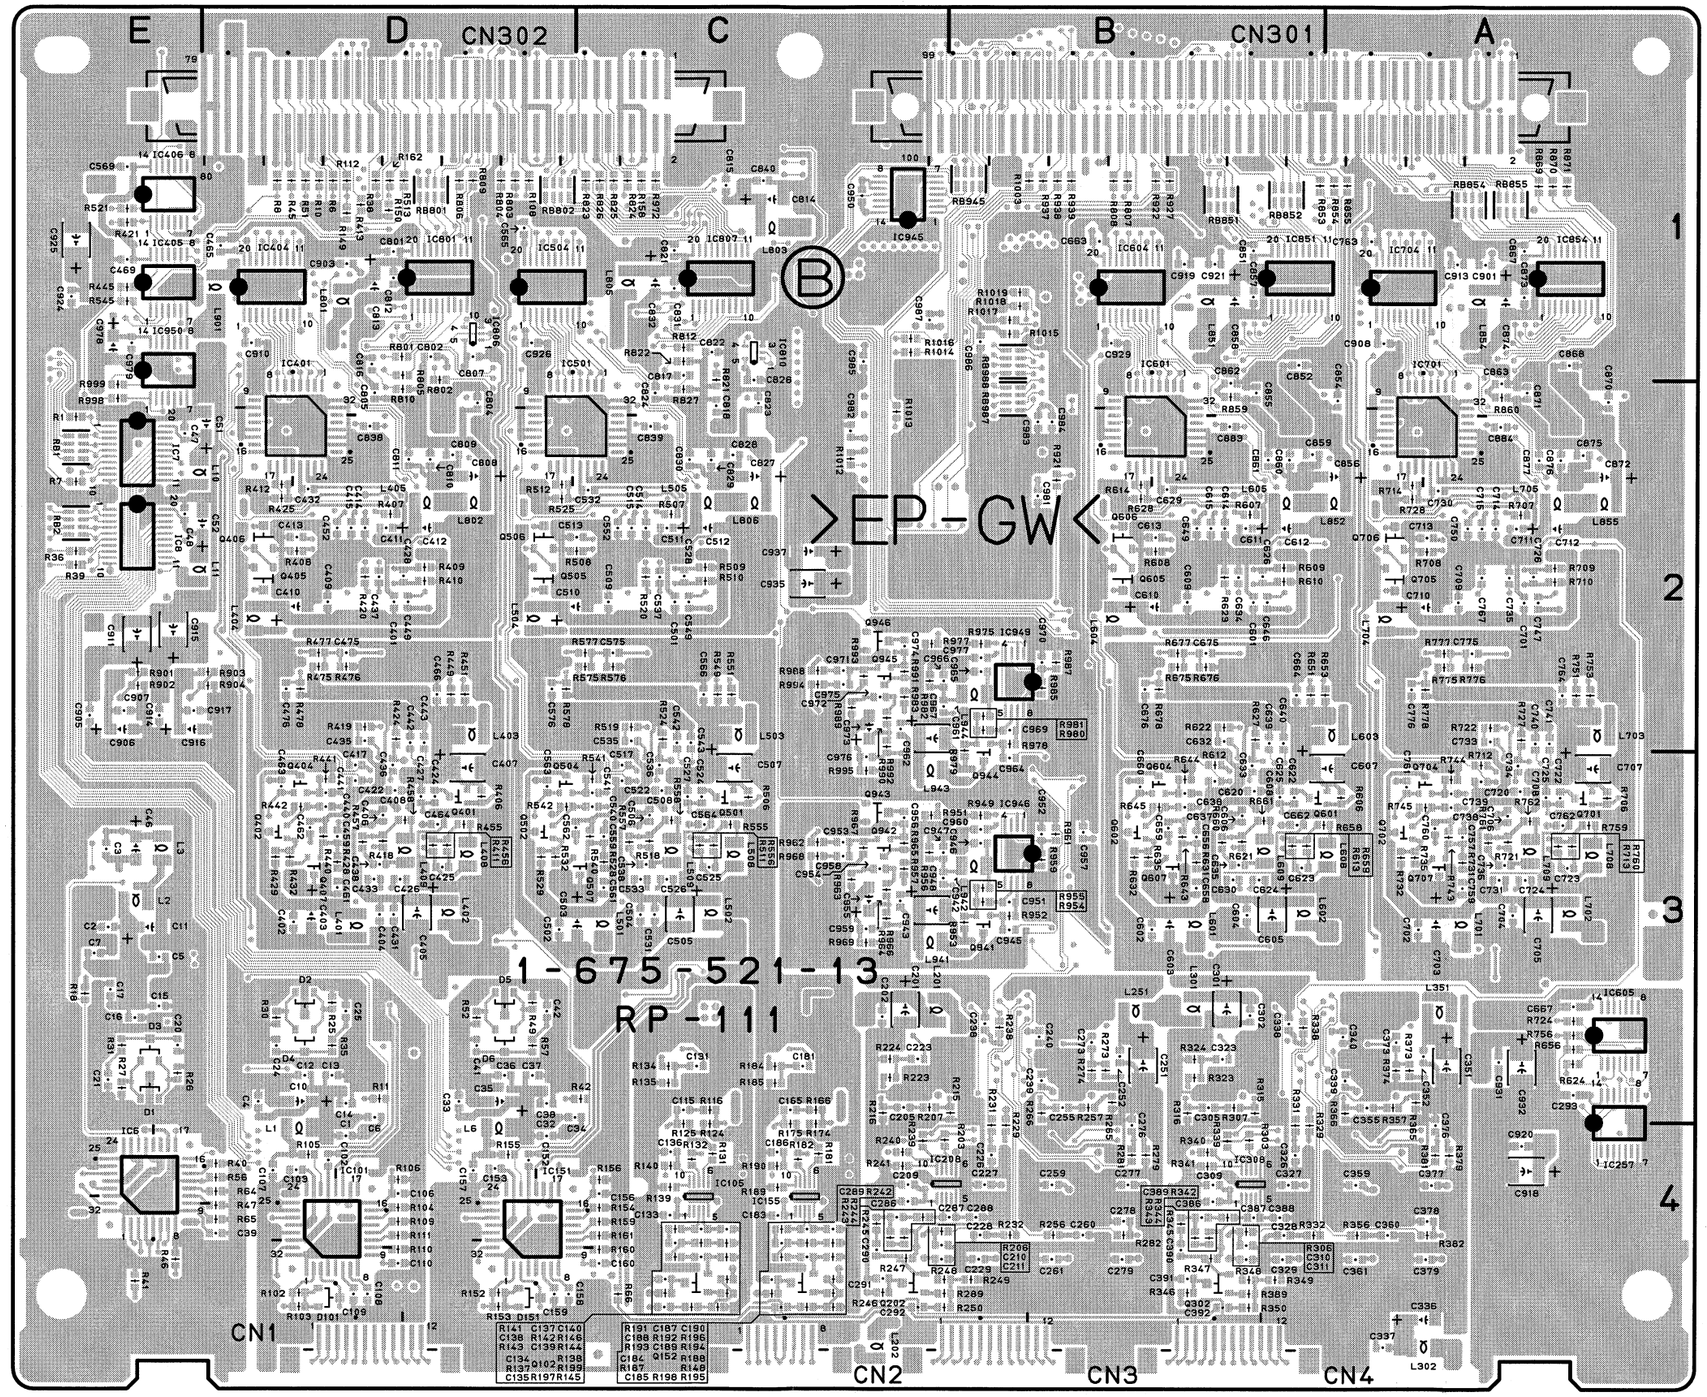

RP-111 -B SIDE-
SUFFIX: -13

RP-111 (1-675-521-12)

C1	*D4	C154	D4	C277	*B4	C402	*D3	C521	C3	C640	*B2	C761	*A3	C920	*A4	CL202	B3	IC10	C4	IC945	*C1	Q202	*C4	R44	C3	R175	*C4	R301	B4	R421	*E1	R550	C2	R710	*A2
C2	*E3	C156	*C4	C278	*B4	C403	*D3	C522	*C3	C641	B2	C762	*A3	C921	*B1	CL301	B3	IC101	*D4	IC946	*B3	Q302	*B4	R45	*D1	R178	C4	R302	B4	R422	D3	R551	*C2	R711	A3
C3	*E3	C157	*D4	C279	*B4	C404	*D3	C523	C3	C642	B2	C763	*A1	C922	D1	CL302	A3	IC102	C3	IC947	B2	Q401	*D3	R46	*E4	R180	C4	R303	*B4	R423	D3	R552	C2	R712	*A3
C4	*D3	C158	*D4	C280	B4	C405	*D3	C524	*C3	C643	B2	C764	*A2	C923	E1	CL401	D2	IC103	C4	IC948	B3	Q402	*D3	R47	*D4	R181	*C4	R304	B3	R424	*D2	R553	C2	R713	*A3
C5	*E3	C159	*D4	C281	B4	C406	*D3	C525	*C3	C644	B2	C765	A2	C924	*E1	CL402	D2	IC104	C4	IC949	*B2	Q403	D3	R48	D3	R182	*C4	R305	B3	R425	*D2	R554	C1	R714	*A2
C6	*D3	C160	*C4	C282	B4	C407	*D3	C526	*C3	C645	B3	C767	*A2	C925	*E1	CL403	D2	IC105	*C4	IC950	*E2	Q404	*D3	R49	*D3	R184	*C3	R306	*B4	R426	D2	R555	*C3	R715	A3
C7	*E3	C161	C3	C283	B4	C408	*D3	C527	*C3	C646	*B2	C768	A3	C926	*D1	CL501	C2	IC151	*D4	IC981	B2	Q405	*D2	R50	D3	R185	*C3	R307	*B3	R427	D3	R556	*C3	R716	A3
C8	D3	C162	C3	C284	B4	C409	*D2	C528	*C2	C647	B2	C769	A2	C927	C2	CL502	C2	IC152	C3			Q406	*D2	R51	*D1	R187	*C4	R308	B3	R428	*D3	R557	*C3	R717	A3
C9	D3	C163	C4	C285	B4	C410	*D2	C529	C2	C648	B2	C775	*A2	C928	D1	CL503	C2	IC153	C4	L1	*D4	Q407	*D3	R52	*D3	R188	*C4	R309	B3	R429	*D3	R558	*C3	R718	A3
C10	*D3	C164	C4	C286	*C4	C411	*D2	C530	C2	C649	*B2	C776	*A2	C929	*B1	CL601	B2	IC154	C4	L2	*E3	Q408	D3	R53	D3	R189	*C4	R310	B4	R430	D2	R559	C2	R719	A3
C11	*E3	C165	*C3	C287	*B4	C412	*D2	C531	*C3	C650	B2	C777	A2	C930	E1	CL602	B2	IC155	*C4	L3	*E3	Q409	D2	R54	D3	R190	*C4	R311	B3	R431	D2	R575	*C2	R720	A2
C12	*D3	C166	C3	C288	*B4	C413	*D2	C532	*C2	C651	B2	C801	*D1	C931	*A3	CL603	B2	IC201	C3	L4	E3	Q410	D2	R55	D3	R191	*C4	R312	B3	R432	*D3	R576	*C2	R721	*A3
C13	*D3	C167	C4	C289	*C4	C414	*D2	C533	*C3	C652	B2	C802	*D1	C932	*A3	CL701	A2	IC202	C4	L5	D3	Q501	*C3	R56	*D4	R192	*C4	R313	B3	R433	D3	R577	*C2	R722	*A2
C14	*D3	C168	C4	C290	*C4	C415	*D2	C534	C3	C653	B2	C803	C1	C933	B1	CL702	A2	IC203	C4	L6	*D4	Q502	*D3	R57	*D3	R193	*C4	R314	B4	R434	D3	R578	*D2	R724	*A3
C15	*E3	C169	C4	C291	*C4	C416	D3	C535	*C2	C654	B2	C804	*D2	C934	D1	CL703	A2	IC204	B3	L7	D4	Q503	D3	R58	E2	R194	*C4	R315	*B3	R435	D2	R579	D2	R725	A3
C16	*E3	C170	C3	C292	*C4	C417	*D3	C536	*C3	C655	B2	C805	*D2	C935	*C2	CL801	D2	IC205	B4	L8	E4	Q504	*D3	R59	E2	R195	*C4	R316	*B3	R436	D2	R580	D2	R726	A3
C17	*E3	C171	C3	C293	*A3	C418	D3	C537	*C2	C656	*B3	C806	D1	C936	C1	CL802	C2	IC206	B4	L9	D3	Q505	*D2	R60	E2	R196	*C4	R319	B4	R437	D3	R601	B3	R727	*A2
C18	E3	C172	C4	C301	*B3	C419	D3	C538	*C3	C657	B3	C807	*D1	C937	*C2	CL851	B2	IC207	B3	L10	*E2	Q506	*D2	R61	E2	R197	*C4	R320	B4	R438	D3	R602	B3	R728	*A2
C19	E3	C173	C4	C302	*B3	C420	D2	C539	C3	C658	*B3	C808	*D2	C938	C2	CL852	A2	IC208	*C4	L11	*E2	Q507	*C3	R62	D1	R198	*C4	R323	*B3	R439	D3	R603	A3	R729	A2
C20	*E3	C174	C4	C303	B4	C421	D3	C540	*C3	C659	*B3	C809	*D2	C941	A4	CL901	D1	IC251	B3	L101	D4	Q508	D3	R63	D1	R199	*C4	R324	*B3	R440	*D3	R604	A3	R730	A3
C21	*E3	C175	C4	C304	B4	C422	*D3	C541	*C3	C660	*B3	C810	*D2	C942	*C3	CL902	E2	IC252	B4	L102	D4	Q509	C2	R64	*D4	R201	C4	R329	*B4	R441	*D3	R605	A3	R731	*A3
C22	D3	C176	C4	C305	*B3	C423	D3	C542	*C2	C661	B3	C811	*D2	C943	*C3	CL903	E2	IC253	B4	L103	C3	Q510	D2	R65	*D4	R202	C4	R330	B4	R442	*D3	R606	*A3	R732	*A3
C23	E3	C177	C4	C308	B3	C424	*D3	C543	*C2	C662	*B3	C812	*D1	C944	B3	CL904	D1	IC255	B4	L151	D4	Q601	*B3	R66	*C4	R203	*C4	R331	*B4	R444	D3	R607	*B2	R733	A2
C24	*D3	C178	C4	C309	*B4	C425	*D3	C544	D2	C663	*B1	C813	*D1	C945	*B3	CL905	D1	IC256	B4	L152	D4	Q602	*B3	R101	D4	R204	B3	R332	*B4	R445	*E1	R608	*B2	R734	A2
C25	*D3	C179	C4	C310	*B4	C426	*D3	C545	D2	C664	*B2	C814	*C1	C946	*B3	CL906	A1	IC257	*A4	L153	C3	Q603	B3	R102	*D4	R205	B3	R333	B4	R446	D2	R609	*B2	R735	*A3
C26	D3	C181	*C3	C311	*B4	C427	*D3	C546	D2	C665	A2	C815	*C1	C947	*C3	CL907	B1	IC301	B3	L201	*C3	Q604	*B3	R103	*D4	R206	*C4	R334	B4	R447	D2	R610	*B2	R736	A3
C27	D3	C183	*C4	C312	B3	C428	*D2	C547	D2	C667	*A3	C816	*D1	C948	*C3	CL908	C2	IC302	B4	L202	*C4	Q605	*B2	R104	*D4	R207	*C3	R335	B4	R448	D2	R611	A3	R737	A3
C28	E4	C184	*C4	C313	B3	C429	D2	C548	C3	C668	B3	C817	*C1	C949	B3	CL909	A3	IC303	B4	L251	*B3	Q606	*B2	R105	*D4	R208	C3	R336	B4	R449	*D2	R612	*B3	R738	A2
C29	E4	C185	*C4	C314	B4	C430	D2	C549	*C2	C669	B2	C818	*C2	C950	*C1	CL941	A3	IC304	B3	L301	*B3	Q607	*B3	R106	*D4	R209	C3	R337	A1	R450	D2	R613	*B3	R739	A2
C30	E4	C186	*C4	C315	B4	C431	*D3	C550	D2	C675	*B2	C821	*C1	C951	*B3	CL944	B1	IC305	B4	L302	*A4	Q608	B3	R107	D4	R210	C4	R338	*B3	R451	*D2	R614	*B2	R740	A3
C31	E4	C187	*C4	C316	B4	C432	*D2	C551	D2	C676	*B2	C822	*C1	C952	*B3	CL945	D2	IC306	B4	L351	*A3	Q609	B2	R108	*D1	R211	C3	R339	*B4	R452	D2	R615	B3	R741	A3
C32	*D4	C188	*C4	C317	B4	C433	*D3	C552	*C2	C677	B2	C823	*C2	C953	*C3	CL946	A3	IC307	B3	L401	*D3	Q610	B2	R109	*D4	R212	C3	R340	*B4	R453	D2	R616	B3	R742	A3
C33	*D3	C189	*C4	C318	B4	C434	D3	C553	D2	C701	*A2	C824	*C2	C954	*C3	CL947	A1	IC308	*B4	L402	*D3	Q701	*A3	R110	*D4	R213	C3	R341	*B4	R454	D1	R617	B3	R743	*A3
C34	*C3	C190	*C4	C319	B4	C435	*D2	C554	D2	C702	*A3	C825	C1	C955	*C3	CL948	B1	IC351	A3	L403	*D2	Q702	*A3	R111	*D4	R214	C4	R342	*B4	R455	*D3	R618	B3	R744	*A3
C35	*D3	C201	*C3	C320	B4	C436	*D3	C555	D2	C703	*A3	C826	*C1	C956	*C3	CL951	C2	IC352	A4	L404	*D2	Q703	A3	R112	*D1	R215	*B3	R343	*B4	R456	*D3	R619	B3	R745	*A3
C36	*D3	C202	*C3	C321	B4	C437	*D2	C556	D2	C704	*A3	C827	*C2	C957	*B3	CL952	C2	IC353	A4	L405	*D2	Q704	*A3	R113	C4	R216	*C3	R344	*B4	R457	*D3	R620	B2	R747	A3
C37	*D3	C203	C4	C323	*B3	C438	*D3	C557	D2	C705	*A3	C828	*C2	C958	*C3	CL953	C2	IC355	A4	L406	D2	Q705	*A2	R114	C4	R219	C4	R345	*B4	R458	*D3	R621	*B3	R748	A2
C38	*D3	C204	C4	C324	B4	C439	D3	C558	D2	C706	*A3	C829	*C2	C959	*C3	CL954	C2	IC356	A4	L407	D1	Q706	*A2	R115	C4	R220	C4	R346	*B4	R459	D2	R622	*B2	R749	A2
C39	*D4	C205	*C3	C326	*B4	C440	*D3	C559	*C3	C707	*A3	C830	*C2	C960	*B3	CL955	C2	IC401	*D2	L408	*D3	Q707	*A3	R116	*C3	R223	*C3	R347	*B4	R475	*D2	R623	*B2	R750	A2
C40	D3	C208	B3	C327	*B4	C441	*D3	C560	C3	C708	*A3	C831	*C1	C961	*C2	CL957	B1	IC402	D3	L409	*D3	Q708	A3	R117	C4	R224	*C3	R348	*B4	R476	*D2	R624	*A3	R751	*A2
C41	*D3	C209	*C4	C328	*B4	C442	*D2	C561	*C3	C709	*A2	C832	*C1	C962	*C2			IC403	D2	L501	*C3	Q709	A2	R118	C4	R229	*B4	R349	*B4	R477	*D2	R625	A3	R752	A2
C42	*D3	C210	*C4	C329	*B4	C443	*D2	C562	*C3	C710	*A2	C838	*D2	C963	B2	CN1	*D4	IC404	*D1	L502	*C3	Q710	A2	R119	C4	R230	B4	R350	*B4	R478	*D2	R626	A3	R753	*A2
C43	D3	C211	*C4	C330	B4	C444	D2	C563	*D3	C711	*A2	C839	*C2	C964	*B3	CN2	*C4	IC405	*E1	L503	*C2	Q941	*B3	R120	C3	R231	*B4	R351	A4	R479	D2	R627	*B2	R754	A2
C44	D3	C212	C3	C331	B4	C445	D2	C564	*C3	C712	*A2	C840	*C1	C965	*B2	CN3	*B4	IC406	*E1	L504	*D2	Q942	*C3	R121	C4	R232	*B4	R352	A4	R480	D2	R628	*B2	R755	A2
C45	D3	C213	C3	C332	B4	C446	D2	C565	*D1	C713	*A2	C851	*B1	C966	*C2	CN4	*B4	IC501	*C2	L505	*C2	Q943	*C3	R122	C4	R233	B4	R354	A3	R501	C3	R629	B2	R756	*A3
C46	*E3	C214	C4	C333	B4	C447	D2	C566	*C2	C714	*A2	C852	*B1	C967	*C2	CN301	*B1	IC502	C3	L506	D2	Q944	*B3	R123	C4	R234	B4	R355	A3	R502	C3	R630	B3	R758	A1
C47	*E2	C215	C4	C334	B4	C448	D3	C567	C2	C715	*A2	C853	A1	C968	B3	CN302	*D1	IC503	C2	L507	C1	Q945	*C2	R124	*C4	R235	B4	R356	*A4	R503	C3	R631	*B3	R759	*A3
C48	*E2	C216	C4	C335	B4	C449	*D2	C569	*E1	C716	A3	C854	*A2	C969	*B2	CN401	D2	IC504	*D1	L508	*C3	Q946	*C2	R125	*C4	R236	B4	R357	*A3	R504	C3	R632	*B3	R760	*A3
C49	C4	C217	C4	C336	*A4	C450	D2	C570	C3	C717	A3	C855	*B2	C970	*B2	CN501	D2	IC601	*B2	L509	*C3			R128	C4	R237	B1	R358	A3	R505	C3	R633	B2	R761	*A3
C50	D4	C218	C4	C337	*A4	C451	D2	C571	C2	C718	A2	C856	*A2	C971	*C2	CN601	B2	IC602	B3	L601	*B3	R1	*E2	R130	C4	R238	*B3	R359	A3	R506	*C3	R634	B2	R762	*A3
C51	*D2	C219	C4	C338	*B3	C452	*D2	C575	*C2	C719	A3	C857	*B1	C972	*C2	CN701	A2	IC603	B2	L602	*B3	R2	E3	R131	*C4	R239	*C4	R360	A4	R507	*C2	R635	*B3	R763	A2
C52	*D2	C220	C4	C339	*A3	C453	D2	C576	*D2	C720	*A3	C858	*B1	C973	*C2			IC604	*B1	L603	*A2	R3	E3	R132	*C4	R240	*C4	R361	A3	R508	*C2	R636	B3	R775	*A2
C101	D4	C221	C4	C340	*A3	C454	D2	C577	D2	C721	A3	C859	*B2	C974	*C2	D1	*E3	IC605	*A3	L604	*B2	R4	D4	R134	*C3	R241	*C4	R362	A3	R509	*C2	R637	B3	R776	*A2
C102	*D4	C223	*C3	C351	*A3	C455	D2	C601	*B2	C722	*A3	C860	*B2	C975	*C2	D2	*D3	IC701	*A2	L605	*B2	R5	E3	R135	*C3	R242	*C4	R363	A3	R510	*C2	R638	B2	R777	*A2
C103	*D4	C224	B4	C352	*A3	C456	D2	C602	*B3	C723	*A3	C861	*B2	C976	*C3	D3	*E3	IC702	A3	L606	B2	R6	*D1	R137	*C4	R243	*C4	R364	A4	R511	*C3	R639	B2	R778	*A2
C104	D4	C226	*B4	C353	A4	C457	D2	C603	*B3	C724	*A3	C862	*B2	C977	*B2	D4	*D3	IC703	A2	L607	B1	R7	*E2	R138	*C4	R244	*C4	R365	*A3	R512	*D2	R640	B3	R779	A2
C106	*D4	C227	*B4	C354	A4	C458	D2	C604	*B3	C725	*A3	C863	*A2	C978	*E1	D5	*D3	IC704	*A1	L608	*A3	R8	*D1	R139	*C4	R245	*C4	R366	*A3	R513	*D1	R641	B3	R780	A2
C107	*D4	C228	*B4	C355	*A3	C459	*D3	C605	*B3	C726	*A2	C867	*A1	C979	*E1	D6	*D3	IC801	*D1	L609	*B3	R9	E4	R140	*C4	R246	*C4	R369	A4	R514	C3	R642	B3	R801	*D1
C108	*D4	C229	*B4	C358	A3	C460	D3	C606	*B3	C727	A3	C868	*A1	C981	*B2	D101	*D4	IC802	D2	L701	*A3	R10	*D1	R141	*C4	R247	*C4	R370	B4	R515	C3	R643	*B3	R802	*D1
C109	*D4	C230	B4	C359	*A4	C461	*D3	C607	*A3	C728	A2	C869	A1	C982	*C2	D151	*D4	IC803	C1	L702	*A3	R11	*D3	R142	*C4	R248	*C4	R373	*A3	R516	C3	R644	*B3	R803	*D1
C110	*D4	C231	B4	C360	*A4	C462	*D3	C608	*B3	C729	A2	C870	*A2	C983	*B2			IC804	C1	L703	*A2	R12	D3	R143	*C4	R249	*B4	R374	*A3	R517	C2	R645	*B3	R804	*D1
C111	C3	C232	B4	C361	*A4	C463	*D3	C609	*B2	C730	*A2	C871	*A2	C984	*B2	DL403	D3	IC805	D1	L704	*A2	R13	D3	R144	*C4	R250	*C4	R379	*A4	R518	*C3	R647	B3	R805	*D1
C112	C3	C233	B4	C362	A3	C464	*D3	C610	*B2	C731	*A3	C872	*A2	C985	*C1	DL503	D3	IC806	*D1	L705	*A2	R14	D3	R145	*C4	R251	B4	R380	A4	R519	*C2	R648	B2	R806	*D1
C113	C4	C234	B4	C363	A3	C465	*D1	C611	*B2	C732	A3	C873	*A1	C986	*B1	DL603	B3	IC807	*C1	L706	A2	R15	E3	R146	*C4	R252	B4	R381	*A4	R520	*C2	R649	B2	R807	*B1
C114	C4	C235	B4	C364	A4	C466	*D2	C612	*B2	C733	*A2	C874	*A1	C987	*C1	DL703	A3	IC808	C2	L707	A1	R16	D3	R147	C4	R254	B3	R382	*A4	R521	*E1	R650	B2	R808	*B1
C115	*C3	C236	C4	C365	A4	C467	D2	C613	*B2	C734	*A3	C875	*A2	C988	C1			IC809	C1	L708	*A3	R17	E3	R148	*C4	R255	B3	R383	A4	R522	C3	R651	*B2	R809	*D1
C116	C3	C237	C4	C366	A4	C469	*E1	C614	*B2	C735	*A2	C876	*A2	C989	C1	E401	D3	IC810	*C1	L709	*A3	R18	*E3	R149	*D1	R256	*B4	R384	A4	R523	C3	R652	B2	R810	*D2
C117	C4	C238	*B3	C367	A4	C470	D3	C615	*B2	C736	*A3	C877	*A2			E501	C3	IC851	*B1	L801	*D1	R19	A1	R150	*D1	R257	*B3	R385	A4	R524	*C2	R653	*A2	R811	D1
C118	C4	C239	*B3	C368	A4	C471	D2	C616	A3	C737	A3	C883	*B2	CL1	D4	E502	C1	IC852	B2	L802	*D2	R20	E3	R151	C4	R258	B3	R386	B4	R525	*D2	R654	A2	R812	*C1
C119	C4	C240	*B3	C369	A4	C475	*D2	C617	A3	C738	*A3	C884	*A2	CL2	D4	E601	A3	IC853	A1	L803	*C1	R21	E3	R152	*D4	R259	B3	R387	B4	R526	C2	R655	A2	R814	D2
C120	C3	C251	*B3	C370	A4	C476	*D2	C618	B2	C739	*A3	C885	B1	CL3	E3	E701	A3	IC854	*A1	L805	*C1	R22	E3	R153	*D4	R260	B4	R388	A4	R527	C3	R656	*A3	R821	*C1
C121	C3	C252	*B3	C371	A4	C477	D2	C619	A3	C740	*A2	C886	B1	CL4	E3	E702	A1	IC855	A2	L806	*C2	R23	E3	R154	*C4	R261	B3	R389	*B4	R528	*C3	R657	A1	R822	*C1
C122	C4	C253	B4	C373	*A3	C501	*C2	C620	*B3	C741	*A2	C887	B1	CL5	D4	E941	C3	IC856	A1	L851	*B1	R24	D3	R155	*D4	R262	B3	R401	D3	R529	*D3	R658	*A3	R823	*C1
C123	C4	C254	B4	C374	A4	C502	*D3	C621	B3	C742	A2	C901	*A1	CL6	E3			IC857	B1	L852	*A2	R25	*D3	R156	*C4	R263	B3	R402	D3	R530	D2	R659	*B3	R824	*C1
C124	C4	C255	*B3	C376	*A4	C503	*C3	C622	*B3	C743	A2	C902	D1	CL7	D3	FL401	D2	IC901	D1	L854	*A1	R26	*E3	R157	D4	R264	B4	R403	D3	R531	D2	R660	*B3	R825	*C1
C125	C4	C258	B3	C377	*A4	C504	*C3	C623	*B3	C744	A2	C903	*D1	CL8	E3	FL501	C2	IC902	D1	L855	*A2	R27	*E3	R158	*C1	R265	*B3	R404	D3	R532	*D3	R661	*B3	R826	*C1
C126	C4	C259	*B4	C378	*A4	C505	*C3	C624	*B3	C745	A2	C904	A1	CL9	D3	FL601	B2	IC903	A1	L857	B1	R28	E3	R159	*C4	R266	*B3	R405	D3	R533	C3	R663	B2	R827	*C2
C127	C4	C260	*B4	C379	*A4	C506	*C3	C625	*B3	C746	A3	C905	*E2	CL10	D4	FL701	A2	IC904	E3	L901	*D1	R29	D3	R160	*C4	R269	B4	R406	*D3	R534	D3	R675	*B2	R828	C1
C128	C4	C261	*B4	C380	A4	C507	*C3	C626	*B2	C747	*A2	C906	*E2	CL11	D4	FL941	C3	IC905	A1	L902	E2	R30	*D3	R161	*C4	R270	B4	R407	*D2	R535	D2	R676	*B2	R831	C2
C129	C4	C262	B3	C381	A4	C508	*C3	C627	B2	C748	A2	C907	*E2	CL12	C4	FL942	C3	IC906	C2	L903	E1	R31	*E3	R162	*D1	R273	*B3	R408	*D2	R536	D2	R677	*B2	R837	C1
C131	*C3	C263	B3	C382	A4	C509	*C2	C628	B2	C749	A2	C908	*A1	CL13	D3	FL943	C2	IC907	D1	L941	*C3	R32	D3	R163	C4	R274	*B3	R409	*D2	R537	C3	R678	*B2	R838	C1
C133	*C4	C264	B4	C383	A4	C510	*C2	C629	*B2	C750	*A2	C909	D1	CL14	D4	FL944	C2	IC909	E3	L942	*B3	R33	D3	R164	C4	R279	*B4	R410	*D2	R538	D3	R679	B2	R839	C1
C134	*C4	C265	B4	C384	A4	C511	*C2	C630	*B3	C751	A2	C910	*D1	CL15	D4			IC910	E1	L943	*C3	R34	D3	R165	C4	R280	B4	R411	*D3	R539	D3	R680	B2	R840	C1
C135	*C4	C266	B4	C385	A4	C512	*C2	C631	B3	C752	A2	C911	*E2	CL20	A1	IC1	D4	IC911	C1	L944	*B2	R35	*D3	R166	*C3	R281	*B4	R412	*D2	R540	*C3	R701	A3	R841	C1
C136	*C4	C267	B4	C386	*B4	C513	*C2	C632	*B2	C753	A2	C912	D1	CL21	A1	IC2	E3	IC912	B1	L981	C1	R36	*E2	R167	C4	R282	*B4	R413	*D1	R541	*C3	R702	A3	R842	C1
C137	*C4	C268	B4	C387	*B4	C514	*C2	C633	*B3	C754	A2	C913	*A1	CL101	D4	IC3	E3	IC913	B1			R37	C4	R168	C4	R283	B4	R414	D3	R542	*D3	R703	A3	R851	B1
C138	*C4	C269	B4	C388	*B4	C515	*C2	C634	*B2	C755	A2	C914	*E2	CL102	D4	IC4	D3	IC914	A3	PS901	E2	R38	*D1	R169	C4	R284	B4	R415	D3	R544	D3	R704	A3	R852	B1
C139	*C4	C270	B4	C389	*B4	C516	C3	C635	*B3	C756	A2	C915	*E2	CL103	C4	IC5	D4	IC916	B1	PS903	D1	R39	*E2	R170	C3	R285	B4	R416	D3	R545	*E1	R705	A3	R853	*B1
C140	*C4	C271	B4	C390	*B4	C517	*C3	C636	B3	C757	*A3	C916	*E2	CL104	D4	IC6	*E4	IC941	A3			R40	*D4	R171	C4	R286	B4	R417	D2	R546	C2	R706	*A3	R854	*A1
C151	D4	C273	*B3	C391	*B4	C518	C3	C637	*B3	C758	A3	C917	*E2	CL105	C3	IC7	*E2	IC942	B3	Q1	D3	R41	*E4	R172	C4	R287	C4	R418	*D3	R547	C2	R707	*A2	R855	*A1
C152	*D4	C274	B4	C392	*B4	C519	C3	C638	*B3	C759	*A3	C918	*A4	CL106	C3	IC8	*E2	IC943	B3	Q102	*C4	R42	*C3	R173	C4	R288	B4	R419	*D2	R548	C2	R708	*A2	R857	B1
C153	*D4	C276	*B4	C401	*D2	C520	D2	C639	*B2	C760	*A3	C919	*B1	CL201	C3	IC9	D4	IC944	B3	Q152	*C4	R43	C3	R174	*C4	R289	*C4	R420	*D2	R549	*C2	R709	*A2	R858	B1

R859	*B2	R991	*C2
R860	*A2	R992	*C2
R861	B2	R993	*C2
R862	B1	R994	*C2
R863	B1	R995	*C3
R864	B1	R996	E2
R865	B1	R997	A3
R866	B1	R998	*E2
R867	B1	R999	*E2
R868	A1	R1000	A4
R869	*A1	R1001	B3
R870	*A1	R1002	B3
R871	*A1	R1003	*B1
R872	A1	R1004	B1
R873	A1	R1012	*C2
R874	B1	R1013	*C2
R876	A2	R1014	*C1
R901	*E2	R1015	*B1
R902	*E2	R1016	*C1
R903	*D2	R1017	*B1
R904	*D2	R1018	*B1
R905	C1	R1019	*B1
R906	C2	R1024	C2
R907	C2		
R921	*B2	RB1	*E2
R922	*B1	RB2	*E2
R923	B1	RB3	E2
R924	B1	RB4	E2
R925	B1	RB801	*D1
R926	B1	RB802	*D1
R927	*B1	RB803	D2
R928	A1	RB804	D2
R929	B1	RB805	C2
R930	B1	RB806	C2
R931	E2	RB851	*B1
R932	B1	RB852	*B1
R933	B1	RB853	B1
R934	B1	RB854	*A1
R937	*B1	RB855	*A1
R938	*B1	RB856	A1
R939	*B1	RB857	B2
R940	A3	RB858	B2
R941	A3	RB859	A2
R942	A4	RB860	A2
R943	E2	RB901	C1
R944	E2	RB902	B1
R945	B3	RB903	B1
R946	B3	RB945	*B1
R947	B3	RB981	C2
R948	B3	RB982	C1
R949	*B3	RB983	C1
R950	B3	RB984	C1
R951	*C3	RB985	B1
R952	*B3	RB986	B1
R953	*B3	RB987	*B2
R954	*B3	RB988	*B1
R955	*B3		
R956	*C3	S941	E2
R957	*C3	S942	E2
R958	C3		
R959	*B3	TP401	D3
R960	C3	TP402	D2
R961	*B3	TP403	D1
R962	*C3	TP404	D3
R963	*C3	TP405	D2
R964	*C3	TP501	C3
R965	*C3	TP502	C2
R966	*C3	TP503	D1
R967	*C3	TP504	D3
R968	*C3	TP505	C2
R969	*C3	TP601	B3
R970	B3	TP602	B2
R971	B2	TP603	A2
R972	*C1	TP604	B3
R973	B2	TP605	B2
R974	B3	TP701	A3
R975	*B2	TP702	A2
R976	B2	TP703	A2
R977	*C2	TP704	A3
R978	*B2	TP705	A2
R979	*B2		
R980	*B2	*:B SIDE	
R981	*B2		
R982	*C2		
R983	*C2		
R984	C3		
R985	*B2		
R986	C3		
R987	*B2		
R988	*C2		
R989	*C2		
R990	*C2		

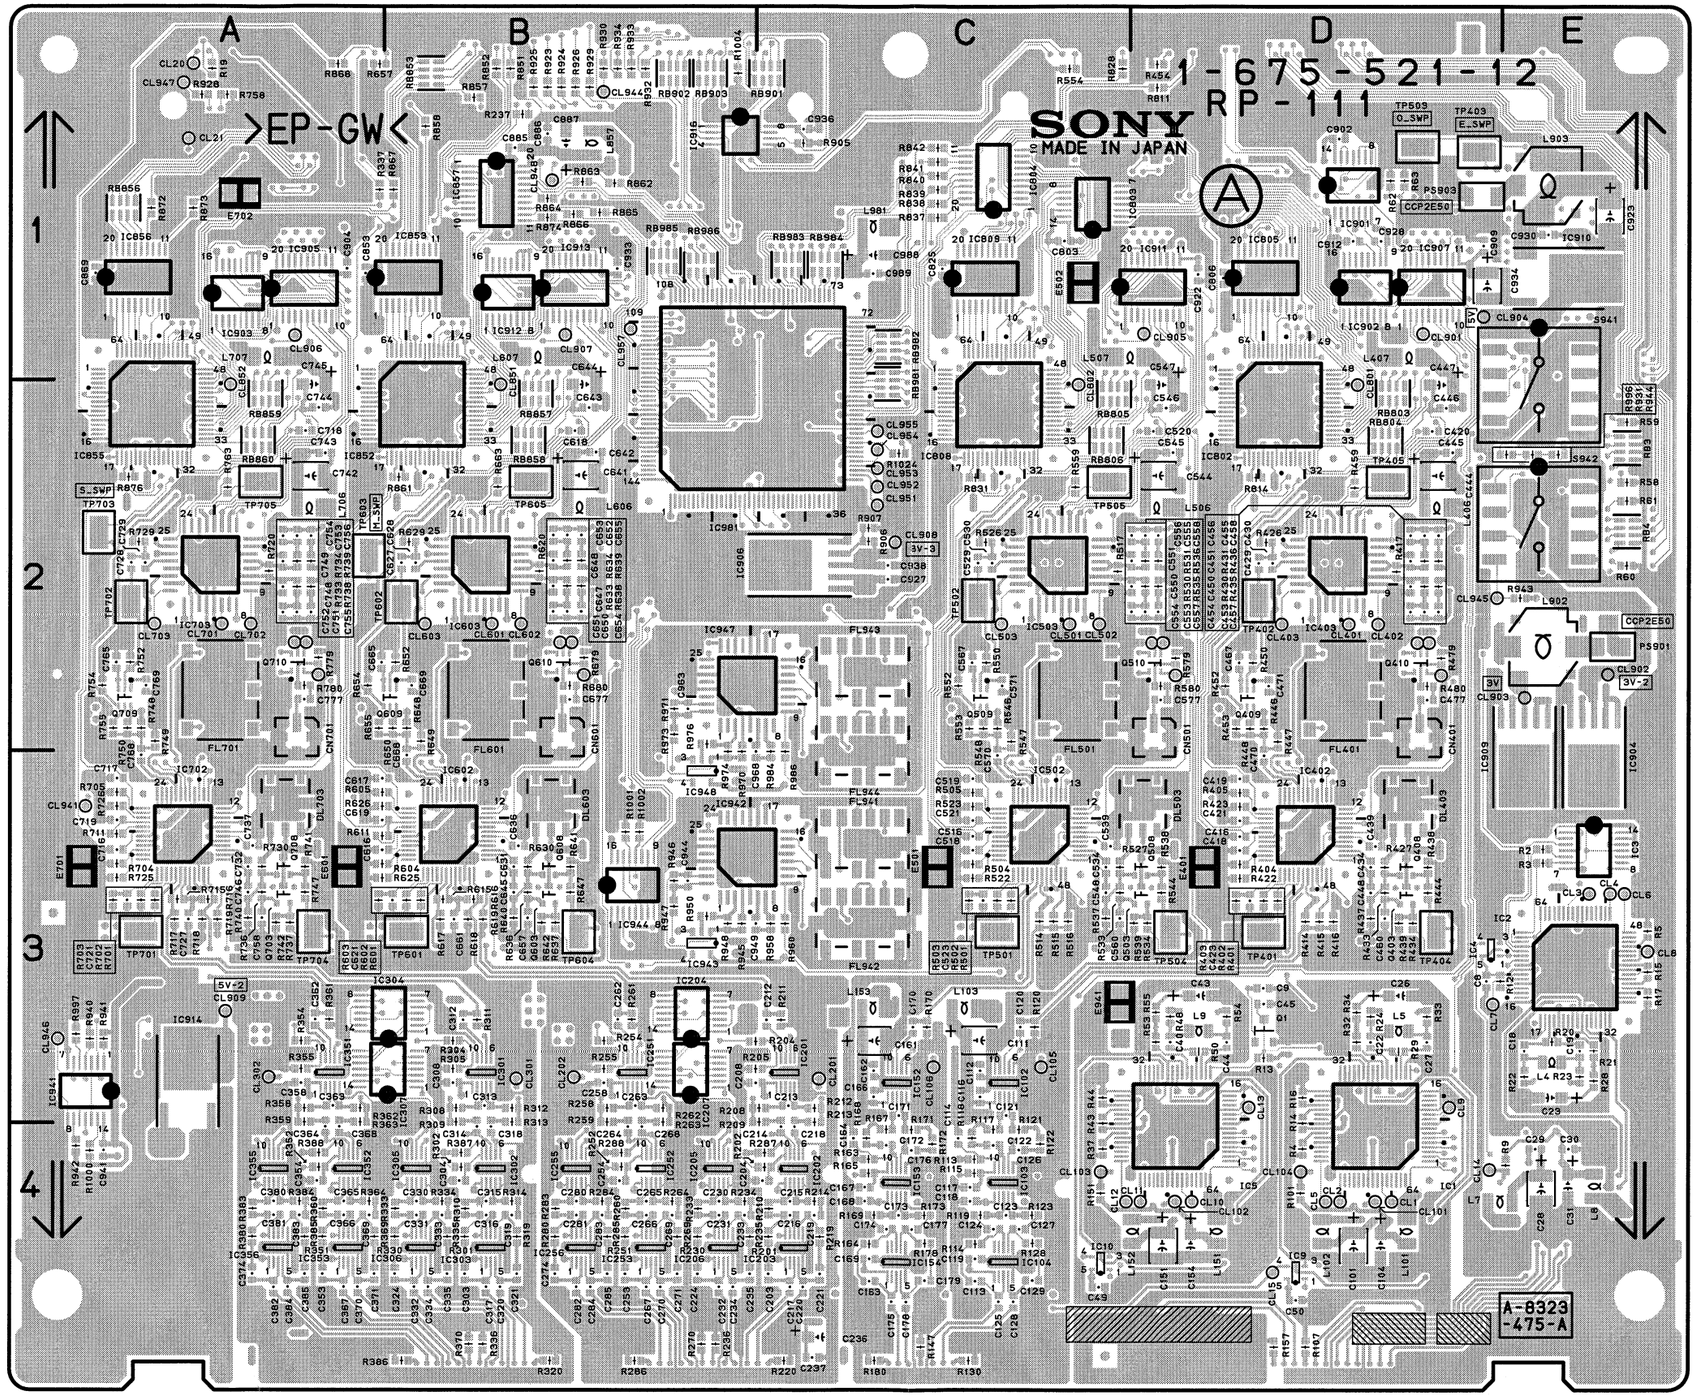

RP-111 -A SIDE-
SUFFIX: -12

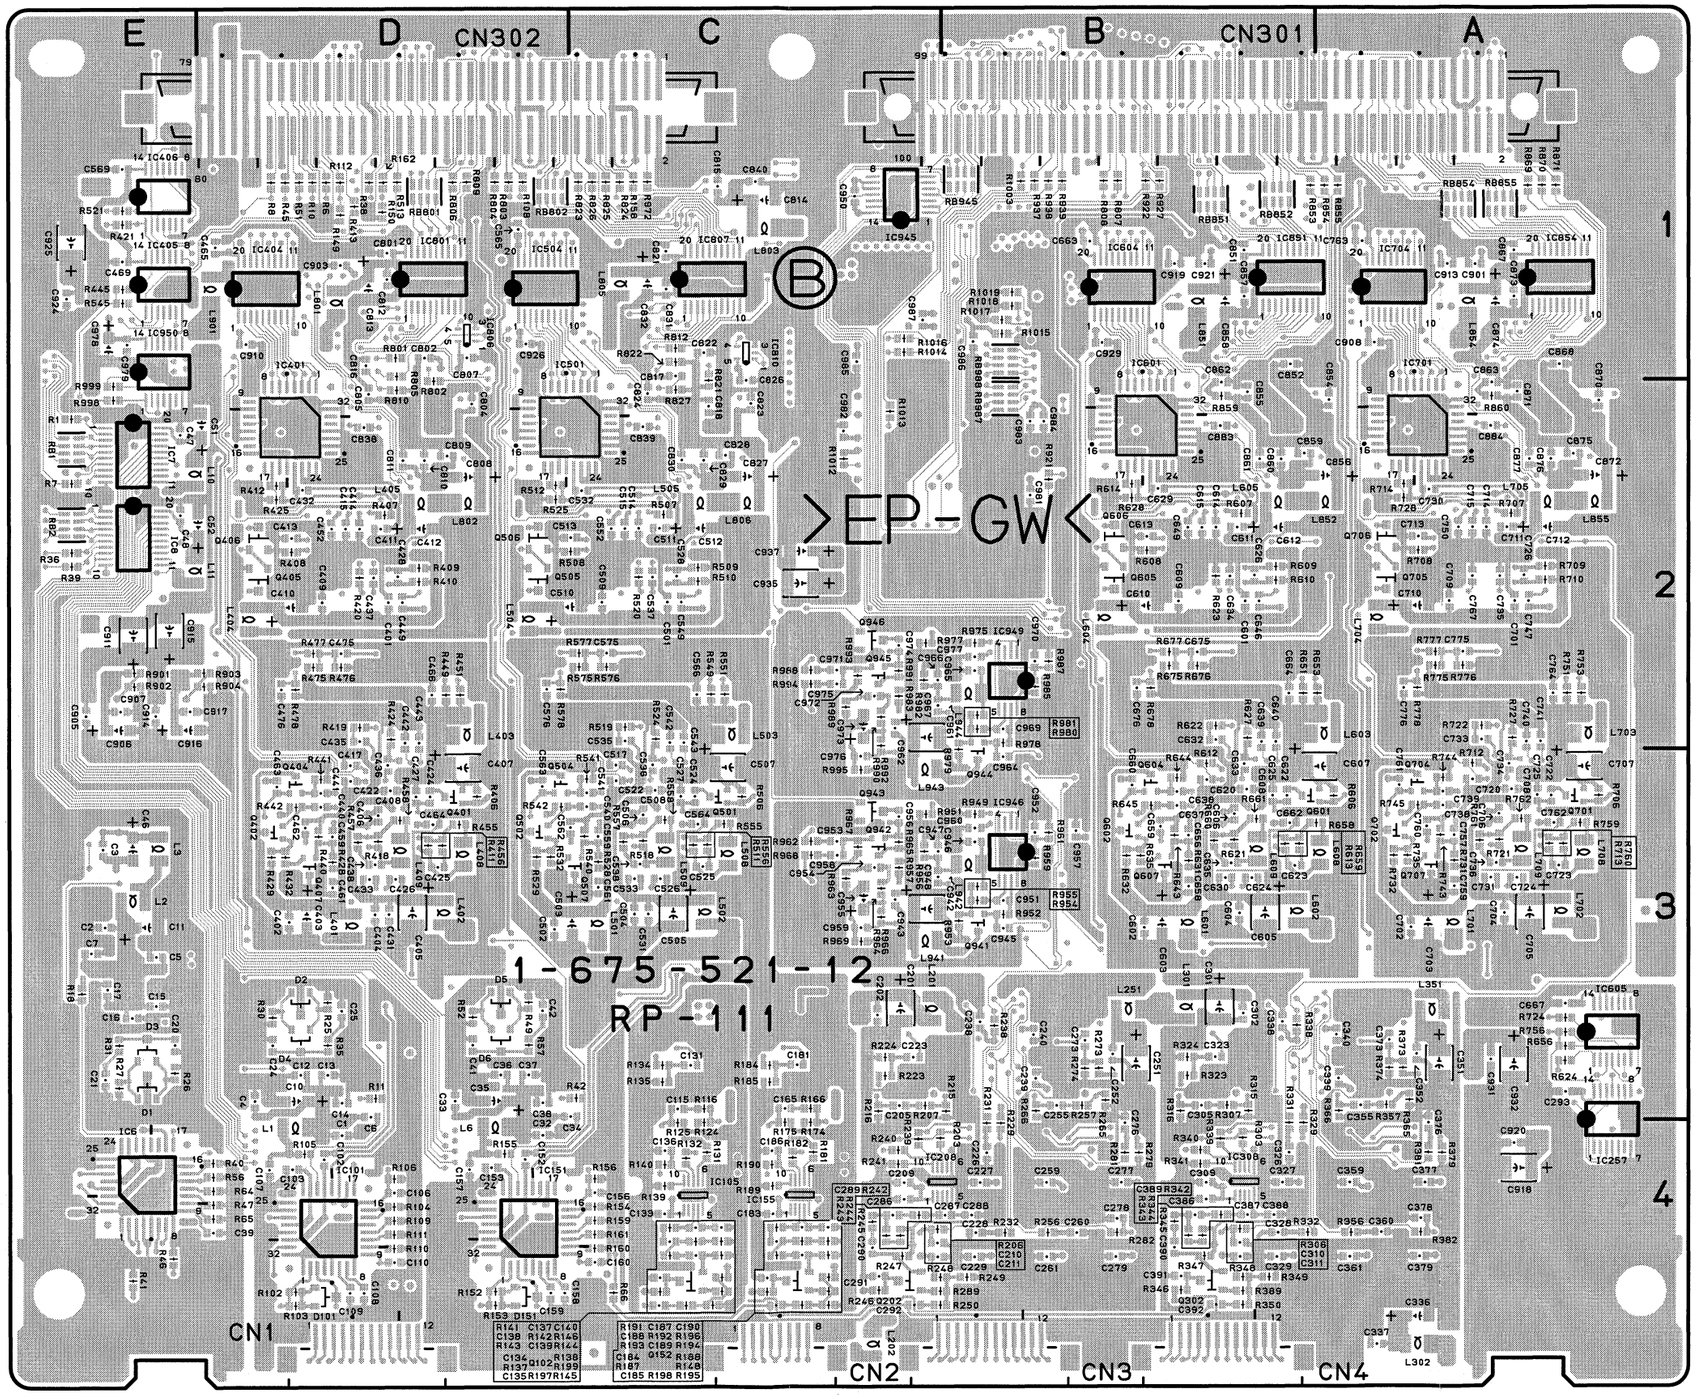

RP-111 -B SIDE-
SUFFIX: -12

SE-521, SE-522, SE-525, SE-538

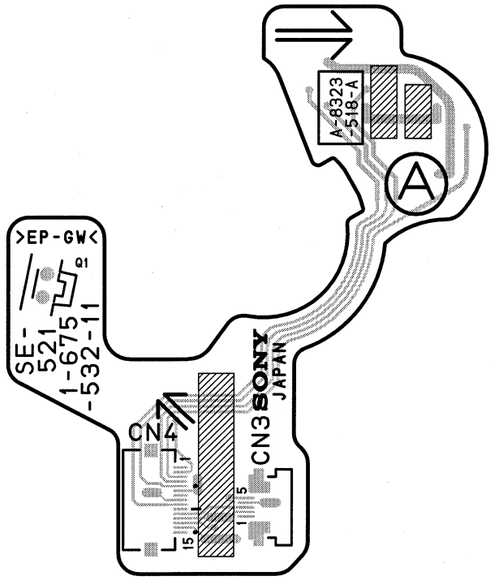

SE-521 -A SIDE-
SUFFIX: -11

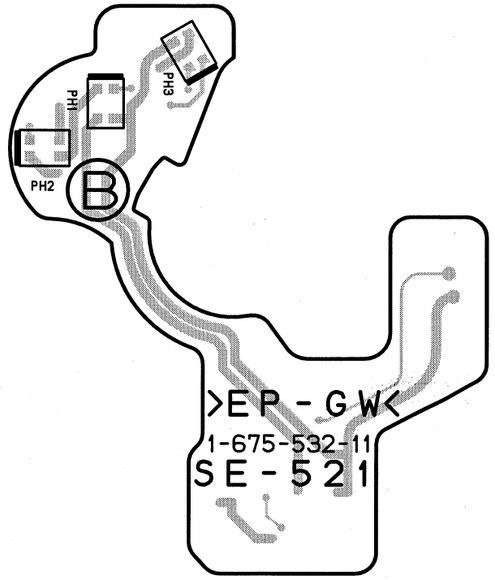

SE-521 -B SIDE-
SUFFIX: -11

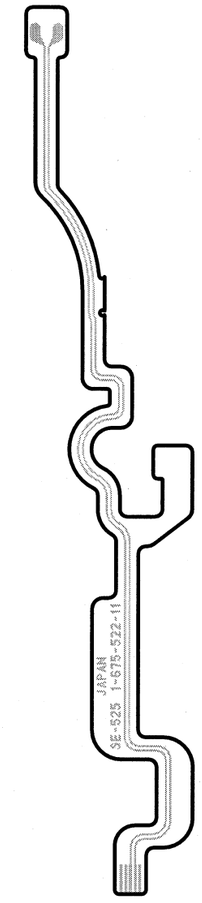

SE-525 -A SIDE-
SUFFIX: -11



SE-538 -A SIDE-
SUFFIX: -11

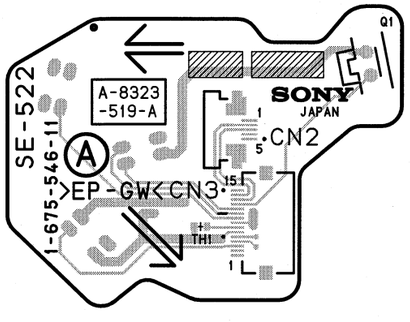

SE-522 -A SIDE-
SUFFIX: -11

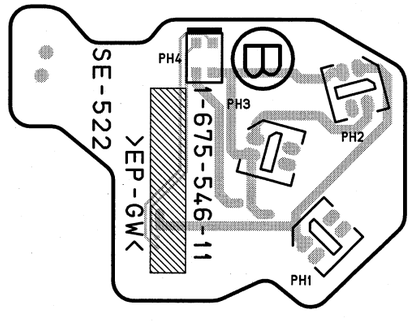

SE-522 -B SIDE-
SUFFIX: -11

14-42

SV-212 (1-675-528-12)

C101	A1	C509	E4	C679	*C2	C831	A3	D654	*A4	IC512	E4	R139	*H3	R410	*P3	R585	*D3	R729	A3	R843	*F2	RB405	*P3
C102	*G4	C510	E4	C680	F2	C832	A3	D655	*B4	IC513	D4	R140	*H3	R411	P3	R586	*E4	R730	*B2	R844	A1	RB406	*P3
C103	G2	C511	F4	C681	*B3	C833	A4	D656	*B4	IC514	D2	R141	*J2	R412	P3	R587	D4	R731	*B2	R845	A4	RB407	*N3
C104	*H4	C512	*E2	C682	B3	C834	A3	D657	*B4	IC515	F4	R148	L1	R413	*N3	R588	*E5	R732	B2	R846	A4	RB408	*N3
C105	*E4	C513	D2	C683	B3	C835	A3	D658	*B4	IC650	C2	R149	L1	R414	N3	R589	*D4	R733	B2	R847	A4	RB409	*N3
C106	*E4	C514	D2	C684	B3	C836	A4	D659	*B4	IC651	B2	R150	*L1	R415	N4	R590	*E4	R734	*B2	R848	A4		
C107	*H3	C515	*D2	C685	B3			D660	*B4	IC652	C2	R151	L1	R416	*N3	R591	*E4	R735	B3	R849	*F2	S101	P1
C108	*H2	C516	*D2	C686	C3	CL101	N6	D661	*B4	IC653	C2	R152	L1	R500	D3	R592	D4	R736	B2	R851	*F2		
C109	*G3	C517	*D2	C687	*D5	CL102	M2	D662	*B4	IC654	C4	R153	L1	R501	*E2	R593	D4	R737	*B2	R852	*G2	TP101	G1
C110	*G3	C518	*D2	C688	*B4	CL103	J2	D663	*C4	IC655	C3	R154	H2	R502	E2	R594	*E5	R738	*B2	R853	*F2	TP102	J1
C111	*H3	C519	*D2	C689	*B4	CL104	J2	D664	*C4	IC660	F2	R155	J2	R503	E3	R595	*D4	R739	B2	R854	*F2	TP103	J1
C112	*H3	C520	*E3	C690	*C4	CL105	E5	D701	B1	IC663	B4	R157	*H3	R504	E4	R596	*E4	R740	*B2	R855	*F2	TP104	J1
C113	*H3	C521	*E2	C691	*B4	CL202	M4	D702	*B2	IC664	C4	R158	*H3	R505	*F3	R597	*D4	R741	*A4	R856	F2	TP105	J4
C114	*H2	C522	*E3	C692	*A4	CL203	H5	D703	D5	IC665	D5	R159	*H3	R506	*F3	R650	*C2	R742	*B4	R857	*G5	TP201	H1
C115	*K2	C523	*E2	C693	*B4	CL204	H5	D801	E1	IC666	B2	R160	J2	R507	F2	R651	*C2	R743	*F2	R858	*F5	TP202	J1
C116	*K2	C524	E3	C694	*A4	CL205	K5	D802	E1	IC667	C2	R161	*G4	R508	*F2	R652	C2	R744	C2	R859	*A5	TP205	G1
C117	*K2	C525	D3	C695	A4	CL206	K5	D803	G3	IC801	L5	R162	*G4	R509	E3	R653	*C2	R745	*B2	R860	*A5	TP206	G1
C120	*E5	C526	*D3	C696	*A4	CL207	K4	D804	A2	IC805	G2	R163	*H4	R510	E3	R654	*C2	R746	B2	R861	*F5	TP207	H1
C121	*M2	C527	D3	C697	*B4	CL208	K5	D805	G2	IC806	A1	R164	*H4	R511	E4	R655	*C2	R747	*B2	R862	*F5	TP208	G1
C122	*H4	C528	E4	C698	B4	CL209	K4	D806	*F3	IC807	E1	R165	*H3	R512	E4	R656	*C2	R748	B2	R863	*A5	TP209	G1
C123	*E4	C529	*D3	C699	*B4	CL210	K5	D807	*F3			R166	*M3	R513	*F3	R657	F3	R749	B2	R864	*A5	TP210	G1
C124	*M4	C530	E4	C700	*A4	CL211	K4	D808	*F3	L500	D3	R167	*M3	R514	*E3	R658	*F3	R750	*F2	R865	*G5	TP211	G1
C125	*H4	C531	D4	C701	*B4	CL215	M6	D810	G5	L501	E3	R168	*L3	R515	*F2	R659	*C2	R751	*C2	R866	*F5	TP212	H1
C126	*L3	C532	*E4	C702	*B4	CL218	J5	D811	A5	L650	B3	R169	*M2	R516	*F4	R660	*C2	R752	F2	R867	*A5	TP301	N1
C127	*M3	C533	*E4	C703	*B4	CL219	K4	D812	F5	L651	B3	R170	*M2	R517	*F4	R661	*F3	R753	*B2	R868	*A5	TP302	P1
C128	*L3	C534	*D4	C704	*B4	CL220	K5	D813	A5	L801	L5	R171	*L3	R518	*E3	R662	*F3	R754	F2	R869	*F5	TP303	M1
C129	*M3	C535	*D4	C705	*C4	CL221	K4	D814	A2	L802	M5	R172	H5	R519	*E3	R663	C4	R755	*B3	R870	*F5	TP304	N1
C130	*M2	C536	*E5	C706	*B4	CL222	K5	D815	F5	L803	A5	R173	G4	R520	*F2	R664	C4	R756	B3	R871	*A5	TP305	P1
C132	*M3	C537	*D5	C707	B4	CL223	K4	D816	A5	L804	L5	R174	H2	R521	*E3	R665	C4	R757	*B5	R872	*A5	TP306	N1
C133	*L2	C538	*E5	C708	*B4	CL224	K5	D818	A5			R175	H2	R522	*E3	R666	C4	R758	*C5	R873	A2	TP501	D1
C134	*M3	C539	*D5	C709	B4	CL225	K4			PS802	L5	R176	*E5	R523	*F3	R667	*C2	R759	*B5	R874	A2	TP502	D1
C135	*M2	C540	*E5	C710	*B4	CL226	J5	E101	L3	PS803	M5	R177	*E5	R524	*F3	R668	*C2	R760	*B5	R875	A2		
C136	*H5	C541	*D5	C711	*B4	CL309	P4	E102	G3	PS804	A5	R178	*E5	R525	*E3	R669	C4	R761	*C5	R876	A2	X101	G3
C137	*M1	C542	*E2	C712	*B4	CL310	P4	E201	L5	PS805	L5	R179	*E5	R526	E3	R670	C4	R762	*C5	R877	A2	X201	J1
C138	*H5	C543	E2	C713	B4	CL311	P4	E501	D2			R180	*E5	R527	*E2	R671	C4	R763	*B4	R879	*F2	X301	P5
C139	*H5	C544	*F3	C714	*A5	CL532	E3	E801	F4	Q401	P3	R201	*H4	R528	*E3	R672	D4	R764	*B4	R880	*F2		
C140	*H5	C545	*F2	C715	*C4	CL661	C2	E802	P3	Q500	D3	R202	N1	R529	*E3	R673	C4	R765	A4			*:B SIDE	
C141	*L3	C546	*F3	C716	C4	CL670	A4	E803	A2	Q501	E4	R203	*M1	R530	*E2	R674	C4	R766	*B4	RB1	E1		
C142	E5	C547	*F3	C717	*B5	CL671	B4			Q502	D2	R204	N1	R531	*E3	R675	C4	R767	B4	RB2	E1		
C143	*F5	C548	*E3	C718	*B4	CL801	M6	F1	A6	Q650	A3	R205	*H4	R532	*E3	R676	C4	R768	*B4	RB104	H2		
C200	*M2	C549	*E2	C719	*C4			F2	A6	Q651	B3	R206	N1	R533	*E3	R677	*C2	R769	B4	RB105	L2		
C201	*H4	C550	*E2	C720	*C5	CN1	A1			Q652	B2	R207	N2	R534	*E2	R678	*C4	R770	B4	RB106	L2		
C202	*H1	C552	*E2	C722	*B5	CN2	L1	IC101	E5	Q653	B2	R208	N2	R535	*F3	R679	*C4	R771	B4	RB107	H5		
C203	*H1	C553	D2	C723	*B5	CN113	M6	IC102	M1	Q654	B2	R209	N2	R536	F4	R680	*C4	R772	C4	RB108	H5		
C204	*J1	C554	*D2	C724	*B5	CN114	G6	IC103	M2	Q655	E3	R210	*H4	R537	*F3	R681	*C4	R775	*D5	RB109	H5		
C205	*J2	C555	*E2	C725	*C5	CN115	B6	IC104	H4	Q801	E1	R211	J1	R538	F4	R682	*C4	R776	*D5	RB110	G5		
C209	G1	C556	D4	C726	*B5			IC105	E4	Q802	E1	R212	*J2	R539	F4	R683	*C3	R777	*C5	RB111	G5		
C210	G1	C559	*B2	C727	*B5	D101	*H2	IC106	L2	Q803	F1	R213	J1	R540	*E2	R684	*C4	R778	*C5	RB117	*K1		
C211	*L4	C565	*E5	C728	*B5	D102	*G3	IC107	H4	Q804	*G3	R217	G1	R541	*E3	R685	*C4	R779	B2	RB118	H5		
C212	*K4	C566	*E5	C729	*B5	D103	*G3	IC108	L2	Q805	*G3	R218	G1	R542	*E2	R686	*C4	R780	B2	RB119	H5		
C213	*K4	C567	*E5	C730	*B5	D401	P3	IC109	M2	Q806	F4	R219	*K4	R543	*F3	R687	C3	R801	E1	RB120	H5		
C216	N2	C568	*E5	C731	*B5	D402	P3	IC111	M2	Q807	A5	R220	*K4	R544	F4	R688	*C3	R802	E1	RB121	H5		
C217	*L3	C569	*E5	C732	*B5	D403	P3	IC112	M1	Q808	F5	R221	*L3	R545	*F3	R689	C3	R803	E1	RB122	H5		
C218	*K5	C570	*D5	C733	*C5	D404	P3	IC114	M3	Q809	A5	R226	*J1	R546	*F3	R690	*C3	R804	F1	RB123	G5		
C219	*J5	C571	*D5	C734	*C2	D405	P3	IC116	M3	Q810	F5	R229	J5	R547	*E2	R691	*C3	R805	*F2	RB124	G5		
C220	*L5	C572	*D5	C735	*C2	D406	P3	IC118	J2	Q811	A5	R230	J5	R548	*E2	R692	*C3	R806	E2	RB206	*K4		
C301	*P4	C573	*D5	C736	*C2	D407	P3	IC119	K1	Q812	F1	R231	J5	R549	D2	R693	*C3	R807	*F2	RB207	*K4		
C302	*P4	C574	*D5	C737	*C3	D408	P3	IC120	K2	Q813	F2	R234	H2	R550	E4	R694	*C3	R808	E2	RB208	*K4		
C303	*P4	C575	*D5	C738	C2	D409	P3	IC121	L2	Q814	A2	R235	*H4	R551	D2	R695	*C3	R809	F2	RB209	*J4		
C304	*P4	C576	*D5	C739	*C2	D410	P3	IC123	H3			R236	K3	R552	E4	R696	*C3	R810	*F2	RB210	*J4		
C305	*P4	C577	*F4	C740	*C4	D411	P3	IC128	H5	R104	*G4	R237	K3	R553	*E3	R697	*C3	R811	F2	RB211	*J4		
C306	P4	C578	*E2	C741	*C3	D412	P3	IC129	G5	R105	*M1	R238	K3	R554	*D3	R698	C3	R812	*F2	RB215	*M4		
C307	P4	C579	*E3	C742	B2	D413	P3	IC130	H5	R106	*E5	R301	*P4	R555	*D3	R699	C3	R813	E1	RB216	*M4		
C308	P4	C650	*C2	C743	*B2	D414	P3	IC200	M2	R107	*E5	R302	*P4	R556	*D2	R700	C3	R814	E1	RB222	H1		
C309	P4	C651	*C2	C744	*B2	D415	P3	IC204	L3	R108	*H4	R303	P6	R557	*D2	R701	C3	R815	E1	RB223	*K5		
C310	P4	C652	*C2	C801	A6	D416	P3	IC205	H1	R109	*E5	R304	P6	R558	*D2	R702	C3	R816	E1	RB224	*K5		
C311	*P4	C653	F3	C802	A5	D417	N3	IC206	L4	R110	*H4	R305	P6	R559	*D2	R703	C3	R817	E1	RB225	*J5		
C312	*N5	C654	*C2	C803	L5	D418	N3	IC207	K4	R111	*E5	R306	P6	R560	*E3	R704	*C3	R818	E1	RB226	J5		
C313	*P5	C655	*C2	C804	M5	D419	P3	IC209	K5	R112	*H4	R307	*P6	R561	*E3	R705	*C3	R819	E1	RB227	J5		
C314	*P5	C656	*F3	C805	L5	D420	N3	IC210	K5	R113	J2	R308	*P6	R562	*D3	R706	*C3	R820	G4	RB228	J5		
C315	*P4	C657	*C4	C806	L5	D421	N3	IC211	L3	R114	J2	R309	*P6	R563	*D2	R707	C3	R821	*F3	RB229	*K5		
C316	P5	C658	*D4	C807	L5	D422	N3	IC213	J5	R115	*G4	R310	*P5	R564	*D2	R708	C3	R822	G4	RB230	*J5		
C317	*P6	C659	*D4	C808	*E2	D423	P3	IC214	N1	R116	*G4	R311	*P5	R565	*D2	R709	C3	R823	*A5	RB233	H5		
C318	*P6	C660	*C4	C809	E2	D424	N3	IC215	M3	R117	*H3	R312	*P6	R566	*D2	R710	C3	R824	*A5	RB234	H5		
C319	*N5	C661	C3	C810	F2	D425	N3	IC301	P5	R118	*E4	R313	*P6	R567	*D2	R711	B2	R825	*F2	RB235	*K4		
C320	N5	C662	*C3	C811	*F2	D426	N3	IC302	P6	R119	*E4	R314	N5	R568	*D2	R712	C2	R826	*F2	RB236	*K4		
C321	*N5	C663	B2	C812	G3	D427	N3	IC303	N5	R120	*H3	R315	P5	R569	*D3	R713	B2	R827	A1	RB301	*N5		
C322	*P6	C664	B2	C815	*G2	D428	N3	IC304	N5	R121	*H3	R316	*P5	R570	*D3	R714	C2	R828	A1	RB302	*P4		
C323	*M4	C665	*B2	C816	A1	D429	N3	IC305	M4	R122	*L1	R317	*N5	R571	*E3	R715	B2	R829	A1	RB303	*N4		
C401	*P4	C666	*B2	C818	*F2	D430	N3	IC401	P4	R124	*E4	R318	P5	R572	*E2	R716	C2	R830	A1	RB304	*N4		
C402	*P4	C667	B2	C819	A2	D431	N3	IC402	P4	R125	*E4	R319	*N5	R573	*E3	R717	*B4	R831	*G4	RB305	*N4		
C403	*P4	C668	*B2	C820	A2	D432	N3	IC403	N4	R126	*E4	R324	*N5	R574	D2	R718	*B4	R832	F4	RB306	*N5		
C404	*N4	C669	B2	C821	F2	D500	*D3	IC404	N4	R127	*H3	R325	P5	R575	D3	R719	*C4	R833	*F4	RB307	*P5		
C500	D3	C670	*B2	C822	F2	D501	*F3	IC501	E2	R128	*J3	R328	P5	R576	*E3	R720	*C4	R834	*A5	RB308	*P4		
C501	*F3	C671	*A4	C823	E1	D502	*F3	IC502	F2	R129	*H3	R402	P3	R577	*E2	R721	B2	R835	A5	RB309	*N5		
C502	F2	C672	*F2	C824	*F2	D503	*E3	IC503	F3	R130	*H3	R403	*P3	R578	D3	R722	B2	R836	*A5	RB310	*P5		
C503	*F2	C673	C2	C825	G3	D504	*E4	IC504	E3	R131	*E4	R404	P3	R579	*E3	R723	B2	R837	*F4	RB311	*N5		
C504	*F4	C674	*B4	C826	F4	D505	D4	IC505	E2	R132	*E4	R405	P3	R580	*E2	R724	*B2	R838	*F4	RB312	*P5		
C505	*E3	C675	B2	C827	G5	D650	C3	IC506	E2	R135	*E4	R406	P3	R581	D3	R725	*B2	R839	*F2	RB313	N5		
C506	*E3	C676	C2	C828	F3	D651	*B3	IC508	E2	R136	*J2	R407	P3	R582	*E2	R726	*B2	R840	*F2	RB402	*P3		
C507	*E3	C677	*B2	C829	G4	D652	B3	IC510	D2	R137	G1	R408	P3	R583	D3	R727	*B2	R841	*F2	RB403	*P3		
C508	*E3	C678	B2	C830	G5	D653	*A4	IC511	E2	R138	*J2	R409	N3	R584	*D3	R728	*B2	R842	A1	RB404	*P3		

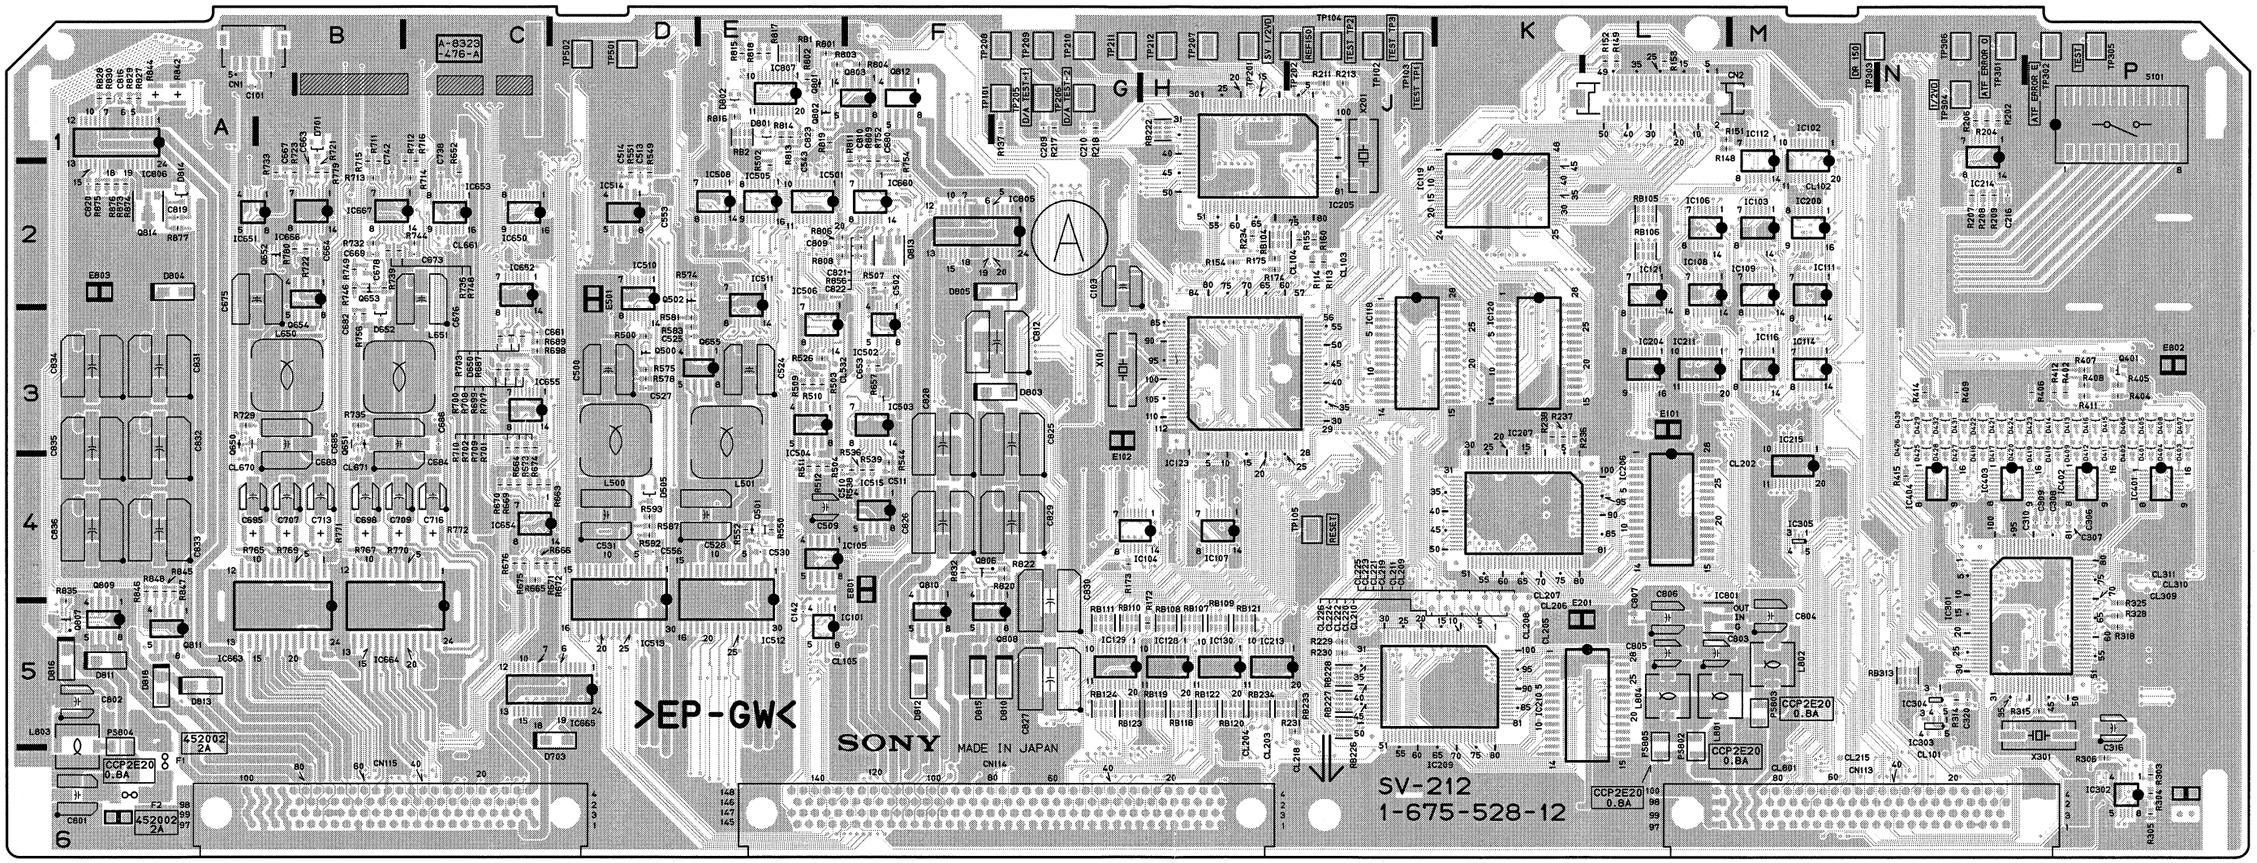

SV-212 -A SIDE-
SUFFIX: -12

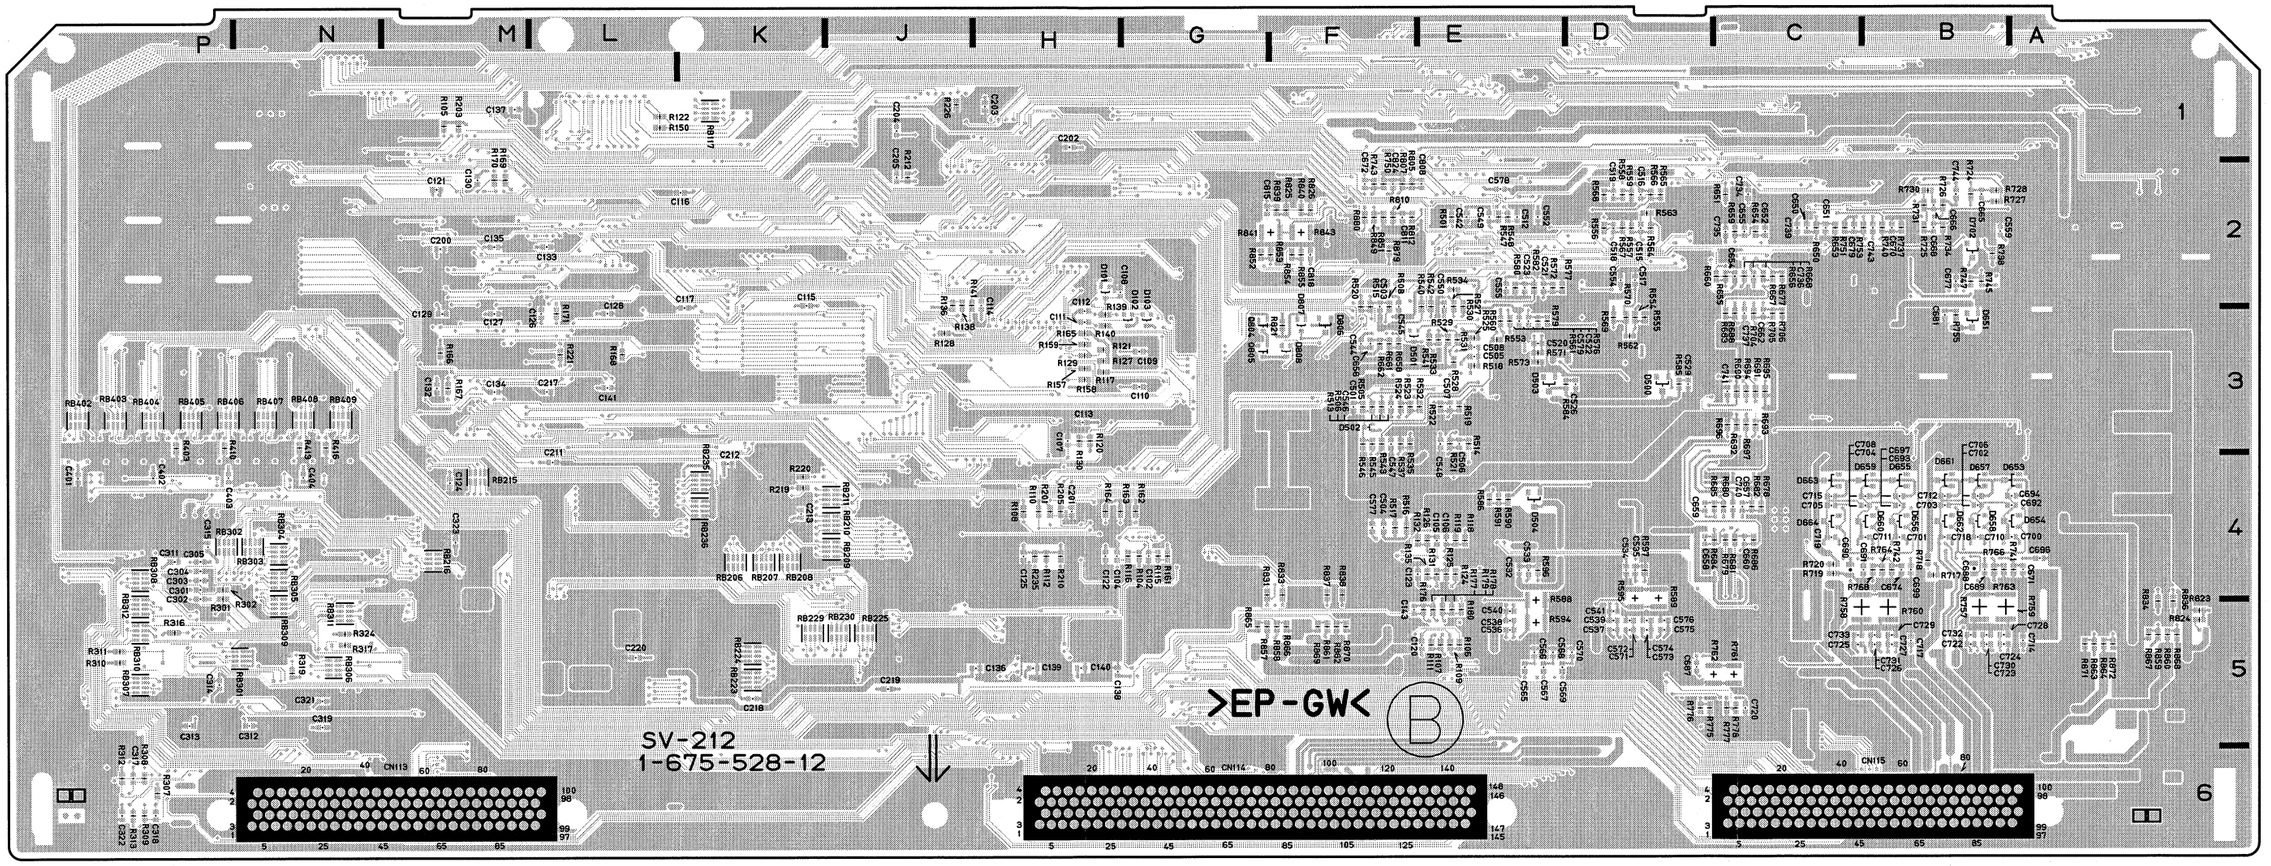

SV-212 -B SIDE-
SUFFIX: -12

SV-212 (1-675-528-11)

C101	A1	C509	E4	C679	*C2	C831	A3	D654	*A4	IC512	E4	R139	*H3	R410	*P3	R585	*D3	R729	A3	R843	*F2	RB405	*P3
C102	*G4	C510	E4	C680	F2	C832	A3	D655	*B4	IC513	D4	R140	*H3	R411	P3	R586	*E4	R730	*B2	R844	A1	RB406	*P3
C103	G2	C511	F4	C681	*B3	C833	A4	D656	*B4	IC514	D2	R141	*J2	R412	P3	R587	D4	R731	*B2	R845	A4	RB407	*N3
C104	*H4	C512	*E2	C682	B3	C834	A3	D657	*B4	IC515	F4	R148	L1	R413	*N3	R588	*E5	R732	B2	R846	A4	RB408	*N3
C105	*E4	C513	D2	C683	B3	C835	A3	D658	*B4	IC650	C2	R149	L1	R414	N3	R589	*D4	R733	B2	R847	A4	RB409	*N3
C106	*E4	C514	D2	C684	B3	C836	A4	D659	*B4	IC651	B2	R150	*L1	R415	N4	R590	*E4	R734	*B2	R848	A4		
C107	*H3	C515	*D2	C685	B3			D660	*B4	IC652	C2	R151	L1	R416	*N3	R591	*E4	R735	B3	R849	*F2	S101	P1
C108	*H2	C516	*D2	C686	C3	CL101	N6	D661	*B4	IC653	C2	R152	L1	R500	D3	R592	D4	R736	B2	R851	*F2		
C109	*G3	C517	*D2	C687	*D5	CL102	M2	D662	*B4	IC654	C4	R153	L1	R501	*E2	R593	D4	R737	*B2	R852	*G2	TP101	G1
C110	*G3	C518	*D2	C688	*B4	CL103	J2	D663	*C4	IC655	C3	R154	H2	R502	E2	R594	*E5	R738	*B2	R853	*F2	TP102	J1
C111	*H3	C519	*D2	C689	*B4	CL104	J2	D664	*C4	IC660	F2	R155	J2	R503	E3	R595	*D4	R739	B2	R854	*F2	TP103	J1
C112	*H3	C520	*E3	C690	*C4	CL105	E5	D701	B1	IC663	B4	R157	*H3	R504	E4	R596	*E4	R740	*B2	R855	*F2	TP104	J1
C113	*H3	C521	*E2	C691	*B4	CL202	M4	D702	*B2	IC664	C4	R158	*H3	R505	*F3	R597	*D4	R741	*A4	R856	F2	TP105	J4
C114	*H2	C522	*E3	C692	*A4	CL203	H5	D703	D5	IC665	D5	R159	*H3	R506	*F3	R650	*C2	R742	*B4	R857	*G5	TP201	H1
C115	*K2	C523	*E2	C693	*B4	CL204	H5	D801	E1	IC666	B2	R160	J2	R507	F2	R651	*C2	R743	*F2	R858	*F5	TP202	J1
C116	*K2	C524	E3	C694	*A4	CL205	K5	D802	E1	IC667	C2	R161	*G4	R508	*F2	R652	C2	R744	C2	R859	*A5	TP205	G1
C117	*K2	C525	D3	C695	A4	CL206	K5	D803	G3	IC801	L5	R162	*G4	R509	E3	R653	*C2	R745	*B2	R860	*A5	TP206	G1
C120	*E5	C526	*D3	C696	*A4	CL207	K4	D804	A2	IC805	G2	R163	*H4	R510	E3	R654	*C2	R746	B2	R861	*F5	TP207	H1
C121	*M2	C527	D3	C697	*B4	CL208	K5	D805	G2	IC806	A1	R164	*H4	R511	E4	R655	*C2	R747	*B2	R862	*F5	TP208	G1
C122	*H4	C528	E4	C698	B4	CL209	K4	D806	*F3	IC807	E1	R165	*H3	R512	E4	R656	*C2	R748	B2	R863	*A5	TP209	G1
C123	*E4	C529	*D3	C699	*B4	CL210	K5	D807	*F3			R166	*M3	R513	*F3	R657	F3	R749	B2	R864	*A5	TP210	G1
C124	*M4	C530	E4	C700	*A4	CL211	K4	D808	*F3	L500	D3	R167	*M3	R514	*E3	R658	*F3	R750	*F2	R865	*G5	TP211	G1
C125	*H4	C531	D4	C701	*B4	CL215	M6	D810	G5	L501	E3	R168	*L3	R515	*F2	R659	*C2	R751	*C2	R866	*F5	TP212	H1
C126	*L3	C532	*E4	C702	*B4	CL218	J5	D811	A5	L650	B3	R169	*M2	R516	*F4	R660	*C2	R752	F2	R867	*A5	TP301	N1
C127	*M3	C533	*E4	C703	*B4	CL219	K4	D812	F5	L651	B3	R170	*M2	R517	*F4	R661	*F3	R753	*B2	R868	*A5	TP302	P1
C128	*L3	C534	*D4	C704	*B4	CL220	K5	D813	A5	L801	L5	R171	*L3	R518	*E3	R662	*F3	R754	F2	R869	*F5	TP303	M1
C129	*M3	C535	*D4	C705	*C4	CL221	K4	D814	A2	L802	M5	R172	H5	R519	*E3	R663	C4	R755	*B3	R870	*F5	TP304	N1
C130	*M2	C536	*E5	C706	*B4	CL222	K5	D815	F5	L803	A5	R173	G4	R520	*F2	R664	C4	R756	B3	R871	*A5	TP305	P1
C132	*M3	C537	*D5	C707	B4	CL223	K4	D816	A5	L804	L5	R174	H2	R521	*E3	R665	C4	R757	*B5	R872	*A5	TP306	N1
C133	*L2	C538	*E5	C708	*B4	CL224	K5	D818	A5			R175	H2	R522	*E3	R666	C4	R758	*C5	R873	A2	TP501	D1
C134	*M3	C539	*D5	C709	B4	CL225	K4			PS802	L5	R176	*E5	R523	*F3	R667	*C2	R759	*B5	R874	A2	TP502	D1
C135	*M2	C540	*E5	C710	*B4	CL226	J5	E101	L3	PS803	M5	R177	*E5	R524	*F3	R668	*C2	R760	*B5	R875	A2		
C136	*H5	C541	*D5	C711	*B4	CL309	P4	E102	G3	PS804	A5	R178	*E5	R525	*E3	R669	C4	R761	*C5	R876	A2	X101	G3
C137	*M1	C542	*E2	C712	*B4	CL310	P4	E201	L5	PS805	L5	R179	*E5	R526	E3	R670	C4	R762	*C5	R877	A2	X201	J1
C138	*H5	C543	E2	C713	B4	CL311	P4	E501	D2			R180	*E5	R527	*E2	R671	C4	R763	*B4	R879	*F2	X301	P5
C139	*H5	C544	*F3	C714	*A5	CL532	E3	E801	F4	Q401	P3	R201	*H4	R528	*E3	R672	D4	R764	*B4	R880	*F2		
C140	*H5	C545	*F2	C715	*C4	CL661	C2	E802	P3	Q500	D3	R202	N1	R529	*E3	R673	C4	R765	A4			*:B SIDE	
C141	*L3	C546	*F3	C716	C4	CL670	A4	E803	A2	Q501	E4	R203	*M1	R530	*E2	R674	C4	R766	*B4	RB1	E1		
C142	E5	C547	*F3	C717	*B5	CL671	B4			Q502	D2	R204	N1	R531	*E3	R675	C4	R767	B4	RB2	E1		
C143	*F5	C548	*E3	C718	*B4	CL801	M6	F1	A6	Q650	A3	R205	*H4	R532	*E3	R676	C4	R768	*B4	RB104	H2		
C200	*M2	C549	*E2	C719	*C4			F2	A6	Q651	B3	R206	N1	R533	*E3	R677	*C2	R769	B4	RB105	L2		
C201	*H4	C550	*E2	C720	*C5	CN1	A1			Q652	B2	R207	N2	R534	*E2	R678	*C4	R770	B4	RB106	L2		
C202	*H1	C552	*E2	C722	*B5	CN2	L1	IC101	E5	Q653	B2	R208	N2	R535	*F3	R679	*C4	R771	B4	RB107	H5		
C203	*H1	C553	D2	C723	*B5	CN113	M6	IC102	M1	Q654	B2	R209	N2	R536	F4	R680	*C4	R772	C4	RB108	H5		
C204	*J1	C554	*D2	C724	*B5	CN114	G6	IC103	M2	Q655	E3	R210	*H4	R537	*F3	R681	*C4	R775	*D5	RB109	H5		
C205	*J2	C555	*E2	C725	*C5	CN115	B6	IC104	H4	Q801	E1	R211	J1	R538	F4	R682	*C4	R776	*D5	RB110	G5		
C209	G1	C556	D4	C726	*B5			IC105	E4	Q802	E1	R212	*J2	R539	F4	R683	*C3	R777	*C5	RB111	G5		
C210	G1	C559	*B2	C727	*B5	D101	*H2	IC106	L2	Q803	F1	R213	J1	R540	*E2	R684	*C4	R778	*C5	RB117	*K1		
C211	*L4	C565	*E5	C728	*B5	D102	*G3	IC107	H4	Q804	*G3	R217	G1	R541	*E3	R685	*C4	R779	B2	RB118	H5		
C212	*K4	C566	*E5	C729	*B5	D103	*G3	IC108	L2	Q805	*G3	R218	G1	R542	*E2	R686	*C4	R780	B2	RB119	H5		
C213	*K4	C567	*E5	C730	*B5	D401	P3	IC109	M2	Q806	F4	R219	*K4	R543	*F3	R687	C3	R801	E1	RB120	H5		
C216	N2	C568	*E5	C731	*B5	D402	P3	IC111	M2	Q807	A5	R220	*K4	R544	F4	R688	*C3	R802	E1	RB121	H5		
C217	*L3	C569	*E5	C732	*B5	D403	P3	IC112	M1	Q808	F5	R221	*L3	R545	*F3	R689	C3	R803	E1	RB122	H5		
C218	*K5	C570	*D5	C733	*C5	D404	P3	IC114	M3	Q809	A5	R226	*J1	R546	*F3	R690	*C3	R804	F1	RB123	G5		
C219	*J5	C571	*D5	C734	*C2	D405	P3	IC116	M3	Q810	F5	R229	J5	R547	*E2	R691	*C3	R805	*F2	RB124	G5		
C220	*L5	C572	*D5	C735	*C2	D406	P3	IC118	J2	Q811	A5	R230	J5	R548	*E2	R692	*C3	R806	E2	RB206	*K4		
C301	*P4	C573	*D5	C736	*C2	D407	P3	IC119	K1	Q812	F1	R231	J5	R549	D2	R693	*C3	R807	*F2	RB207	*K4		
C302	*P4	C574	*D5	C737	*C3	D408	P3	IC120	K2	Q813	F2	R234	H2	R550	E4	R694	*C3	R808	E2	RB208	*K4		
C303	*P4	C575	*D5	C738	C2	D409	P3	IC121	L2	Q814	A2	R235	*H4	R551	D2	R695	*C3	R809	F2	RB209	*J4		
C304	*P4	C576	*D5	C739	*C2	D410	P3	IC123	H3			R236	K3	R552	E4	R696	*C3	R810	*F2	RB210	*J4		
C305	*P4	C577	*F4	C740	*C4	D411	P3	IC128	H5	R104	*G4	R237	K3	R553	*E3	R697	*C3	R811	F2	RB211	*J4		
C306	P4	C578	*E2	C741	*C3	D412	P3	IC129	G5	R105	*M1	R238	K3	R554	*D3	R698	C3	R812	*F2	RB215	*M4		
C307	P4	C579	*E3	C742	B2	D413	P3	IC130	H5	R106	*E5	R301	*P4	R555	*D3	R699	C3	R813	E1	RB216	*M4		
C308	P4	C650	*C2	C743	*B2	D414	P3	IC200	M2	R107	*E5	R302	*P4	R556	*D2	R700	C3	R814	E1	RB222	H1		
C309	P4	C651	*C2	C744	*B2	D415	P3	IC204	L3	R108	*H4	R303	P6	R557	*D2	R701	C3	R815	E1	RB223	*K5		
C310	P4	C652	*C2	C801	A6	D416	P3	IC205	H1	R109	*E5	R304	P6	R558	*D2	R702	C3	R816	E1	RB224	*K5		
C311	*P4	C653	F3	C802	A5	D417	N3	IC206	L4	R110	*H4	R305	P6	R559	*D2	R703	C3	R817	E1	RB225	*J5		
C312	*N5	C654	*C2	C803	L5	D418	N3	IC207	K4	R111	*E5	R306	P6	R560	*E3	R704	*C3	R818	E1	RB226	J5		
C313	*P5	C655	*C2	C804	M5	D419	P3	IC209	K5	R112	*H4	R307	*P6	R561	*E3	R705	*C3	R819	E1	RB227	J5		
C314	*P5	C656	*F3	C805	L5	D420	N3	IC210	K5	R113	J2	R308	*P6	R562	*D3	R706	*C3	R820	G4	RB228	J5		
C315	*P4	C657	*C4	C806	L5	D421	N3	IC211	L3	R114	J2	R309	*P6	R563	*D2	R707	C3	R821	*F3	RB229	*K5		
C316	P5	C658	*D4	C807	L5	D422	N3	IC213	J5	R115	*G4	R310	*P5	R564	*D2	R708	C3	R822	G4	RB230	*J5		
C317	*P6	C659	*D4	C808	*E2	D423	P3	IC214	N1	R116	*G4	R311	*P5	R565	*D2	R709	C3	R823	*A5	RB233	H5		
C318	*P6	C660	*C4	C809	E2	D424	N3	IC215	M3	R117	*H3	R312	*P6	R566	*D2	R710	C3	R824	*A5	RB234	H5		
C319	*N5	C661	C3	C810	F2	D425	N3	IC301	P5	R118	*E4	R313	*P6	R567	*D2	R711	B2	R825	*F2	RB235	*K4		
C320	N5	C662	*C3	C811	*F2	D426	N3	IC302	P6	R119	*E4	R314	N5	R568	*D2	R712	C2	R826	*F2	RB236	*K4		
C321	*N5	C663	B2	C812	G3	D427	N3	IC303	N5	R120	*H3	R315	P5	R569	*D3	R713	B2	R827	A1	RB301	*N5		
C322	*P6	C664	B2	C815	*G2	D428	N3	IC304	N5	R121	*H3	R316	*P5	R570	*D3	R714	C2	R828	A1	RB302	*P4		
C323	*M4	C665	*B2	C816	A1	D429	N3	IC305	M4	R122	*L1	R317	*N5	R571	*E3	R715	B2	R829	A1	RB303	*N4		
C401	*P4	C666	*B2	C818	*F2	D430	N3	IC401	P4	R124	*E4	R318	P5	R572	*E2	R716	C2	R830	A1	RB304	*N4		
C402	*P4	C667	B2	C819	A2	D431	N3	IC402	P4	R125	*E4	R319	*N5	R573	*E3	R717	*B4	R831	*G4	RB305	*N4		
C403	*P4	C668	*B2	C820	A2	D432	N3	IC403	N4	R126	*E4	R324	*N5	R574	D2	R718	*B4	R832	F4	RB306	*N5		
C404	*N4	C669	B2	C821	F2	D500	*D3	IC404	N4	R127	*H3	R325	P5	R575	D3	R719	*C4	R833	*F4	RB307	*P5		
C500	D3	C670	*B2	C822	F2	D501	*F3	IC501	E2	R128	*J3	R328	P5	R576	*E3	R720	*C4	R834	*A5	RB308	*P4		
C501	*F3	C671	*A4	C823	E1	D502	*F3	IC502	F2	R129	*H3	R402	P3	R577	*E2	R721	B2	R835	A5	RB309	*N5		
C502	F2	C672	*F2	C824	*F2	D503	*E3	IC503	F3	R130	*H3	R403	*P3	R578	D3	R722	B2	R836	*A5	RB310	*P5		
C503	*F2	C673	C2	C825	G3	D504	*E4	IC504	E3	R131	*E4	R404	P3	R579	*E3	R723	B2	R837	*F4	RB311	*N5		
C504	*F4	C674	*B4	C826	F4	D505	D4	IC505	E2	R132	*E4	R405	P3	R580	*E2	R724	*B2	R838	*F4	RB312	*P5		
C505	*E3	C675	B2	C827	G5	D650	C3	IC506	E2	R135	*E4	R406	P3	R581	D3	R725	*B2	R839	*F2	RB313	N5		
C506	*E3	C676	C2	C828	F3	D651	*B3	IC508	E2	R136	*J2	R407	P3	R582	*E2	R726	*B2	R840	*F2	RB402	*P3		
C507	*E3	C677	*B2	C829	G4	D652	B3	IC510	D2	R137	G1	R408	P3	R583	D3	R727	*B2	R841	*F2	RB403	*P3		
C508	*E3	C678	B2	C830	G5	D653	*A4	IC511	E2	R138	*J2	R409	N3	R584	*D3	R728	*B2	R842	A1	RB404	*P3		

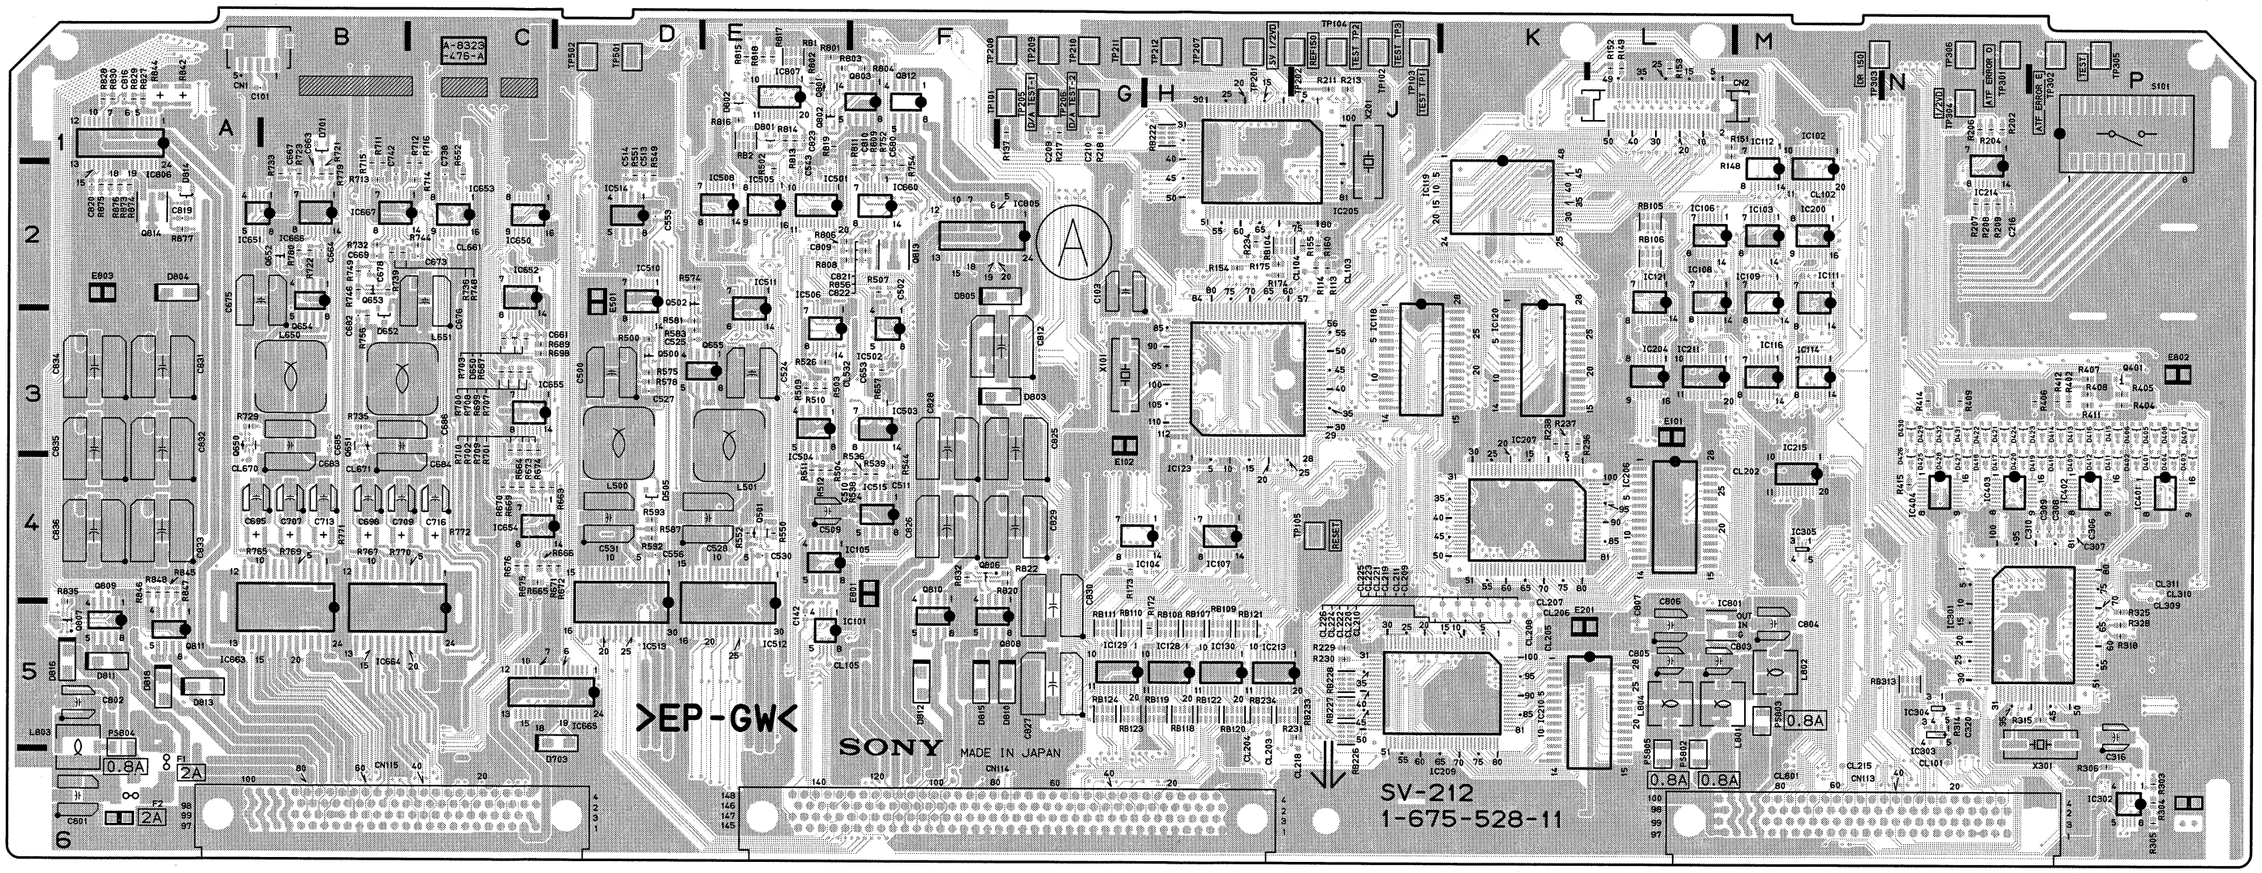

SV-212 -A SIDE-
SUFFIX: -11

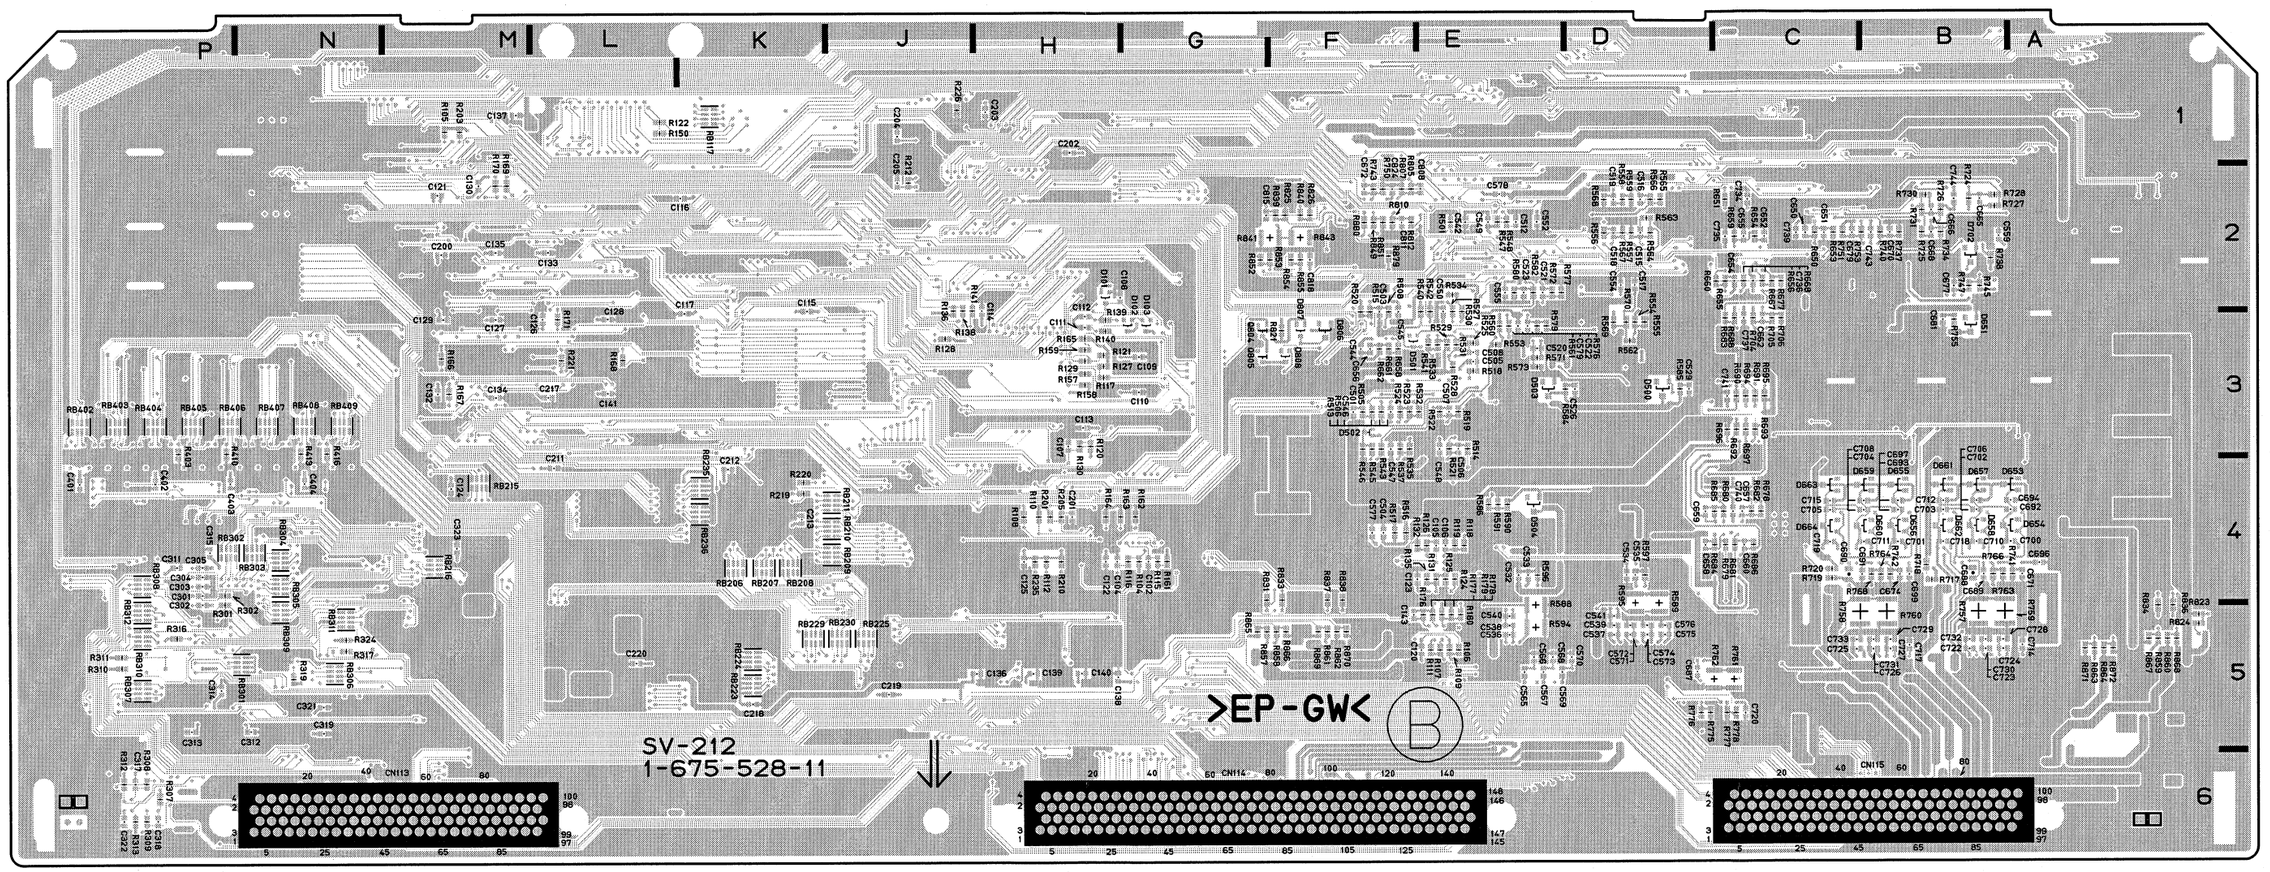

SV-212 -B SIDE-
SUFFIX: -11

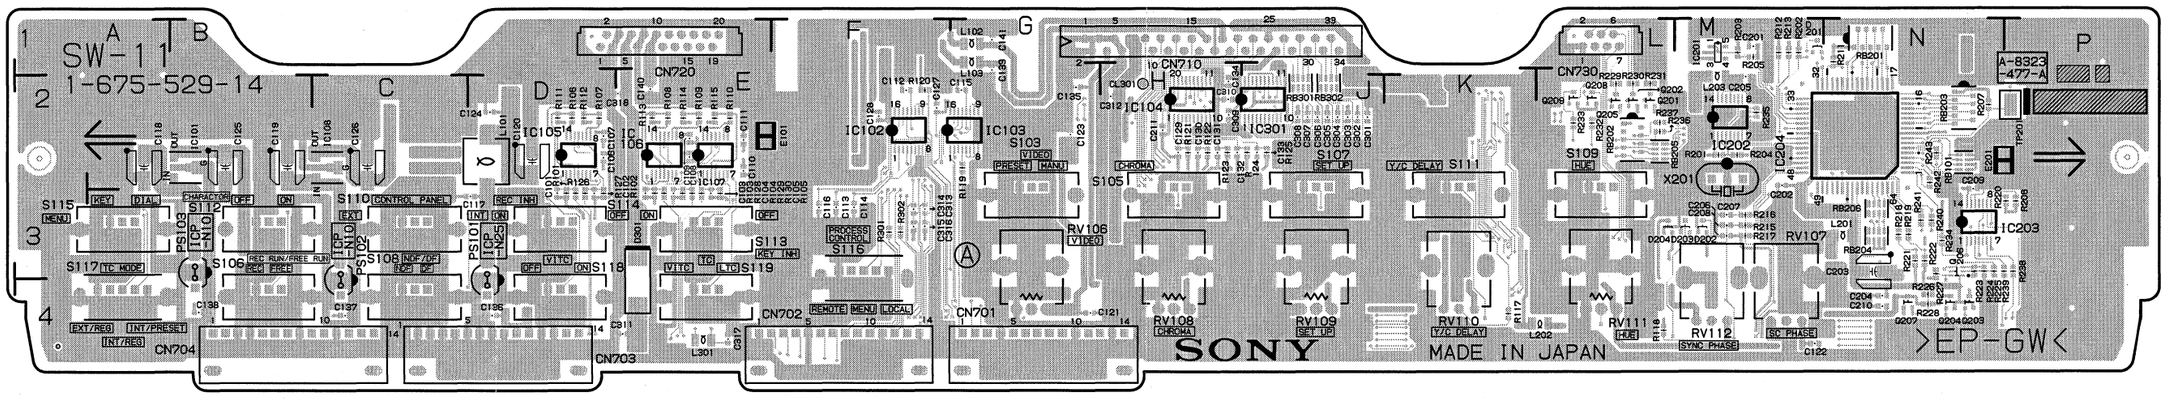

SW-11 -A SIDE-
SUFFIX: -14

SW-11 (1-675-529-14)

C101	D3	C202	M2	D203	M3	R101	D3	R218	N3	RV109	J4
C102	D3	C203	N3	D204	L3	R102	D3	R219	N3	RV110	K4
C103	E3	C204	N4	D301	E4	R103	E3	R220	P3	RV111	L4
C104	E3	C205	M2			R104	E3	R221	N3	RV112	M4
C105	E3	C206	M3	E101	E2	R105	E3	R222	N3		
C106	D2	C207	M3	E201	P2	R106	D2	R223	N3	S103	G3
C107	D2	C208	M3			R107	D2	R224	N3	S105	H3
C108	E2	C209	N3	IC101	B2	R108	E2	R225	N3	S106	B4
C109	E2	C210	N4	IC102	F2	R109	E2	R226	N4	S107	J3
C110	E2	C211	H2	IC103	G2	R110	E2	R227	N3	S108	C4
C111	E2	C301	J2	IC104	H2	R111	D2	R228	N4	S109	L3
C112	F2	C302	J2	IC105	D2	R112	D2	R229	L2	S110	C3
C113	F3	C303	J2	IC106	E2	R113	E2	R230	L2	S111	K3
C114	F3	C304	J2	IC107	E2	R114	E2	R231	L2	S112	B3
C115	G2	C305	J2	IC108	C2	R115	E2	R232	L2	S113	E3
C116	F3	C306	J2	IC201	M1	R117	K4	R233	L2	S114	D3
C117	D3	C307	J2	IC202	M2	R118	L4	R234	N3	S115	A3
C118	A2	C308	J2	IC203	N3	R119	G2	R235	M2	S116	F3
C119	B2	C309	H2	IC204	N2	R120	F2	R236	L2	S117	A4
C120	D2	C310	H2	IC301	J2	R121	H2	R237	L2	S118	D4
C121	G4	C311	E4			R122	H2	R238	P3	S119	E4
C122	M4	C312	H2	L101	D2	R123	H2	R239	P3		
C123	G2	C313	F3	L102	G1	R124	J2	R240	N3	TP201	P2
C124	D2	C314	F3	L103	G1	R125	J2	R241	N3		
C125	B2	C315	F3	L201	N3	R126	D3	R242	N2	X201	M2
C126	C2	C316	F3	L202	L4	R127	D3	R243	N2		
C127	F2	C317	E4	L203	M2	R128	E3	R301	F3	*:B SIDE	
C128	F2	C318	E2	L301	E4	R129	E3	R302	F3		
C129	H2					R130	E3				
C130	H2	CL201	*P1	PS101	D4	R201	M2	RB101	N2		
C131	H2	CL301	H2	PS102	C4	R202	M1	RB201	N1		
C132	H2			PS103	B3	R203	M1	RB202	L2		
C133	J2	CN701	G4			R204	M2	RB203	N2		
C134	H2	CN702	F4	Q201	L2	R205	M1	RB204	N3		
C135	G2	CN703	D4	Q202	L2	R206	P3	RB205	L2		
C136	D4	CN704	B4	Q203	N4	R207	N2	RB206	N3		
C137	C4	CN710	H1	Q204	N4	R211	N1	RB301	J2		
C138	B4	CN720	E1	Q205	L2	R212	M1	RB302	J2		
C139	G1	CN730	L1	Q206	N3	R213	M1				
C140	E2			Q207	N4	R215	M3	RV106	G4		
C141	G1	D201	M1	Q208	L2	R216	M3	RV107	M4		
C201	M1	D202	M3	Q209	L2	R217	M3	RV108	H4		

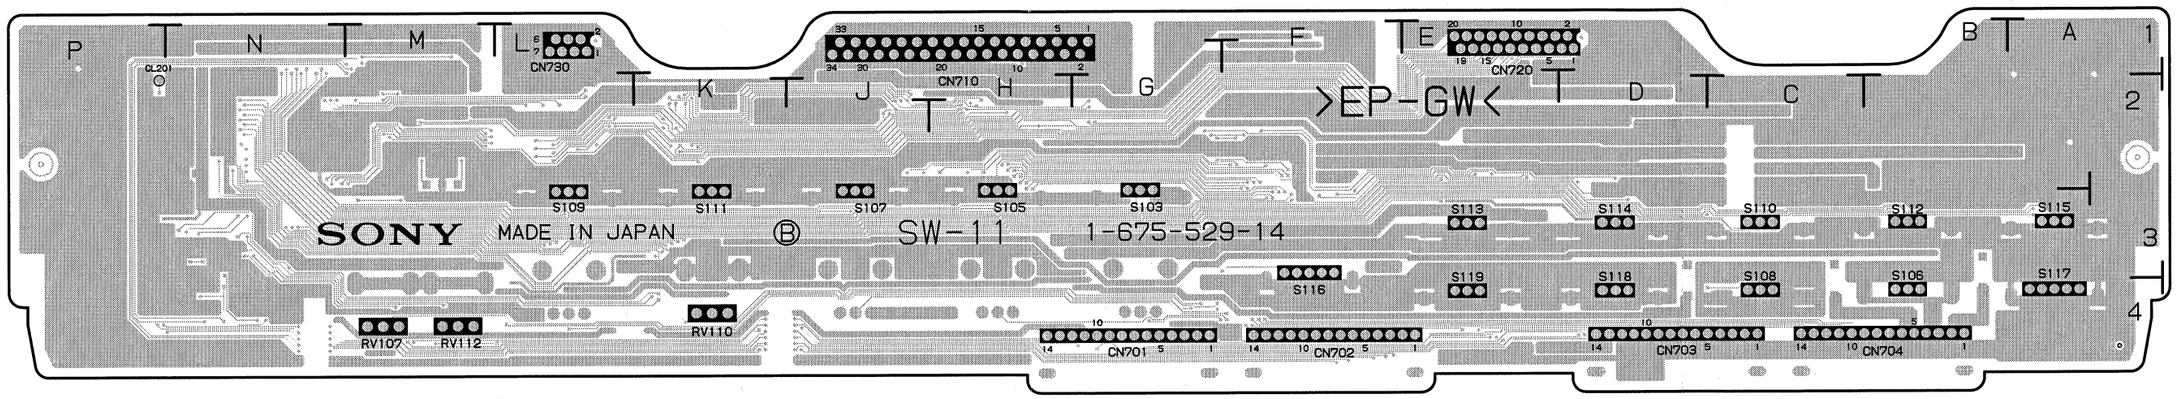

SW-11 -B SIDE-
SUFFIX: -14

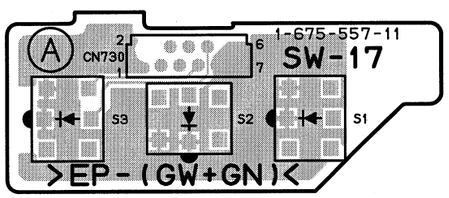

SW-17 -A SIDE-
SUFFIX: -11

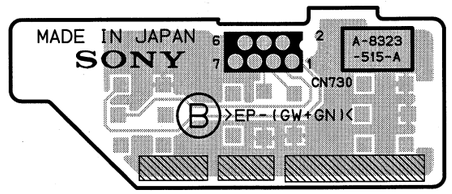

SW-17 -B SIDE-
SUFFIX: -11

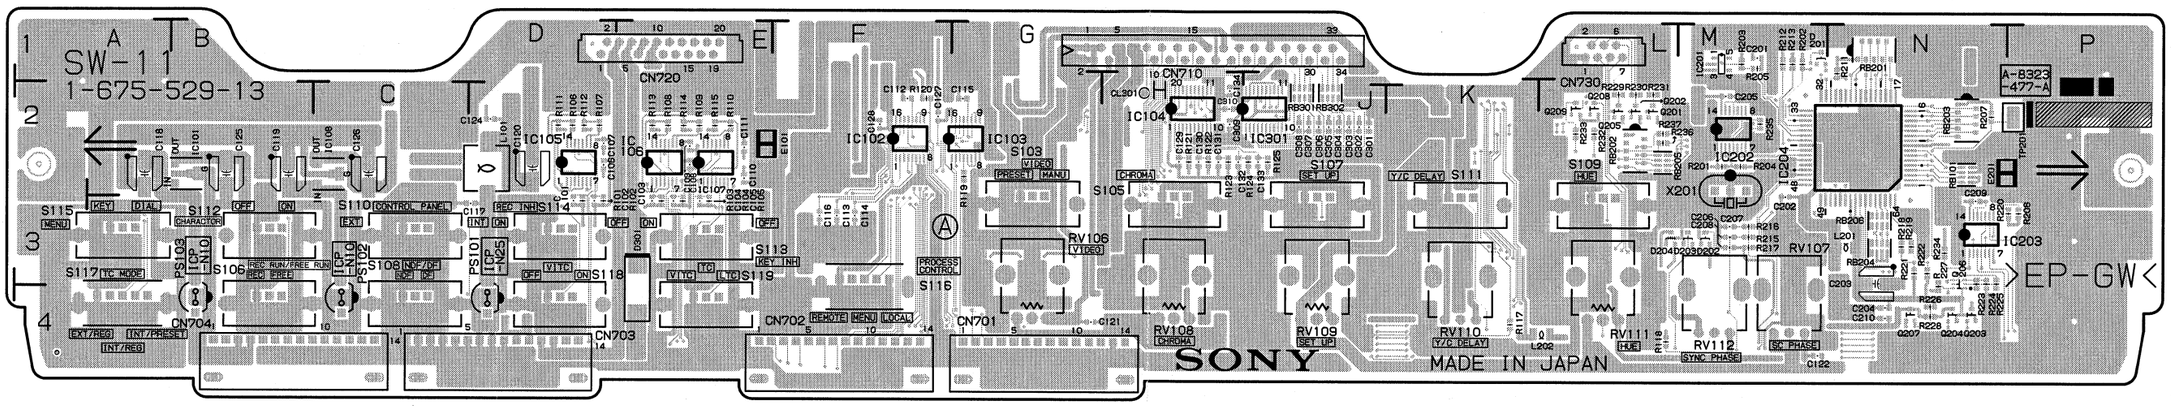

SW-11 -A SIDE-
SUFFIX: -13

SW-11 (1-675-529-13)

C101	D3	C210	N4	IC204	N2	R123	H2	RB205	L2
C102	D3	C301	J2	IC301	J2	R124	J2	RB206	N3
C103	E3	C302	J2			R125	J2	RB301	J2
C104	E3	C303	J2	L101	D2	R201	M2	RB302	J2
C105	E3	C304	J2	L201	N3	R202	M1		
C106	D2	C305	J2	L202	L4	R203	M1	RV106	G4
C107	D2	C306	J2			R204	M2	RV107	M4
C108	E2	C307	J2	PS101	D4	R205	M1	RV108	H4
C109	E2	C308	J2	PS102	C4	R206	P3	RV109	J4
C110	E2	C309	H2	PS103	B4	R207	N2	RV110	K4
C111	E2	C310	H2			R211	N1	RV111	L4
C112	F2			Q201	L2	R212	M1	RV112	M4
C113	F3	CL301	H2	Q202	L2	R213	M1		
C114	F3			Q203	N4	R215	M3	S103	G3
C115	G2	CN701	G4	Q204	N4	R216	M3	S105	H3
C116	F3	CN702	F4	Q205	L2	R217	M3	S106	B4
C117	D3	CN703	D4	Q206	N3	R218	N3	S107	J3
C118	A2	CN704	B4	Q207	N4	R219	N3	S108	C4
C119	B2	CN710	H1	Q208	L2	R220	P3	S109	L3
C120	D2	CN720	E1	Q209	L2	R221	N3	S110	C3
C121	G4	CN730	L1			R222	N3	S111	K3
C122	M4			R101	D3	R223	N3	S112	B3
C124	D2	D201	M1	R102	D3	R224	N3	S113	E3
C125	B2	D202	M3	R103	E3	R225	N3	S114	D3
C126	C2	D203	M3	R104	E3	R226	N4	S115	A3
C127	F2	D204	L3	R105	E3	R227	N3	S116	F3
C128	F2	D301	E4	R106	D2	R228	N4	S117	A4
C129	H2			R107	D2	R229	L2	S118	D4
C130	H2	E101	E2	R108	E2	R230	L2	S119	E4
C131	H2	E201	P2	R109	E2	R231	L2		
C132	H2			R110	E2	R232	L2	TP201	P2
C133	J2	IC101	B2	R111	D2	R233	L2		
C134	H2	IC102	F2	R112	D2	R234	N3	X201	M2
C201	M1	IC103	G2	R113	E2	R235	M2		
C202	M2	IC104	H2	R114	E2	R236	L2		
C203	N3	IC105	D2	R115	E2	R237	L2		
C204	N4	IC106	E2	R117	K4				
C205	M2	IC107	E2	R118	L4	RB101	N2		
C206	M3	IC108	C2	R119	G2	RB201	N1		
C207	M3	IC201	M1	R120	F2	RB202	L2		
C208	M3	IC202	M2	R121	H2	RB203	N2		
C209	N3	IC203	N3	R122	H2	RB204	N3		

SW-11, SW-17

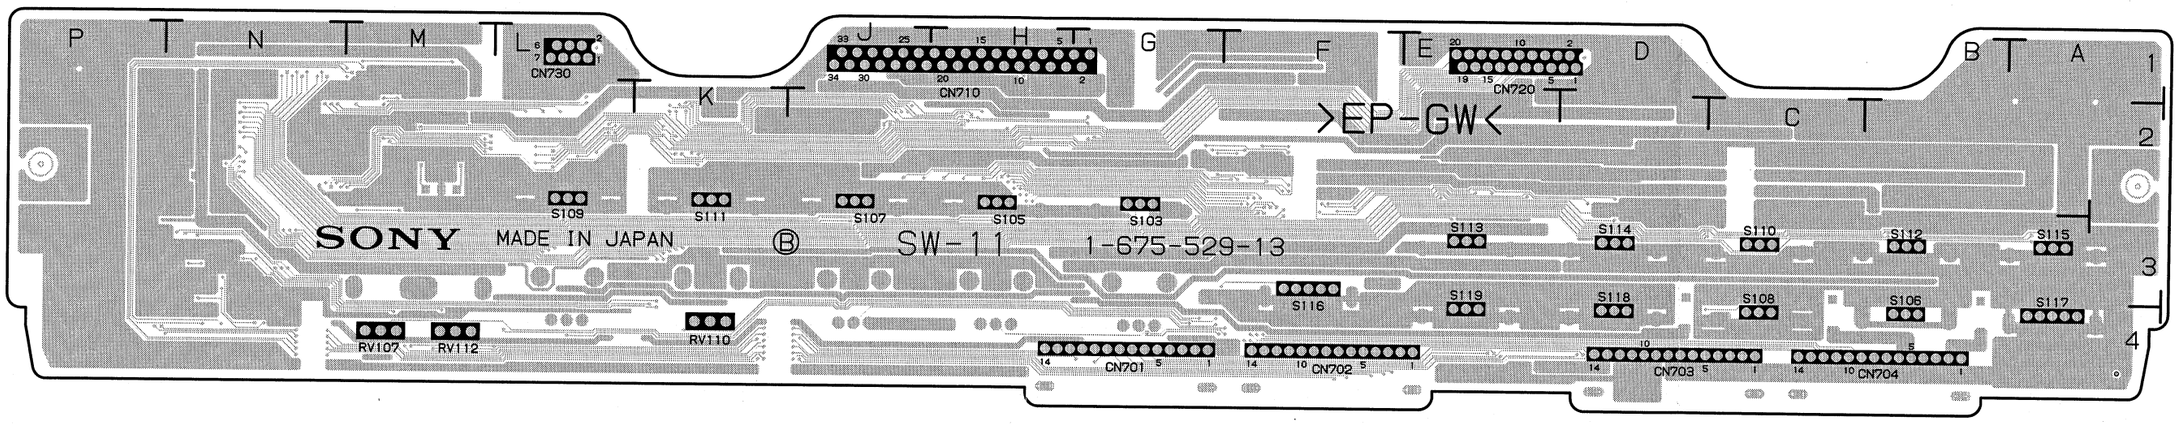

SW-11 -B SIDE-
SUFFIX: -13

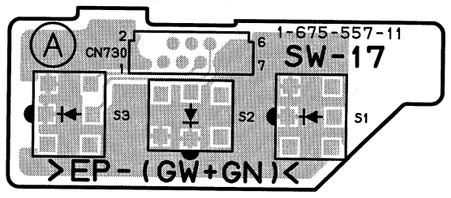

SW-17 -A SIDE-
SUFFIX: -11

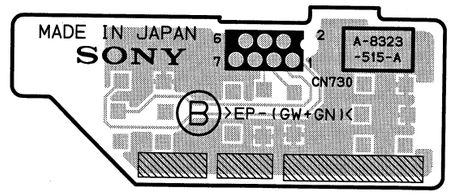

SW-17 -B SIDE-
SUFFIX: -11

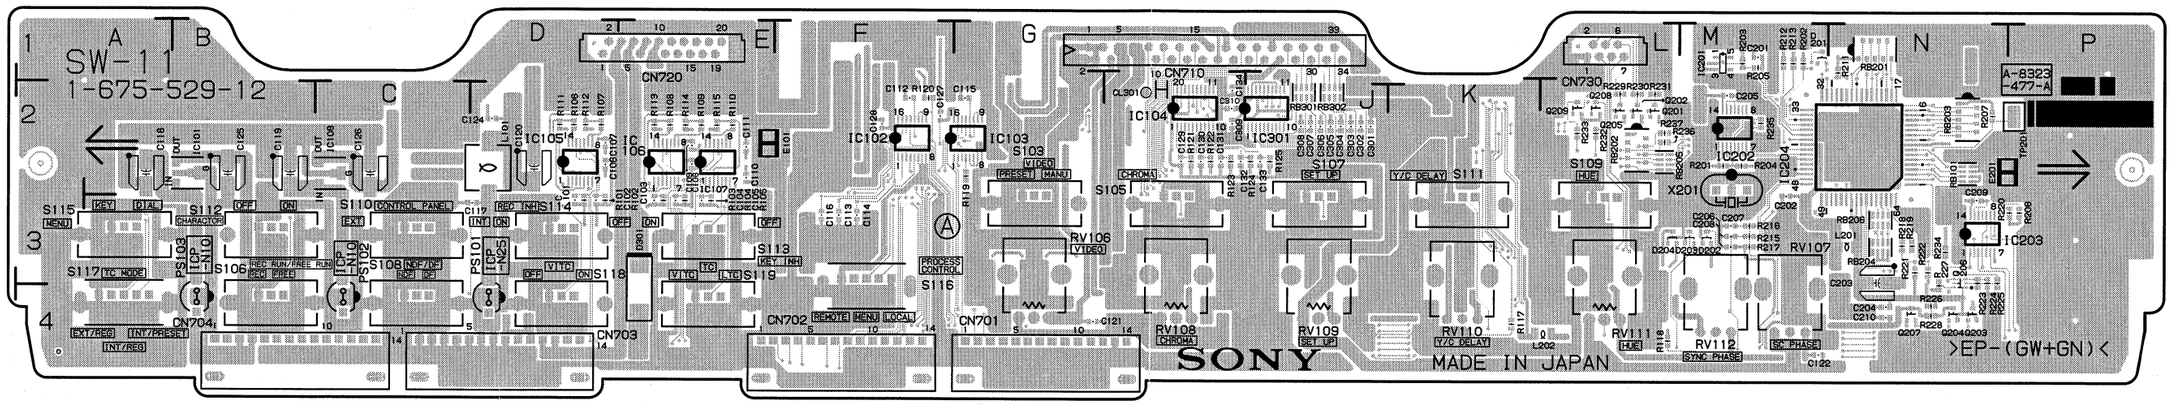

SW-11 -A SIDE-
SUFFIX: -12

SW-11 (1-675-529-12)

C101	D3	C210	N4	IC204	N2	R123	H2	RB205	L2
C102	D3	C301	J2	IC301	J2	R124	J2	RB206	N3
C103	E3	C302	J2			R125	J2	RB301	J2
C104	E3	C303	J2	L101	D2	R201	M2	RB302	J2
C105	E3	C304	J2	L201	N3	R202	M1		
C106	D2	C305	J2	L202	L4	R203	M1	RV106	G4
C107	D2	C306	J2			R204	M2	RV107	M4
C108	E2	C307	J2	PS101	D4	R205	M1	RV108	H4
C109	E2	C308	J2	PS102	C4	R206	P3	RV109	J4
C110	E2	C309	H2	PS103	B4	R207	N2	RV110	K4
C111	E2	C310	H2			R211	N1	RV111	L4
C112	F2			Q201	L2	R212	M1	RV112	M4
C113	F3	CL301	H2	Q202	L2	R213	M1		
C114	F3			Q203	N4	R215	M3	S103	G3
C115	G2	CN701	G4	Q204	N4	R216	M3	S105	H3
C116	F3	CN702	F4	Q205	L2	R217	M3	S106	B4
C117	D3	CN703	D4	Q206	N3	R218	N3	S107	J3
C118	A2	CN704	B4	Q207	N4	R219	N3	S108	C4
C119	B2	CN710	H1	Q208	L2	R220	P3	S109	L3
C120	D2	CN720	E1	Q209	L2	R221	N3	S110	C3
C121	G4	CN730	L1			R222	N3	S111	K3
C122	M4			R101	D3	R223	N3	S112	B3
C124	D2	D201	M1	R102	D3	R224	N3	S113	E3
C125	B2	D202	M3	R103	E3	R225	N3	S114	D3
C126	C2	D203	M3	R104	E3	R226	N4	S115	A3
C127	F2	D204	L3	R105	E3	R227	N3	S116	F3
C128	F2	D301	E4	R106	D2	R228	N4	S117	A4
C129	H2			R107	D2	R229	L2	S118	D4
C130	H2	E101	E2	R108	E2	R230	L2	S119	E4
C131	H2	E201	P2	R109	E2	R231	L2		
C132	H2			R110	E2	R232	L2	TP201	P2
C133	J2	IC101	B2	R111	D2	R233	L2		
C134	H2	IC102	F2	R112	D2	R234	N3	X201	M2
C201	M1	IC103	G2	R113	E2	R235	M2		
C202	M2	IC104	H2	R114	E2	R236	L2		
C203	N3	IC105	D2	R115	E2	R237	L2		
C204	N4	IC106	E2	R117	K4				
C205	M2	IC107	E2	R118	L4	RB101	N2		
C206	M3	IC108	C2	R119	G2	RB201	N1		
C207	M3	IC201	M1	R120	F2	RB202	L2		
C208	M3	IC202	M2	R121	H2	RB203	N2		
C209	N3	IC203	N3	R122	H2	RB204	N3		

SW-11, SW-17

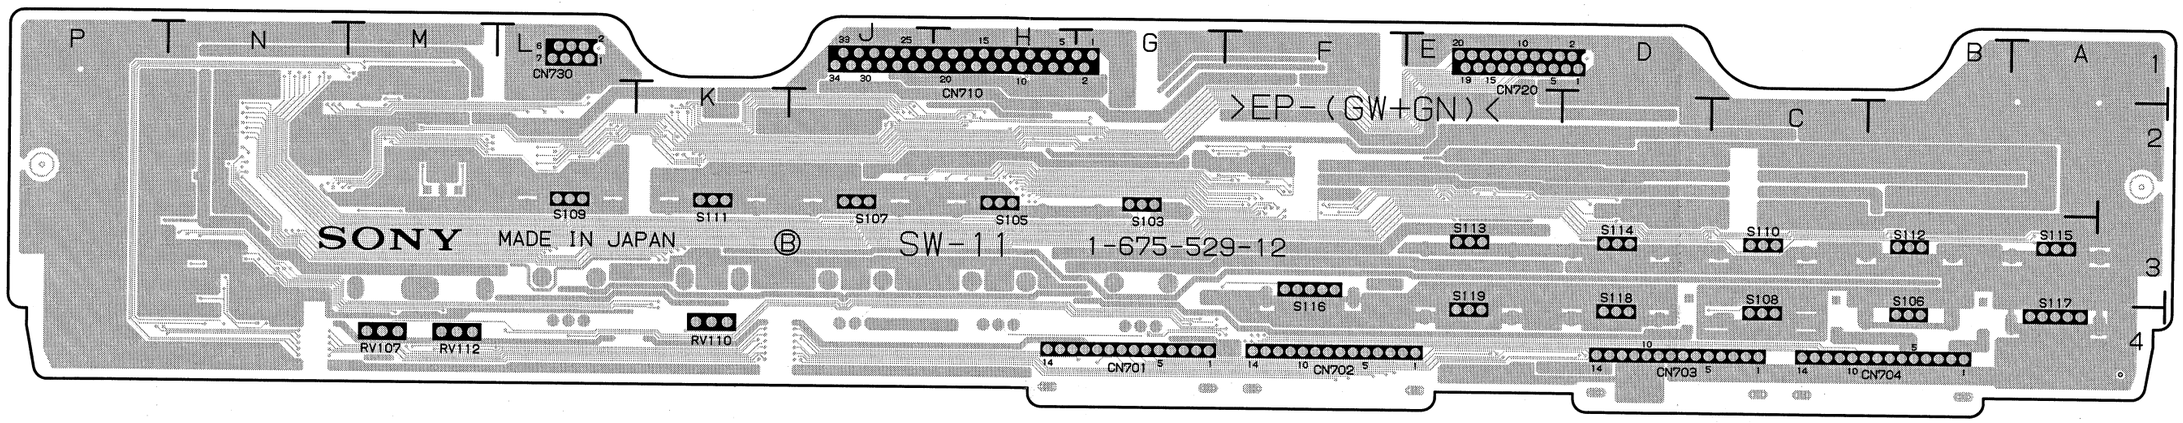

SW-11 -B SIDE-
SUFFIX: -12

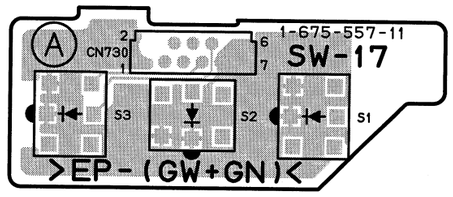

SW-17 -A SIDE-
SUFFIX: -11

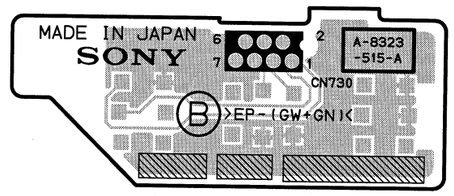

SW-17 -B SIDE-
SUFFIX: -11

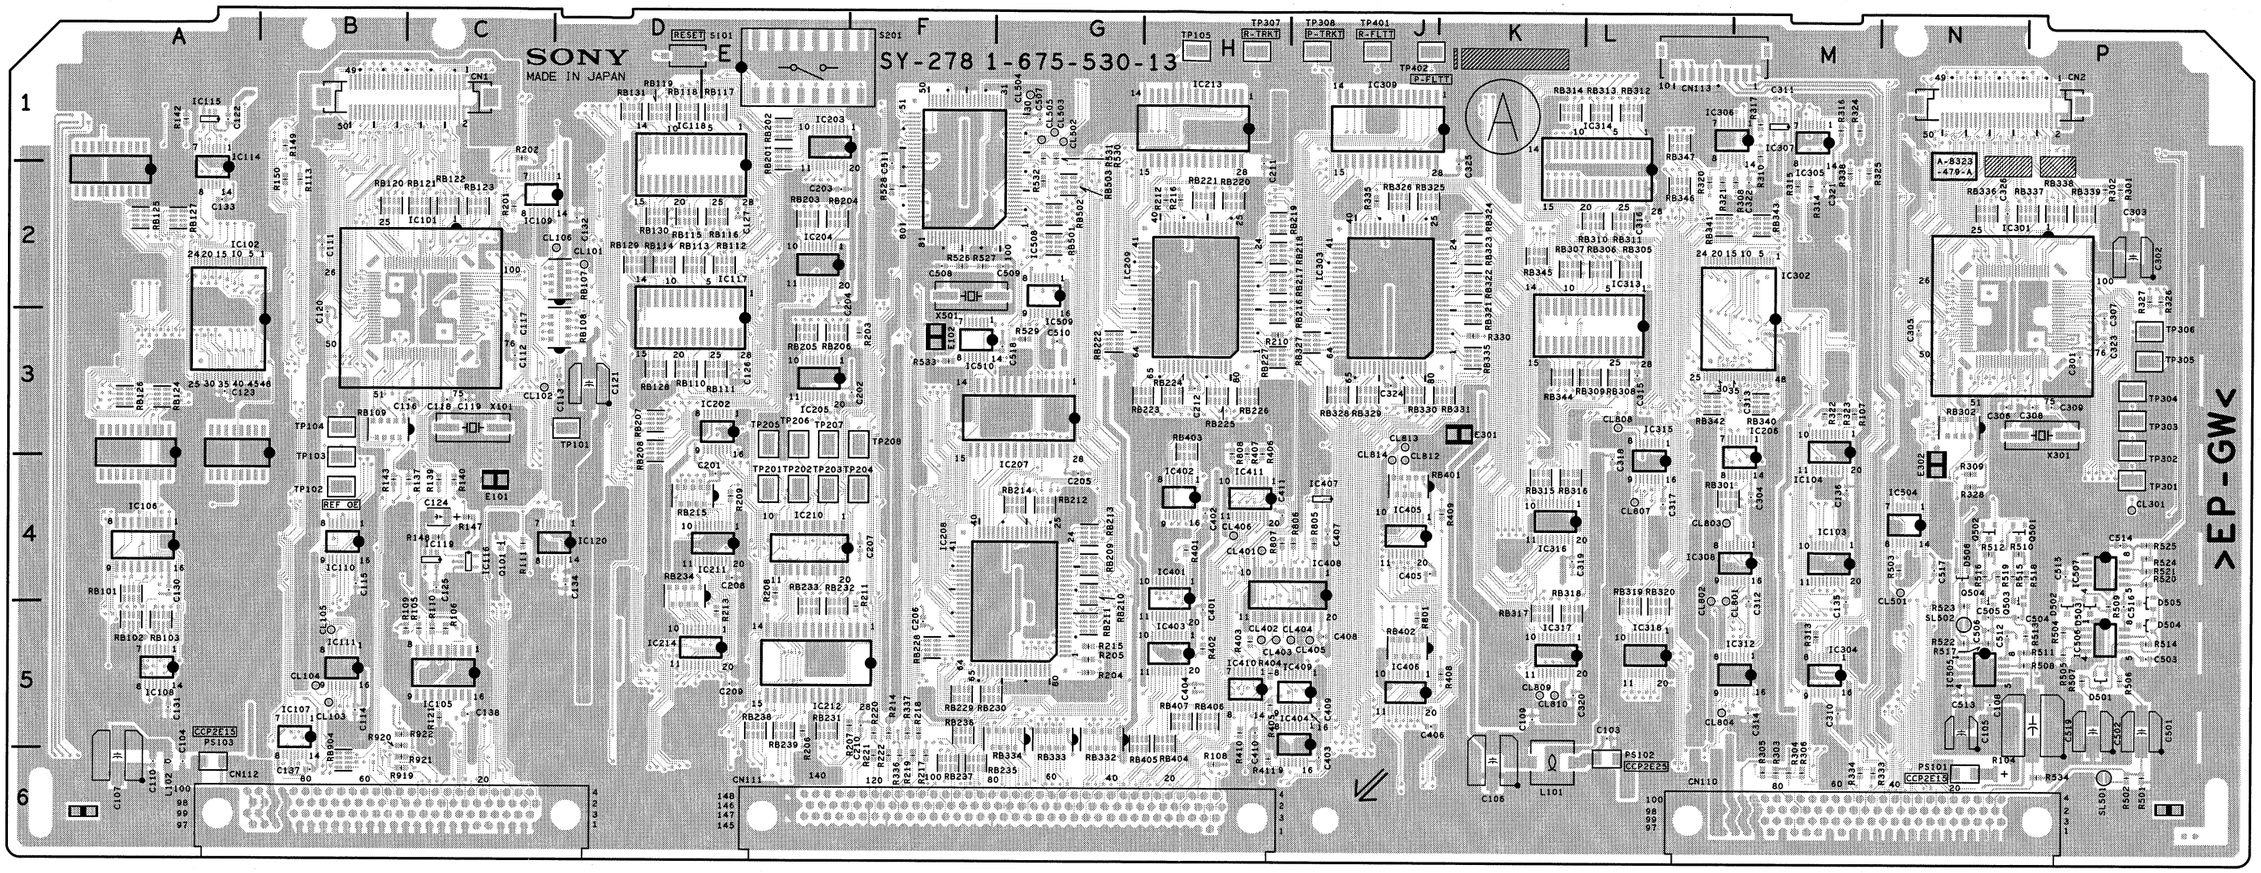

SY-278 -A SIDE-
SUFFIX: -13

SY-278 (1-675-530-13)

C103	L5	C134	D4	C313	M3	C505	N5	CL501	N4	D506	N4
C104	A6	C135	M4	C314	M5	C506	N5	CL502	G1		
C105	N5	C136	M4	C315	L3	C507	G1	CL503	G1	E101	C4
C106	K6	C137	B6	C316	L2	C508	F2	CL504	G1	E102	F3
C107	A6	C138	C5	C317	L4	C509	G2	CL505	G1	E301	K3
C108	N5	C201	E4	C318	L3	C510	G3	CL801	L4	E302	N4
C109	K5	C202	F3	C319	K4	C511	F1	CL802	L4		
C110	A6	C203	E2	C320	K5	C512	N5	CL803	L4	IC101	C2
C111	B2	C204	E2	C321	M2	C513	N5	CL804	L5	IC102	B2
C112	C3	C205	G4	C322	M2	C514	P4	CL807	L4	IC103	M4
C113	D3	C206	F5	C323	P3	C515	P4	CL808	L3	IC104	M3
C114	B5	C207	F4	C324	J3	C516	P4	CL809	K5	IC105	C5
C115	B4	C208	E4	C325	K1	C517	N4	CL810	K5	IC106	A4
C116	C3	C209	E5	C326	N2	C518	G3	CL812	J4	IC107	B5
C117	C3	C210	F5	C401	H5	C519	P5	CL813	J3	IC108	A5
C118	C3	C211	H1	C402	H4			CL814	J4	IC109	C2
C119	C3	C212	H3	C403	J6	CL101	D2			IC110	B4
C120	B3	C301	P3	C404	H5	CL102	C3	CN1	B1	IC111	B5
C121	D3	C302	P2	C405	J4	CL103	B5	CN2	N1	IC114	A1
C122	A1	C303	P2	C406	J5	CL104	B5	CN110	M6	IC115	A1
C123	A3	C304	M4	C407	J4	CL105	B5	CN111	G6	IC116	C4
C124	C4	C305	N3	C408	J5	CL106	D2	CN112	B6	IC117	E2
C125	C4	C306	N3	C409	J5	CL301	P4	CN113	L1	IC118	E1
C126	E3	C307	P3	C410	H5	CL401	H4			IC119	C4
C127	E2	C308	P3	C411	H4	CL402	H5	D501	P5	IC120	D4
C130	A4	C309	P3	C501	P5	CL403	H5	D502	P4	IC202	E3
C131	A5	C310	M5	C502	P5	CL404	J5	D503	P4	IC203	E1
C132	D2	C311	M1	C503	P5	CL405	J5	D504	P5	IC204	E2
C133	A2	C312	M4	C504	N5	CL406	H4	D505	P4	IC205	E3

IC206	M3	IC405	J4	R105	C5	R212	H2	R324	M1	R507	P5	R805	J4	RB124	A3	RB222	G3	RB314	K1	RB343	M2	TP202	E4
IC207	G3	IC406	J5	R106	C5	R213	E5	R325	M2	R508	N5	R806	J4	RB125	A2	RB223	H3	RB315	K4	RB344	K3	TP203	E4
IC208	G4	IC407	J4	R107	M3	R214	F5	R326	P2	R509	P4	R807	H4	RB126	A3	RB224	H3	RB316	K4	RB345	K2	TP204	F4
IC209	H2	IC408	J4	R108	H6	R215	G5	R327	P2	R510	N4	R808	H3	RB127	A2	RB225	H3	RB317	K5	RB346	L2	TP205	E3
IC210	E4	IC409	J5	R109	C5	R216	H2	R328	N4	R511	N5	R919	B6	RB128	D3	RB226	H3	RB318	K5	RB347	L1	TP206	E3
IC211	E4	IC410	H5	R110	C5	R217	F6	R330	K3	R512	N4	R920	B5	RB129	D2	RB227	H3	RB319	L4	RB401	J4	TP207	E3
IC212	F5	IC411	H4	R111	C4	R218	F5	R333	M6	R513	N5	R921	B6	RB130	D2	RB228	F5	RB320	L4	RB402	J5	TP208	F3
IC213	H1	IC504	N4	R113	B2	R219	F6	R334	M6	R514	P5	R922	B5	RB131	D1	RB229	F5	RB321	K2	RB403	H3	TP301	P4
IC214	E5	IC505	N5	R121	C5	R220	F5	R335	J2	R515	N4			RB201	E1	RB230	F5	RB322	K2	RB404	H5	TP302	P3
IC301	N2	IC506	P5	R137	C4	R221	F6	R336	F6	R516	N4	RB101	A4	RB202	E1	RB231	E5	RB323	K2	RB405	G5	TP303	P3
IC302	M2	IC507	P4	R139	C4	R222	F6	R337	F5	R517	N5	RB102	A5	RB203	E2	RB232	E5	RB324	K2	RB406	H5	TP304	P3
IC303	J2	IC508	F2	R140	C4	R301	P2	R338	M2	R518	N4	RB103	A5	RB204	E2	RB233	E5	RB325	J2	RB407	H5	TP305	P3
IC304	M5	IC509	G2	R142	A1	R302	P2	R401	H4	R519	N4	RB107	D2	RB205	E3	RB234	D4	RB326	J2	RB501	G2	TP306	P3
IC305	M1	IC510	F3	R143	B4	R303	M6	R402	H5	R520	P4	RB108	D3	RB206	E3	RB235	F6	RB327	J3	RB502	G2	TP307	H1
IC306	M1			R147	C4	R304	M6	R403	H5	R521	P4	RB109	B3	RB207	D3	RB236	F5	RB328	J3	RB503	G2	TP308	J1
IC307	M1	L101	K6	R148	C4	R305	M6	R404	H5	R522	N5	RB110	D3	RB208	D3	RB237	F6	RB329	J3	RB904	B6	TP401	J1
IC308	M4	L102	A6	R149	B1	R306	M6	R405	H5	R523	N4	RB111	E3	RB209	G4	RB238	E5	RB330	J3			TP402	J1
IC309	J1			R150	B2	R308	M2	R406	H3	R524	P4	RB112	E2	RB210	G4	RB239	E5	RB331	K3	S101	D1		
IC312	M5	PS101	N6	R201	C2	R309	N4	R407	H3	R525	P4	RB113	D2	RB211	G5	RB301	L4	RB332	G5	S201	E1	X101	C3
IC313	L2	PS102	L6	R202	C1	R310	M1	R408	K5	R526	F2	RB114	D2	RB212	G4	RB302	N3	RB333	G5			X301	P3
IC314	L1	PS103	A6	R203	F3	R313	M5	R409	K4	R527	F2	RB115	D2	RB213	G4	RB305	L2	RB334	G5	SL501	P6	X501	F2
IC315	L3			R204	G5	R314	M2	R410	H5	R528	F2	RB116	E2	RB214	G4	RB306	L2	RB335	K3	SL502	N5		
IC316	K4	Q101	C4	R205	G5	R315	M2	R411	H6	R529	G3	RB117	E1	RB215	D4	RB307	K2	RB336	N2				
IC317	K5	Q501	N4	R206	E5	R316	M1	R501	P6	R530	G1	RB118	D1	RB216	H2	RB308	L3	RB337	N2	TP101	D3		
IC318	L5	Q502	N4	R207	F5	R317	M1	R502	P6	R531	G1	RB119	D1	RB217	H2	RB309	L3	RB338	P2	TP102	B4		
IC401	H4	Q503	N4	R208	E4	R320	L2	R503	N4	R532	G2	RB120	B2	RB218	H2	RB310	L2	RB339	P2	TP103	B4		
IC402	H4	Q504	N4	R209	E4	R321	L2	R504	P5	R533	F3	RB121	C2	RB219	H2	RB311	L2	RB340	M3	TP104	B3		
IC403	H5			R210	H3	R322	M3	R505	P5	R534	P6	RB122	C2	RB220	H2	RB312	L1	RB341	L2	TP105	H1		
IC404	J5	R104	N6	R211	F5	R323	M3	R506	P5	R801	J5	RB123	C2	RB221	H2	RB313	L1	RB342	L3	TP201	E4		

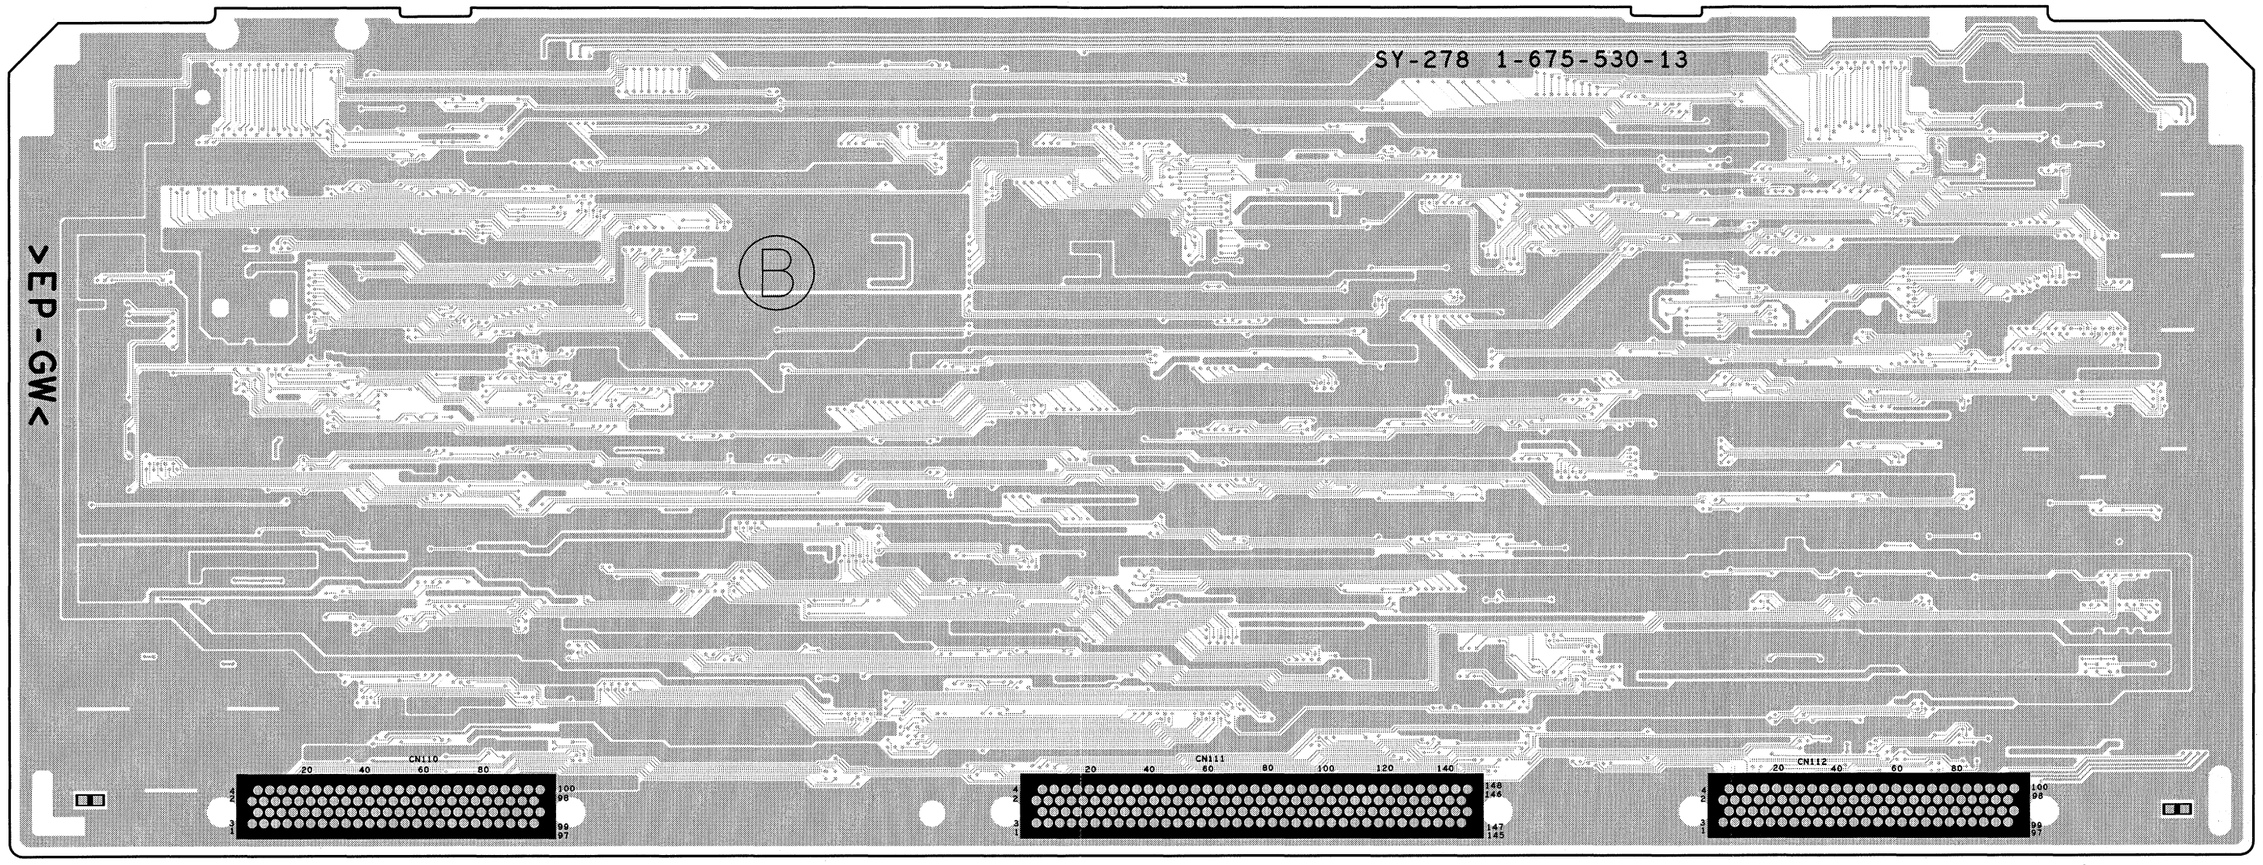

SY-278 -B SIDE-
SUFFIX: -13

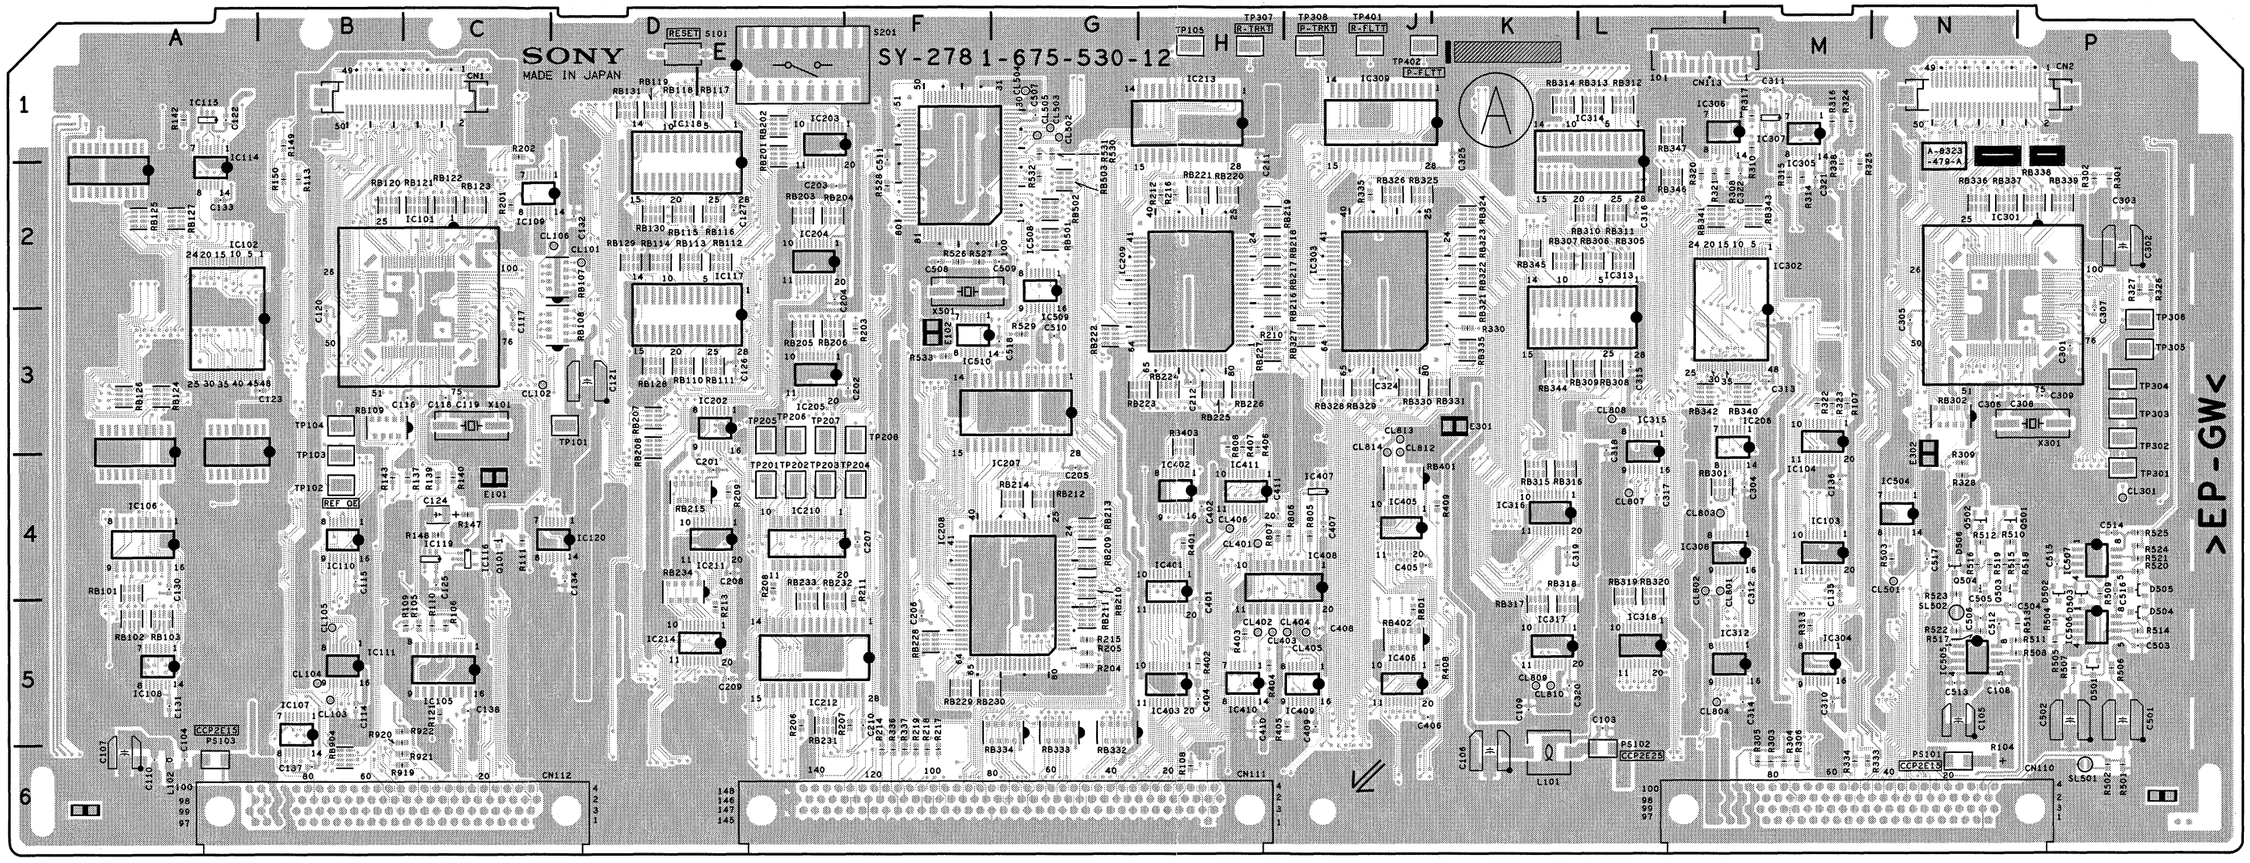

SY-278 -A SIDE-
SUFFIX: -12

SY-278 (1-675-530-12)

C103	L5	C136	M4	C314	M5	C508	F2	CL504	G1	E101	C4	IC207	G3	IC406	J5	R105	C5	R211	F5	R325	M2	R509	P4	R807	H4	RB125	A2	RB222	G3	RB318	K5	RB346	L2	TP208	F3
C104	A6	C137	B6	C315	L3	C509	G2	CL505	G1	E102	F3	IC208	G4	IC407	J4	R106	C5	R212	H2	R326	P2	R510	N4	R808	H3	RB126	A3	RB223	H3	RB319	L4	RB347	L1	TP301	P4
C105	N5	C138	C5	C316	L2	C510	G3	CL801	L4	E301	K3	IC209	H2	IC408	J4	R107	M3	R213	E5	R327	P2	R511	N5	R919	B6	RB127	A2	RB224	H3	RB320	L4	RB401	J4	TP302	P3
C106	K6	C201	E4	C317	L4	C511	F1	CL802	L4	E302	N4	IC210	E4	IC409	J5	R108	H6	R214	F6	R328	N4	R512	N4	R920	B5	RB128	D3	RB225	H3	RB321	K2	RB402	J5	TP303	P3
C107	A6	C202	F3	C318	L3	C512	N5	CL803	L4			IC211	E4	IC410	H5	R109	C5	R215	G5	R330	K3	R513	N5	R921	B6	RB129	D2	RB226	H3	RB322	K2	RB403	H3	TP304	P3
C108	N5	C203	E2	C319	K4	C513	N5	CL804	L5	IC101	C2	IC212	F5	IC411	H4	R110	C5	R216	H2	R333	M6	R514	P5	R922	B5	RB130	D2	RB227	H3	RB323	K2	RB501	G2	TP305	P3
C109	K5	C204	E2	C320	K5	C514	P4	CL807	L4	IC102	B2	IC213	H1	IC504	N4	R111	C4	R217	F6	R334	M6	R515	N4			RB131	D1	RB228	F5	RB324	K2	RB502	G2	TP306	P3
C110	A6	C205	G4	C321	M2	C515	P4	CL808	L3	IC103	M4	IC214	E5	IC505	N5	R113	B2	R218	F6	R335	J2	R516	N4	RB101	A4	RB201	E1	RB229	F5	RB325	J2	RB503	G2	TP307	H1
C114	B5	C206	F5	C322	M2	C516	P4	CL809	K5	IC104	M3	IC301	N2	IC506	P5	R121	C5	R219	F6	R336	F6	R517	N5	RB102	A5	RB202	E1	RB230	F5	RB326	J2	RB904	B6	TP308	J1
C115	B4	C207	P4	C324	J3	C517	N4	CL810	K5	IC105	C5	IC302	M2	IC507	P4	R137	C4	R301	P2	R337	F6	R518	N4	RB103	A5	RB203	E2	RB231	E5	RB327	J3			TP401	J1
C116	C3	C208	E4	C325	K1	C518	G3	CL812	J4	IC106	A4	IC303	J2	IC508	F2	R139	C4	R302	P2	R338	M2	R519	N4	RB107	D2	RB204	E2	RB232	E5	RB328	J3	S101	D1	TP402	J1
C117	C3	C209	E5	C401	H5			CL813	J3	IC107	B5	IC304	M5	IC509	G2	R140	C4	R303	M6	R401	H4	R520	P4	RB108	D3	RB205	E3	RB233	E5	RB329	J3	S201	E1		
C118	C3	C210	F5	C402	H4	CL101	D2	CL814	J4	IC108	A5	IC305	M1	IC510	F3	R142	A1	R304	M6	R402	H5	R521	P4	RB109	B3	RB206	E3	RB234	D4	RB330	J3			X101	C3
C119	C3	C211	H1	C404	H5	CL102	C3			IC109	C2	IC306	M1			R143	B4	R305	M6	R403	H5	R522	N5	RB110	D3	RB207	D3	RB301	L4	RB331	K3	SL501	P6	X301	P3
C120	B3	C212	H3	C405	J4	CL103	B5	CN1	B1	IC110	B4	IC307	M1	L101	K6	R147	C4	R306	M6	R404	H5	R523	N4	RB111	E3	RB208	D3	RB302	N3	RB332	G5	SL502	N5	X501	F2
C121	D3	C301	P3	C406	J5	CL104	B5	CN2	N1	IC111	B5	IC308	M4	L102	A6	R148	C4	R308	M2	R405	J5	R524	P4	RB112	E2	RB209	G4	RB305	L2	RB333	G5				
C122	A1	C302	P2	C407	J4	CL105	B5	CN110	M6	IC114	A1	IC309	J1			R149	B1	R309	N4	R406	H3	R525	P4	RB113	D2	RB210	G4	RB306	L2	RB334	G5	TP101	D3		
C123	B3	C303	P2	C408	J5	CL106	D2	CN111	G6	IC115	A1	IC312	M5	PS101	N6	R150	B2	R310	M1	R407	H3	R526	F2	RB114	D2	RB211	G5	RB307	K2	RB335	K3	TP102	B4		
C124	C4	C304	M4	C409	J5	CL301	P4	CN112	B6	IC116	C4	IC313	L2	PS102	L6	R201	C2	R313	M5	R408	K5	R527	F2	RB115	D2	RB212	G4	RB308	L3	RB336	N2	TP103	B4		
C125	C4	C305	N3	C410	H5	CL401	H4	CN113	L1	IC117	E2	IC314	L1	PS103	A6	R202	C1	R314	M2	R409	K4	R528	F2	RB116	E2	RB213	G4	RB309	L3	RB337	N2	TP104	B3		
C126	E3	C306	N3	C411	H4	CL402	H5			IC118	E1	IC315	L3			R203	F3	R315	M2	R501	P6	R529	G3	RB117	E1	RB214	G4	RB310	L2	RB338	P2	TP105	H1		
C127	E2	C307	P3	C501	P5	CL403	H5	D501	P5	IC119	C4	IC316	K4	Q101	C4	R204	G5	R316	M1	R502	P6	R530	G1	RB118	D1	RB215	D4	RB311	L2	RB339	P2	TP201	E4		
C130	A4	C308	P3	C502	P5	CL404	J5	D502	P4	IC120	D4	IC317	K5	Q501	N4	R205	G5	R317	M1	R503	N4	R531	G1	RB119	D1	RB216	H2	RB312	L1	RB340	M3	TP202	E4		
C131	A5	C309	P3	C503	P5	CL405	J5	D503	P4	IC202	E3	IC318	L5	Q502	N4	R206	E5	R320	L2	R504	P5	R532	G2	RB120	B2	RB217	H2	RB313	L1	RB341	L2	TP203	E4		
C132	D2	C310	M5	C504	N5	CL406	H4	D504	P5	IC203	E1	IC401	H4	Q503	N4	R207	F5	R321	L2	R505	P5	R533	F3	RB121	C2	RB218	H2	RB314	K1	RB342	L3	TP204	F4		
C133	A2	C311	M1	C505	N5	CL501	N4	D505	P4	IC204	E2	IC402	H4	Q504	N4	R208	E4	R322	M3	R506	P5	R801	J5	RB122	C2	RB219	H2	RB315	K4	RB343	M2	TP205	E3		
C134	D4	C312	M4	C506	N5	CL502	G1	D506	N4	IC205	E3	IC403	H5			R209	E4	R323	M3	R507	P5	R805	J4	RB123	C2	RB220	H2	RB316	K4	RB344	K3	TP206	E3		
C135	M4	C313	M3	C507	G1	CL503	G1			IC206	M3	IC405	J4	R104	N6	R210	H3	R324	M1	R508	N5	R806	J4	RB124	A3	RB221	H2	RB317	K5	RB345	K2	TP207	E3		

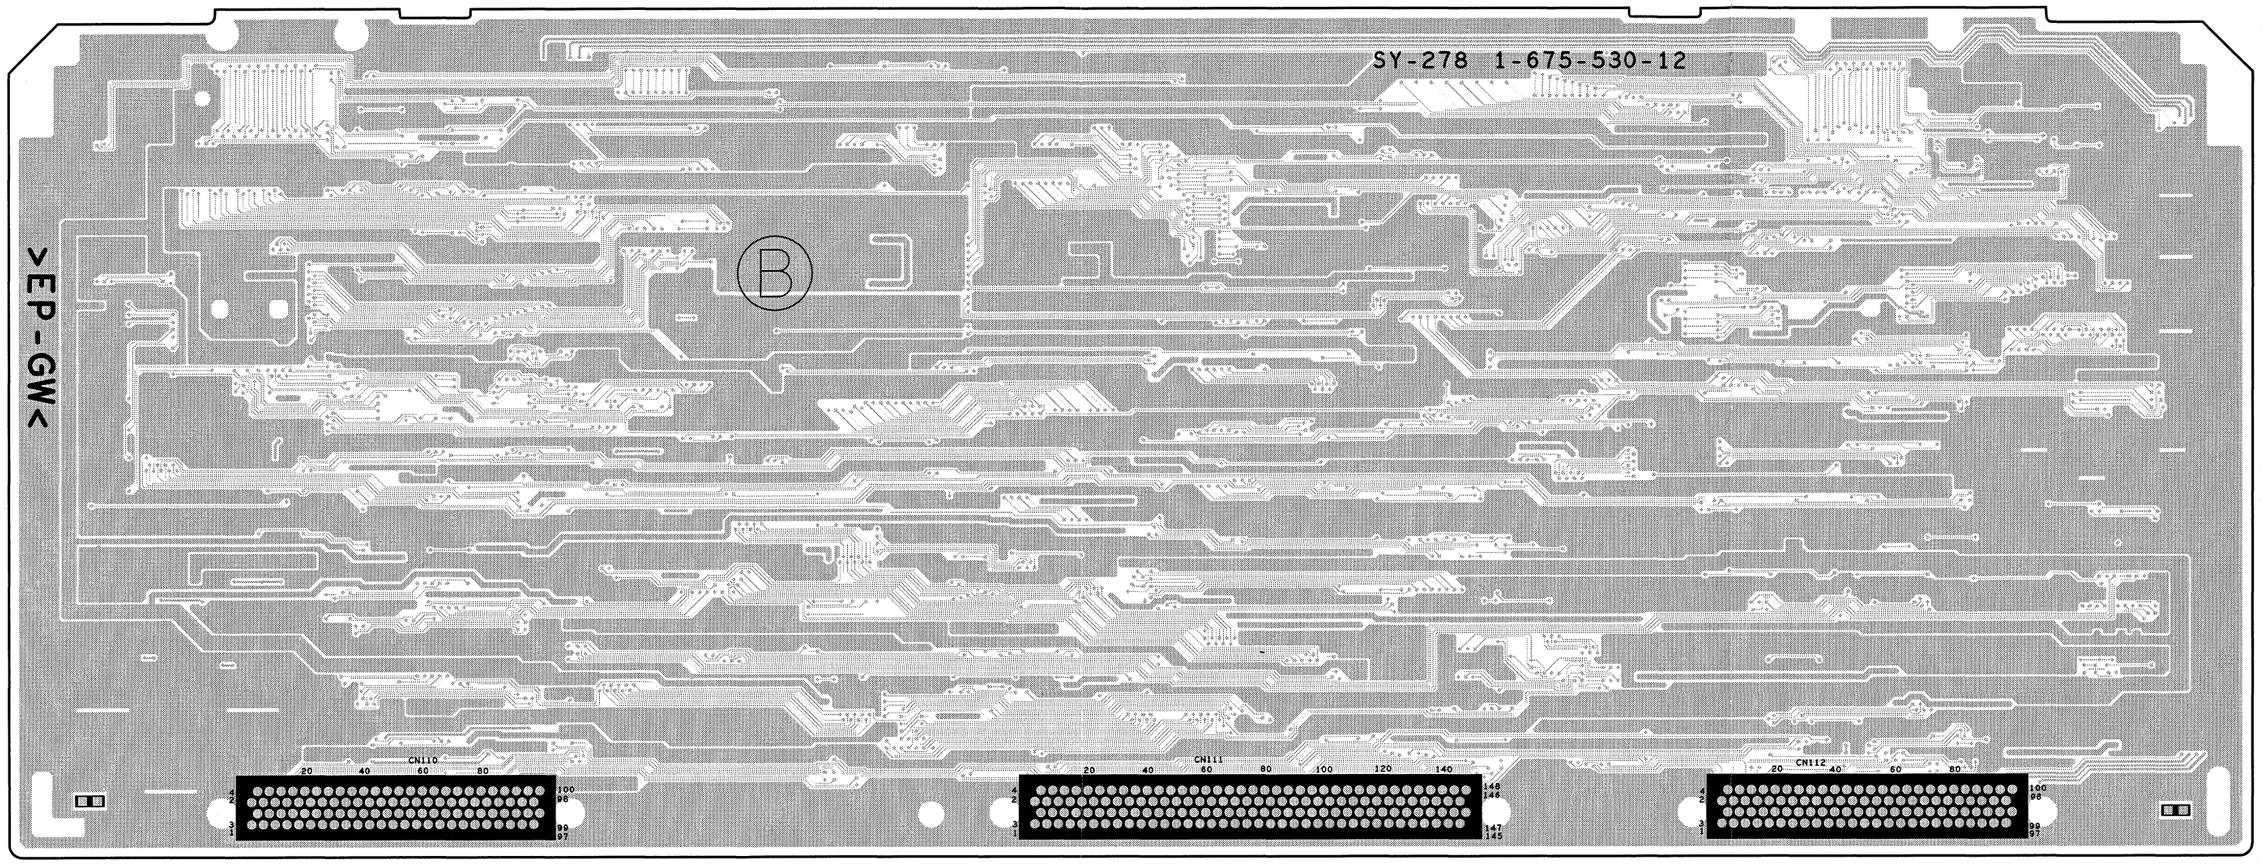

SY-278 -B SIDE-
SUFFIX: -12

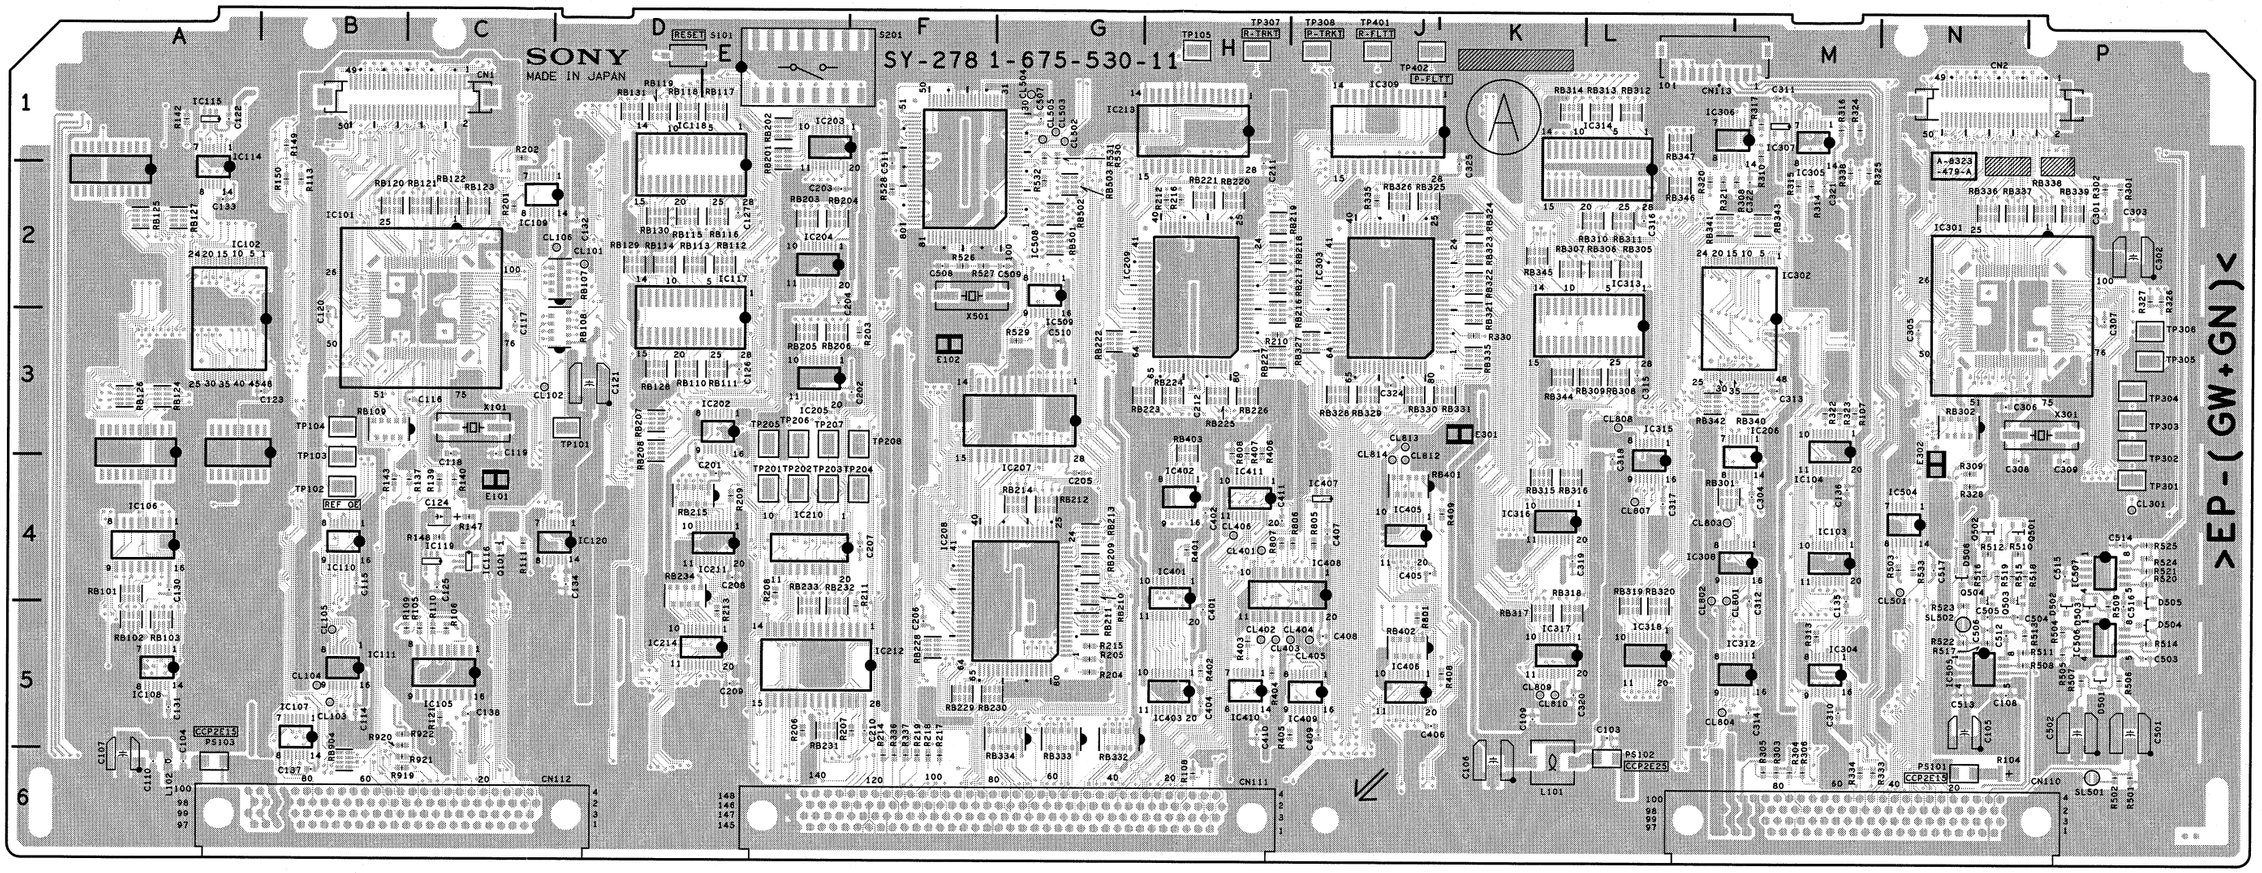

SY-278 -A SIDE-
SUFFIX: -11

SY-278 (1-675-530-11)

C103	L5	C136	M4	C314	M5	C508	F2	CL505	G1	E102	F3	IC208	G4	IC407	J4	R107	M3	R213	E5	R327	P2	R511	N5	R919	B6	RB127	A2	RB224	H3	RB320	L4	RB401	J4	TP302	P3
C104	A6	C137	B6	C315	L3	C509	G2	CL801	L4	E301	K3	IC209	H2	IC408	J4	R108	H6	R214	F6	R328	N4	R512	N4	R920	B5	RB128	D3	RB225	H3	RB321	K2	RB402	J5	TP303	P3
C105	N5	C138	C5	C316	L2	C510	G3	CL802	L4	E302	N4	IC210	E4	IC409	J5	R109	C5	R215	G5	R330	K3	R513	N5	R921	B6	RB129	D2	RB226	H3	RB322	K2	RB403	H3	TP304	P3
C106	K6	C201	E4	C317	L4	C511	F1	CL803	L4			IC211	E4	IC410	H5	R110	C5	R216	H2	R333	M6	R514	P5	R922	B5	RB130	D2	RB227	H3	RB323	K2	RB501	G2	TP305	P3
C107	A6	C202	F3	C318	L3	C512	N5	CL804	L5	IC101	C2	IC212	F5	IC411	H4	R111	C4	R217	F6	R334	M6	R515	N4			RB131	D1	RB228	F5	RB324	K2	RB502	G2	TP306	P3
C108	N5	C203	E2	C319	K4	C513	N5	CL807	L4	IC102	B2	IC213	H1	IC504	N4	R113	B2	R218	F6	R335	J2	R516	N4	RB101	A4	RB201	E1	RB229	F5	RB325	J2	RB503	G2	TP307	H1
C109	K5	C204	E2	C320	K5	C514	P4	CL808	L3	IC103	M4	IC214	E5	IC505	N5	R121	C5	R219	F6	R336	F6	R517	N5	RB102	A5	RB202	E1	RB230	F5	RB326	J2	RB904	B6	TP308	J1
C110	A6	C205	G4	C321	M2	C515	P4	CL809	K5	IC104	M3	IC301	N2	IC506	P5	R137	C4	R301	P2	R337	F6	R518	N4	RB103	A5	RB203	E2	RB231	E5	RB327	J3			TP401	J1
C114	B5	C206	F5	C322	M2	C516	P4	CL810	K5	IC105	C5	IC302	M2	IC507	P4	R139	C4	R302	P2	R338	M2	R519	N4	RB107	D2	RB204	E2	RB232	E5	RB328	J3	S101	D1	TP402	J1
C115	B4	C207	F4	C324	J3	C517	N4	CL812	J4	IC106	A4	IC303	J2	IC508	F2	R140	C4	R303	M6	R401	H4	R520	P4	RB108	D3	RB205	E3	RB233	E5	RB329	J3	S201	E1		
C116	C3	C208	E4	C325	K1			CL813	J3	IC107	B5	IC304	M5	IC509	G2	R142	A1	R304	M6	R402	H5	R521	P4	RB109	B3	RB206	E3	RB234	D4	RB330	J3			X101	C3
C117	C3	C209	E5	C401	H5	CL101	D2	CL814	J4	IC108	A5	IC305	M1			R143	B4	R305	M6	R403	H5	R522	N5	RB110	D3	RB207	D3	RB301	L4	RB331	K3	SL501	P6	X301	P3
C118	C3	C210	F5	C402	H4	CL102	C3			IC109	C2	IC306	M1	L101	K6	R147	C4	R306	M6	R404	H5	R523	N4	RB111	E3	RB208	D3	RB302	N3	RB332	G5	SL502	N5	X501	F2
C119	C3	C211	H1	C404	H5	CL103	B5	CN1	B1	IC110	B4	IC307	M1	L102	A6	R148	C4	R308	M2	R405	J5	R524	P4	RB112	E2	RB209	G4	RB305	L2	RB333	G5				
C120	B3	C212	H3	C405	J4	CL104	B5	CN2	N1	IC111	B5	IC308	M4			R149	B1	R309	N4	R406	H3	R525	P4	RB113	D2	RB210	G4	RB306	L2	RB334	G5	TP101	D3		
C121	D3	C301	P2	C406	J5	CL105	B5	CN110	M6	IC114	A1	IC309	J1	PS101	N6	R150	B2	R310	M1	R407	H3	R526	F2	RB114	D2	RB211	G5	RB307	K2	RB335	K3	TP102	B4		
C122	A1	C302	P2	C407	J4	CL106	D2	CN111	G6	IC115	A1	IC312	M5	PS102	L6	R201	C2	R313	M5	R408	K5	R527	F2	RB115	E2	RB212	G4	RB308	L3	RB336	N2	TP103	B4		
C123	B3	C303	P2	C408	J5	CL301	P4	CN112	B6	IC116	C4	IC313	L2	PS103	A6	R202	C1	R314	M2	R409	K4	R528	F2	RB116	E2	RB213	G4	RB309	L3	RB337	N2	TP104	B3		
C124	C4	C304	M4	C409	J5	CL401	H4	CN113	L1	IC117	E2	IC314	L1			R203	F3	R315	M2	R501	P6	R529	G3	RB117	E1	RB214	G4	RB310	L2	RB338	P2	TP105	H1		
C125	C4	C305	N3	C410	H5	CL402	H5			IC118	E1	IC315	L3	Q101	C4	R204	G5	R316	M1	R502	P6	R530	G1	RB118	D1	RB215	D4	RB311	L2	RB339	P2	TP201	E4		
C126	E3	C306	N3	C411	H4	CL403	H5	D501	P5	IC119	C4	IC316	K4	Q501	N4	R205	G5	R317	M1	R503	N4	R531	G1	RB119	D1	RB216	H2	RB312	L1	RB340	M3	TP202	E4		
C127	E2	C307	P3	C501	P5	CL404	J5	D502	P4	IC120	D4	IC317	K5	Q502	N4	R206	E5	R320	L2	R504	P5	R532	G2	RB120	B2	RB217	H2	RB313	L1	RB341	L2	TP203	E4		
C130	A4	C308	N3	C502	P5	CL405	J5	D503	P4	IC202	E3	IC318	L5	Q503	N4	R207	F5	R321	L2	R505	P5	R533	N4	RB121	C2	RB218	H2	RB314	K1	RB342	L3	TP204	F4		
C131	A5	C309	P3	C503	P5	CL406	H4	D504	P5	IC203	E1	IC401	H4	Q504	N4	R208	E4	R322	M3	R506	P5	R801	J5	RB122	C2	RB219	H2	RB315	K4	RB343	M2	TP205	E3		
C132	D2	C310	M5	C504	N5	CL501	N4	D505	P4	IC204	E2	IC402	H4			R209	E4	R323	M3	R507	P5	R805	J4	RB123	C2	RB220	H2	RB316	K4	RB344	K3	TP206	E3		
C133	A2	C311	M1	C505	N5	CL502	G1	D506	N4	IC205	E3	IC403	H5	R104	N6	R210	H3	R324	M1	R508	N5	R806	J4	RB124	A3	RB221	H2	RB317	K5	RB345	K2	TP207	E3		
C134	D4	C312	M4	C506	N5	CL503	G1			IC206	M3	IC405	J4	R105	C5	R211	F5	R325	M2	R509	P4	R807	H4	RB125	A2	RB222	G3	RB318	K5	RB346	L2	TP208	F3		
C135	M4	C313	M3	C507	G1	CL504	G1	E101	C4	IC207	G3	IC406	J5	R106	C5	R212	H2	R326	P2	R510	N4	R808	H3	RB126	A3	RB223	H3	RB319	L4	RB347	L1	TP301	P4		

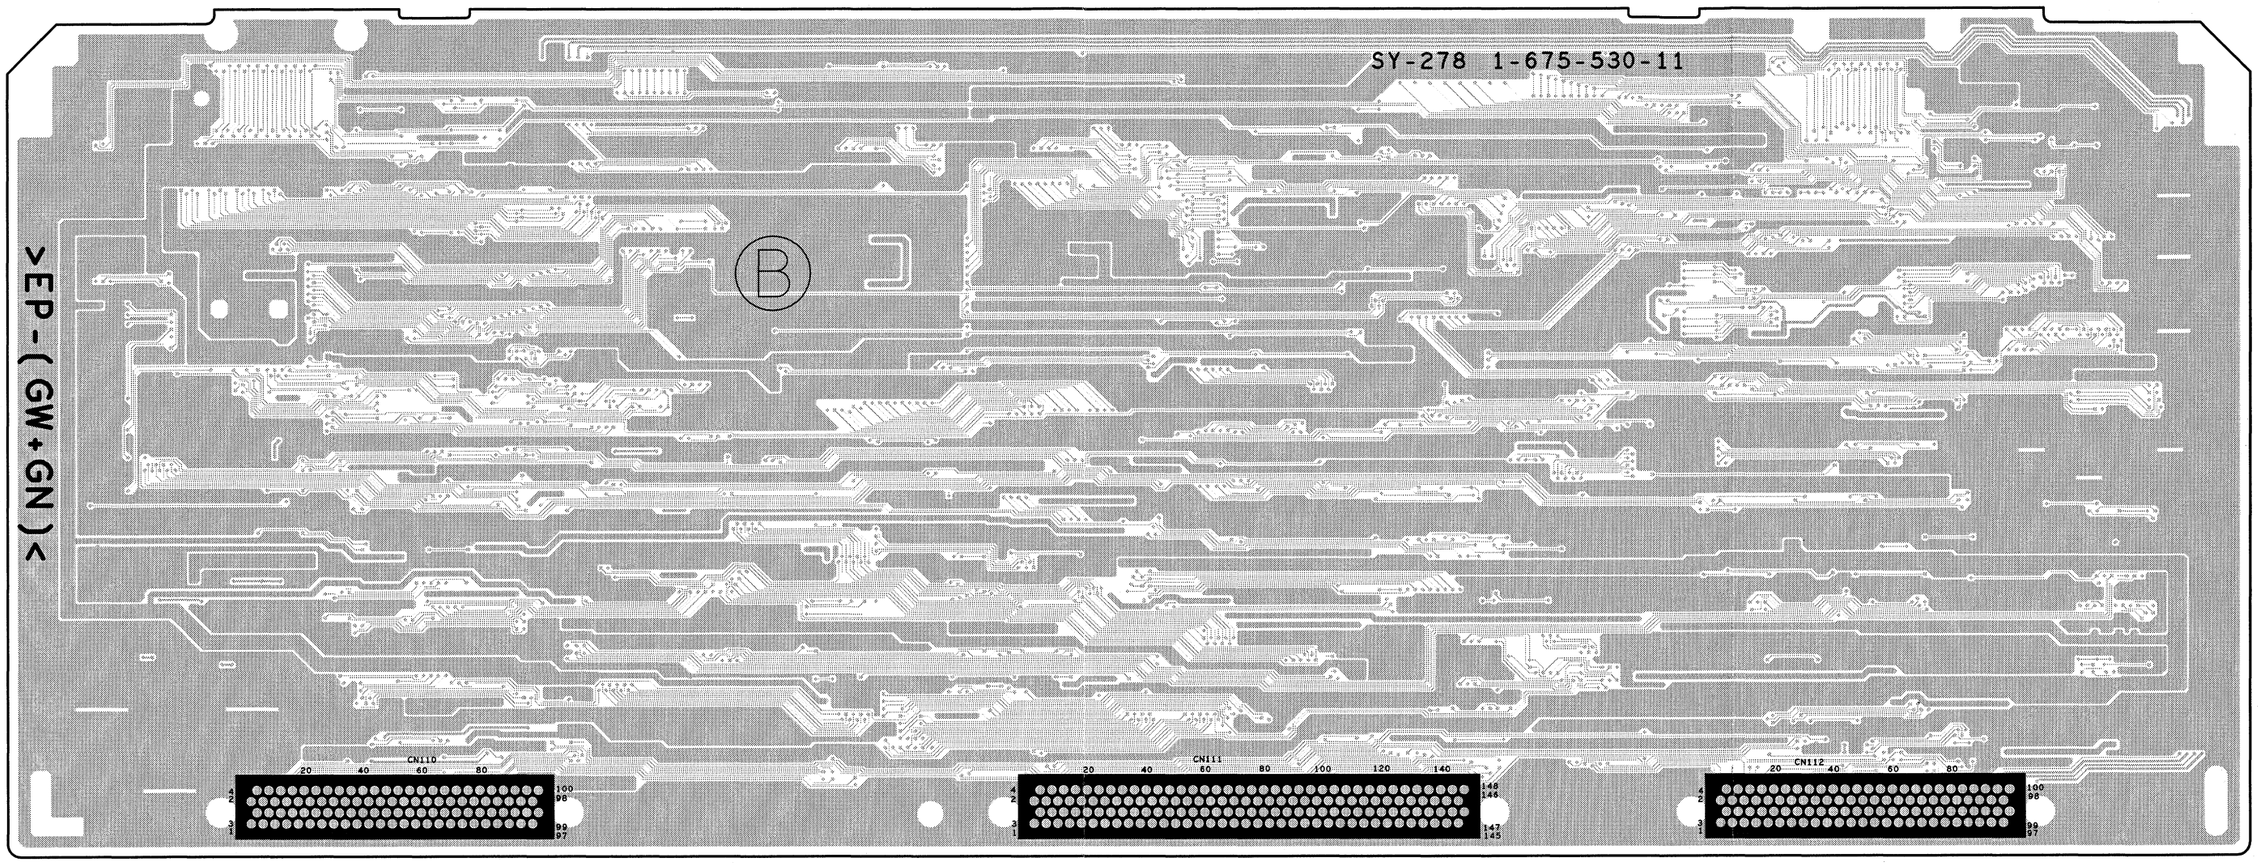

SY-278 -B SIDE-
SUFFIX: -11

VPR-62/62P (1-675-531-14)

C1	A6	C212	P4	C352	*M2	C482	*G1	C632	*B5	C743	E1	C933	M3	CL10	*C5	IC10	D5	IC803	N5	L707	*E1	Q417	*J2	R115	*P6	R314	*N2	R444	*H2	R607	D5	R708	D1	R839	L4
C2	J6	C213	*P3	C354	*N1	C483	*J2	C633	B4	C744	E2	C934	F2	CL301	*N1	IC101	P6	IC804	M5	L708	*E1	Q418	*J1	R116	*P5	R315	*P2	R445	*H2	R608	*D5	R709	C1	R840	K4
C3	L6	C214	*N4	C355	N2	C484	H2	C634	B5	C745	E1	C935	*F2	CL503	*A2	IC102	*P6	IC805	L4	L709	*E2	Q419	*J2	R117	*P5	R316	*N2	R446	*H2	R609	*D5	R710	C1	R841	L4
C4	G6	C215	*N3	C356	N2	C485	*J1	C635	C4	C746	E1	C936	F2	CL508	*B1	IC103	P5	IC806	L4	L710	*E1	Q420	*J1	R118	*P5	R317	*N2	R447	*J2	R610	*D5	R712	D2	R842	L4
C5	A5	C216	*N4	C359	*N1	C486	*G1	C636	C2	C747	E1	C937	F2	CL510	*B1	IC104	*P5	IC807	L5	L801	*M4	Q421	*J2	R119	*P5	R318	*P2	R448	*J2	R611	B1	R713	D2	R843	L4
C6	J4	C217	*P3	C360	N1	C487	*J2	C637	C1	C748	E1	C938	F1	CL511	*B1	IC105	P5	IC808	L5	L802	*M4	Q422	*J1	R120	*P5	R319	*P2	R449	*H2	R612	A1	R714	D2	R844	L4
C7	*A6	C218	P4	C361	N2	C488	*J1	C638	C4	C749	*E1	C939	F2	CL512	*A3	IC200	N4	IC901	L3	L803	*M4	Q501	*A2	R121	*P5	R320	*P2	R450	*H2	R613	*D5	R715	D2	R845	*L4
C8	*J6	C219	P4	C362	*N2	C501	*A2	C639	C4	C750	*E1	C940	*F1	CL513	*A3	IC201	*N3	IC903	M5	L804	*L4	Q502	*A2	R122	*P5	R321	*P2	R451	*H2	R614	A5	R716	*F2	R846	*L4
C9	*K6	C220	P3	C363	N1	C502	*A2	C640	B3	C751	E1	C941	F3	CL514	*A3	IC202	*P4	IC904	L3	L805	*L4	Q503	*A3	R123	*P5	R322	*N2	R452	*H2	R615	B1	R717	*D2	R847	L4
C10	H6	C221	P2	C364	*N2	C503	*A2	C641	*B2	C752	E1	C942	F2	CL515	*A3	IC203	*P3	IC905	*F2	L806	*L4	Q504	*B1	R124	*P6	R323	*P1	R453	*H2	R616	B1	R718	D1	R848	*L4
C11	A5	C222	N3	C365	P1	C504	*B1	C642	C3	C753	*E1	C1001	*H3	CL516	*A3	IC204	P3	IC906	*F1	L901	*M3	Q601	*C2	R125	*P5	R324	*N2	R454	*H1	R617	D5	R719	*D2	R849	*L4
C12	*J4	C223	P4	C366	*P1	C505	*A1	C643	C3	C754	*E2	C1002	*H3	CL601	*B5	IC205	M2	IC907	M3	L902	*M3	Q602	*C2	R126	*P5	R325	*N2	R455	J1	R618	*A5	R720	D1	R850	L5
C13	*K6	C224	*M2	C367	N2	C507	A1	C644	B3	C755	F2	C1003	H4	CL602	*C5	IC206	M2	IC908	*F2	L903	M4	Q603	*C2	R127	*P4	R326	N2	R456	J1	R619	*A5	R721	D2	R851	*L4
C14	*K5	C226	*L2	C400	*K1	C508	*B1	C645	A5	C756	*E1	C1004	H3	CL603	*C5	IC207	L2	IC909	*F1	L904	*M3	Q604	*C2	R128	*P5	R327	*P1	R474	*G1	R620	C5	R722	D2	R852	L4
C15	*A4	C227	M1	C401	*K1	C509	B1	C646	B3	C757	F1	C1005	*F3	CL1013	*C5	IC208	*L2	IC910	M3	L905	*M3	Q605	J4	R129	*N5	R328	P1	R475	*H1	R621	C5	R723	*E2	R853	L4
C16	*A4	C228	M2	C402	J2	C510	*B1	C647	*C2	C758	D2	C1006	*F3	CL1014	*C5	IC209	L2	IC911	*F1	L906	F1	Q606	J4	R130	*N5	R329	P1	R476	*H1	R622	*A5	R724	*E2	R854	L5
C17	K6	C229	*L1	C403	J2	C511	*B1	C648	*C1	C759	D2	C1007	*G3			IC210	L2	IC912	*F2	L907	F3	Q607	J4	R131	*N5	R330	*N1	R477	*G1	R623	C5	R725	*E2	R855	*L4
C18	K5	C230	L2	C404	J2	C512	*A2	C649	*C2	C760	*F2	C1008	*G3	CN103	M6	IC211	L1	IC1001	G3	L1001	*H4	Q608	*J4	R132	*N5	R331	P2	R479	*G1	R624	A5	R726	*E2	R856	*L4
C19	*J5	C231	*L2	C405	J1	C513	*A1	C650	*C2	C761	F2	C1009	G3	CN104	B6	IC300	N1	IC1002	H3	L1002	*H3	Q609	K4	R133	*N5	R332	P2	R480	*G2	R625	*C5	R727	E2	R857	*L4
C20	A4	C232	L2	C406	J1	C514	*A2	C651	*C3	C762	F2	C1010	*G3			IC301	*P2	IC1003	H4	L1003	*G3	Q610	*K4	R134	*N5	R333	*N1	R481	*G2	R626	B1	R728	E2	R858	*L4
C21	A4	C233	*L2	C407	J1	C515	*A2	C652	C3	C801	M4	C1011	*G3	CT500	A4	IC302	*P1	IC1004	H4	L1004	*G3	Q611	K4	R135	*N5	R334	N2	R482	*G2	R627	B1	R729	*D1	R859	*L5
C22	A5	C234	L2	C408	*J2	C516	A1	C653	C3	C802	*M4	C1012	H4			IC303	*P1	IC1005	H4	L1005	H4	Q612	J3	R136	*N5	R335	*N1	R483	*G2	R628	D5	R730	*E2	R860	L5
C23	A5	C235	*L2	C409	*J2	C517	A1	C654	K4	C803	M4	C1013	*G4	D1	A5	IC304	*N1	IC1006	H4	L1006	H4	Q613	J3	R137	*P5	R336	*P2	R501	*A2	R629	C5	R731	*E2	R861	*L4
C24	J5	C236	*L2	C410	J2	C518	*A2	C655	K4	C804	*M4	C1014	*H4	D2	A5	IC305	*N2	IC1008	E4	L1007	*F5	Q614	J3	R138	*P5	R337	*N2	R502	*A2	R630	C5	R732	*E2	R866	*L4
C25	H6	C237	*L2	C411	J1	C519	*A2	C656	*J4	C805	M4	C1015	*H4	D3	J6	IC306	P1	IC1009	G3	L1008	G5	Q615	*J3	R139	*P5	R338	*N2	R503	A2	R631	C5	R733	E3	R902	*N4
C26	F6	C238	*L2	C412	J1	C520	*A1	C657	*J4	C806	*M4	C1016	*H4	D4	H6	IC307	N2	IC1010	H3	L1009	*D3	Q616	K3	R140	*P5	R339	*N1	R504	A2	R632	*C5	R734	D2	R903	M5
C27	G6	C239	*L2	C413	*J1	C521	*A2	C658	*J4	C807	N5	C1017	*H4	D5	F6	IC308	P1	IC1011	G5	L1010	*E3	Q617	*K3	R141	*P5	R340	*N1	R507	*A2	R633	*C4	R735	D2	R906	L3
C28	A5	C240	*L1	C414	*J2	C522	*A2	C659	*J4	C808	M4	C1018	*H4	D6	G6	IC309	N2	IC1012	G5	L1011	*E5	Q618	K3	R142	*P5	R341	*N1	R508	A2	R634	*B4	R736	*E1	R907	*L3
C29	A5	C241	L1	C415	*K1	C523	*A1	C660	*J4	C809	*N5	C1019	H4	D101	*P6	IC310	P2	IC1014	F3	L1012	*E3	Q619	*C5	R143	*P5	R342	N2	R510	*A2	R635	*C4	R737	*E1	R911	F1
C30	J5	C242	L1	C416	*K1	C524	*A2	C661	*K4	C810	*N5	C1020	*H4	D102	*N5	IC400	K1	IC1111	F4	L1013	*E5	Q701	*E2	R144	*P5	R343	*P2	R515	*B1	R636	B3	R738	*E1	R916	F1
C31	H6	C243	*L1	C417	*K2	C525	*A2	C662	*K4	C811	M5	C1021	H5	D103	*N5	IC401	H2	IC1112	*F4	L1014	G5	Q702	*E2	R145	P4	R344	*P2	R516	*A1	R637	C3	R739	E1	R917	F1
C32	F6	C244	*L1	C418	*K1	C526	*A3	C663	*K3	C812	M4	C1022	H4	D104	*N5	IC402	J2					Q703	E2	R146	P4	R345	*N2	R521	*B1	R638	B3	R740	E1	R920	*L3
C33	G6	C245	*L2	C419	*K2	C527	*B3	C664	*J3	C813	N6	C1023	H4	D200	*N4	IC403	J1	L1	*J4	LV505	A4	Q704	*E2	R147	*P5	R346	*N2	R523	*A2	R639	*C3	R741	E1	R921	F1
C34	*J4	C246	*L2	C420	*K1	C528	A3	C665	*J4	C814	*N5	C1024	H4	D201	M1	IC404	*J2	L2	K6			Q705	*E2	R148	*P5	R348	M1	R524	*B1	R640	*C2	R742	*E1	R922	F1
C35	*D6	C247	*L1	C421	*J2	C529	B3	C666	*J4	C815	N5	C1025	H4	D300	*P2	IC405	G1	L3	K5	PS1	A6	Q706	*E1	R149	P5	R349	*M1	R525	*A2	R641	*C1	R743	*E1	R923	L4
C36	J4	C248	*L1	C422	*J2	C530	*A3	C667	*J3	C816	M4	C1026	H5	D301	*P2	IC406	*H2	L4	*A4	PS2	J6	Q707	*E1	R150	P5	R350	P1	R526	*A2	R642	*C2	R744	*E1	R924	L3
C37	D5	C249	*L1	C423	*K2	C531	*A3	C668	*J3	C817	*M4	C1030	F5	D302	*N2	IC407	*H2	L5	*A4	PS3	K5	Q708	*E1	R151	N5	R351	*P1	R527	*A2	R643	*C2	R745	*E1	R927	*L3
C38	A6	C250	*L2	C424	*K1	C532	*A3	C669	*J3	C818	*M4	C1031	*F5	D303	P1	IC408	*H1	L6	A6	PS4	H6	Q709	*E1	R201	*P4	R355	*M1	R528	A1	R644	*C3	R746	E2	R928	E1
C39	A6	C251	*K2	C425	*J1	C533	A3	C670	*K3	C819	*M4	C1033	F3	D304	P1	IC409	H2	L7	*J4	PS5	A6	Q710	*E2	R202	*N3	R356	*N2	R529	A1	R645	*C2	R747	*F1	R929	E1
C101	P5	C252	*M2	C426	J1	C534	*A3	C671	*B5	C820	*M4	C1034	*E4	D306	*N2	IC410	*H1	L8	*D6			Q711	*E2	R203	*P2	R357	*N2	R530	*A1	R646	*C1	R748	*F1	R930	*F1
C102	P6	C253	N4	C427	J2	C535	A3	C672	*C5	C821	M4	C1035	G3	D400	*J2	IC411	G2	L101	*P5	Q101	*P6	Q712	*F2	R204	*P2	R358	*N2	R531	*A1	R647	*C2	R749	*E2	R931	*F1
C103	*P5	C300	P2	C428	J1	C536	*A3	C673	*C5	C822	M4	C1037	*E4	D401	*J2	IC412	G1	L102	*P5	Q102	*P6	Q713	F1	R205	M2	R359	*M1	R532	*A1	R648	*C2	R750	*E2	R932	*L3
C104	*P6	C301	P1	C429	J2	C537	A3	C674	*C5	C823	M5	C1038	*D3	D402	*J1	IC413	G1	L103	*N5	Q103	*P6	Q801	M4	R206	L2	R360	*M1	R533	*A2	R649	J4	R751	E2	R933	*M3
C105	*P6	C302	P2	C430	J2	C538	*A3	C675	*B5	C824	M4	C1039	*E4	D403	*H2	IC414	*G2	L200	P4	Q104	*P6	Q802	*M4	R207	M2	R361	P1	R534	*A2	R650	*J4	R752	*E1	R934	*M3
C106	*P6	C303	P2	C431	*J2	C539	A3	C676	J3	C825	*L4	C1041	D3	D404	*G1	IC415	*G2	L201	*M1	Q105	*P6	Q803	*M4	R208	M2	R362	P1	R535	*A1	R651	*J4	R753	*E2	R935	*M3
C107	P6	C304	N2	C432	*J1	C540	A4	C677	K3	C826	L4	C1042	*E4	D501	*A1	IC416	*G2	L202	*L2	Q106	*P5	Q804	*M4	R209	*L1	R363	P1	R536	A1	R652	J4	R754	*E2	R936	*M3
C108	P6	C305	*P2	C433	*J1	C541	*A3	C678	*B5	C827	*L4	C1045	*E4	D502	*A3	IC500	A2	L203	*L2	Q107	*P5	Q805	M4	R210	*L1	R368	*P1	R537	A1	R653	J4	R755	*F2	R937	*M3
C109	P6	C306	P2	C434	*J2	C542	A3	C679	*B3	C828	L4	C1047	*E3	D503	*A1	IC503	A2	L204	*L1	Q108	*P5	Q806	L4	R211	*L2	R369	*P1	R538	*A1	R654	J4	R756	*E2	R938	*M3
C110	P5	C307	*N2	C435	*J2	C543	A3	C680	*B3	C829	*L4	C1048	*D4	D601	*C5	IC504	B1	L205	*L1	Q109	*P5	Q807	L4	R212	*M2	R400	*K2	R539	*A3	R655	*J4	R757	*E1	R939	*F2
C111	N5	C308	*N2	C436	*K1	C544	*A3	C681	*B4	C830	*L4	C1049	*E3	D801	*M4	IC505	A1	L206	*L1	Q110	*P4	Q808	L4	R213	*L1	R401	*J2	R540	*A3	R656	J4	R758	F2	R940	*M4
C112	*P5	C309	*P2	C437	*K2	C545	A3	C701	E3	C831	L4	C1050	*E4	D802	L5	IC508	B1	L301	*P2	Q111	*N5	Q809	K4	R214	*L1	R402	*K2	R541	*A3	R657	*J4	R759	*F1	R941	*M4
C113	*N5	C310	*P2	C438	*J2	C546	*A3	C702	D3	C832	L4	C1051	*E4	D900	M6	IC509	A2	L302	*P2	Q112	*N5	Q810	L4	R215	*L1	R403	*K1	R542	*A3	R658	*J4	R760	*F2	R942	F2
C114	N6	C311	*P2	C439	*G2	C547	*A3	C703	*F2	C833	*L4	C1052	*D4	D901	M5	IC510	A1	L303	M2	Q113	*P5	Q811	L4	R216	*L1	R404	*K1	R543	*A3	R659	J4	R761	F2	R943	*M4
C115	P5	C312	*P2	C440	H1	C548	*A4	C704	E2	C834	L5	C1053	E3	D1001	H5	IC511	A1	L304	M2	Q114	*P5	Q903	*L3	R217	L1	R405	*K1	R544	*A3	R660	K4	R762	*F2	R944	F1
C116	*P5	C313	P2	C441	H1	C549	*A4	C705	E3	C835	L5	C1054	*E4	D1002	G5	IC512	A1	L305	*P2	Q115	*P5	Q905	*L3	R218	*L2	R406	*K2	R545	*A3	R661	K4	R801	M4	R945	F1
C117	*P5	C314	N2	C442	H1	C550	A3	C706	*F2	C836	*L4	C1055	*D4	D1003	G5	IC513	A2	L306	*P2	Q116	*P4	Q906	*M3	R219	*L2	R407	*K1	R546	*A3	R662	K4	R802	*M4	R946	F2
C118	*P5	C315	*M2	C443	H1	C551	*A4	C707	*D1	C837	*L4	C1056	*E5	D1004	G5	IC514	A1	L307	*N2	Q200	M2	Q907	M4	R220	*L1	R408	*K2	R547	*A3	R663	*K4	R803	*M4	R947	F2
C119	*P5	C316	N2	C444	*G1	C552	*A4	C708	*D2	C838	L5	C1058	E5			IC515	A2	L308	*M1	Q201	*L2	Q908	*M3	R221	*L2	R409	*K1	R548	*A3	R664	*K4	R804	*M4	R948	*M4
C120	P5	C317	M2	C445	*H2	C553	*A4	C709	E2	C839	L4	C1059	E3	E1	N3	IC516	A2	L309	*P1	Q202	*L2	Q909	*M4	R222	*L2	R410	*J2	R549	*A3	R665	*K4	R805	M4	R949	*M3
C121	*P5	C318	*P2	C446	*H2	C554	A4	C710	*D1	C840	*L4	C1060	E5	E2	M1	IC517	A2	L310	*P1	Q203	*L1	Q1001	*F3	R223	*L1	R411	*K2	R550	*A3	R666	J4	R806	N5	R950	F2
C122	*P5	C319	*N2	C447	*H2	C555	*A4	C711	*D2	C841	*L4	C1061	*E3	E3	E1	IC518	A2	L311	*N2	Q300	*P1	Q1002	G3	R224	*L2	R412	*J2	R551	*A3	R667	*J3	R807	M5	R951	*F1
C123	N5	C320	*N2	C448	H2	C601	*D5	C712	*D2	C842	L5	C1062	*E5	E4	A5	IC519	A1	L312	*N1	Q301	*P1	Q1003	G5	R225	*L2	R413	*J2	R552	*A3	R668	*J4	R808	*N5	R952	F2
C124	*N5	C321	*P2	C449	*G2	C602	*B5	C713	*D2	C843	L4	C1063	G4	E5	D5	IC520	A1	L313	*N2	Q302	*P2	Q1005	*E4	R226	*L1	R414	*J2	R553	*A4	R669	J3	R809	*N5	R953	*F1
C125	*N5	C322	P2	C450	*H2	C603	*D5	C714	*F2	C844	*L4	C1064	*G3	E6	H3	IC522	A2	L400	*J2	Q303	*P2	Q1006	*E4	R227	*K2	R415	*J2	R554	*A3	R670	J3	R810	*N5	R954	F2
C126	N5	C323	*N2	C451	*G2	C604	*D5	C715	*D1	C901	M5	C1065	*G3	E7	*D4	IC523	*A3	L401	*J1	Q304	*P2	Q1007	*D4	R228	*K2	R416	*J2	R555	*A4	R671	J3	R811	N5	R955	*M3
C127	N5	C324	*N2	C452	*H2	C605	*D5	C716	*D2	C902	L3	C1067	H3	E8	*H5	IC524	A3	L402	*J2	Q305	*P2	Q1009	G5	R229	*K2	R417	*K2	R556	*A3	R672	*J4	R812	N5	R956	G1
C128	*P5	C325	P1	C453	*H2	C606	A5	C717	*D2	C903	M5	C1068	H3	E9	*L3	IC525	A3	L403	*G1	Q306	*P2	Q1010	H5	R230	*K1	R418	*K1	R557	A3	R673	J3	R813	M5	R957	F2
C129	*P5	C326	M1	C455	*H2	C607	D5	C718	*D2	C905	F1	C1069	H3	E10	*P5	IC526	A4	L500	*A3	Q307	*N2	Q1011	G5	R231	*K1	R419	*J2	R558	*A3	R674	*J3	R814	M5	R958	*M4
C130	*P5	C327	*N1	C456	H2	C608	*A5	C719	F2	C908	L3	C1070	*E4			IC601	*D5	L501	*B3	Q308	*P2			R232	*K1	R420	*K1	R559	*A3	R675	*J3	R815	N5	R959	*M4
C131	P4	C328	P1	C458	H2	C609	C5	C720	E2	C910	*L3	C1071	H5	FB200	P4	IC602	B5	L502	*A3	Q309	*P2	R1	*J5	R233	*K2	R421	*K1	R560	*A3	R676	J3	R816	N5	R960	F2
C132	P4	C329	*M1	C459	H2	C610	*A5	C721	*D2	C911	*M3	C1072	H5	FB400	*H2	IC603	A5	L503	*A3	Q310	*N2	R3	J5	R234	*P3	R422	*K2	R561	*A3	R677	K3	R817	*M4	R962	F2
C133	N5	C330	M1	C460	H2	C611	C5	C722	*D2	C912	F1	C1073	G5			IC604	C5	L504	*A3	Q311	*P1	R4	J5	R235	*P3	R423	*K2	R562	*A3	R678	K3	R818	*M4	R963	F2
C134	P5	C331	*M2	C461	*H2	C612	*B4	C723	D1	C913	F1	C1074	G5	FL1	K4	IC605	*B4	L506	*A4	Q312	*P2	R6	J4	R236	*P3	R424	*K1	R563	*A3	R679	K3	R819	*M4	R964	F2
C135	*N5	C332	N2	C462	*H2	C613	*B5	C724	D2	C914	M3	C1075	G5	FL2	K5	IC606	*B4	L601	*C4	Q313	*N1	R7	J5	R237	*P2	R425	*K1	R564	*A3	R680	*K3	R820	*M4	R965	M6
C136	*P5	C333	*P1	C463	*H1	C614	C5	C725	*E2	C915	*F2	C1076	G5	FL100	P5	IC607	*B4	L602	C5	Q315	*N2	R8	*D6	R238	N3	R426	*J2	R565	*A3	R681	*K3	R821	*M4	R966	M6
C137	*N5	C334	*P1	C464	*H2	C615	*C4	C726	*E2	C916	F2	C1077	G5	FL200	K2	IC608	C4	L603	*B5	Q400	*K2	R9	J4	R239	N3	R427	*J1	R566	*A3	R682	*K3	R822	*M4	R967	M6
C138	P5	C335	N2	C465	*H2	C616	D5	C727	*D1	C917	*M3	C1078	G5	FL201	K2	IC609	B2	L604	*B4	Q401	*K2	R10	J5	R240	N3	R428	*J1	R567	*A4	R683	*B5	R823	*M4	R968	M6
C139	N5	C336	N2	C466	*H1	C617	C5	C728	*E2	C918	F2	C1079	H4	FL202	K1	IC610	*C3	L605	*B5	Q402	*K1	R11	*D5	R241	N3	R429	*J1	R568	*A3	R684	C5	R824	*M4	R1000	H5
C140	*N5	C337	N1	C467	*H2	C618	*B4	C729	*D2	C919	*M3	C1080	H4	FL601	C3	IC611	K3	L606	C2	Q403	*K2	R101	*P6	R300	*P1	R430	*J2	R569	*A4	R685	*B4	R825	*M4	R1001	*F3
C141	P5	C338	P2	C468	*G1	C619	C4	C730	E2	C920	F2	C1081	*F5	FL602	C2	IC612	*C5	L607	C3	Q404	*K1	R102	*P6	R301	*P2	R431	*J1	R570	*A4	R686	*B4	R826	*M4	R1002	*F3
C200	*P4	C339	*N1	C470	*H2	C620	C5	C731	D2	C921	*M3	C1082	*G4	FL603	C1	IC613	*C5	L608	C3	Q405	*J2	R103	P6	R302	*P2	R432	J2	R571	*A4	R687	B4	R827	*M4	R1003	*F3
C201	P4	C340	P2	C471	*H1	C621	*C5	C732	E2	C922	*M3	C1083	*F4	FL701	E2	IC701	D1	L609	K4	Q406	*J2	R104	*P6	R303	*P2	R433	J2	R572	*A4	R688	B4	R828	*M4	R1004	*G3
C202	*N4	C341	*P2	C472	*H1	C622	*B5	C733	D2	C923	F1	C1084	*F4			IC702	D2	L610	*J4	Q407	*J2	R105	P6	R304	*P2	R434	*J1	R573	*A4	R689	C4	R829	M4	R1005	*G3
C203	*N4	C342	*M1	C473	*H1	C623	C5	C734	E2	C924	M3	C1085	*F4	IC1	*A5	IC703	*E2	L611	J3	Q408	*K2	R106	*P6	R305	*P2	R435	*J1	R574	*A4	R690	C4	R830	*M5	R1006	*G3
C204	P4	C343	*N2	C474	*H1	C624	*B5	C735	*E1	C925	*F1	C1086	*F4	IC2	*A5	IC704	D2	L612	K4	Q409	*K2	R107	*P6	R306	*N2	R436	*J1	R575	*A4	R691	*B4	R831	*M5	R1007	*H3
C205	*P4	C344	N1	C475	*H1	C625	C5	C736	E2	C926	*M3	C1087	*F4	IC3	J5	IC705	D1	L613	*J3	Q410	*K1	R108	*P6	R307	*N2	R437	*J1	R576	*A4	R701	*D2	R832	L4	R1008	*G4
C206	*P4	C345	P2	C476	*H1	C626	B5	C737	*E1	C927	F2			IC4	H5	IC706	D2	L701	E2	Q411	*K1	R109	*P6	R308	*N2	R438	*J2	R601	*D5	R702	*F2	R833	L4	R1009	*G4
C207	*P4	C346	N1	C477	*H1	C627	*B4	C738	*D1	C928	*M4	CL1	*K4	IC5	E6	IC707	D2	L702	E3	Q412	*J2	R110	*P6	R309	*P2	R439	J2	R602	*B5	R703	*D2	R834	L4	R1010	*G4
C208	N4	C347	*N2	C478	G1	C628	*B5	C739	E1	C929	*G2	CL3	*K5	IC6	F6	IC708	*E2	L703	*E2	Q413	*K1	R111	*P6	R310	*P2	R440	*J2	R603	*D5	R704	*D2	R835	*L4	R1011	*G4
C209	N4	C348	*N1	C479	H1	C629	*C5	C740	E1	C930	*F2	CL4	*K5	IC7	J4	IC709	F2	L704	E2	Q414	*K1	R112	*P6	R311	*P2	R441	*J2	R604	*C5	R705	*D2	R836	*L4	R1012	G5
C210	N4	C349	*N2	C480	*G2	C630	*B5	C741	E1	C931	F2	CL7	*M6	IC8	J5	IC801	M5	L705	*E1	Q415	*K2	R113	*P6	R312	*P2	R442	*J2	R605	*D5	R706	E2	R837	L4	R1013	*H4
C211	N4	C351	*N2	C481	*G2	C631	*C5	C742	E1	C932	*M3	CL9	*C5	IC9	J4	IC802	N5	L706	*E1	Q416	*K1	R114	*P6	R313	*P2	R443	*J2	R606	*C5	R707	D1	R838	L4	R1014	*G4

R1015	*G4	RV402	K2
R1017	*H4	RV403	J2
R1018	*H4	RV404	K1
R1019	*H4	RV405	K1
R1020	*G4	RV406	K1
R1021	*G4	RV407	K2
R1022	H4	RV408	K2
R1023	*H4	RV409	K2
R1024	*H4	RV500	A1
R1025	H4	RV501	A4
R1026	H4	RV601	A1
R1027	G3	RV602	B1
R1028	*F4	RV603	B1
R1029	*F4	RV604	J4
R1035	*G4	RV605	K4
R1039	*E4	RV606	J3
R1041	*E4	RV607	K3
R1042	*E4	RV701	D1
R1043	*E4	RV702	C1
R1045	*E4	RV703	D1
R1046	*E4	RV704	D1
R1049	*E4	RV705	D2
R1050	*E4	RV801	M4
R1051	*E3	RV802	N5
R1052	*D4	RV803	M4
R1053	*D4	RV804	L4
R1055	*E3	RV805	L4
R1057	*E4	RV806	L4
R1058	*D4	RV901	L3
R1069	*G4	RV902	F1
R1070	*E4	RV903	F1
R1071	*E4	RV904	L3
R1080	*G3	RV905	E1
R1081	*F5	RV906	M3
R1082	*E4	RV1001	G4
R1087	*G5	RV1002	G4
R1088	*G5		
R1090	H3	S200	M1
R1091	H3		
R1092	H3	THP200	L1
R1093	H5	THP701	E2
R1094	G5	THP901	F1
R1095	G5		
R1096	G5	TP100	P6
R1097	G5	TP200	N5
R1098	G5	TP300	P2
R1099	G5	TP301	P2
R1100	G6	TP302	N1
R1101	H4	TP303	L1
R1102	F5	TP304	L1
R1103	G5	TP400	H2
R1104	*F3	TP401	H1
R1105	H4	TP402	H1
R1108	*G4	TP500	A3
R1109	*G4	TP601	D3
R1201	*F4	TP602	D2
		TP603	D1
RB4	*K4	TP1001	G4
RB5	*K5	TP1002	H4
RB6	*K5	TP1003	H4
RB7	*K5	TP1004	G4
RB201	*P2	TP1005	G4
RB202	*P3		
RB203	*P3	X300	*M2
RB204	*P2	X301	*P2
RB205	*P2	X601	B5
RB206	M2	X602	*C5
RB207	*M2	X603	*C5
RB301	*M2	X1001	*H4
RB401	*G2	X1002	*H4
RB402	*G2		
RB403	*G2	*:B SIDE	
RB404	*G1		
RB405	*G1		
RB601	*B4		
RB602	*B4		
RB603	B4		
RB604	B4		
RB605	C4		
RB606	C4		
RB1001	*D5		
RB1002	*D5		

RV101	P6
RV102	P5
RV103	P5
RV200	L1
RV201	L1
RV202	M1
RV300	P2
RV400	J2
RV401	K1

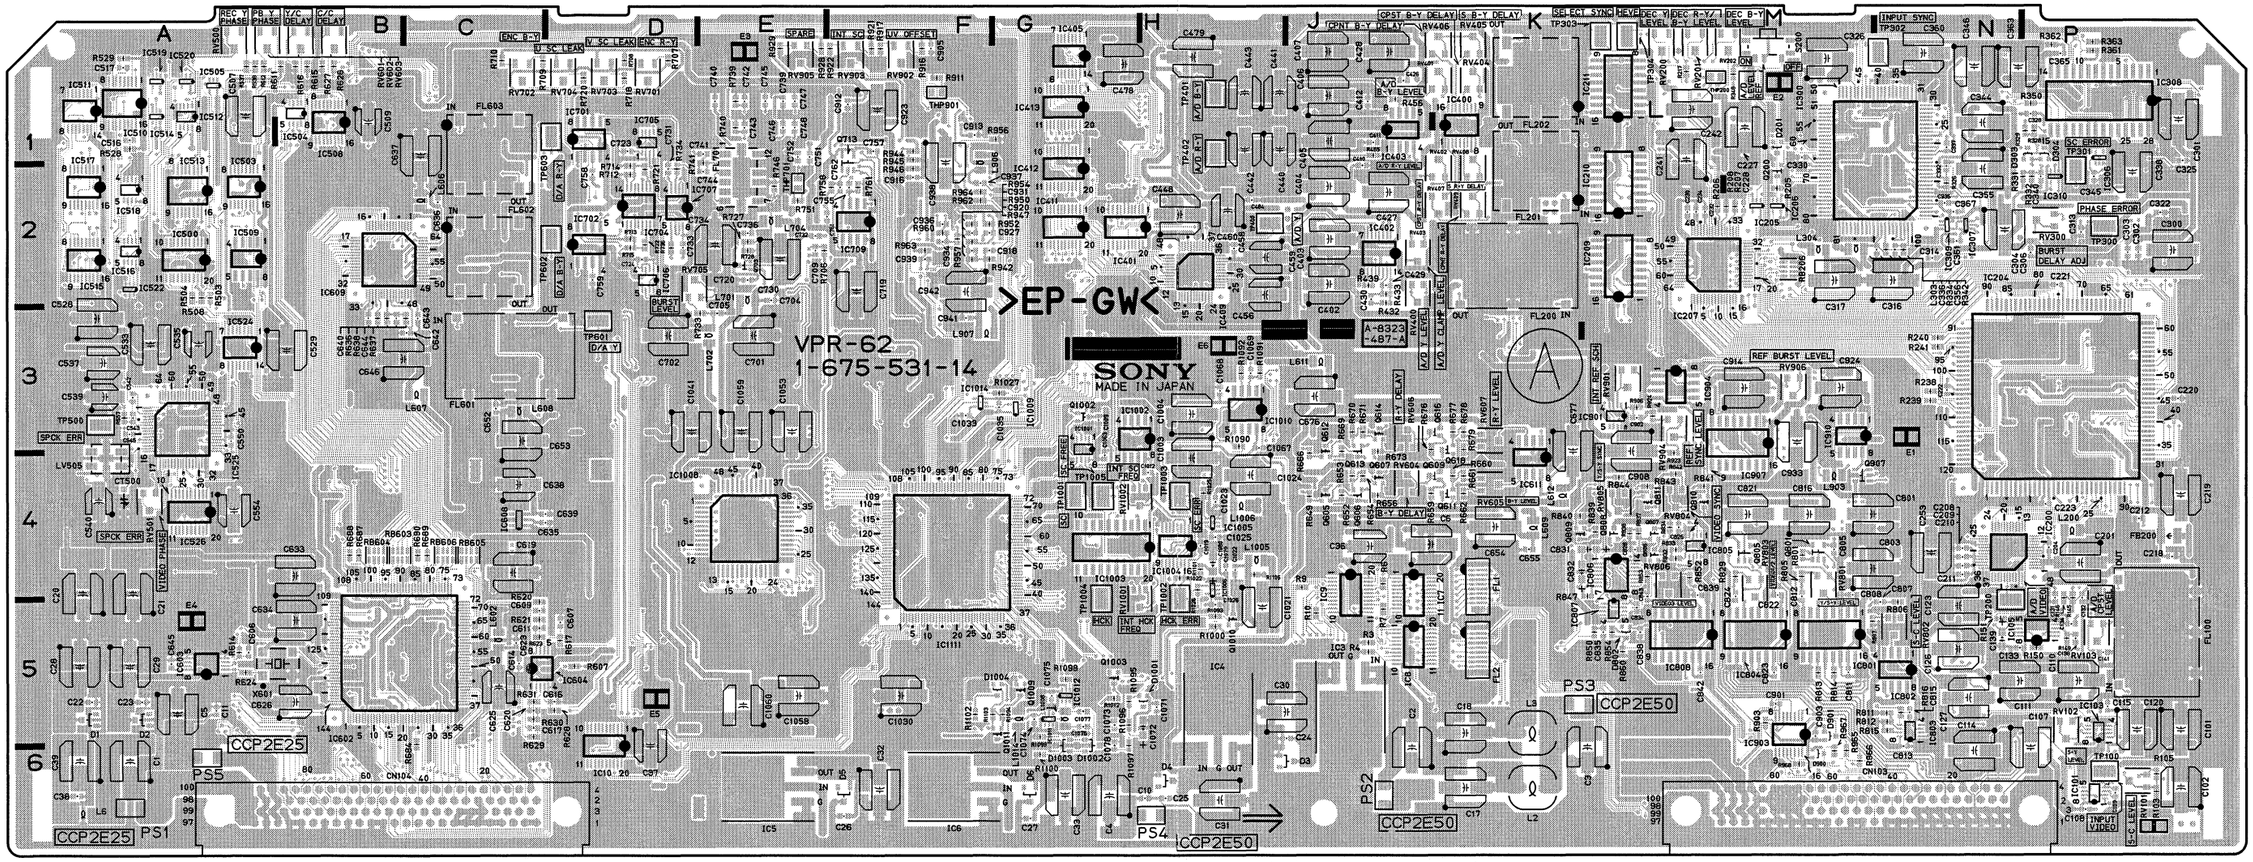

VPR-62/62P -A SIDE-
SUFFIX: -14

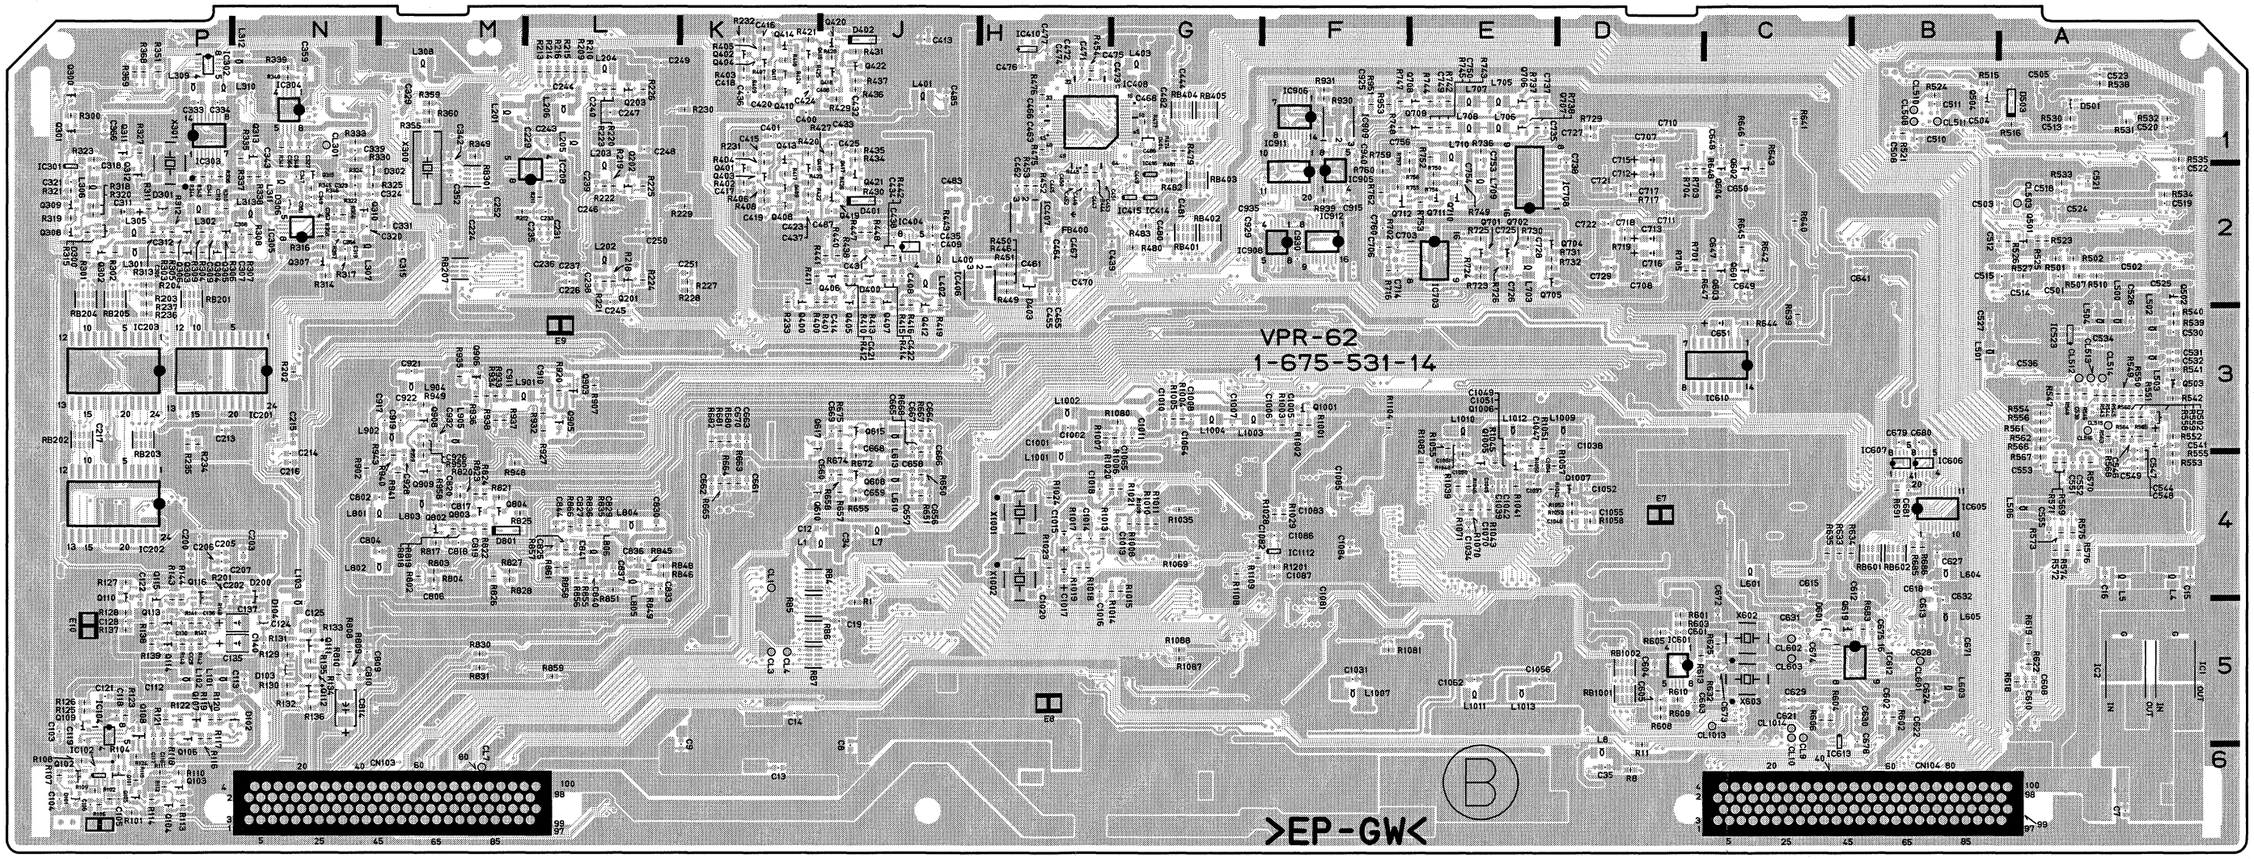

VPR-62/62P -B SIDE-
SUFFIX: -14

VPR-62/62P (1-675-531-12)

C1	A6	C213	*P3	C354	*N1	C483	*J2	C633	B4	C747	E1	C937	F2	CL10	*C5	FL200	K2	IC611	K3	L606	C2	Q403	*K2	R11	*D5	R241	N3	R429	*J1	R570	*A4	R686	*B4	R827	*M4
C2	J6	C214	*N4	C355	N2	C484	H2	C634	B5	C748	E1	C938	F1	CL301	*N1	FL201	K2	IC612	*C5	L607	C3	Q404	*K1	R101	*P6	R300	*P1	R430	*J2	R571	*A4	R687	B4	R828	*M4
C3	L6	C215	*N3	C356	N2	C485	*J1	C635	C4	C749	*E1	C939	F2	CL503	*A2	FL202	K1	IC613	*C5	L608	C3	Q405	*J2	R102	*P6	R301	*P2	R431	*J1	R572	*A4	R688	B4	R829	M4
C4	G6	C216	*N4	C359	*N1	C486	*G1	C636	C2	C750	*E1	C940	*F1	CL508	*B1	FL601	C3	IC701	D1	L609	K4	Q406	*J2	R103	P6	R302	*P2	R432	J2	R573	*A4	R689	C4	R830	*M5
C5	A5	C217	*P3	C360	N1	C487	*J2	C637	C1	C751	E1	C941	F3	CL510	*B1	FL602	C2	IC702	D2	L610	*J4	Q407	*J2	R104	*P6	R303	*P2	R433	J2	R574	*A4	R690	C4	R831	*M5
C6	J4	C218	P4	C361	N2	C488	*J1	C638	C4	C752	E1	C942	F2	CL511	*B1	FL603	C1	IC703	*E2	L611	J3	Q408	*K2	R105	P6	R304	*P2	R434	*J1	R575	*A4	R701	*D2	R832	L4
C7	*A6	C219	P4	C362	*N2	C501	*A2	C639	C4	C753	*E1	C1001	*H3	CL512	*A3	FL701	E2	IC704	D2	L612	K4	Q409	*K2	R106	*P6	R305	*P2	R435	*J1	R576	*A4	R702	*F2	R833	L4
C8	*J6	C220	P3	C363	N1	C502	*A2	C640	B3	C754	*E2	C1002	*H3	CL513	*A3			IC705	D1	L613	*J3	Q410	*K1	R107	*P6	R306	*N2	R436	*J1	R601	*D5	R703	*D2	R834	L4
C9	L5	C221	P2	C364	*N2	C503	*A2	C641	*B2	C755	F2	C1003	H4	CL514	*A3	IC1	*A5	IC706	D2	L701	E2	Q411	*K1	R108	*P6	R307	*N2	R437	*J1	R602	*B5	R704	*D2	R835	*L4
C10	H6	C222	N3	C365	P1	C504	*B1	C642	C3	C756	*E1	C1004	H3	CL515	*A3	IC2	*A5	IC707	D2	L702	E3	Q412	*J2	R109	*P6	R308	*N2	R438	*J2	R603	*D5	R705	*D2	R836	*L4
C11	A5	C223	P4	C366	*P1	C505	*A1	C643	C3	C757	F1	C1005	*F3	CL516	*A3	IC3	J5	IC708	*E2	L703	*E2	Q413	*K1	R110	*P6	R309	*P2	R439	J2	R604	*C5	R706	E2	R837	L4
C12	*J4	C224	*M2	C367	N2	C507	A1	C644	B3	C758	D2	C1006	*F3	CL601	*B5	IC4	H5	IC709	F2	L704	E2	Q414	*K1	R111	*P6	R310	*P2	R440	*J2	R605	*D5	R707	D1	R838	L4
C13	*K6	C226	*L2	C400	*K1	C508	*B1	C645	A5	C759	D2	C1007	*G3	CL602	*C5	IC5	E6	IC801	M5	L705	*E1	Q415	*K2	R112	*P6	R311	*P2	R441	*J2	R606	*C5	R708	D1	R839	L4
C14	*K5	C227	M1	C401	*K1	C509	B1	C646	B3	C760	*F2	C1008	*G3	CL603	*C5	IC6	F6	IC802	N5	L706	*E1	Q416	*K1	R113	*P6	R312	*P2	R442	*J2	R607	D5	R709	C1	R840	K4
C15	*A4	C228	M2	C402	J2	C510	*B1	C647	*C2	C761	F2	C1009	G3	CL1002	*G4	IC7	J4	IC803	N5	L707	*E1	Q417	*J2	R114	*P6	R313	*P2	R443	*J2	R608	*D5	R710	C1	R841	L4
C16	*A4	C229	*L1	C403	J2	C511	*B1	C648	*C1	C762	F2	C1010	*G3	CL1008	*F4	IC8	J5	IC804	M5	L708	*E1	Q418	*J1	R115	*P6	R314	*N2	R444	H1	R609	*D5	R712	D2	R842	L4
C17	K6	C230	L2	C404	J2	C512	*A2	C649	*C2	C801	M4	C1011	*G3	CL1009	*F4	IC9	J4	IC805	L4	L709	*E2	Q419	*J2	R116	*P5	R315	*P2	R445	H1	R610	*D5	R713	D2	R843	L4
C18	K5	C231	*L2	C405	J1	C513	*A1	C650	*C2	C802	*M4	C1012	H4	CL1010	*F4	IC10	D5	IC806	L4	L710	*E1	Q420	*J1	R117	*P5	R316	*N2	R446	*H2	R611	B1	R714	D2	R844	L4
C19	*J5	C232	L2	C406	J1	C514	*A2	C651	*C3	C803	M4	C1013	*G4	CL1011	*F3	IC101	P6	IC807	L5	L801	*M4	Q421	*J2	R118	*P5	R317	*N2	R447	*J2	R612	A1	R715	D2	R845	*L4
C20	A4	C233	*L2	C407	J1	C515	*A2	C652	C3	C804	*M4	C1014	*H4	CL1013	*C5	IC102	*P6	IC808	L5	L802	*M4	Q422	*J1	R119	*P5	R318	*P2	R448	*J2	R613	*D5	R716	*F2	R846	*L4
C21	A4	C234	L2	C408	*J2	C516	A1	C653	C3	C805	M4	C1015	*H4	CL1016	*F5	IC103	P5	IC901	L3	L803	*M4	Q501	*A2	R120	*P5	R319	*P2	R449	*H2	R614	A5	R717	*D2	R847	L4
C22	A5	C235	*L2	C409	*J2	C517	A1	C654	K4	C806	*M4	C1016	*H4	CL1017	*F5	IC104	*P5	IC903	M5	L804	*L4	Q502	*A2	R121	*P5	R320	*P2	R450	*H2	R615	B1	R718	D1	R848	*L4
C23	A5	C236	*L2	C410	J2	C518	*A2	C655	K4	C807	N5	C1017	*H4	CL1021	*F5	IC105	P5	IC904	L3	L805	*L4	Q503	*A3	R122	*P5	R321	*P2	R451	*H2	R616	B1	R719	*D2	R849	*L4
C24	J5	C237	*L2	C411	J1	C519	*A2	C656	*J4	C808	M4	C1018	*H4	CL1022	*G4	IC200	N4	IC905	*F2	L806	*L4	Q504	*B1	R123	*P5	R322	*N2	R452	*H2	R617	D5	R720	D1	R850	L5
C25	H6	C238	*L2	C412	J1	C520	*A1	C657	*J4	C809	*N5	C1019	H4	CL1023	*G4	IC201	*N3	IC906	*F1	L901	*M3	Q601	*C2	R124	*P6	R323	*P1	R453	*H2	R618	*A5	R721	D2	R851	*L4
C26	F6	C239	*L2	C413	*J1	C521	*A2	C658	*J4	C810	*N5	C1020	*H4	CL1024	*E4	IC202	*P4	IC907	M3	L902	*M3	Q602	*C2	R125	*P5	R324	*N2	R454	G1	R619	*A5	R722	D2	R852	L4
C27	G6	C240	*L1	C414	*J2	C522	*A2	C659	*J4	C811	M5	C1021	H5	CL1025	*F4	IC203	*P3	IC908	*F2	L903	M4	Q603	*C2	R126	*P5	R325	*N2	R474	*G1	R620	C5	R723	*E2	R853	L4
C28	A5	C241	L1	C415	*K1	C523	*A1	C660	*J4	C812	M4	C1022	H4			IC204	P3	IC909	*F1	L904	*M3	Q604	*C2	R127	*P4	R326	N2	R475	*H2	R621	C5	R724	*E2	R854	L5
C29	A5	C242	L1	C416	*K1	C524	*A2	C661	*K4	C813	N6	C1023	H4	CN103	M6	IC205	M2	IC910	M3	L905	*M3	Q605	J4	R128	*P5	R327	*P1	R476	*G2	R622	*A5	R725	*E2	R855	*L4
C30	J5	C243	*L1	C417	*K2	C525	*A2	C662	*K4	C814	*N5	C1024	H4	CN104	B6	IC206	M2	IC911	*F1	L906	F1	Q606	J4	R129	*N5	R328	P1	R477	*H1	R623	C5	R726	*E2	R856	*L4
C31	H6	C244	*L1	C418	*K1	C526	*A3	C663	*K3	C815	N5	C1025	H4			IC207	L2	IC912	*F2	L907	F3	Q607	J4	R130	*N5	R329	P1	R479	*G1	R624	A5	R727	E2	R857	*L4
C32	F6	C245	*L2	C419	*K2	C527	*B3	C664	*J3	C816	M4	C1026	H5	CT500	A4	IC208	*L2	IC1001	G3	L1001	*H4	Q608	*J4	R131	*N5	R330	*N1	R480	*G2	R625	*C5	R728	E2	R858	*L4
C33	G6	C246	*L2	C420	*K1	C528	A3	C665	*J4	C817	*M4	C1027	*G4			IC209	L2	IC1002	H3	L1002	*H3	Q609	K4	R132	*N5	R331	P2	R481	*G2	R626	B1	R729	*D1	R859	*L5
C34	*J4	C247	*L1	C421	*J2	C529	B3	C666	*J4	C818	*M4	C1028	F5	D1	A5	IC210	L2	IC1003	H4	L1003	*G3	Q610	*K4	R133	*N5	R332	P2	R482	*G2	R627	B1	R730	*E2	R860	L5
C35	*D6	C248	*L1	C422	*J2	C530	*A3	C667	*J3	C819	*M4	C1029	*F3	D2	A5	IC211	L1	IC1004	H4	L1004	*G3	Q611	K4	R134	*N5	R333	*N1	R483	*G2	R628	D5	R731	*E2	R861	*L4
C36	J4	C249	*L1	C423	*K2	C531	*A3	C668	*J3	C820	*M4	C1030	F5	D3	J6	IC300	N1	IC1005	H4	L1005	H4	Q612	J3	R135	*N5	R334	N2	R501	*A2	R629	C5	R732	*E2	R866	*L4
C37	D5	C250	*L2	C424	*K1	C532	*A3	C669	*J3	C821	M4	C1031	*F5	D4	H6	IC301	*P2	IC1006	H4	L1006	H4	Q613	J3	R136	*N5	R335	*N1	R502	*A2	R630	C5	R733	E3	R902	*N4
C38	A6	C251	*K2	C425	*J1	C533	A3	C670	*K3	C822	M4	C1032	F4	D5	F6	IC302	*P1	IC1007	F4	L1007	*F5	Q614	J3	R137	*P5	R336	*P2	R503	A2	R631	C5	R734	D2	R903	M5
C39	A6	C252	*M2	C426	J1	C534	*A3	C671	*B5	C823	M5	C1034	*E4	D6	G6	IC303	*P1	IC1008	E4	L1008	G5	Q615	*J3	R138	*P5	R337	*N2	R504	A2	R632	*C5	R735	D2	R906	L3
C101	P5	C253	N4	C427	J2	C535	A3	C672	*C5	C824	M4	C1037	*E4	D101	*P6	IC304	*N1	IC1010	H3	L1009	*D3	Q616	K3	R139	*P5	R338	*N2	R507	*A2	R633	*C4	R736	*E1	R907	*L3
C102	P6	C300	P2	C428	J1	C536	*A3	C673	*C5	C825	*L4	C1038	*D3	D102	*N5	IC305	*N2	IC1011	G5	L1010	*E3	Q617	*K3	R140	*P5	R339	*N1	R508	A2	R634	*B4	R737	*E1	R911	F1
C103	*P5	C301	P1	C429	J2	C537	A3	C674	*C5	C826	L4	C1039	*E4	D103	*N5	IC306	P1	IC1012	G5	L1011	*E5	Q618	K3	R141	*P5	R340	*N1	R510	*A2	R635	*C4	R738	*E1	R916	F1
C104	*P6	C302	P2	C430	J2	C538	*A3	C675	*B5	C827	*L4	C1041	D3	D104	*N5	IC307	N2	IC1013	*F5	L1012	*E3	Q619	*C5	R142	*P5	R341	*N1	R515	*B1	R636	B3	R739	E1	R917	F1
C105	*P6	C303	P2	C431	*J2	C539	A3	C676	J3	C828	L4	C1042	*E4	D200	*N4	IC308	P1	IC1111	*F4	L1013	*E5	Q701	*E2	R143	*P5	R342	N2	R516	*A1	R637	C3	R740	E1	R920	*L3
C106	*P6	C304	N2	C432	*J1	C540	A4	C677	K3	C829	*L4	C1045	*E4	D201	M1	IC309	N2	IC1112	*F4	L1014	G5	Q702	*E2	R144	*P5	R343	*P2	R521	*B1	R638	B3	R741	E1	R921	F1
C107	P6	C305	*P2	C433	*J1	C541	*A3	C678	*B5	C830	*L4	C1047	*E3	D300	*P2	IC310	P2					Q703	E2	R145	P4	R344	*P2	R523	*A2	R639	*C3	R742	*E1	R922	F1
C108	P6	C306	P2	C434	*J2	C542	A3	C701	E3	C831	L4	C1048	*D4	D301	*P2	IC400	K1	L1	*J4	LV505	A4	Q704	*E2	R146	P4	R345	*N2	R524	*B1	R640	*C2	R743	*E1	R923	L4
C109	P6	C307	*N2	C435	*J2	C543	A3	C702	D3	C832	L4	C1049	*E3	D302	*N2	IC401	H2	L2	K6			Q705	*E2	R147	*P5	R346	*N2	R525	*A2	R641	*C1	R744	*E1	R924	L3
C110	P5	C308	*N2	C436	*K1	C544	*A3	C703	*F2	C833	*L4	C1050	*E4	D303	P1	IC402	J2	L3	K5	PS1	A6	Q706	*E1	R148	*P5	R348	M1	R526	*A2	R642	*C2	R745	*E1	R927	*L3
C111	N5	C309	*P2	C437	*K2	C545	A3	C704	E2	C834	L5	C1051	*E4	D304	P1	IC403	J1	L4	*A4	PS2	J6	Q707	*E1	R149	P5	R349	*M1	R527	*A2	R643	*C2	R746	E2	R928	E1
C112	*P5	C310	*P2	C438	*J2	C546	*A3	C705	E3	C835	L5	C1052	*D4	D306	*N2	IC404	*J2	L5	*A4	PS3	L5	Q708	*E1	R150	P5	R350	P1	R528	A1	R644	*C3	R747	*F1	R929	E1
C113	*N5	C311	*P2	C439	*G2	C547	*A3	C706	*F2	C836	*L4	C1053	E3	D400	*J2	IC405	G1	L6	A6	PS4	H6	Q709	*E1	R151	N5	R351	*P1	R529	A1	R645	*C2	R748	*F1	R930	*F1
C114	N6	C312	*P2	C440	H1	C548	*A4	C707	*D1	C837	*L4	C1054	*E4	D401	*J2	IC406	*H2	L7	*J4	PS5	A6	Q710	*E2	R201	*P4	R355	*M1	R530	*A1	R646	*C1	R749	*E2	R931	*F1
C115	P5	C313	P2	C441	H1	C549	*A4	C708	*D2	C838	L5	C1055	*D4	D402	*J1	IC407	*H2	L8	*D6			Q711	*E2	R202	*N3	R356	*N2	R531	*A1	R647	*C2	R750	*E2	R932	*L3
C116	*P5	C314	N2	C442	H2	C550	A3	C709	E2	C839	L4	C1056	*E5	D403	*H2	IC408	H1	L101	*P5	Q101	*P6	Q712	*F2	R203	*P2	R357	*N2	R532	*A1	R648	*C2	R751	E2	R933	*M3
C117	*P5	C315	*M2	C443	H1	C551	*A4	C710	*D1	C840	*L4	C1058	E5	D404	*H1	IC409	H2	L102	*P5	Q102	*P6	Q713	F1	R204	*P2	R358	*N2	R533	*A2	R649	J4	R752	*E1	R934	*M3
C118	*P5	C316	N2	C444	*G1	C552	*A4	C711	*D2	C841	*L4	C1059	E3	D501	*A1	IC410	*H1	L103	*N5	Q103	*P6	Q801	M4	R205	M2	R359	*M1	R534	*A2	R650	*J4	R753	*E2	R935	*M3
C119	*P5	C317	M2	C445	*H2	C553	*A4	C712	*D2	C842	L5	C1060	E5	D502	*A3	IC411	G2	L200	P4	Q104	*P6	Q802	*M4	R206	L2	R360	*M1	R535	*A1	R651	*J4	R754	*E2	R936	*M3
C120	P5	C318	*P2	C446	H1	C554	A4	C713	*D2	C843	L4	C1061	*E3	D503	*A1	IC412	G1	L201	*M1	Q105	*P6	Q803	*M4	R207	M2	R361	P1	R536	A1	R652	J4	R755	*F2	R937	*M3
C121	*P5	C319	*N2	C447	*H1	C555	*A4	C714	*F2	C844	*L4	C1062	*E5	D601	*C5	IC413	G1	L202	*L2	Q106	*P5	Q804	*M4	R208	M2	R362	P1	R537	A1	R653	J4	R756	*E2	R938	*M3
C122	*P5	C320	*N2	C448	H2	C601	*D5	C715	*D1	C901	M5	C1063	G4	D801	*M4	IC414	*G2	L203	*L2	Q107	*P5	Q805	M4	R209	*L1	R363	P1	R538	*A1	R654	J4	R757	*E1	R939	*F2
C123	N5	C321	*P2	C449	*H1	C602	*B5	C716	*D2	C902	L3	C1064	*G3	D802	L5	IC415	*G2	L204	*L1	Q108	*P5	Q806	L4	R210	*L1	R368	*P1	R539	*A3	R655	*J4	R758	F2	R940	*M4
C124	*N5	C322	P2	C450	*H1	C603	*D5	C717	*D2	C903	M5	C1065	*G3	D900	M6	IC416	*G2	L205	*L1	Q109	*P5	Q807	L4	R211	*L2	R369	*P1	R540	*A3	R656	J4	R759	*F1	R941	*M4
C125	*N5	C323	*N2	C451	*H1	C604	*D5	C718	*D2	C905	F1	C1066	F5	D901	M5	IC500	A2	L206	*L1	Q110	*P4	Q808	L4	R212	*M2	R400	*K2	R541	*A3	R657	*J4	R760	*F2	R942	F2
C126	N5	C324	*N2	C452	*H1	C605	*D5	C719	F2	C908	L3	C1067	H3	D1000	F3	IC503	A2	L301	*P2	Q111	*N5	Q809	K4	R213	*L1	R401	*J2	R542	*A3	R658	*J4	R761	F2	R943	*M4
C127	N5	C325	P1	C453	*H1	C606	A5	C720	E2	C910	*L3	C1068	H3	D1001	H5	IC504	B1	L302	*P2	Q112	*N5	Q810	L4	R214	*L1	R402	*K2	R543	*A3	R659	J4	R762	*F2	R944	F1
C128	*P5	C326	M1	C455	*H2	C607	D5	C721	*D2	C911	*M3	C1069	H3	D1002	G5	IC505	A1	L303	M2	Q113	*P5	Q811	L4	R215	*L1	R403	*K1	R544	*A3	R660	K4	R801	M4	R945	F1
C129	*P5	C327	*N1	C456	H2	C608	*A5	C722	*D2	C912	F1	C1070	*E4	D1003	G5	IC508	B1	L304	M2	Q114	*P5	Q903	*L3	R216	*L1	R404	*K1	R545	*A3	R661	K4	R802	*M4	R946	F2
C130	*P5	C328	P1	C458	H2	C609	C5	C723	D1	C913	F1	C1071	H5	D1004	G5	IC509	A2	L305	*P2	Q115	*P5	Q905	*L3	R217	L1	R405	*K1	R546	*A3	R662	K4	R803	*M4	R947	F2
C131	P4	C329	*M1	C459	H2	C610	*A5	C724	D2	C914	M3	C1072	H5			IC510	A1	L306	*P2	Q116	*P4	Q906	*M3	R218	*L2	R406	*K2	R547	*A3	R663	*K4	R804	*M4	R948	*M4
C132	P4	C330	M1	C460	H2	C611	C5	C725	*E2	C915	*F2	C1073	G5	E1	N3	IC511	A1	L307	*N2	Q200	M2	Q907	M4	R219	*L2	R407	*K1	R548	*A3	R664	*K4	R805	M4	R949	*M3
C133	N5	C331	*M2	C461	*H2	C612	*B4	C726	*E2	C916	F2	C1074	G5	E2	M1	IC512	A1	L308	*M1	Q201	*L2	Q908	*M3	R220	*L1	R408	*K2	R549	*A3	R665	*K4	R806	N5	R950	F2
C134	P5	C332	N2	C462	*H2	C613	*B5	C727	*D1	C917	*M3	C1075	G5	E3	E1	IC513	A2	L309	*P1	Q202	*L2	Q909	*M4	R221	*L2	R409	*K1	R550	*A3	R666	J4	R807	M5	R951	*F1
C135	*N5	C333	*P1	C463	*H2	C614	C5	C728	*E2	C918	F2	C1076	G5	E4	A5	IC514	A1	L310	*P1	Q203	*L1	Q1001	*F3	R222	*L2	R410	*J2	R551	*A3	R667	*J3	R808	*N5	R952	F2
C136	*P5	C334	*P1	C464	*H2	C615	*C4	C729	*D2	C919	*M3	C1077	G5	E5	D5	IC515	A2	L311	*N2	Q300	*P1	Q1002	G3	R223	*L1	R411	*K2	R552	*A3	R668	*J4	R809	*N5	R953	*F1
C137	*N5	C335	N2	C465	*H2	C616	D5	C730	E2	C920	F2	C1078	G5	E6	H3	IC516	A2	L312	*N1	Q301	*P1	Q1003	G5	R224	*L2	R412	*J2	R553	*A4	R669	J3	R810	*N5	R954	F2
C138	P5	C336	N2	C466	H1	C617	C5	C731	D2	C921	*M3	C1079	H4	E7	*D4	IC517	A2	L313	*N2	Q302	*P2	Q1004	G5	R225	*L2	R413	*J2	R554	*A3	R670	J3	R811	N5	R955	*M3
C139	N5	C337	N1	C467	*H2	C618	*B4	C732	E2	C922	*M3	C1080	H4	E8	*H5	IC518	A2	L400	*J2	Q303	*P2	Q1005	*E4	R226	*L1	R414	*J2	R555	*A4	R671	J3	R812	N5	R956	G1
C140	*N5	C338	P2	C468	*H2	C619	C4	C733	D2	C923	F1	C1081	*F5	E9	*L3	IC519	A1	L401	*J1	Q304	*P2	Q1006	*E4	R227	*K2	R415	*J2	R556	*A3	R672	*J4	R813	M5	R957	F2
C200	*P4	C339	*N1	C470	*H2	C620	C5	C734	E2	C924	M3	C1082	*G4	E10	*P5	IC520	A1	L402	*J2	Q305	*P2	Q1007	*D4	R228	*K2	R416	*J2	R557	A3	R673	J3	R814	M5	R958	*M4
C201	P4	C340	P2	C471	*G1	C621	*C5	C735	*E1	C925	*F1	C1083	*F4			IC522	A2	L403	*G1	Q306	*P2	Q1009	G5	R229	*K2	R417	*K2	R558	*A3	R674	*J3	R815	N5	R959	*M4
C202	*N4	C341	*P2	C472	G2	C622	*B5	C736	E2	C926	*M3	C1084	*F4	FB1	A6	IC523	*A3	L500	*A3	Q307	*N2	Q1010	H5	R230	*K1	R418	*K1	R559	*A3	R675	*J3	R816	N5	R960	F2
C203	*N4	C342	*M1	C473	*G1	C623	C5	C737	*E1	C927	F2	C1085	*F4	FB2	L6	IC524	A3	L501	*B3	Q308	*P2	Q1011	G5	R231	*K1	R419	*J2	R560	*A3	R676	J3	R817	*M4	R962	F2
C204	P4	C343	*N2	C474	*G2	C624	*B5	C738	*D1	C928	*M4	C1086	*F4	FB3	L6	IC525	A3	L502	*A3	Q309	*P2			R232	*K1	R420	*K1	R561	*A3	R677	K3	R818	*M4	R963	F2
C205	*P4	C344	N1	C475	G1	C625	C5	C739	E1	C929	*G2	C1087	*F4	FB4	L6	IC526	A4	L503	*A3	Q310	*N2	R1	*J5	R233	*K2	R421	*K1	R562	*A3	R678	K3	R819	*M4	R964	F2
C206	*P4	C345	P2	C476	*H1	C626	B5	C740	E1	C930	*F2			FB5	A6	IC601	*D5	L504	*A3	Q311	*P1	R3	J5	R234	*P3	R422	*K2	R563	*A3	R679	K3	R820	*M4	R965	M6
C207	*P4	C346	N1	C477	*H1	C627	*B4	C741	E1	C931	F2	CL1	*K4	FB200	P4	IC602	B5	L506	*A4	Q312	*P2	R4	J5	R235	*P3	R423	*K2	R564	*A3	R680	*K3	R821	*M4	R966	M6
C208	N4	C347	*N2	C478	G1	C628	*B5	C742	E1	C932	*M3	CL3	*K5	FB400	*H2	IC603	A5	L601	*C4	Q313	*N1	R6	J4	R236	*P3	R424	*K1	R565	*A3	R681	*K3	R822	*M4	R967	M6
C209	N4	C348	*N1	C479	H1	C629	*C5	C743	E1	C933	M3	CL4	*K5			IC604	C5	L602	C5	Q315	*N2	R7	J5	R237	*P2	R425	*K1	R566	*A3	R682	*K3	R823	*M4	R968	M6
C210	N4	C349	*N2	C480	*G2	C630	*B5	C744	E2	C934	F2	CL7	*M6	FL1	K4	IC608	C4	L603	*B5	Q400	*K2	R8	*D6	R238	N3	R426	*J2	R567	*A4	R683	*B5	R824	*M4	R1000	H5
C211	N4	C351	*N2	C481	*G2	C631	*C5	C745	E1	C935	*F2	CL8	*H5	FL2	K5	IC609	B2	L604	*B4	Q401	*K2	R9	J4	R239	N3	R427	*J1	R568	*A3	R684	C5	R825	*M4	R1001	*F3
C212	P4	C352	*M2	C482	*G1	C632	*B5	C746	E1	C936	F2	CL9	*C5	FL100	P5	IC610	*C3	L605	*B5	Q402	*K1	R10	J5	R240	N3	R428	*J1	R569	*A4	R685	*B4	R826	*M4	R1002	*F3

R1003	*F3	RB603	B4
R1004	*G3	RB604	B4
R1005	*G3	RB605	C4
R1006	*G3	RB606	C4
R1007	*H3	RB1001	*D5
R1008	*G4	RB1002	*D5
R1009	*G4		
R1010	*G4	RV101	P6
R1011	*G4	RV102	P5
R1012	G5	RV103	P5
R1013	*H4	RV200	L1
R1014	*G4	RV201	L1
R1015	*G4	RV202	M1
R1016	G5	RV300	P2
R1017	*H4	RV400	J2
R1018	*H4	RV401	K1
R1019	*H4	RV402	K2
R1020	*G4	RV403	J2
R1021	*G4	RV404	K1
R1022	H4	RV405	K1
R1023	*H4	RV406	K1
R1024	*H4	RV407	K2
R1025	H4	RV408	K2
R1026	H4	RV409	K2
R1030	*G4	RV500	A1
R1035	*G4	RV501	A4
R1039	*E4	RV601	A1
R1041	*E4	RV602	B1
R1042	*E4	RV603	B1
R1043	*E4	RV604	J4
R1045	*E4	RV605	K4
R1046	*E4	RV606	J3
R1049	*E4	RV607	K3
R1050	*E4	RV701	D1
R1051	*E3	RV702	C1
R1052	*D4	RV703	D1
R1053	*D4	RV704	D1
R1055	*E3	RV705	D2
R1057	*E4	RV801	M4
R1058	*D4	RV802	N5
R1069	*G4	RV803	M4
R1070	*E4	RV804	L4
R1071	*E4	RV805	L4
R1080	*G3	RV806	L4
R1081	*F5	RV901	L3
R1082	*E4	RV902	F1
R1084	*F3	RV903	F1
R1085	*F3	RV904	L3
R1086	*G4	RV905	E1
R1087	*G5	RV906	M3
R1088	*G5	RV1001	G4
R1090	H3	RV1002	G4
R1091	H3		
R1092	H3	S200	M1
R1093	H5		
R1094	G5	THP200	L1
R1095	G5	THP701	E2
R1096	G5	THP901	F1
R1097	G5		
R1098	G5	TP100	P6
R1099	G5	TP200	N5
R1100	G6	TP300	P2
R1101	H4	TP301	P2
R1102	F5	TP302	N1
R1103	G5	TP303	L1
R1104	*F3	TP304	L1
R1105	H4	TP400	H2
R1107	*G4	TP401	H1
R1108	*G4	TP402	H2
R1109	*G4	TP500	A3
R1200	F5	TP601	D3
R1201	*F4	TP602	D2
		TP603	D1
RB4	*K4	TP1001	G4
RB5	*K5	TP1002	H4
RB6	*K5	TP1003	H4
RB7	*K5	TP1004	G4
RB201	*P2	TP1005	G4
RB202	*P3		
RB203	*P3	X300	*M2
RB204	*P2	X301	*P2
RB205	*P2	X601	B5
RB206	M2	X602	*C5
RB207	*M2	X603	*C5
RB301	*M2	X1001	*H4
RB401	*G2	X1002	*H4
RB402	*G2		
RB403	*G2	*:B SIDE	
RB404	*G1		
RB405	*G1		
RB601	*B4		
RB602	*B4		

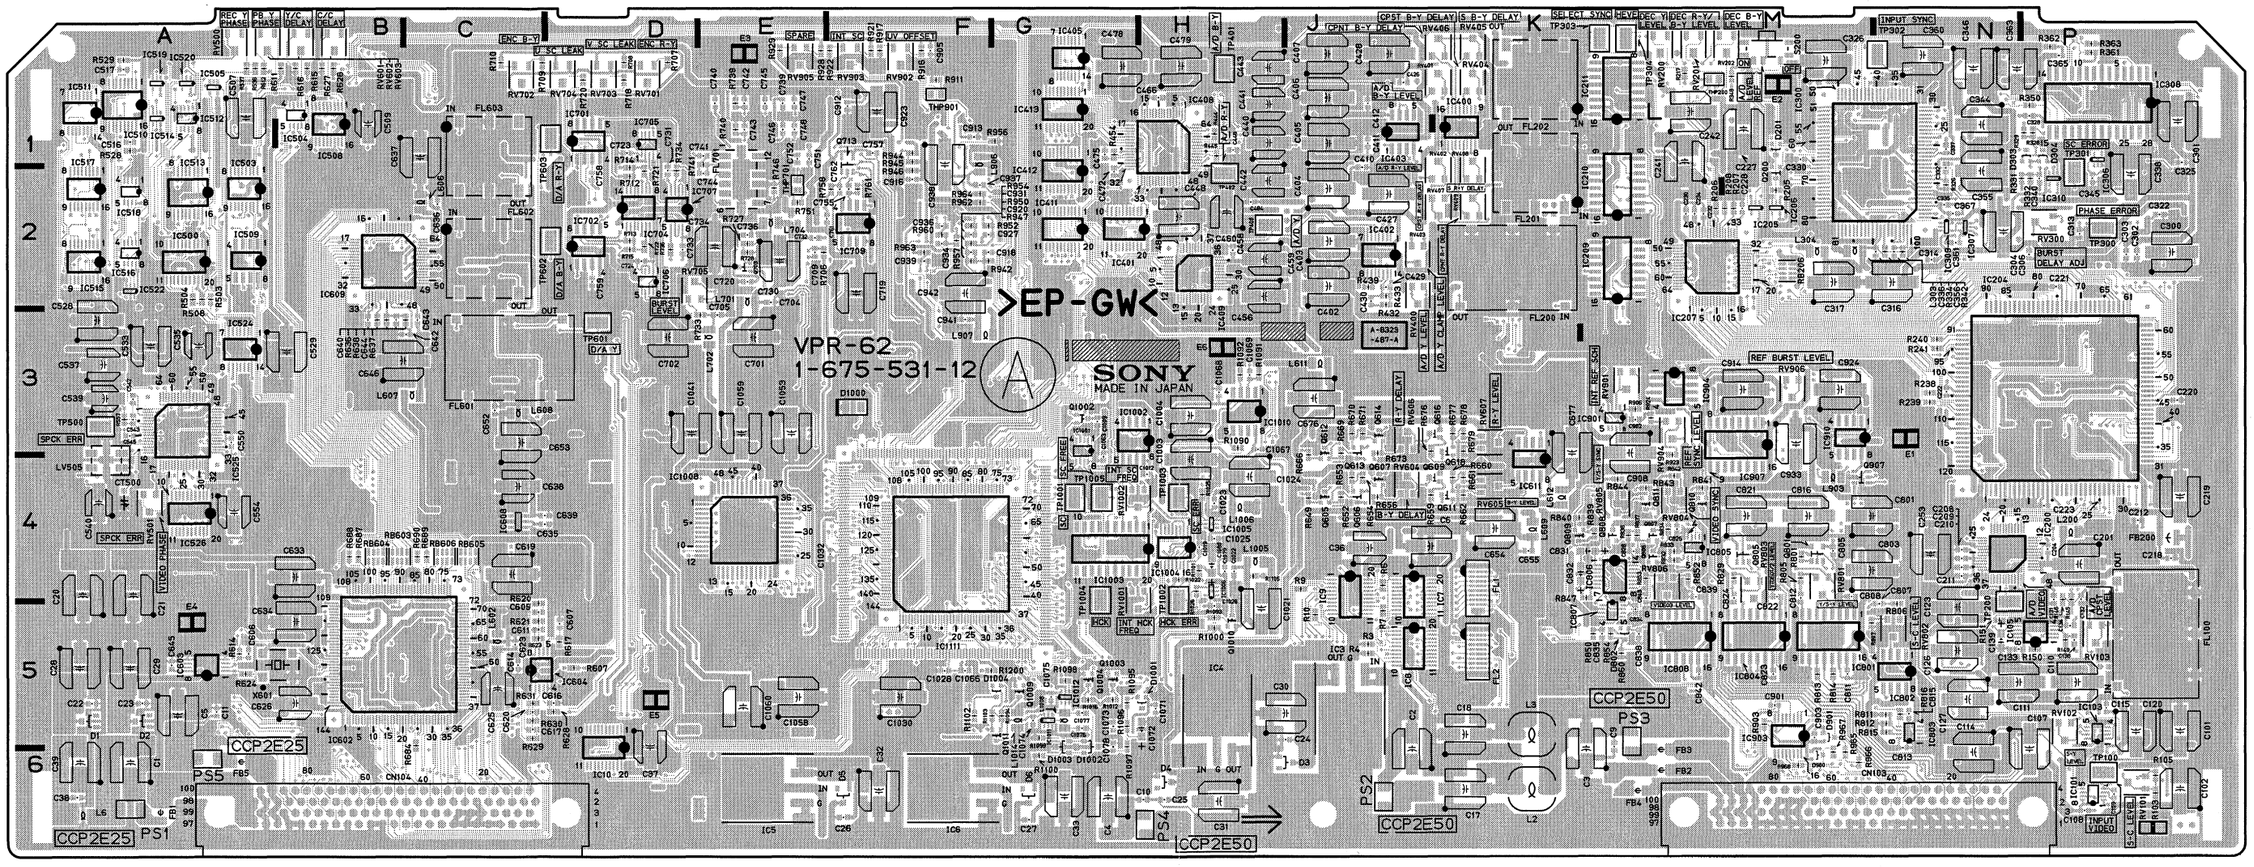

VPR-62/62P -A SIDE-
SUFFIX: -12

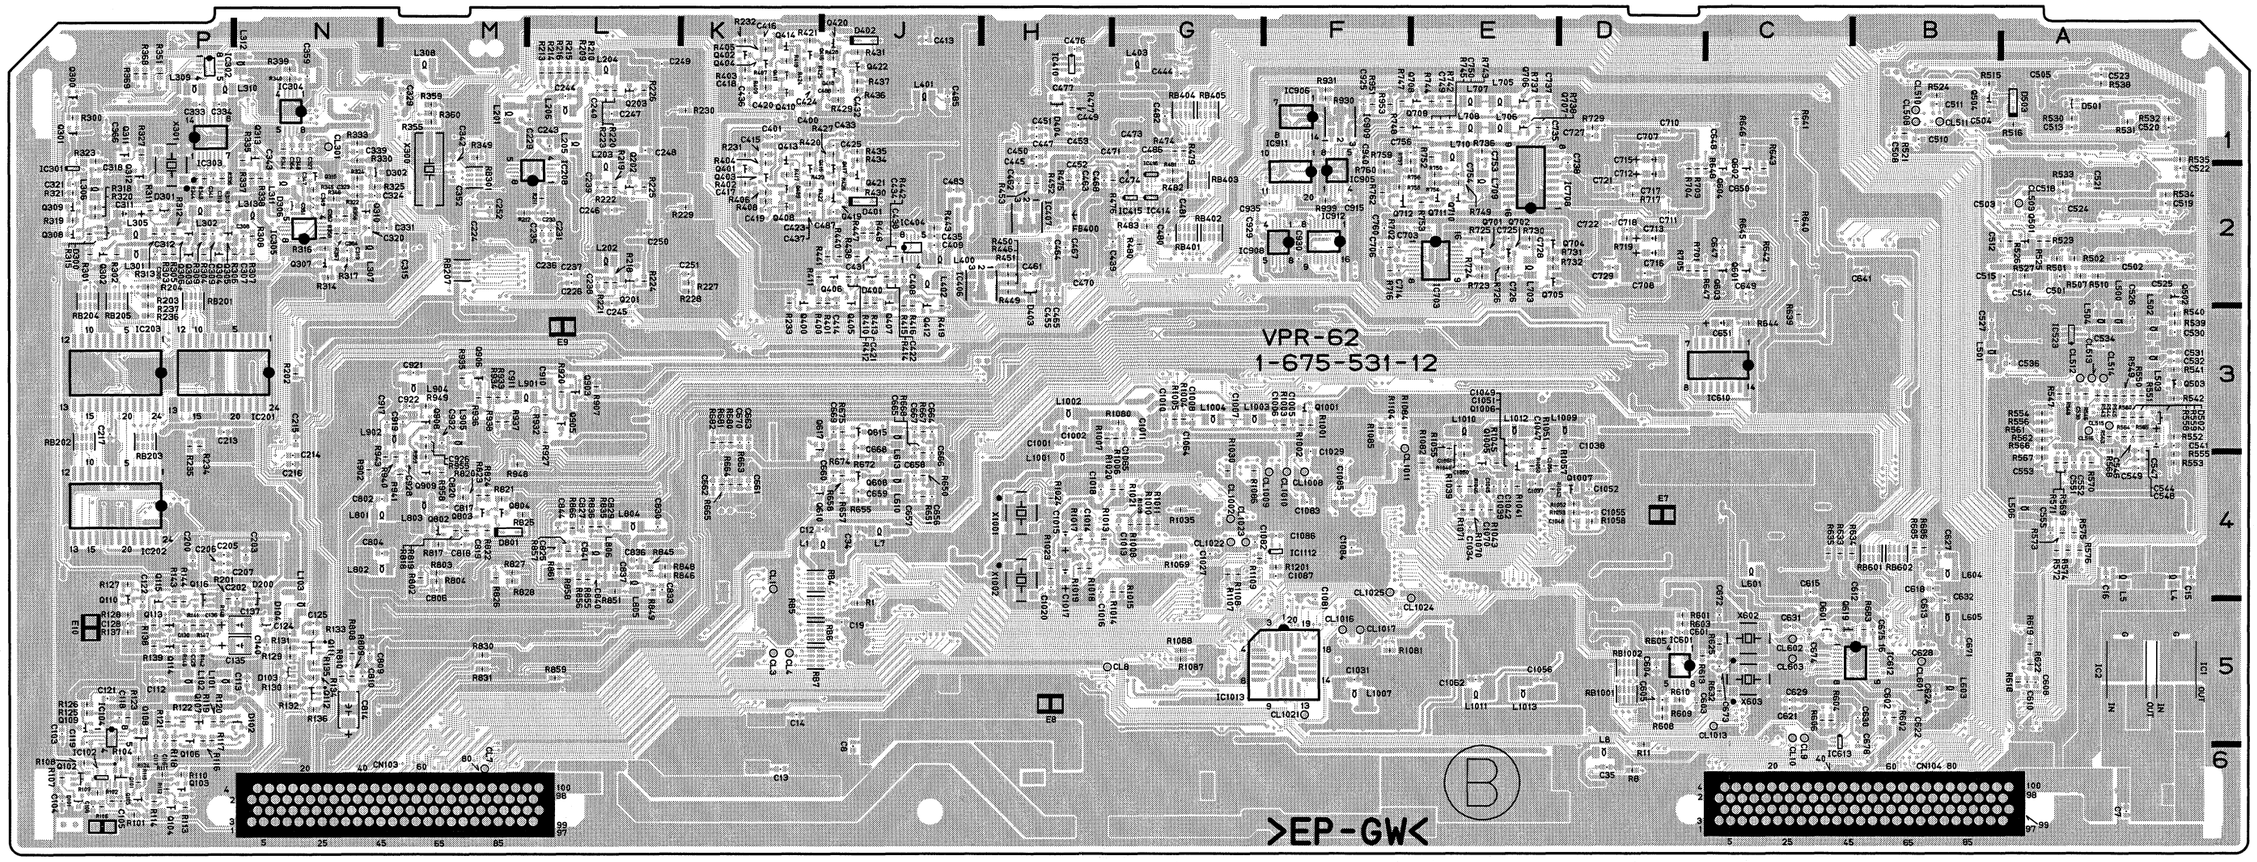

VPR-62/62P -B SIDE-
SUFFIX: -12

VPR-62/62P (1-675-531-11)

C1	A6	C213	*P3	C355	N2	C484	H2	C636	C2	C751	E1	C941	F3	CL510	*B1	IC1	*A5	IC707	D2	L703	*E2	Q414	*K1	R112	*P6	R317	*N2	R447	*J2	R613	*D5	R723	*E2	R853	L4
C2	J6	C214	*N4	C356	N2	C485	*J1	C637	C2	C752	E1	C942	F2	CL511	*B1	IC2	*A5	IC708	*E2	L704	E2	Q415	*K2	R113	*P6	R318	*P2	R448	*J2	R614	A5	R724	*E2	R854	L5
C3	L6	C215	*N3	C359	*N1	C486	*G1	C638	C4	C753	*E1	C1001	*H3	CL512	*A3	IC3	J5	IC709	F2	L705	*E1	Q416	*K1	R114	*P6	R319	*P2	R449	*H2	R615	B1	R725	*E2	R855	*L4
C4	G6	C216	*N4	C360	N1	C501	*A2	C639	C4	C754	*E2	C1002	*H3	CL513	*A3	IC4	H5	IC801	M5	L706	*E1	Q417	*J2	R115	*P6	R320	*P2	R450	*H2	R616	B1	R726	*E2	R856	*L4
C5	A5	C217	*P3	C361	N2	C502	*A2	C640	B3	C755	F2	C1003	H4	CL514	*A3	IC5	E6	IC802	N5	L707	*E1	Q418	*J1	R116	*P5	R321	*P2	R451	*H2	R617	D5	R727	E2	R857	*L4
C6	J4	C218	P4	C362	*N2	C503	*A2	C641	*B2	C756	*E1	C1004	H3	CL515	*A3	IC6	F6	IC803	N5	L708	*E1	Q419	*J2	R117	*P5	R322	*N2	R452	*H2	R618	*A5	R728	E2	R858	*L4
C7	*A6	C219	P4	C363	N1	C504	*B1	C642	C3	C757	F1	C1005	*F3	CL516	*A3	IC7	J4	IC804	M5	L709	*E2	Q420	*J1	R118	*P5	R323	*P1	R453	*H2	R619	*A5	R729	*D1	R859	*L5
C8	*J6	C220	P3	C364	*N2	C505	*A1	C643	C3	C758	D2	C1006	*F3	CL601	*B5	IC8	J5	IC805	L4	L710	*E1	Q421	*J2	R119	*P5	R324	*N2	R454	G1	R620	C5	R730	*E2	R860	L5
C9	L5	C221	P2	C365	P1	C507	A1	C644	B3	C759	D2	C1007	*G3	CL602	*C5	IC9	J4	IC806	L4	L801	*M4	Q422	*J1	R120	*P5	R325	*N2	R474	*G1	R621	C5	R731	*E2	R861	*L4
C10	H6	C222	N3	C366	*P1	C508	*B1	C645	A5	C760	*F2	C1008	*G3	CL603	*C5	IC10	D5	IC807	L5	L802	*M4	Q501	*A2	R121	*P5	R326	N2	R475	*H2	R622	*A5	R732	*E2	R866	*L4
C11	A5	C223	P4	C367	N2	C509	B1	C646	B3	C761	F2	C1009	G3	CL1002	*G4	IC101	P6	IC808	L5	L803	*M4	Q502	*A2	R122	*P5	R327	*P1	R476	*G2	R623	C5	R733	E3	R902	*N4
C12	*J4	C224	*M2	C400	*K1	C510	*B1	C647	*C2	C762	F2	C1010	*G3	CL1003	*G4	IC102	*P6	IC901	L3	L804	*L4	Q503	*A3	R123	*P5	R328	P1	R477	*H1	R624	A5	R734	D2	R903	M5
C13	*K6	C226	*L2	C401	*K1	C511	*B1	C648	*C1	C801	M4	C1011	*G3	CL1008	*F4	IC103	P5	IC903	M5	L805	*L4	Q504	*B1	R124	*P6	R329	P1	R479	*G1	R625	*C5	R735	D2	R906	L3
C14	*K5	C227	M1	C402	J2	C512	*A2	C649	*C2	C802	*M4	C1012	H4	CL1009	*F4	IC104	*P5	IC904	L3	L806	*L4	Q601	*C2	R125	*P5	R330	*N1	R480	*G2	R626	B1	R736	*E1	R907	*L3
C15	*A4	C228	M2	C403	J2	C513	*A1	C650	*C2	C803	M4	C1013	*G4	CL1010	*F4	IC105	P5	IC905	*F2	L901	*M3	Q602	*C2	R126	*P5	R331	P2	R481	*G2	R627	B1	R737	*E1	R911	F1
C16	*A4	C229	*L1	C404	J2	C514	*A2	C651	*C3	C804	*M4	C1014	*H4	CL1011	*F3	IC200	N4	IC906	*F1	L902	*M3	Q603	*C2	R127	*P4	R332	P2	R482	*G2	R628	D5	R738	*E1	R916	F1
C17	K6	C230	L2	C405	J1	C515	*A2	C652	C3	C805	M4	C1015	*H4	CL1013	*C5	IC201	*N3	IC907	M3	L903	M4	Q604	*C2	R128	*P5	R333	*N1	R501	*A2	R629	C5	R739	E1	R917	F1
C18	K5	C231	*L2	C406	J1	C516	A1	C653	C3	C806	*M4	C1016	*H4	CL1016	*F5	IC202	*P4	IC908	*F2	L904	*M3	Q605	J4	R129	*N5	R334	N2	R502	*A2	R630	C5	R740	E1	R920	*L3
C19	*J5	C232	L2	C407	J1	C517	A1	C654	K4	C807	N5	C1017	*H4	CL1017	*F5	IC203	*P3	IC909	*F1	L905	*M3	Q606	J4	R130	*N5	R335	*N1	R503	A2	R631	C5	R741	E1	R921	F1
C20	A4	C233	*L2	C408	*J2	C518	*A2	C655	K4	C808	M4	C1018	*H4	CL1019	*G4	IC204	P3	IC910	M3	L906	F1	Q607	J4	R131	*N5	R336	*P2	R504	A2	R632	*C5	R742	*E1	R922	F1
C21	A4	C234	L2	C409	*J2	C519	*A2	C656	*J4	C809	*N5	C1019	H4	CL1021	*F5	IC205	M2	IC911	*F1	L907	F3	Q608	*J4	R132	*N5	R337	*N2	R507	*A2	R633	*B4	R743	*E1	R923	L4
C22	A5	C235	*L2	C410	J2	C520	*A1	C657	*J4	C810	*N5	C1020	*H4	CL1022	*G4	IC206	M2	IC912	*F2	L1001	*H4	Q609	K4	R133	*N5	R338	*N2	R508	A2	R634	*B4	R744	*E1	R924	L3
C23	A5	C236	*L2	C411	J1	C521	*A2	C658	*J4	C811	M5	C1021	H4	CL1023	*G4	IC207	L2	IC1001	G3	L1002	*H3	Q610	*K4	R134	*N5	R339	*N1	R510	*A2	R635	*B4	R745	*E1	R927	*L3
C24	J5	C237	*L2	C412	J1	C522	*A2	C659	*J4	C812	M4	C1022	H4	CL1024	*F4	IC208	*L2	IC1002	H3	L1003	*G3	Q611	K4	R135	*N5	R340	*N1	R515	*B1	R636	B3	R746	E2	R928	E1
C25	H6	C238	*L2	C413	*J1	C523	*A1	C660	*J4	C813	N6	C1023	H4	CL1025	*F4	IC209	L2	IC1003	H4	L1004	*G3	Q612	J3	R136	*N5	R341	*N1	R516	*A1	R637	C3	R747	*F1	R929	E1
C26	F6	C239	*L2	C414	*J2	C524	*A2	C661	*K4	C814	*N5	C1024	H4	CL1026	*F3	IC210	L2	IC1004	H4	L1005	H4	Q613	J3	R137	*P5	R342	N2	R521	*B1	R638	B3	R748	*F1	R930	*F1
C27	G6	C240	*L1	C415	*K1	C525	*A2	C662	*K4	C815	N5	C1025	H4			IC211	L1	IC1005	H4	L1006	H4	Q614	J3	R138	*P5	R343	*P2	R523	*A2	R639	*C3	R749	*E2	R931	*F1
C28	A5	C241	L1	C416	*K1	C526	*A3	C663	*K3	C816	M4	C1026	H5	CN103	M6	IC300	N1	IC1006	H4	L1007	*F5	Q615	*J3	R139	*P5	R344	*P2	R524	*B1	R640	*C2	R750	*E2	R932	*L3
C29	A5	C242	L1	C417	*K2	C527	*B3	C664	*J3	C817	*M4	C1027	*G4	CN104	B6	IC301	*P2	IC1007	F4	L1008	G5	Q616	K3	R140	*P5	R345	*N2	R525	*A2	R641	*C1	R751	E2	R933	*M3
C30	J5	C243	*L1	C418	*K1	C528	A3	C665	*J4	C818	*M4	C1028	F5			IC302	*P1	IC1008	E4	L1009	*D3	Q617	*K3	R141	*P5	R346	*N2	R526	*A2	R642	*C2	R752	*E1	R934	*M3
C31	H6	C244	*L1	C419	*K2	C529	B3	C666	*J4	C819	*M4	C1029	*F3	CT500	A4	IC303	*P1	IC1009	E5	L1010	*E3	Q618	K3	R142	*P5	R348	M1	R527	*A2	R643	*C2	R753	*E2	R935	*M3
C32	F6	C245	*L2	C420	*K1	C530	*A3	C667	*J3	C820	*M4	C1030	F5			IC304	*N1	IC1010	H3	L1011	*E5	Q619	*C5	R143	*P5	R349	*M1	R528	A1	R644	*C3	R754	*E2	R936	*M3
C33	G6	C246	*L2	C421	*J2	C531	*A3	C668	*J3	C821	M4	C1031	*F5	D1	A5	IC305	*N2	IC1011	G5	L1012	*E3	Q701	*E2	R144	*P5	R350	P1	R529	A1	R645	*C2	R755	*F2	R937	*M3
C34	*J4	C247	*L1	C422	*J2	C532	*A3	C669	*J3	C822	M4	C1032	*F4	D2	A5	IC306	P1	IC1012	G5	L1013	*E5	Q702	*E2	R145	P4	R351	*P1	R530	*A1	R646	*C1	R756	*E2	R938	*M3
C35	*D6	C248	*L1	C423	*K2	C533	A3	C670	*K3	C823	M5	C1033	*D5	D3	J6	IC307	N2	IC1013	*F5			Q703	E2	R146	P4	R355	*M1	R531	*A1	R647	*C2	R757	*E1	R939	*F2
C36	J4	C249	*L1	C424	*K1	C534	*A3	C671	*B5	C824	M4	C1034	*E4	D4	H6	IC308	P1			LV505	A4	Q704	*E2	R147	*P5	R356	*N2	R532	*A1	R648	*C2	R758	F2	R940	*M4
C37	D5	C250	*L2	C425	*J1	C535	A3	C672	*C5	C825	*L4	C1035	*E5	D5	F6	IC309	N2	L1	*J4			Q705	*E2	R148	*P5	R357	*N2	R533	*A2	R649	J4	R759	*F1	R941	*M4
C38	A6	C251	*K2	C426	J1	C536	*A3	C673	*C5	C826	L4	C1036	*E5	D6	G6	IC310	P2	L2	K6	PS1	A6	Q706	*E1	R149	P5	R358	*N2	R534	*A2	R650	*J4	R760	*F2	R942	F2
C39	A6	C252	*M2	C427	J2	C537	A3	C674	*C5	C827	*L4	C1037	*E4	D101	*P6	IC400	K1	L3	K5	PS2	J6	Q707	*E1	R150	P5	R359	*M1	R535	*A1	R651	*J4	R761	F2	R943	*M4
C101	P5	C300	P2	C428	J1	C538	*A3	C675	*B5	C828	L4	C1038	*D3	D102	*N5	IC401	H2	L4	*A4	PS3	L5	Q708	*E1	R151	N5	R360	*M1	R536	A1	R652	J4	R762	*F2	R944	F1
C102	P6	C301	P1	C429	J2	C539	A3	C676	J3	C829	*L4	C1039	*E4	D103	*N5	IC402	J2	L5	*A4	PS4	H6	Q709	*E1	R201	*P4	R361	P1	R537	A1	R653	J4	R801	M4	R945	F1
C103	*P5	C302	P2	C430	J2	C540	A4	C677	K3	C830	*L4	C1040	*E5	D104	*N5	IC403	J1	L6	A6	PS5	A6	Q710	*E2	R202	*N3	R362	P1	R538	*A1	R654	J4	R802	*M4	R946	F2
C104	*P6	C303	P2	C431	*J2	C541	*A3	C701	E3	C831	L4	C1041	D3	D200	*N4	IC404	*J2	L7	*J4			Q711	*E2	R203	*P2	R363	P1	R539	*A3	R655	*J4	R803	*M4	R947	F2
C105	*P6	C304	N2	C432	*J1	C542	A3	C702	D3	C832	L4	C1042	*E4	D201	M1	IC405	G1	L8	*D6	Q101	*P6	Q712	*F2	R204	*P2	R368	*P1	R540	*A3	R656	J4	R804	*M4	R948	*M4
C106	*P6	C305	*P2	C433	*J1	C543	A3	C703	*F2	C833	*L4	C1043	*E5	D300	*P2	IC406	*H2	L101	*P5	Q102	*P6	Q713	F1	R205	M2	R369	*P1	R541	*A3	R657	*J4	R805	M4	R949	*M3
C107	P6	C306	P2	C434	*J2	C544	*A3	C704	E2	C834	L5	C1045	*E4	D301	*P2	IC407	*H2	L102	*P5	Q103	*P6	Q801	M4	R206	L2	R400	*K2	R542	*A3	R658	*J4	R806	N5	R950	F2
C108	P6	C307	*N2	C435	*J2	C545	A3	C705	E3	C835	L5	C1046	*E5	D302	*N2	IC408	H1	L103	*N5	Q104	*P6	Q802	*M4	R207	M2	R401	*J2	R543	*A3	R659	J4	R807	M5	R951	*F1
C109	P6	C308	*N2	C436	*K1	C546	*A3	C706	*F2	C836	*L4	C1047	*E3	D303	P1	IC409	H2	L200	P4	Q105	*P6	Q803	*M4	R208	M2	R402	*K2	R544	*A3	R660	K4	R808	*N5	R952	F2
C110	P5	C309	*P2	C437	*K2	C547	*A3	C707	*D1	C837	*L4	C1048	*D4	D304	P1	IC410	*H1	L201	*M1	Q106	*P5	Q804	*M4	R209	*L1	R403	*K1	R545	*A3	R661	K4	R809	*N5	R953	*F1
C111	N5	C310	*P2	C438	*J2	C548	*A4	C708	*D2	C838	L5	C1049	*E3	D306	*N2	IC411	G2	L202	*L2	Q107	*P5	Q805	M4	R210	*L1	R404	*K1	R546	*A3	R662	K4	R810	*N5	R954	F2
C112	*P5	C311	*P2	C439	*G2	C549	*A4	C709	E2	C839	L4	C1050	*E4	D400	*J2	IC412	G1	L203	*L2	Q108	*P5	Q806	L4	R211	*L2	R405	*K1	R547	*A3	R663	*K4	R811	N5	R955	*M3
C113	*N5	C312	*P2	C440	H1	C550	A3	C710	*D1	C840	*L4	C1051	*E4	D401	*J2	IC413	G1	L204	*L1	Q109	*P5	Q807	L4	R212	*M2	R406	*K2	R548	*A3	R664	*K4	R812	N5	R956	G1
C114	N6	C313	P2	C441	H1	C551	*A4	C711	*D2	C841	*L4	C1052	*D4	D402	*J1	IC414	*G2	L205	*L1	Q110	*P4	Q808	L4	R213	*L1	R407	*K1	R549	*A3	R665	*K4	R813	M5	R957	F2
C115	P5	C314	N2	C442	H2	C552	*A4	C712	*D2	C842	L5	C1053	E3	D403	*H2	IC415	*G2	L206	*L1	Q111	*N5	Q809	K4	R214	*L1	R408	*K2	R550	*A3	R666	J4	R814	M5	R958	*M4
C116	*P5	C315	*M2	C443	H1	C553	*A4	C713	*D2	C843	L4	C1054	*E4	D404	*H1	IC416	*G2	L301	*P2	Q112	*N5	Q810	L4	R215	*L1	R409	*K1	R551	*A3	R667	*J3	R815	N5	R959	*M4
C117	*P5	C316	N2	C444	*G1	C554	A4	C714	*F2	C844	*L4	C1055	*D4	D501	*A1	IC500	A2	L302	*P2	Q113	*P5	Q811	L4	R216	*L1	R410	*J2	R552	*A3	R668	*J4	R816	N5	R960	F2
C118	*P5	C317	M2	C445	*H2	C555	*A4	C715	*D1	C901	M5	C1056	*E5	D502	*A3	IC503	A2	L303	M2	Q114	*P5	Q903	*L3	R217	L1	R411	*K2	R553	*A4	R669	J3	R817	*M4	R961	*F2
C119	*P5	C318	*P2	C446	H1	C601	*D5	C716	*D2	C902	L3	C1057	*E5	D503	*A1	IC504	B1	L304	M2	Q115	*P5	Q905	*L3	R218	*L2	R412	*J2	R554	*A3	R670	J3	R818	*M4	R962	F2
C120	P5	C319	*N2	C447	*H1	C602	*B5	C717	*D2	C903	M5	C1058	E5	D601	*C5	IC505	A1	L305	*P2	Q116	*P4	Q906	*M3	R219	*L2	R413	*J2	R555	*A4	R671	J3	R819	*M4	R963	F2
C121	*P5	C320	*N2	C448	H2	C603	*D5	C718	*D2	C905	F1	C1059	E3	D801	*M4	IC508	B1	L306	*P2	Q200	M2	Q907	M4	R220	*L1	R414	*J2	R556	*A3	R672	*J4	R820	*M4	R964	F2
C122	*P5	C321	*P2	C449	*H1	C604	*D5	C719	F2	C908	L3	C1060	E5	D802	L5	IC509	A2	L307	*N2	Q201	*L2	Q908	*M3	R221	*L2	R415	*J2	R557	A3	R673	J3	R821	*M4	R965	M6
C123	N5	C322	P2	C450	*H1	C605	*D5	C720	E2	C910	*L3	C1061	*E3	D900	M6	IC510	A1	L308	*M1	Q202	*L2	Q909	*M4	R222	*L2	R416	*J2	R558	*A3	R674	*J3	R822	*M4	R966	M6
C124	*N5	C323	*N2	C451	*H1	C606	A5	C721	*D2	C911	*M3	C1062	*E5	D901	M5	IC511	A1	L309	*P1	Q203	*L1	Q1001	*F3	R223	*L1	R417	*K2	R559	*A3	R675	*J3	R823	*M4	R967	M6
C125	*N5	C324	*N2	C452	*H1	C607	D5	C722	*D2	C912	F1	C1063	G4	D1000	F3	IC512	A1	L310	*P1	Q300	*P1	Q1002	G3	R224	*L2	R418	*K1	R560	*A3	R676	J3	R824	*M4	R968	M6
C126	N5	C325	P1	C453	*H1	C608	*A5	C723	D1	C913	F1	C1064	*G3	D1001	H5	IC513	A2	L311	*N2	Q301	*P1	Q1003	G5	R225	*L2	R419	*J2	R561	*A3	R677	K3	R825	*M4	R1001	*F3
C127	N5	C326	M1	C455	*H2	C609	C5	C724	D2	C914	M3	C1065	*G3	D1002	G5	IC514	A1	L312	*N1	Q302	*P2	Q1004	G5	R226	*L1	R420	*K1	R562	*A3	R678	K3	R826	*M4	R1002	*F3
C128	*P5	C327	*N1	C456	H2	C610	*A5	C725	*E2	C915	*F2	C1066	F5	D1003	G5	IC515	A2	L313	*N2	Q303	*P2	Q1005	*E4	R227	*K2	R421	*K1	R563	*A3	R679	K3	R827	*M4	R1003	*F3
C129	*P5	C328	P1	C458	H2	C611	C5	C726	*E2	C916	F2	C1067	H3			IC516	A2	L400	*J2	Q304	*P2	Q1006	*E4	R228	*K2	R422	*K2	R564	*A3	R680	*K3	R828	*M4	R1004	*G3
C130	*P5	C329	*M1	C459	H2	C612	*B4	C727	*D1	C917	*M3	C1068	H3	E1	N3	IC517	A2	L401	*J1	Q305	*P2	Q1007	*D4	R229	*K2	R423	*K2	R565	*A3	R681	*K3	R829	M4	R1005	*G3
C131	P4	C330	M1	C460	H2	C613	*B5	C728	*E2	C918	F2	C1069	H3	E2	M1	IC518	A2	L402	*J2	Q306	*P2	Q1008	*E5	R230	*K1	R424	*K1	R566	*A3	R682	*K3	R830	*M5	R1006	*G3
C132	P4	C331	*M2	C461	*H2	C614	C5	C729	*D2	C919	*M3	C1070	*E4	E3	E1	IC519	A1	L403	*G1	Q307	*N2	Q1009	G5	R231	*K1	R425	*K1	R567	*A4	R683	*B5	R831	*M5	R1007	*H3
C133	N5	C332	N2	C462	*H2	C615	*C4	C730	E2	C920	F2	C1071	H5	E4	A5	IC520	A1	L500	*A3	Q308	*P2	Q1010	H5	R232	*K1	R426	*J2	R568	*A3	R701	*D2	R832	L4	R1008	*G4
C134	P5	C333	*P1	C463	*H2	C616	D5	C731	D2	C921	*M3	C1072	H5	E5	D5	IC522	A2	L501	*B3	Q309	*P2	Q1011	G5	R233	*K2	R427	*J1	R569	*A4	R702	*F2	R833	L4	R1009	*G4
C135	*N5	C334	*P1	C464	*H2	C617	C5	C732	E2	C922	*M3	C1073	G5	E6	H3	IC523	*A3	L502	*A3	Q310	*N2			R234	*P3	R428	*J1	R570	*A4	R703	*D2	R834	L4	R1010	*G4
C136	*P5	C335	N2	C465	*H2	C618	*B4	C733	D2	C923	F1	C1074	G5	E7	*D4	IC524	A3	L503	*A3	Q311	*P1	R1	*J5	R235	*P3	R429	*J1	R571	*A4	R704	*D2	R835	*L4	R1011	*G4
C137	*N5	C336	N2	C466	H1	C619	C4	C734	E2	C924	M3	C1075	G5	E8	*H5	IC525	A3	L504	*A3	Q312	*P2	R2	*J5	R300	*P1	R430	*J2	R572	*A4	R705	*D2	R836	*L4	R1012	G5
C138	P5	C337	N1	C467	*H2	C620	C5	C735	*E1	C925	*F1	C1076	G5	E9	*L3	IC526	A4	L506	*A4	Q313	*N1	R3	J5	R301	*P2	R431	*J1	R573	*A4	R706	E2	R837	L4	R1013	*H4
C139	N5	C338	P2	C468	*H2	C621	*C5	C736	E2	C926	*M3	C1077	G5	E10	*P5	IC601	*D5	L601	*C4	Q315	*N2	R4	J5	R302	*P2	R432	J2	R574	*A4	R707	D1	R838	L4	R1014	*G4
C140	*N5	C339	*N1	C470	*H2	C622	*B5	C737	*E1	C927	F2	C1078	G5			IC602	B5	L602	C5	Q400	*K2	R6	J4	R303	*P2	R433	J2	R575	*A4	R708	D1	R839	L4	R1015	*G4
C200	*P4	C340	P2	C471	*G1	C623	C5	C738	*D1	C928	*M4	C1079	H4	FB200	P4	IC603	A5	L603	*B5	Q401	*K2	R7	J5	R304	*P2	R434	*J1	R576	*A4	R709	C1	R840	K4	R1016	G5
C201	P4	C341	*P2	C472	G2	C624	*B5	C739	E1	C929	*G2			FB400	*H2	IC604	C5	L604	*B4	Q402	*K1	R8	*D6	R305	*P2	R435	*J1	R601	*D5	R710	C1	R841	L4	R1017	*H4
C202	*N4	C342	*M1	C473	*G1	C625	C5	C740	E1	C930	*F2	CL1	*K4			IC608	C4	L605	*B5	Q403	*K2	R101	*P6	R306	*N2	R436	*J1	R602	*B5	R712	D2	R842	L4	R1018	*H4
C203	*N4	C343	*N2	C474	*G2	C626	B5	C741	E1	C931	F2	CL2	*K4	FL1	K4	IC609	B2	L606	C1	Q404	*K1	R102	*P6	R307	*N2	R437	*J1	R603	*D5	R713	D2	R843	L4	R1019	*H4
C204	P4	C344	N1	C475	G1	C627	*B4	C742	E1	C932	*M3	CL3	*K5	FL2	K5	IC610	*C3	L607	C3	Q405	*J2	R103	P6	R308	*N2	R438	*J2	R604	*C5	R714	D2	R844	L4	R1020	*G4
C205	*P4	C345	P2	C476	*H1	C628	*B5	C743	E1	C933	M3	CL4	*K5	FL100	P5	IC611	K3	L608	C3	Q406	*J2	R104	*P6	R309	*P2	R439	J2	R605	*D5	R715	D2	R845	*L4	R1021	*G4
C206	*P4	C346	N1	C477	*H1	C629	*C5	C744	E2	C934	F2	CL7	*M6	FL200	K2	IC612	*C5	L609	K4	Q407	*J2	R105	P6	R310	*P2	R440	*J2	R606	*C5	R716	*F2	R846	*L4	R1022	H4
C207	*P4	C347	*N2	C478	G1	C630	*B5	C745	E1	C935	*F2	CL8	*H5	FL201	K2	IC701	D1	L610	*J4	Q408	*K2	R106	*P6	R311	*P2	R441	*J2	R607	D5	R717	*D2	R847	L4	R1023	*H4
C208	N4	C348	*N1	C479	H1	C631	*C5	C746	E1	C936	F2	CL9	*C5	FL202	K1	IC702	D2	L611	J3	Q409	*K2	R107	*P6	R312	*P2	R442	*J2	R608	*D5	R718	D1	R848	*L4	R1024	*H4
C209	N4	C349	*N2	C480	*G2	C632	*B5	C747	E1	C937	F2	CL10	*C5	FL601	C3	IC703	*E2	L612	K4	Q410	*K1	R108	*P6	R313	*P2	R443	*J2	R609	*D5	R719	*D2	R849	*L4	R1025	H4
C210	N4	C351	*N2	C481	*G2	C633	B4	C748	E1	C938	F1	CL301	*N1	FL602	C2	IC704	D2	L613	*J3	Q411	*K1	R109	*P6	R314	*N2	R444	H1	R610	*D5	R720	D1	R850	L5	R1026	H4
C211	N4	C352	*M2	C482	*G1	C634	B5	C749	*E1	C939	F2	CL503	*A2	FL603	C1	IC705	D1	L701	E2	Q412	*J2	R110	*P6	R315	*P2	R445	H1	R611	B1	R721	D2	R851	*L4	R1027	*G4
C212	P4	C354	*N1	C483	*J2	C635	C4	C750	*E1	C940	*F1	CL508	*B1	FL701	E2	IC706	D2	L702	E3	Q413	*K1	R111	*P6	R316	*N2	R446	*H2	R612	A1	R722	D2	R852	L4	R1028	*G4

R1030	*G4	RV604	J4
R1035	*G4	RV605	K4
R1039	*E4	RV606	J3
R1040	*E5	RV607	K3
R1041	*E4	RV701	D1
R1042	*E4	RV702	C1
R1043	*E4	RV703	D1
R1044	*E5	RV704	D1
R1045	*E4	RV705	D2
R1046	*E4	RV801	M4
R1047	*E5	RV802	N5
R1048	*E5	RV803	M4
R1049	*E4	RV804	L4
R1050	*E4	RV805	L4
R1051	*E3	RV806	L4
R1052	*D4	RV901	L3
R1053	*D4	RV902	F1
R1054	*E5	RV903	F1
R1055	*E3	RV904	L3
R1056	*E5	RV905	E1
R1057	*E4	RV906	M3
R1058	*D4	RV1001	G4
R1065	*E5	RV1002	G4
R1066	*E5		
R1067	*E5	S200	M1
R1068	*E5		
R1069	*G4	THP200	L1
R1070	*E4	THP701	E2
R1071	*E4	THP901	F1
R1080	*G3		
R1081	*F5	TP100	P6
R1082	*E4	TP200	N5
R1083	*E4	TP300	P2
R1084	*F3	TP301	P2
R1085	*F3	TP302	N1
R1086	*G4	TP303	L1
R1087	*G5	TP304	L1
R1088	*G5	TP400	H2
R1090	H3	TP401	H1
R1091	H3	TP402	H2
R1092	H3	TP500	A3
R1093	H5	TP601	D3
R1094	G5	TP602	D2
R1095	G5	TP603	D1
R1096	G5	TP1001	G4
R1097	G5	TP1002	H4
R1098	G5	TP1003	H4
R1099	G5	TP1004	G4
R1100	G6		
		X300	*M2
RB4	*K4	X301	*P2
RB5	*K5	X601	B5
RB6	*K5	X602	*C5
RB7	*K5	X603	*C5
RB201	*P2	X1001	*H4
RB202	*P3	X1002	*H4
RB203	*P3		
RB204	*P2	*:B SIDE	
RB205	*P2		
RB206	M2		
RB207	*M2		
RB301	*M2		
RB401	*G2		
RB402	*G2		
RB403	*G2		
RB404	*G1		
RB405	*G1		
RB1001	*D5		
RB1002	*D5		

RV101	P6
RV102	P5
RV103	P5
RV200	L1
RV201	L1
RV202	M1
RV300	P2
RV400	J2
RV401	K1
RV402	K2
RV403	J2
RV404	K1
RV405	K1
RV406	K1
RV407	K2
RV408	K2
RV409	K2
RV500	A1
RV501	A4
RV601	A1
RV602	B1
RV603	B1

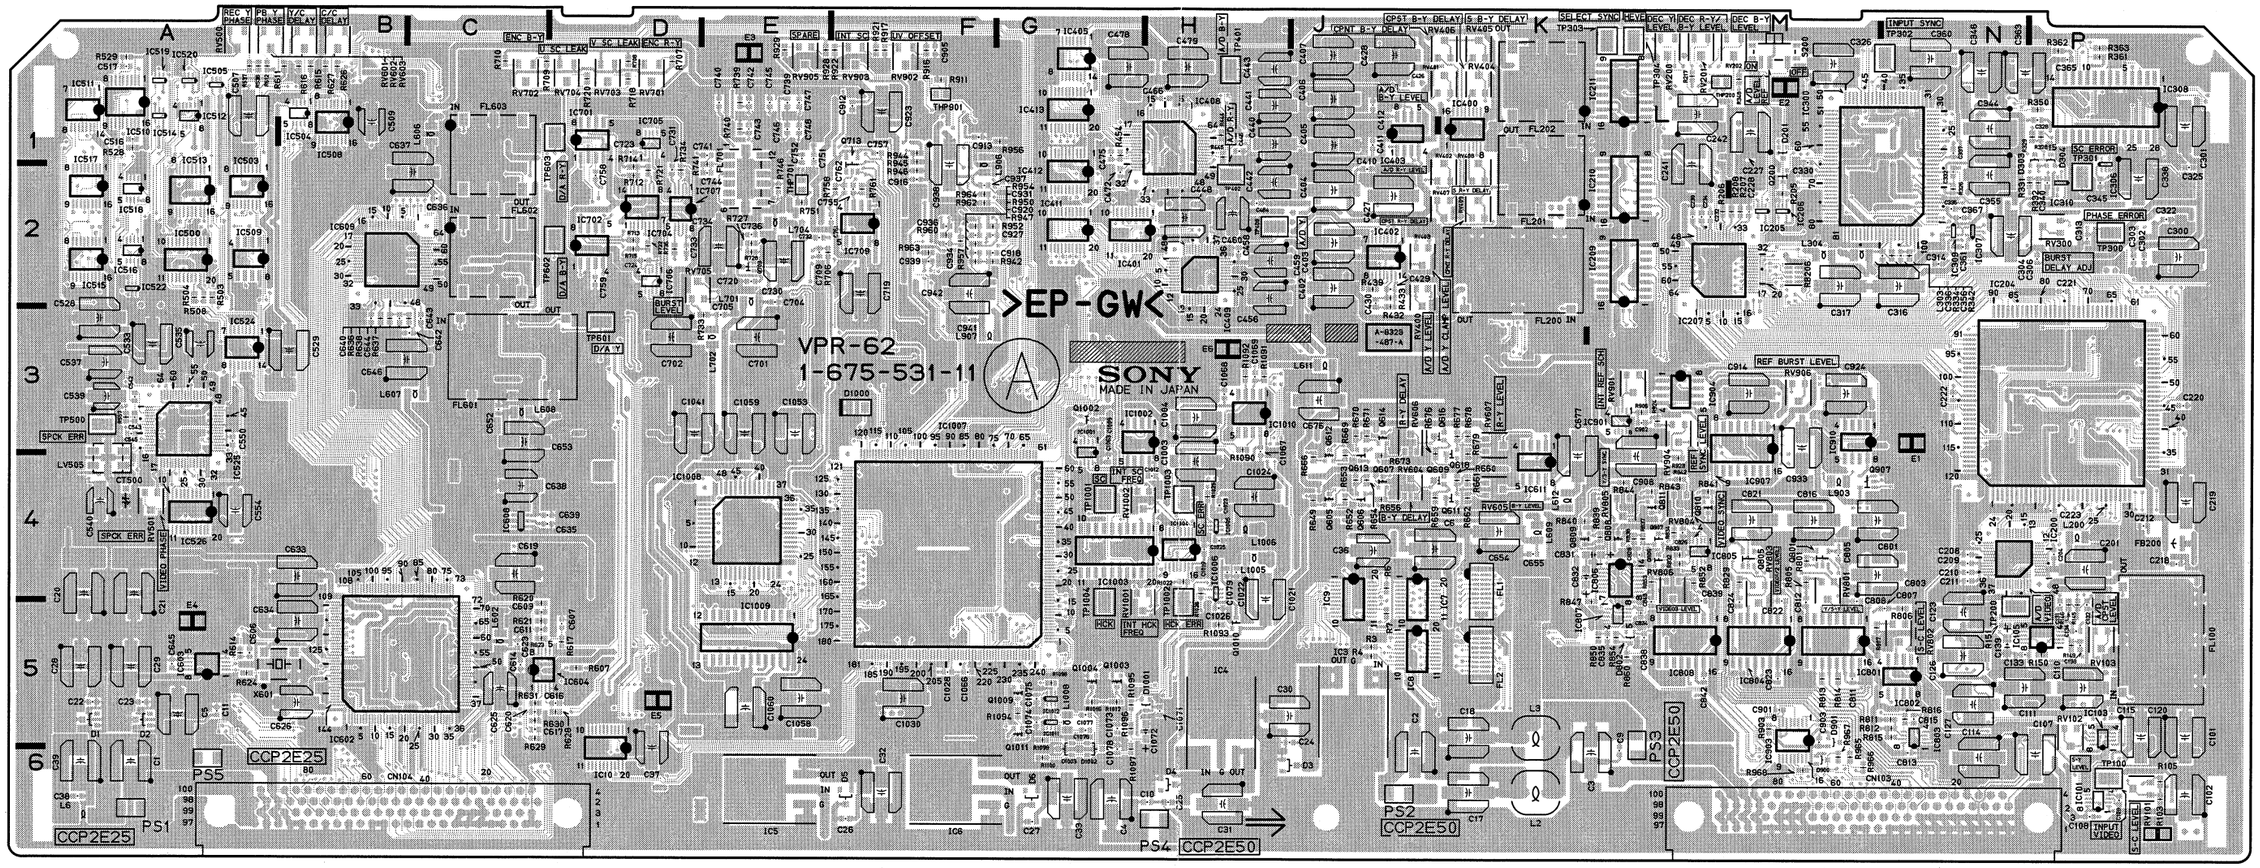

VPR-62/62P -A SIDE-
SUFFIX: -11

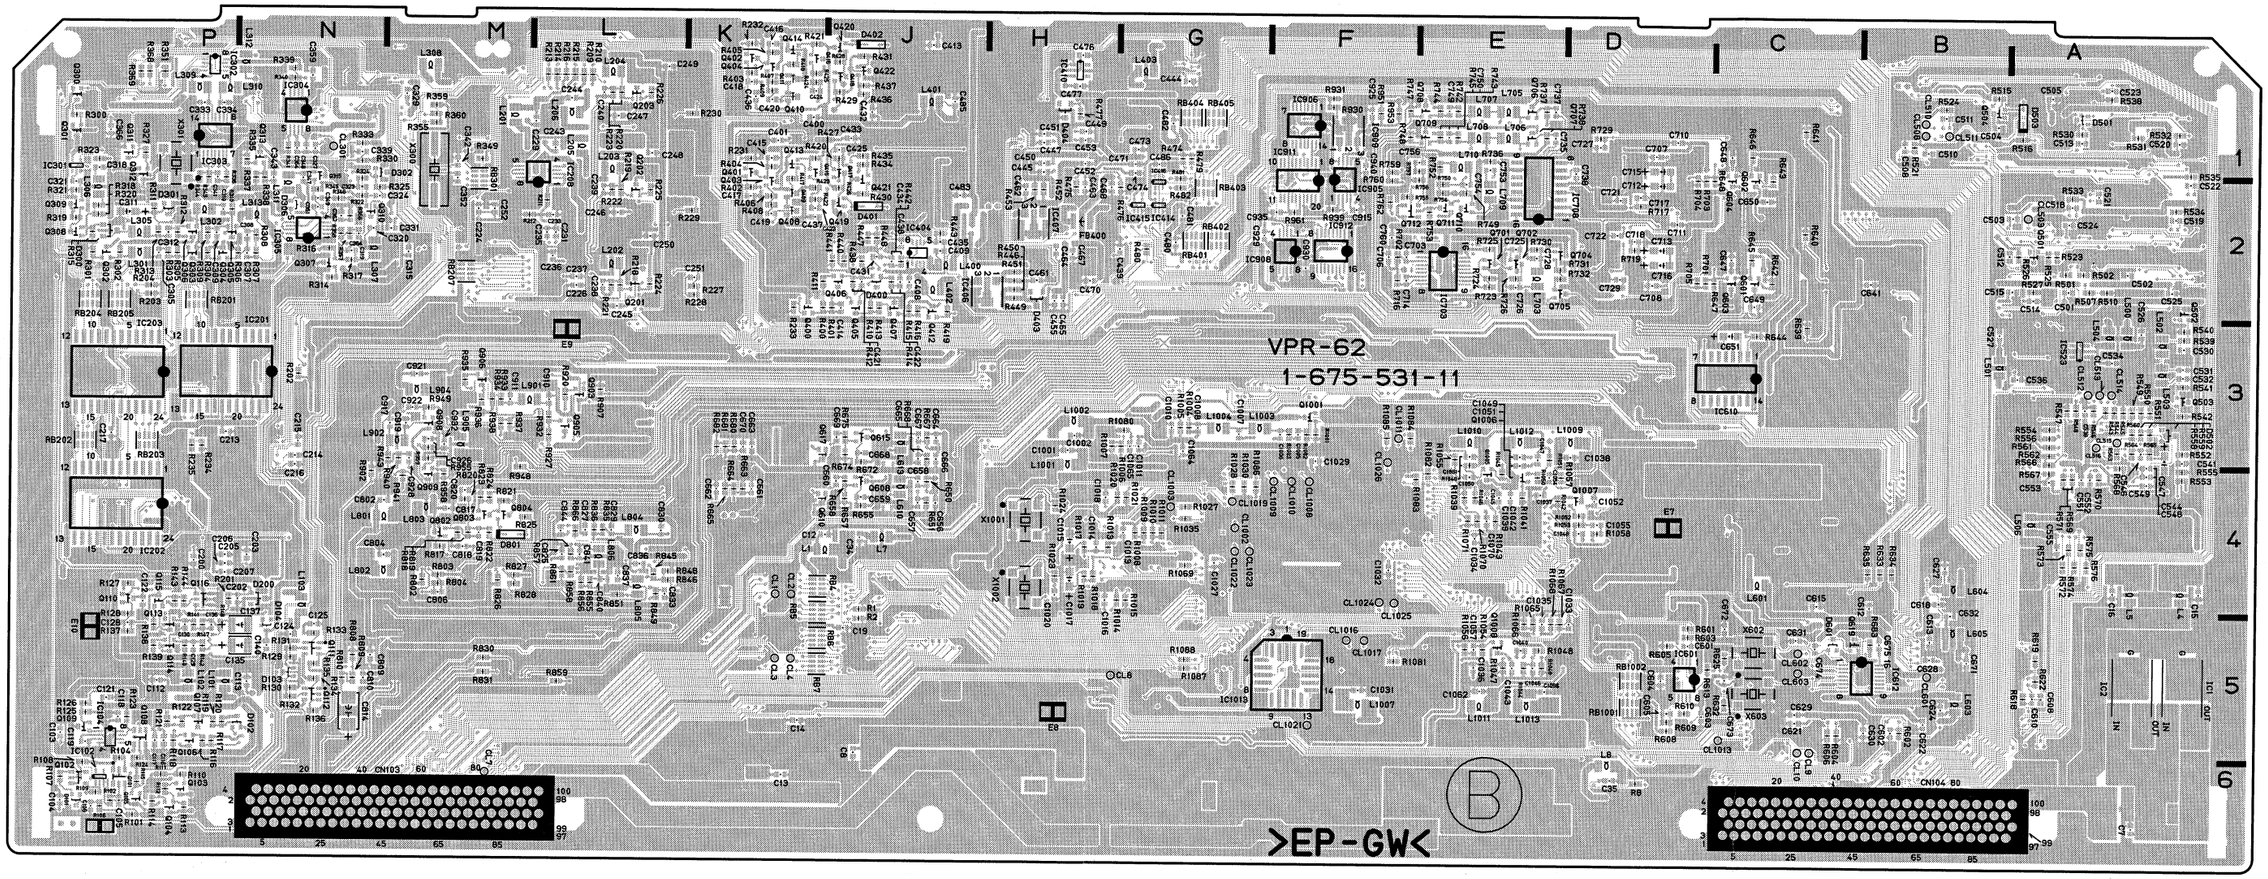

VPR-62/62P -B SIDE-
SUFFIX: -11

VR-259, VR-260

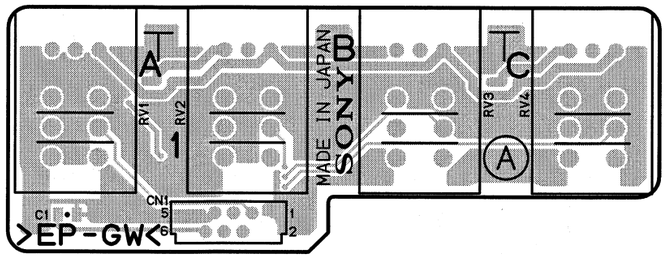

VR-259 -A SIDE-
SUFFIX: -13

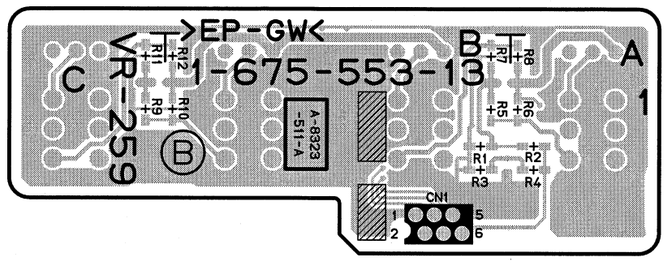

VR-259 -B SIDE-
SUFFIX: -13

VR-259 (1-675-553-13)

C1	A1
CN1	A1
R1	*A1
R2	*A1
R3	*A1
R4	*A1
R5	*A1
R6	*A1
R7	*A1
R8	*A1
R9	*A1
R10	*A1
R11	*A1
R12	*A1
RV1	A1
RV2	A1
RV3	A1
RV4	A1

*:B SIDE

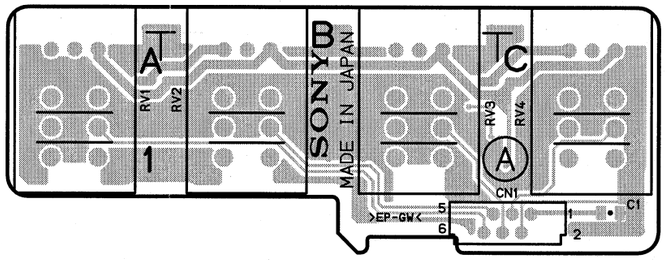

VR-260 -A SIDE-
SUFFIX: -13

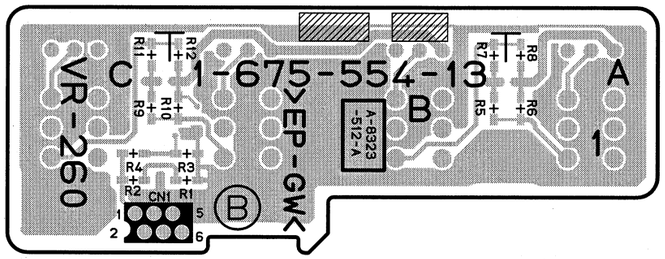

VR-260 -B SIDE-
SUFFIX: -13

VR-260 (1-675-554-13)

C1	A1
CN1	A1
R1	*A1
R2	*A1
R3	*A1
R4	*A1
R5	*A1
R6	*A1
R7	*A1
R8	*A1
R9	*A1
R10	*A1
R11	*A1
R12	*A1
RV1	A1
RV2	A1
RV3	A1
RV4	A1

*:B SIDE

14-54 (b)

Section 15
Schematic Diagrams

Index

Board Name	Circuit Configuration	Page
APR-45	Audio process	15-2
CC-83	Cassette compartment mode detection/intermediate board	15-32
CC-84	Cassette compartment cassette type detection	15-32
CC-85	Cassette compartment cassette in detection	15-32
CN-1863	Sensor input/output board	15-33
CN-1968	i.LINK connector board (Option: DSBK-190)	15-33
CN-2021	Intermediate board between CC-84 and CC-83	15-174
CN-2022	Intermediate board between CC-85 and CC-84	15-174
CP-341	Video/remote interface	15-34
CP-342/342A	Audio interface	15-36
DPR-136	Digital process	15-38
DU-83	Digital process	15-55
DU-84	Digital process	15-62
DU-89	Digital process	15-65
DU-95	SDI character generator	15-68
DY-15	Fluorescent display board/audio meter/input • output selection	15-69
EX-752	Intermediate board	15-71
FU-78P	Digital process (PB)	15-73
FU-78R	Digital process (REC)	15-73
HP-99	Headphone interface	15-78
IF-763	i.LINK interface board (Option: DSBK-190)	15-79
IF-778	Operation panel intermediate board (Option: DSBK-200)	15-84
KY-452	Operation panel	15-85
KY-452A	Operation panel board (Option: DSBK-200)	15-89
MB-859	Mother board	15-93
MS-64	Servo/mechanism control	15-104
PTC-100	Search dial sensor	15-105
RP-111	RF REC/PB, ATF detection	15-106
SE-521	Mode sensor/tape end sensor/loading motor FG sensor	15-125
SE-522	Tape top sensor/reel position sensor (Mini/M/Standard)	15-125
SE-525	LED signal board	15-125
SE-538	Tension sensor	15-125
SV-212	Servo/mechanism control	15-126
SW-11/11P	Switch	15-138
SW-17	Remote switch	15-141
SY-278	System control	15-142
VPR-62/62P	Analog video input • output process/reference	15-151
VR-259	Audio PB volume control	15-169
VR-260	Audio REC volume control	15-169
Frame Wiring	—	15-170

APR-45 (1/17)

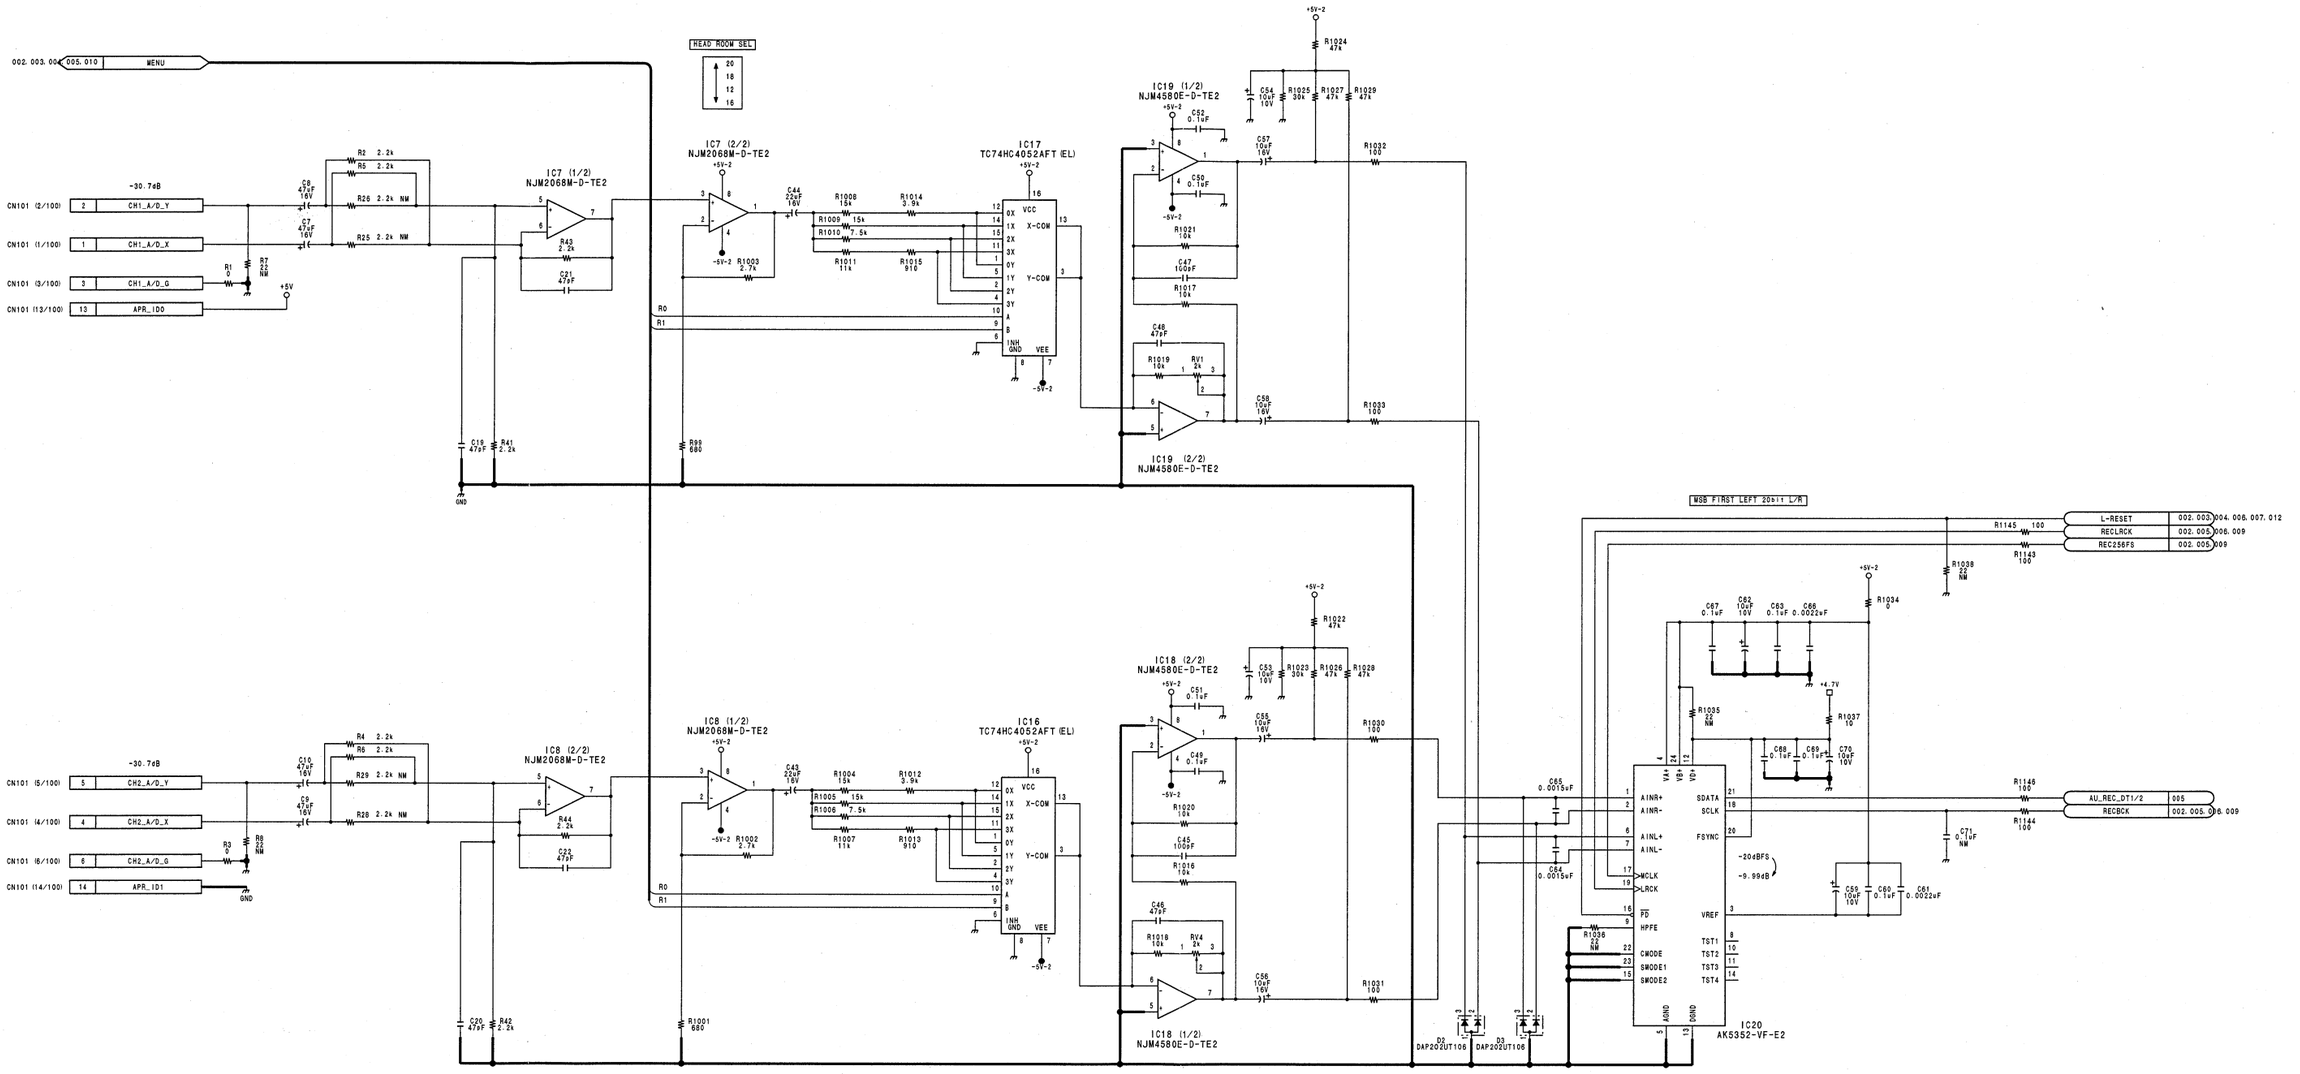

Audio process

APR-45 (1/17)

BOARD NO. 1-675-517-14

LOT NO. 134-

DSR-2000_APR-45_014_1

APR-45 (2/17)

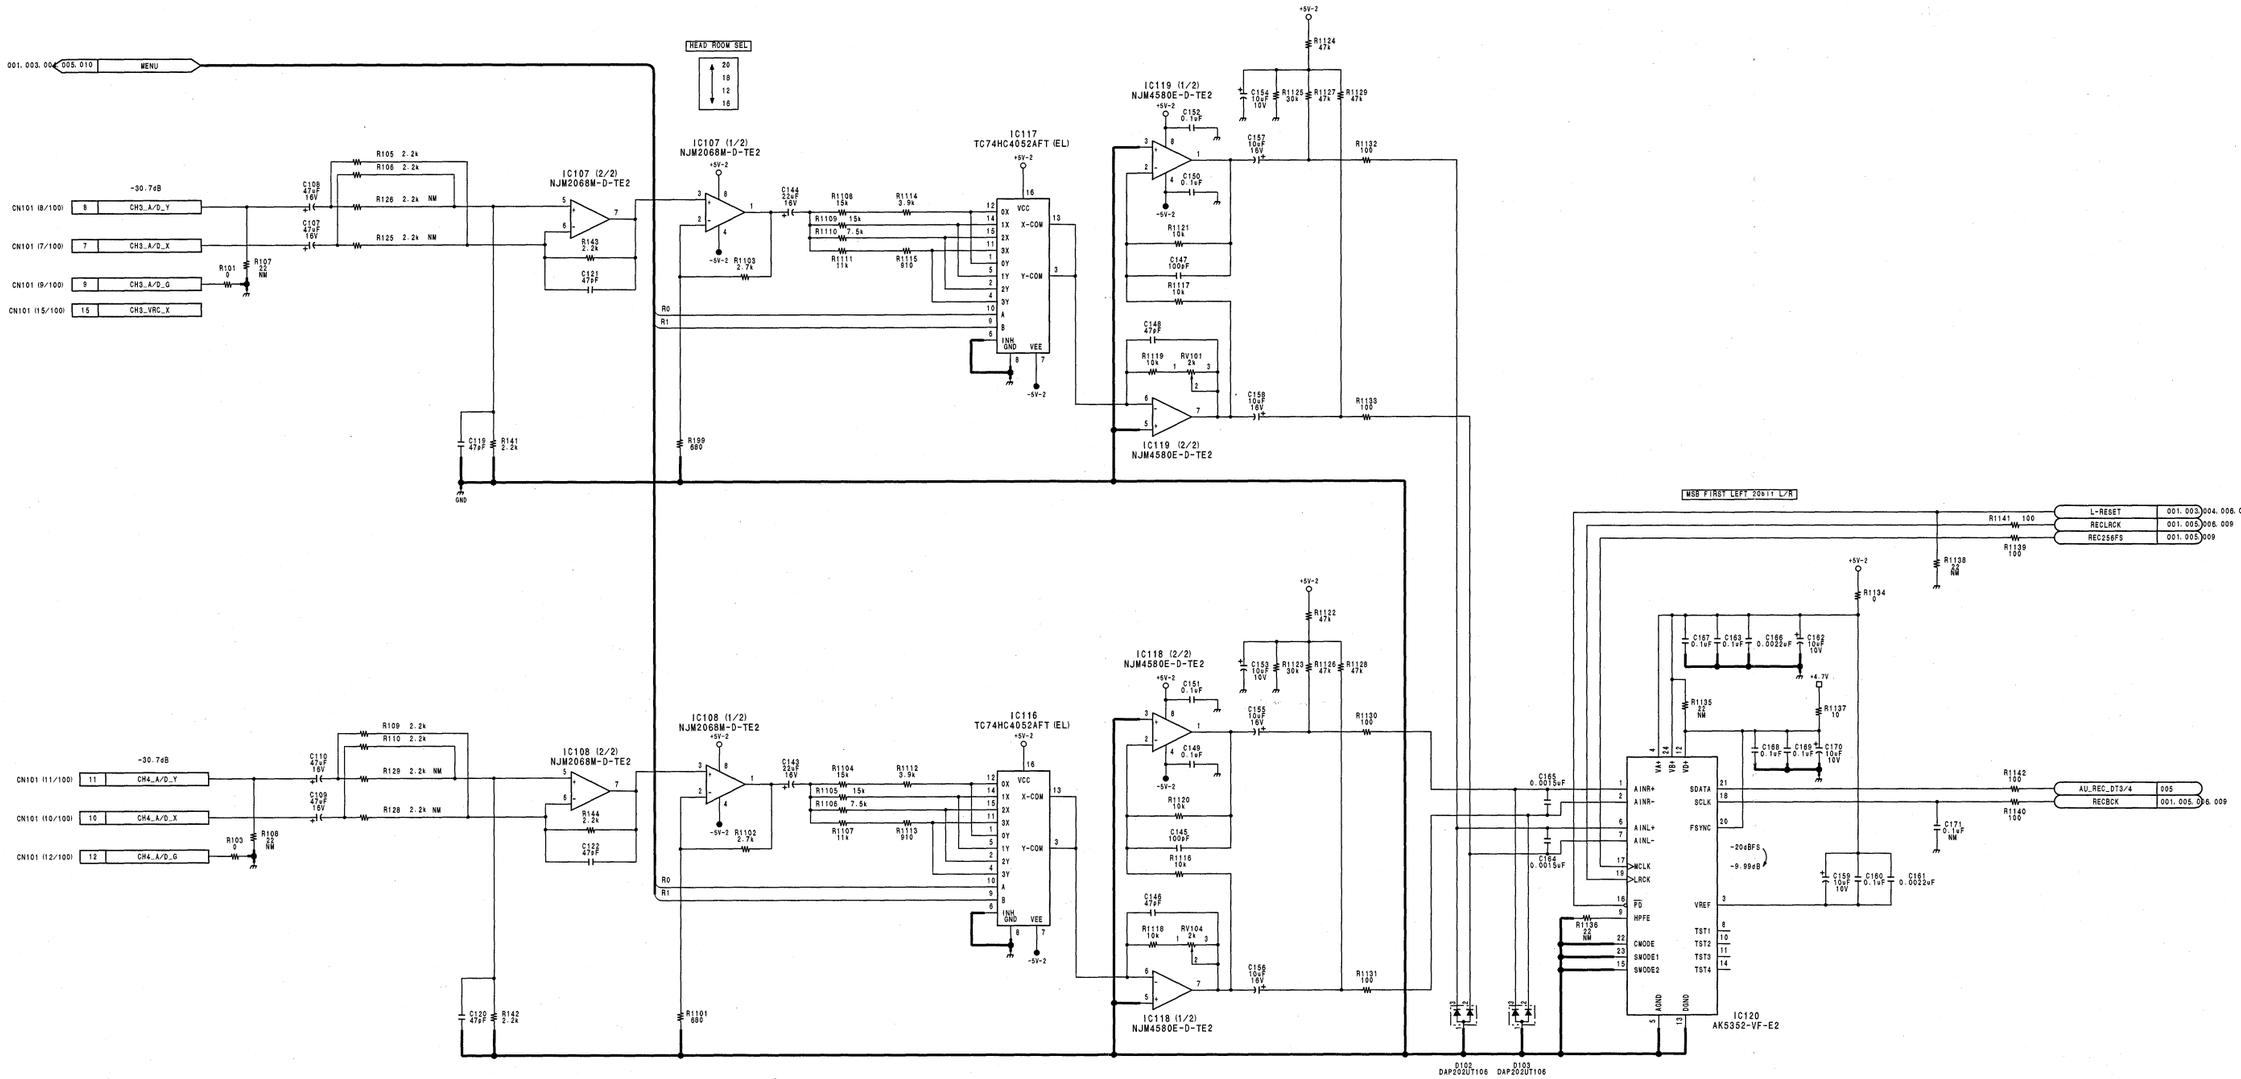

Audio process

APR-45 (2/17)

BOARD NO. 1-675-517-14
LOT NO. 134-
DSR-2000_APR-45_014_2

APR-45 (3/17)

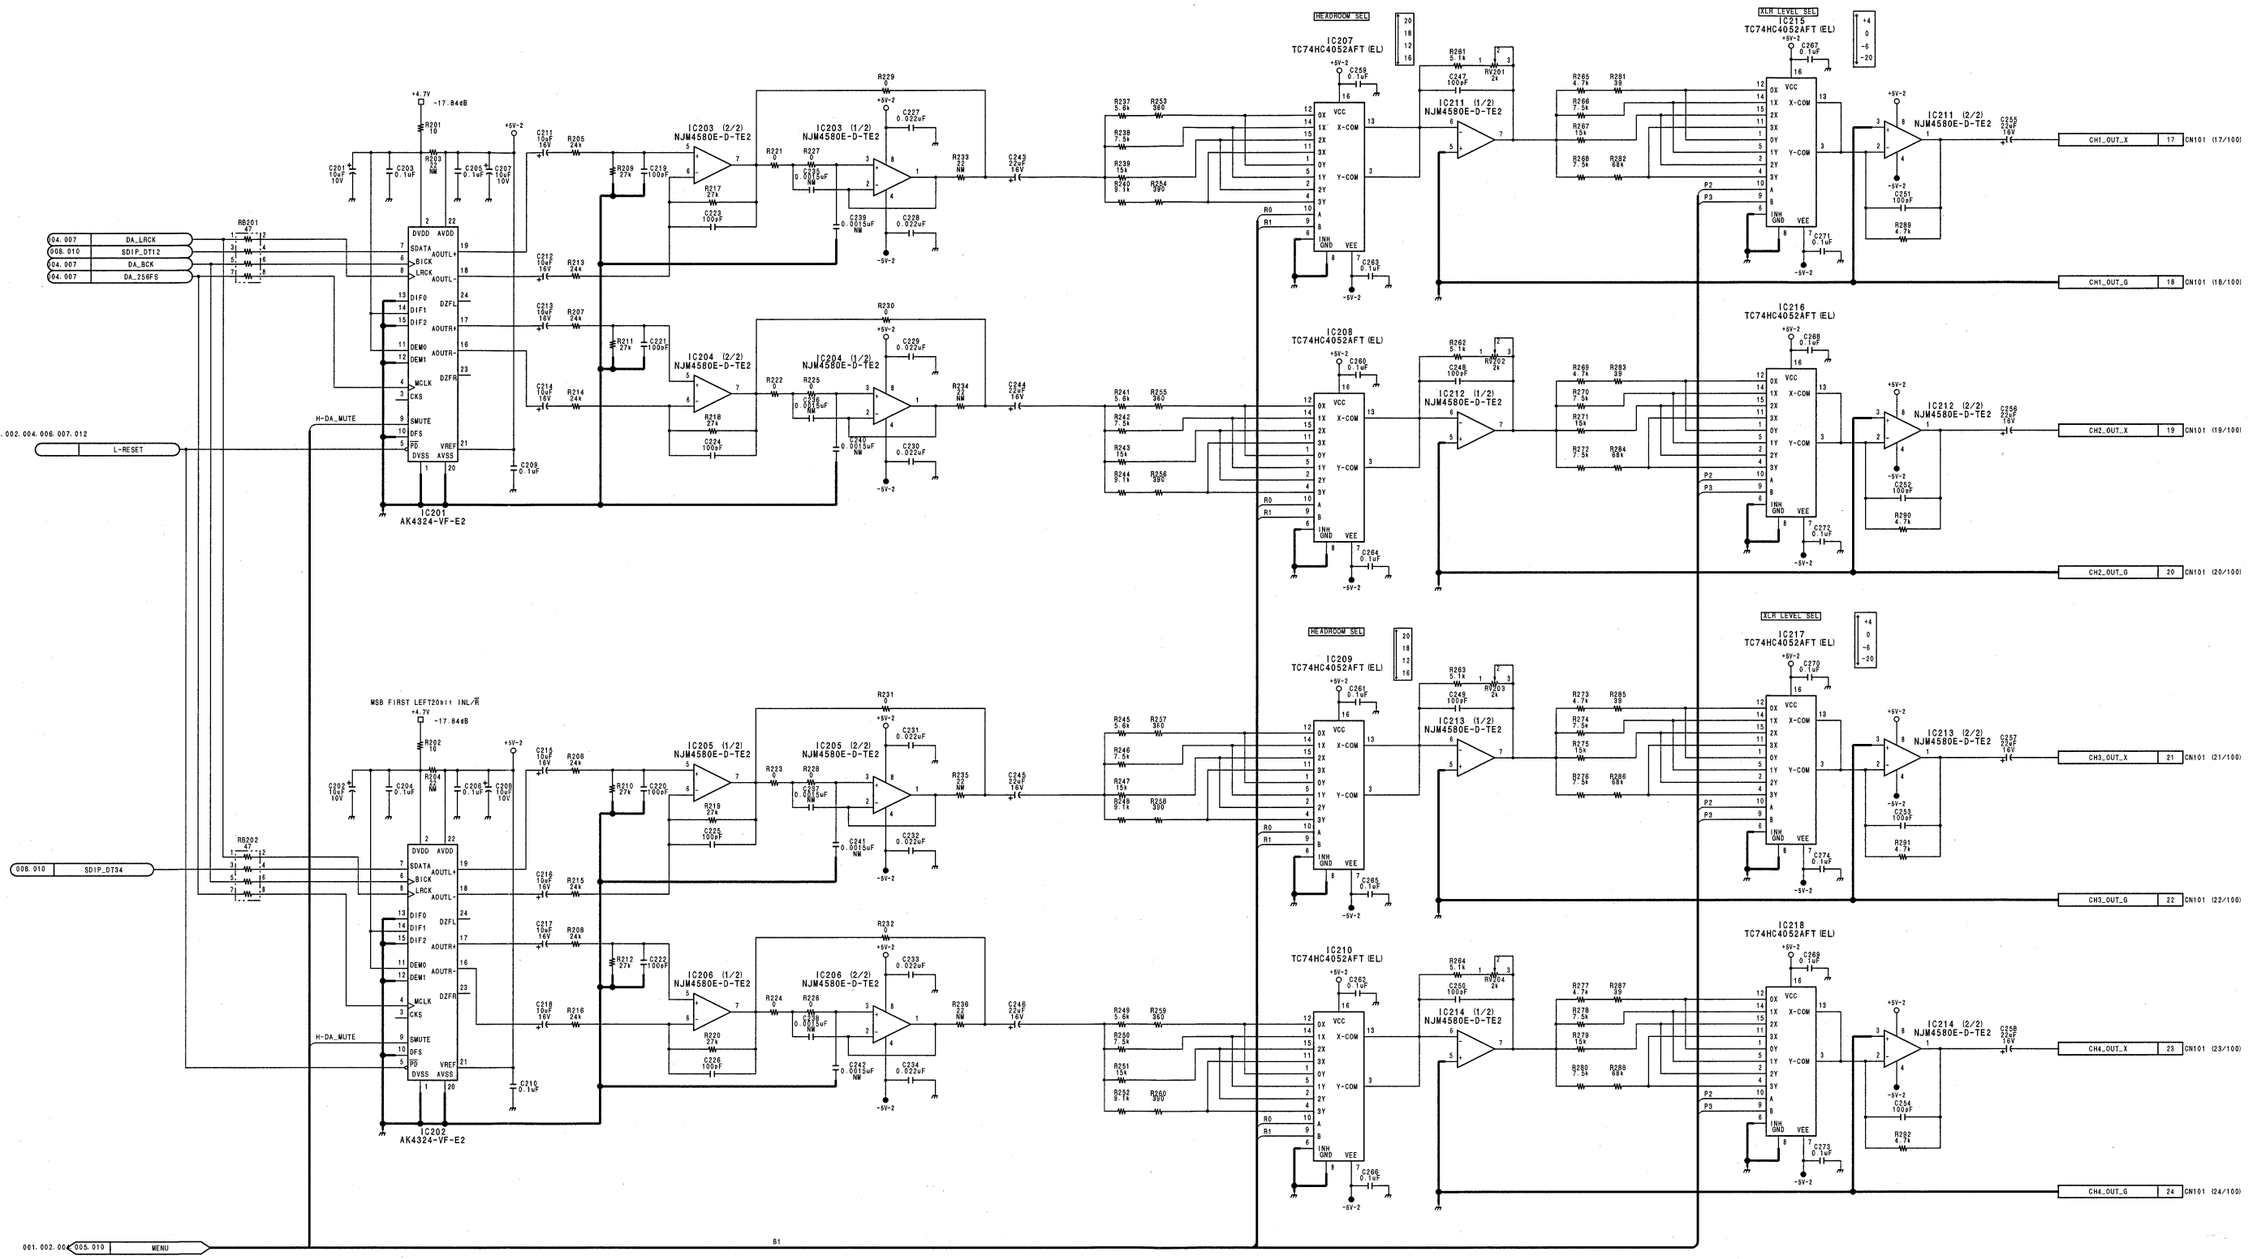

E201 E202

Audio process

APR-45 (3/17)

BOARD NO. 1-675-517-14

LOT NO. 134-

DSR-2000_APR-45_014_3

APR-45 (4/17)

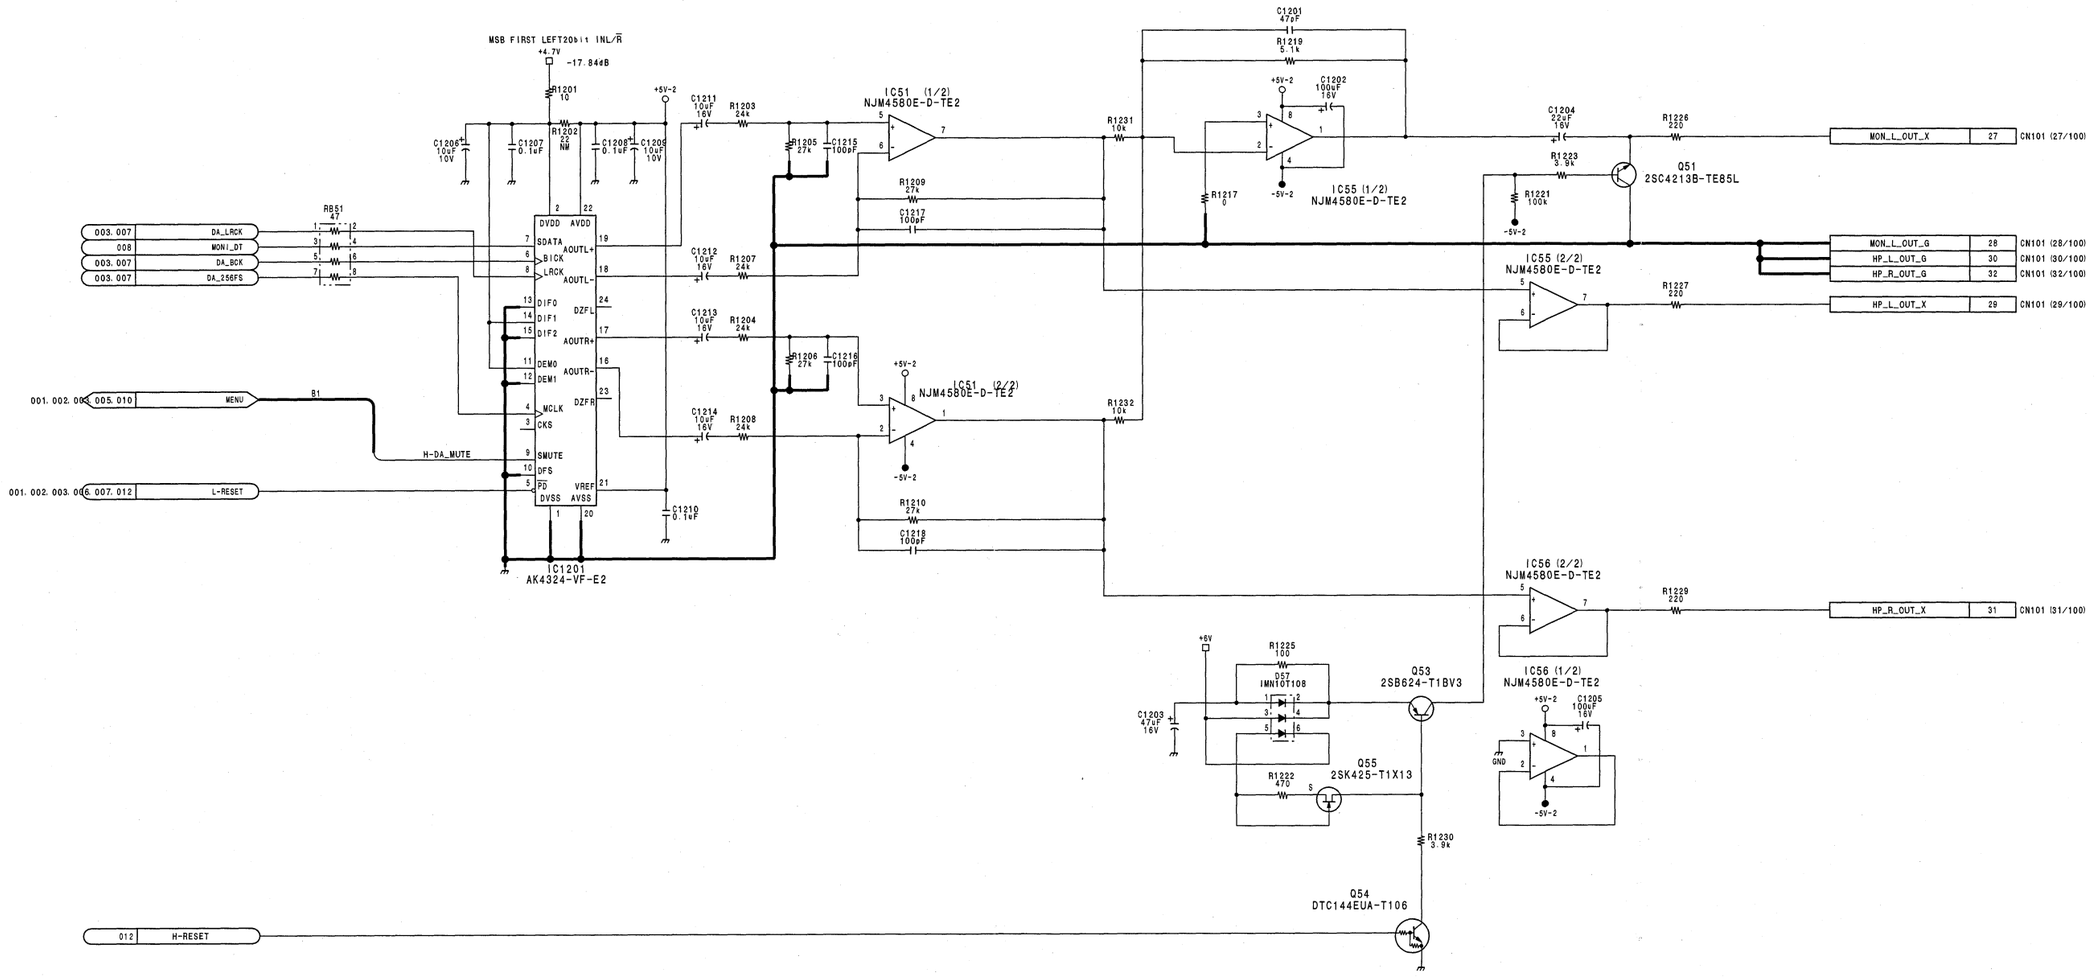

Audio process

APR-45 (4/17)

BOARD NO. 1-675-517-14
LOT NO. 134-
DSR-2000_APR-45_014_4

APR-45 (5/17)

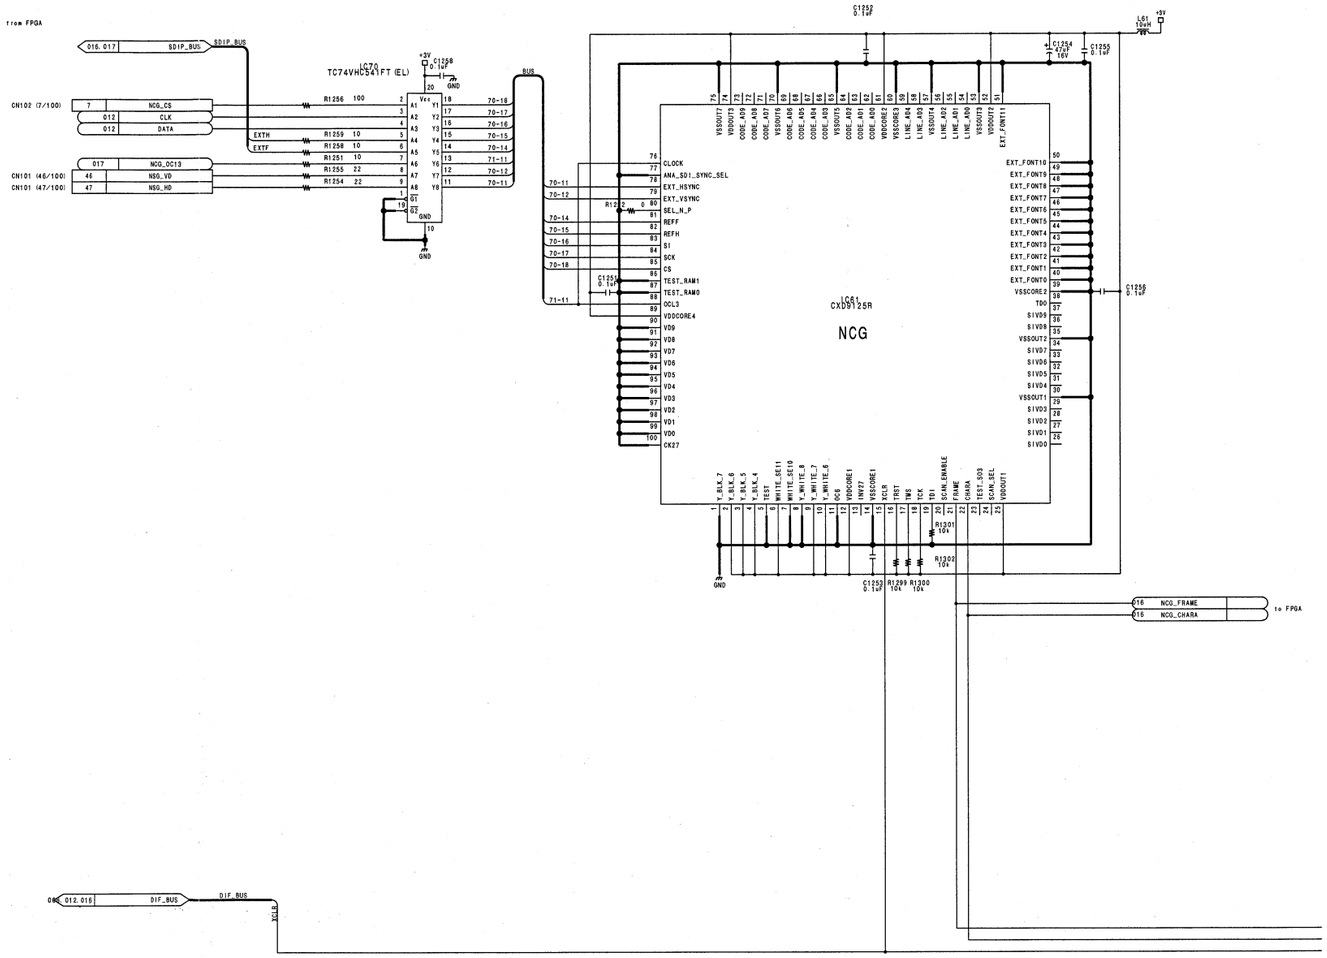

Note
In Lots #907 and #908, the DU-95 board had been mounted on the APR-45 board as a piggyback board. However, from Lot #909, the APR-45 board includes the circuits correspond to the DU-95 board.

APR-45 (5/17)

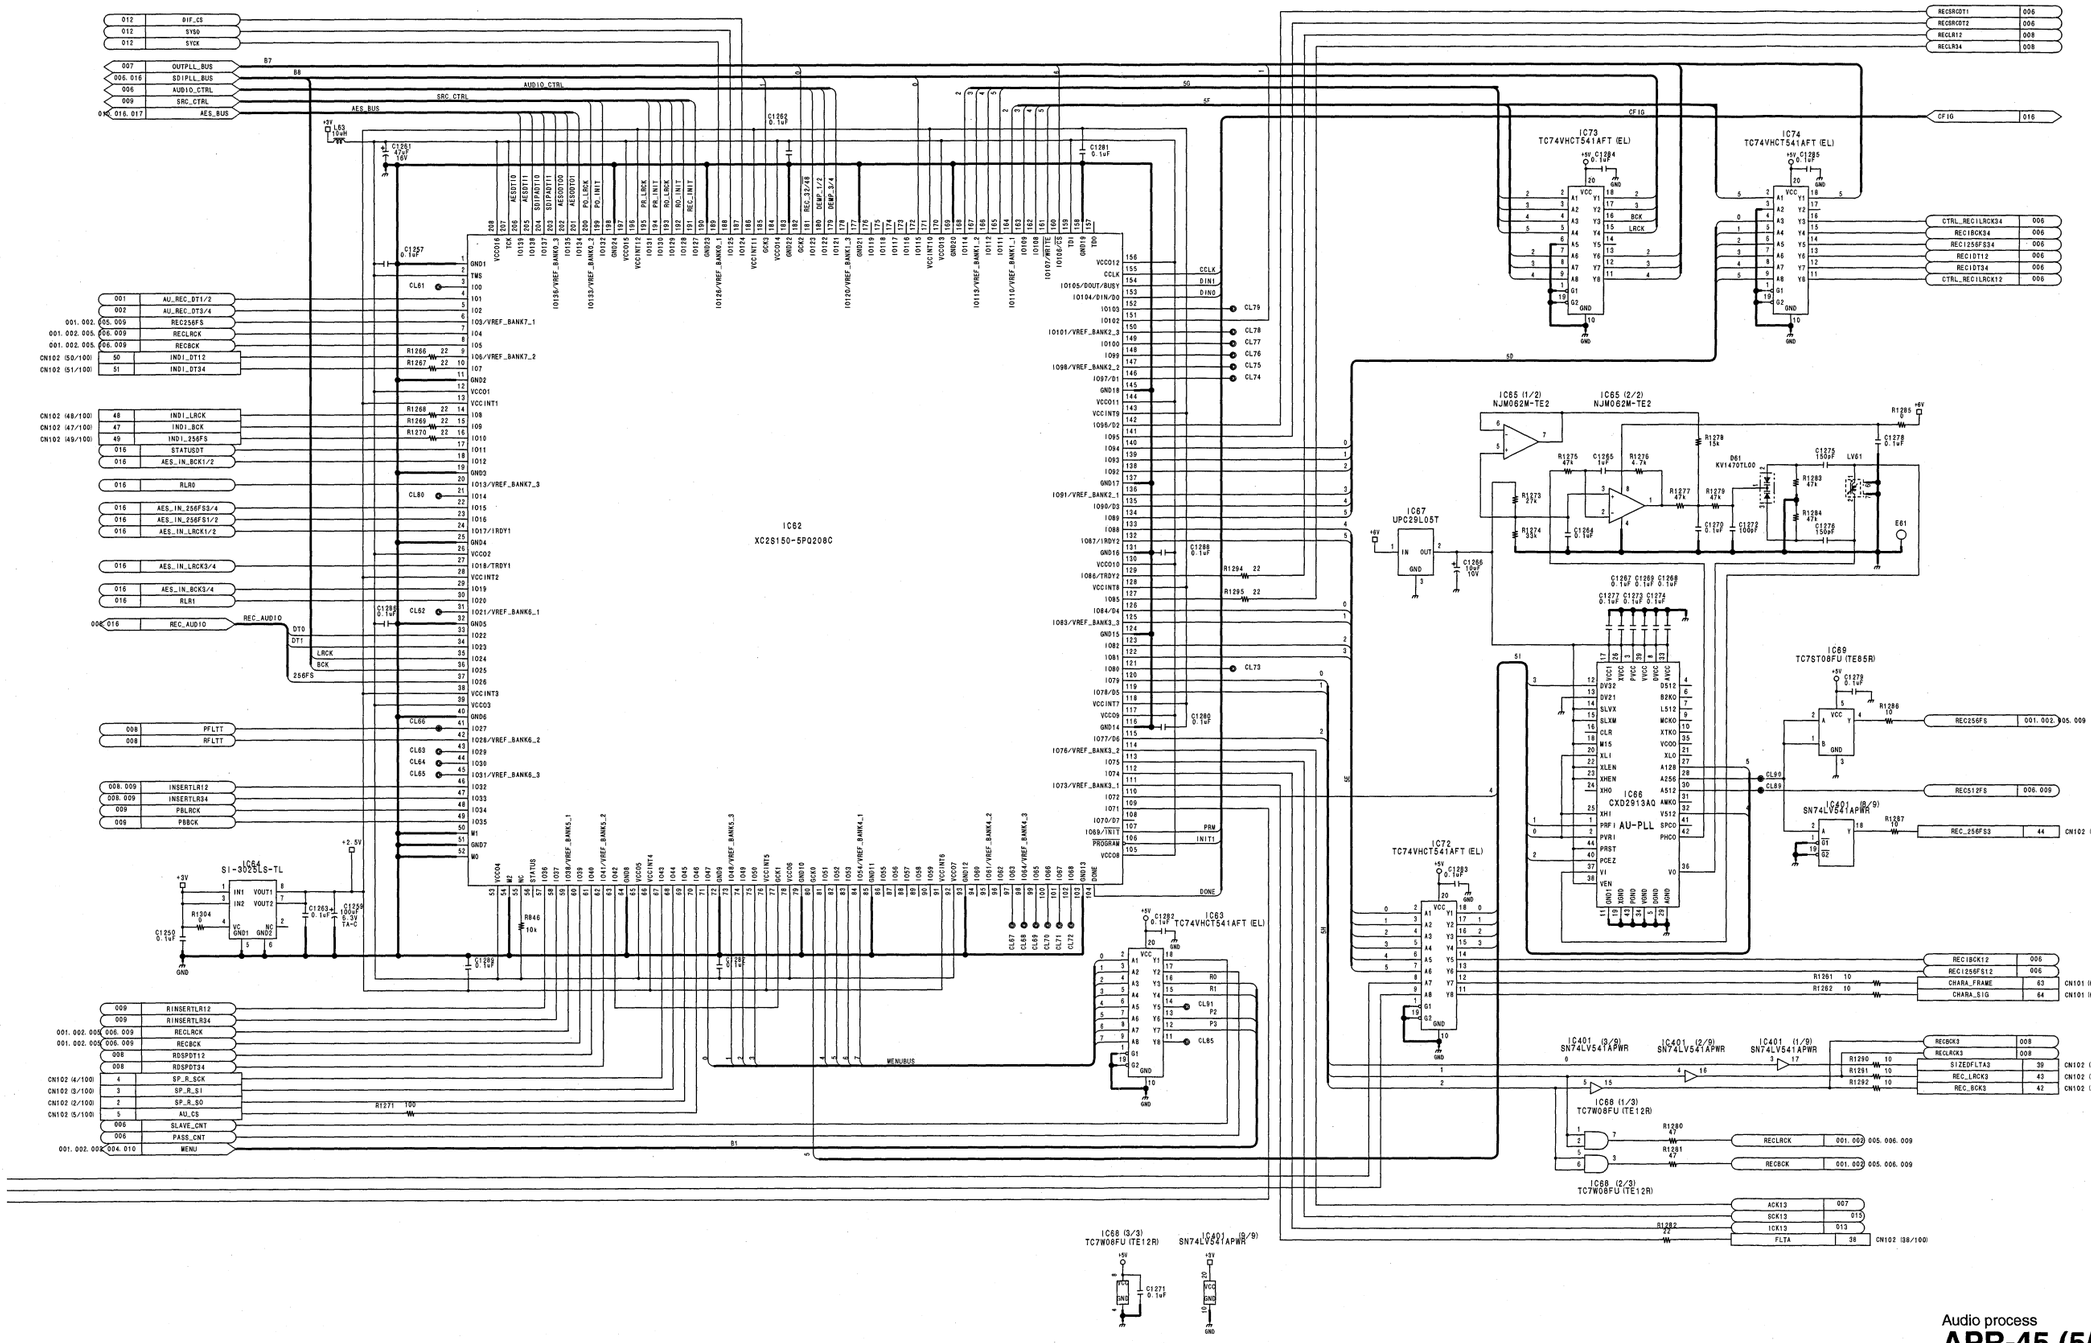

Audio process

APR-45 (5/17)

BOARD NO. 1-675-517-14

LOT NO. 134-

DSR-2000_APR-45_014_5

APR-45 (6/17)

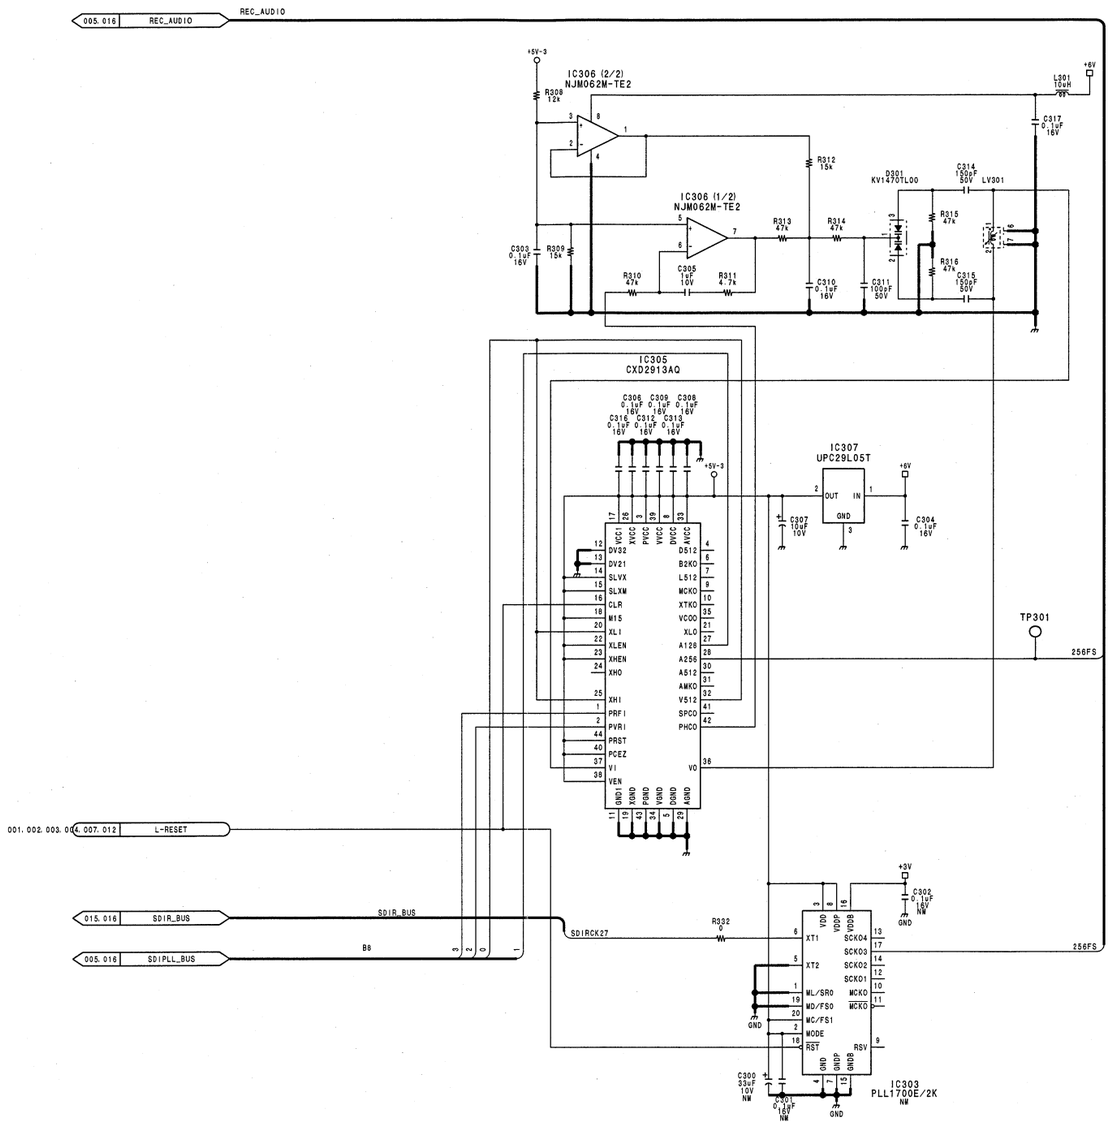

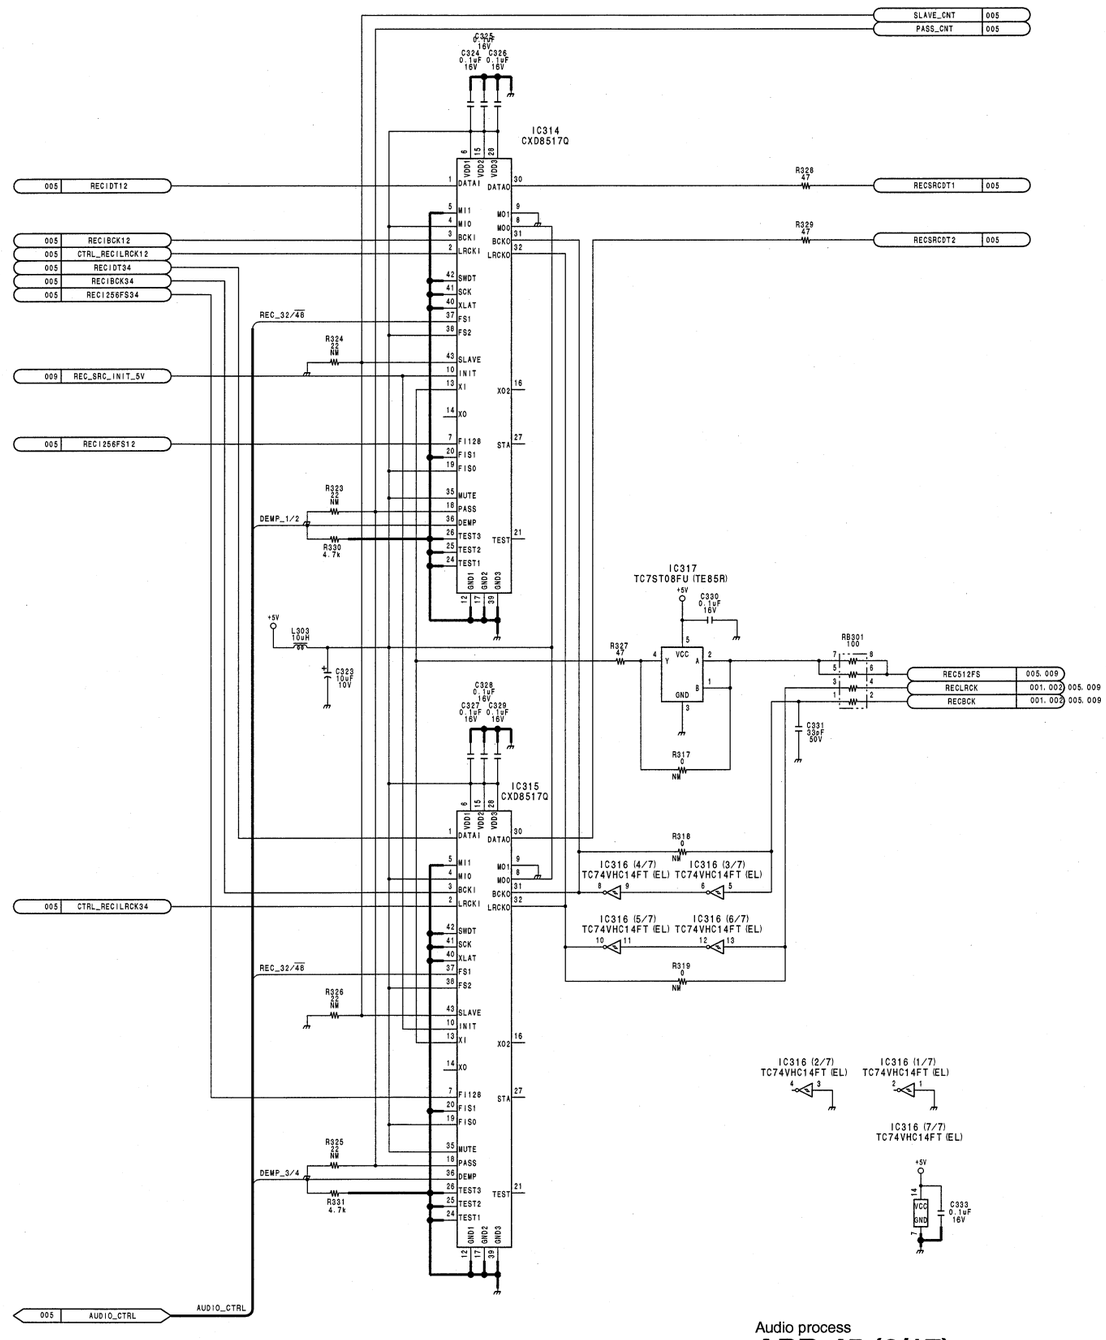

Audio process

APR-45 (6/17)

BOARD NO. 1-675-517-14

LOT NO. 134-

DSR-2000_APR-45_014_6

15-8 (b)

APR-45 (7/17)

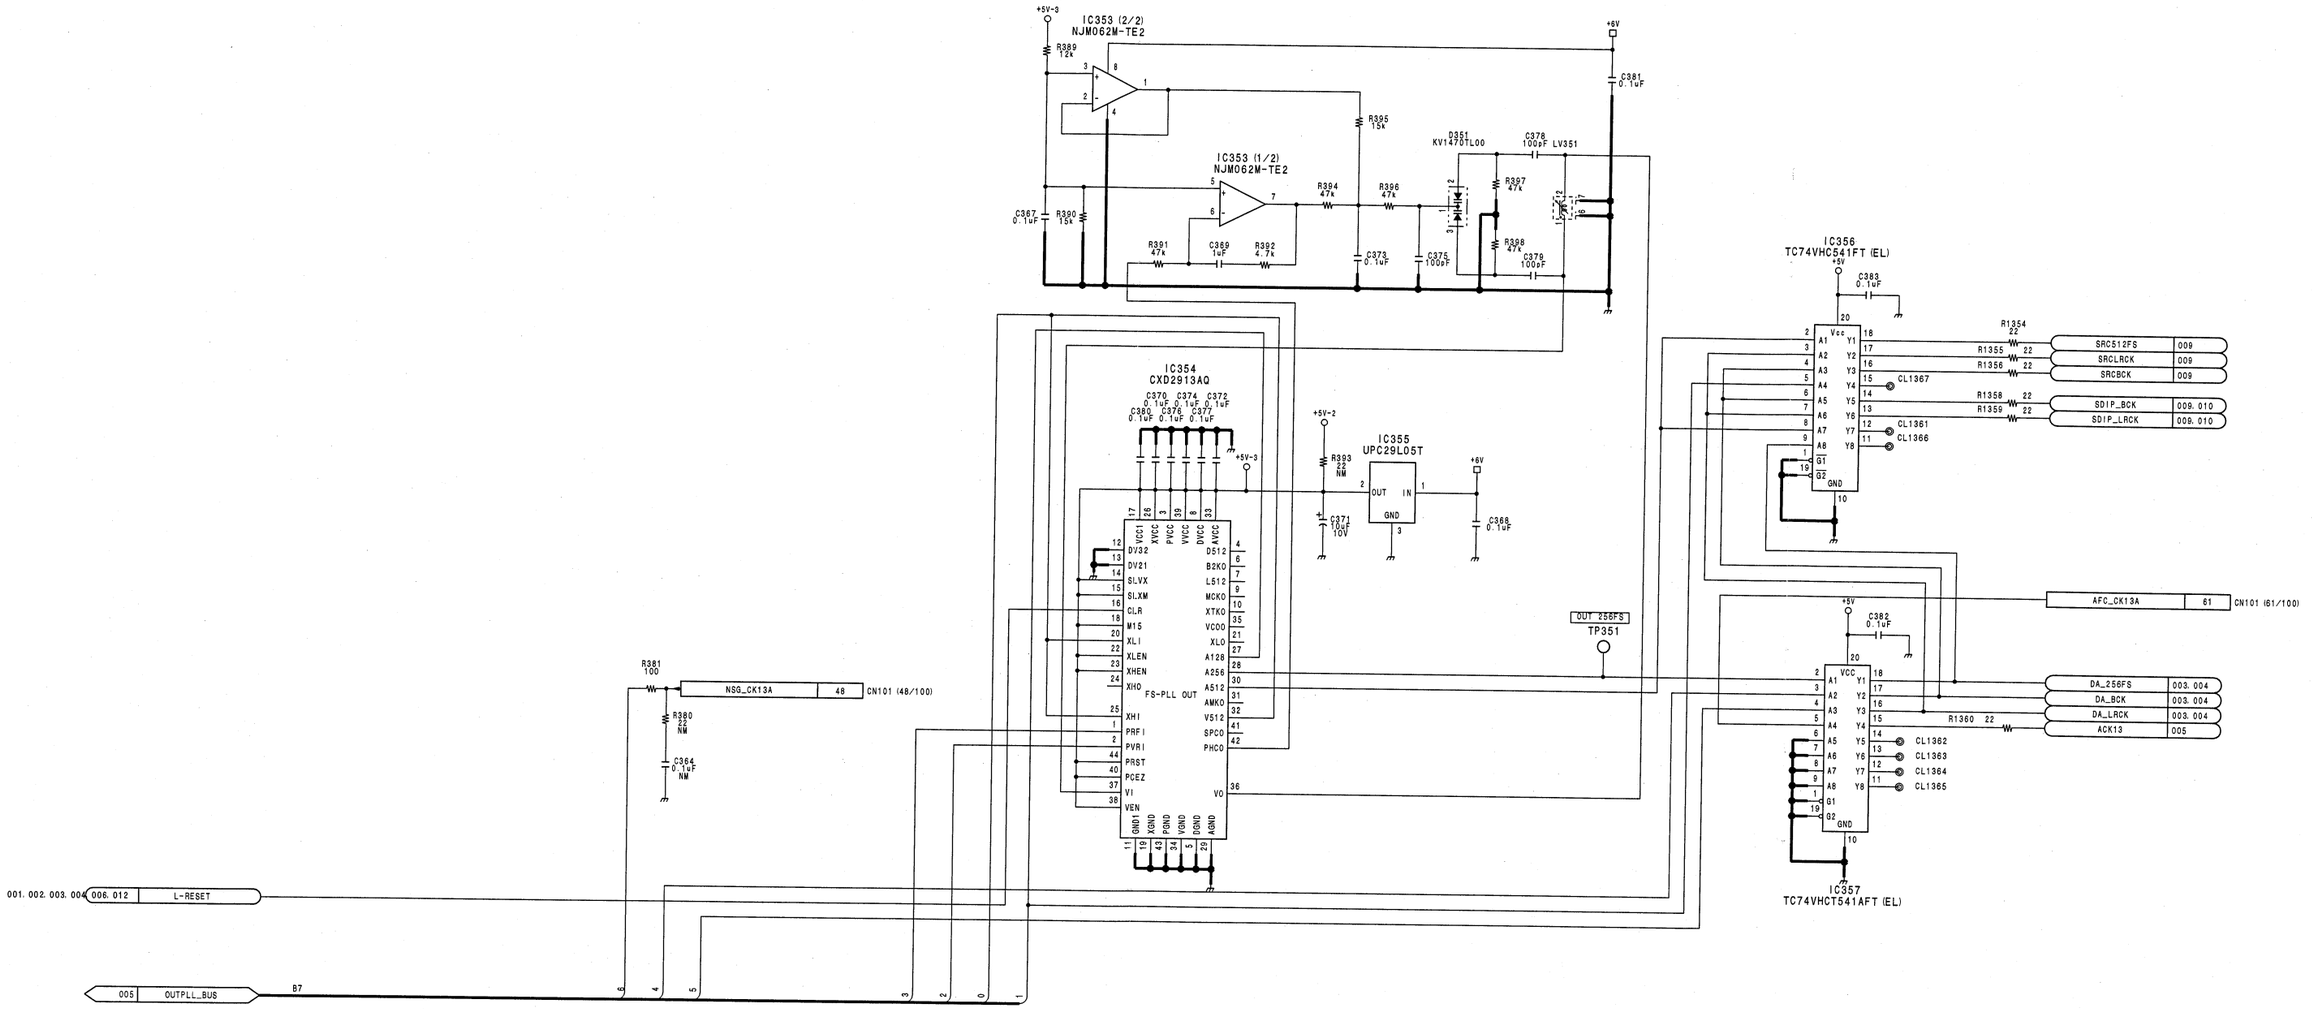

Audio process

APR-45 (7/17)

BOARD NO. 1-675-517-14

LOT NO. 134-

DSR-2000_APR-45_014_7

DSR-2000/2000P

15-9 (b)

15-9 (b)

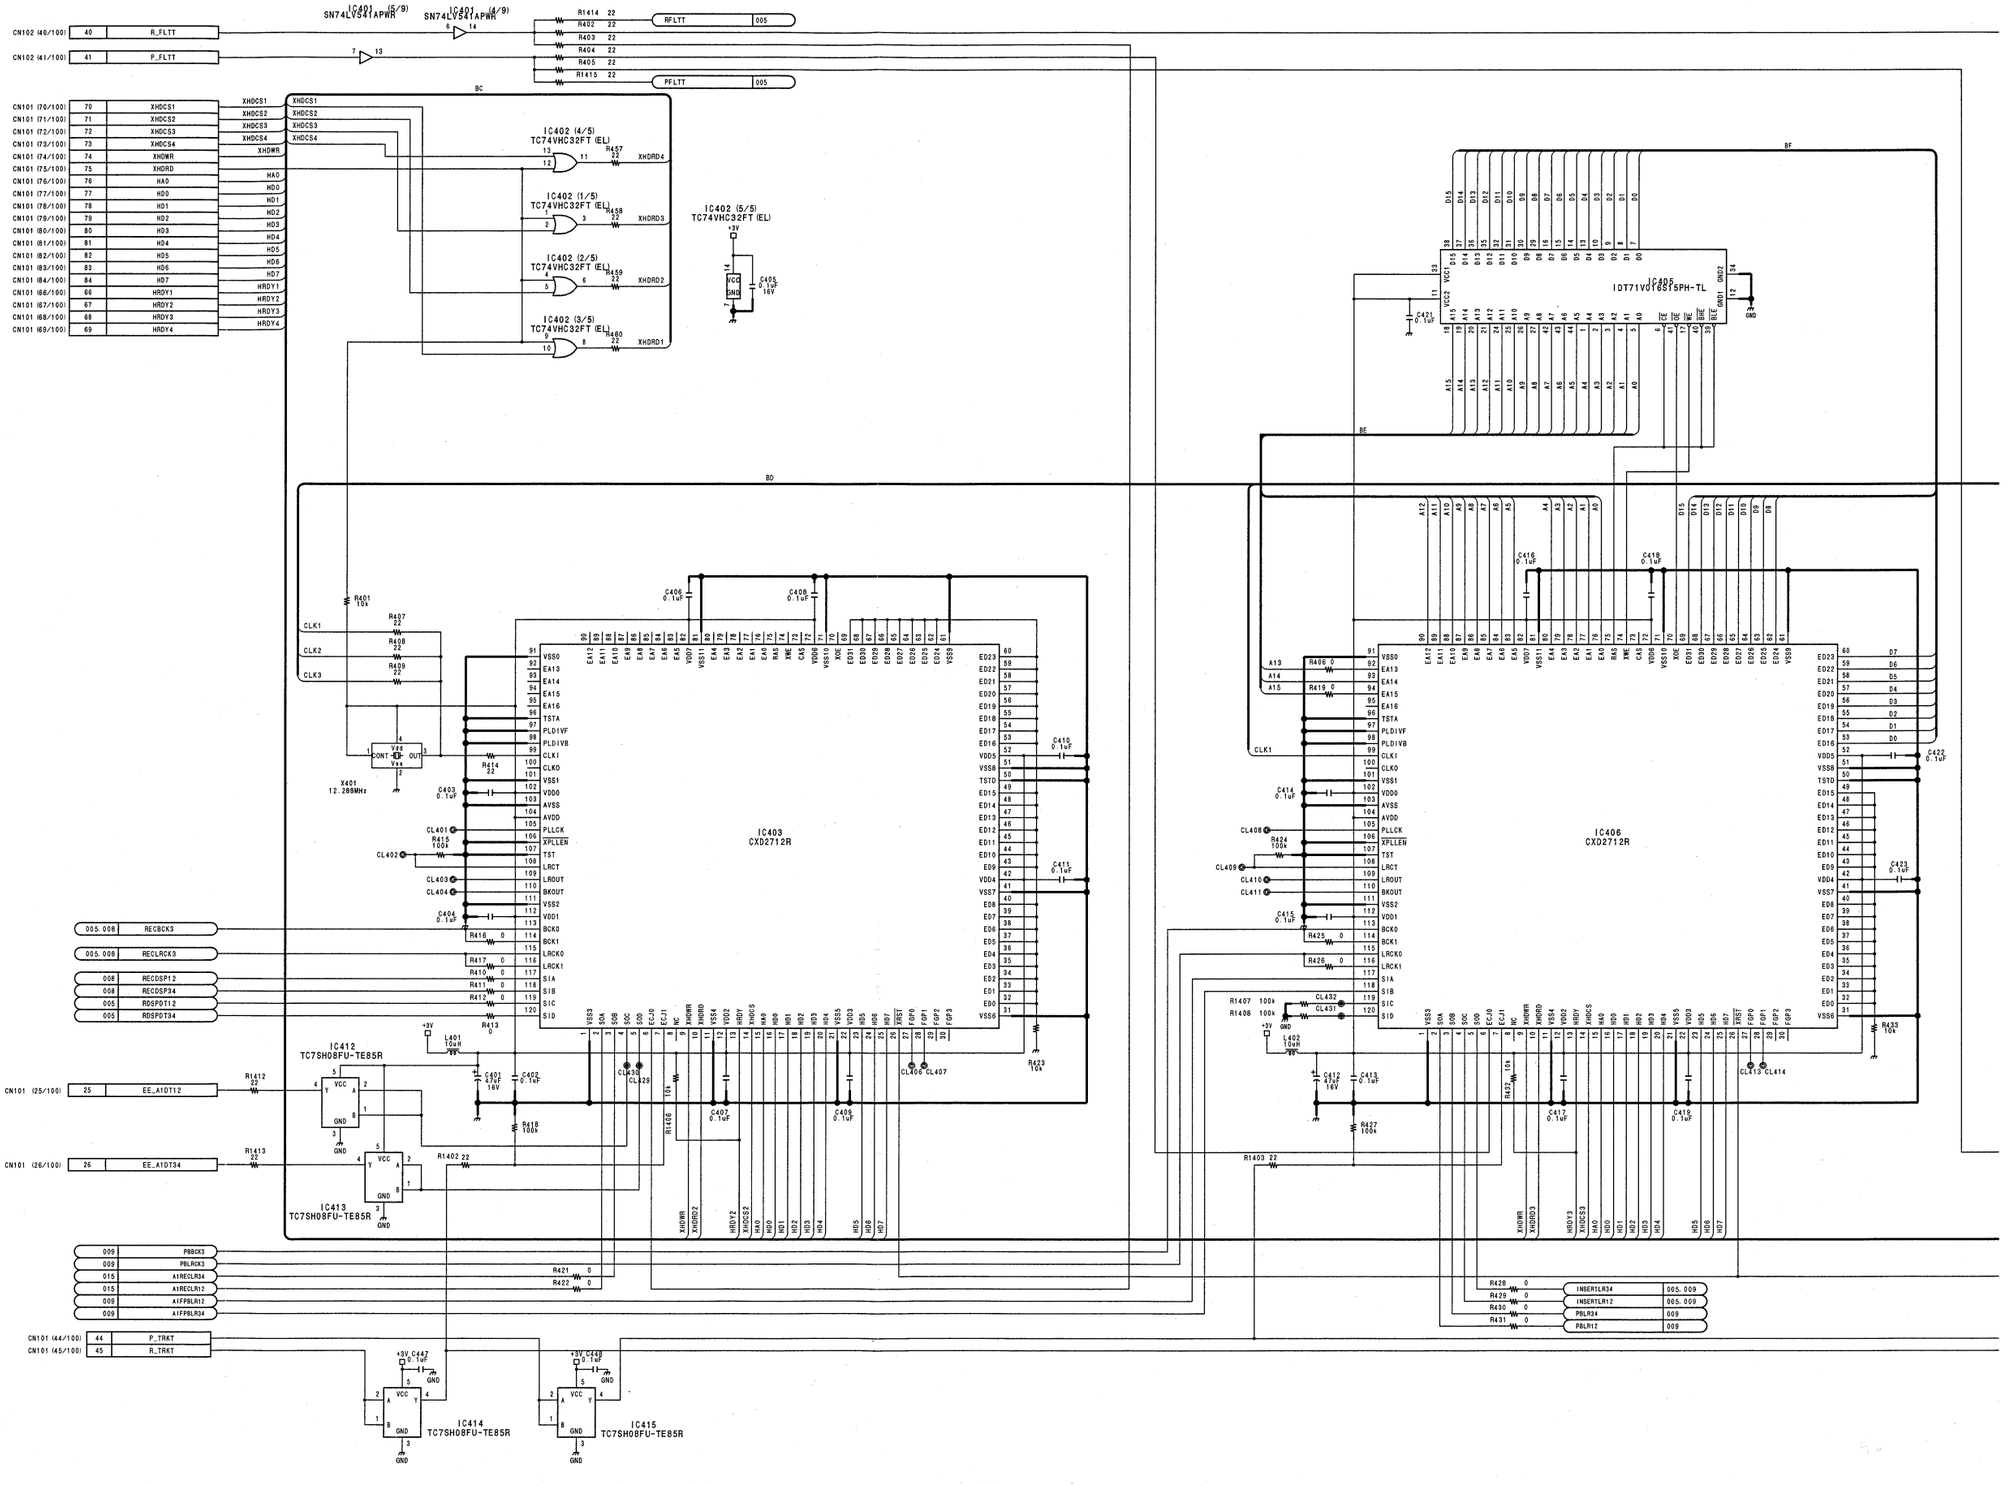
IC401 (5/9) SN74LV541APWR
IC401 (4/9) SN74LV541APWR
CN102 (40/100) 40 R_FLTT
CN102 (41/100) 41 P_FLTT
R1414 22
R402 22
R403 22
R404 22
R405 22
R1415 22
RFLTT 005
PFLTT 005
CN101 (70/100) 70 XHDCS1
CN101 (71/100) 71 XHDCS2
CN101 (72/100) 72 XHDCS3
CN101 (73/100) 73 XHDCS4
CN101 (74/100) 74 XHDWR
CN101 (75/100) 75 XHDRD
CN101 (76/100) 76 HA0
CN101 (77/100) 77 HD0
CN101 (78/100) 78 HD1
CN101 (79/100) 79 HD2
CN101 (80/100) 80 HD3
CN101 (81/100) 81 HD4
CN101 (82/100) 82 HD5
CN101 (83/100) 83 HD6
CN101 (84/100) 84 HD7
CN101 (66/100) 66 HRDY1
CN101 (67/100) 67 HRDY2
CN101 (68/100) 68 HRDY3
CN101 (69/100) 69 HRDY4
IC402 (4/5) TC74VHC32FT (EL)
IC402 (1/5) TC74VHC32FT (EL)
IC402 (2/5) TC74VHC32FT (EL)
IC402 (3/5) TC74VHC32FT (EL)
IC402 (5/5) TC74VHC32FT (EL)
R457 22 XHDRD4
R458 22 XHDRD3
R459 22 XHDRD2
R460 22 XHDRD1
IC403 CXD2712R
IC405 IDT71VDT6S1SPH-TL
IC406 CXD2712R
X401 12.288MHz
IC412 TC7SH08FU-TE85R
IC413 TC7SH08FU-TE85R
IC414 TC7SH08FU-TE85R
IC415 TC7SH08FU-TE85R
005.008 RECBCK3
005.008 RECLRCK3
008 RECDSP12
008 RECDSP34
005 RDSPDT12
005 RDSPDT34
CN101 (25/100) 25 EE_A1DT12
CN101 (26/100) 26 EE_A1DT34
009 PBBCK3
009 PBLRCK3
015 A1RECLR34
015 A1RECLR12
009 A1FPBLR12
009 A1FPBLR34
CN101 (44/100) 44 P_TRKT
CN101 (45/100) 45 R_TRKT
INSERTLR34 005.009
INSERTLR12 005.009
PBLR34 009
PBLR12 009
BC
BD
BE
BF

APR-45 (8/17)

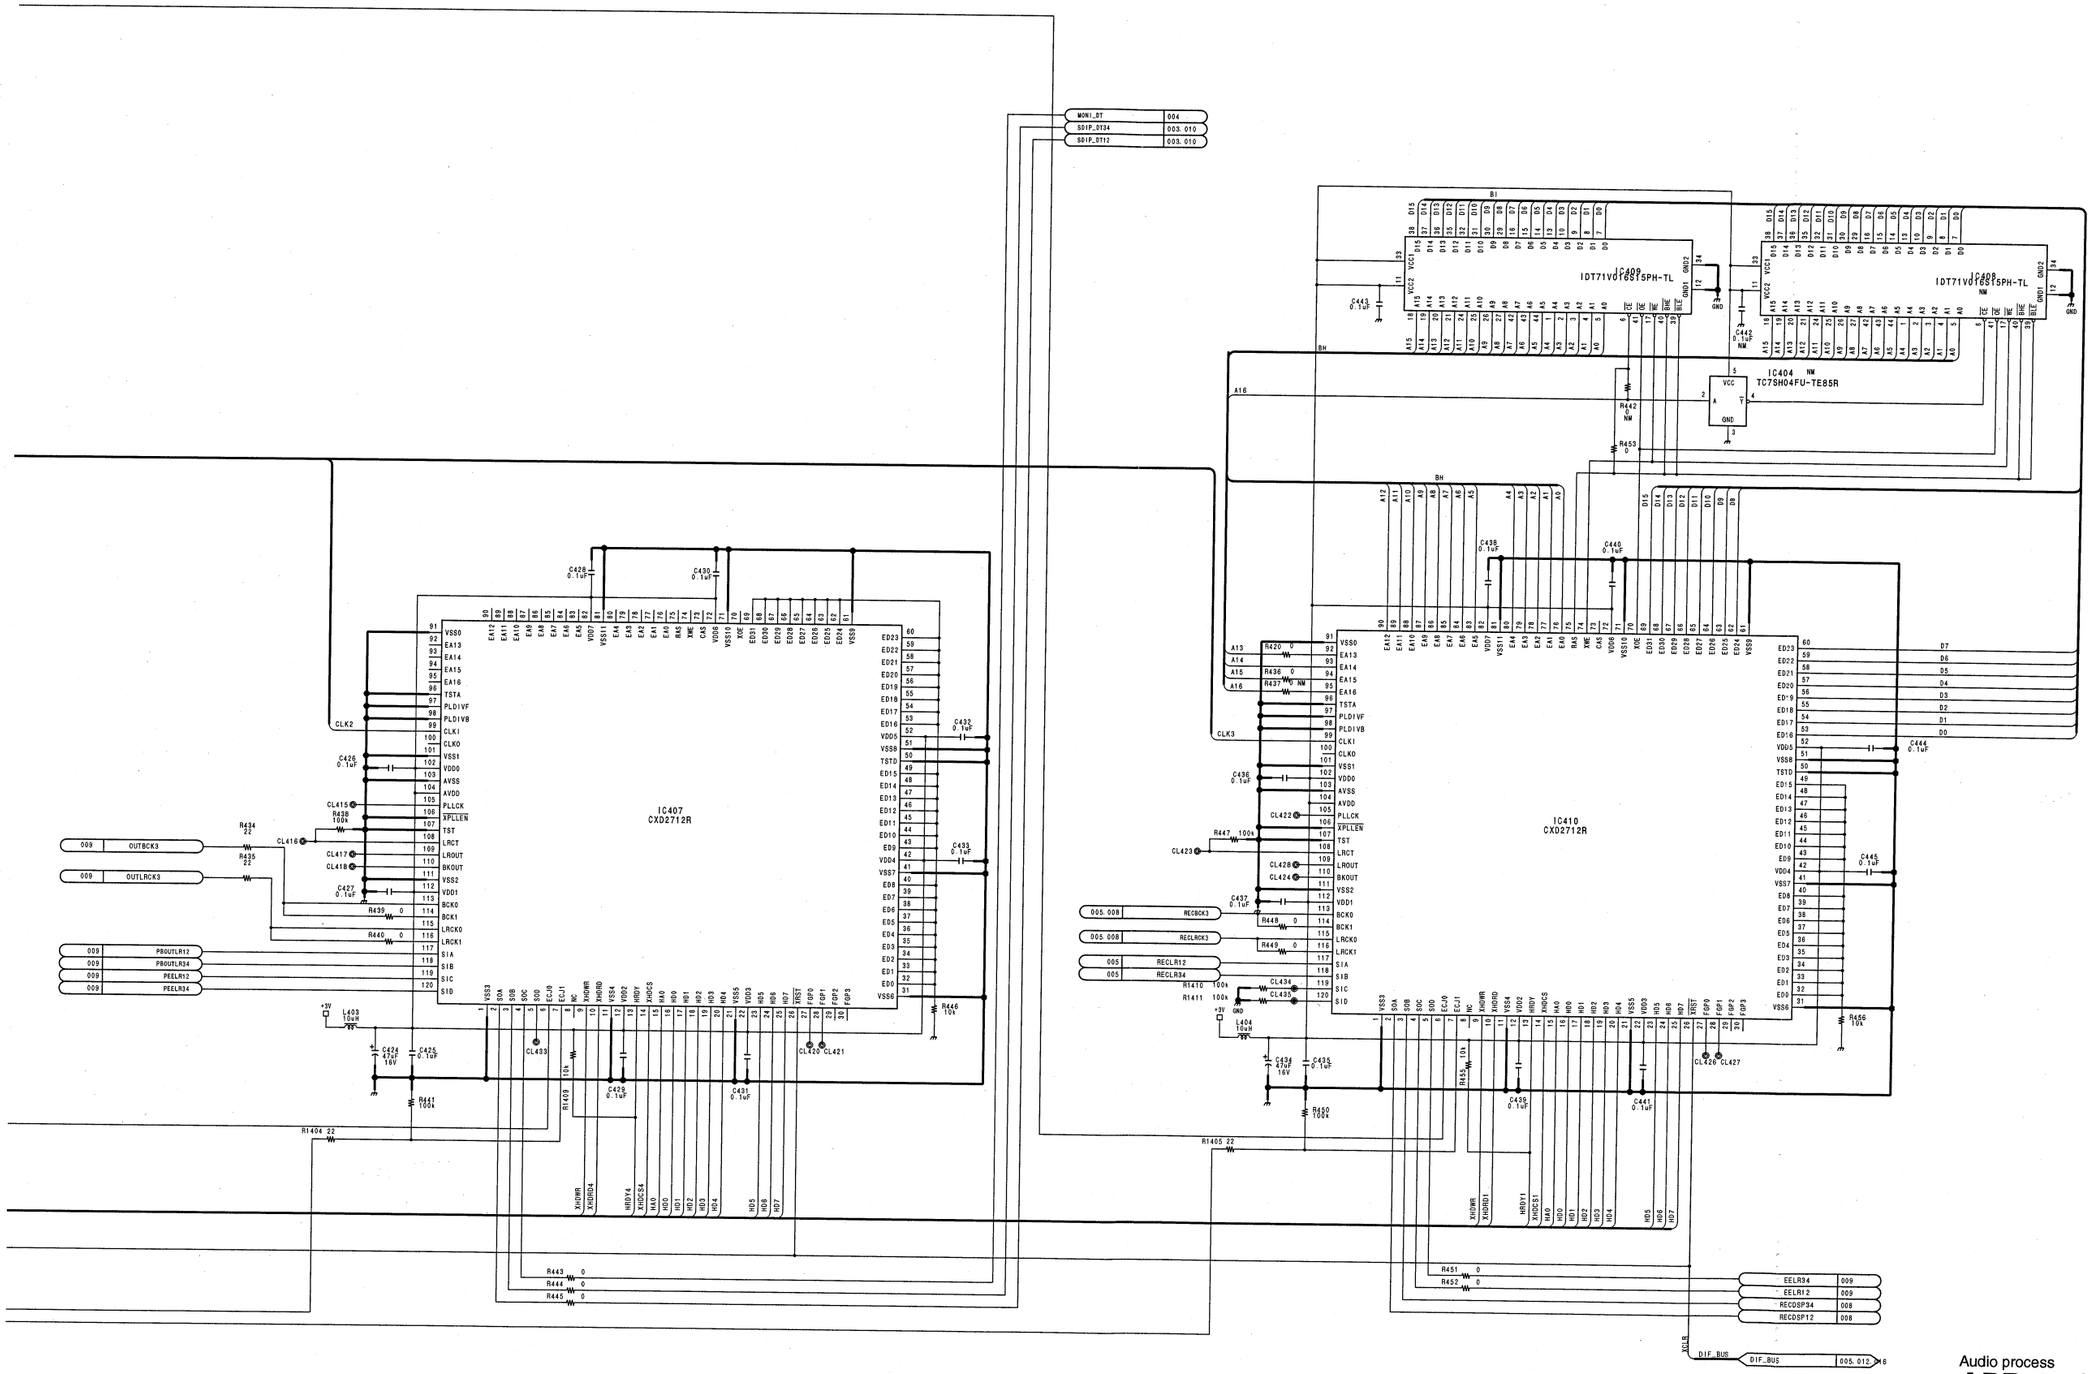

Audio process

APR-45 (8/17)

BOARD NO. 1-675-517-14
LOT NO. 134-
DSR-2000_APR-45_014_8

APR-45 (9/17)

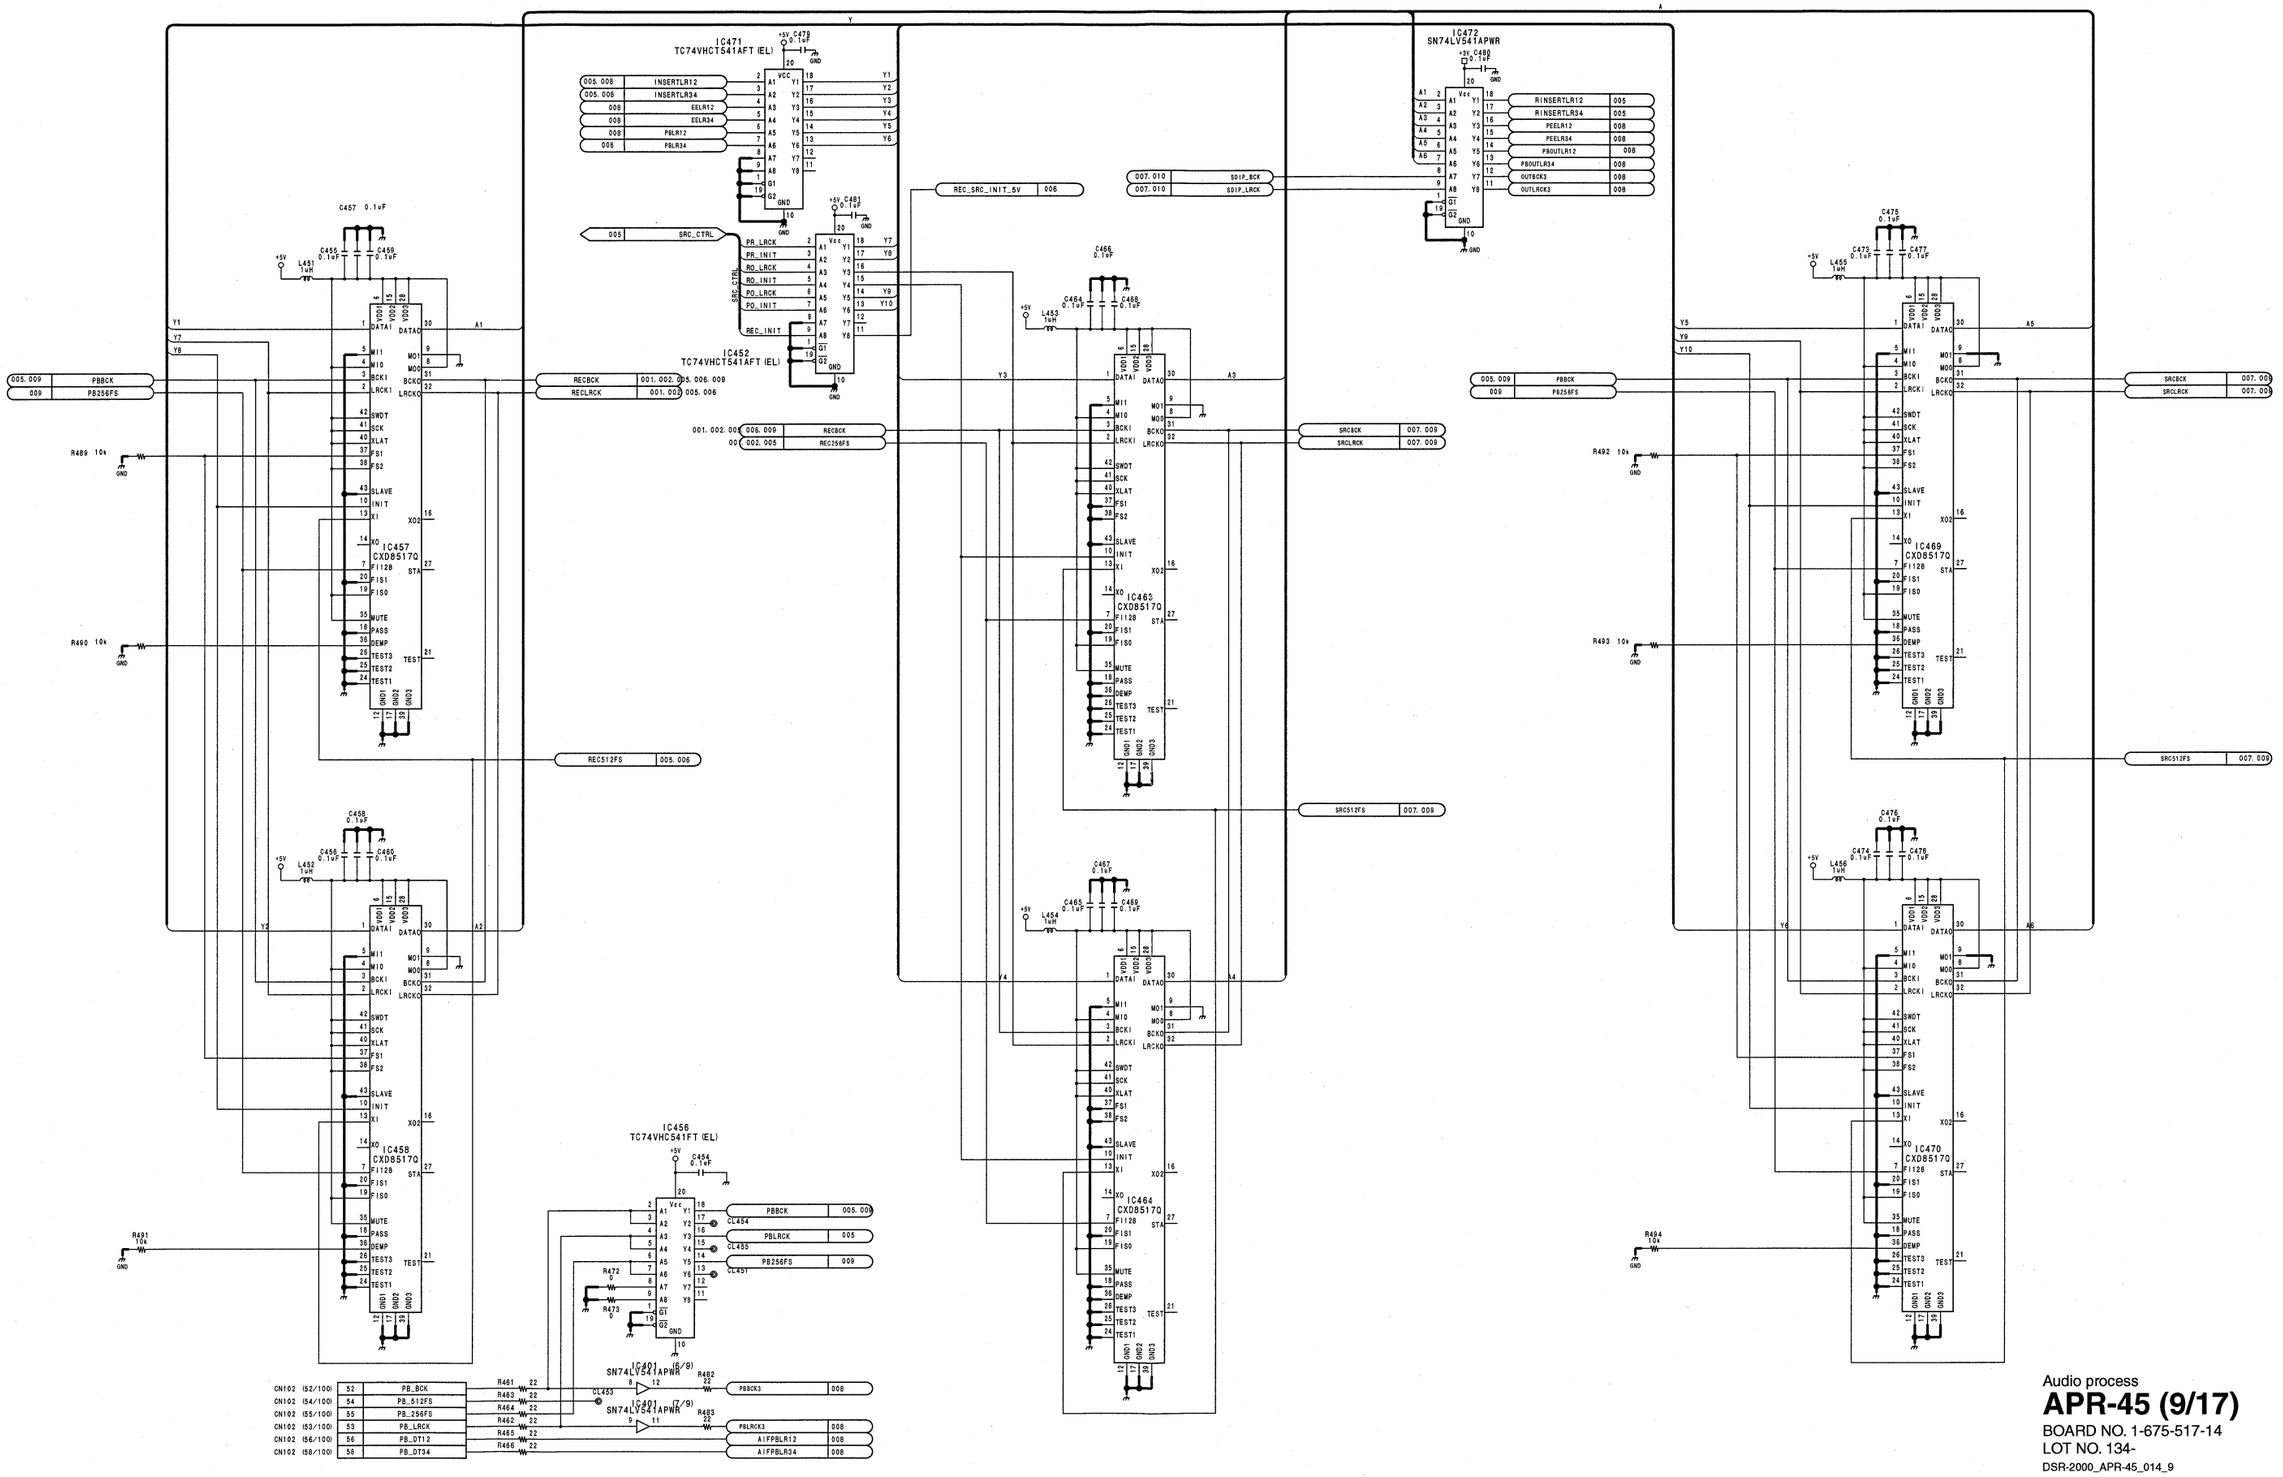

Audio process
APR-45 (9/17)
BOARD NO. 1-675-517-14
LOT NO. 134-
DSR-2000_APR-45_014_9

15-12 (b)

15-12 (b)

DSR-2000/2000P

APR-45 (10/17)

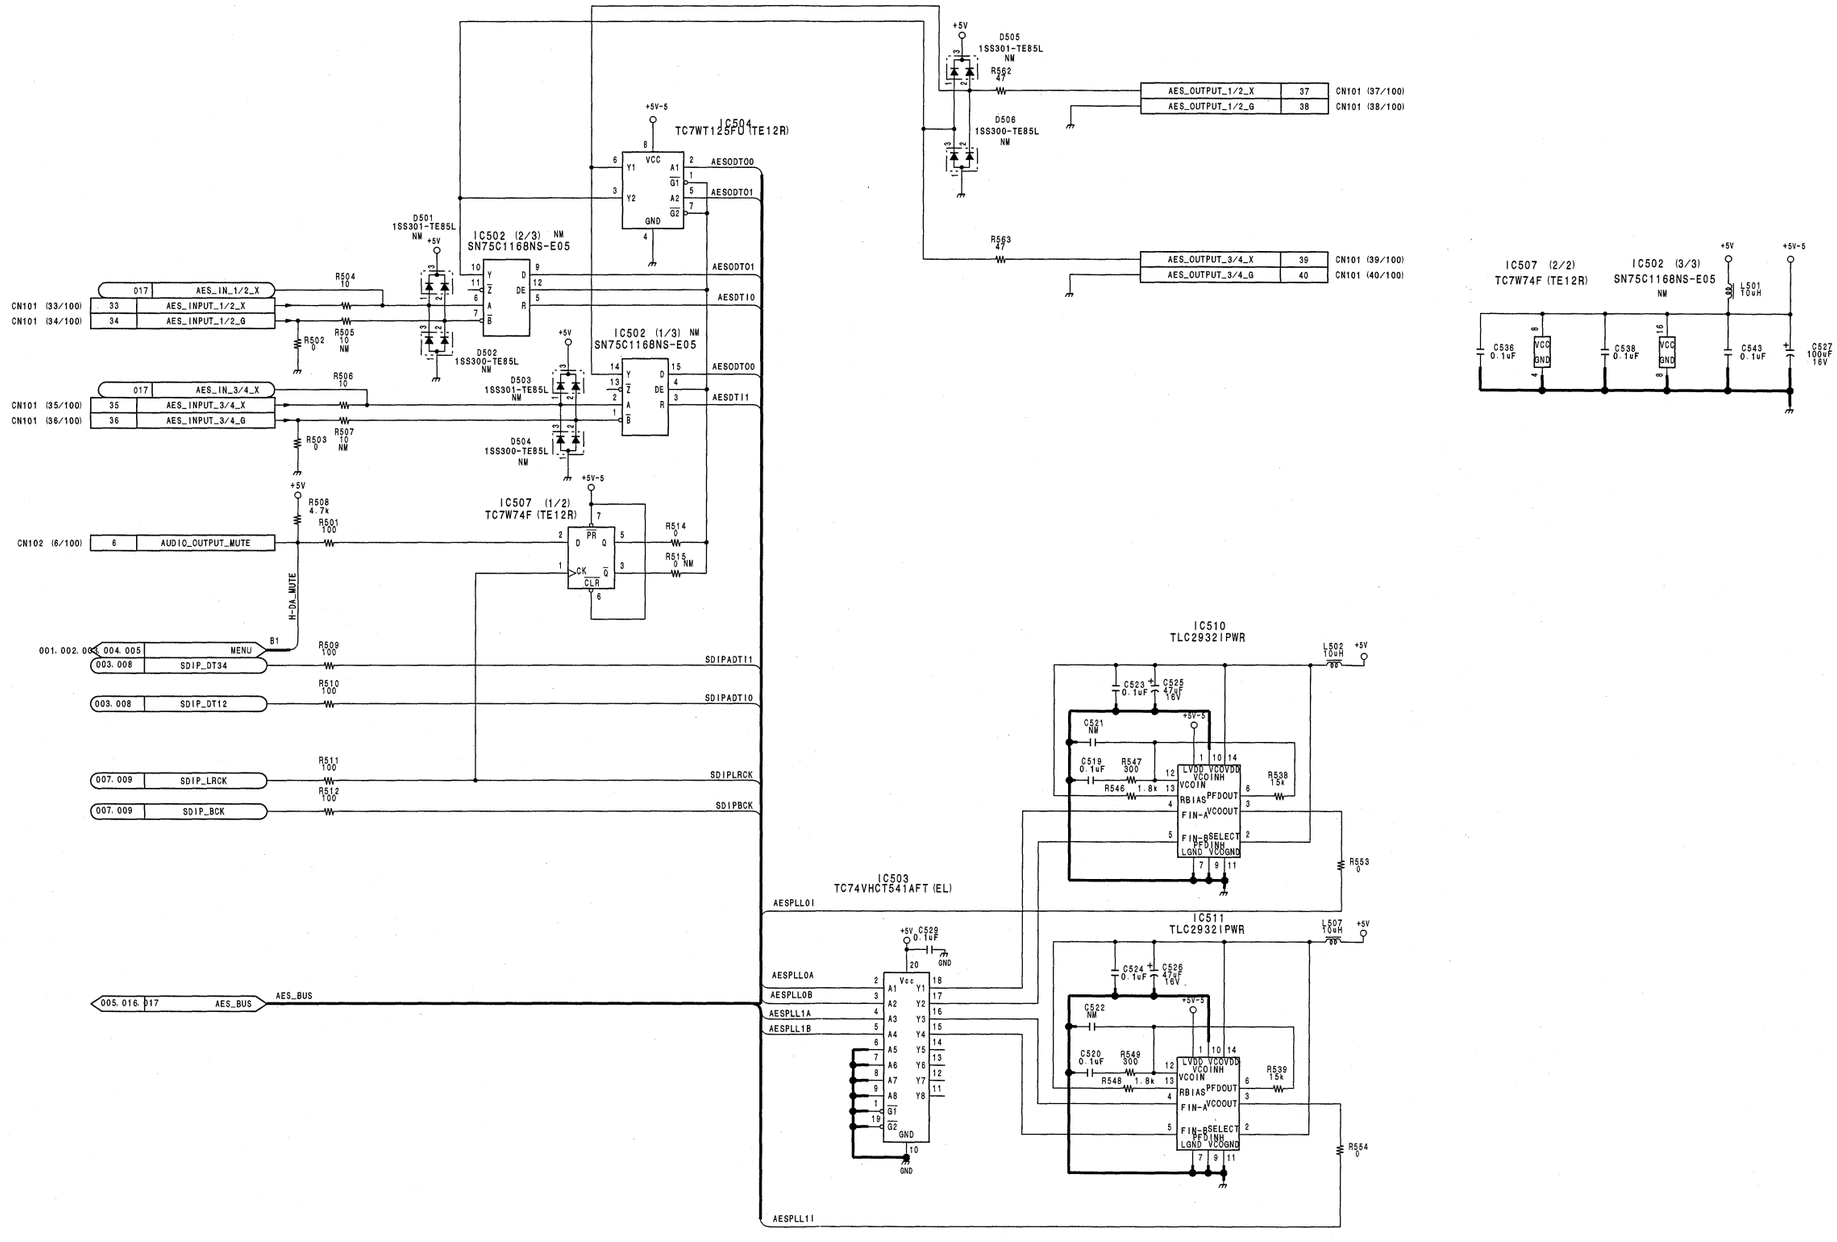

Audio process

APR-45 (10/17)

BOARD NO. 1-675-517-14
LOT NO. 134-
DSR-2000_APR-45_014_10

APR-45 (11/17)

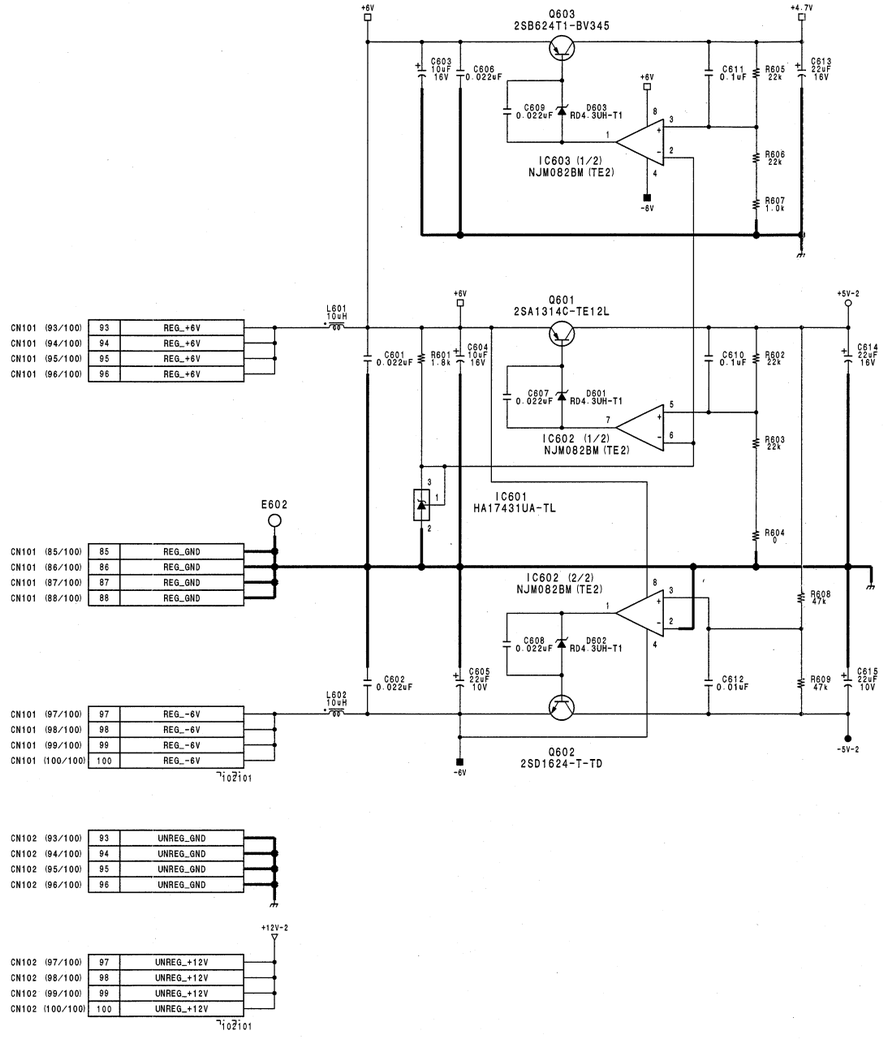





Audio process
APR-45 (11/17)
BOARD NO. 1-675-517-14
LOT NO. 134-
DSR-2000_APR-45_014_11

15-14 (b)
15-14 (b)

DSR-2000/2000P

APR-45 (12/17)

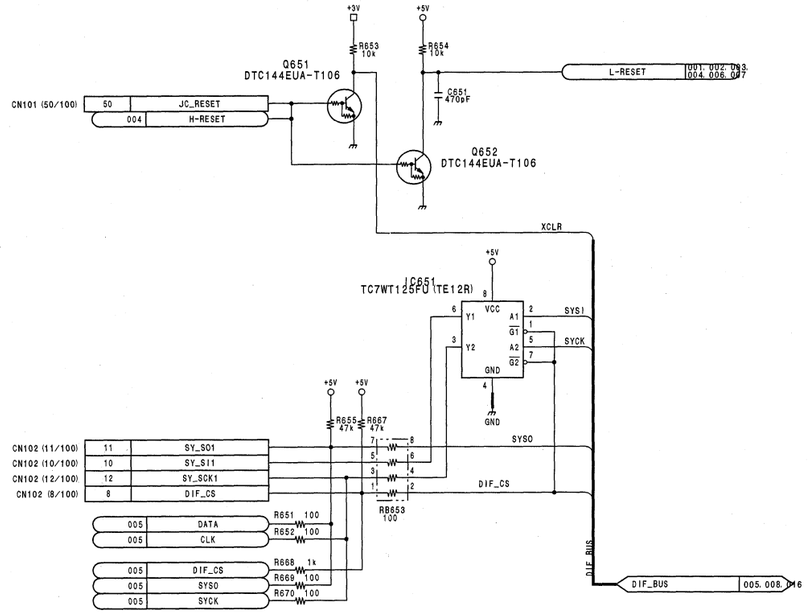

Audio process

APR-45 (12/17)

BOARD NO. 1-675-517-14
LOT NO. 134-
DSR-2000_APR-45_014_12

APR-45 (13/17)

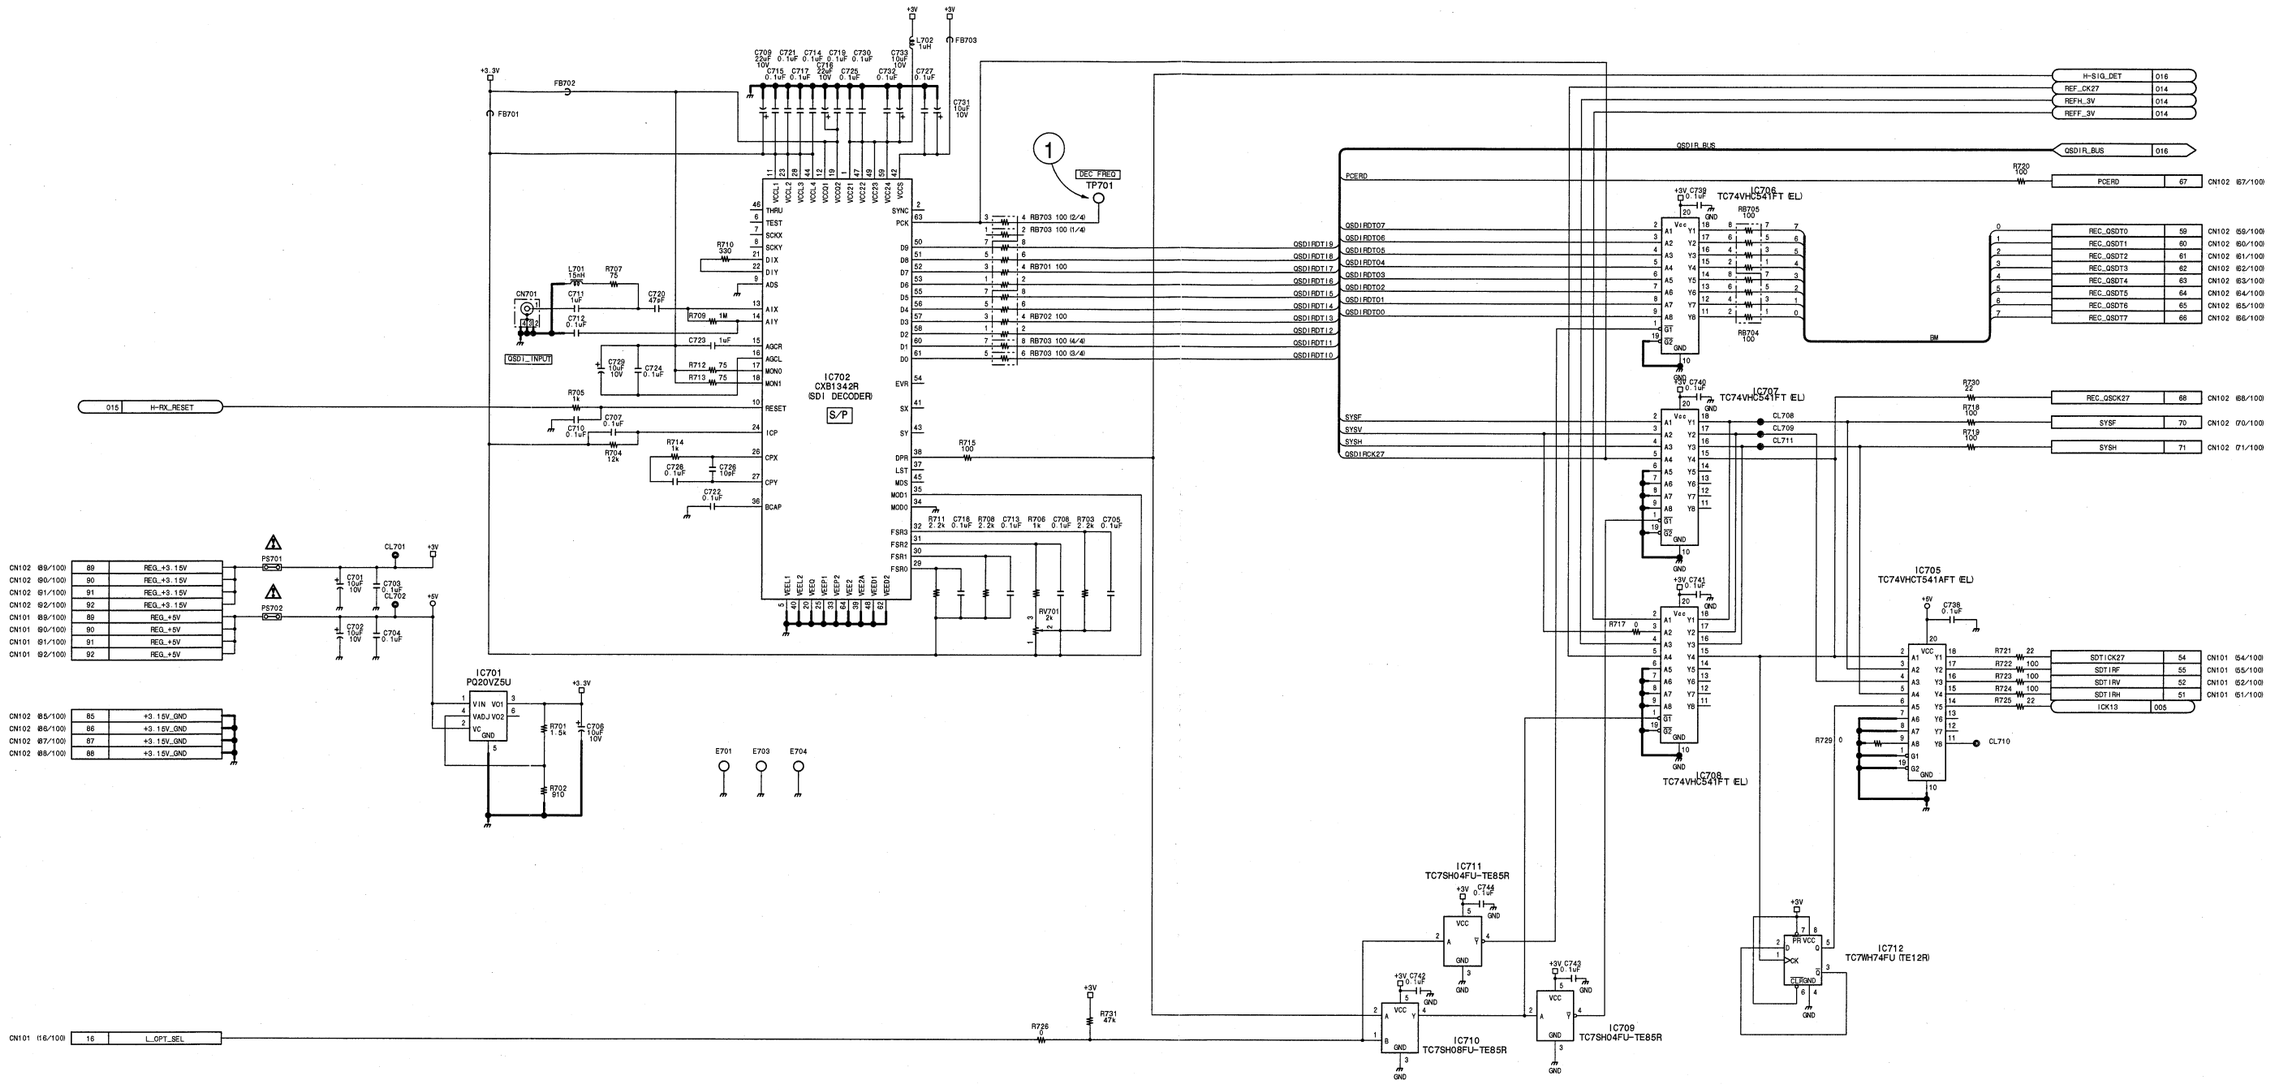

① TP701 DEC FREQ

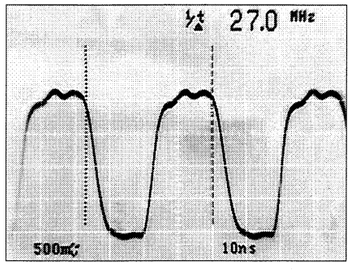

Audio process

APR-45 (13/17)

BOARD NO. 1-675-517-14

LOT NO. 134-

DSR-2000_APR-45_014_13

APR-45 (14/17)

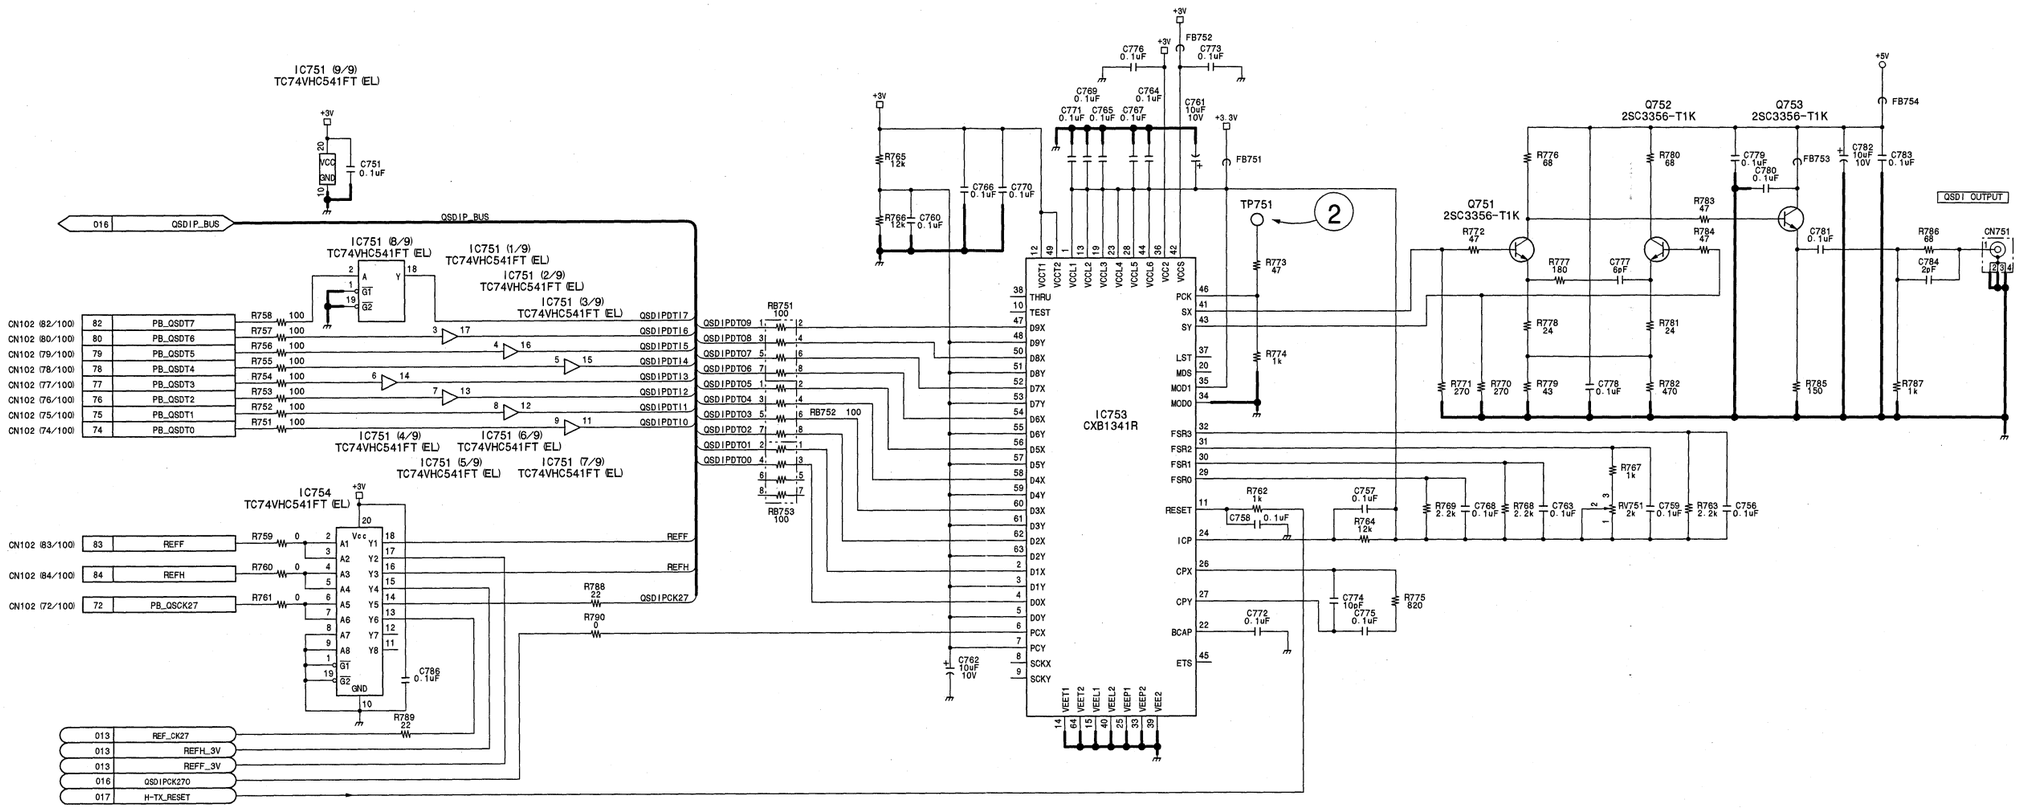

② TP751 QOVCO

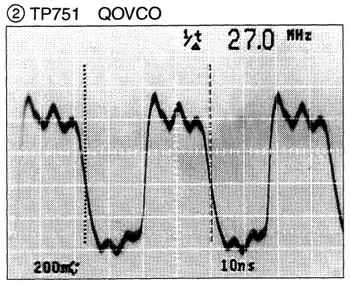

Audio process

APR-45 (14/17)

BOARD NO. 1-675-517-14
LOT NO. 134-
DSR-2000_APR-45_014_14

APR-45 (15/17)

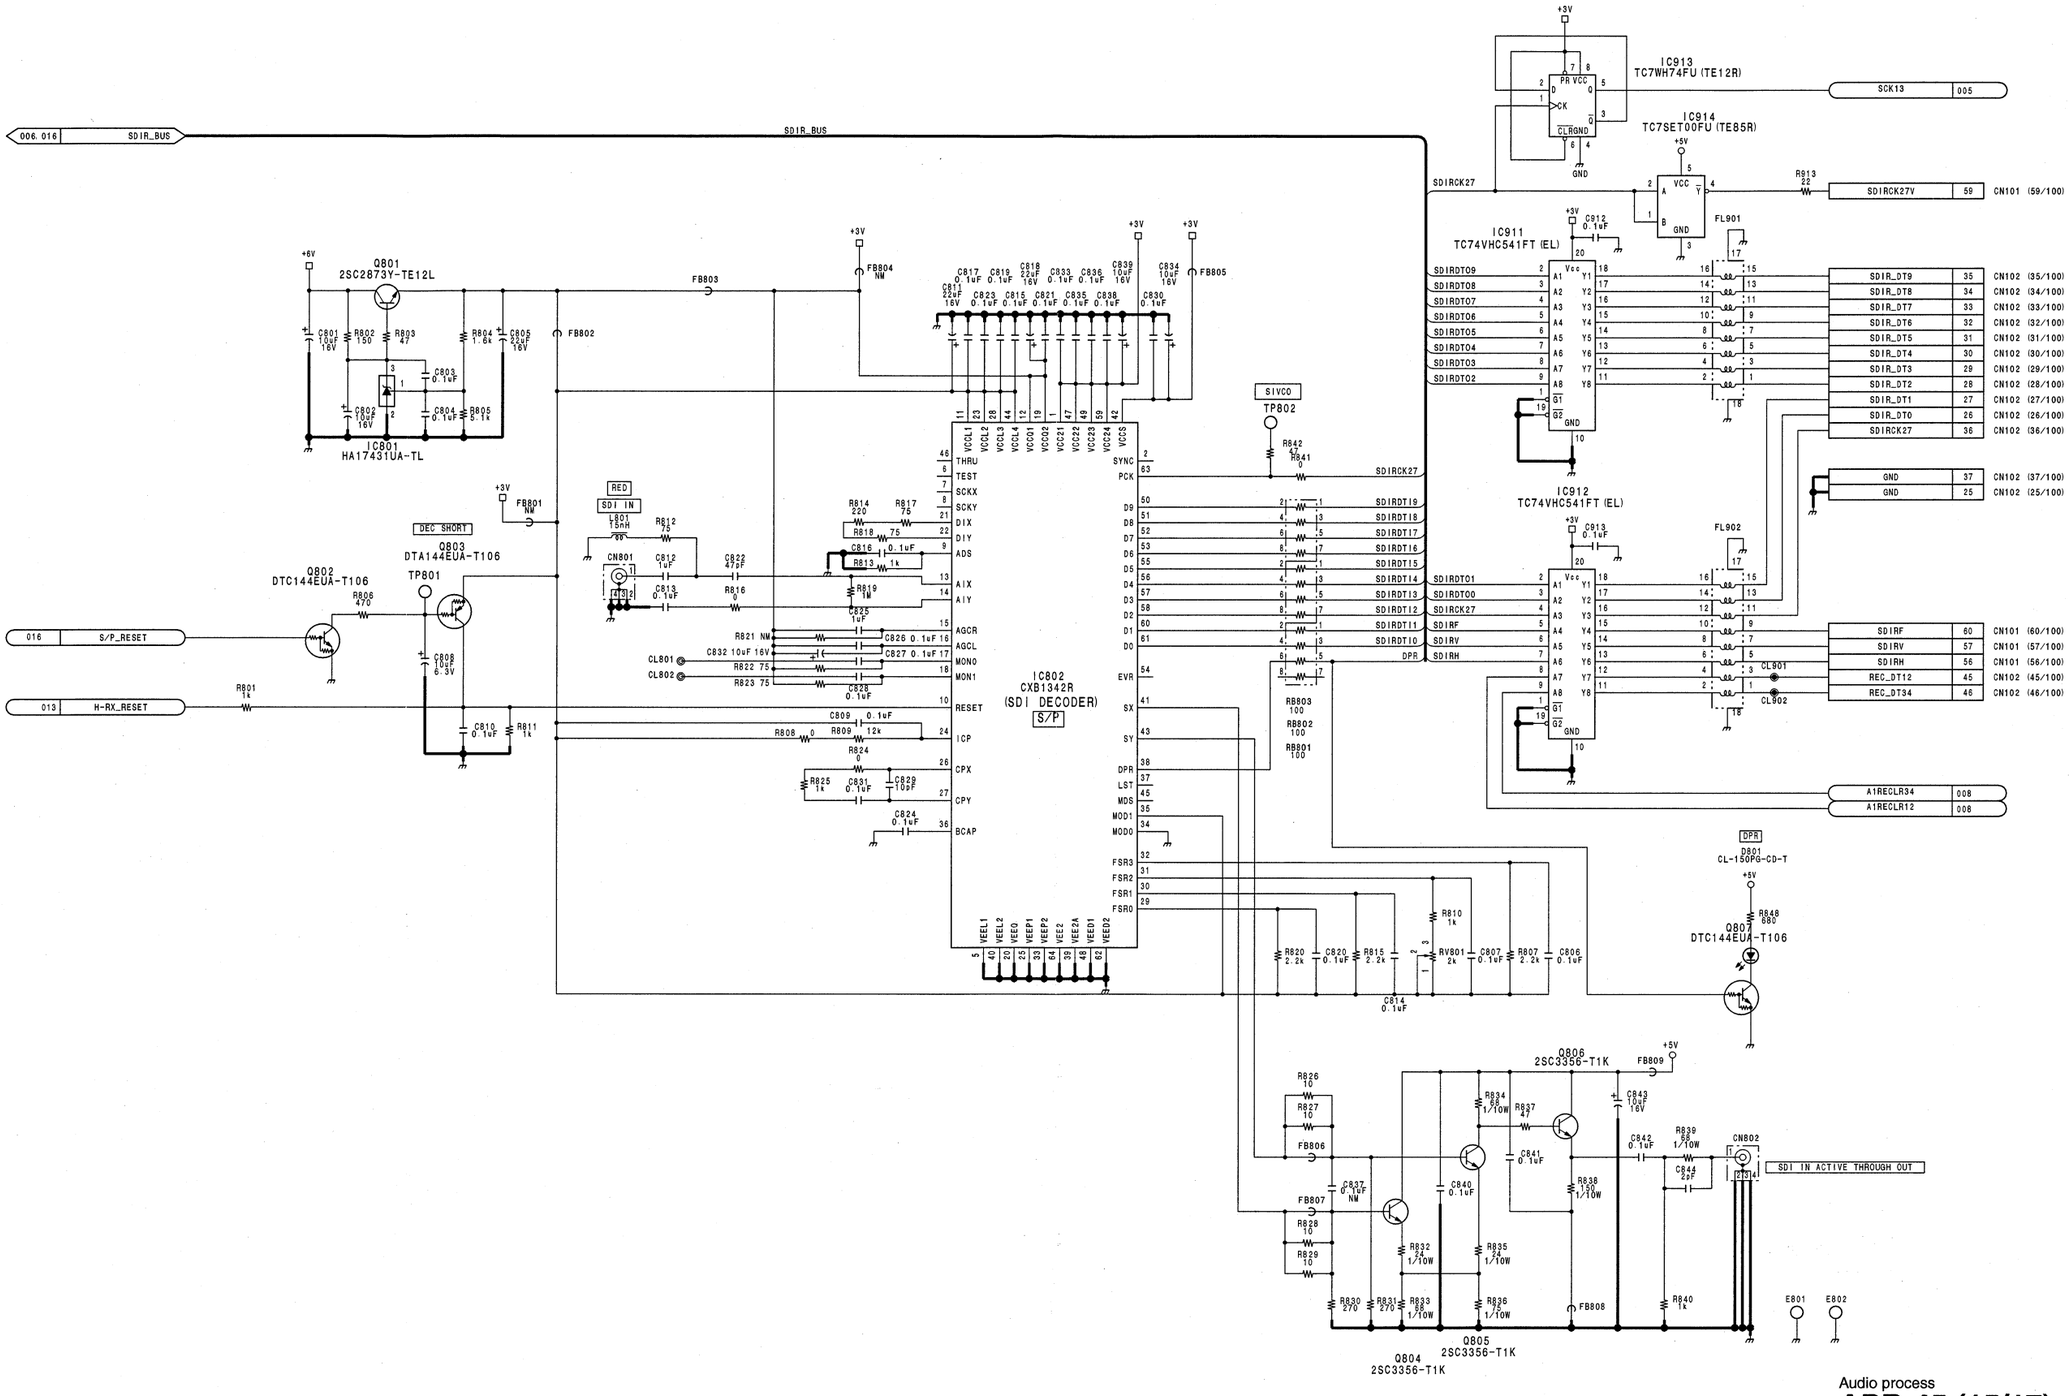

Audio process

APR-45 (15/17)

BOARD NO. 1-675-517-14
LOT NO. 134-
DSR-2000_APR-45_014_15

APR-45 (16/17)

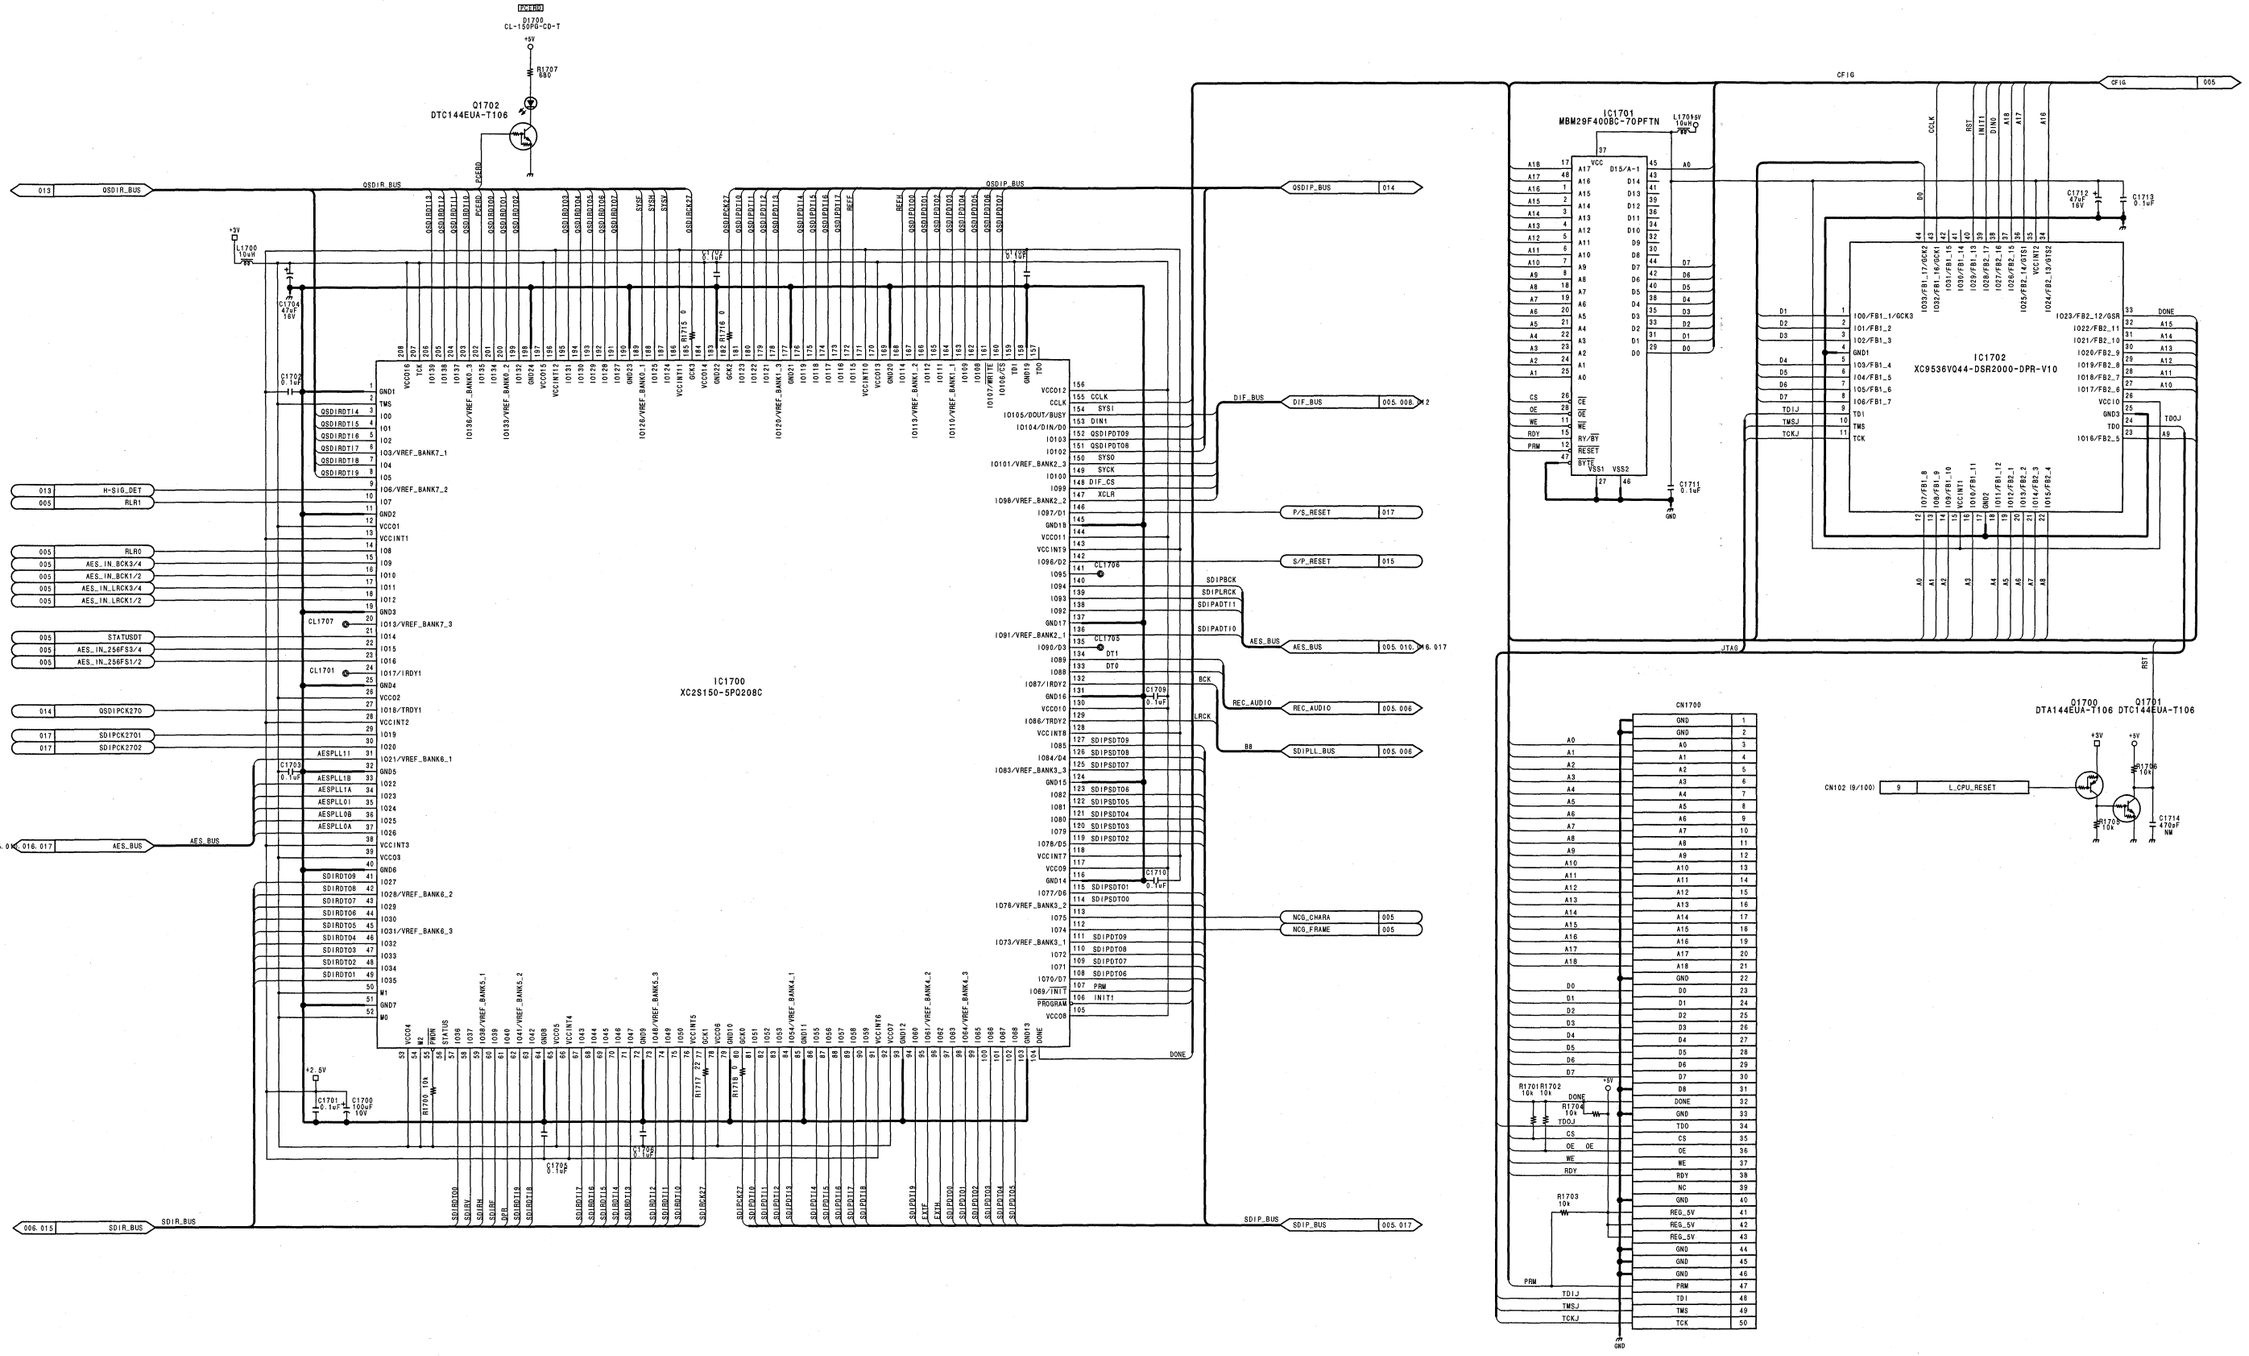

Audio process

APR-45 (16/17)

BOARD NO. 1-675-517-14
LOT NO. 134-
DSR-2000_APR-45_014_16

APR-45 (17/17)

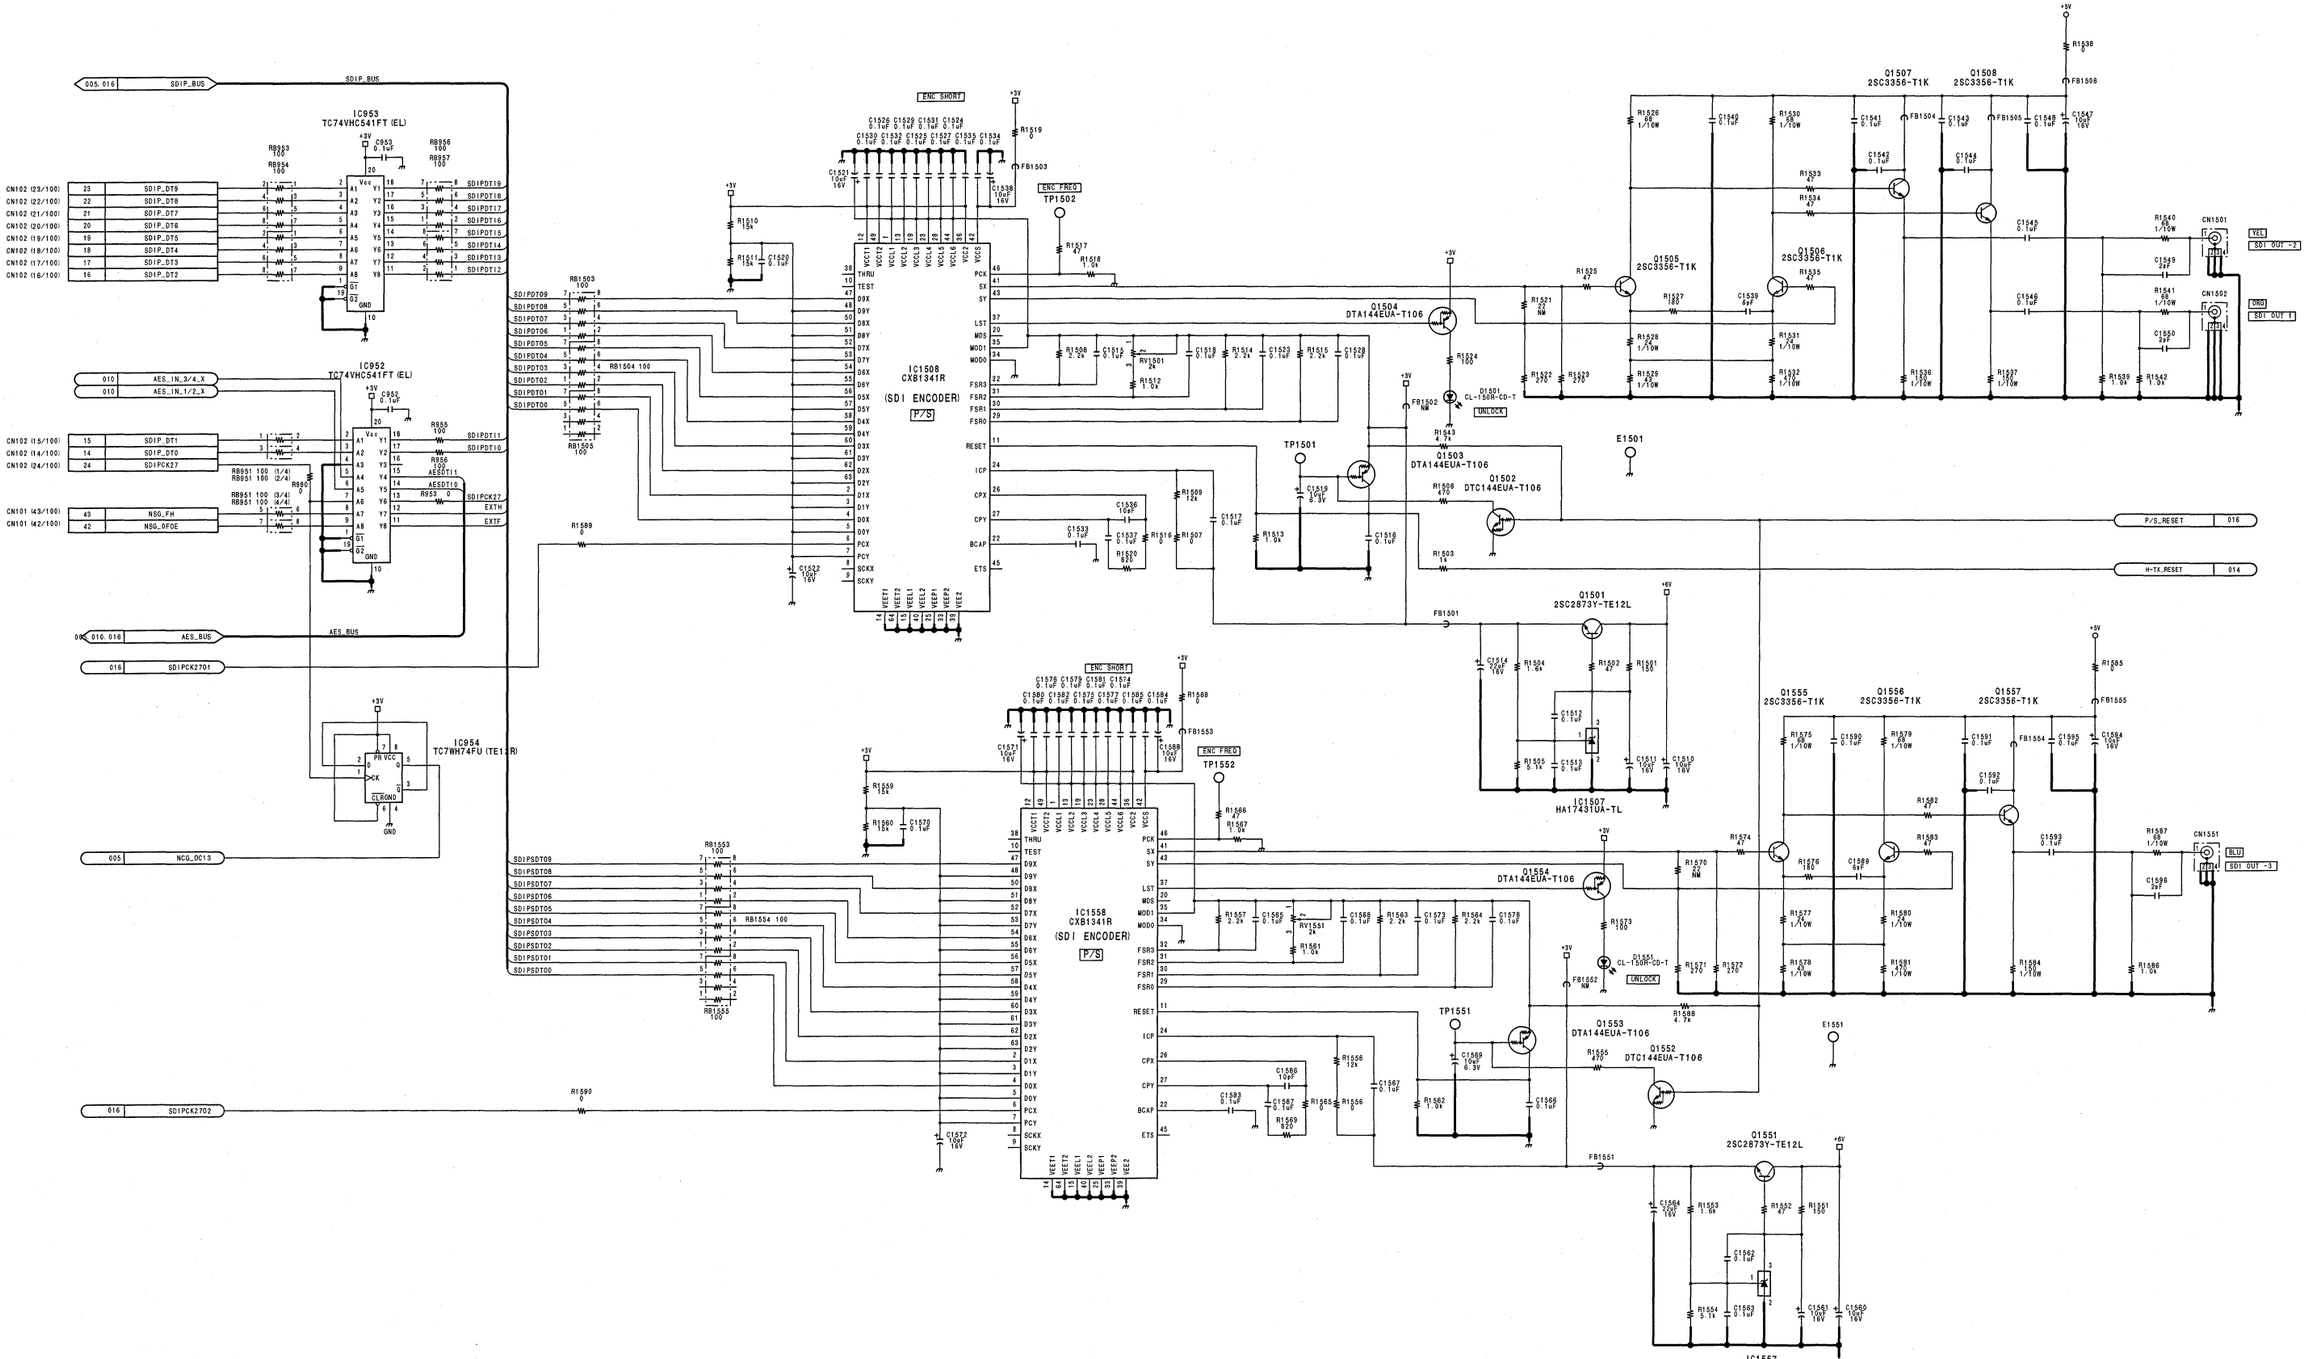

Audio process

APR-45 (17/17)

BOARD NO. 1-675-517-14
LOT NO. 134-
DSR-2000_APR-45_014_17

APR-45 (4/19)

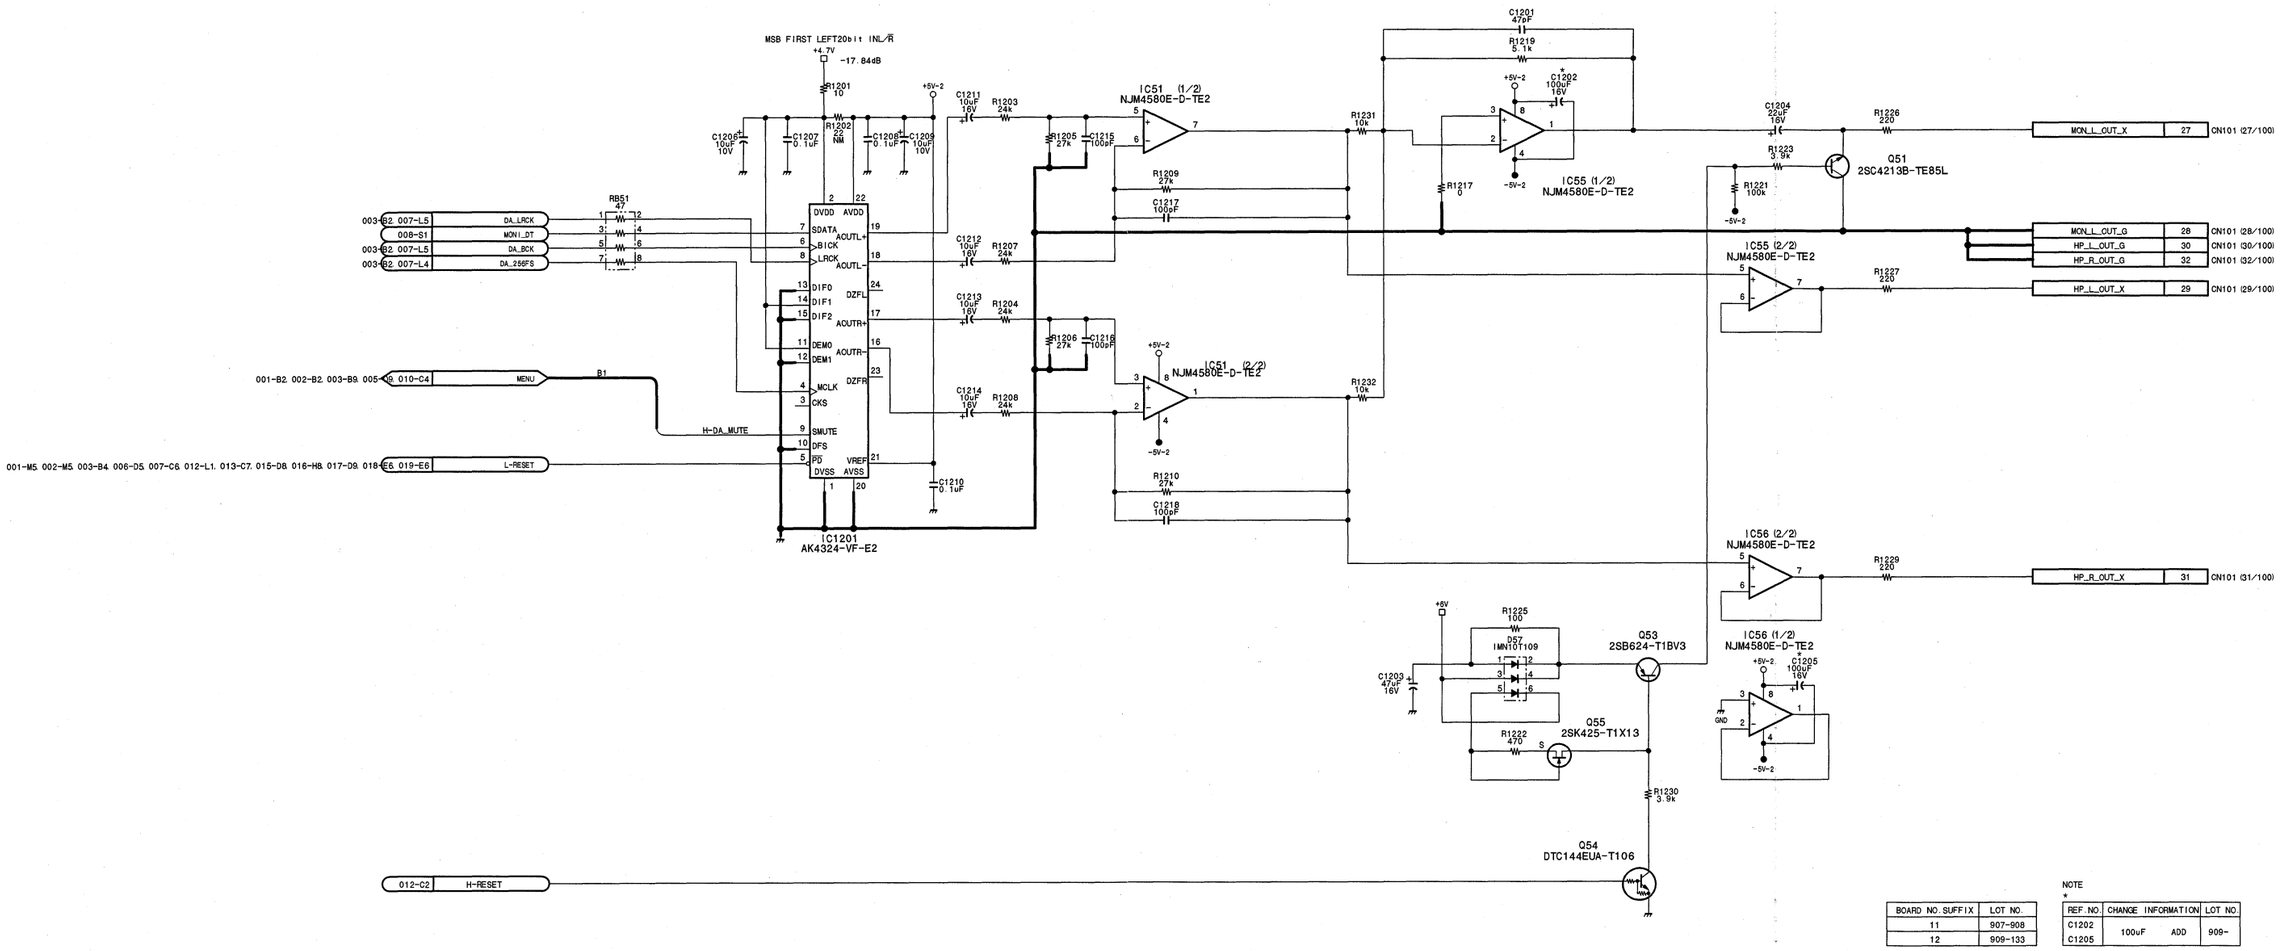

BOARD NO. SUFFIX	LOT NO.
11	907-908
12	909-133

NOTE
*

REF. NO.	CHANGE INFORMATION		LOT NO.
C1202	100uF	ADD	909-
C1205			

Audio process

APR-45 (4/19)

BOARD NO. 1-675-517-11, 12
LOT NO. 907-0B1
DSR-2000_APR-45_C12_4

APR-45 (5/19)

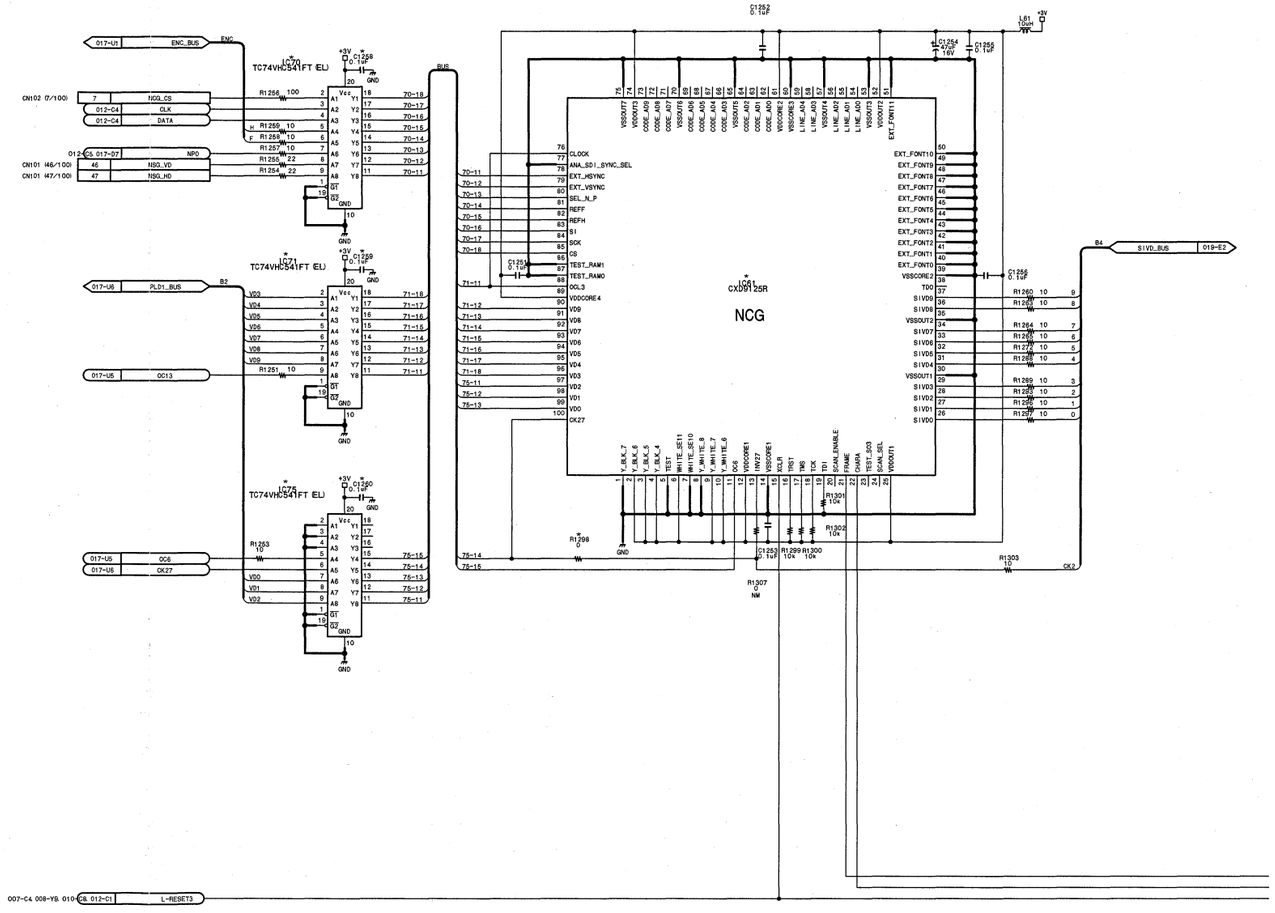

Note
In Lots #907 and #908, the DU-95 board had been mounted on the APR-45 board as a piggyback board. However, from Lot #909, the APR-45 board includes the circuits correspond to the DU-95 board.

APR-45 (5/19)

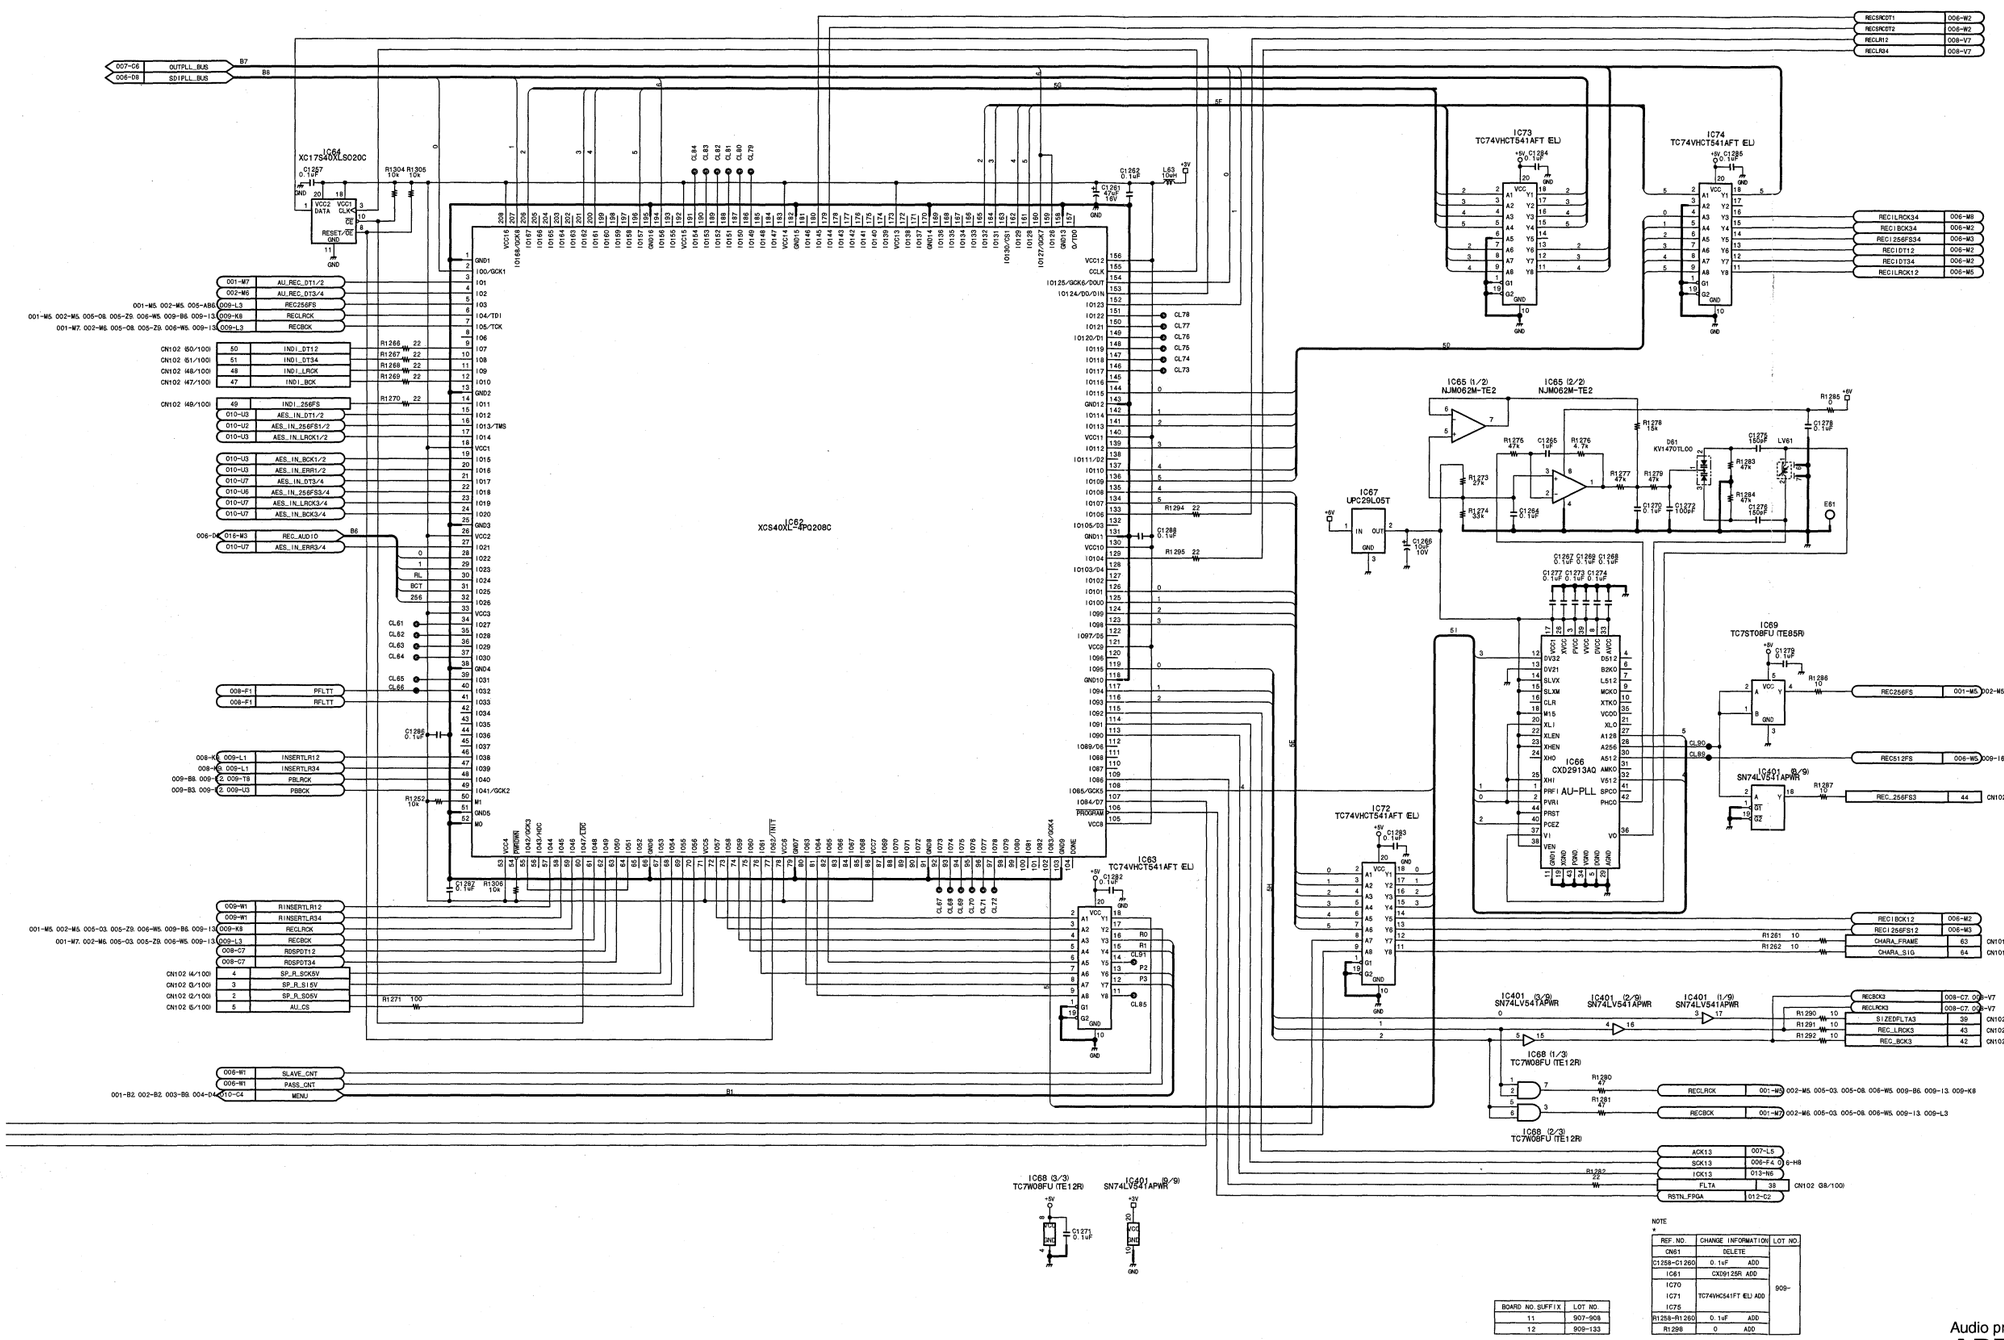

NOTE
*

REF. NO.	CHANGE INFORMATION	LOT NO.
CN51	DELETE	909-
C1258-C1260	0.1uF ADD	
IC61	CXD9125R ADD	
IC70 IC71 IC75	TC74VHC541FT (EL) ADD	
R1258-R1260	0.1uF ADD	
R1298	0 ADD	

BOARD NO. SUFFIX	LOT NO.
11	907-908
12	909-133

Audio process

APR-45 (5/19)

BOARD NO. 1-675-517-11, 12
LOT NO. 907-0B1
DSR-2000_APR-45_C12_5

APR-45 (6/19)

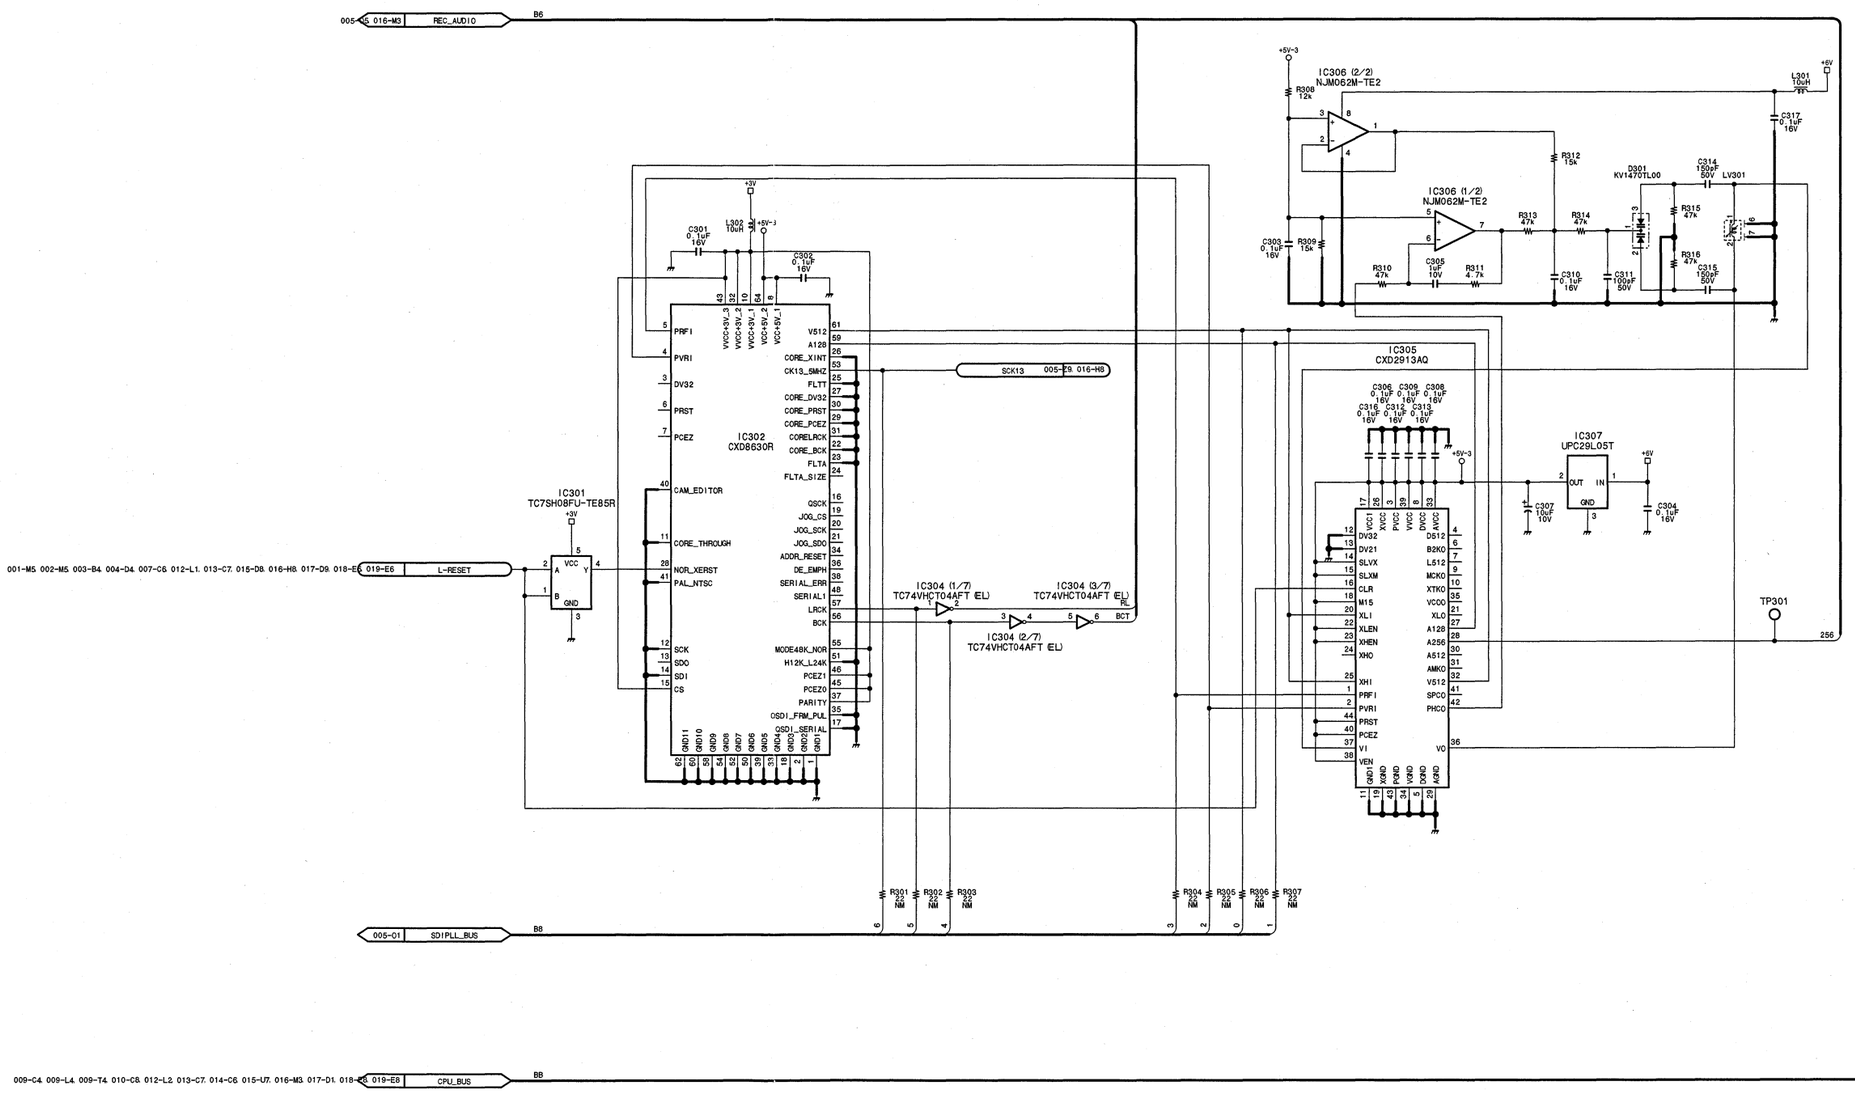
005-05. 016-M3 REC_AUDIO B6
IC306 (2/2) NJM062M-TE2
IC306 (1/2) NJM062M-TE2
IC305 CXD2913AQ
IC307 UPC29L05T
IC302 CXD8630R
IC301 TC7SH08FU-TE85R
IC304 (1/7) TC74VHCT04AFT EL
IC304 (2/7) TC74VHCT04AFT EL
IC304 (3/7) TC74VHCT04AFT EL
SCK13 005-09. 016-H8
001-M5. 002-M5. 003-B4. 004-D4. 007-C6. 012-L1. 013-C7. 015-D8. 016-H8. 017-D9. 018-E6 019-E6 L-RESET
005-01 SDIPLL_BUS B8
009-C4. 009-L4. 009-T4. 010-C8. 012-L2. 013-C7. 014-C6. 015-U7. 016-M3. 017-D1. 018-E6 019-E8 CPU_BUS B8
TP301
256

APR-45 (6/19)

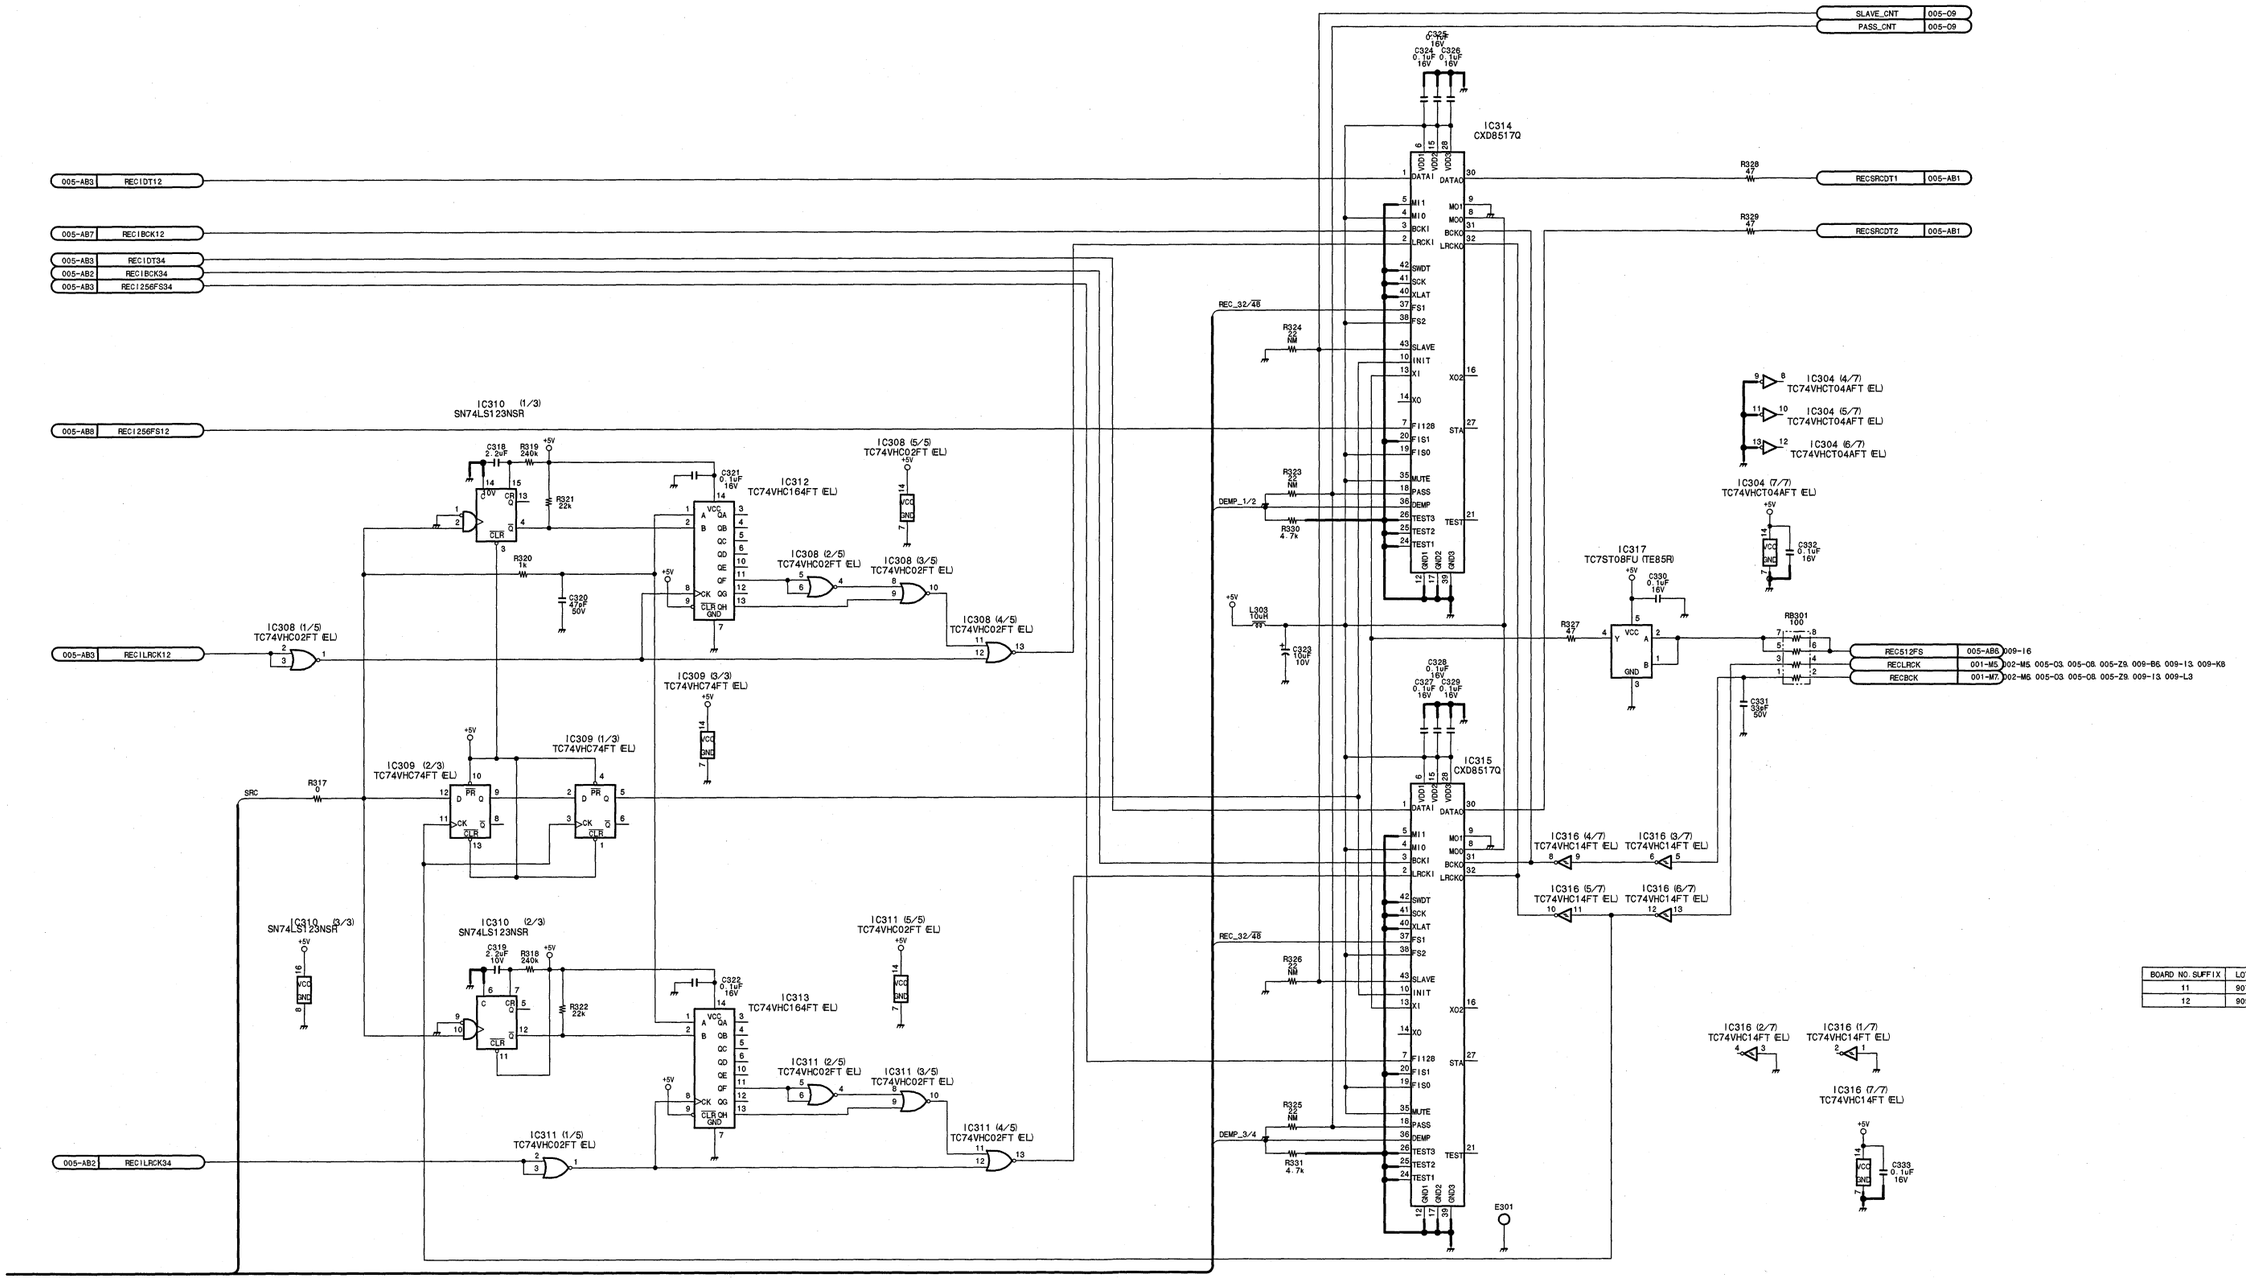

BOARD NO. SUFFIX	LOT NO.
11	907-908
12	909-133

Audio process

APR-45 (6/19)

BOARD NO. 1-675-517-11, 12
LOT NO. 907-0B1
DSR-2000_APR-45_C12_6

APR-45 (7/19)

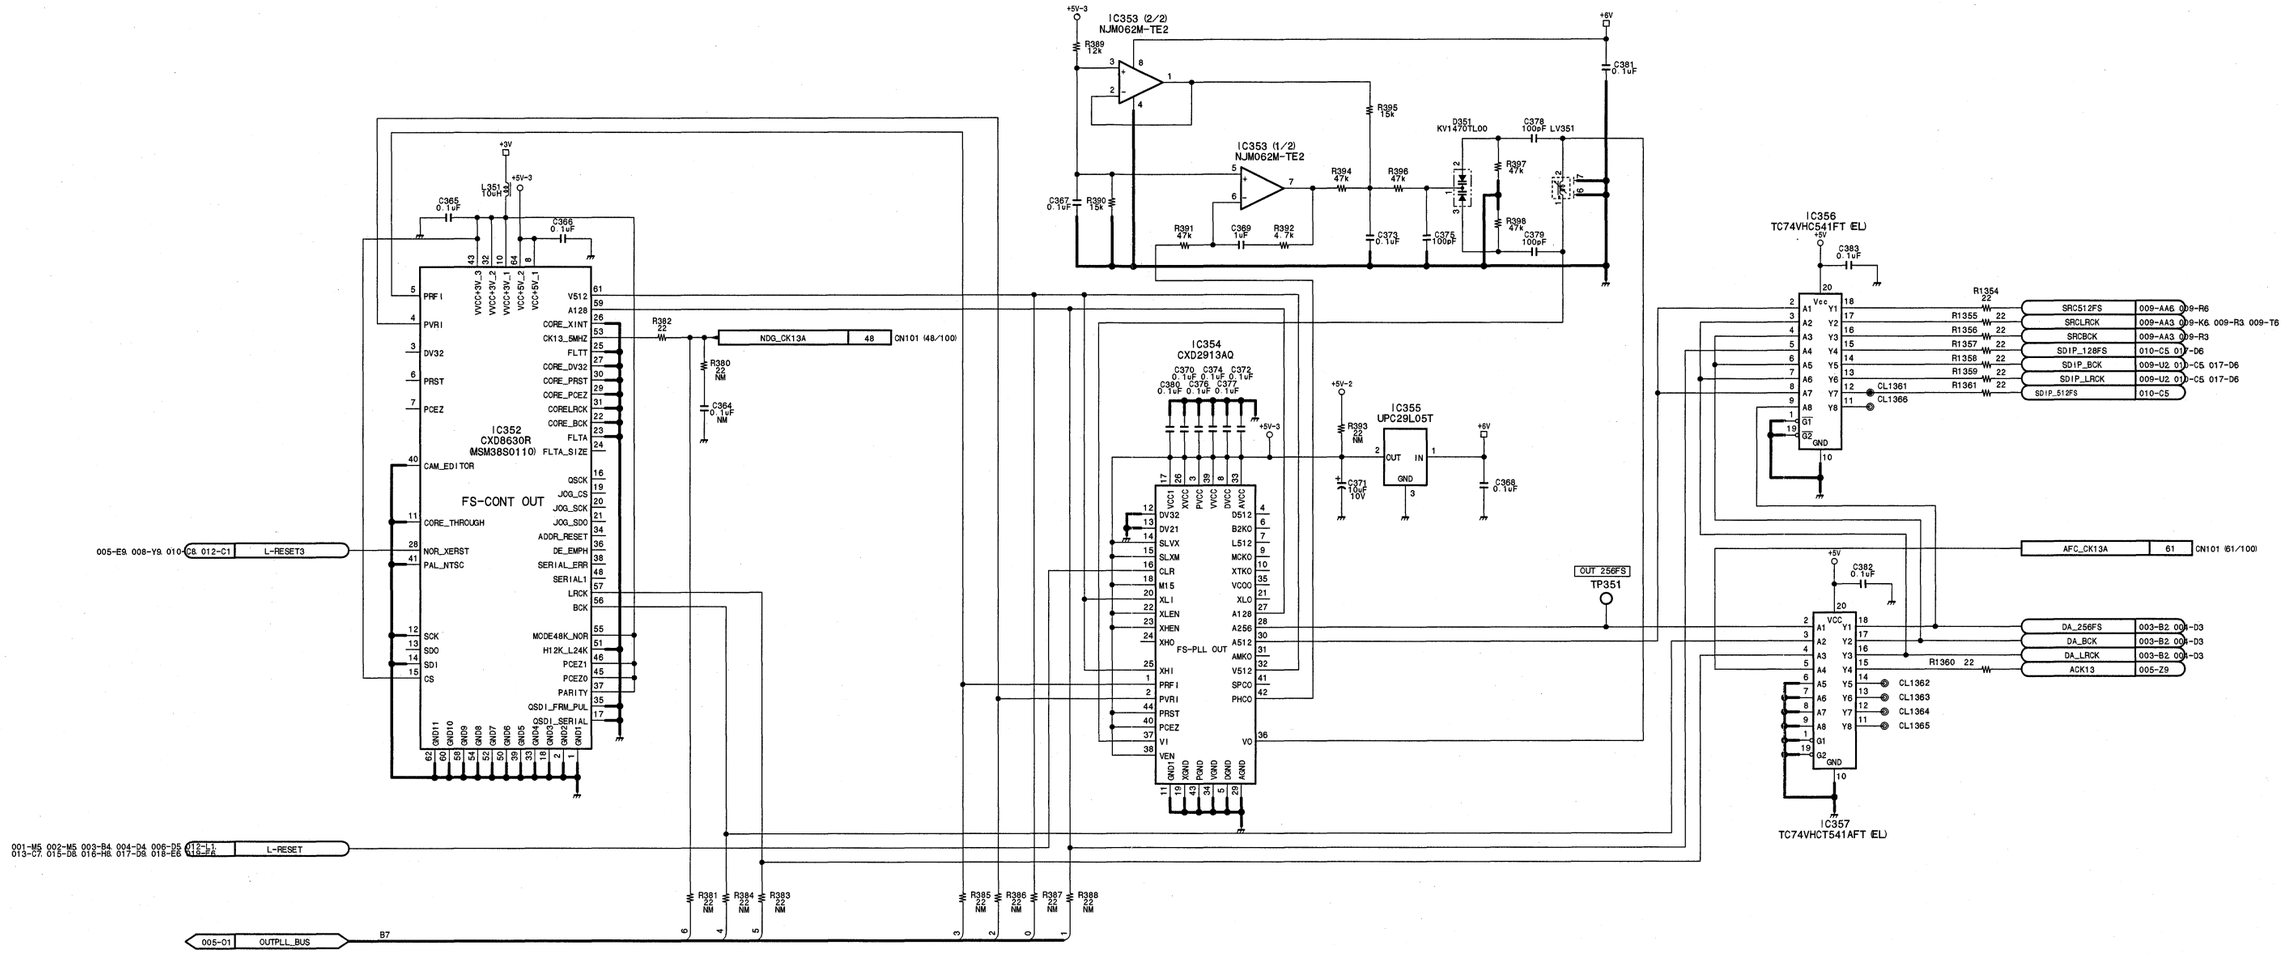

BOARD NO. SUFFIX	LOT NO.
11	907-908
12	909-133

Audio process

APR-45 (7/19)

BOARD NO. 1-675-517-11, 12
LOT NO. 907-0B1
DSR-2000_APR-45_C12_7

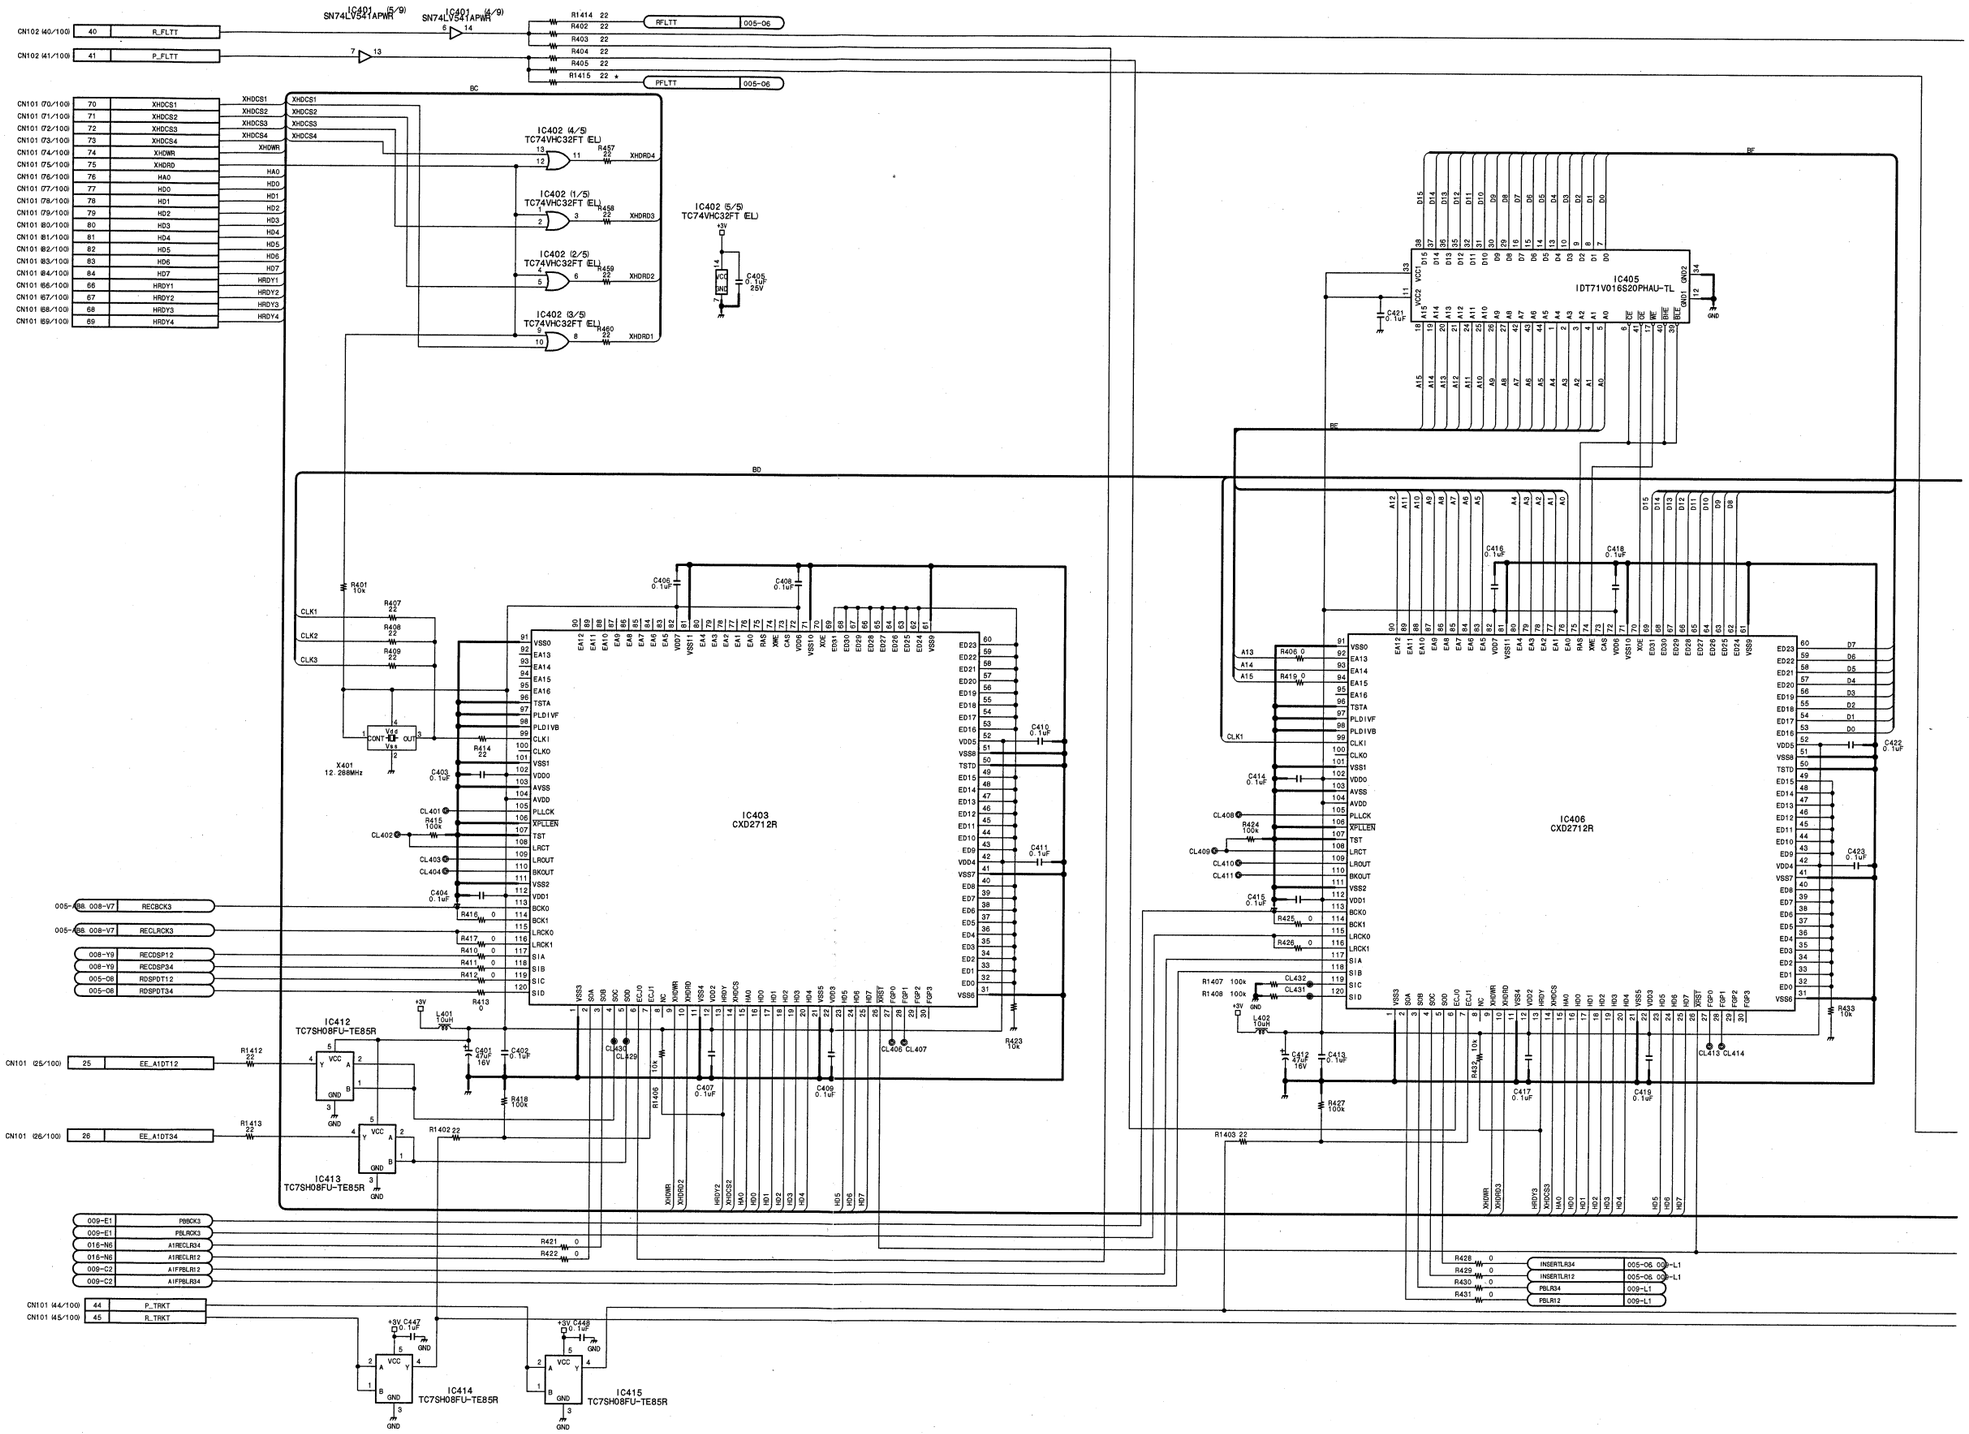

15-12 (a) 15-12 (a)

DSR-2000/2000P

APR-45 (8/19)

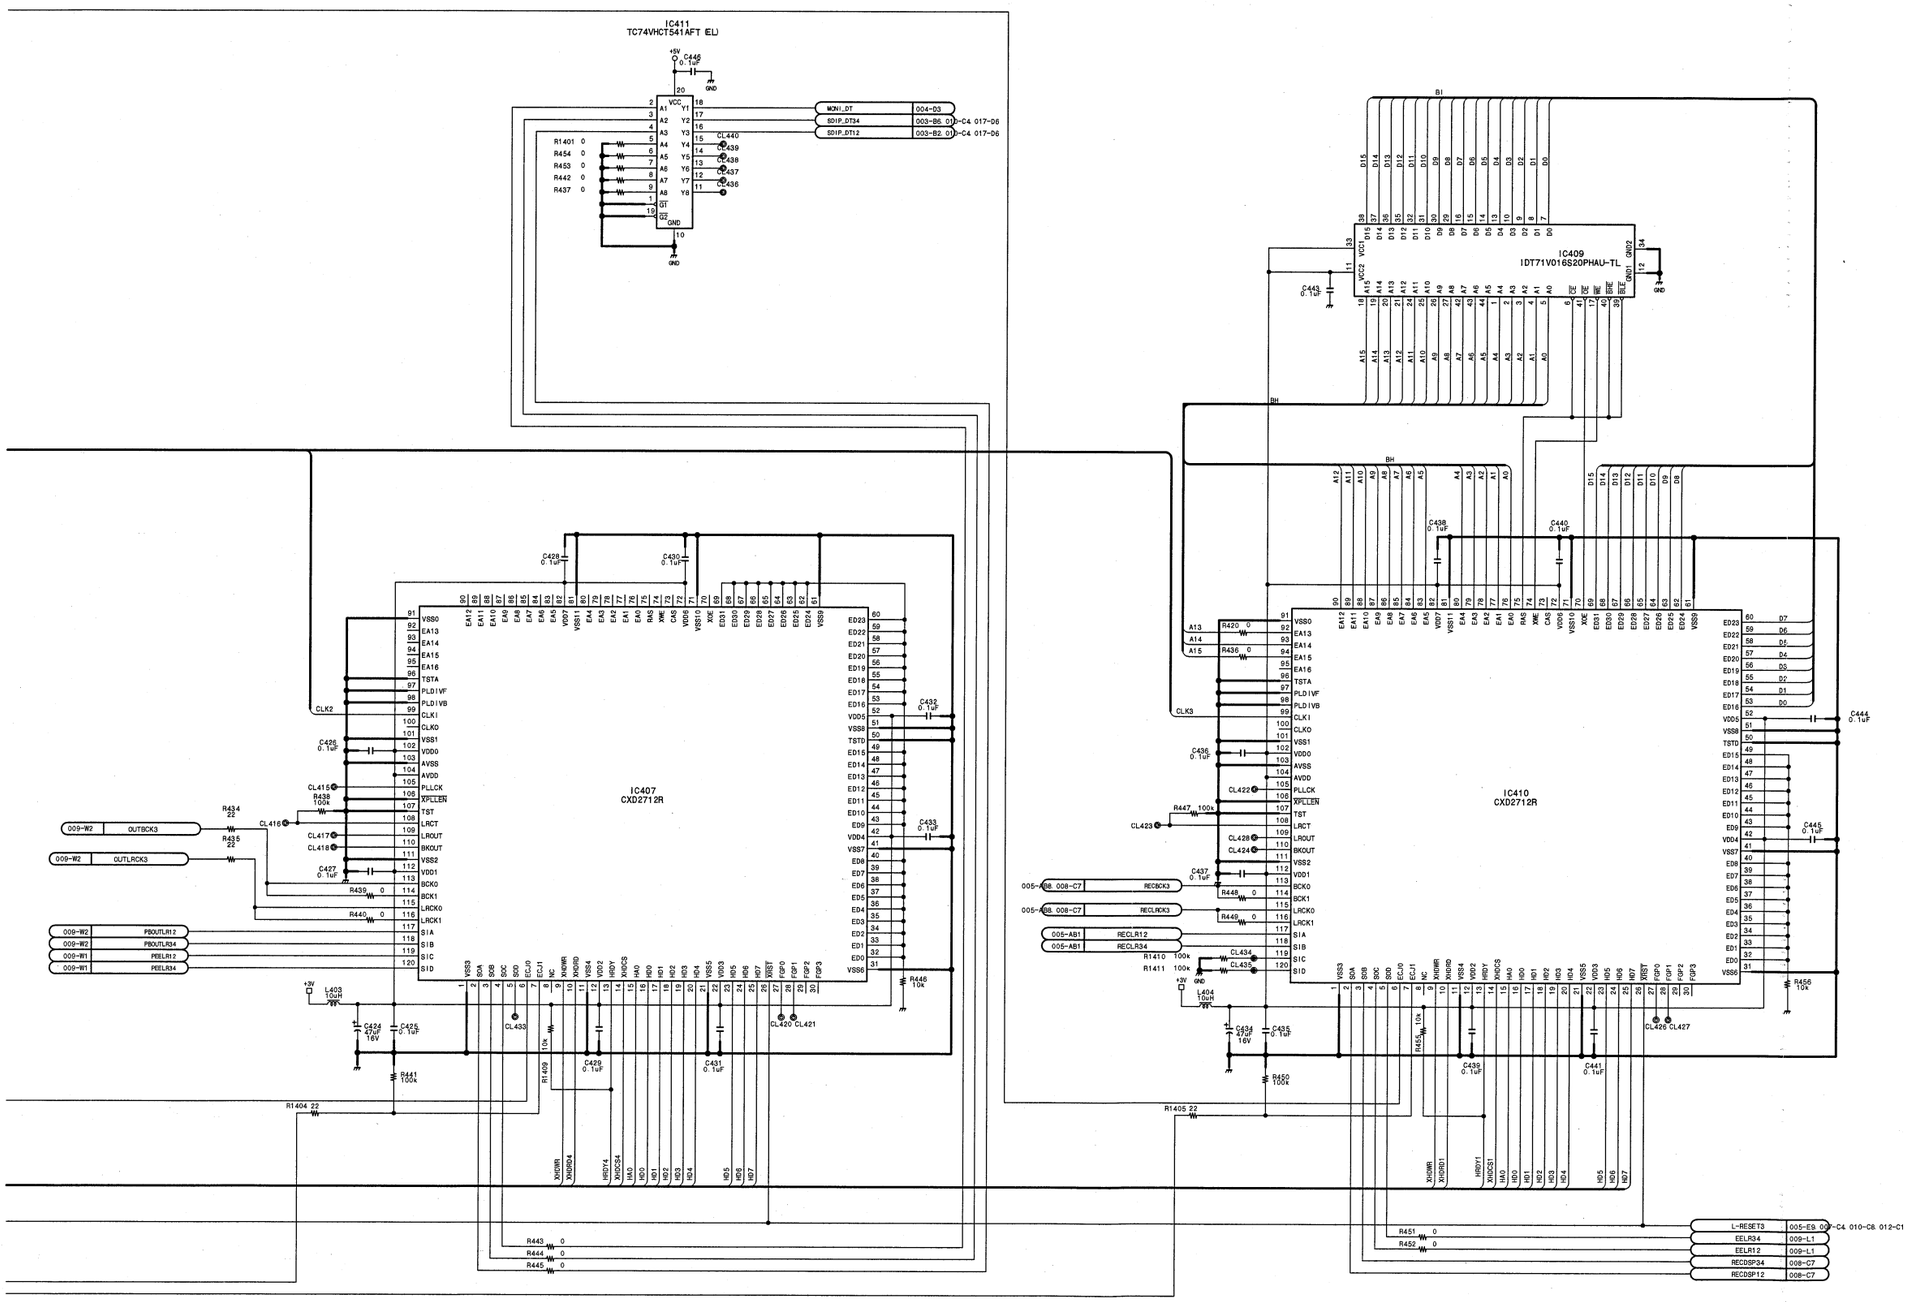

BOARD NO. SUFFIX	LOT NO.
11	907-908
12	909-133

NOTE
*

REF. NO.	CHANGE INFORMATION	LOT NO.
R1415	22 ADD	909-

Audio process
APR-45 (8/19)
BOARD NO. 1-675-517-11, 12
LOT NO. 907-0B1
DSR-2000_APR-45_C12_8

APR-45 (9/19)

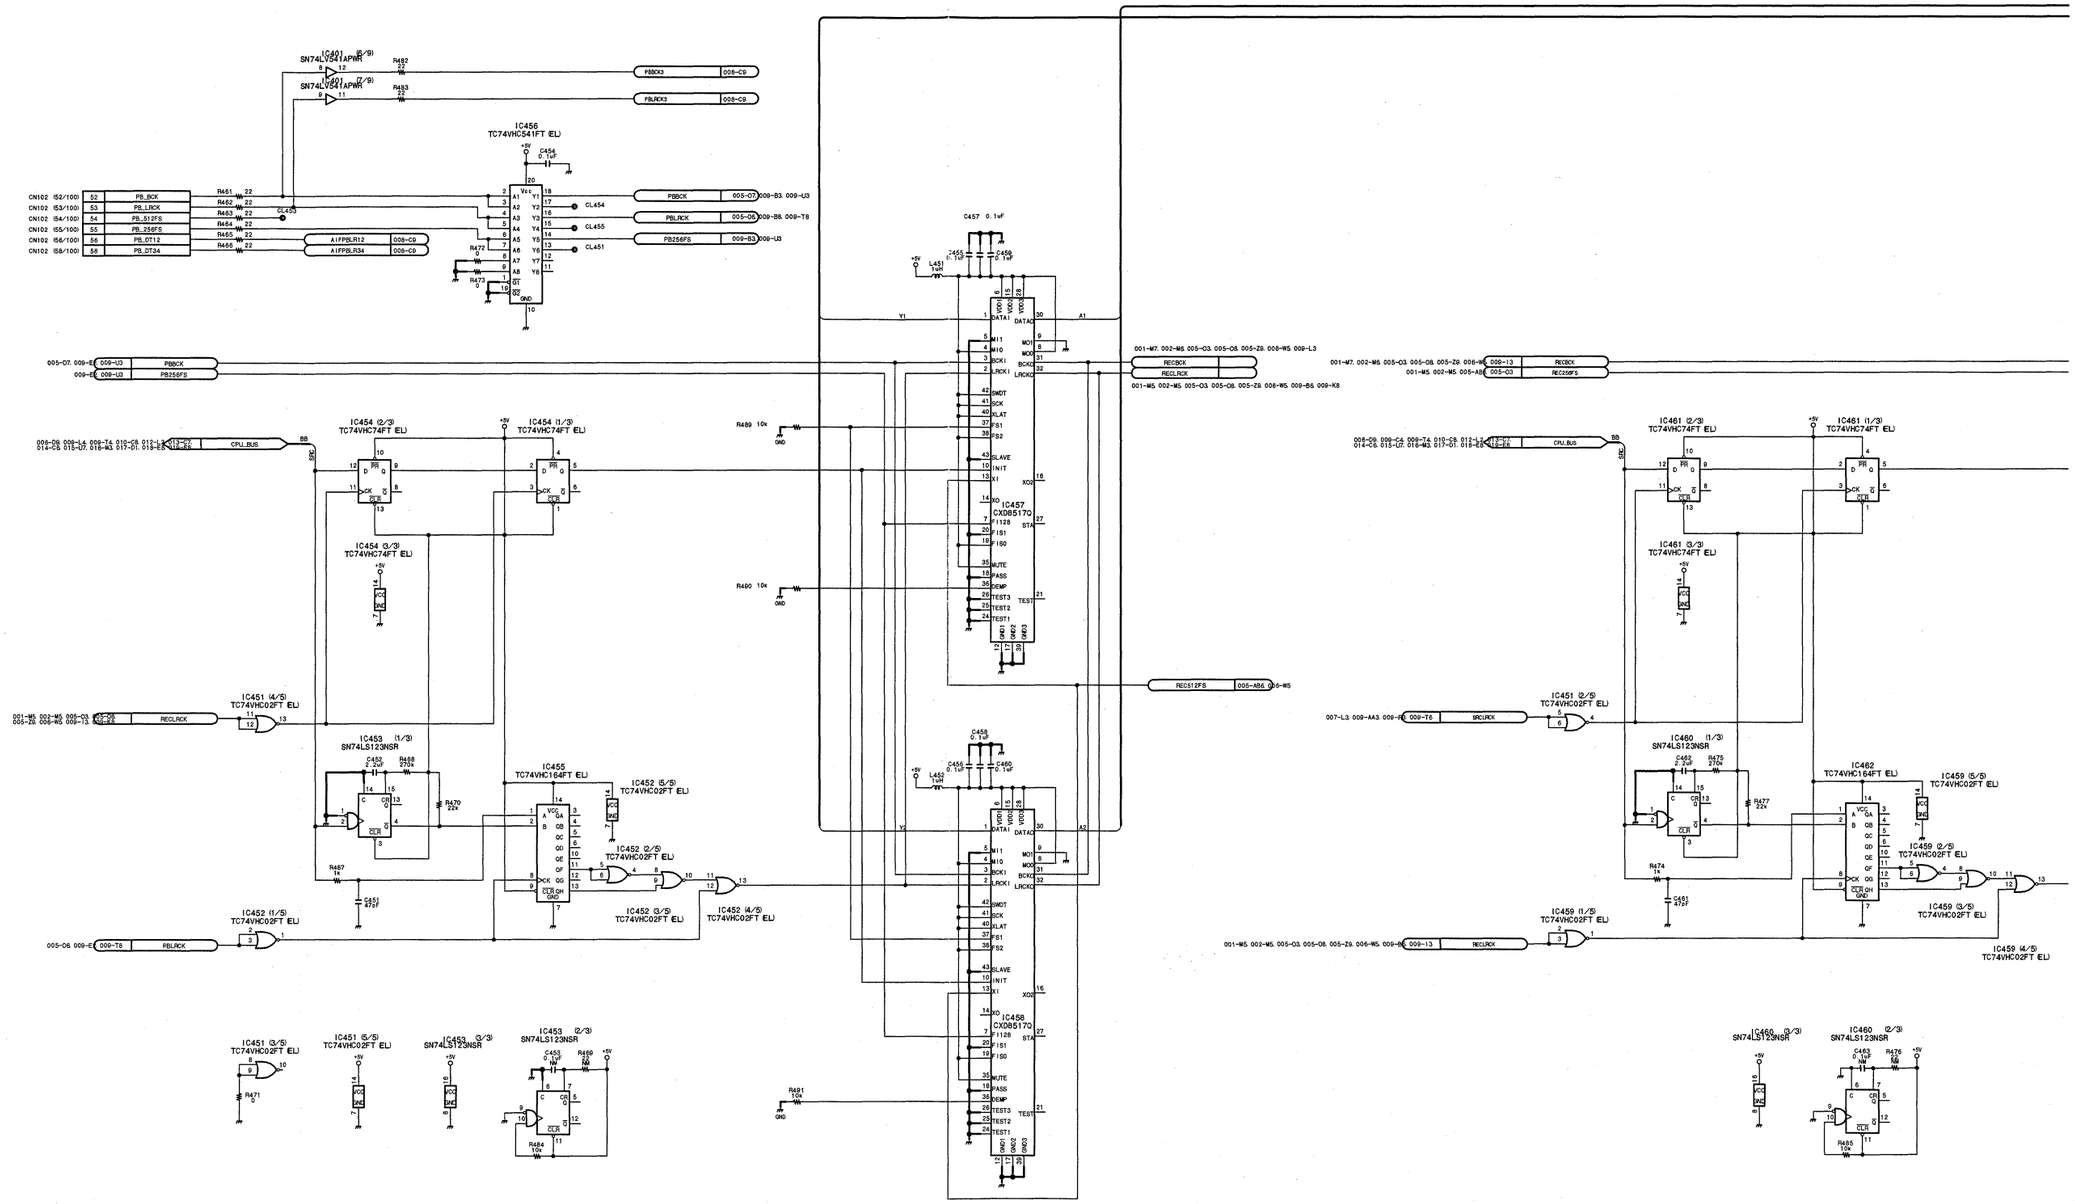

15-14 (a) 15-14 (a)

DSR-2000/2000P

A B C D E F G H

APR-45 (9/19)

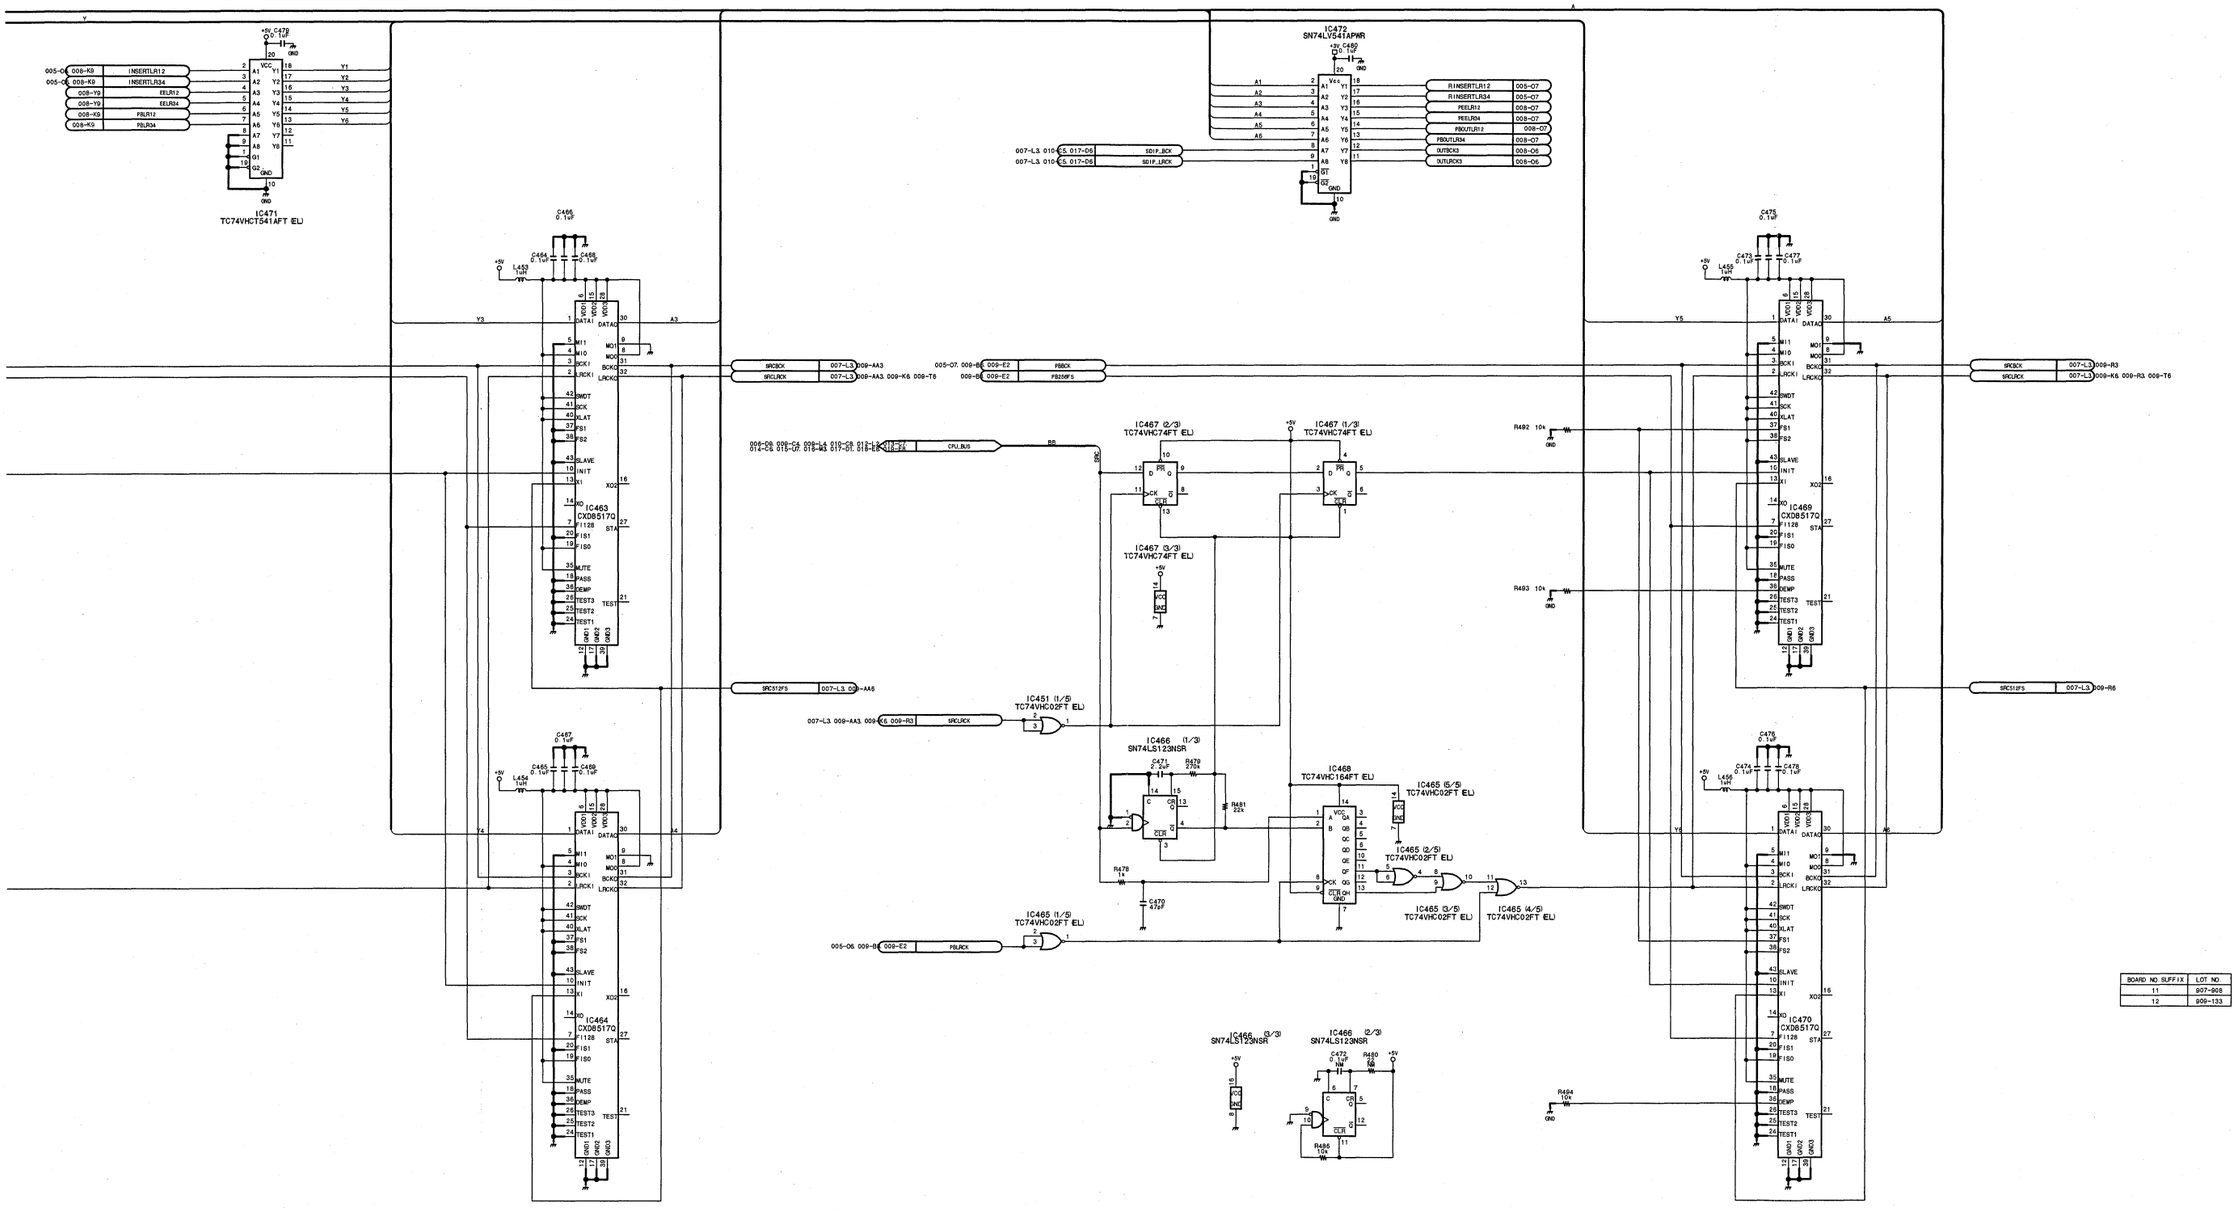

BOARD NO. SUFFIX	LOT NO.
11	907-905
12	909-133

Audio process

APR-45 (9/19)

BOARD NO. 1-675-517-11, 12
LOT NO. 907-0B1
DSR-2000_APR-45_C12_9

APR-45 (10/19)

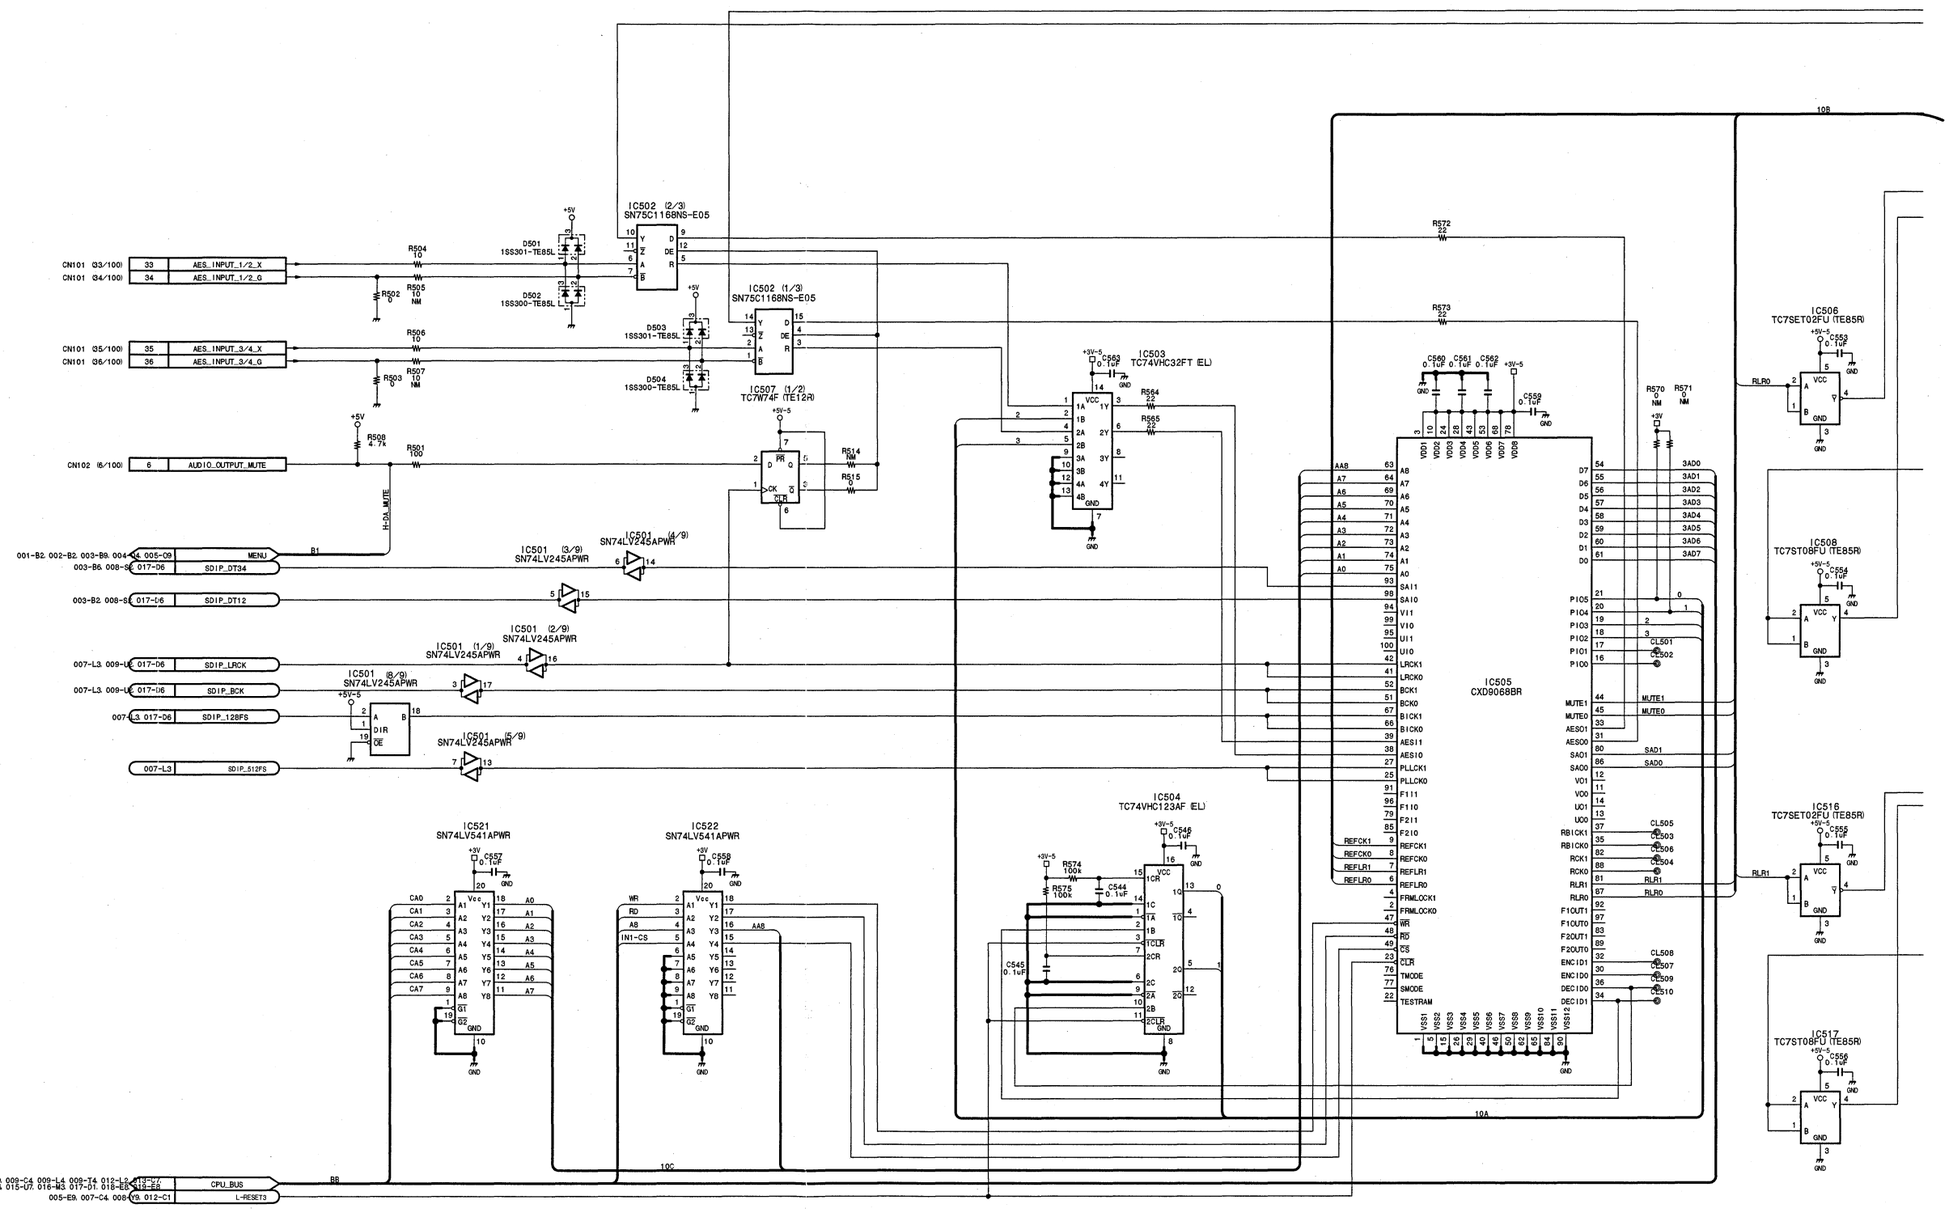

15-16 (a) 15-16 (a)

DSR-2000/2000P

A B C D E F G H

APR-45 (10/19)

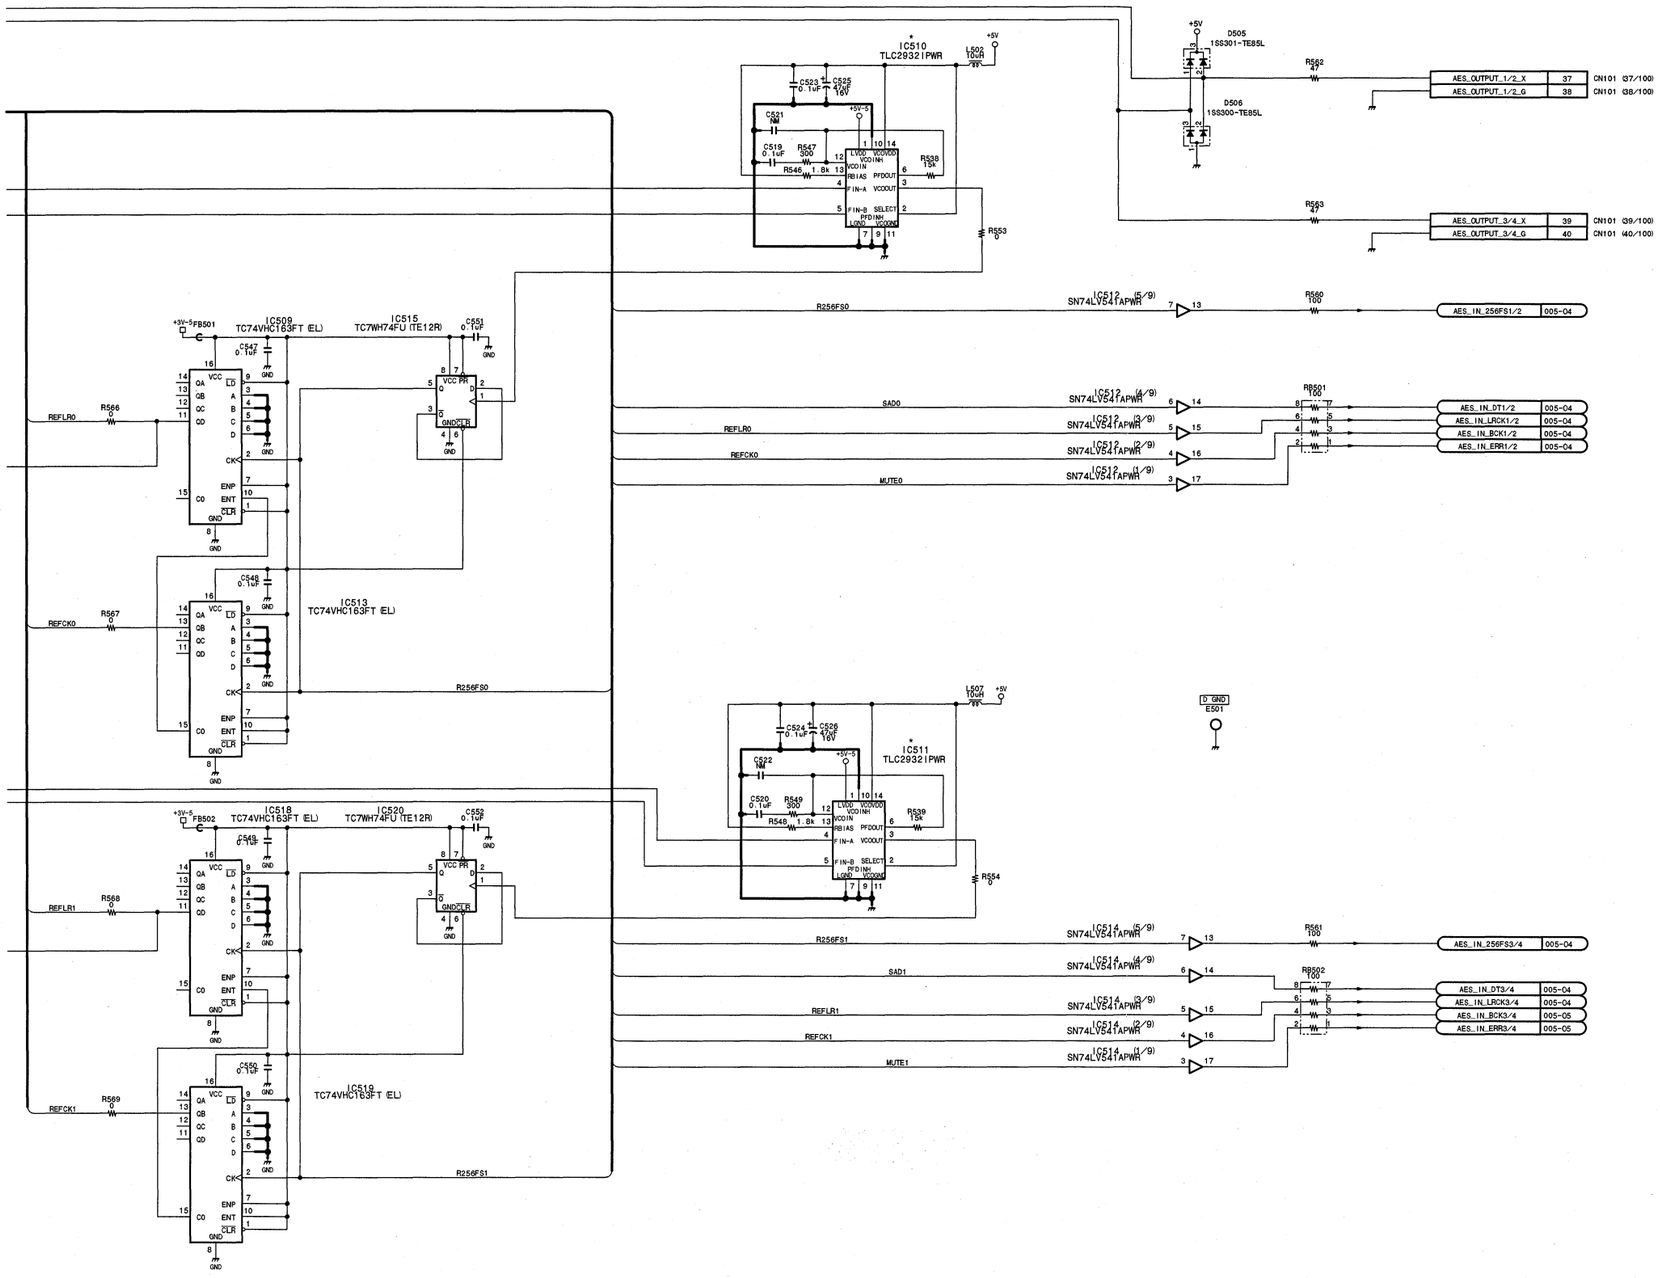

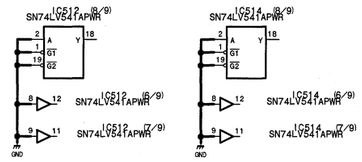





BOARD NO. SUFFIX	LOT NO.
11	907-908
12	909-133

NOTE
*

REF. NO.	CHANGE INFORMATION	LOT NO.
C527	100uF ADD	909-
C528		
IC510	TLC29321PW-E20	001-
IC511	→ TLC29321PWR	

Audio process

APR-45 (10/19)

BOARD NO. 1-675-517-11, 12
LOT NO. 907-0B1
DSR-2000_APR-45_C12_10

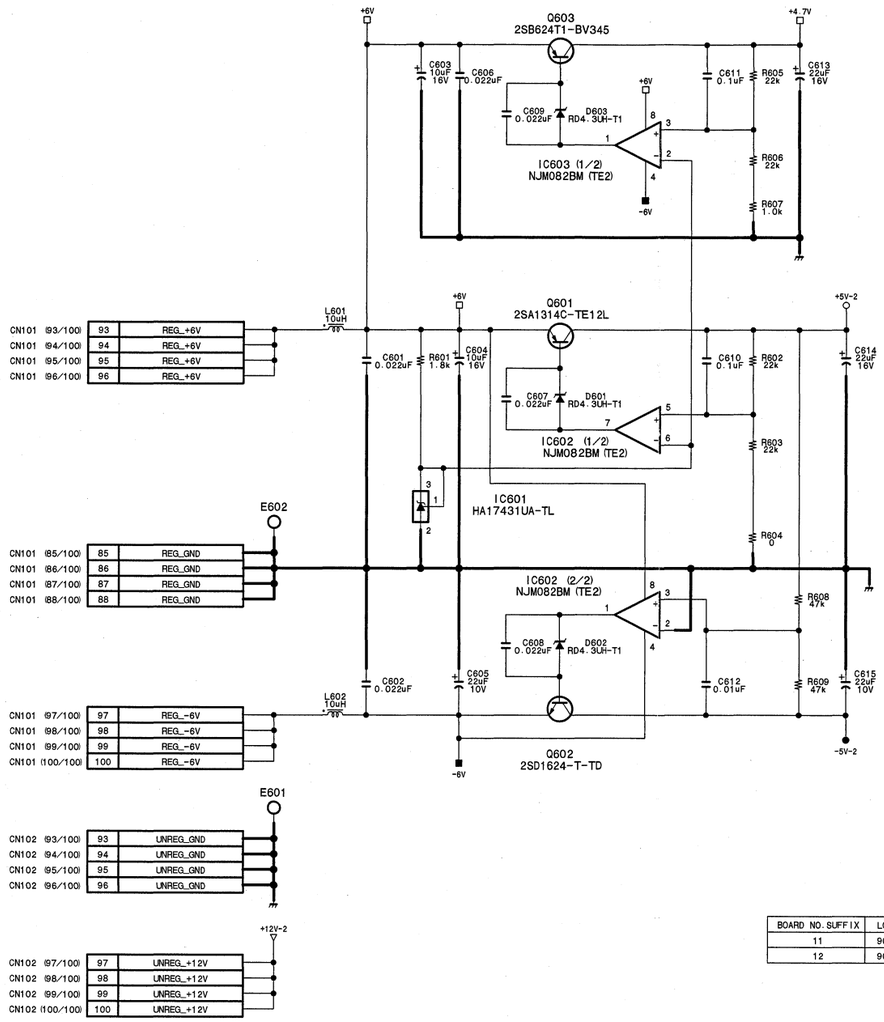



GND	41	CN101 (41/100)
GND	49	CN101 (49/100)
GND	53	CN101 (53/100)
GND	58	CN101 (58/100)
GND	65	CN101 (65/100)
GND	62	CN101 (62/100)

GND	1	CN102 (1/100)
GND	13	CN102 (13/100)
GND	57	CN102 (57/100)
GND	69	CN102 (69/100)
GND	73	CN102 (73/100)
GND	81	CN102 (81/100)

BOARD NO. SUFFIX	LOT NO.
11	907-908
12	909-133

Audio process

APR-45 (11/19)

BOARD NO. 1-675-517-11, 12

LOT NO. 907-0B1

DSR-2000_APR-45_C12_11

APR-45 (12/19)

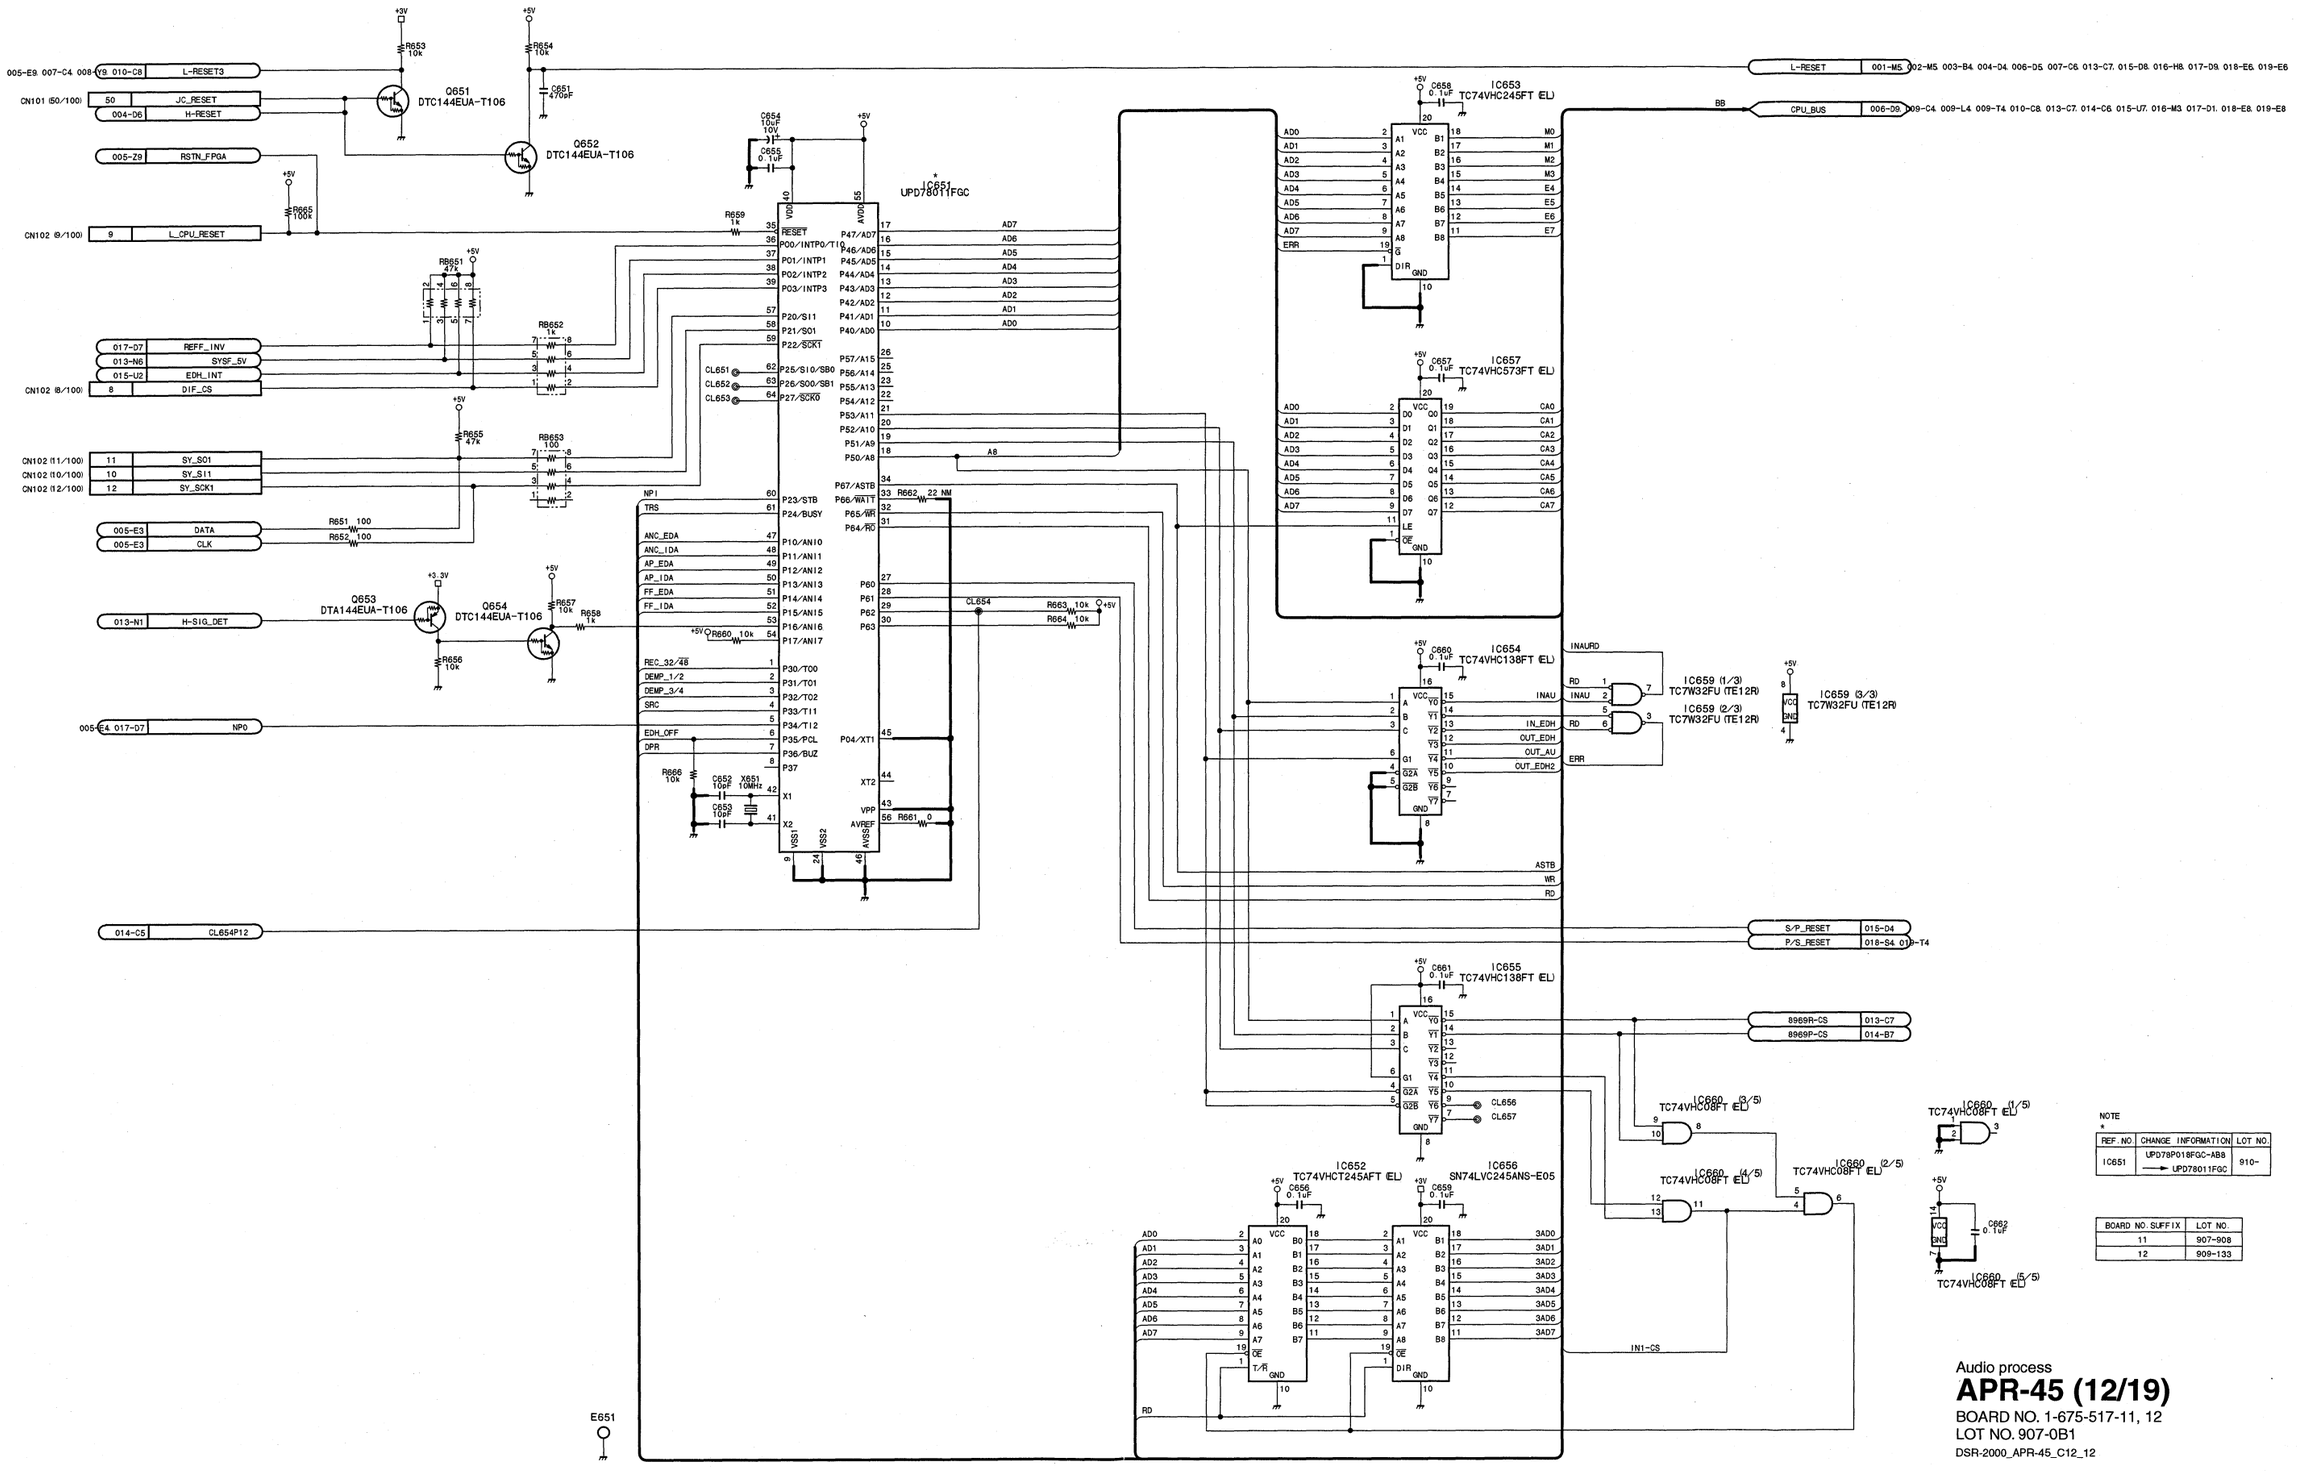

NOTE
*

REF. NO.	CHANGE INFORMATION	LOT NO.
IC651	UPD78P018FGC-AB8 → UPD78011FGC	910-

BOARD NO. SUFFIX	LOT NO.
11	907-908
12	909-133

Audio process

APR-45 (12/19)

BOARD NO. 1-675-517-11, 12
LOT NO. 907-0B1
DSR-2000_APR-45_C12_12

APR-45 (13/19)

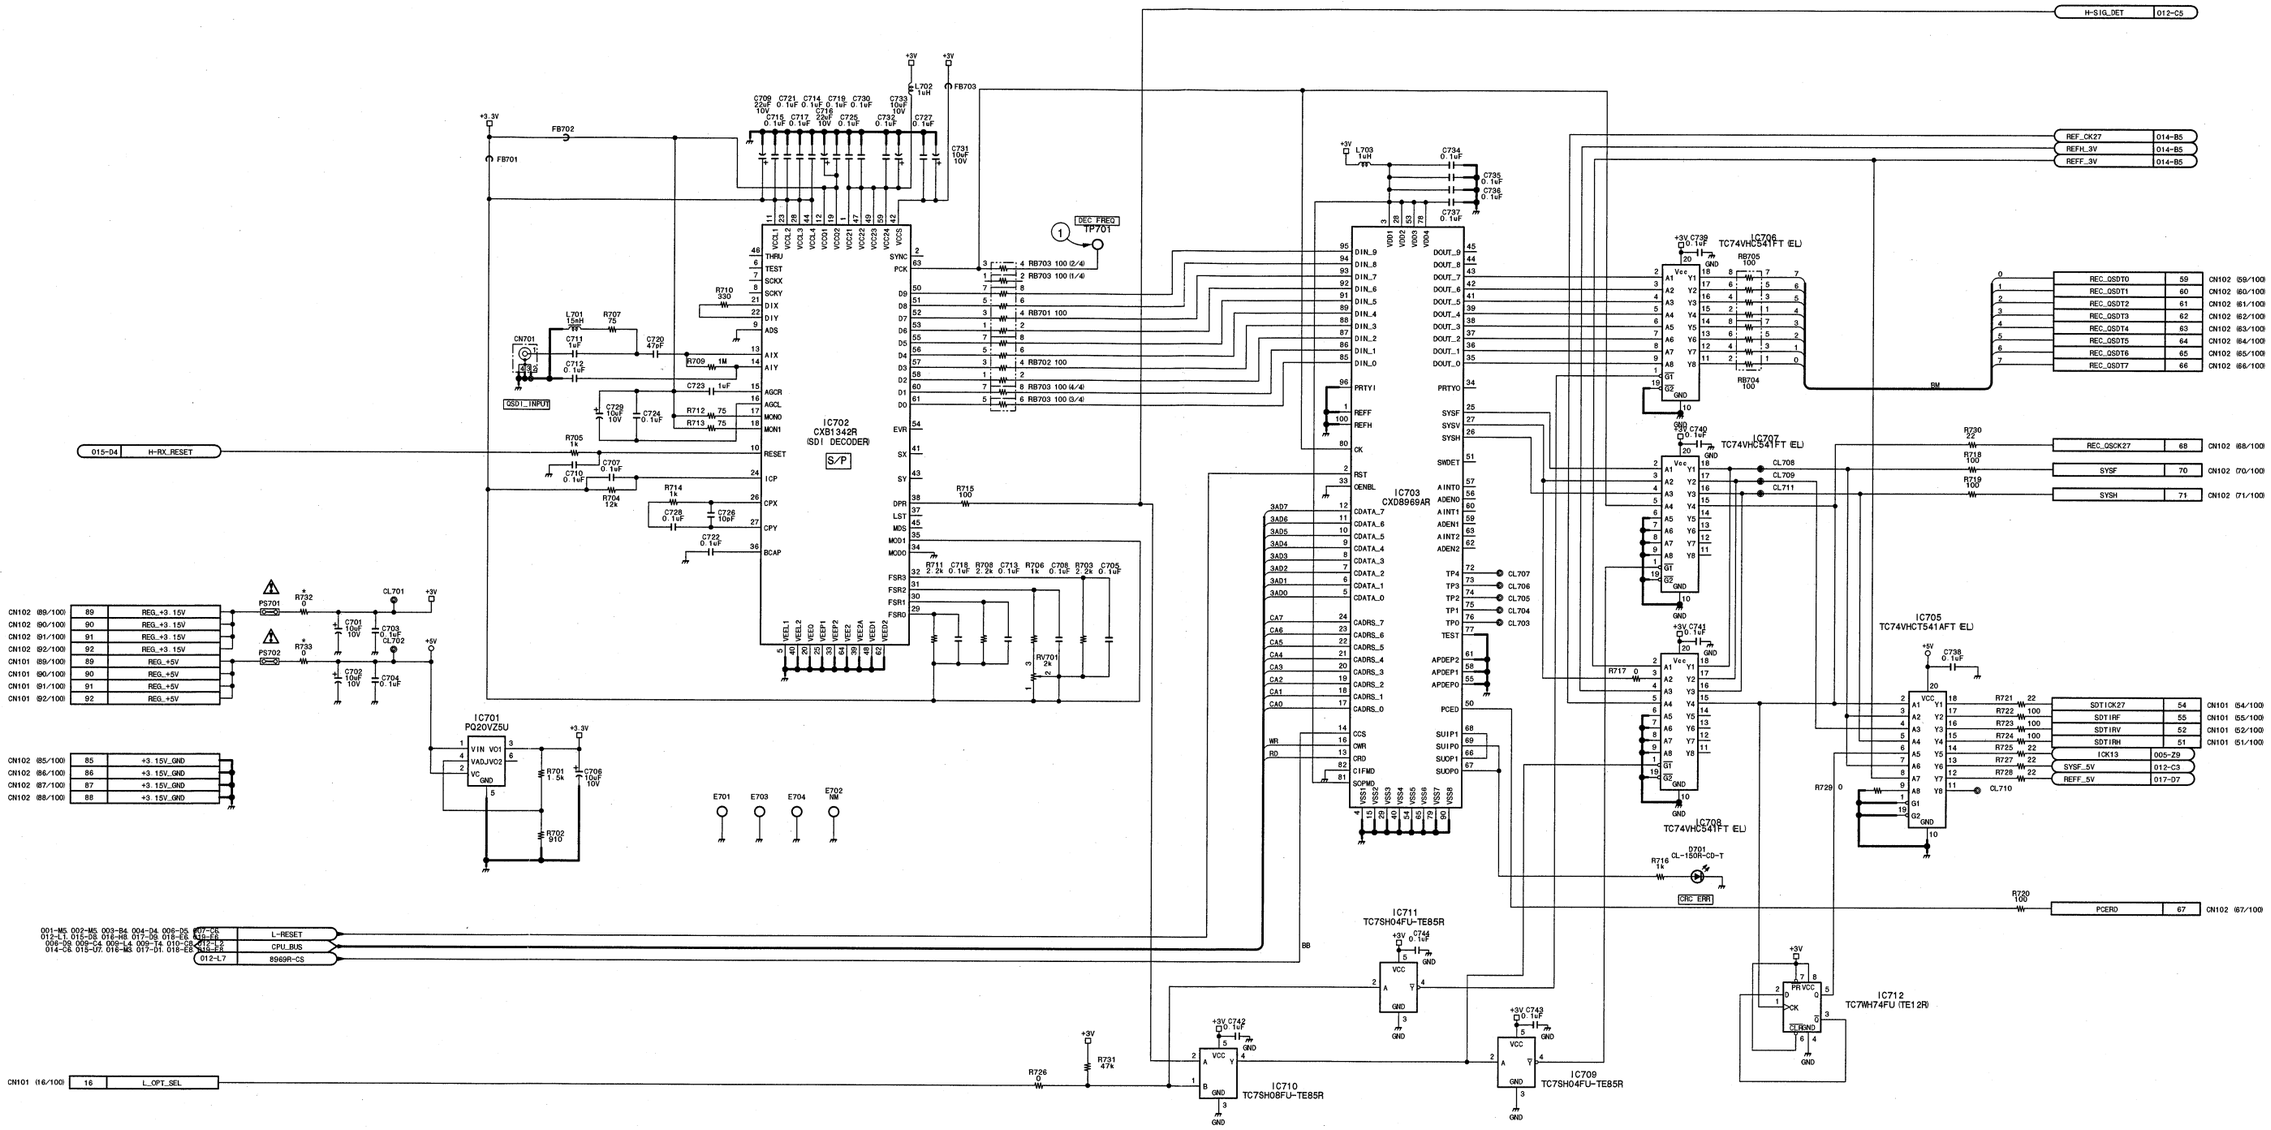

① TP701 DEC FREQ

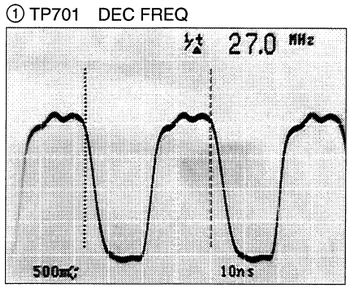

BOARD NO. SUFFIX	LOT NO.
11	907-908
12	909-133

NOTE
*

REF. NO.	CHANGE INFORMATION	LOT NO.
E702 FB704 FB705	DELETE	909-
R732 R733	0 ADD	

Audio process

APR-45 (13/19)

BOARD NO. 1-675-517-11, 12
LOT NO. 907-0B1
DSR-2000_APR-45_C12_13

15-20 (a) 15-20 (a)

DSR-2000/2000P

APR-45 (14/19)

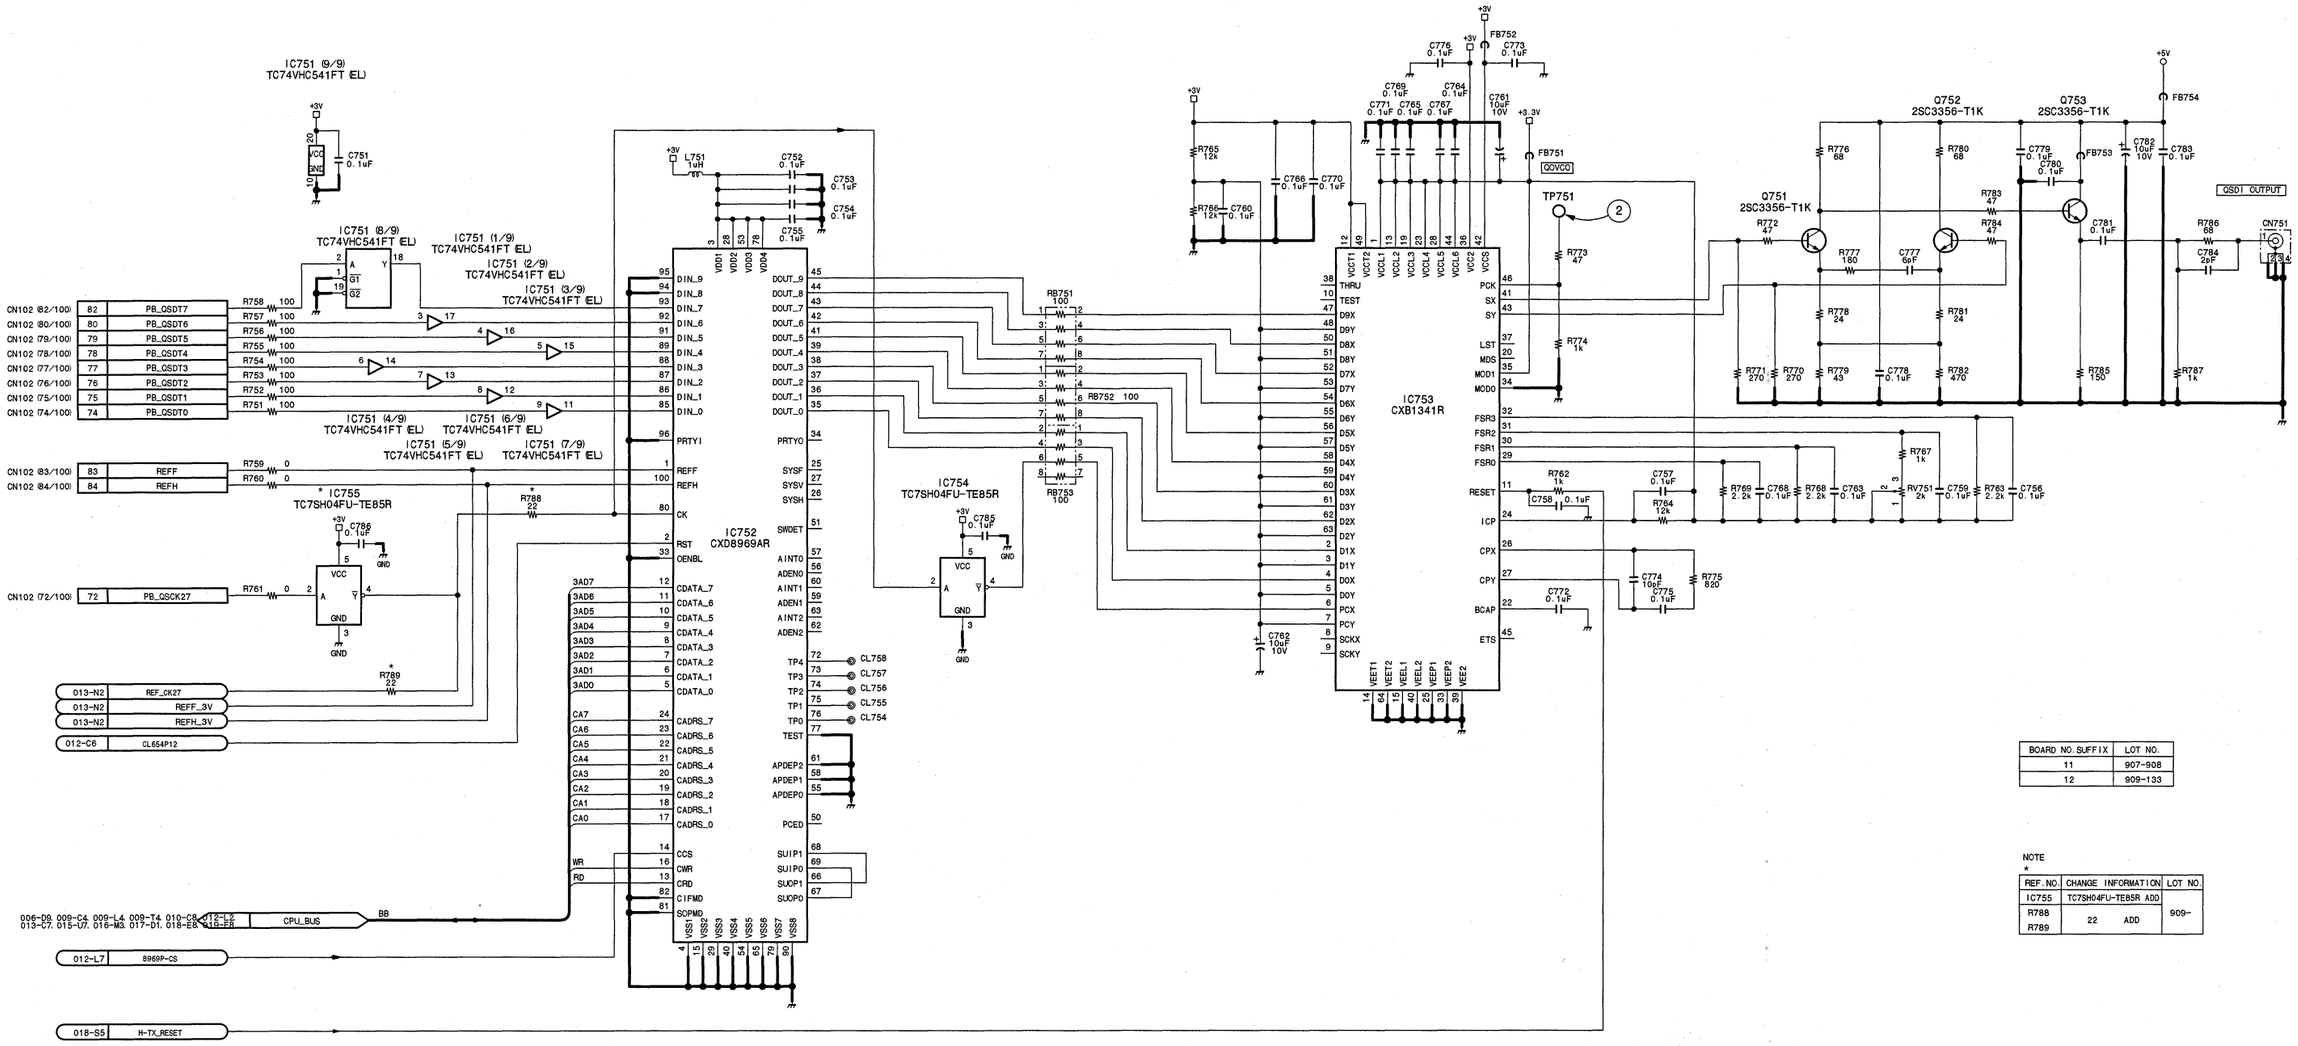

BOARD NO. SUFFIX	LOT NO.
11	907-908
12	909-133

NOTE
*

REF. NO.	CHANGE INFORMATION	LOT NO.
IC755	TC7SH04FU-TE85R ADD	909-
R788 R789	22 ADD	

② TP751 QOVCO

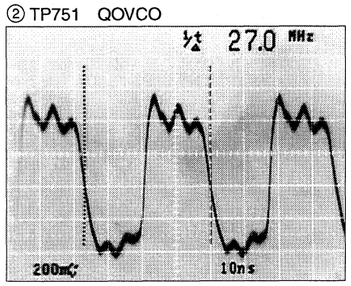

Audio process
APR-45 (14/19)
BOARD NO. 1-675-517-11, 12
LOT NO. 907-0B1
DSR-2000_APR-45_C12_14

APR-45 (15/19)

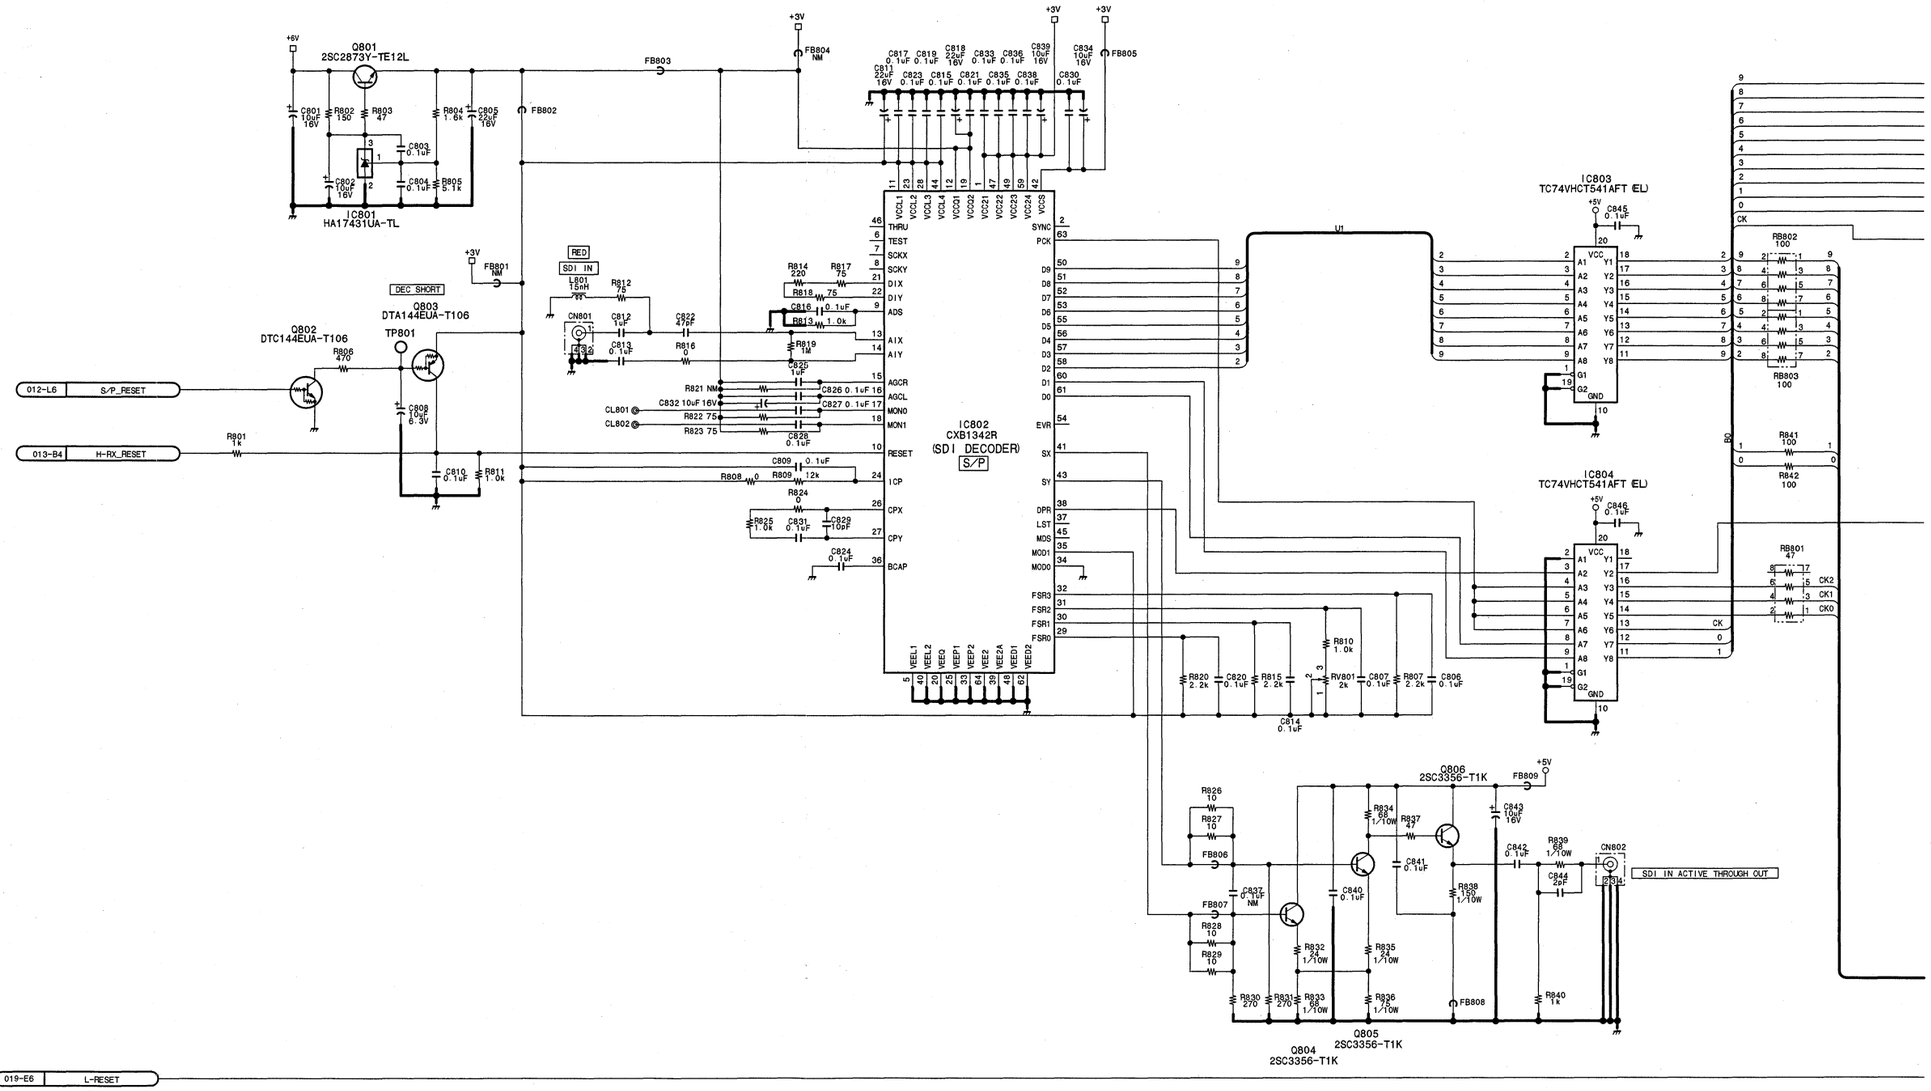
Q801
2SC2873Y-TE12L
IC801
HA17431UA-TL
Q802
DTC144EUA-T106
Q803
DTA144EUA-T106
TP801
IC802
CXB1342R
(SDI DECODER)
S/P
IC803
TC74VHCT541AFT (EL)
IC804
TC74VHCT541AFT (EL)
Q804
2SC3356-T1K
Q805
2SC3356-T1K
Q806
2SC3356-T1K
012-L6 S/P_RESET
013-B4 H-RX_RESET
001-M5, 002-M5, 003-B4, 004-D4, 006-D5, 007-C6, 012-L1, 013-C7, 016-H8, 017-D9, 018-E6
019-E6 L-RESET
SDI IN
SDI IN ACTIVE THROUGH OUT
DEC SHORT
CK
CK2
CK1
CK0

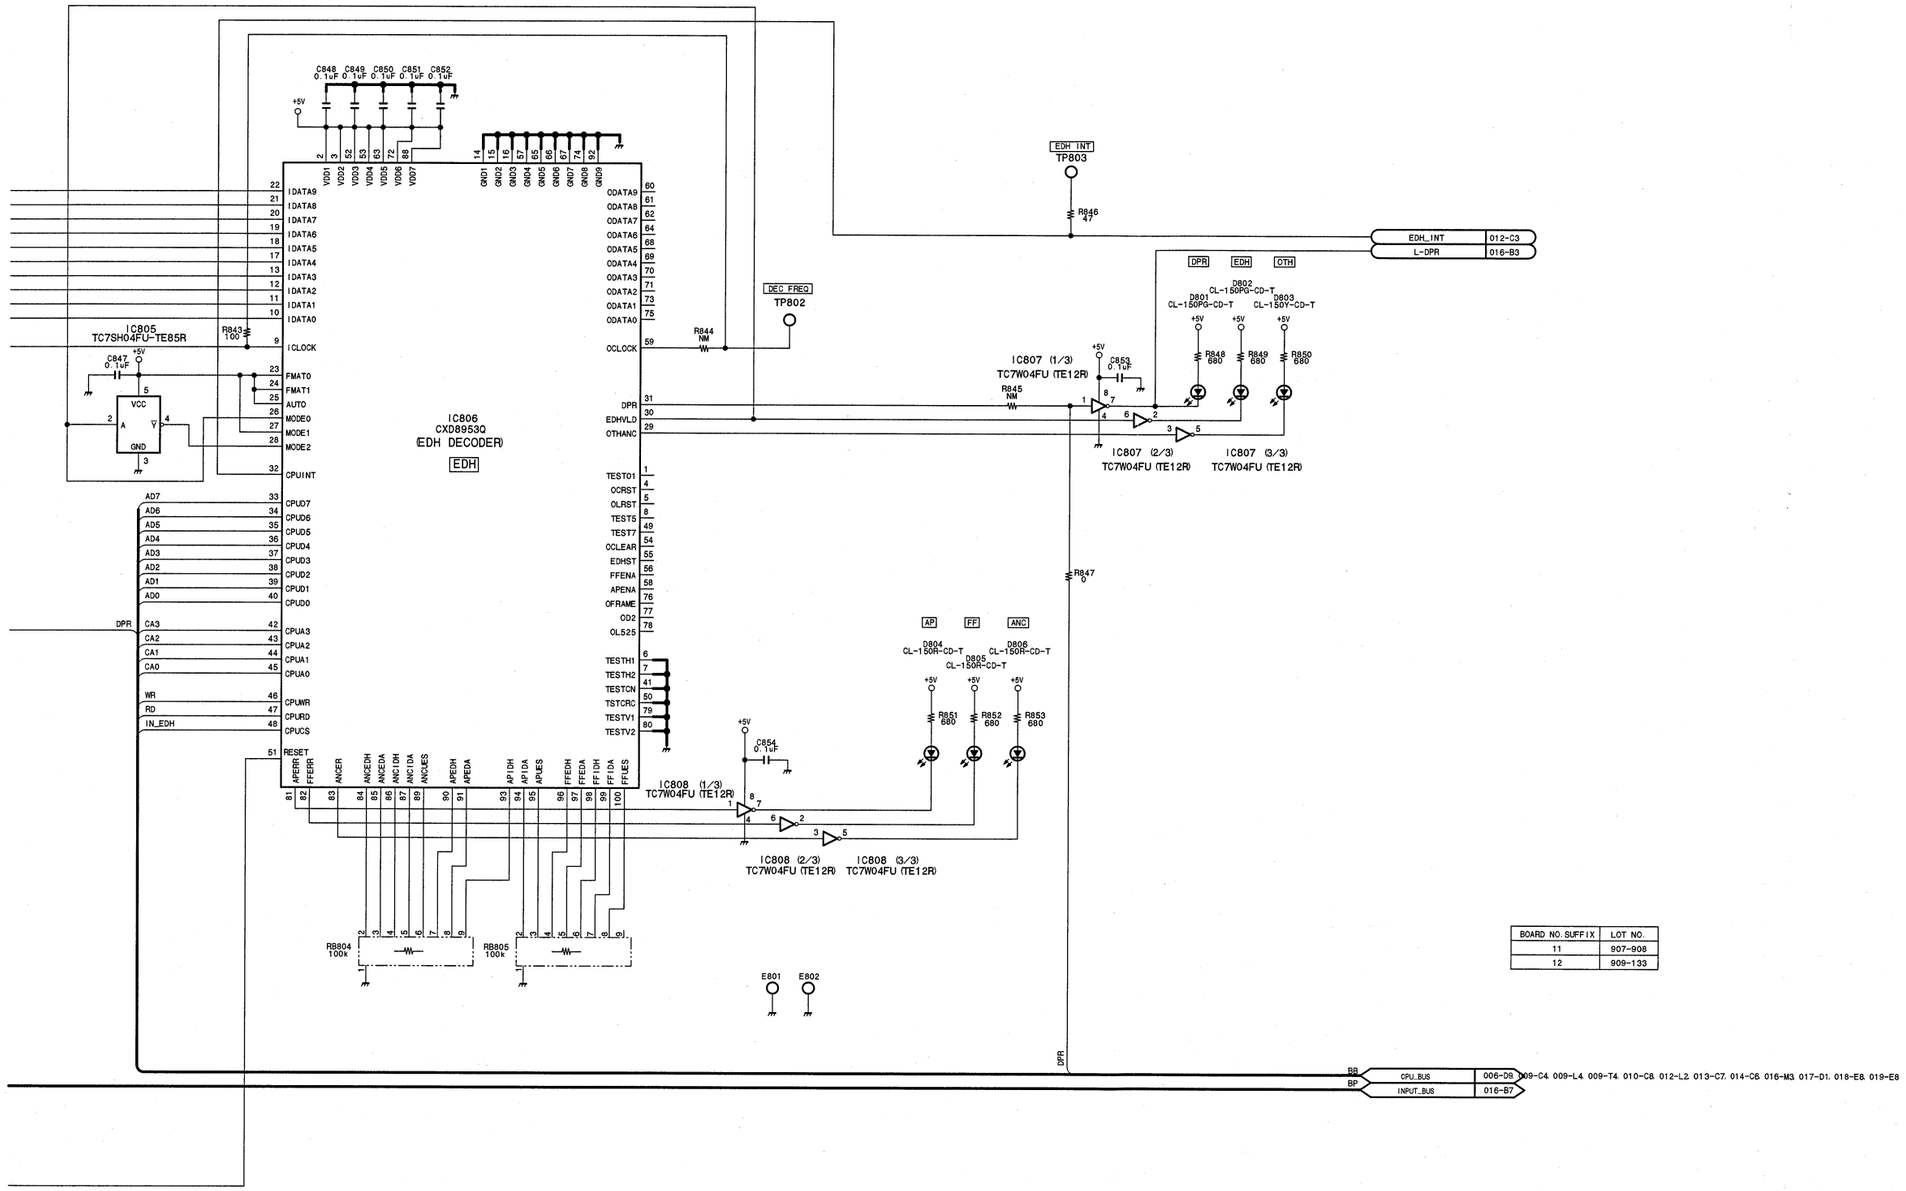

BOARD NO. SUFFIX	LOT NO.
11	907-908
12	909-133

Audio process

APR-45 (15/19)

BOARD NO. 1-675-517-11, 12
LOT NO. 907-0B1
DSR-2000_APR-45_C12_15

APR-45 (16/19)

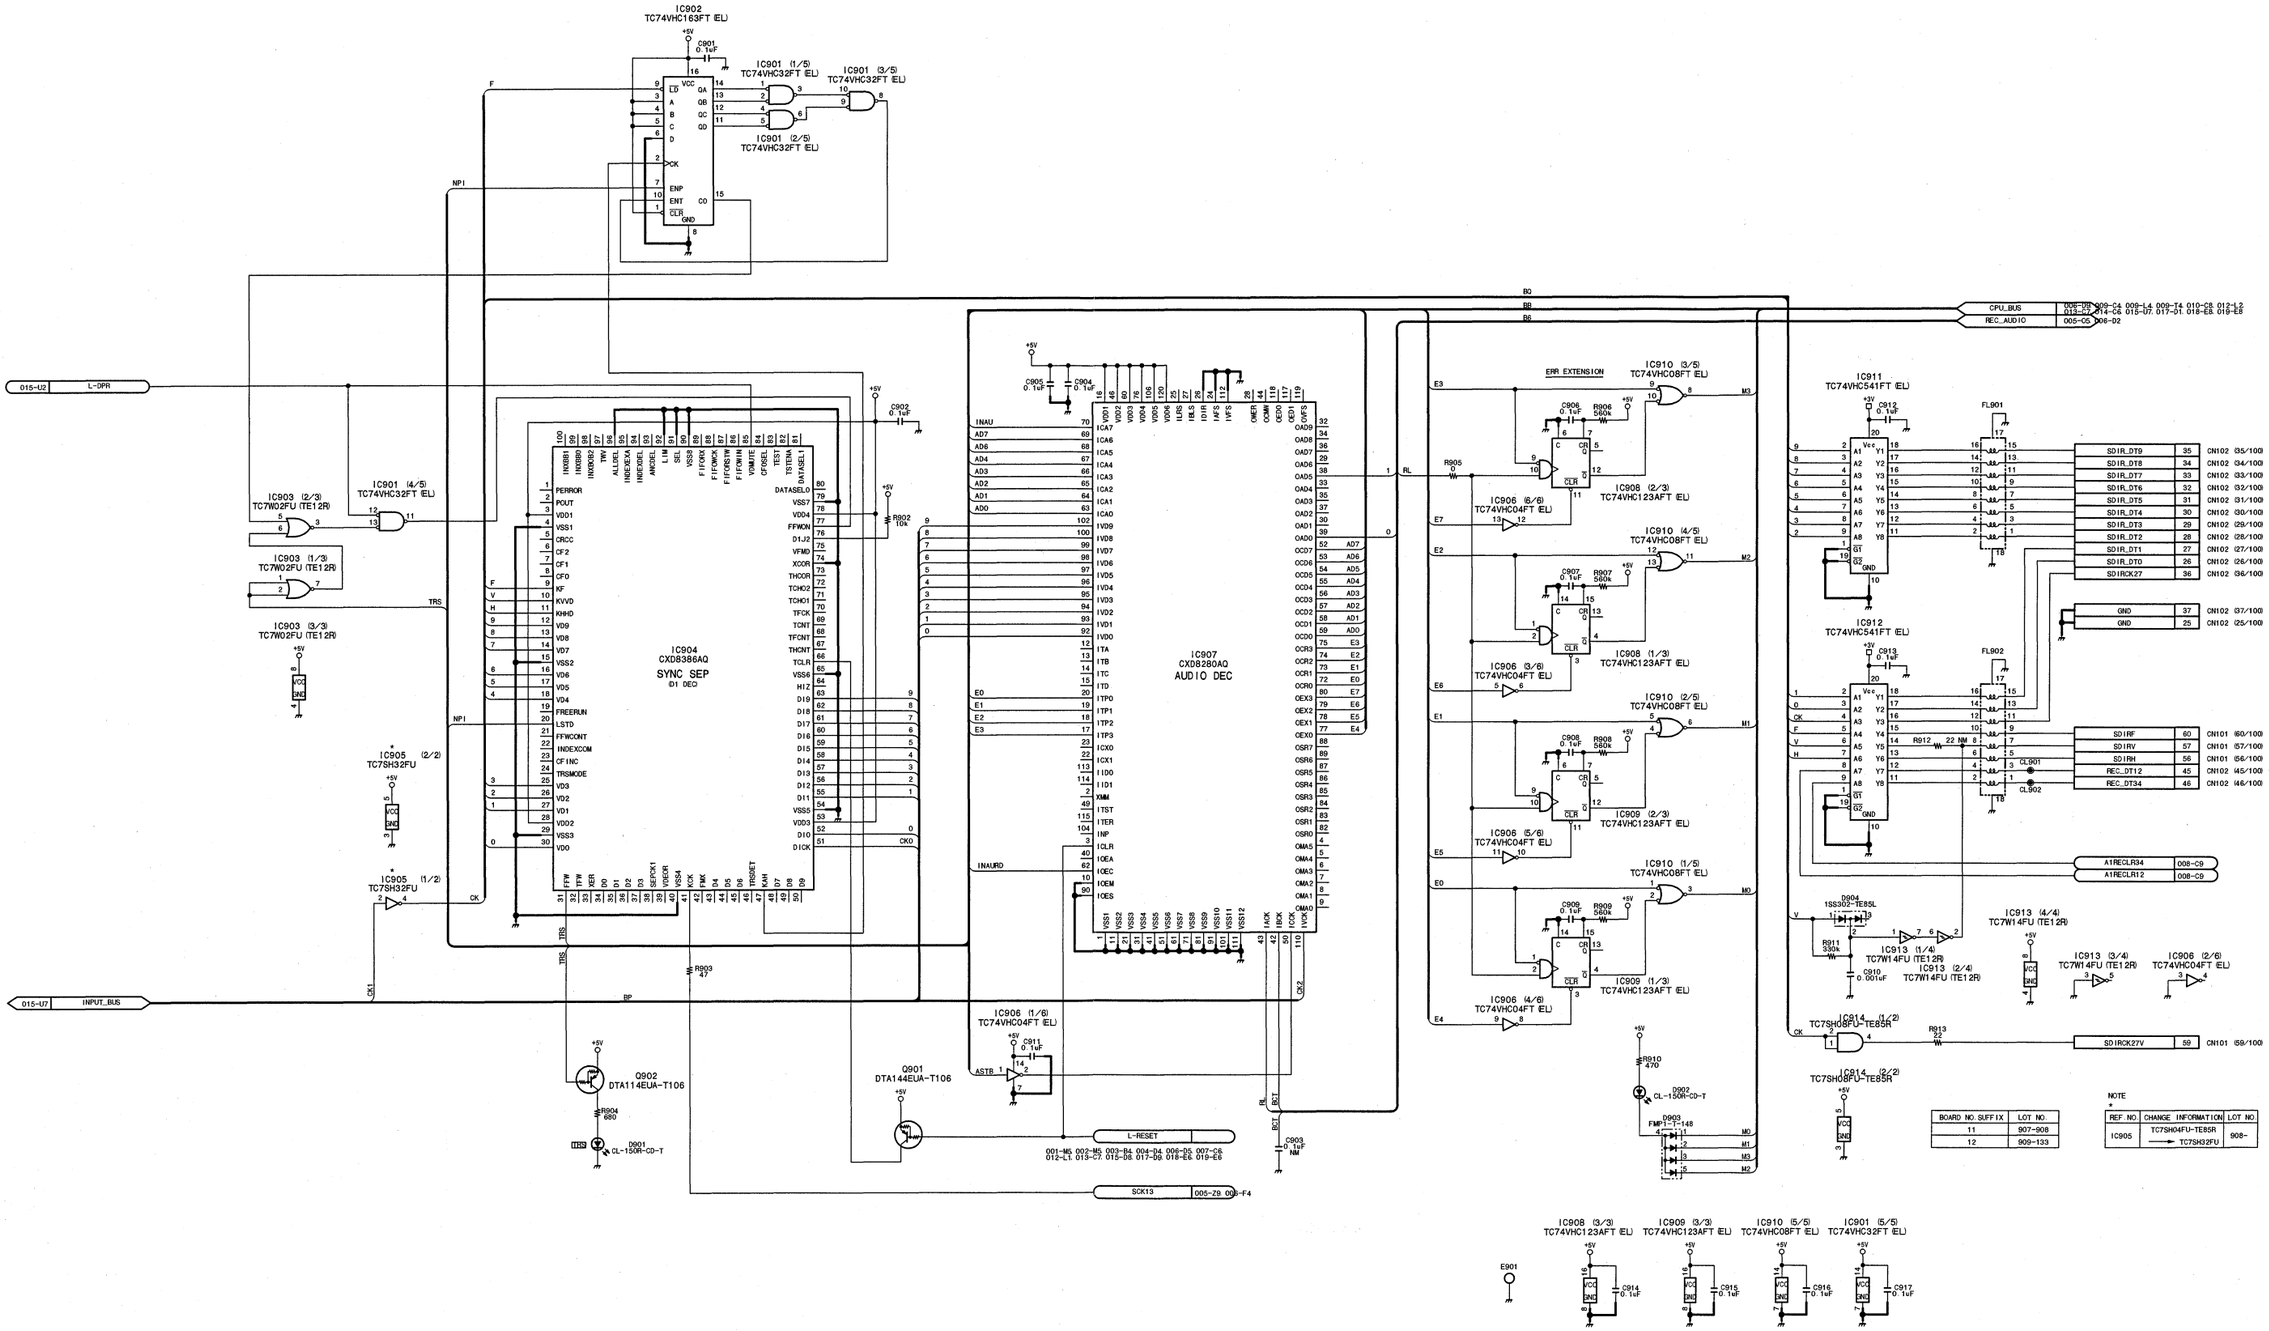

Audio process

APR-45 (16/19)

BOARD NO. 1-675-517-11, 12
LOT NO. 907-0B1
DSR-2000_APR-45_C12_16

APR-45 (17/19)

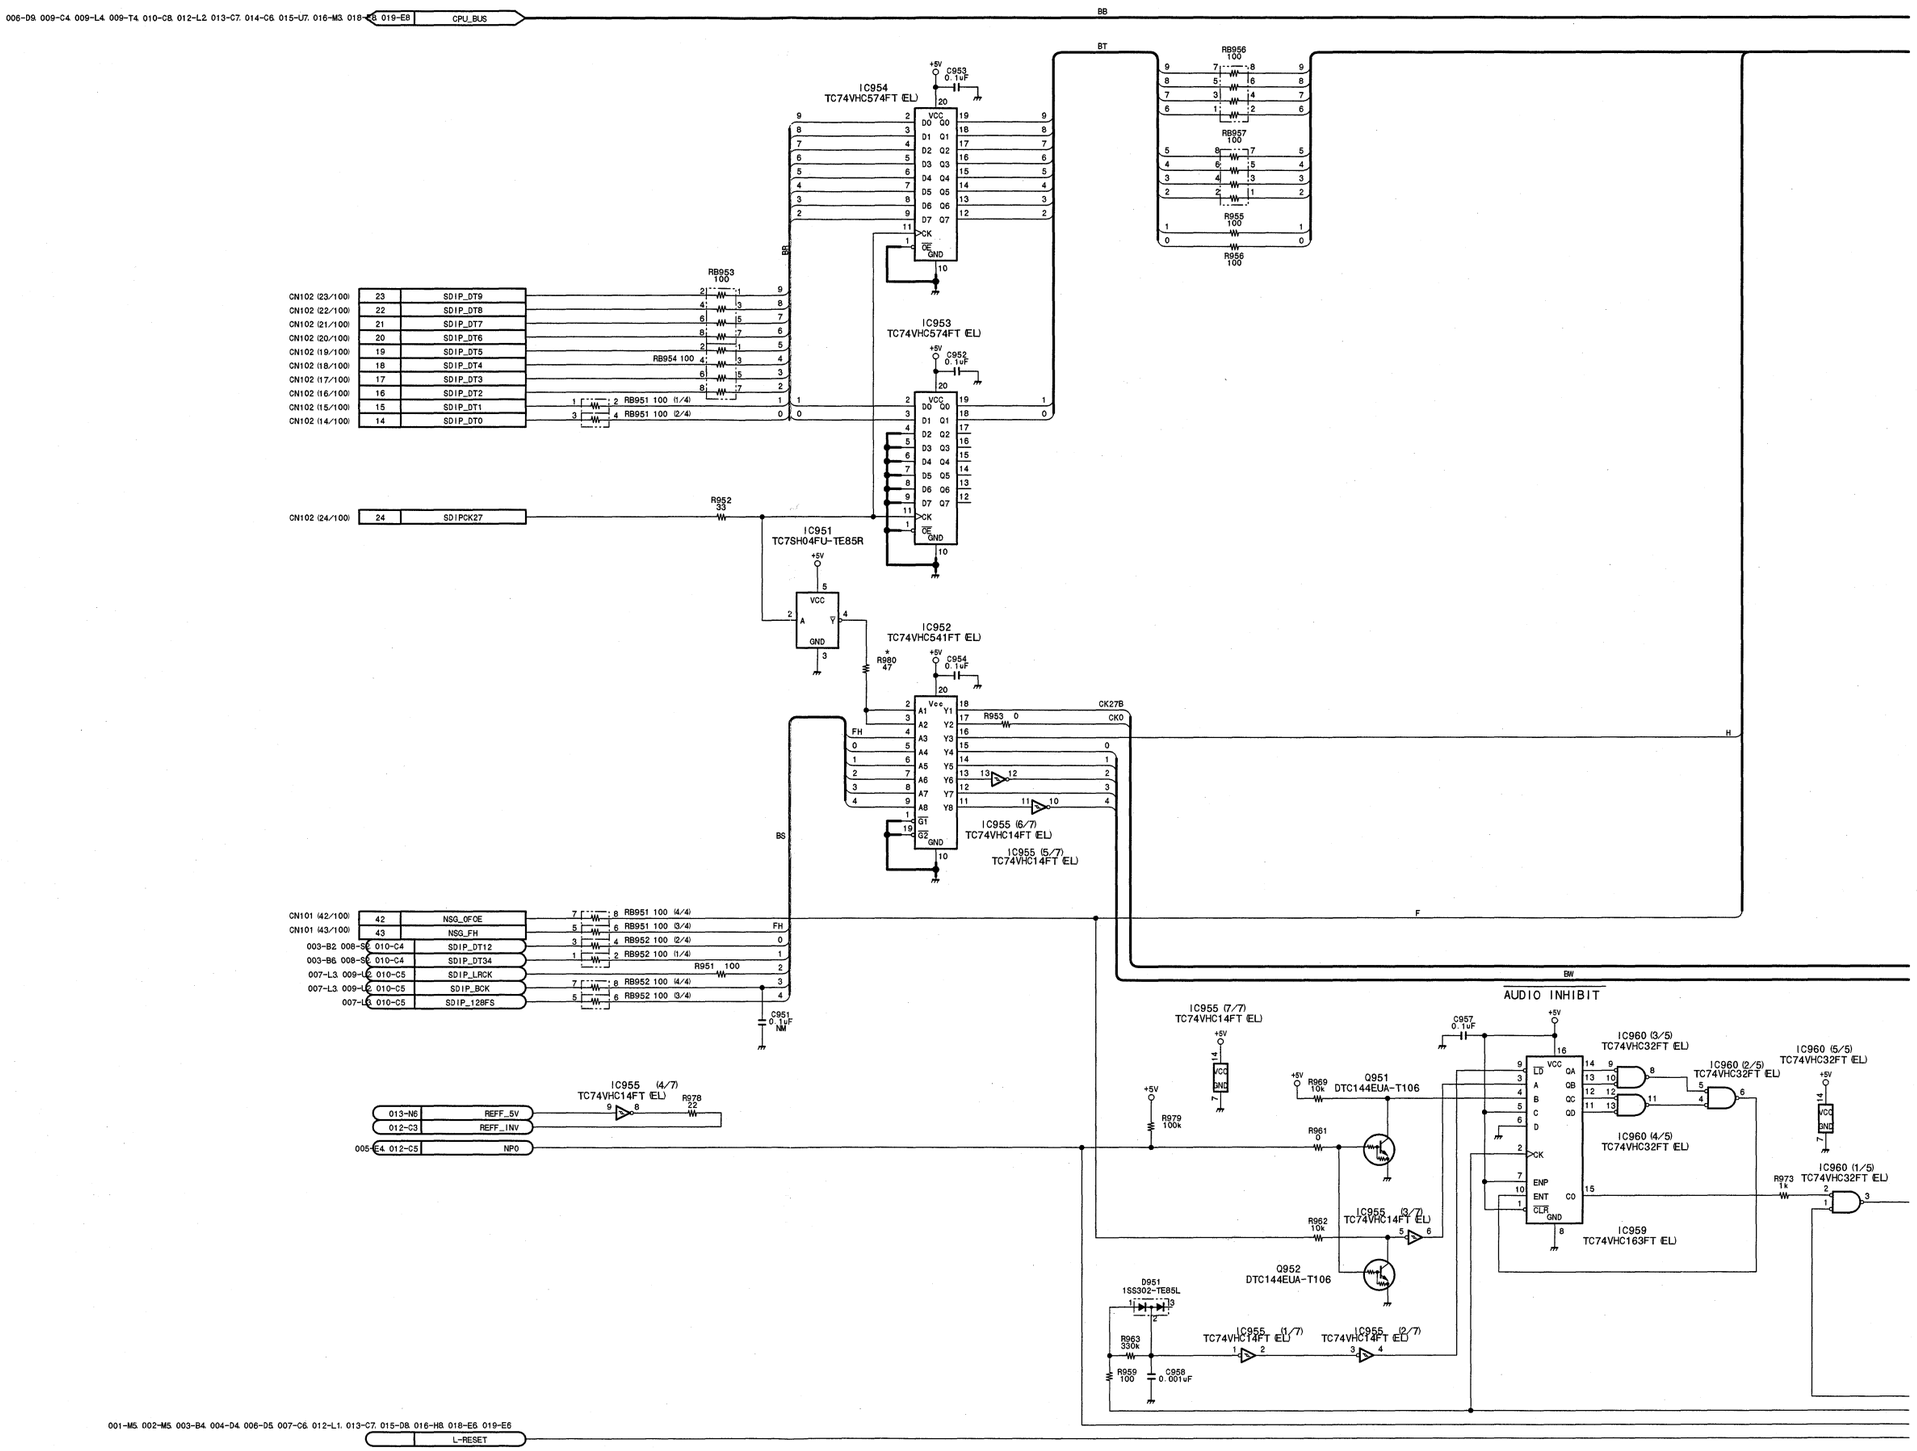

15-26 (a)

APR-45 (17/19)

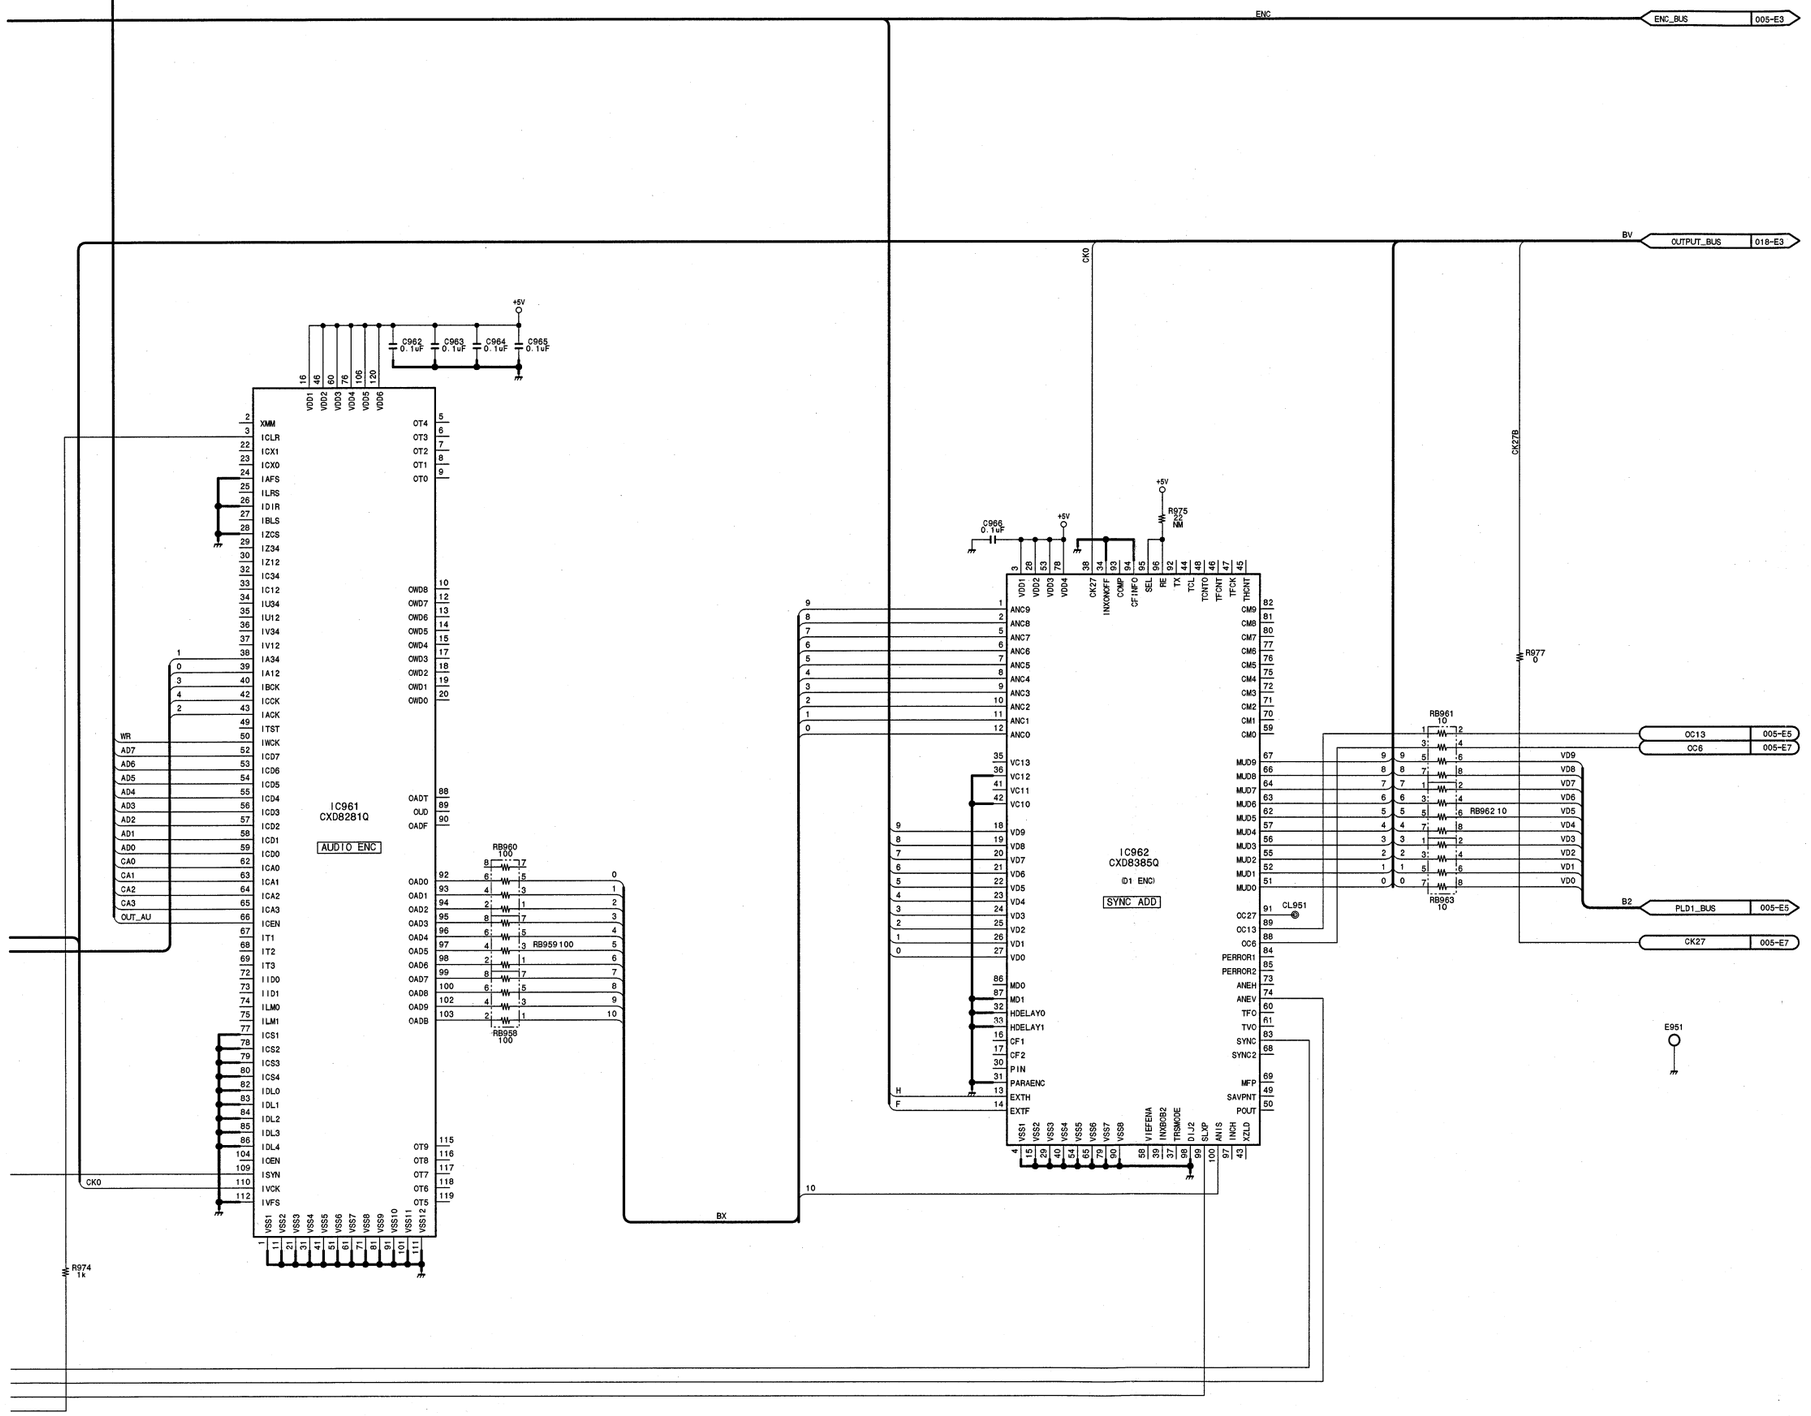

BOARD NO. SUFFIX	LOT NO.
11	907-908
12	909-133

NOTE
*

REF. NO.	CHANGE INFORMATION	LOT NO.
R980	47 ADD	909-

Audio process

APR-45 (17/19)

BOARD NO. 1-675-517-11, 12
LOT NO. 907-0B1
DSR-2000_APR-45_C12_17

APR-45 (18/19)

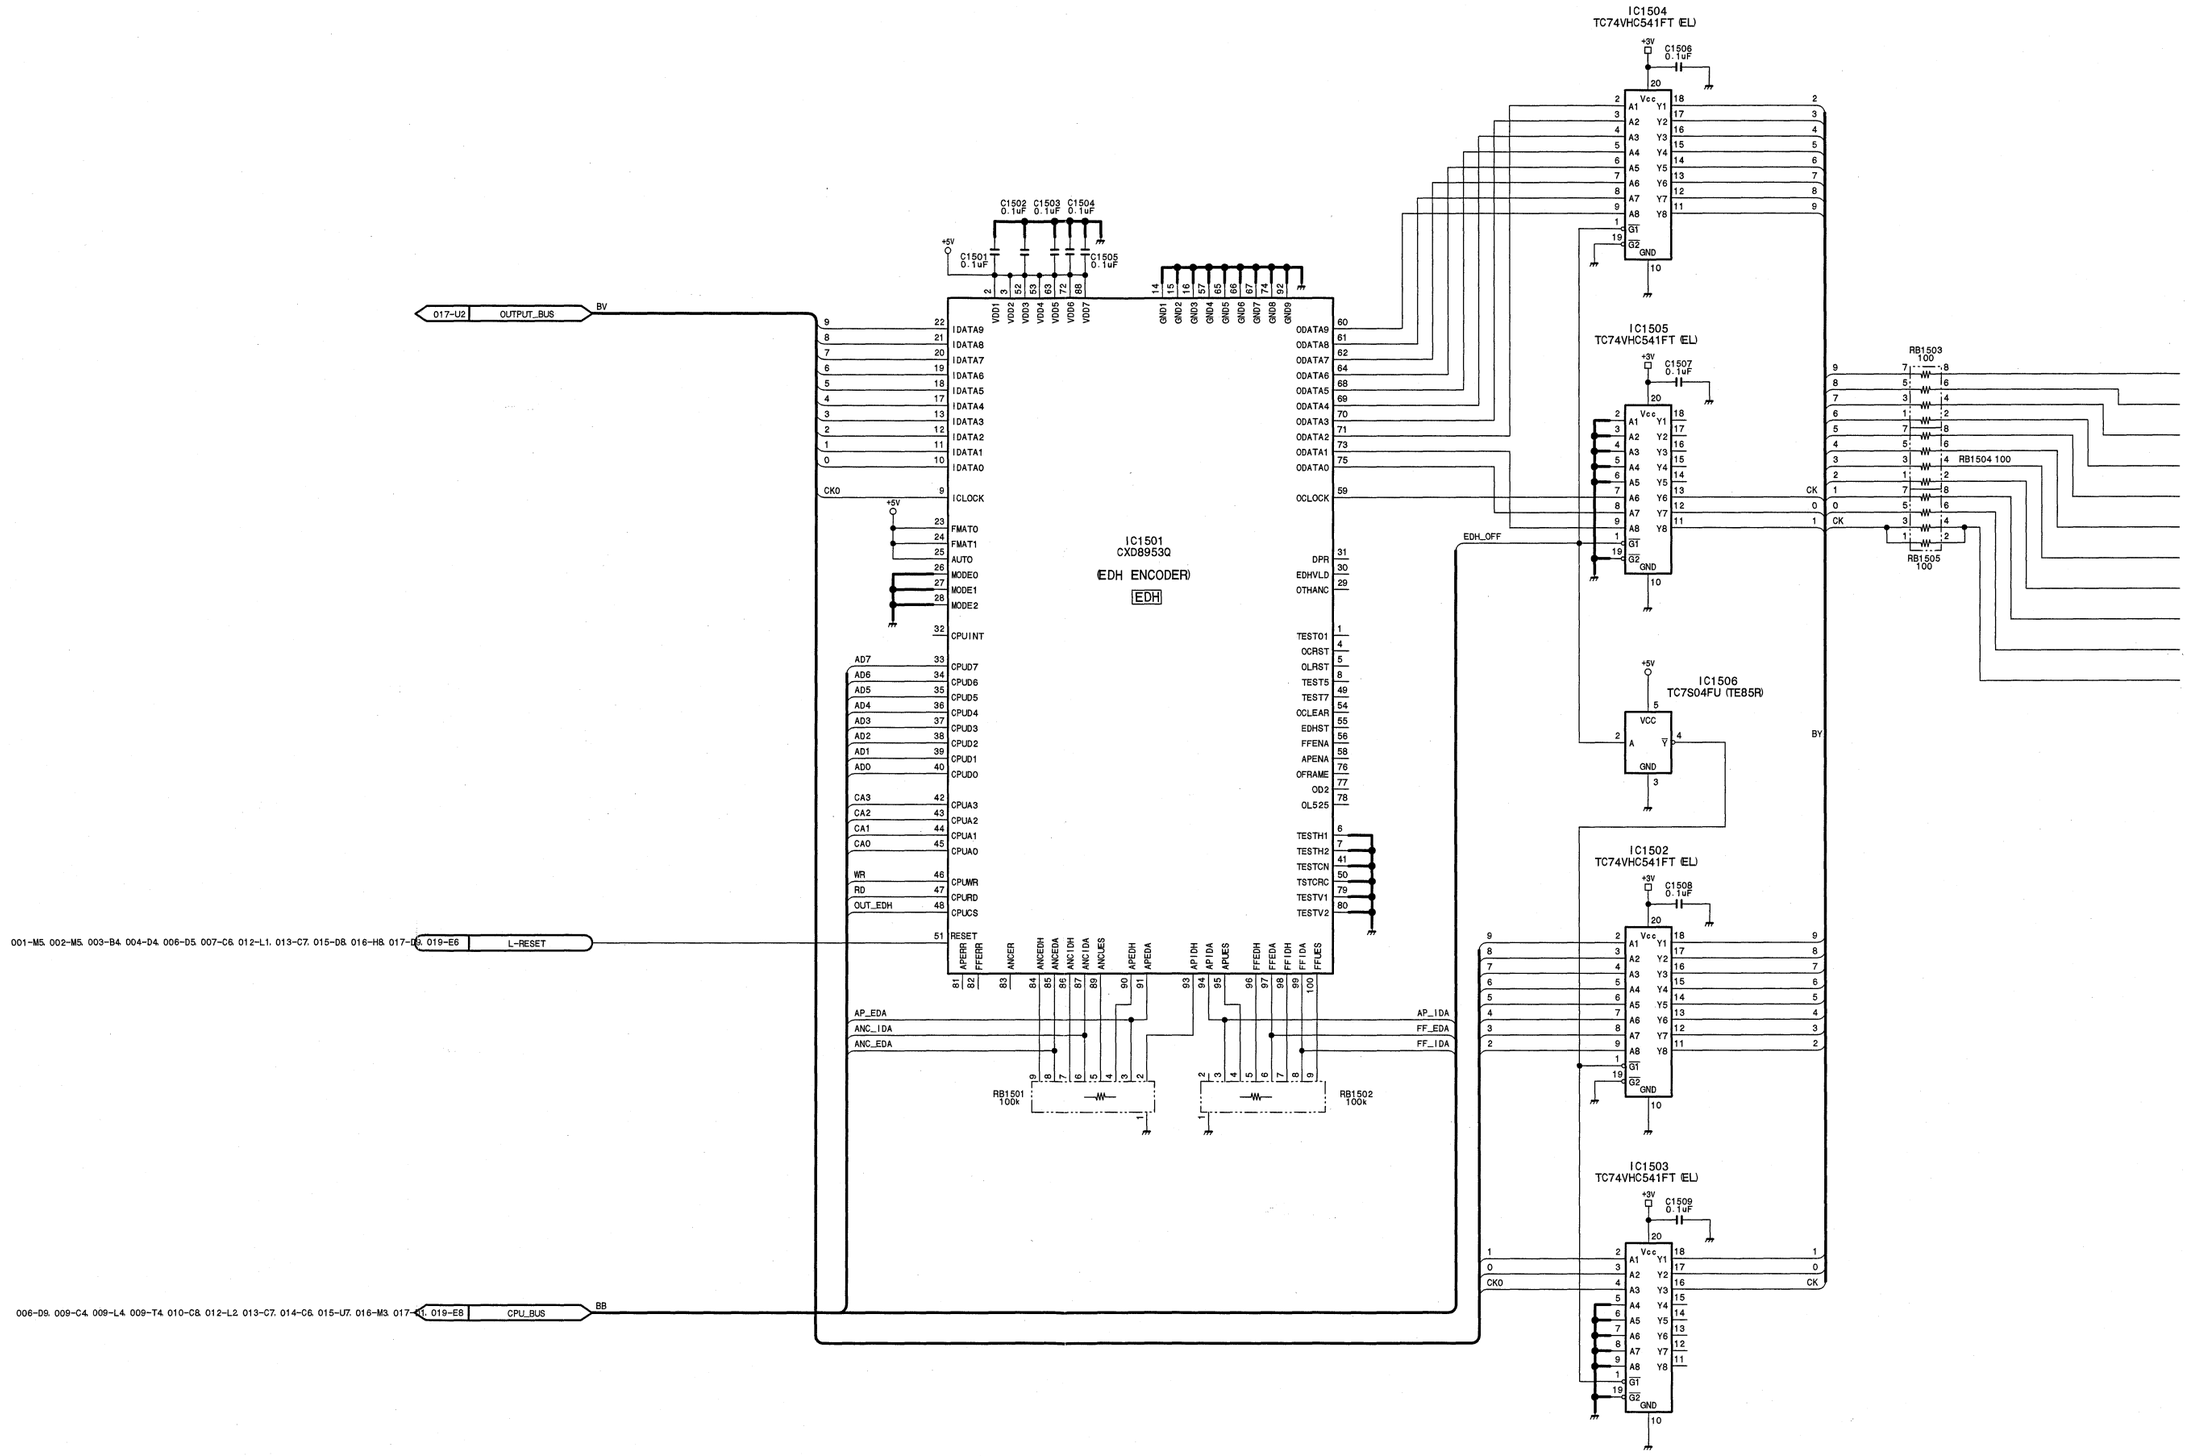
IC1501
CXD8953Q
(EDH ENCODER)
EDH
IC1504
TC74VHC541FT (EL)
IC1505
TC74VHC541FT (EL)
IC1506
TC7S04FU (TE85R)
IC1502
TC74VHC541FT (EL)
IC1503
TC74VHC541FT (EL)
C1501 0.1uF
C1502 0.1uF
C1503 0.1uF
C1504 0.1uF
C1505 0.1uF
C1506 0.1uF
C1507 0.1uF
C1508 0.1uF
C1509 0.1uF
RB1501 100k
RB1502 100k
RB1503 100
RB1504 100
RB1505 100
017-U2
OUTPUT_BUS
BV
001-M5. 002-M5. 003-B4. 004-D4. 006-D5. 007-C6. 012-L1. 013-C7. 015-D8. 016-H8. 017-D3. 019-E6
L-RESET
006-D9. 009-C4. 009-L4. 009-T4. 010-C8. 012-L2. 013-C7. 014-C6. 015-U7. 016-M3. 017-L1. 019-E8
CPU_BUS
BB
AP_EDA
ANC_IDA
ANC_EDA
AP_IDA
FF_EDA
FF_IDA
EDH_OFF
CK
CK0
BY

APR-45 (18/19)

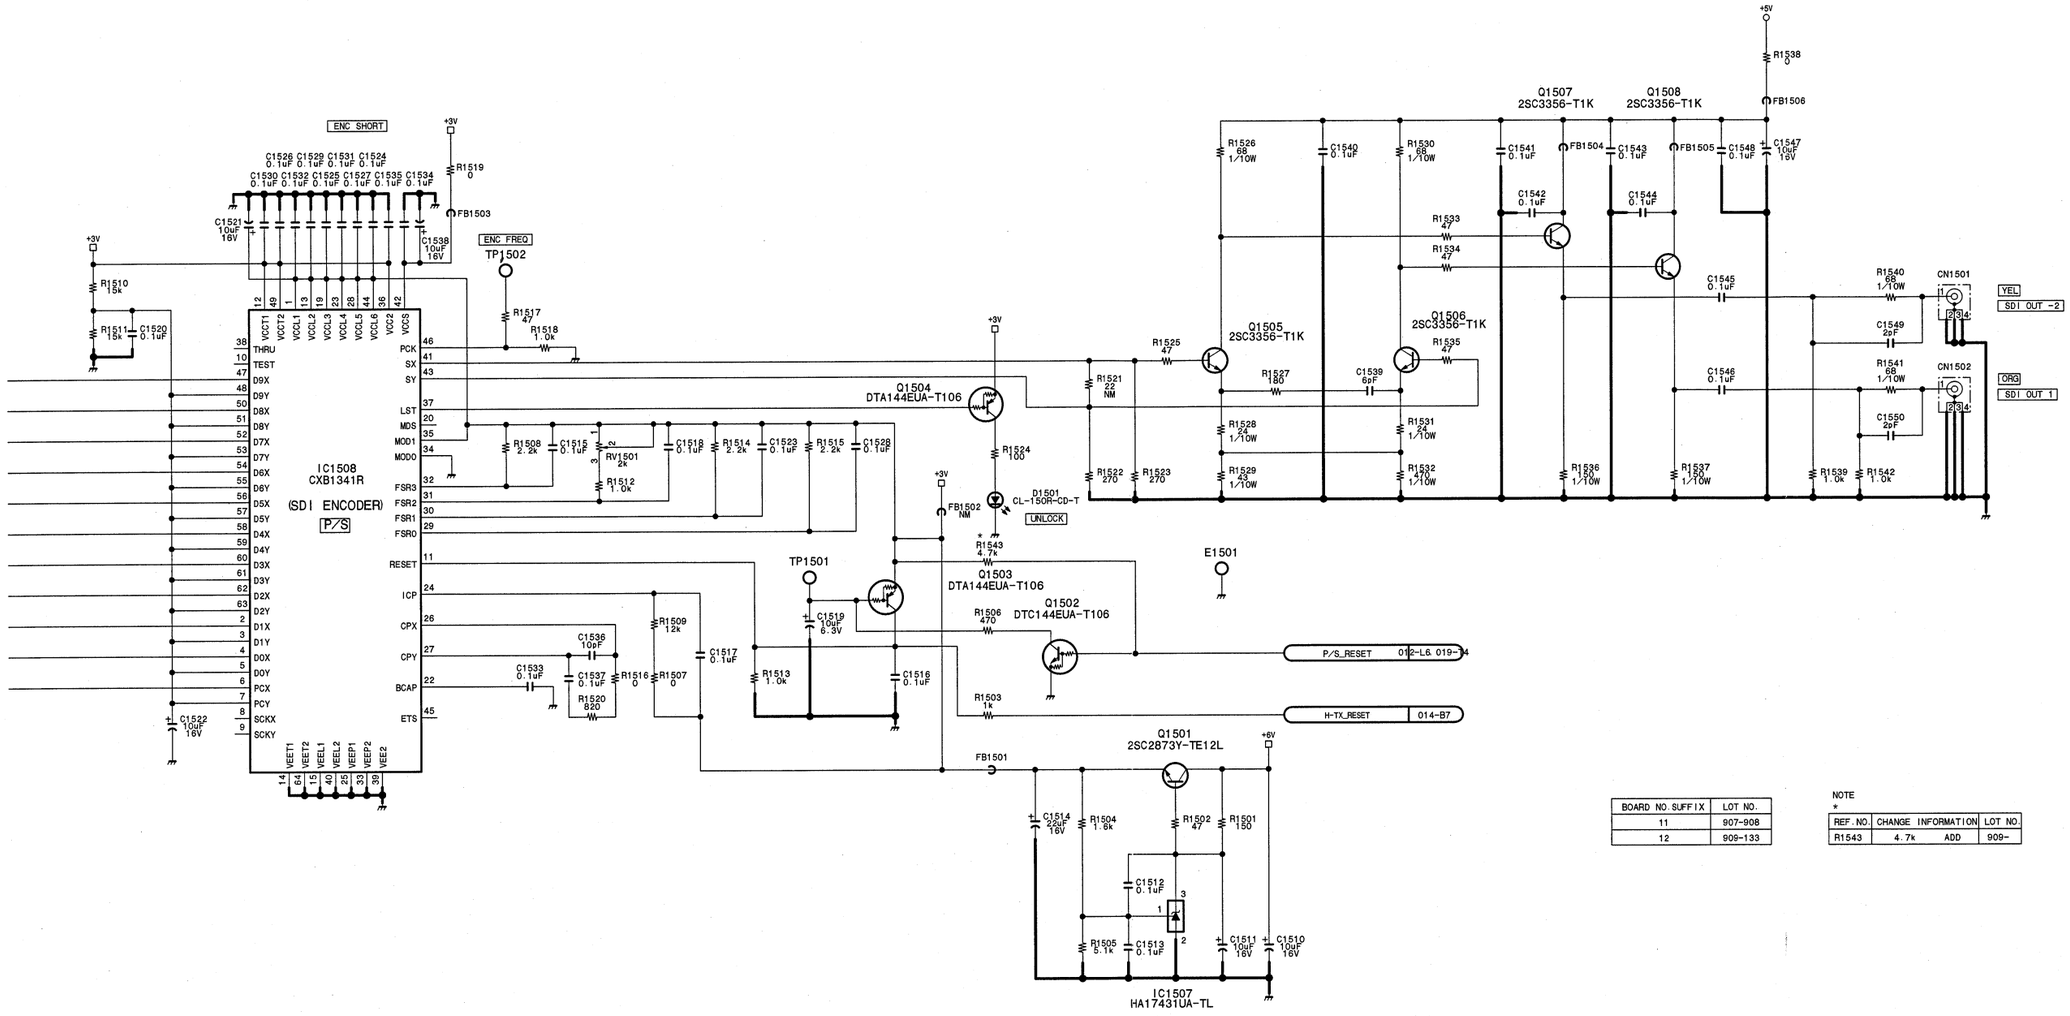

BOARD NO. SUFFIX	LOT NO.
11	907-908
12	909-133

NOTE
*

REF. NO.	CHANGE INFORMATION	LOT NO.
R1543	4.7k ADD	909-

Audio process
APR-45 (18/19)
BOARD NO. 1-675-517-11, 12
LOT NO. 907-0B1
DSR-2000_APR-45_C12_18

APR-45 (19/19)

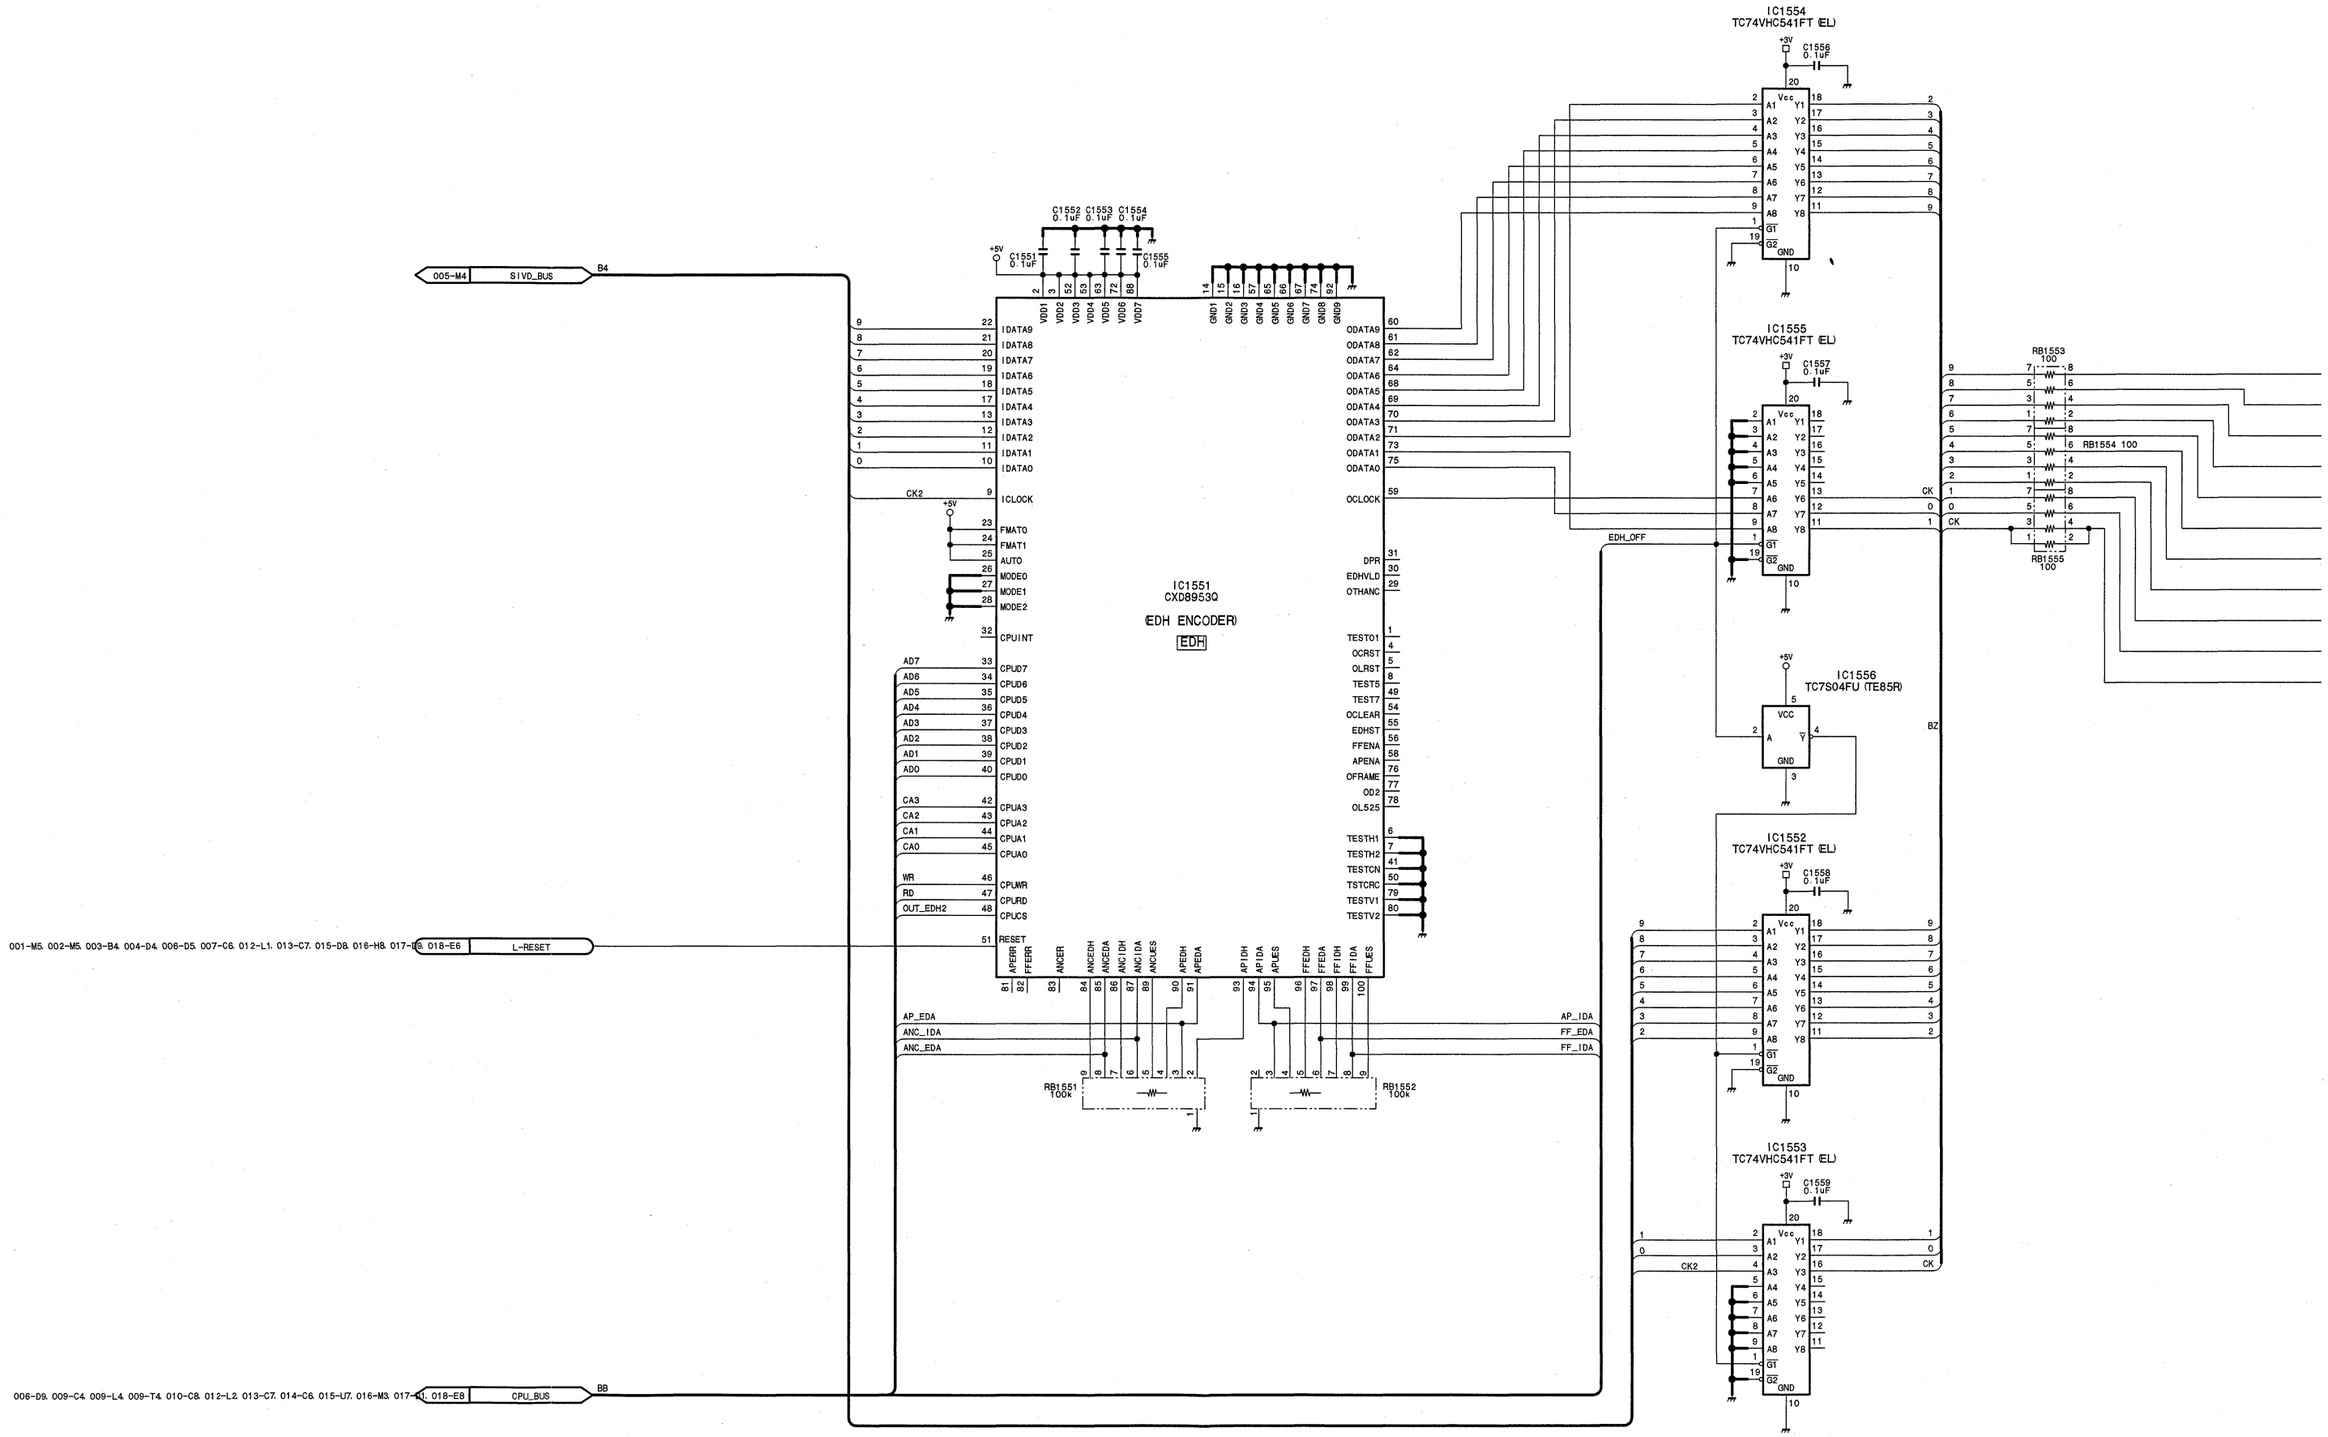

15-30 (a) 15-30 (a)

APR-45 (19/19)

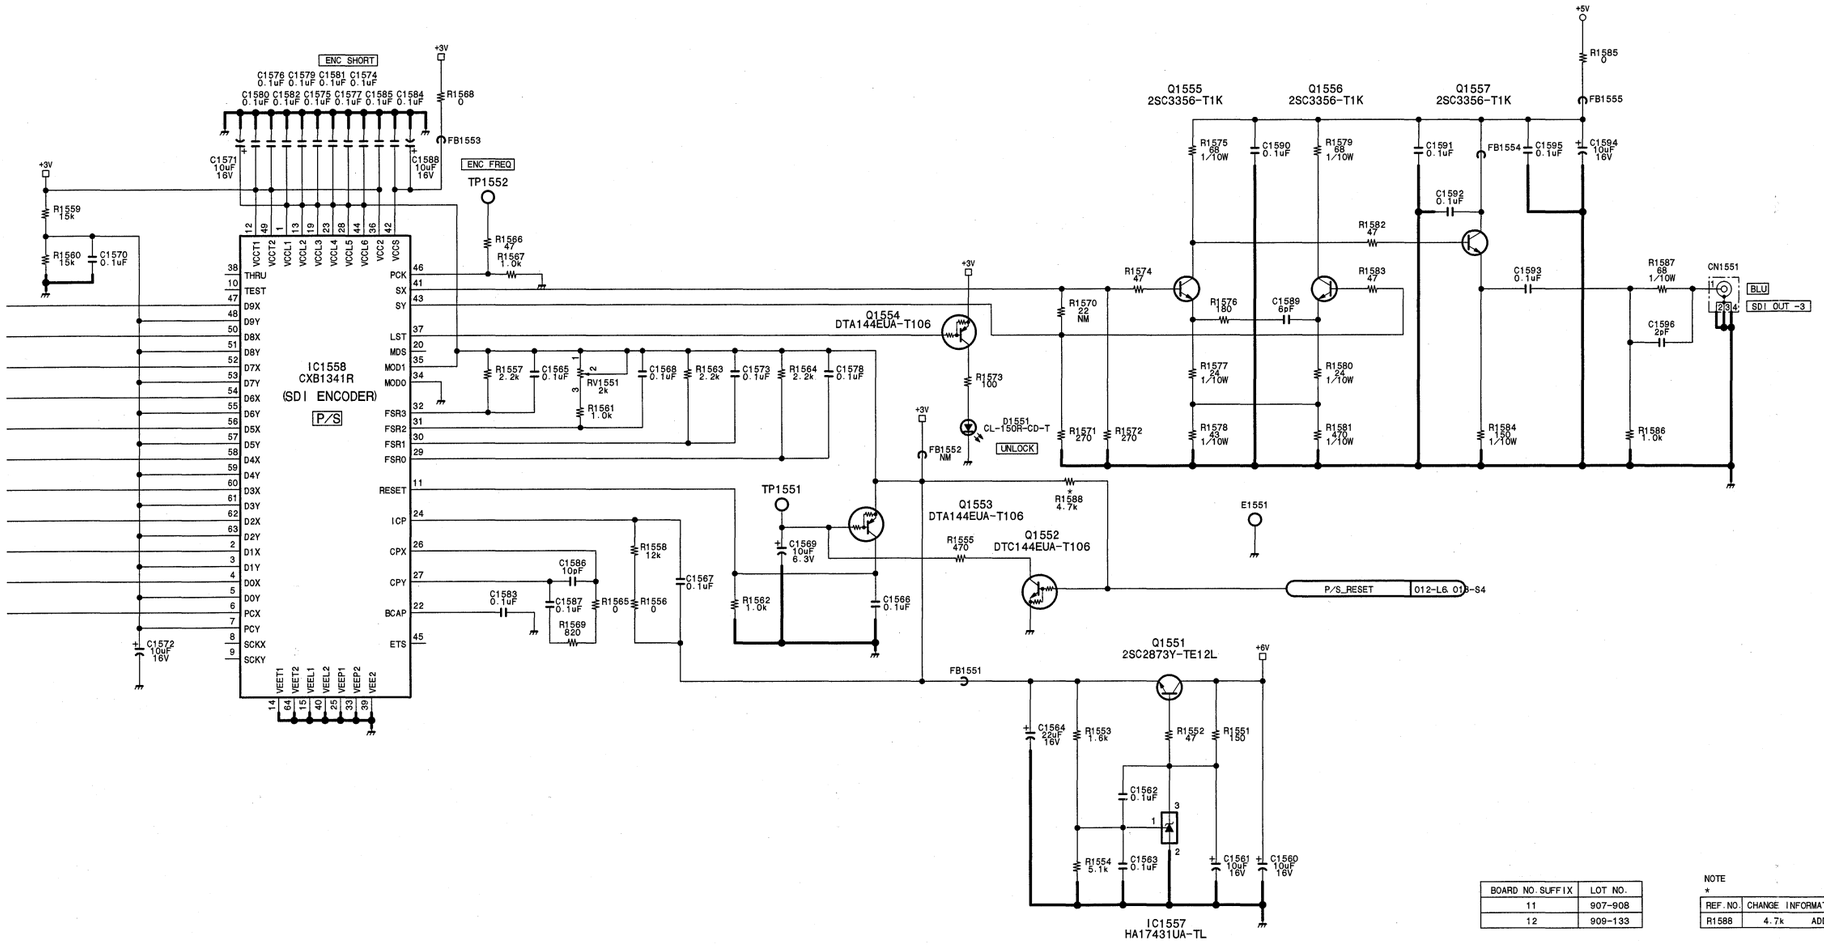

BOARD NO. SUFFIX	LOT NO.
11	907-908
12	909-133

NOTE
*

REF. NO.	CHANGE INFORMATION	LOT NO.
R1588	4.7k ADD	909-

Audio process
APR-45 (19/19)
BOARD NO. 1-675-517-11, 12
LOT NO. 907-0B1
DSR-2000_APR-45_C12_19

CC-83, CC-84, CC-85

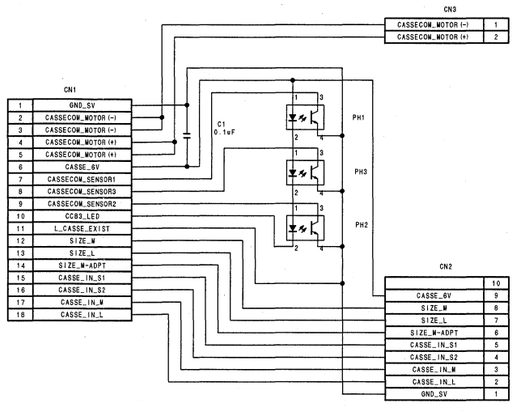

Cassette compartment mode detection/intermediate board

CC-83

BOARD NO. 1-675-547-11
LOT NO. 907-
DSR-2000_CC-83_C11_1

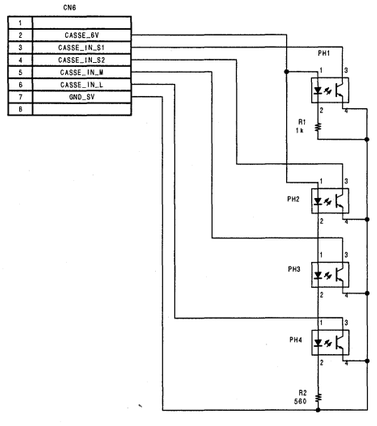

Cassette compartment cassette in detection

CC-85

BOARD NO. 1-675-549-11
LOT NO. 907-
DSR-2000_CC-85_C11_1

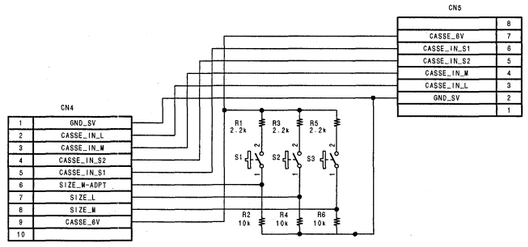

Cassette compartment cassette type detection

CC-84

BOARD NO. 1-675-548-11
LOT NO. 907-
DSR-2000_CC-84_C11_1

15-32

CN-1863, CN-1968



Sensor input/output board

CN-1863

BOARD NO. 1-675-518-11
LOT NO. 907-

DSR-2000_CN-1863_C11_1

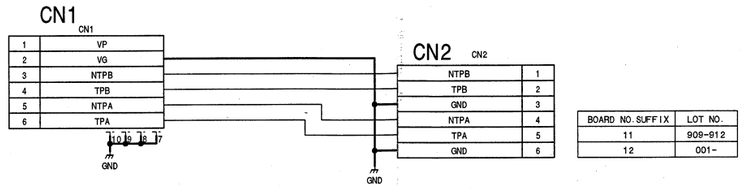

BOARD NO. SUFFIX	LOT NO.
11	909-912
12	001-

i.LINK connector board (Option: DSBK-190)

CN-1968

BOARD NO. 1-675-525-11, 12
LOT NO. 909-
FOR DSBK-190

DSBK-190_CN-1968_012_1

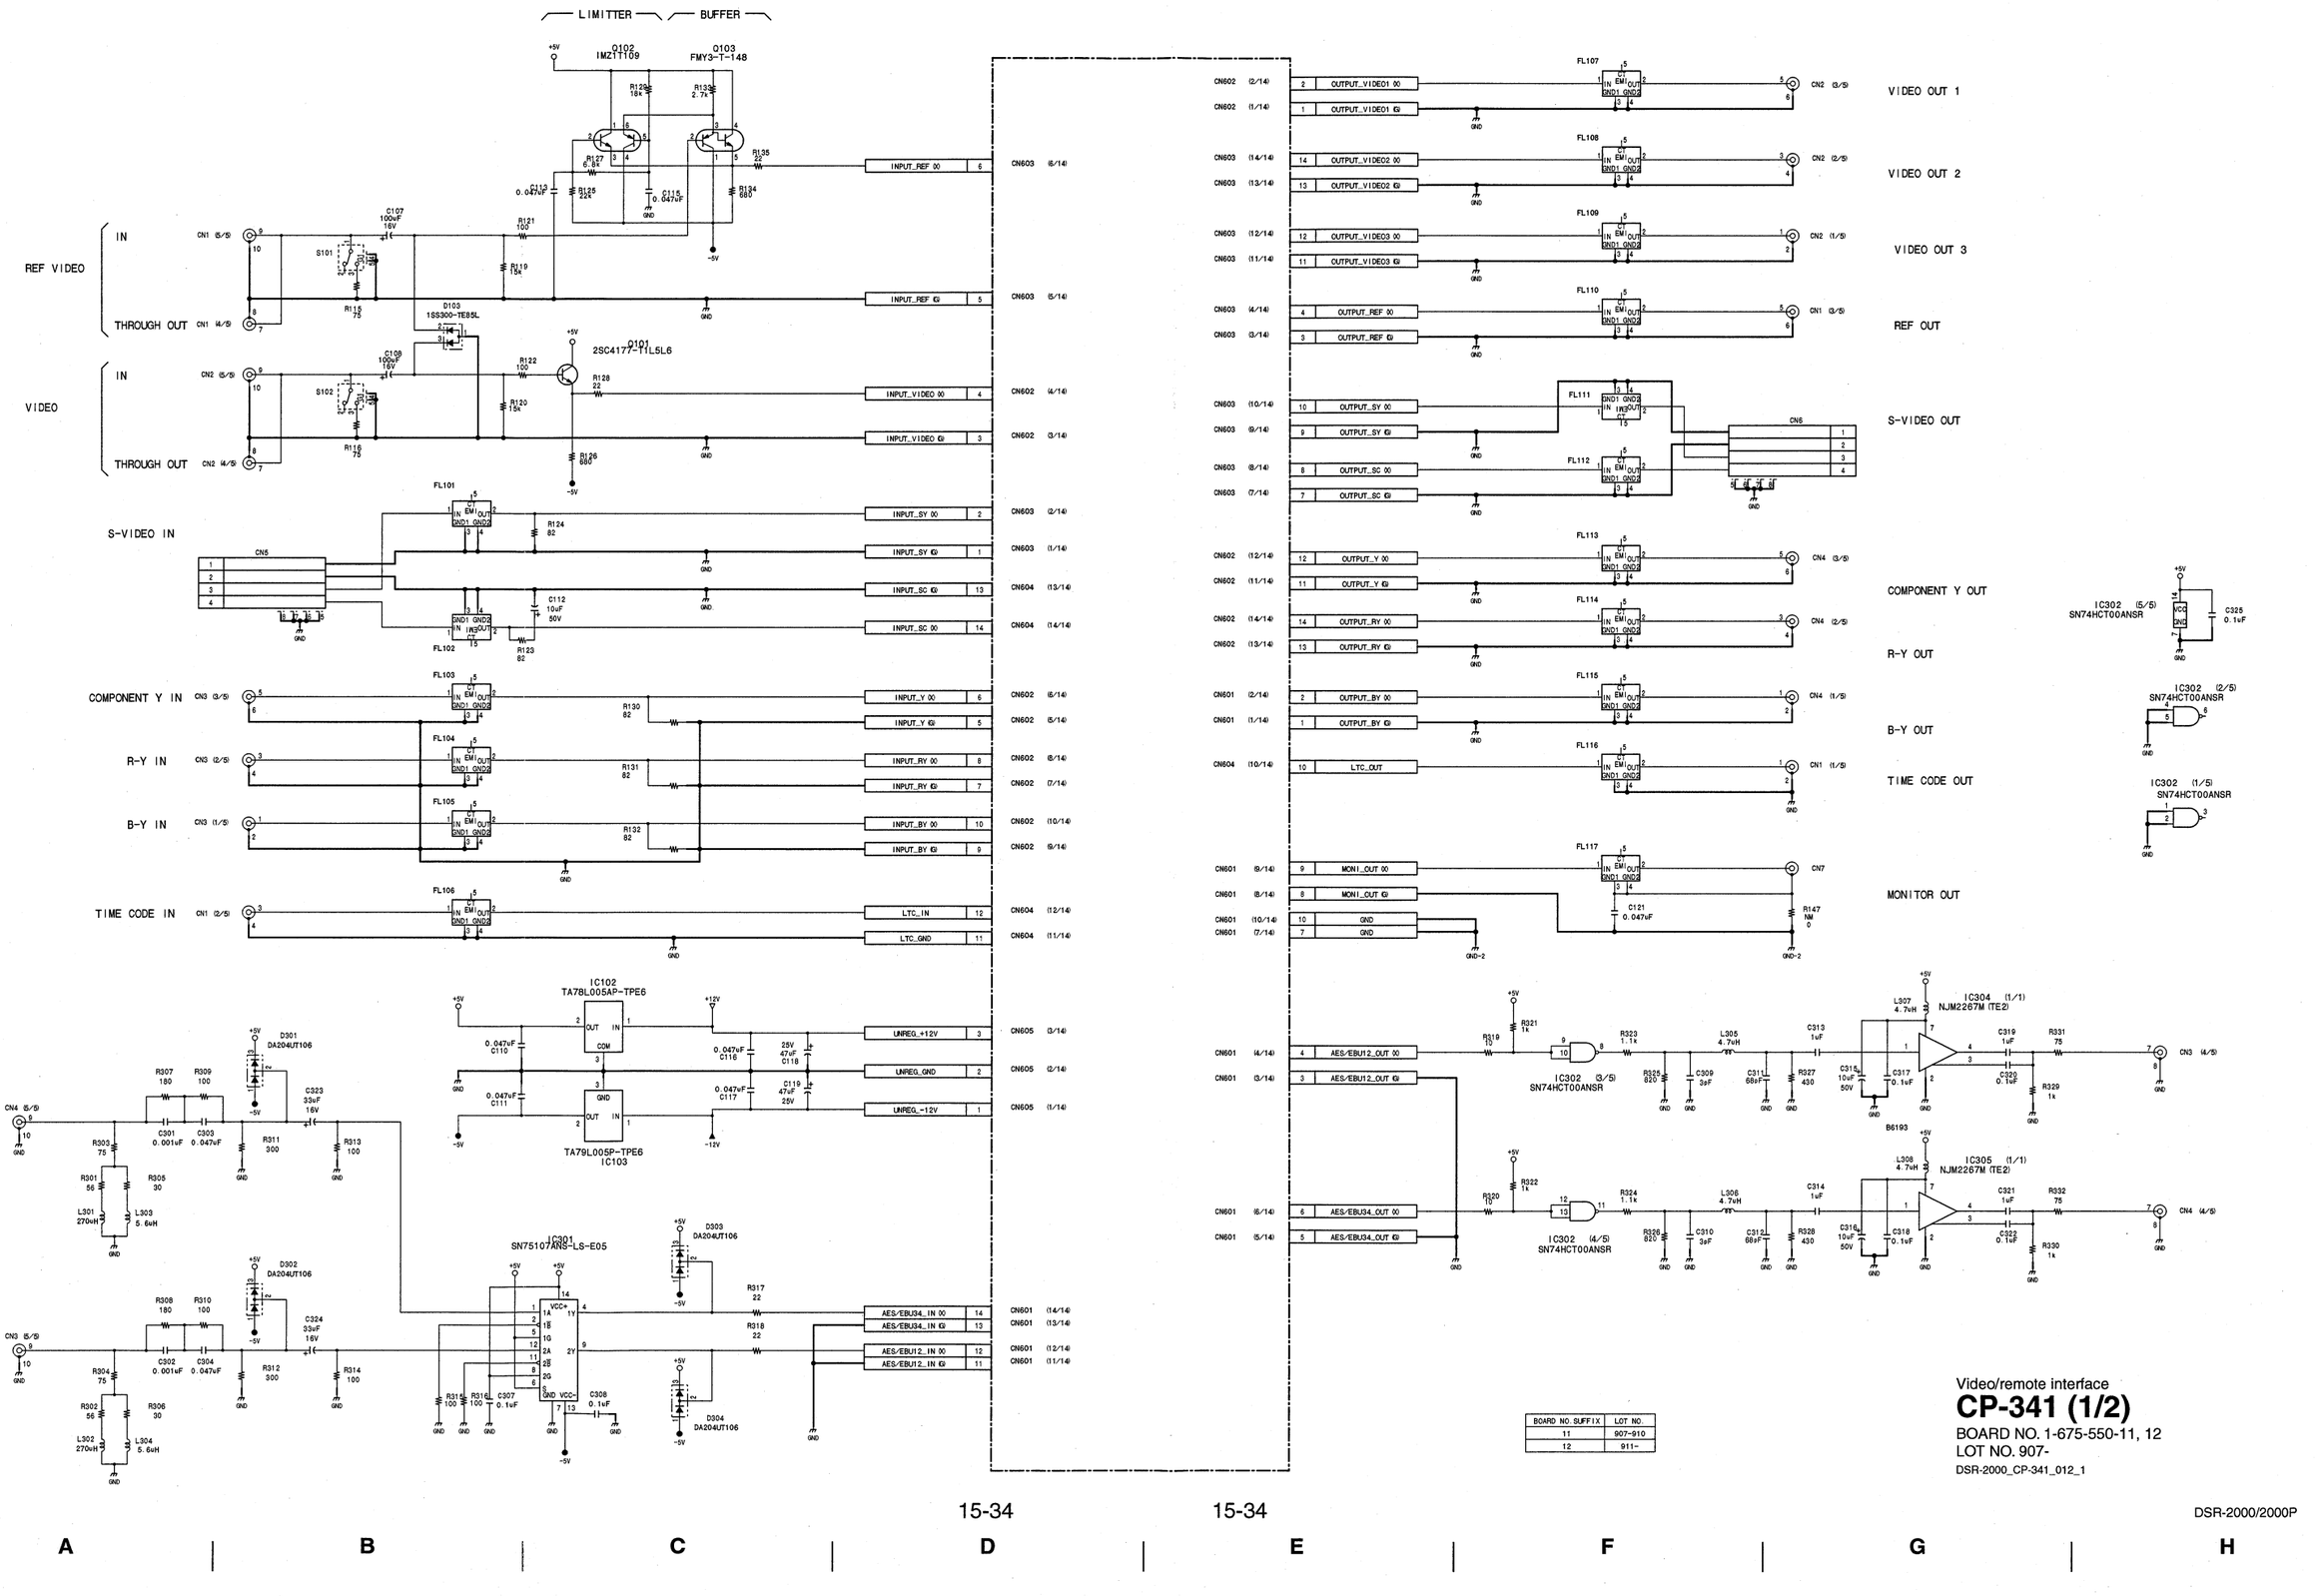

BOARD NO. SUFFIX	LOT NO.
11	907-910
12	911-

Video/remote interface

CP-341 (1/2)

BOARD NO. 1-675-550-11, 12
LOT NO. 907-
DSR-2000_CP-341_012_1

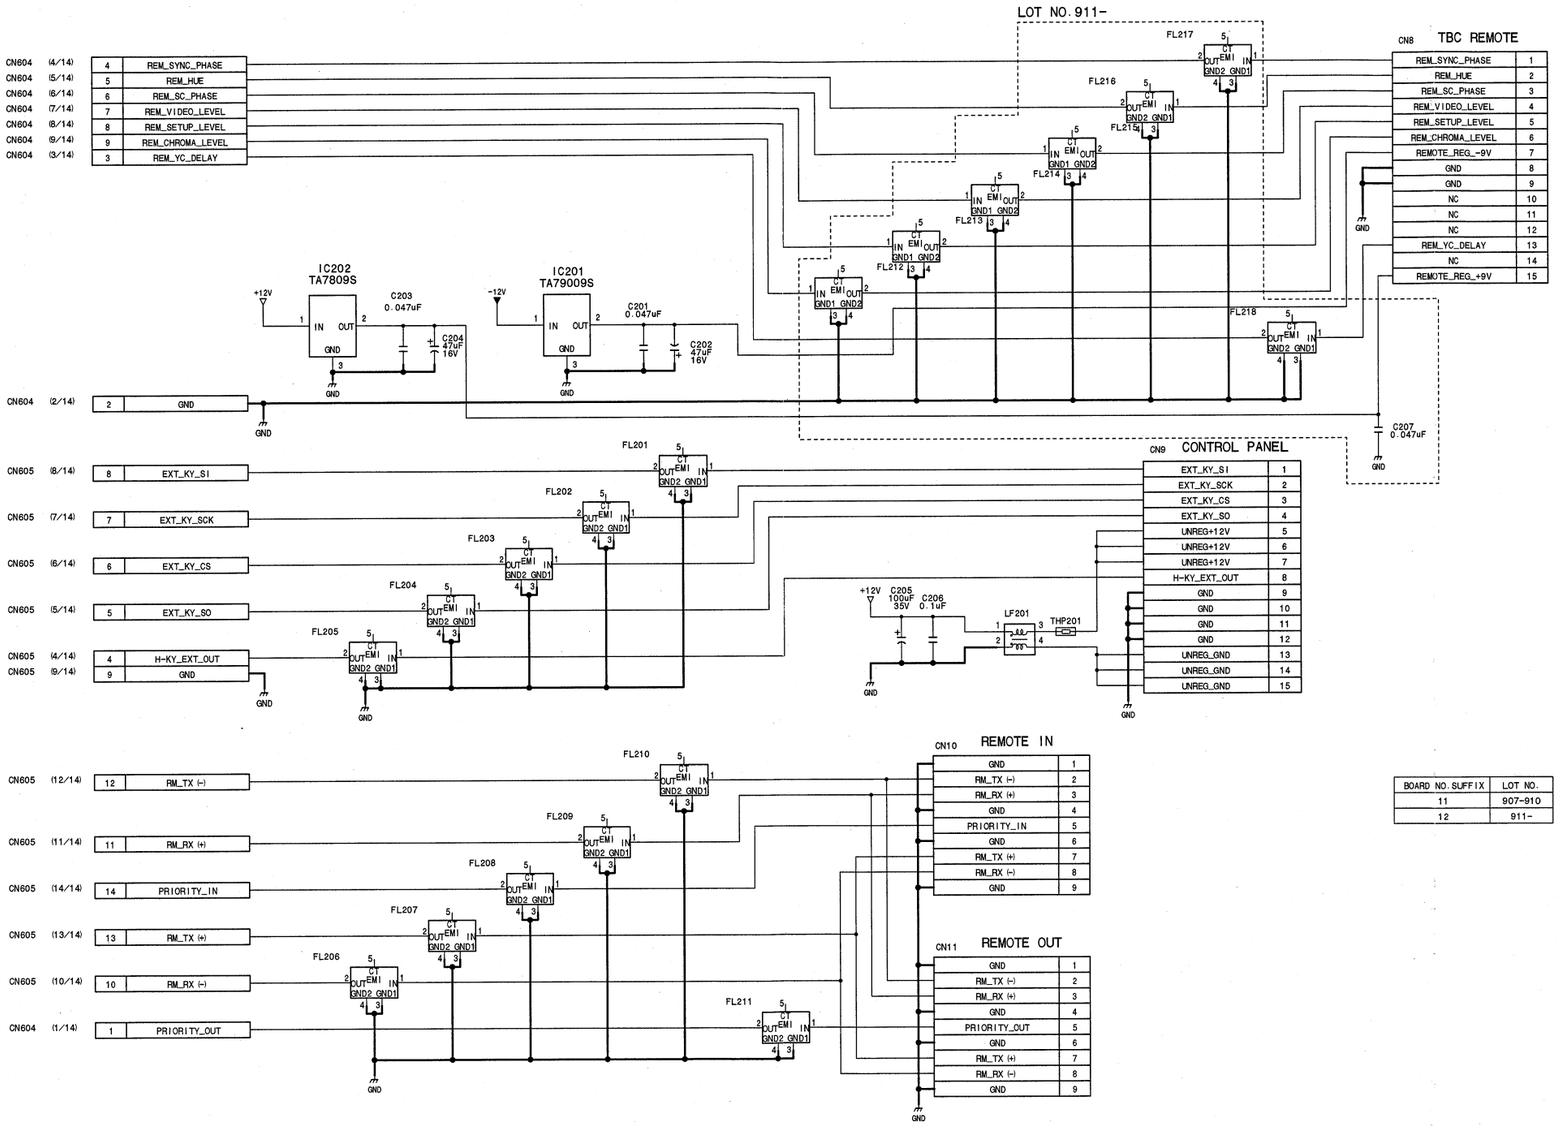

BOARD NO.SUFFIX	LOT NO.
11	907-910
12	911-

Video/remote interface

CP-341 (2/2)

BOARD NO. 1-675-550-11, 12
LOT NO. 907-
DSR-2000_CP-341_012_2

CP-342/342A (1/2)

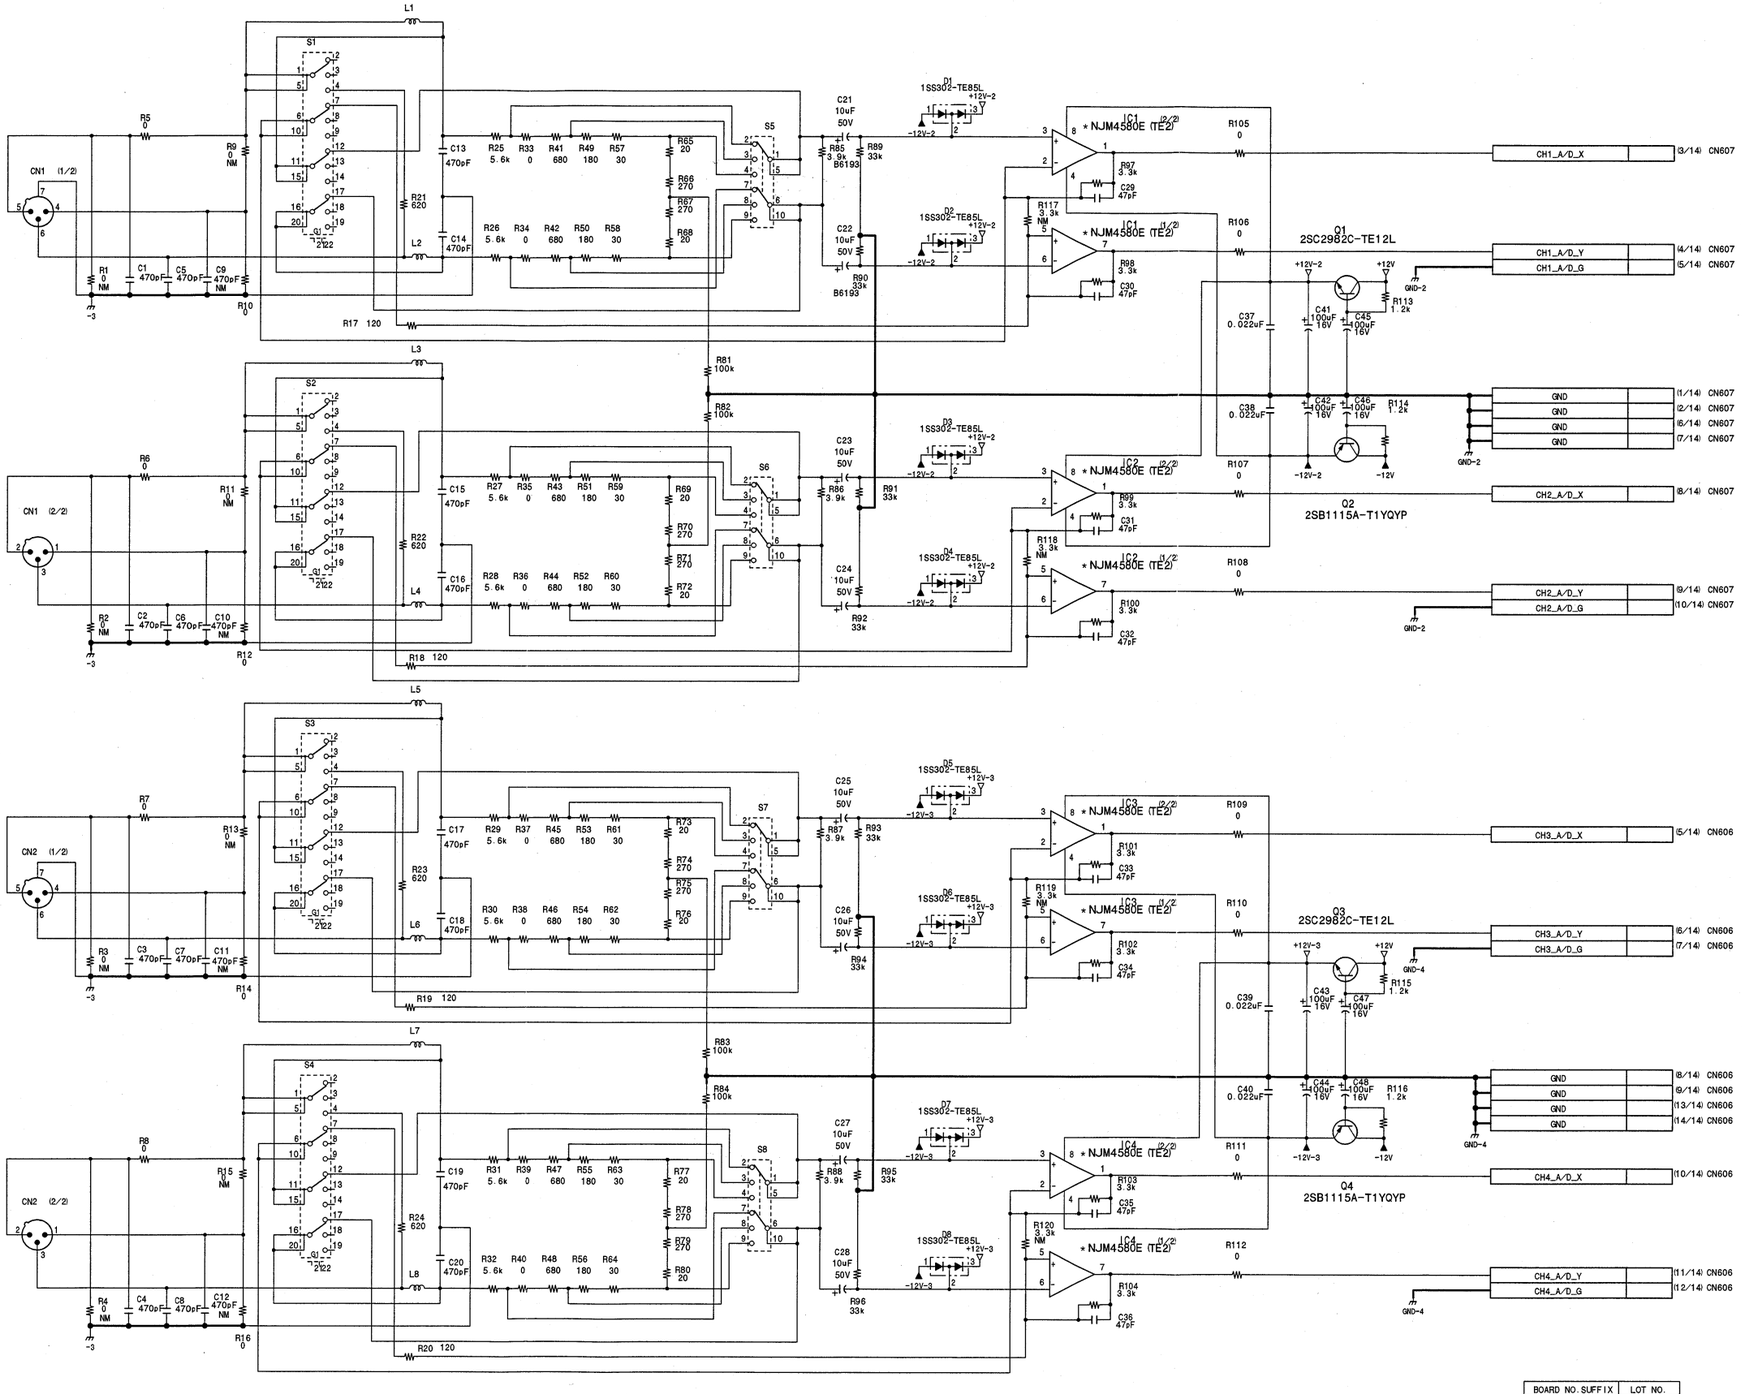

#	NTSC	PAL	J
C1	470pF 50V CH	470pF 50V CH	NM
C2	470pF 50V CH	470pF 50V CH	NM
C3	470pF 50V CH	470pF 50V CH	NM
C4	470pF 50V CH	470pF 50V CH	NM
C9	NM	NM	470pF 50V CH
C10	NM	NM	470pF 50V CH
C11	NM	NM	470pF 50V CH
C12	NM	NM	470pF 50V CH
CN1	3p 175078621	3p 175078621	3p 175078621
CN2	3p 175078621	3p 175078621	3p 175078621
R1	NM	NM	0 --- ---
R2	NM	NM	0 --- ---
R3	NM	NM	0 --- ---
R4	NM	NM	0 --- ---
R5	0 --- ---	0 --- ---	NM
R6	0 --- ---	0 --- ---	NM
R7	0 --- ---	0 --- ---	NM
R8	0 --- ---	0 --- ---	NM
R9	NM	NM	0 --- ---
R10	0 --- ---	0 --- ---	NM
R11	NM	NM	0 --- ---
R12	0 --- ---	0 --- ---	NM
R13	NM	NM	0 --- ---
R14	0 --- ---	0 --- ---	NM
R15	NM	NM	0 --- ---
R16	0 --- ---	0 --- ---	NM

NOTE
*

REF. NO.	CHANGE INFORMATION	LOT NO.
IC1-IC4	NJM4580E → NJM4580E (TE2)	911-

BOARD NO. SUFFIX	LOT NO.
11	907-910
12	911-

Audio interface

CP-342/342A (1/2)

BOARD NO. 1-675-551-11, 12
LOT NO. 907-
DSR-2000_CP-342_012_1

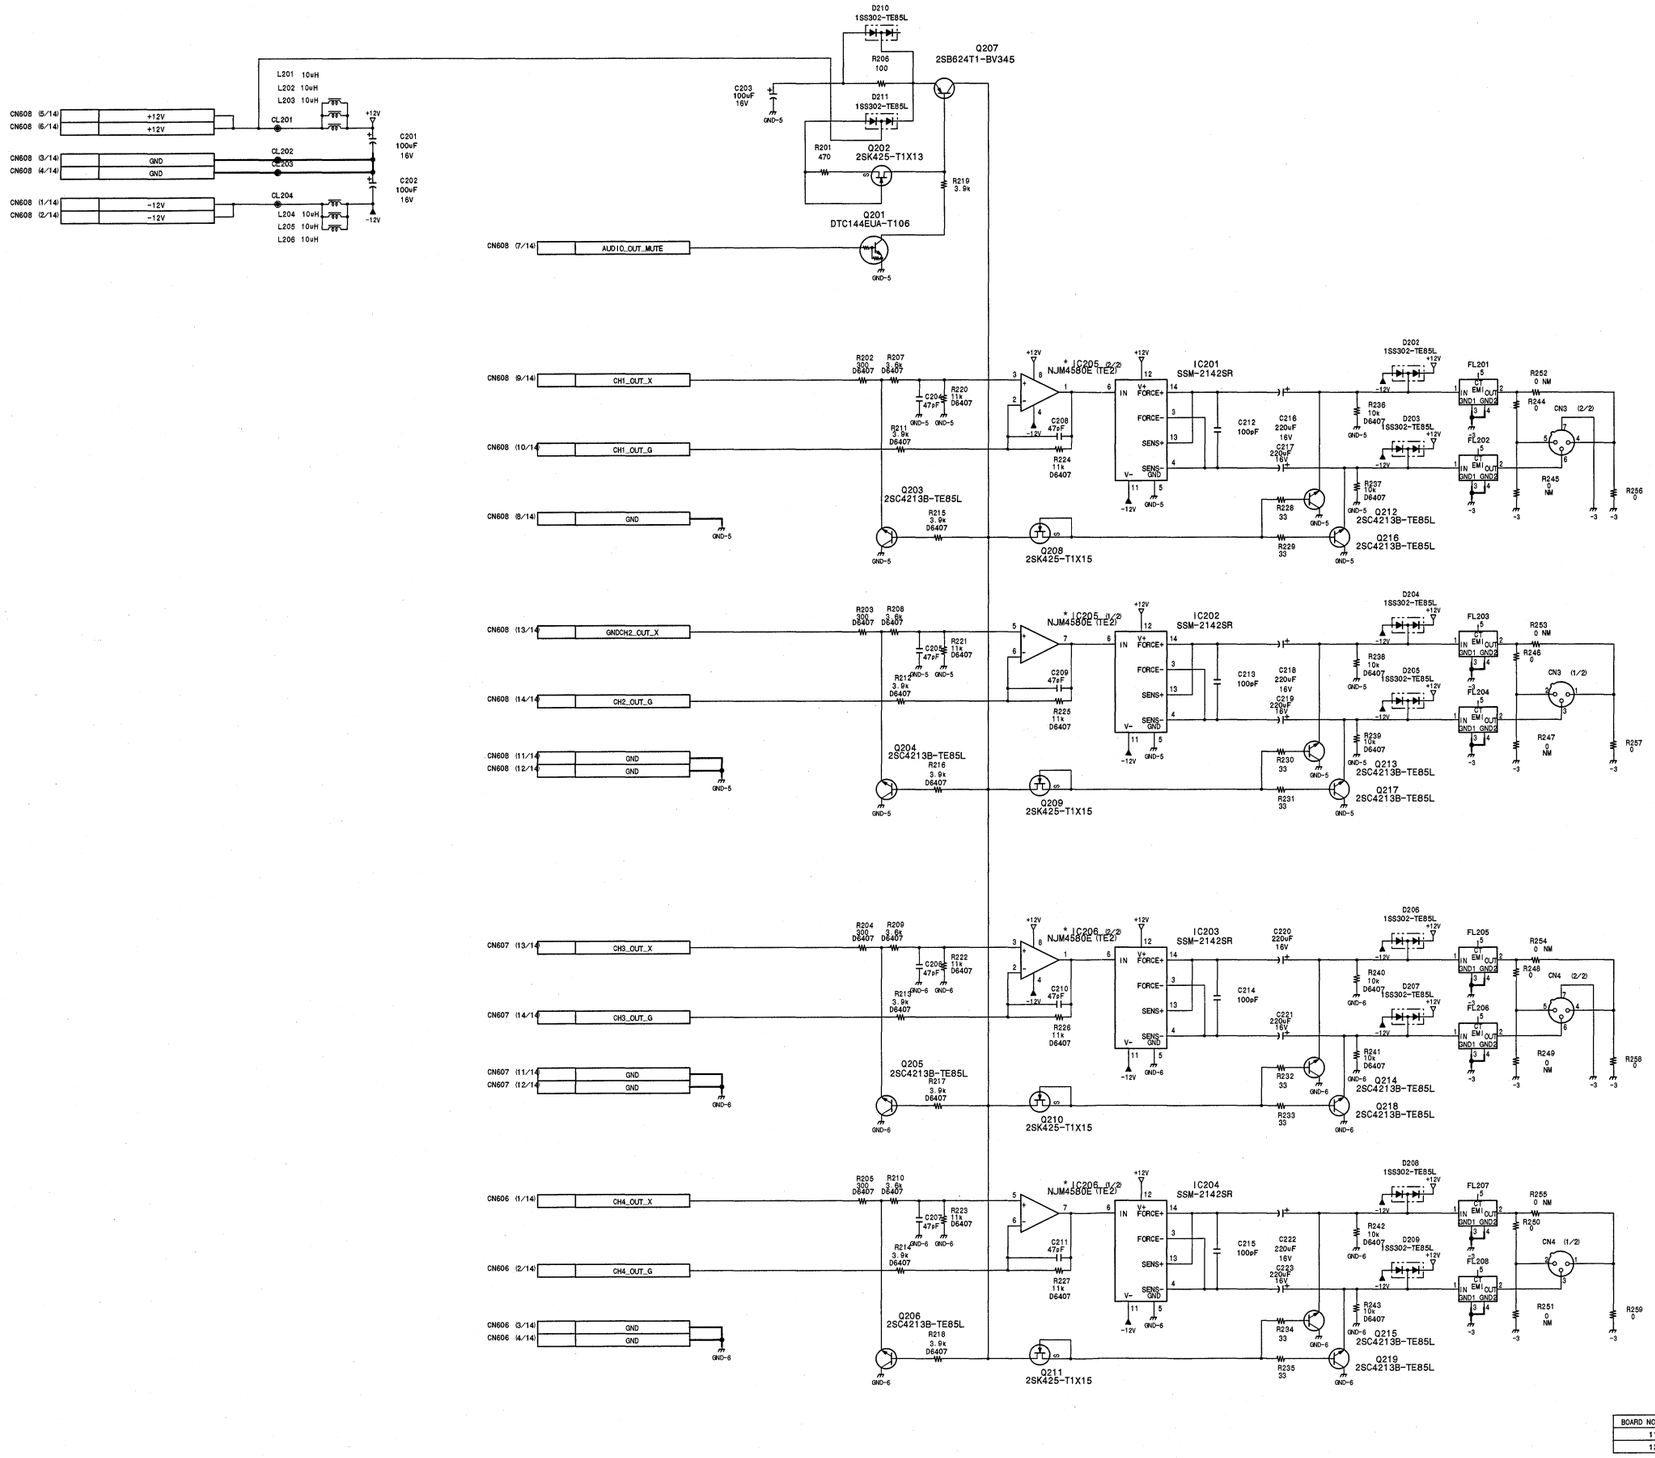

BOARD NO. SUFFIX	LOT NO.
11	907-910
12	911-

#	NTSC	PAL	J
C1	470pF 50V CH	470pF 50V CH	NM
C2	470pF 50V CH	470pF 50V CH	NM
C3	470pF 50V CH	470pF 50V CH	NM
C4	470pF 50V CH	470pF 50V CH	NM
C9	NM	NM	470pF 50V CH
C10	NM	NM	470pF 50V CH
C11	NM	NM	470pF 50V CH
C12	NM	NM	470pF 50V CH
CN1	9s 175078621	9s 175078621	9s 175078621
CN2	9s 175078621	9s 175078621	9s 175078621
R1	NM	NM	0 --- ---
R2	NM	NM	0 --- ---
R3	NM	NM	0 --- ---
R4	NM	NM	0 --- ---
R5	0 --- ---	0 --- ---	NM
R6	0 --- ---	0 --- ---	NM
R7	0 --- ---	0 --- ---	NM
R8	0 --- ---	0 --- ---	NM
R9	NM	NM	0 --- ---
R10	0 --- ---	0 --- ---	NM
R11	NM	NM	0 --- ---
R12	0 --- ---	0 --- ---	NM
R13	NM	NM	0 --- ---
R14	0 --- ---	0 --- ---	NM
R15	NM	NM	0 --- ---
R16	0 --- ---	0 --- ---	NM

NOTE
*

REF. NO.	CHANGE INFORMATION	LOT NO.
IC205	NJM4580E → NJM4580E (TE2)	911-
IC206		

Audio interface

CP-342/342A (2/2)

BOARD NO. 1-675-551-11, 12
LOT NO. 907-

DSR-2000_CP-342_012_2

DPR-136 (1/15)

DSR-2000 (UC) : S/N 101241 and Higher
DSR-2000 (J) : S/N 301311 and Higher
DSR-2000P (CE) : S/N 401551 and Higher

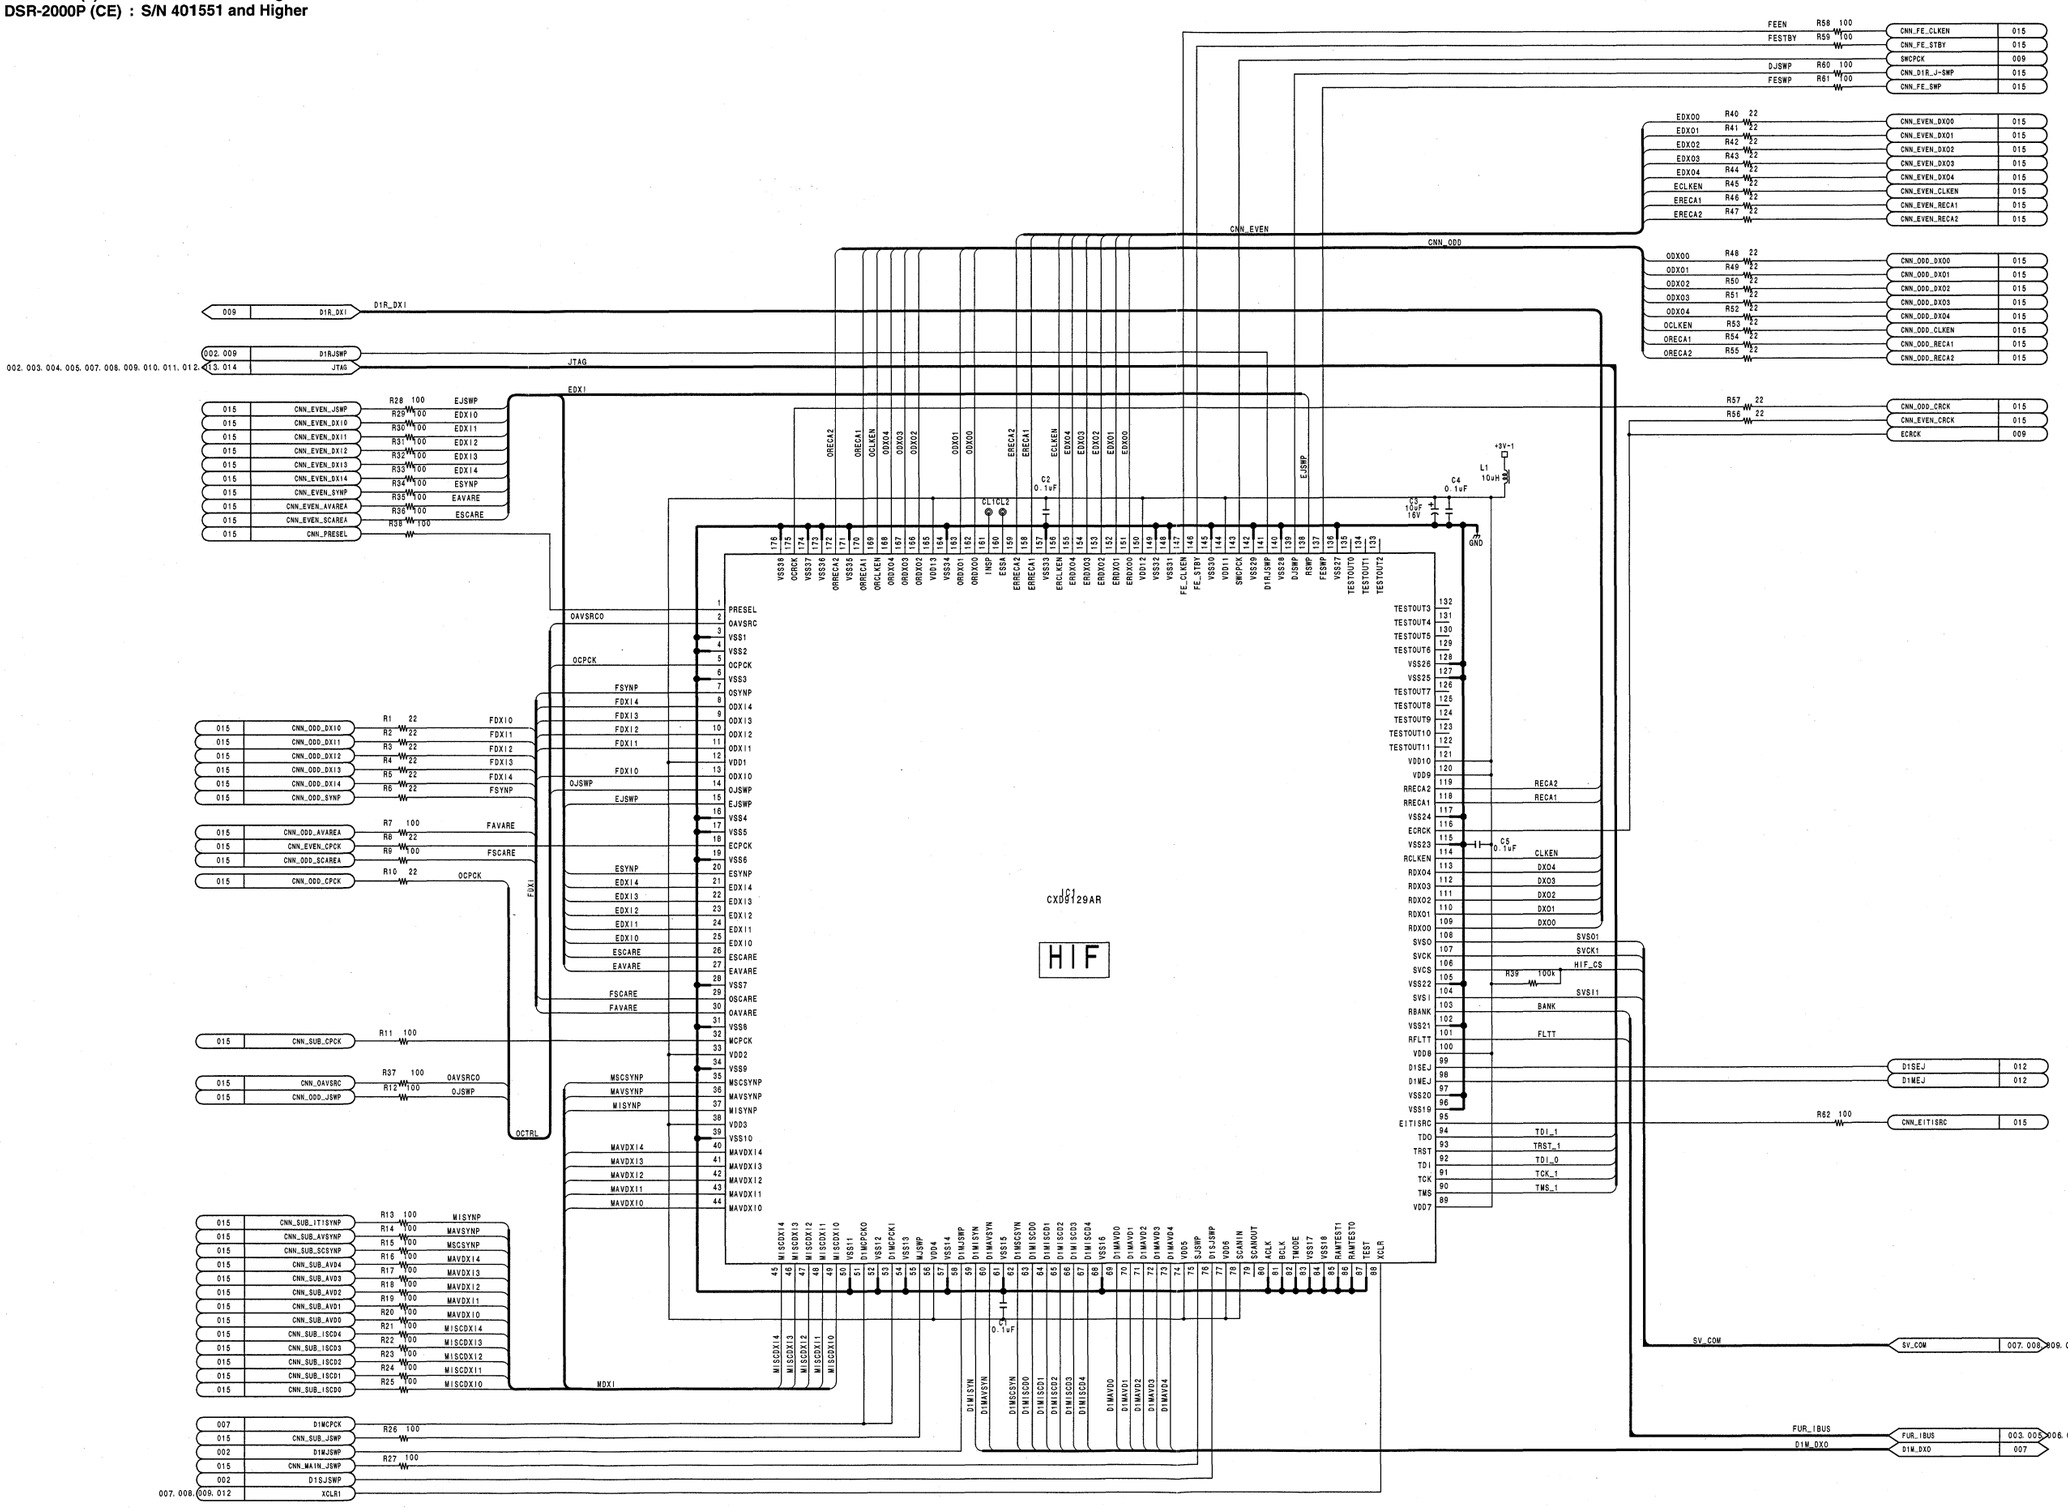

Digital process
DPR-136 (1/15)
BOARD NO. 1-675-560-16
LOT NO. 113
DSR-2000_DPR-136_016_1

15-38 (c) 15-38 (c)

DSR-2000/2000P

DPR-136 (2/15)

DSR-2000 (UC) : S/N 101241 and Higher
DSR-2000 (J) : S/N 301311 and Higher
DSR-2000P (CE) : S/N 401551 and Higher

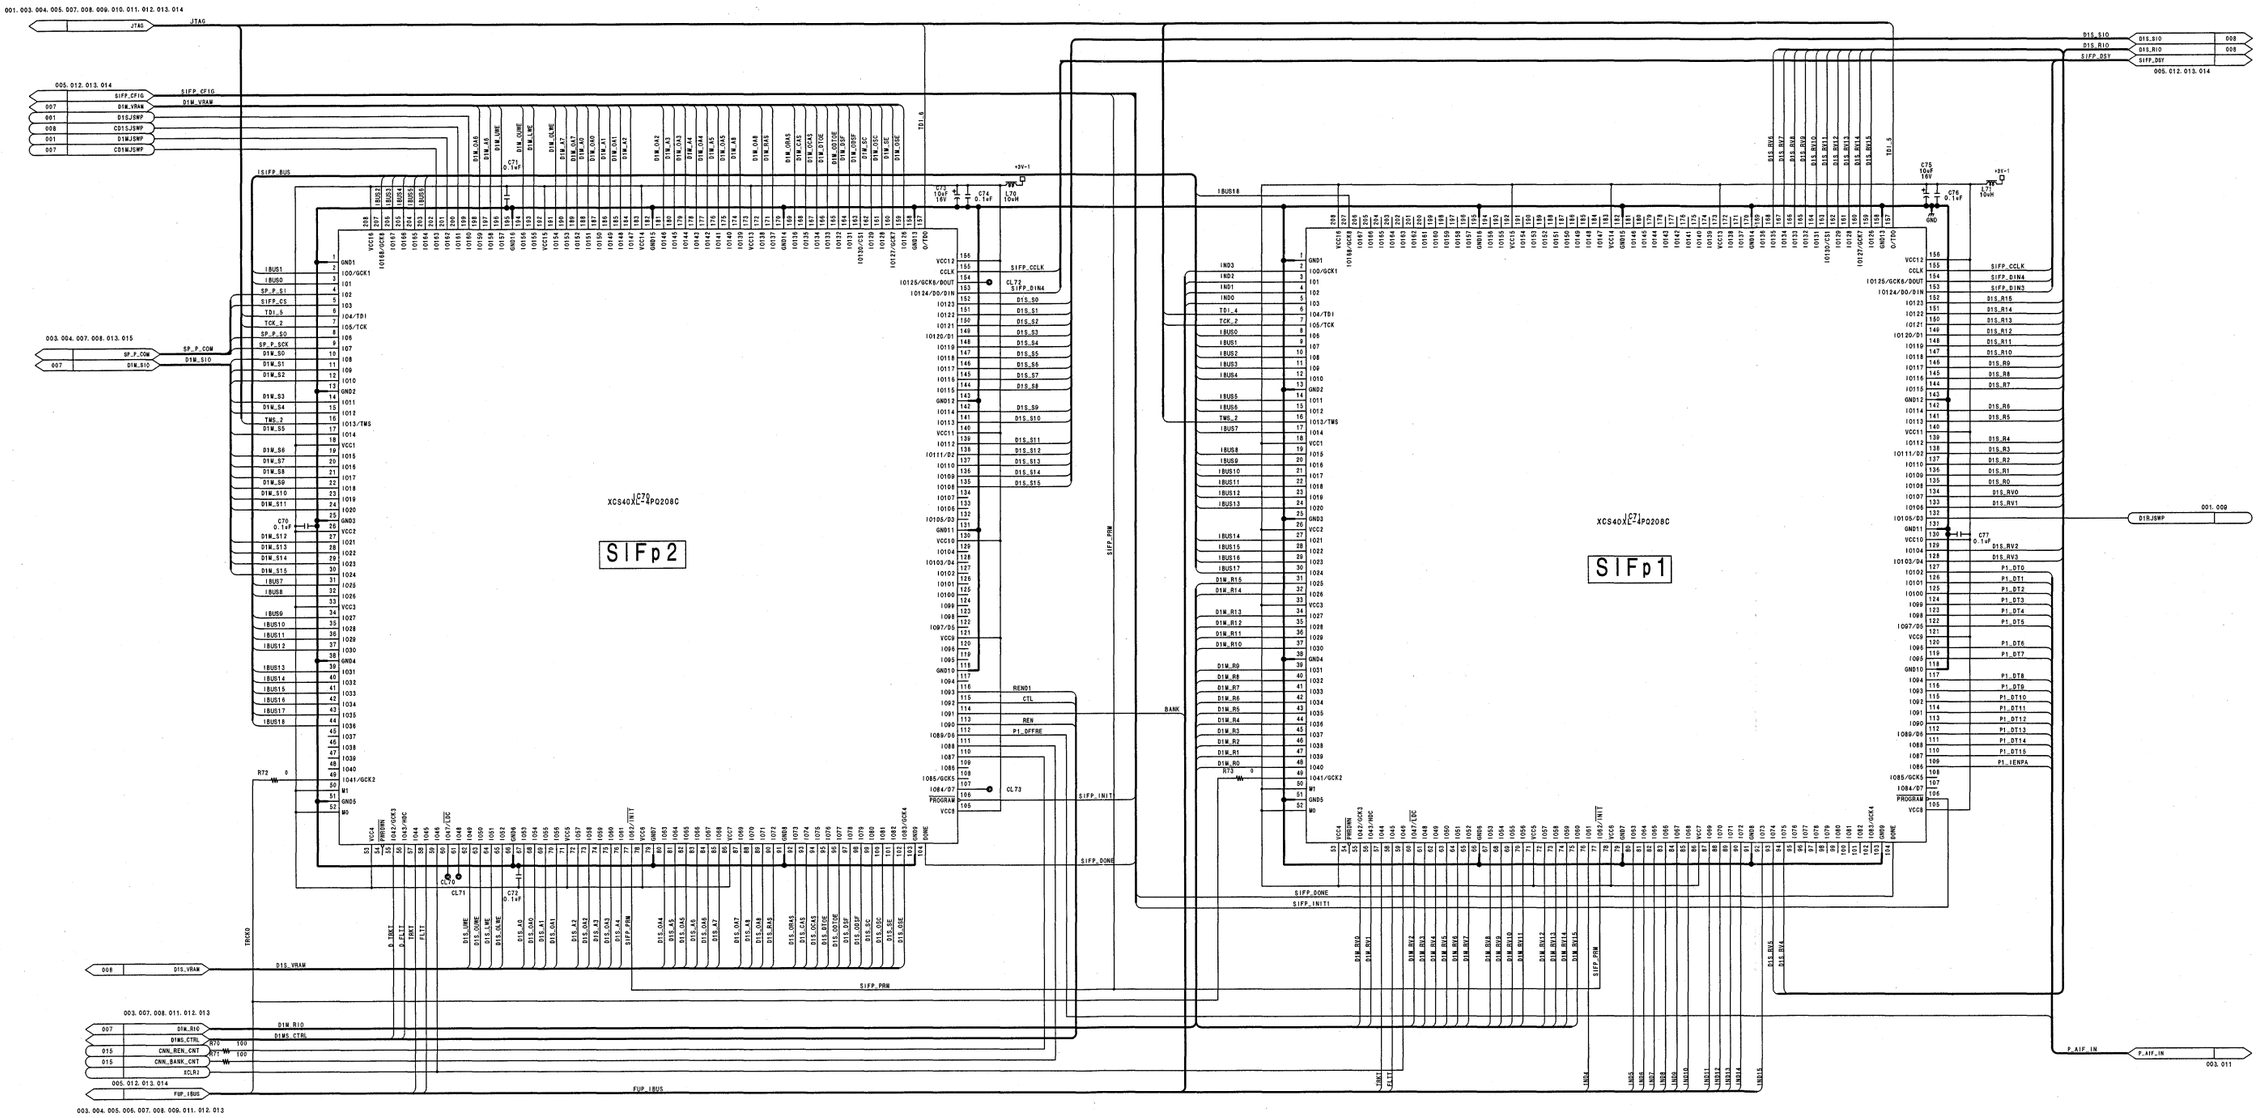

Digital process
DPR-136 (2/15)
BOARD NO. 1-675-560-16
LOT NO. 113-
DSR-2000_DPR-136_016_2

DPR-136 (3/15)

DSR-2000 (UC) : S/N 101241 and Higher
DSR-2000 (J) : S/N 301311 and Higher
DSR-2000P (CE) : S/N 401551 and Higher

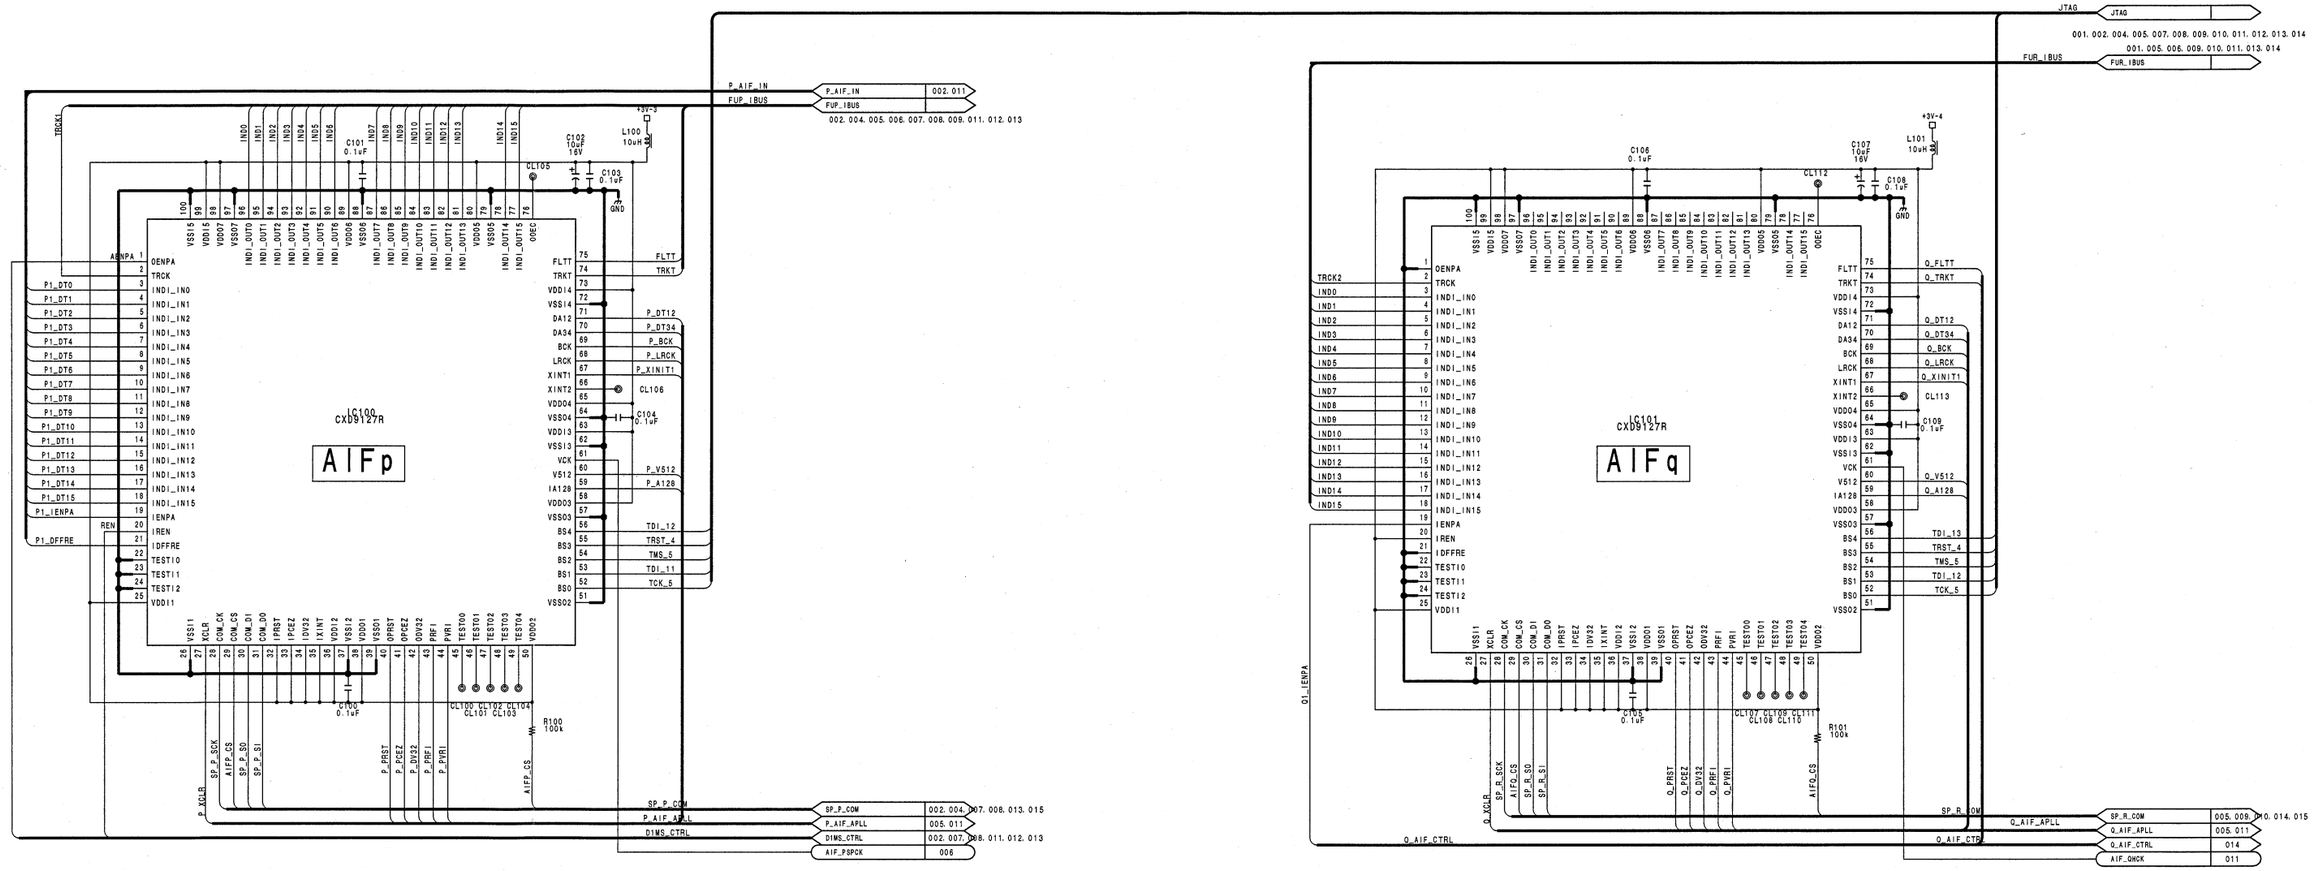

Digital process
DPR-136 (3/15)
BOARD NO. 1-675-560-16
LOT NO. 113-
DSR-2000_DPR-136_016_3

DPR-136 (4/15)

DSR-2000 (UC) : S/N 101241 and Higher
DSR-2000 (J) : S/N 301311 and Higher
DSR-2000P (CE) : S/N 401551 and Higher

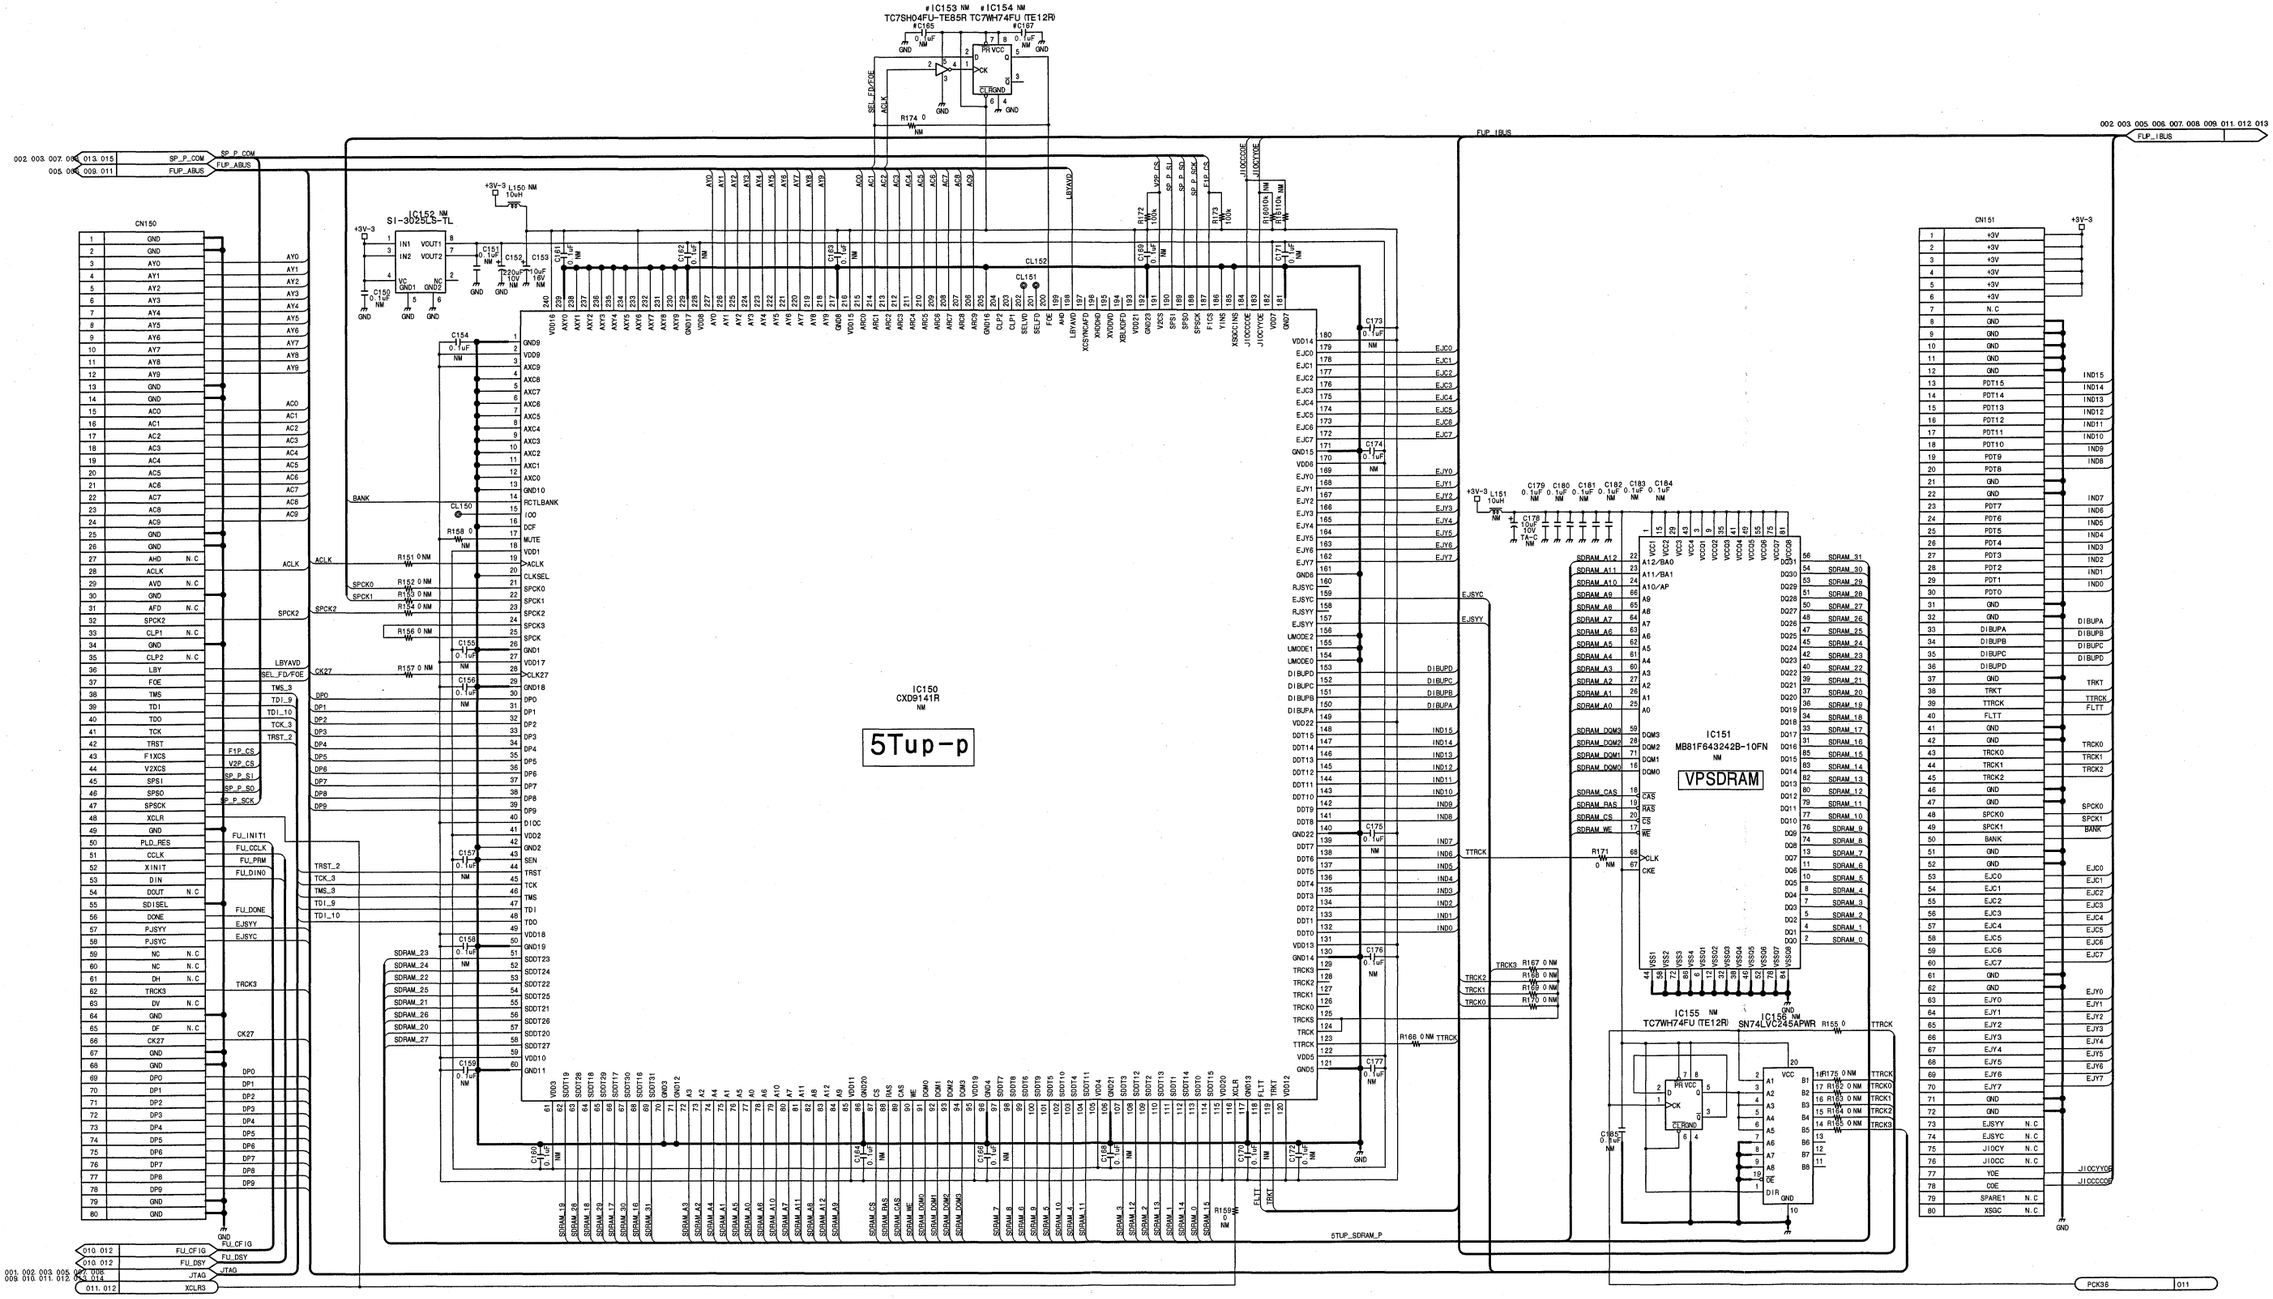

Digital process
DPR-136 (4/15)
BOARD NO. 1-675-560-16
LOT NO. 113-
DSR-2000_DPR-136_016_4

DPR-136 (5/15)

DSR-2000 (UC) : S/N 101241 and Higher
DSR-2000 (J) : S/N 301311 and Higher
DSR-2000P (CE) : S/N 401551 and Higher

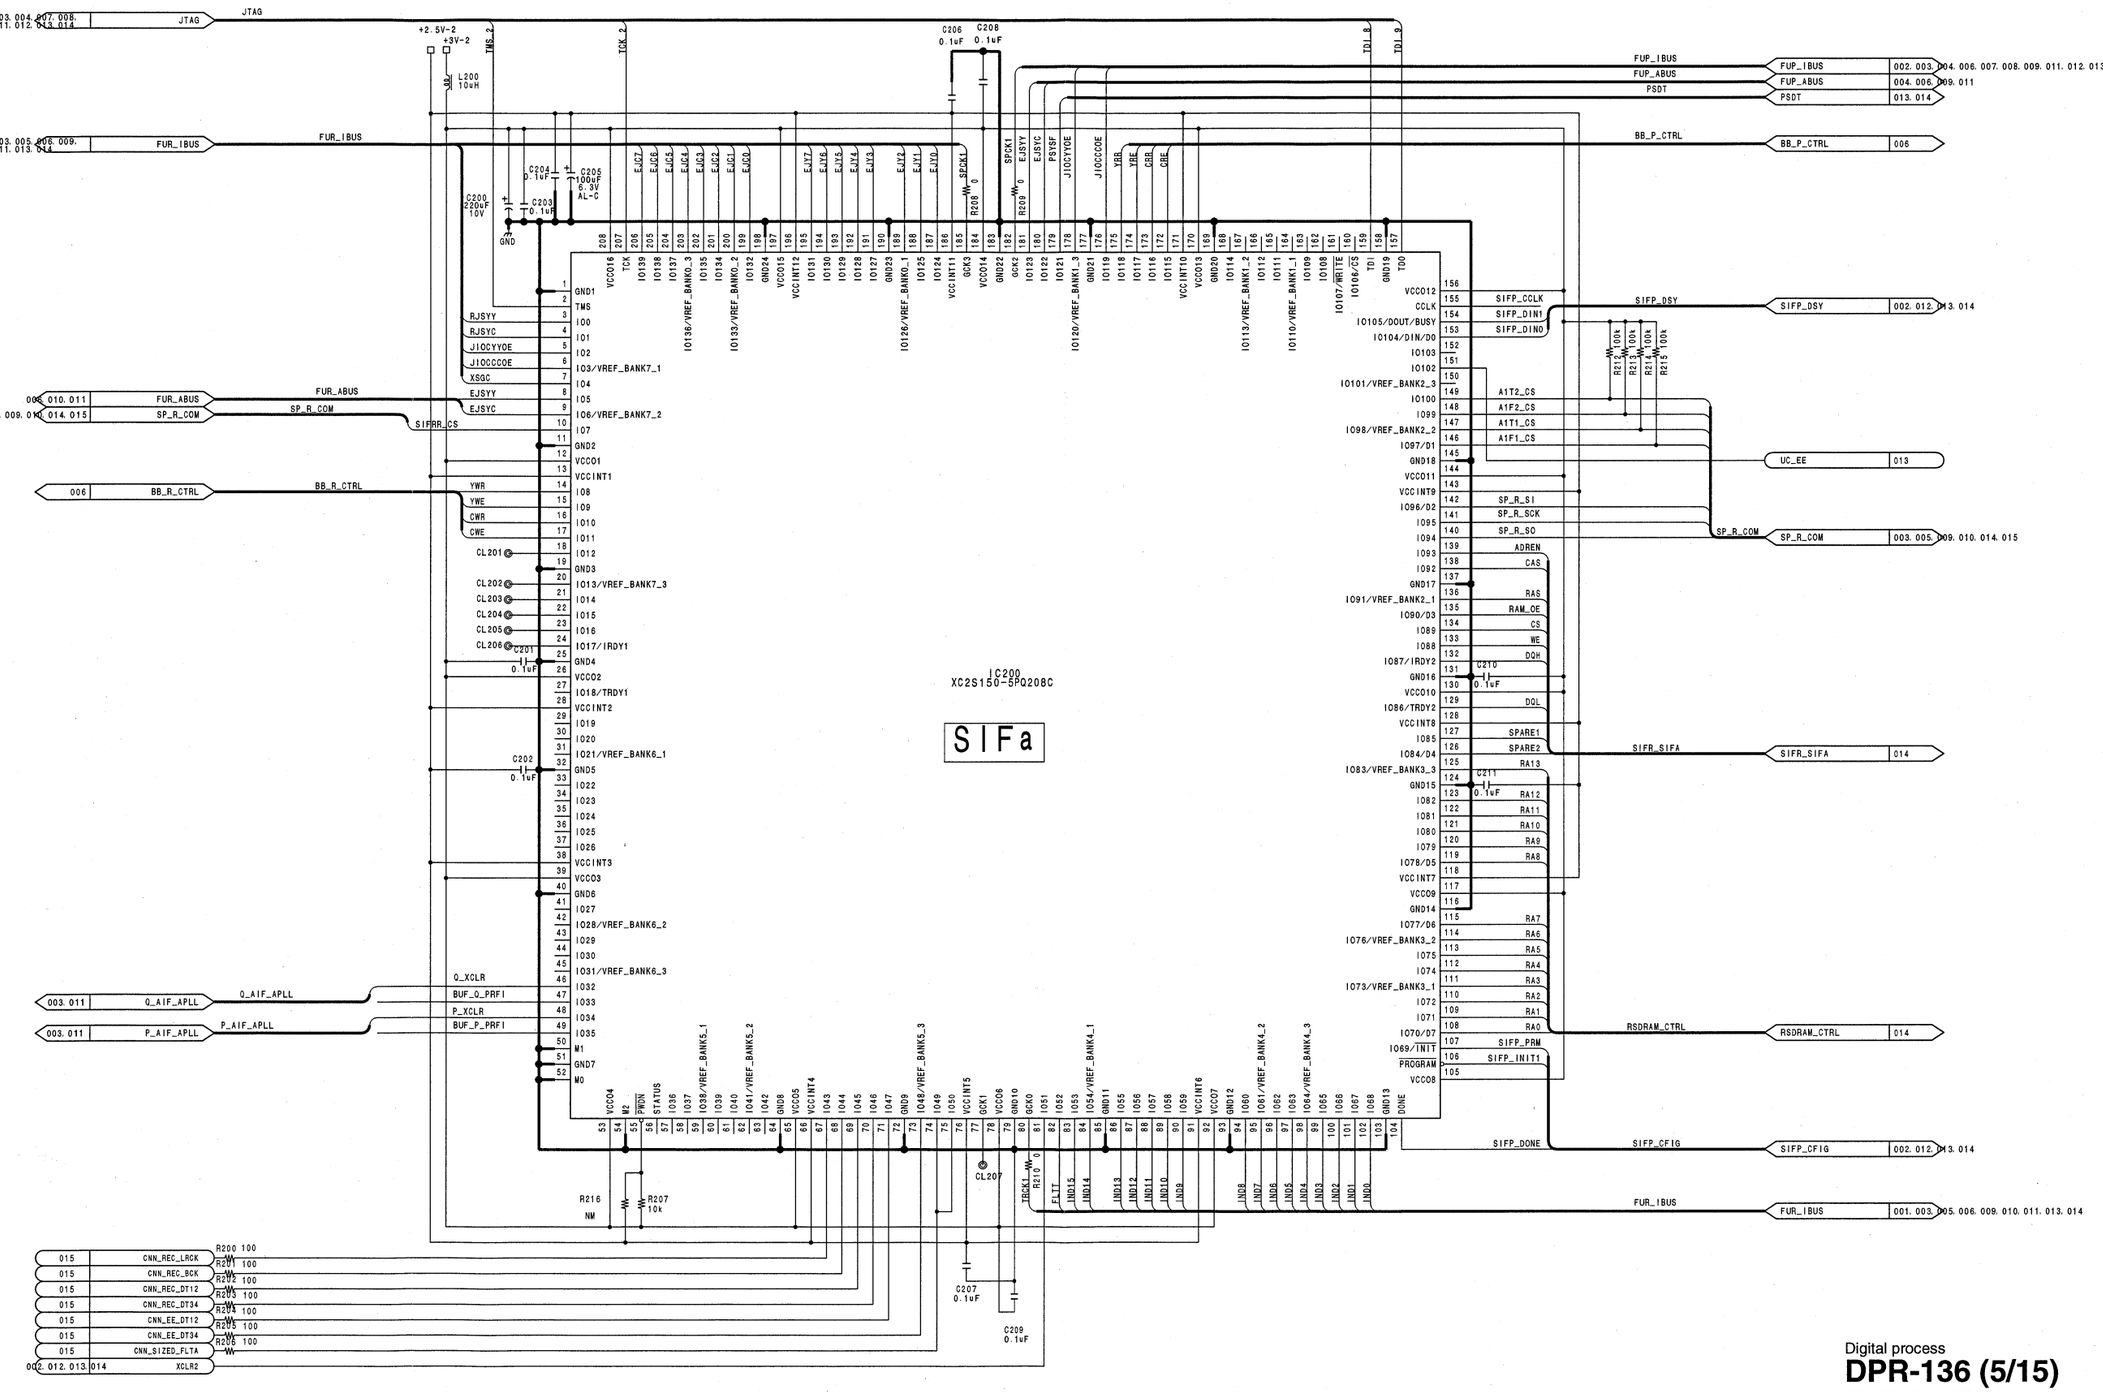

Digital process
DPR-136 (5/15)
BOARD NO. 1-675-560-16
LOT NO. 113-
DSR-2000_DPR-136_016_5

DPR-136 (6/15)

DSR-2000 (UC) : S/N 101241 and Higher
DSR-2000 (J) : S/N 301311 and Higher
DSR-2000P (CE) : S/N 401551 and Higher

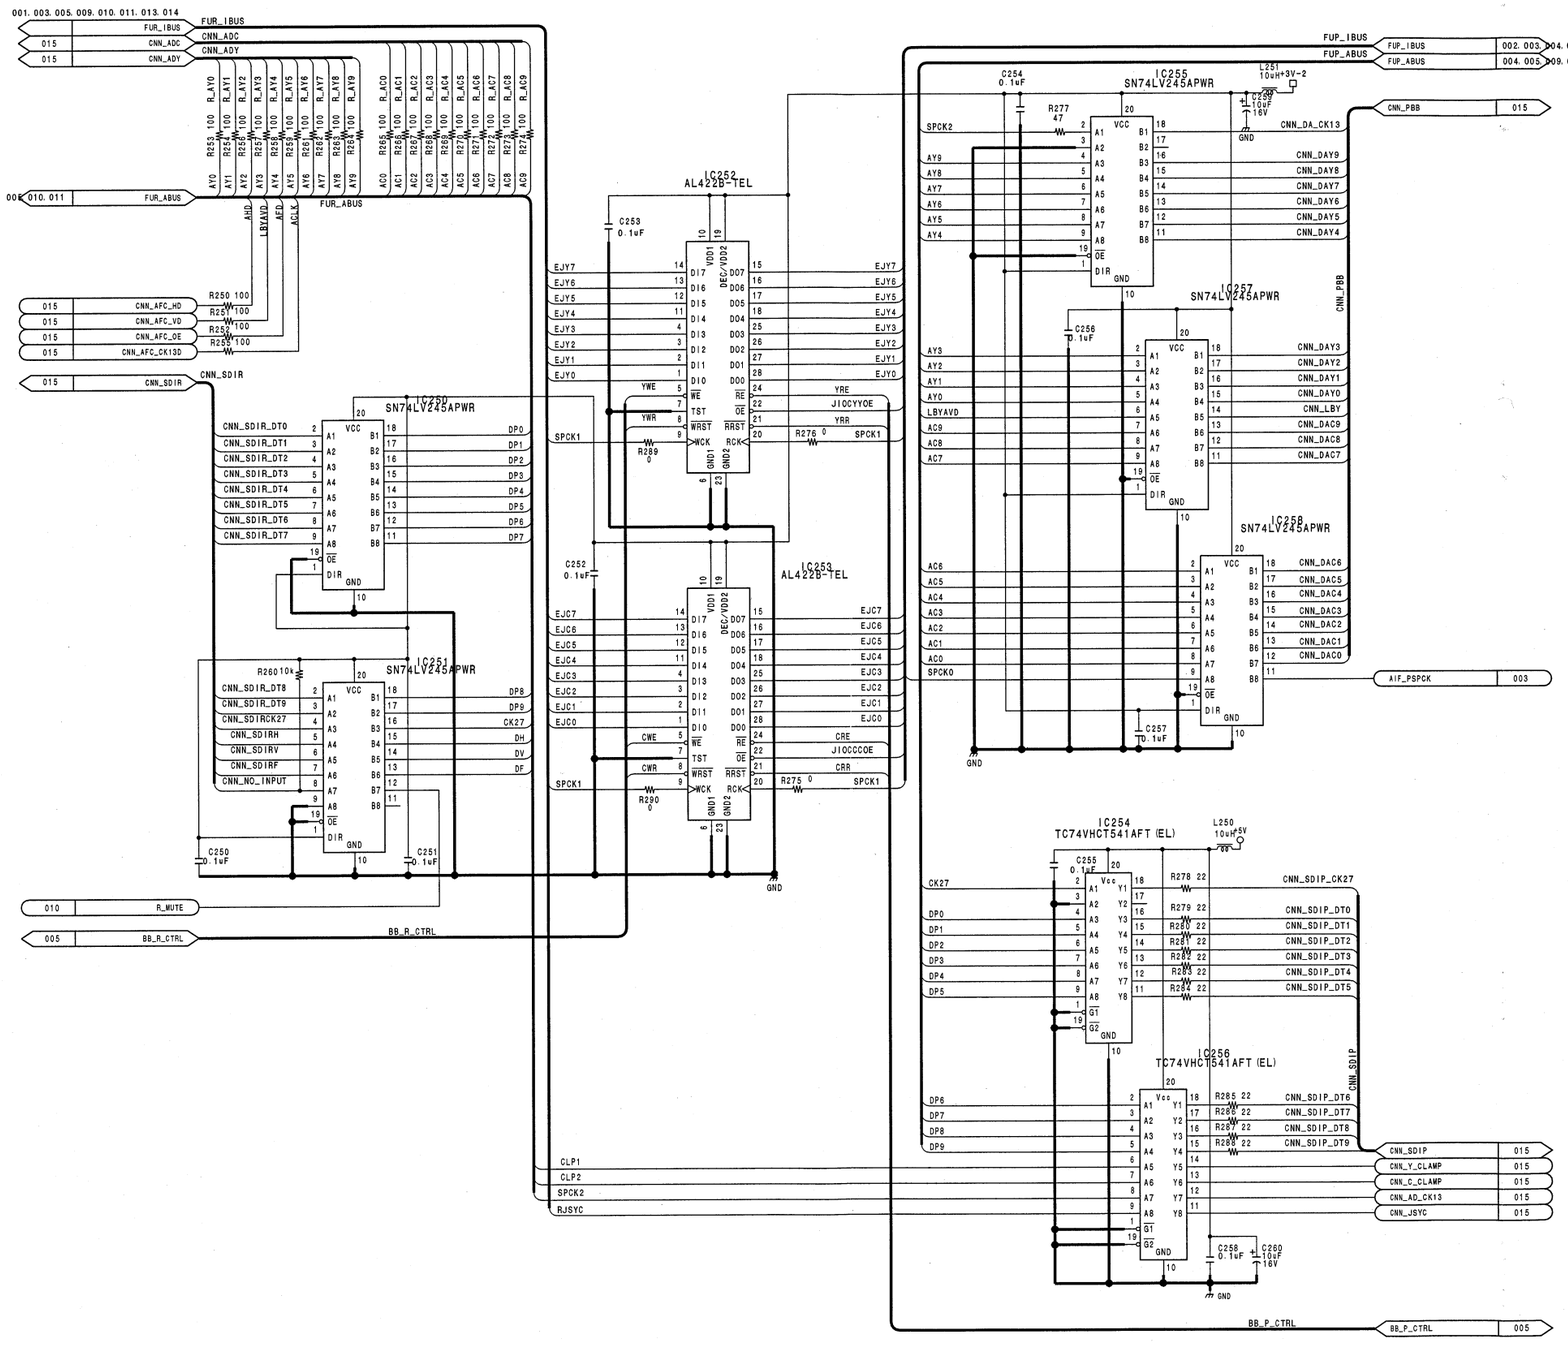

Digital process
DPR-136 (6/15)
BOARD NO. 1-675-560-16
LOT NO. 113-
DSR-2000_DPR-136_016_6

DPR-136 (7/15)

DSR-2000 (UC) : S/N 101241 and Higher
DSR-2000 (J) : S/N 301311 and Higher
DSR-2000P (CE) : S/N 401551 and Higher

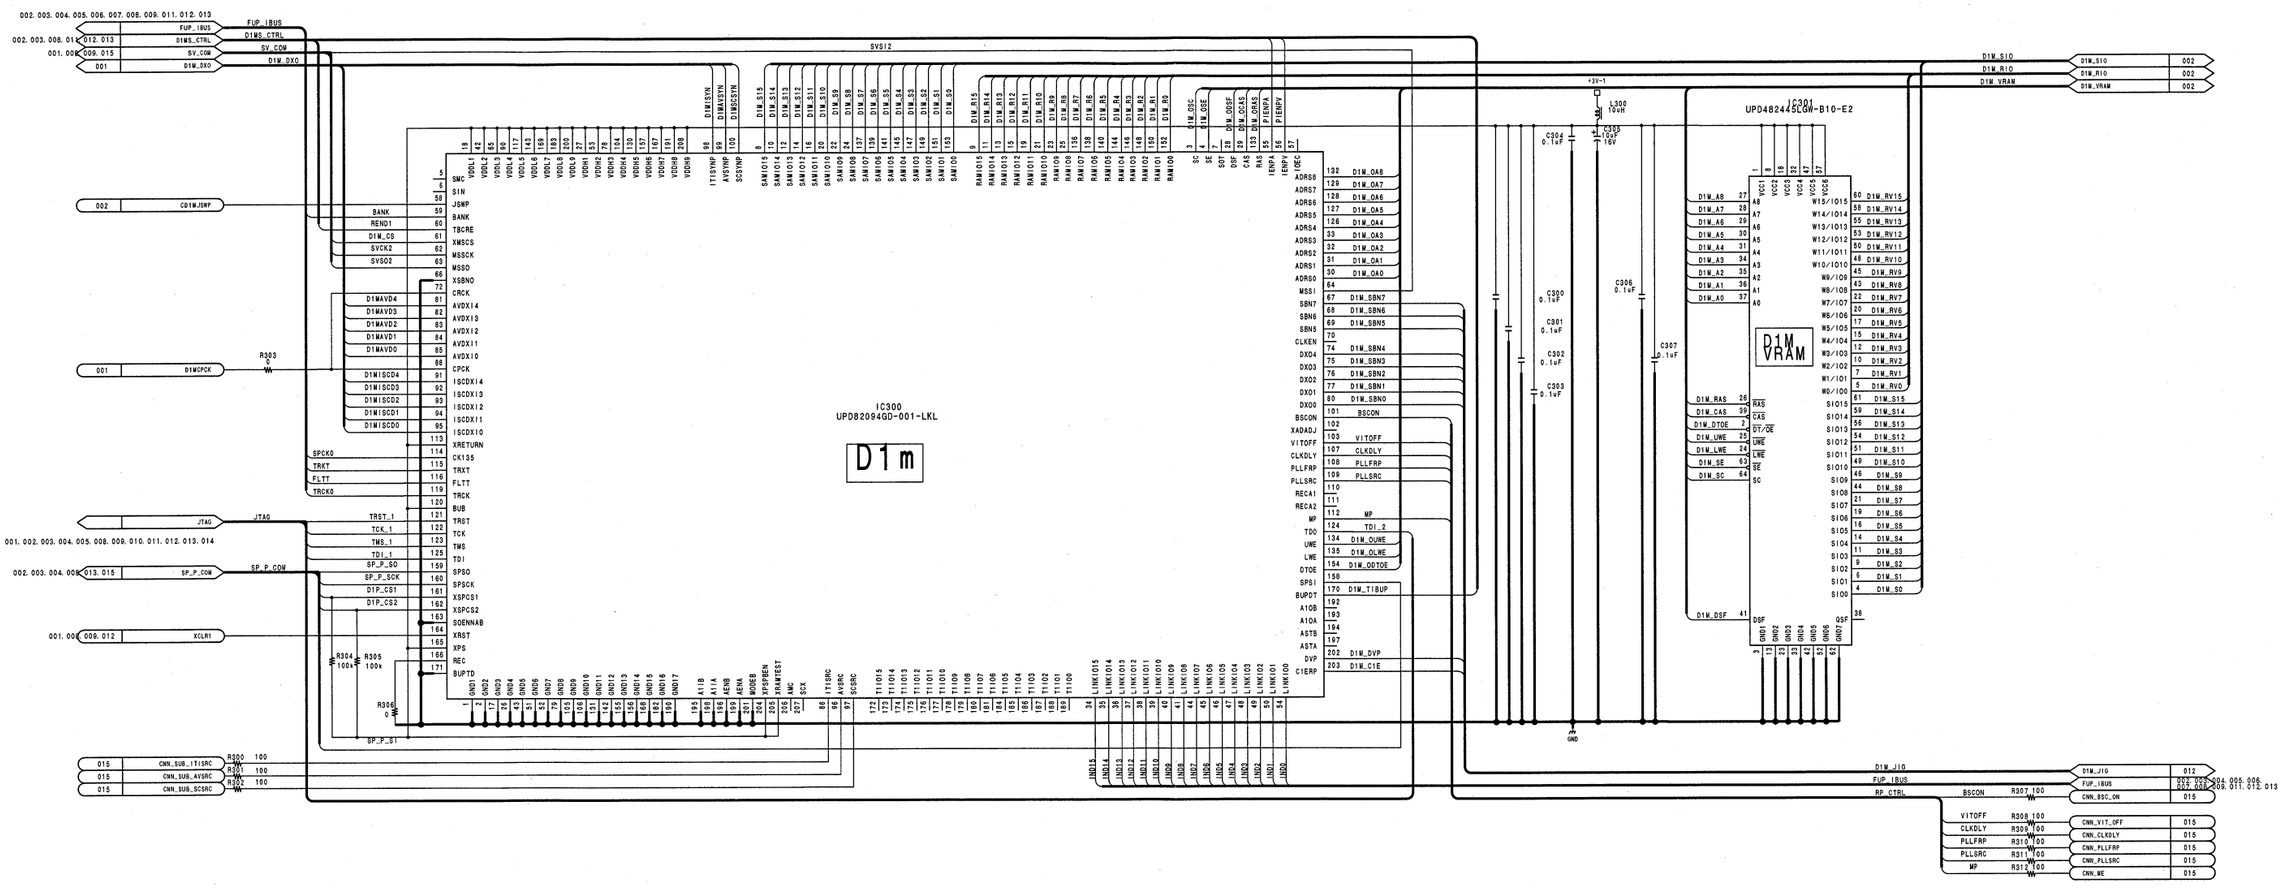

Digital process
DPR-136 (7/15)
BOARD NO. 1-675-560-16
LOT NO. 113-
DSR-2000_DPR-136_016_7

DPR-136 (8/15)

DSR-2000 (UC) : S/N 101241 and Higher
DSR-2000 (J) : S/N 301311 and Higher
DSR-2000P (CE) : S/N 401551 and Higher

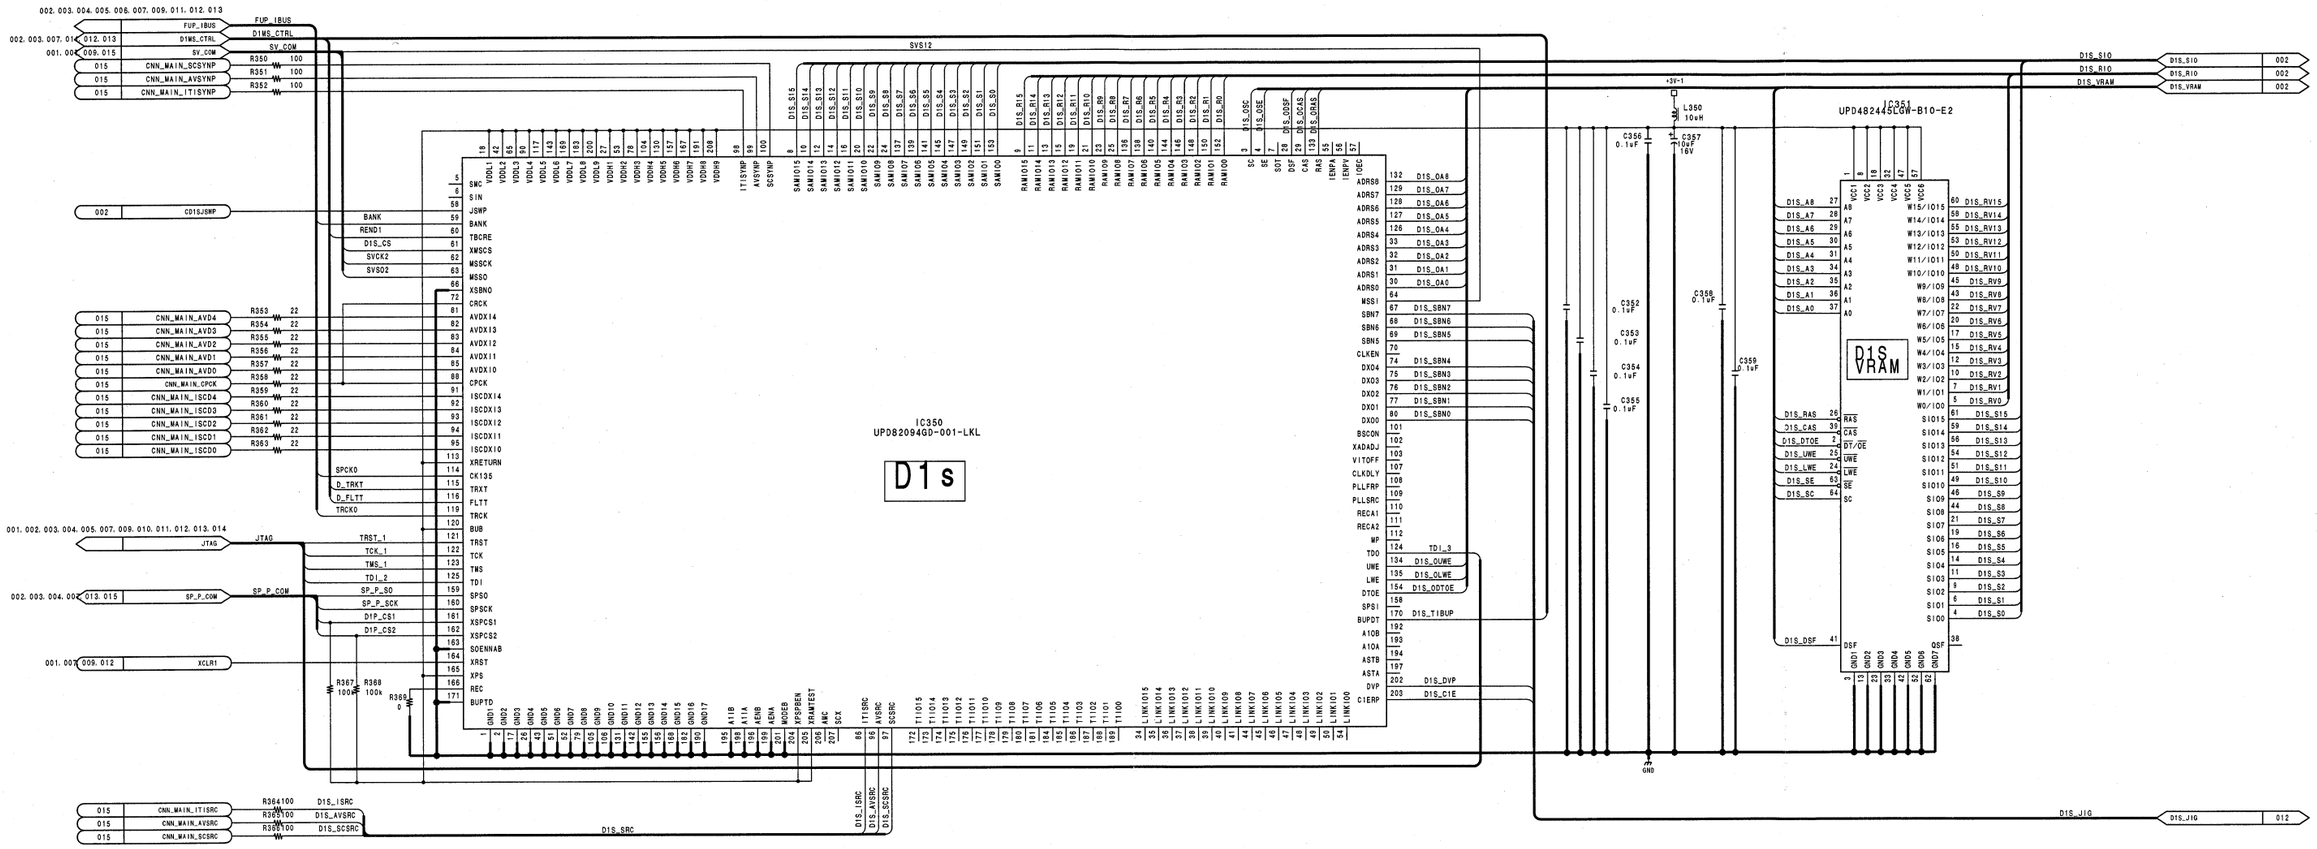

Digital process
DPR-136 (8/15)
BOARD NO. 1-675-560-16
LOT NO. 113-
DSR-2000_DPR-136_016_8

DPR-136 (9/15)

DSR-2000 (UC) : S/N 101241 and Higher
DSR-2000 (J) : S/N 301311 and Higher
DSR-2000P (CE) : S/N 401551 and Higher

Digital process
DPR-136 (9/15)
BOARD NO. 1-675-560-16
LOT NO. 113-
DSR-2000_DPR-136_016_9

DPR-136 (10/15)

DSR-2000 (UC) : S/N 101241 and Higher
DSR-2000 (J) : S/N 301311 and Higher
DSR-2000P (CE) : S/N 401551 and Higher

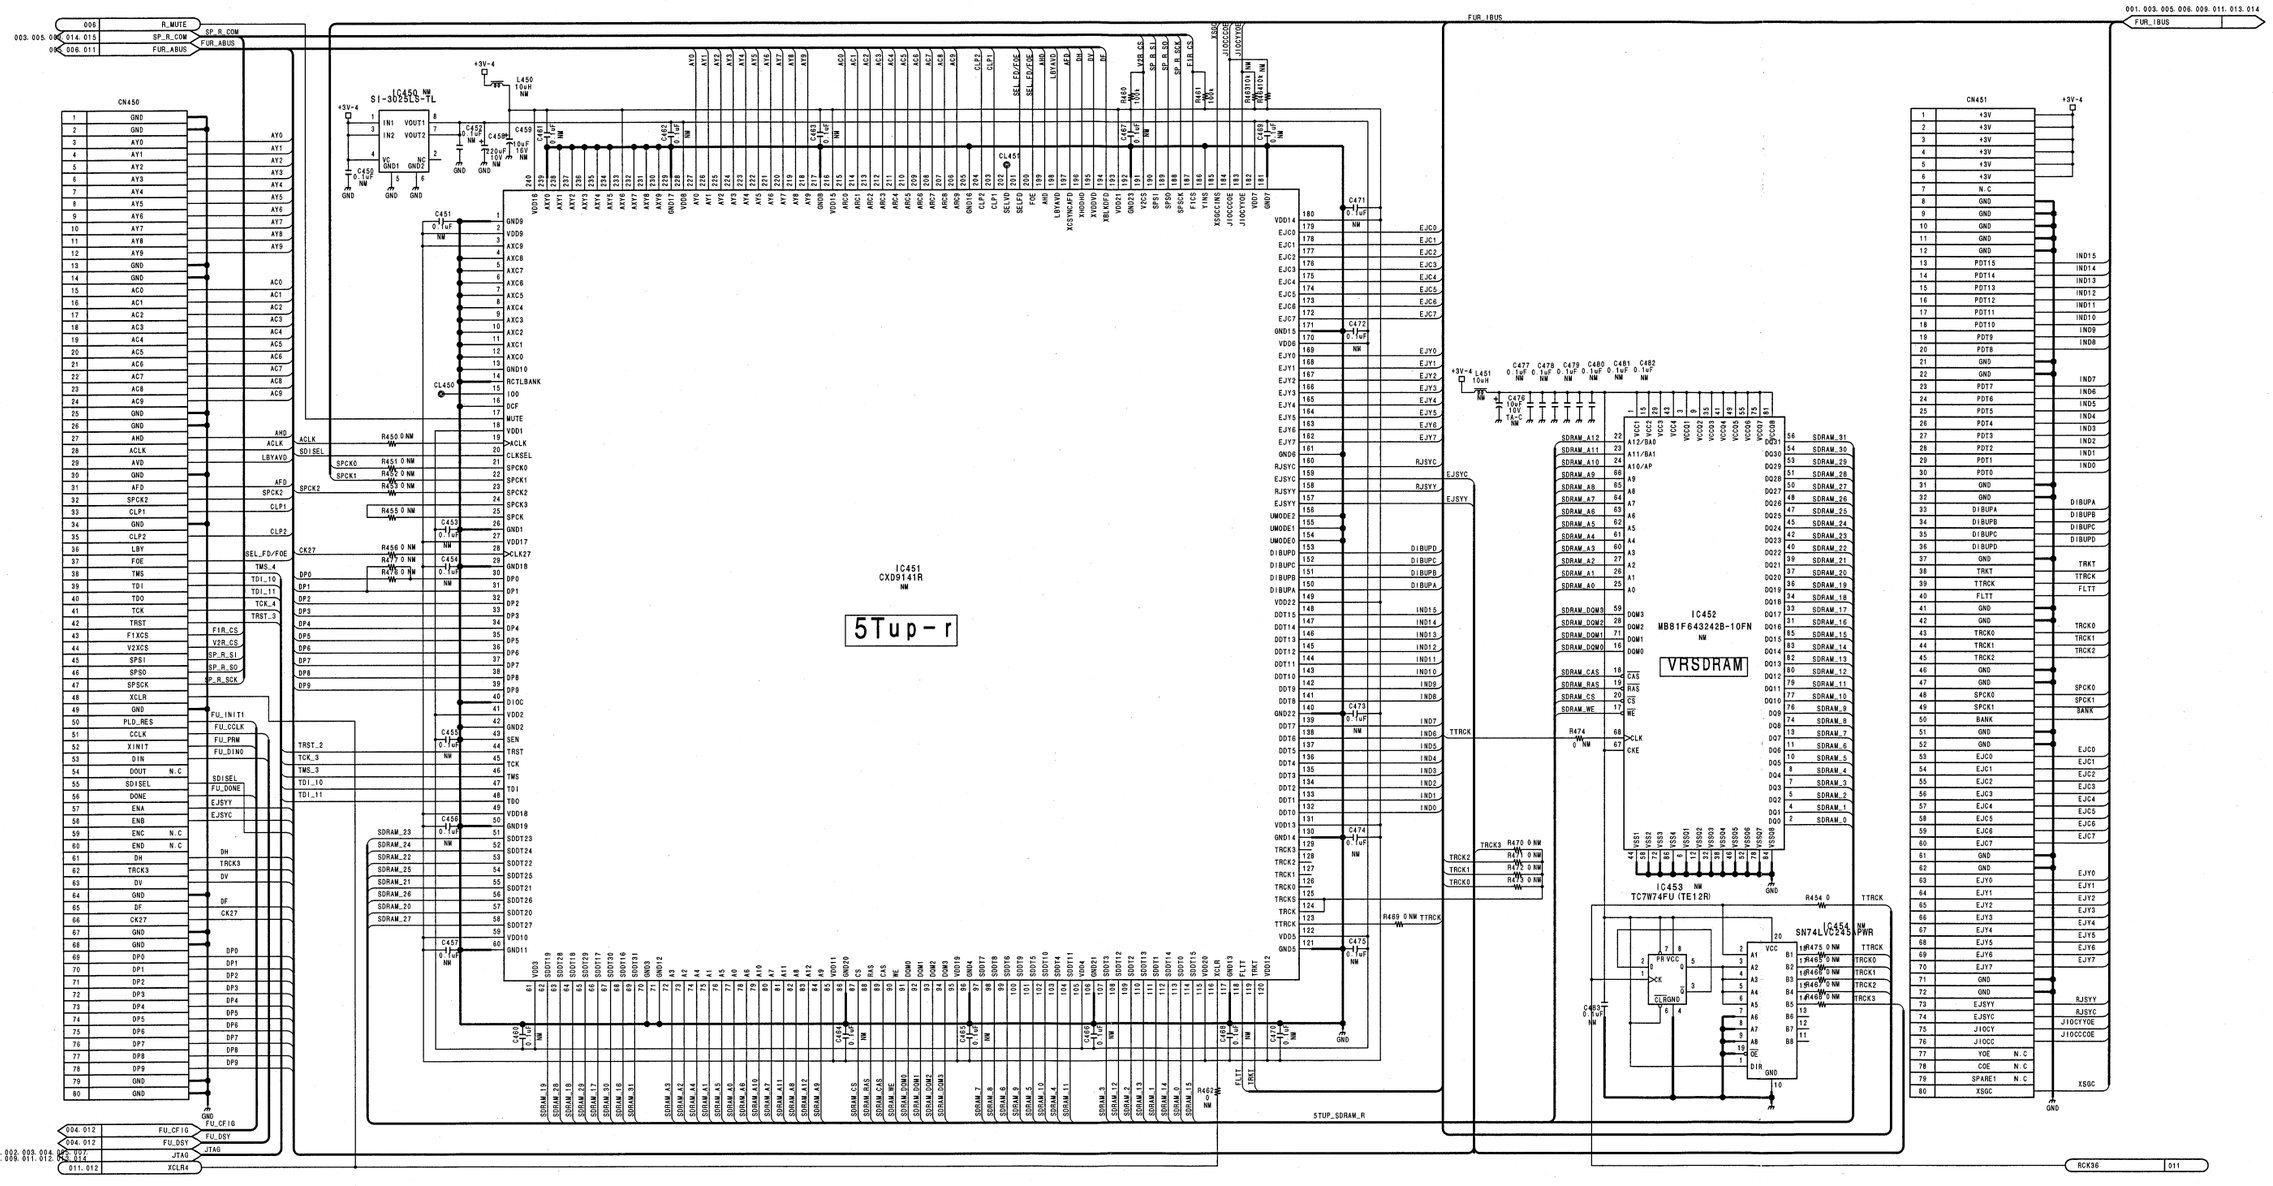

Digital process
DPR-136 (10/15)
BOARD NO. 1-675-560-16
LOT NO. 113-
DSR-2000_DPR-136_016_10

DPR-136 (11/15)

DSR-2000 (UC) : S/N 101241 and Higher
DSR-2000 (J) : S/N 301311 and Higher
DSR-2000P (CE) : S/N 401551 and Higher

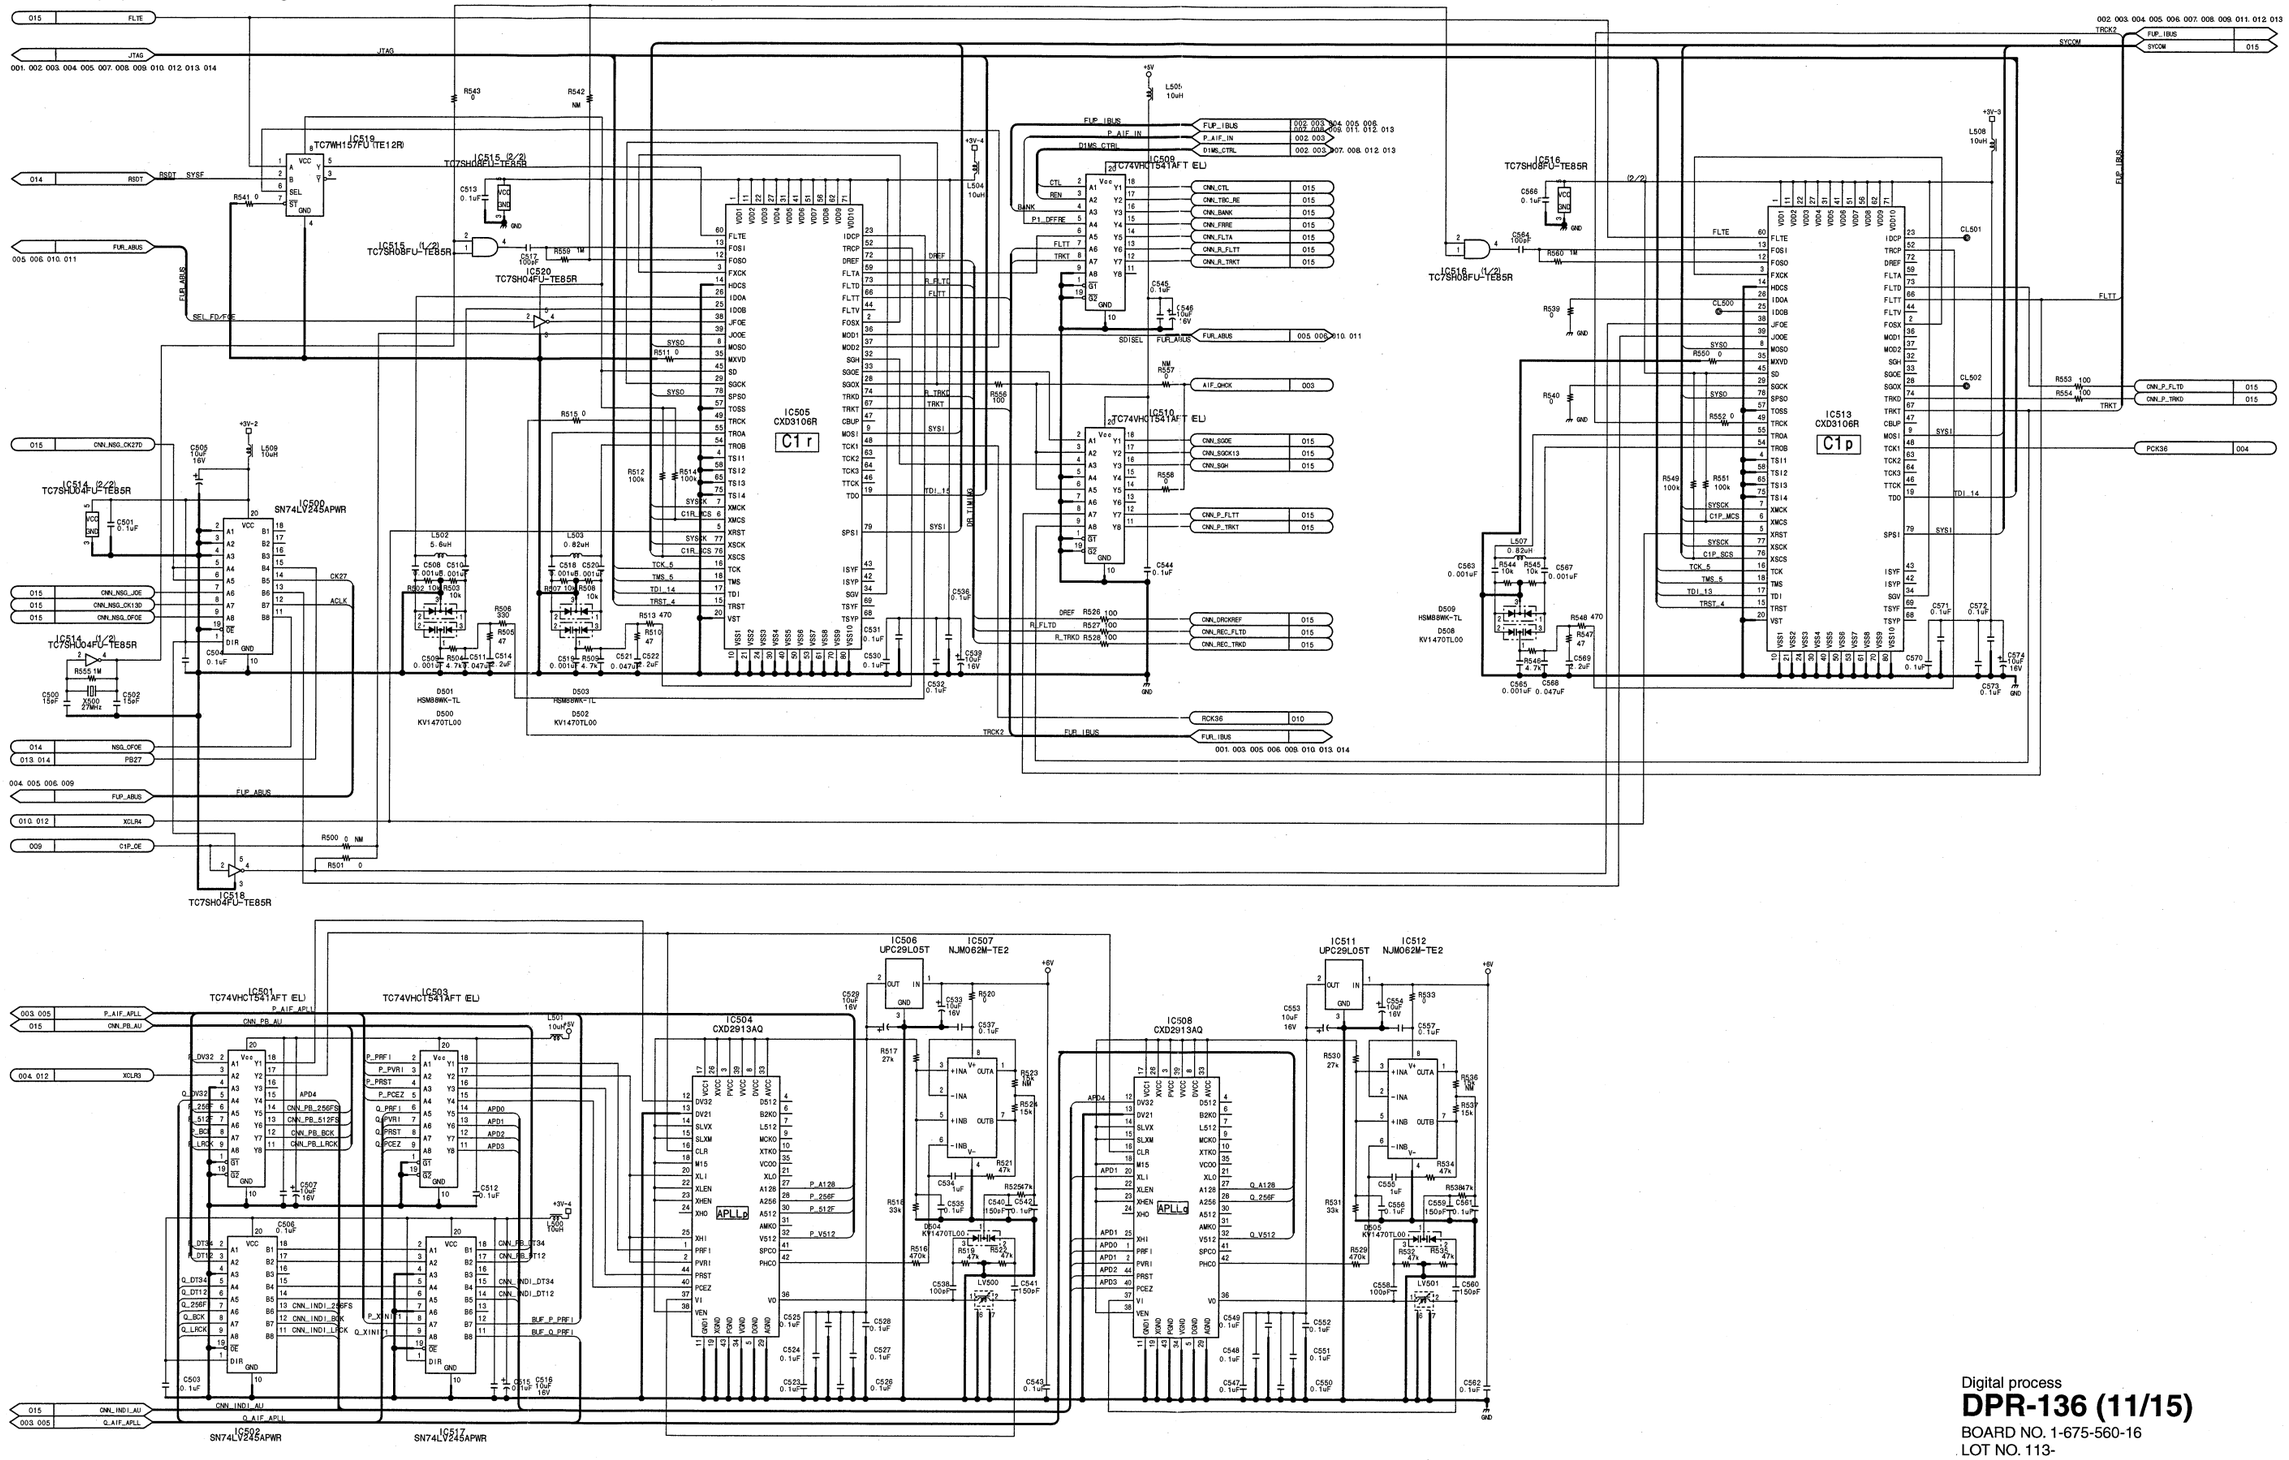

Digital process
DPR-136 (11/15)
BOARD NO. 1-675-560-16
LOT NO. 113-
DSR-2000_DPR-136_016_11

15-48 (c) 15-48 (c)

DSR-2000/2000P

A | B | C | D | E | F | G | H

DPR-136 (12/15)

DSR-2000 (UC) : S/N 101241 and Higher
DSR-2000 (J) : S/N 301311 and Higher
DSR-2000P (CE) : S/N 401551 and Higher

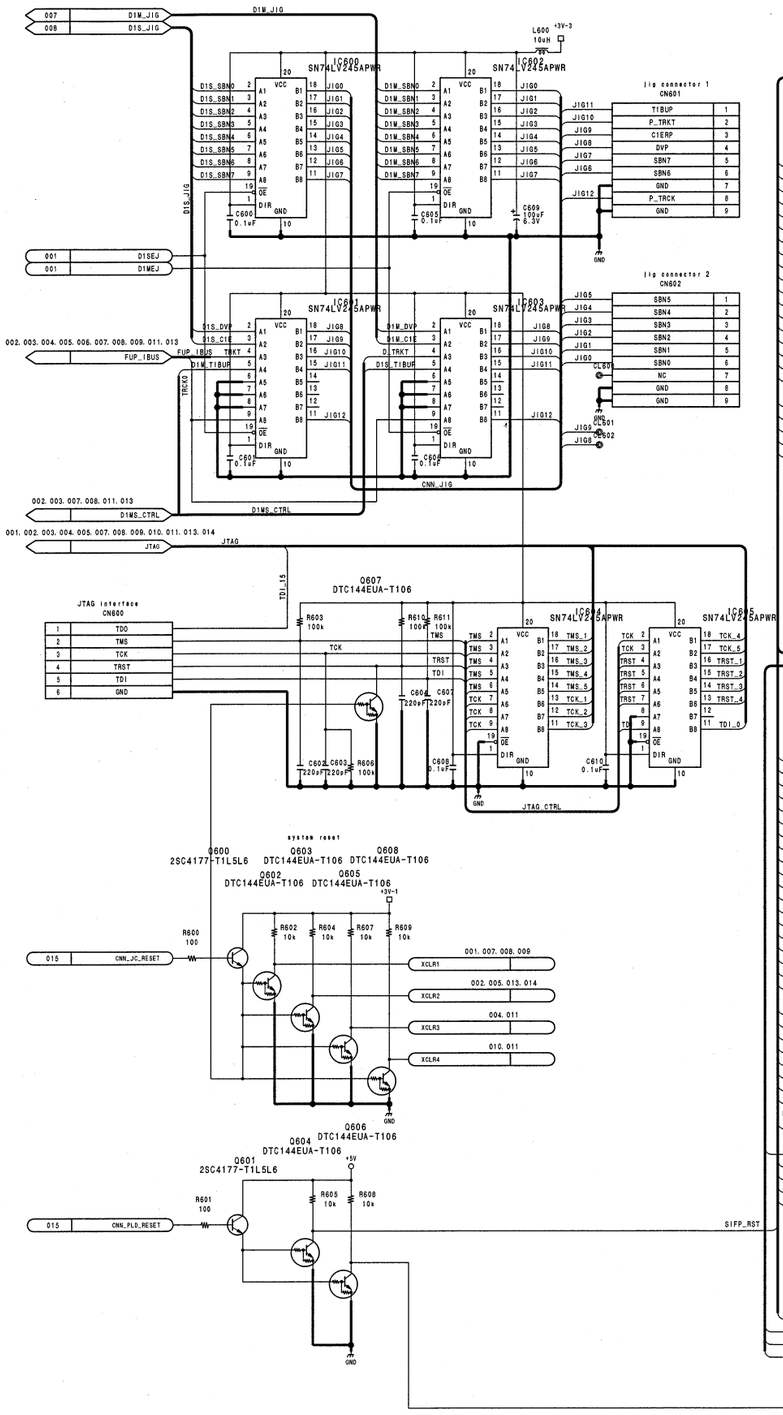

Digital process
DPR-136 (12/15)
BOARD NO. 1-675-560-16
LOT NO. 113-
DSR-2000_DPR-136_016_12

DPR-136 (13/15)

DSR-2000 (UC) : S/N 101241 and Higher
DSR-2000 (J) : S/N 301311 and Higher
DSR-2000P (CE) : S/N 401551 and Higher

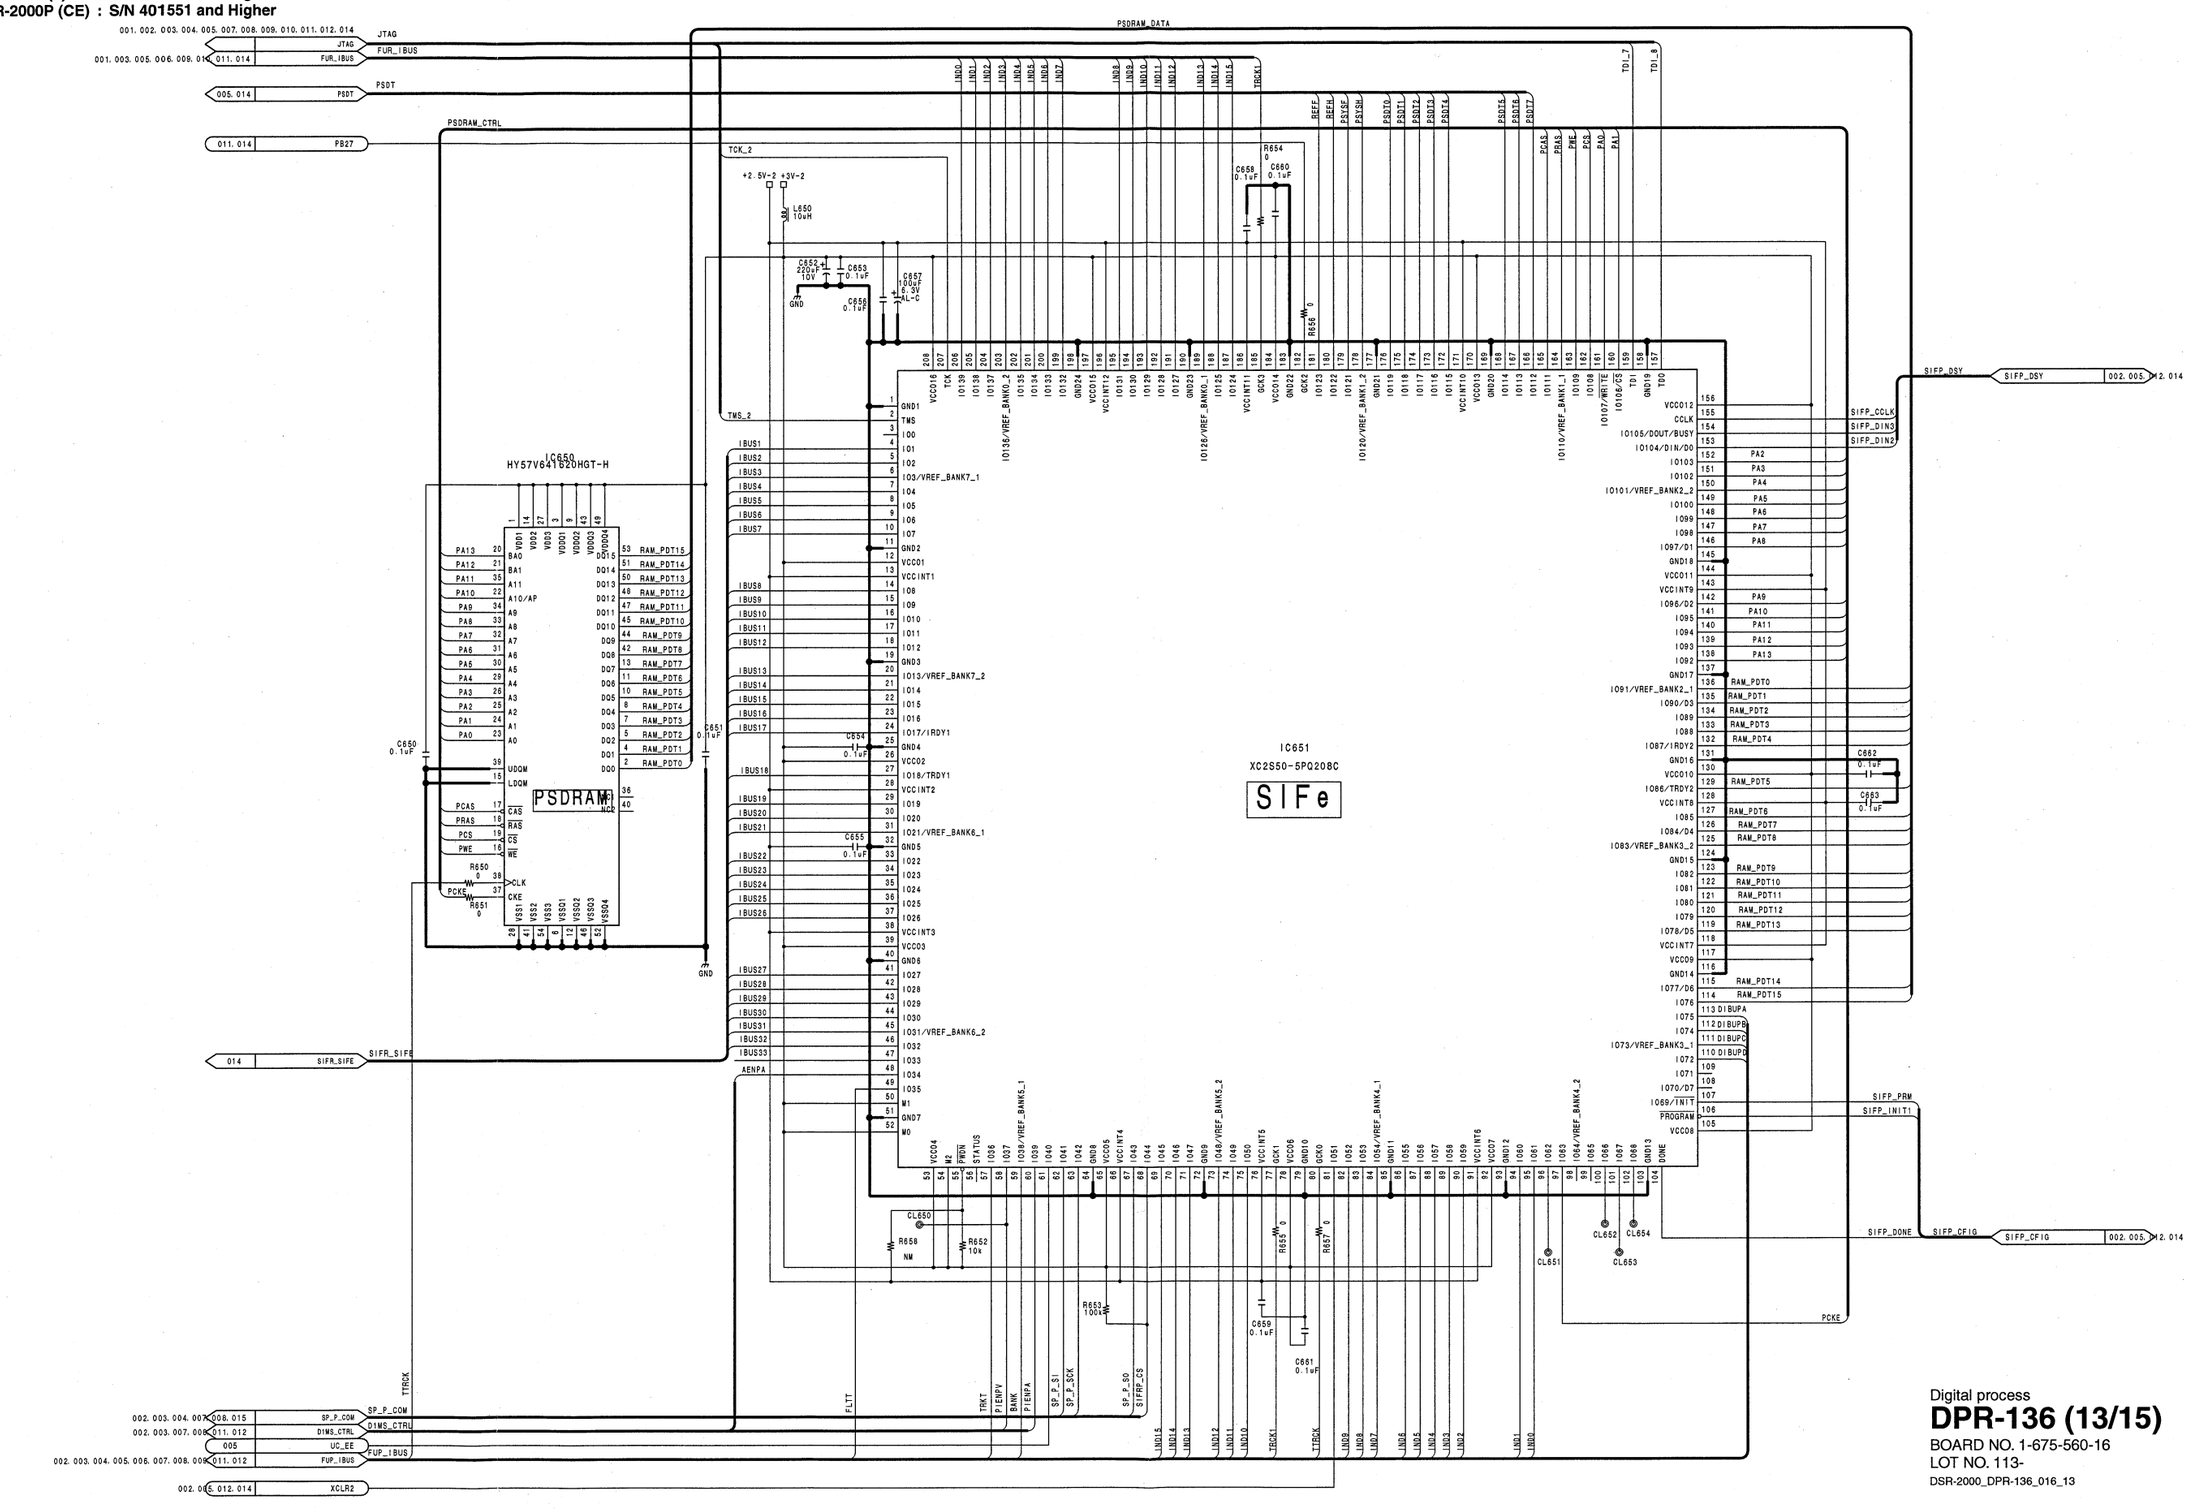

Digital process
DPR-136 (13/15)
BOARD NO. 1-675-560-16
LOT NO. 113-
DSR-2000_DPR-136_016_13

15-50 (c) 15-50 (c)

DSR-2000/2000P

DPR-136 (14/15)

DSR-2000 (UC) : S/N 101241 and Higher
DSR-2000 (J) : S/N 301311 and Higher
DSR-2000P (CE) : S/N 401551 and Higher

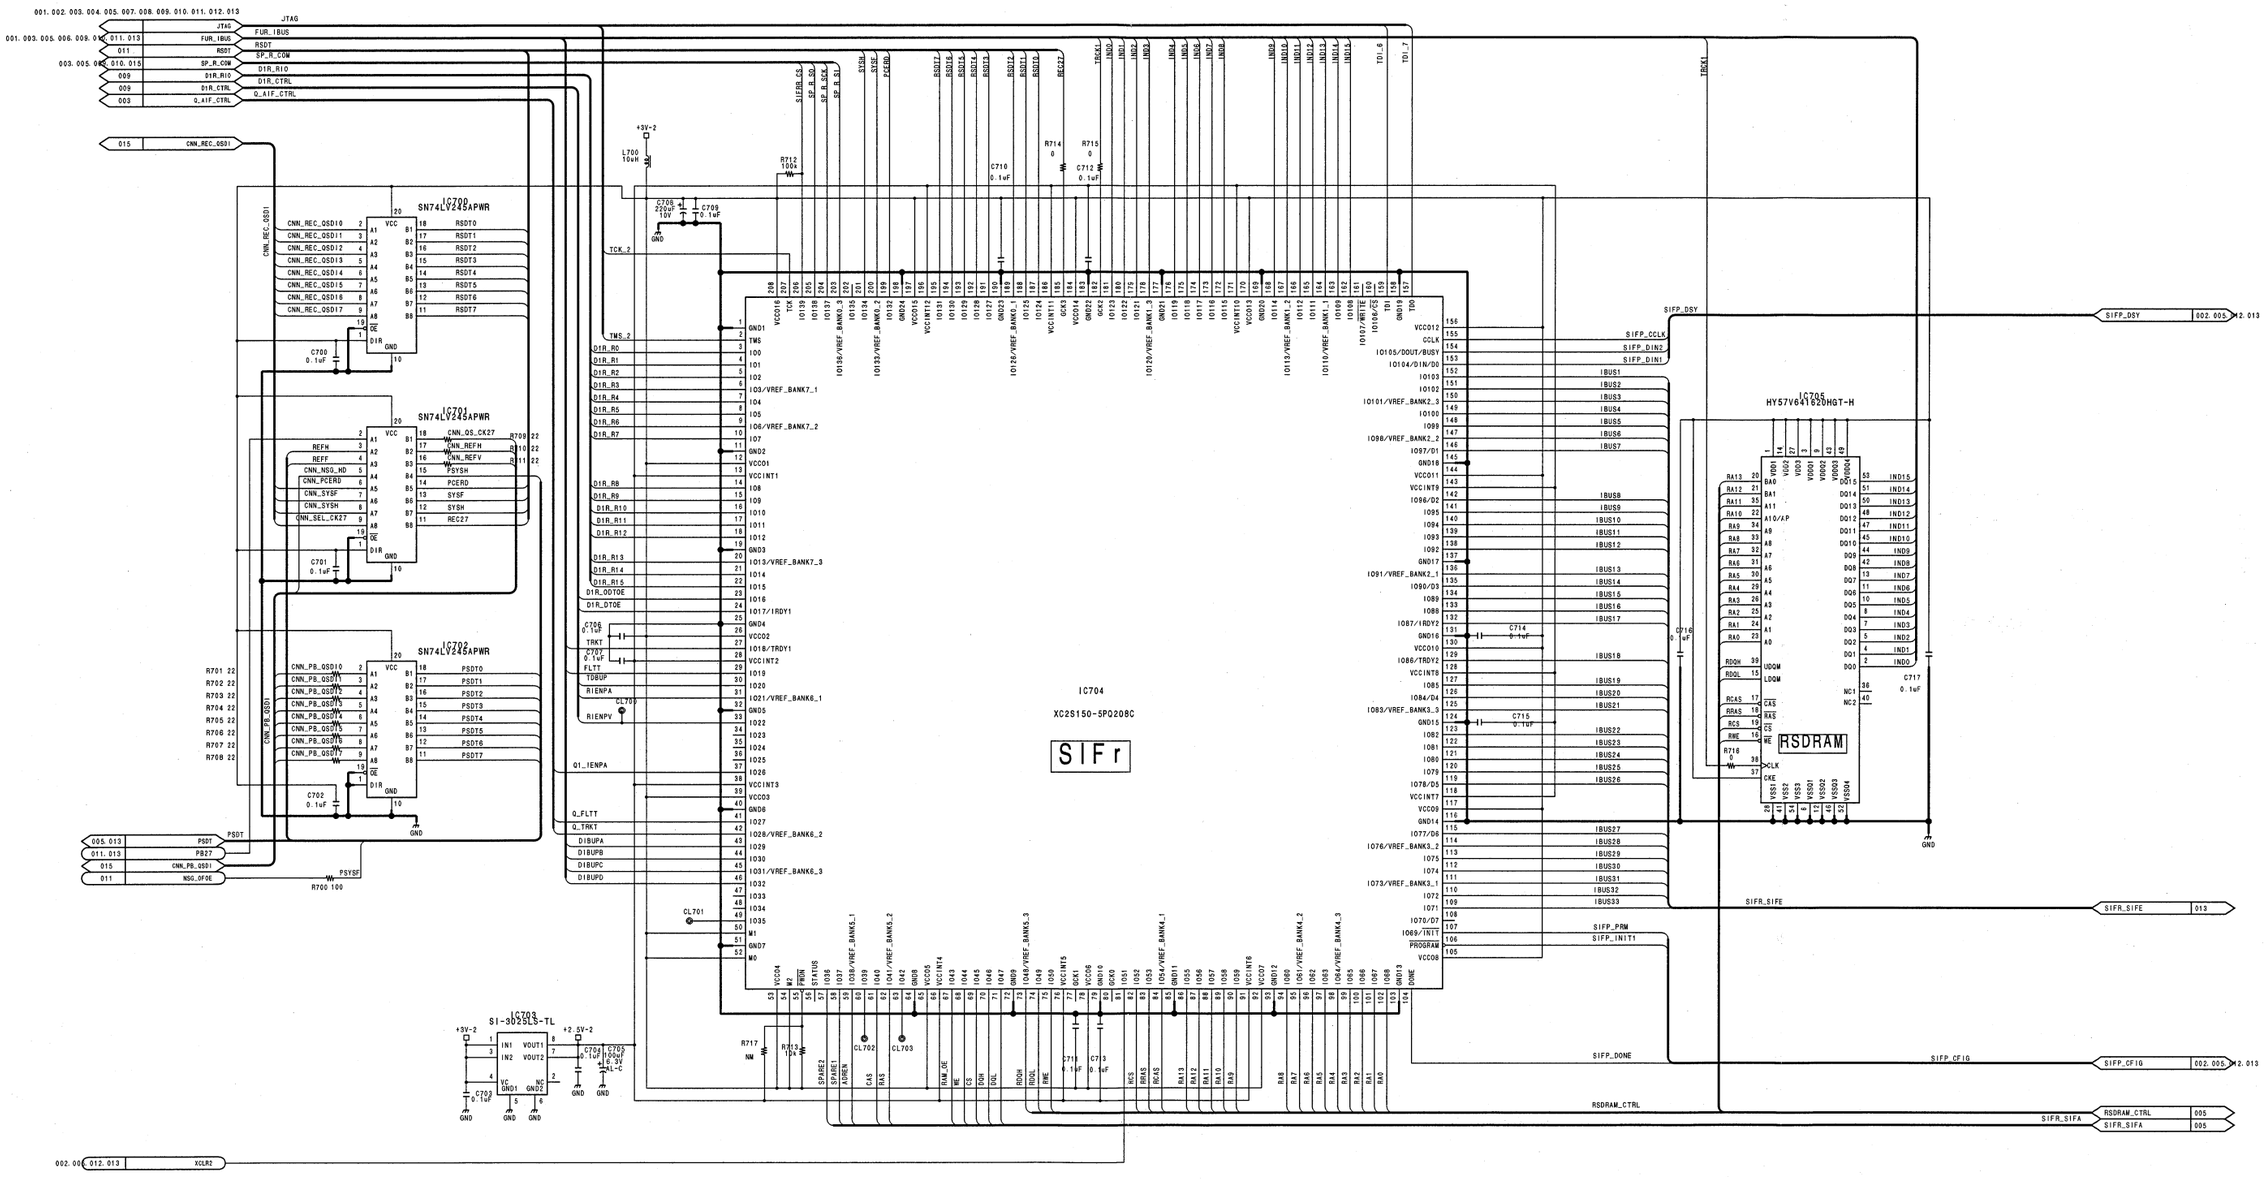

Digital process
DPR-136 (14/15)
BOARD NO. 1-675-560-16
LOT NO. 113-
DSR-2000_DPR-136_016_14

DPR-136 (15/15)

DSR-2000 (UC) : S/N 101241 and Higher
DSR-2000 (J) : S/N 301311 and Higher
DSR-2000P (CE) : S/N 401551 and Higher

Digital process

DPR-136 (15/15)

BOARD NO. 1-675-560-16
LOT NO. 113-
DSR-2000_DPR-136_016_15

DSR-2000/2000P

DSR-2000 (UC) : S/N 100291 through 101240
DSR-2000 (J) : S/N 300241 through 301310
DSR-2000P (CE) : S/N 400301 through 401550

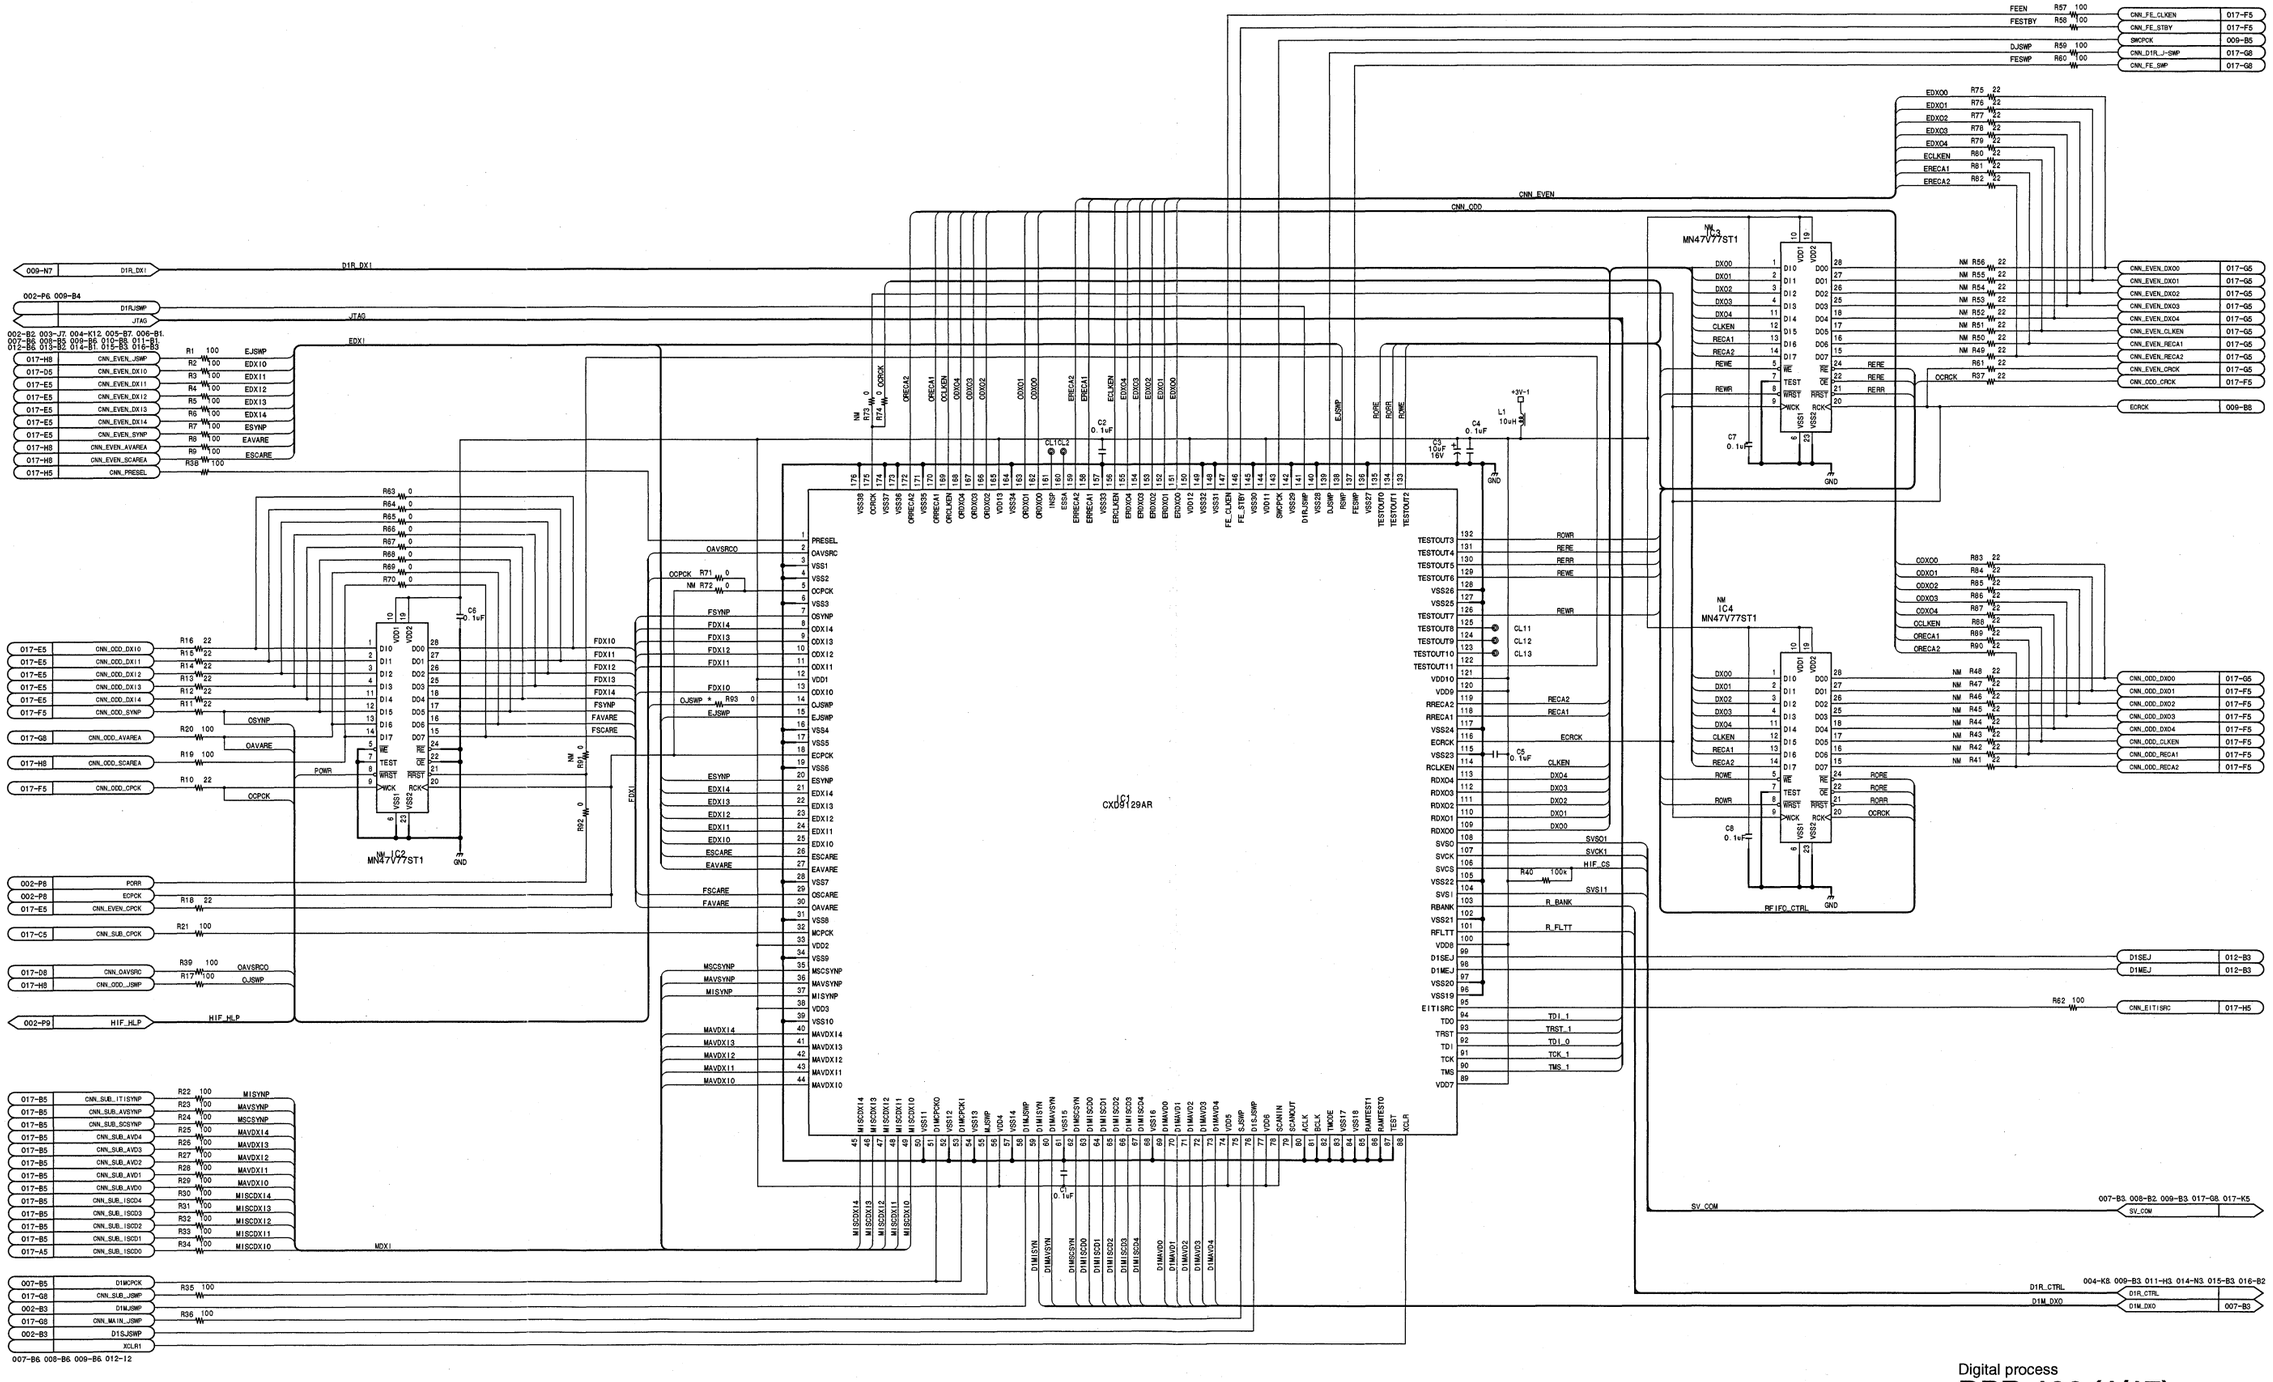

BOARD NO. SUFFIX	LOT NO.
12	909
13	910-002
14	003-112

NOTE
*

REF. NO.	CHANGE	INFORMATION	LOT NO.
R93	0	ADD	910-

Digital process
DPR-136 (1/17)
BOARD NO. 1-675-560-12, 13, 14
LOT NO. 909-112
DSR-2000_DPR-136_014_1

DPR-136 (2/17)

DSR-2000 (UC) : S/N 100291 through 101240
DSR-2000 (J) : S/N 300241 through 301310
DSR-2000P (CE) : S/N 400301 through 401550

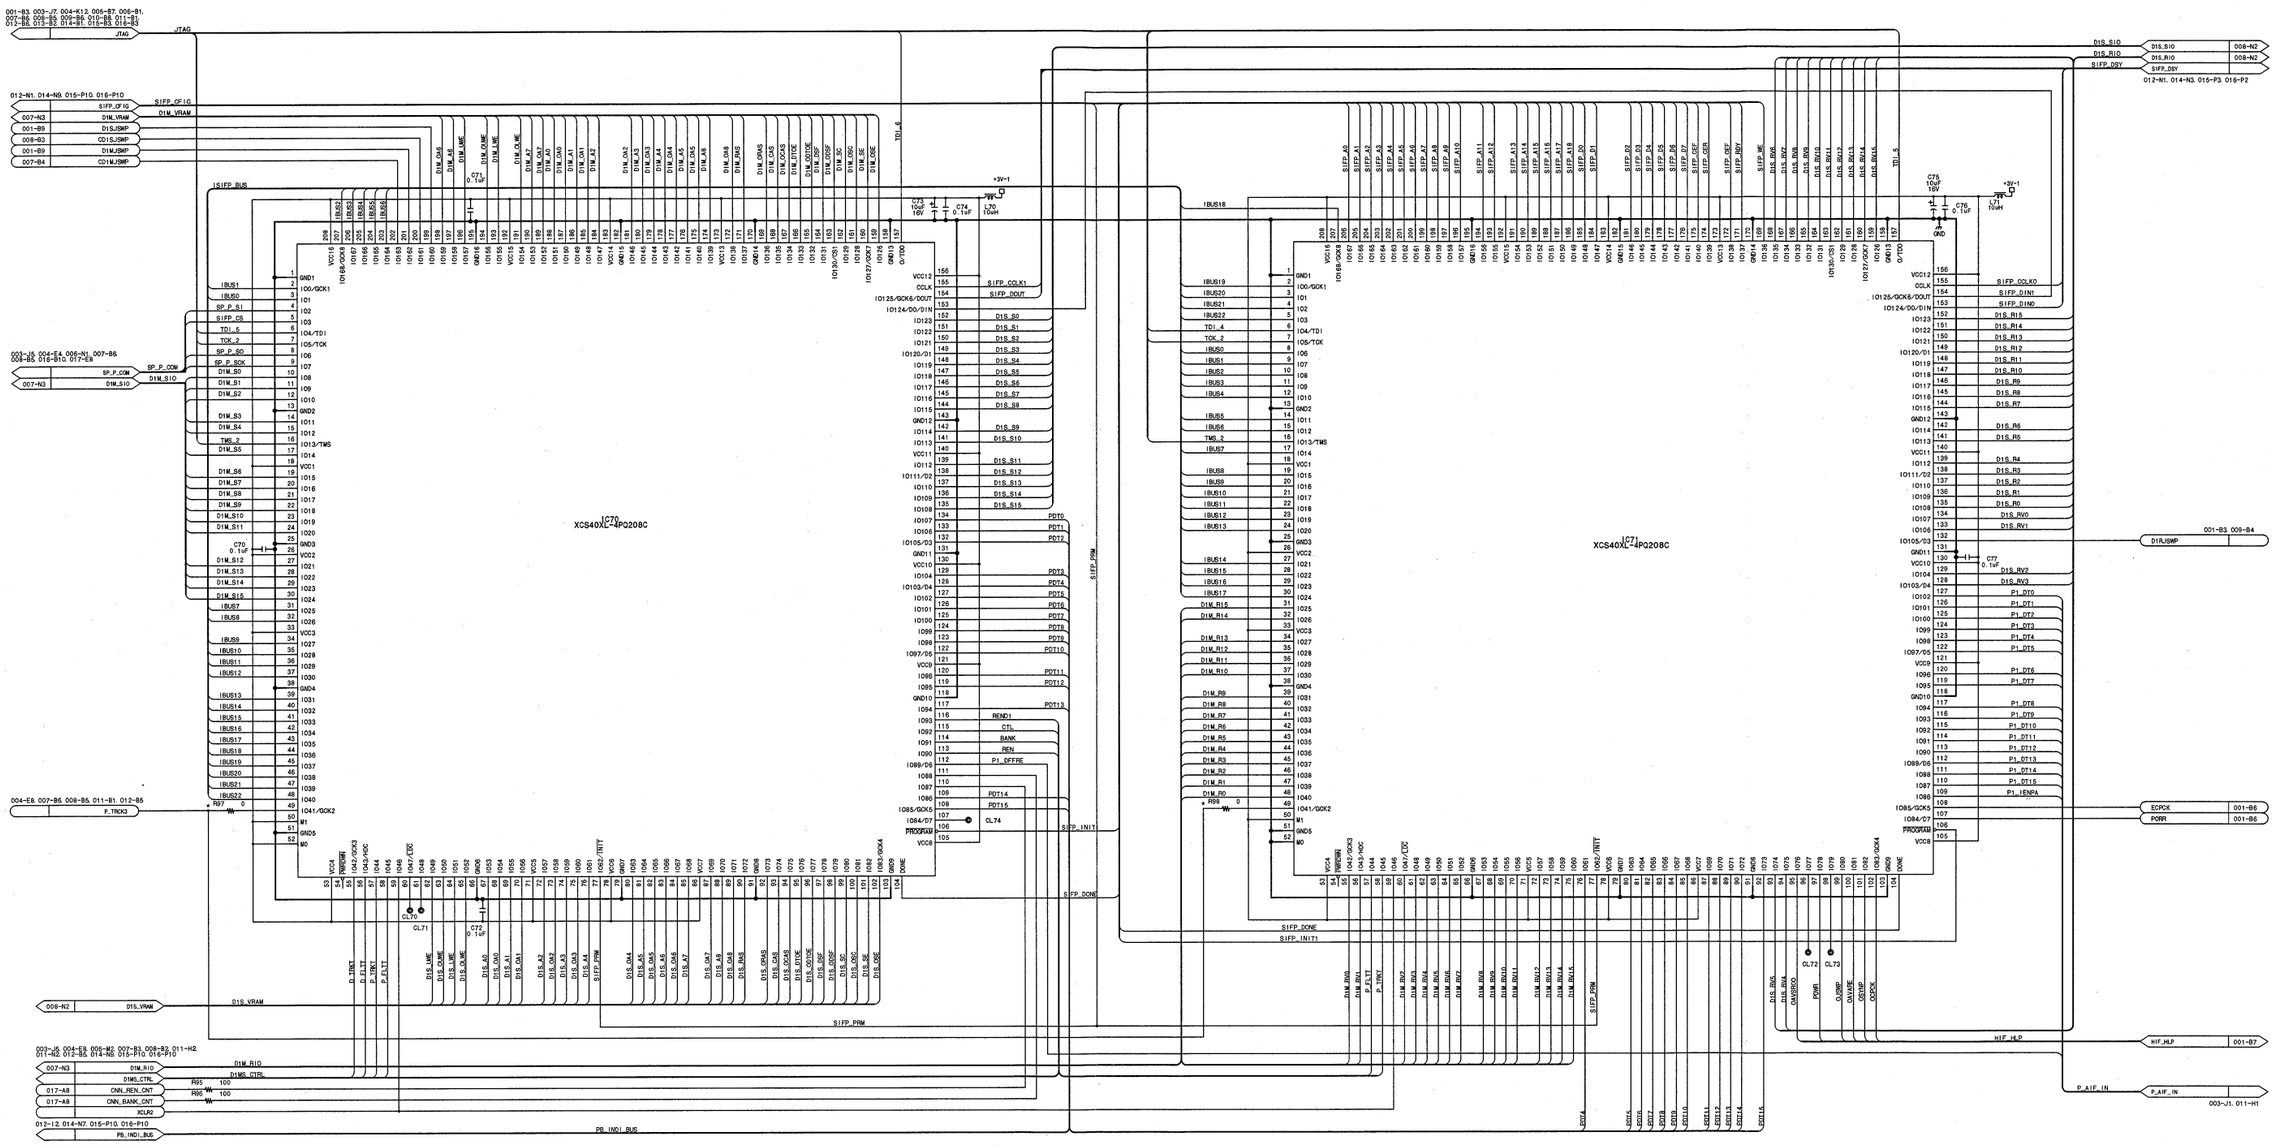

BOARD NO. SUFFIX	LOT NO.
12	909
13	910-002
14	003-112

NOTE
*

REF. NO.	CHANGE INFORMATION	LOT NO.
R97	0 ADD	910~
R98		

Digital process
DPR-136 (2/17)
BOARD NO. 1-675-560-12, 13, 14
LOT NO. 909-112
DSR-2000_DPR-136_014_2

DPR-136 (3/17)

DSR-2000 (UC) : S/N 100291 through 101240
DSR-2000 (J) : S/N 300241 through 301310
DSR-2000P (CE) : S/N 400301 through 401550

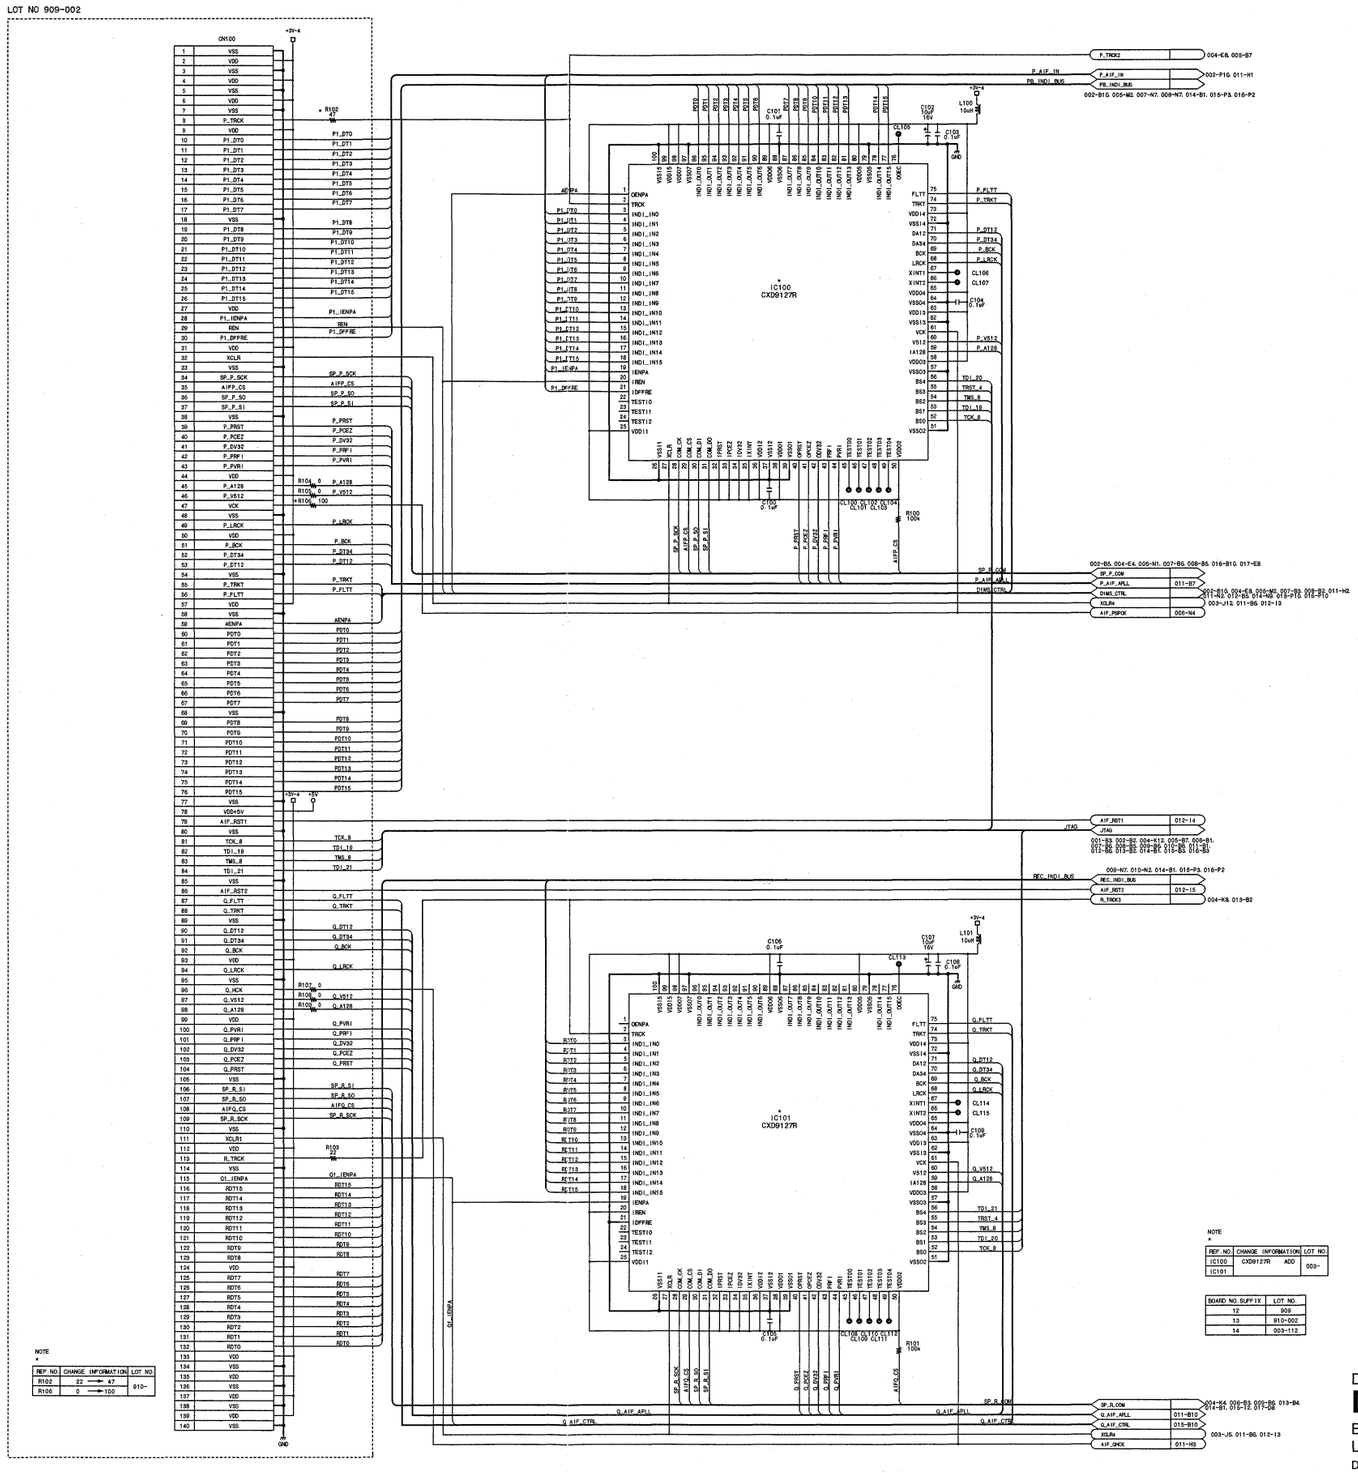

Digital process
DPR-136 (3/17)
BOARD NO. 1-675-560-12, 13, 14
LOT NO. 909-112
DSR-2000_DPR-136_014_3

DPR-136 (4/17)

DSR-2000 (UC) : S/N 100291 through 101240
DSR-2000 (J) : S/N 300241 through 301310
DSR-2000P (CE) : S/N 400301 through 401550

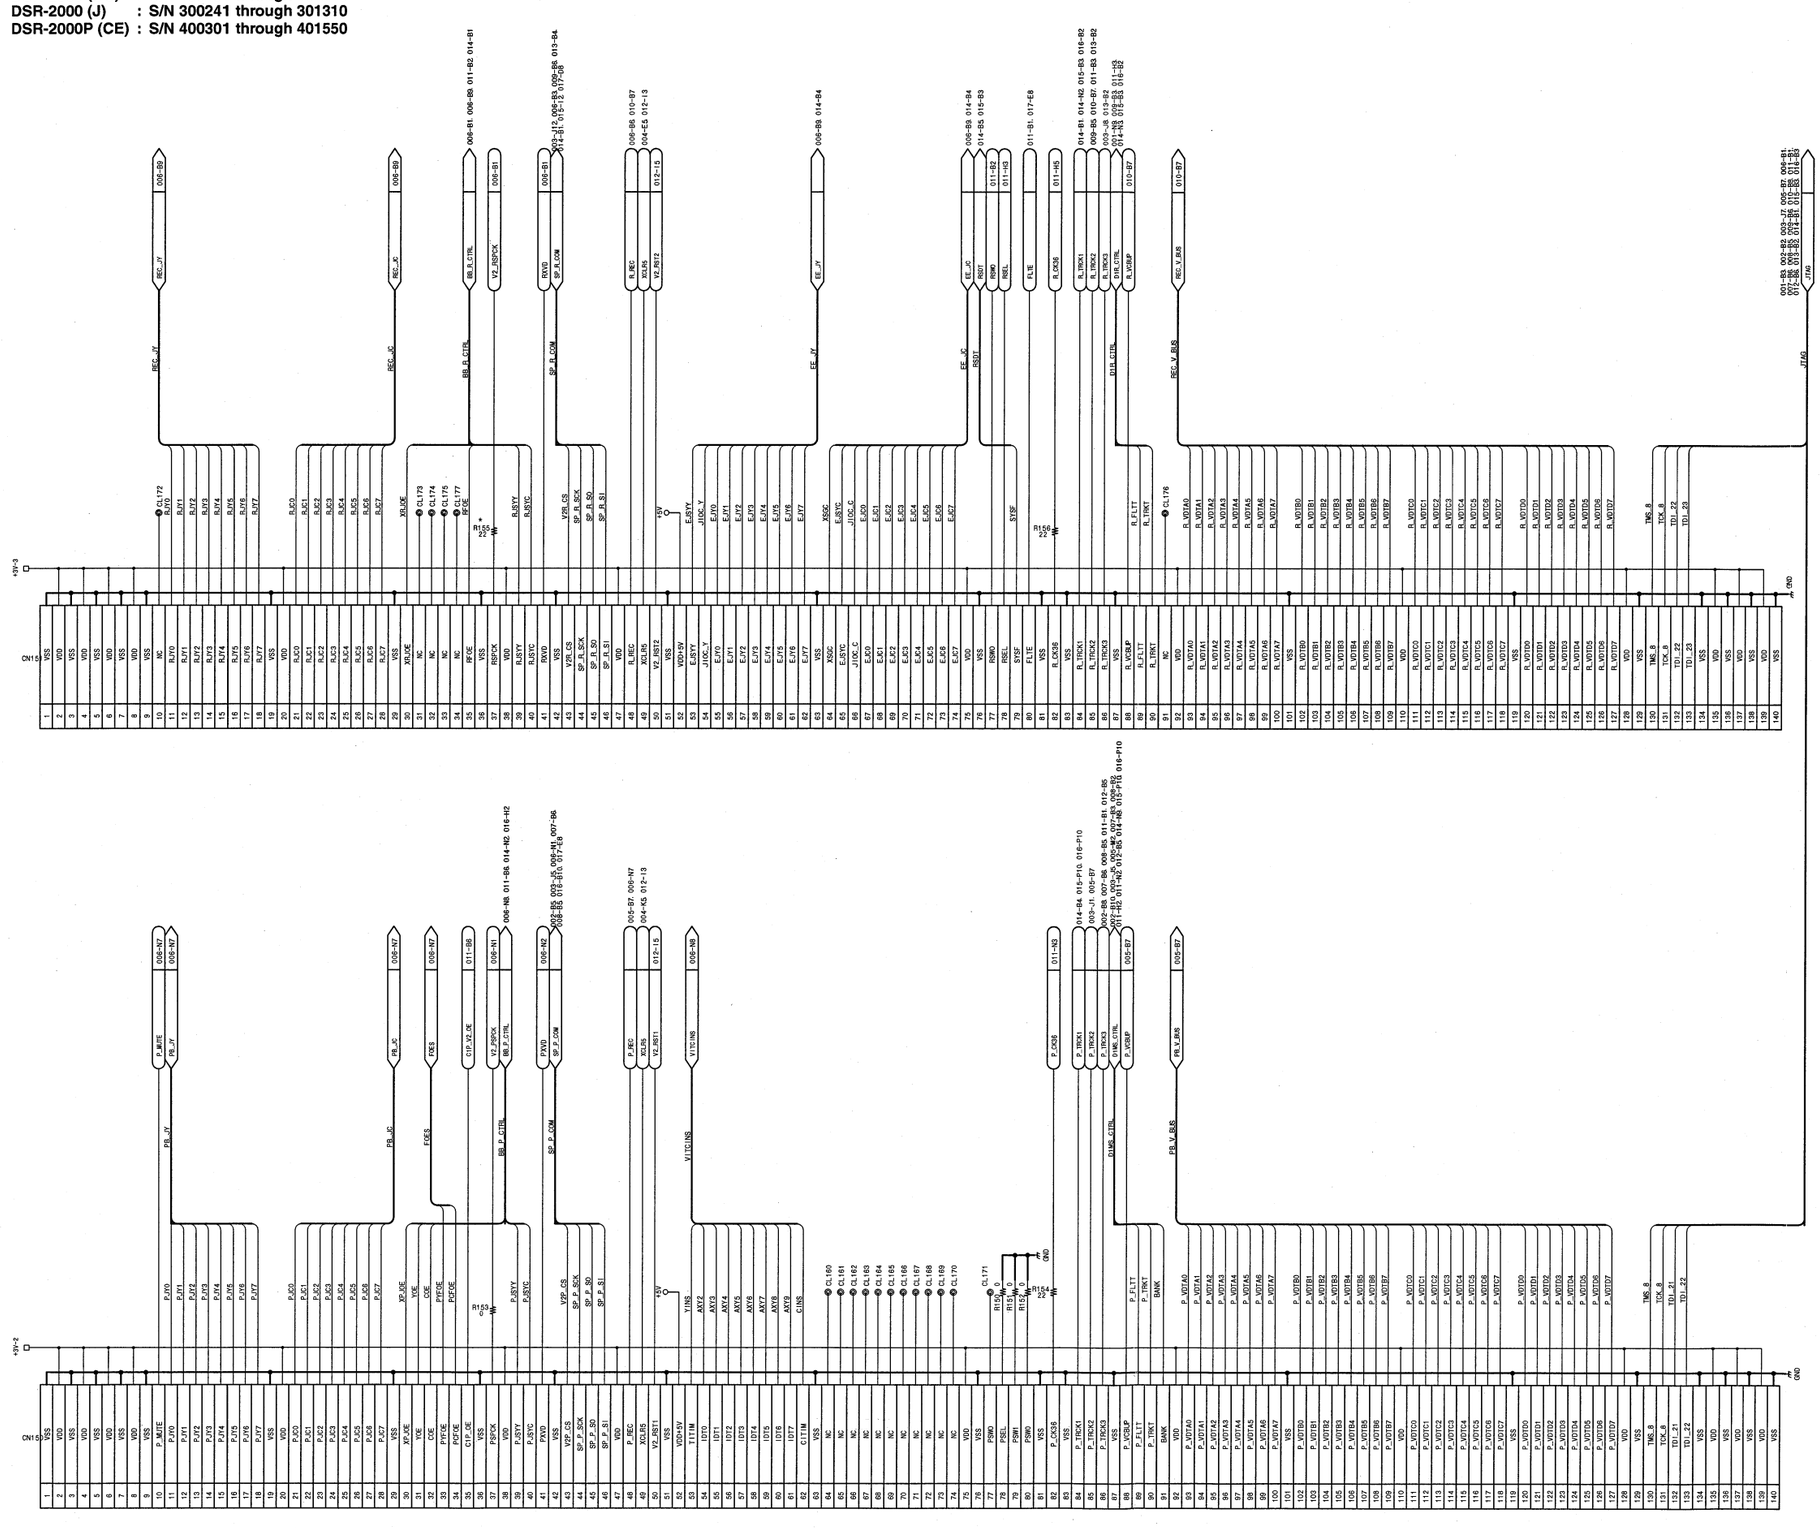

BOARD NO.SUFFIX	LOT NO.
12	909
13	910-002
14	003-112

NOTE
*

REF. NO	CHANGE INFORMATION	LOT NO.
R155	100 22	911-

Digital process

DPR-136 (4/17)

BOARD NO. 1-675-560-12, 13, 14
LOT NO. 909-112
DSR-2000_DPR-136_014_4

DPR-136 (5/17)

DSR-2000 (UC) : S/N 100291 through 101240
DSR-2000 (J) : S/N 300241 through 301310
DSR-2000P (CE) : S/N 400301 through 401550

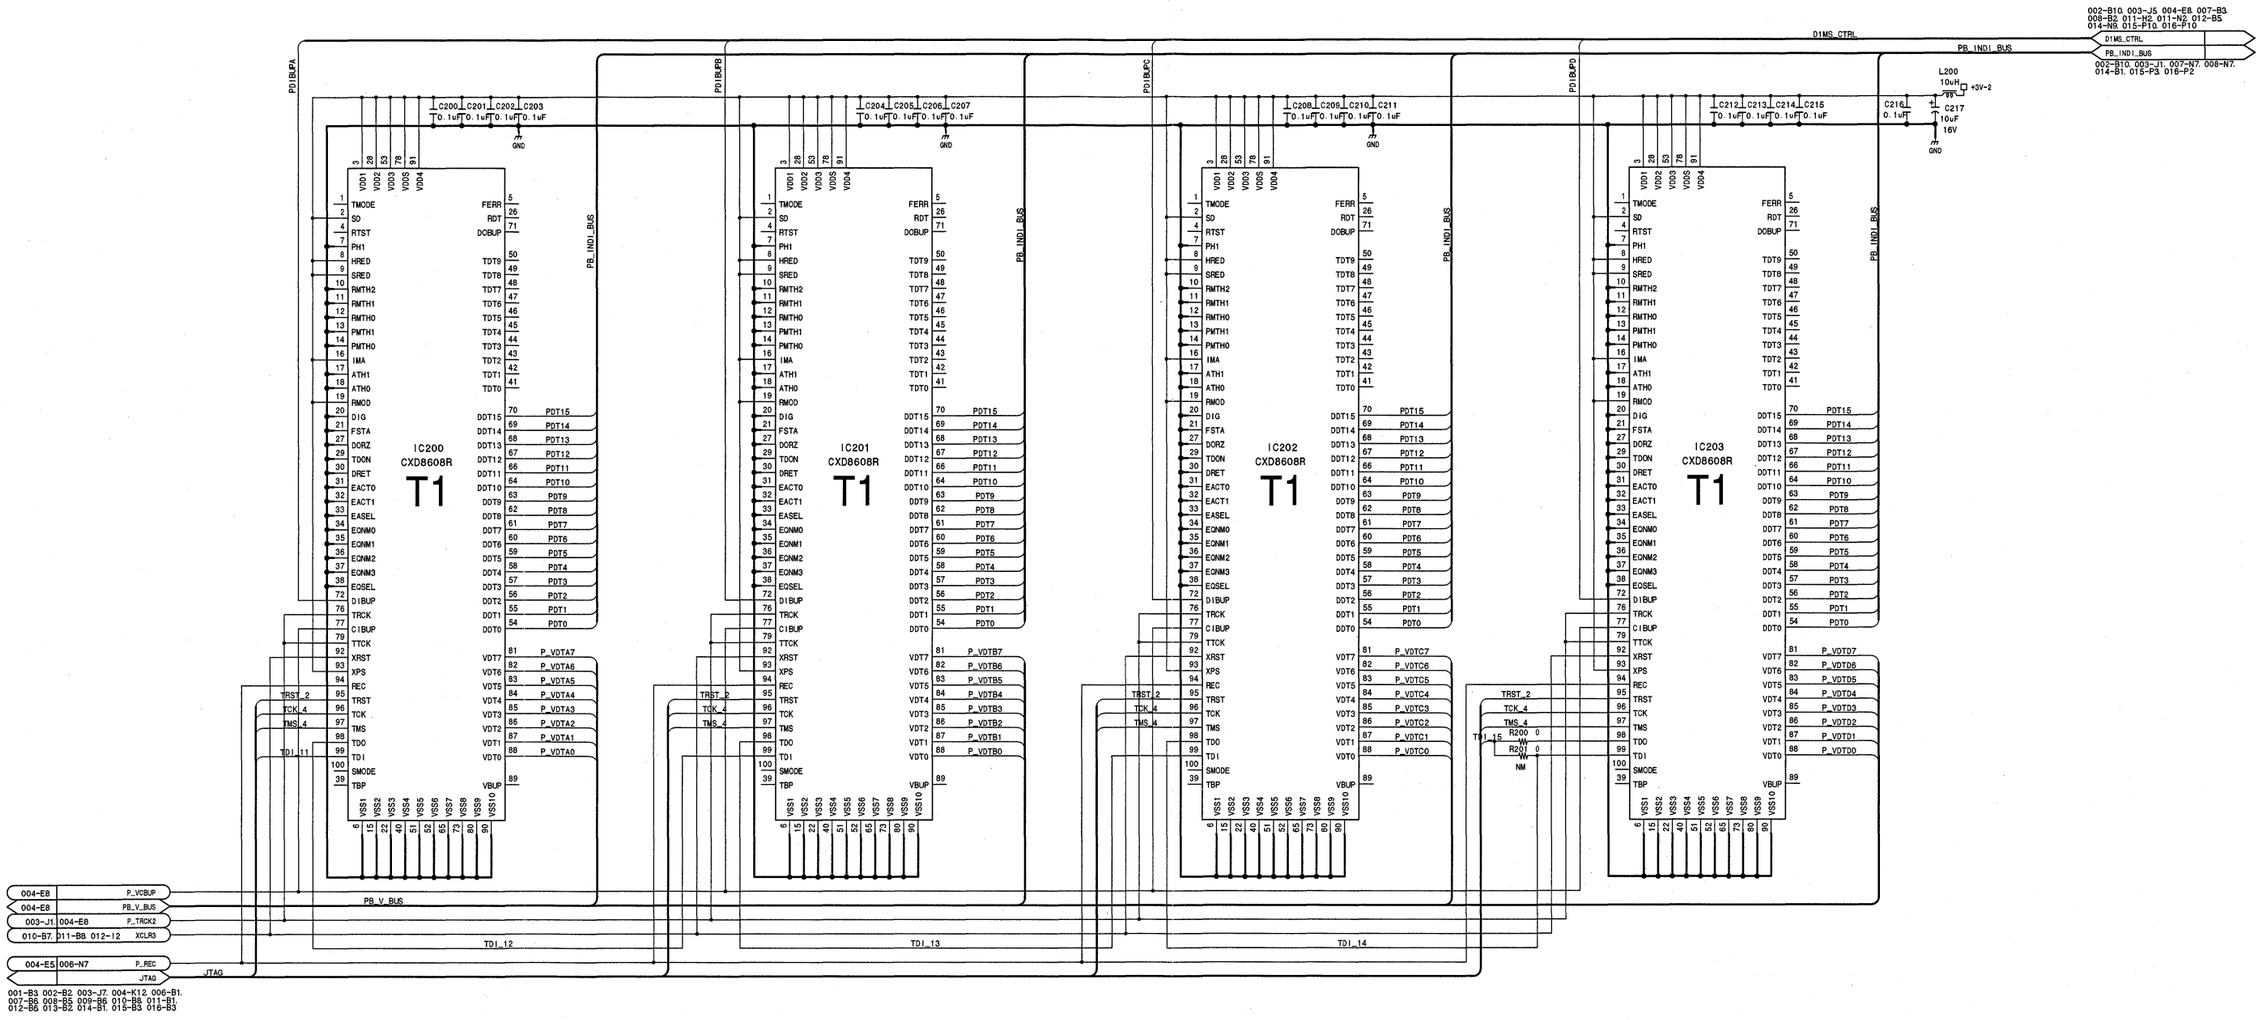

BOARD NO. SUFFIX	LOT NO.
12	909
13	910-002
14	003-112

Digital process
DPR-136 (5/17)
BOARD NO. 1-675-560-12, 13, 14
LOT NO. 909-112
DSR-2000_DPR-136_014_5

DPR-136 (6/17)

DSR-2000 (UC) : S/N 100291 through 101240
DSR-2000 (J) : S/N 300241 through 301310
DSR-2000P (CE) : S/N 400301 through 401550

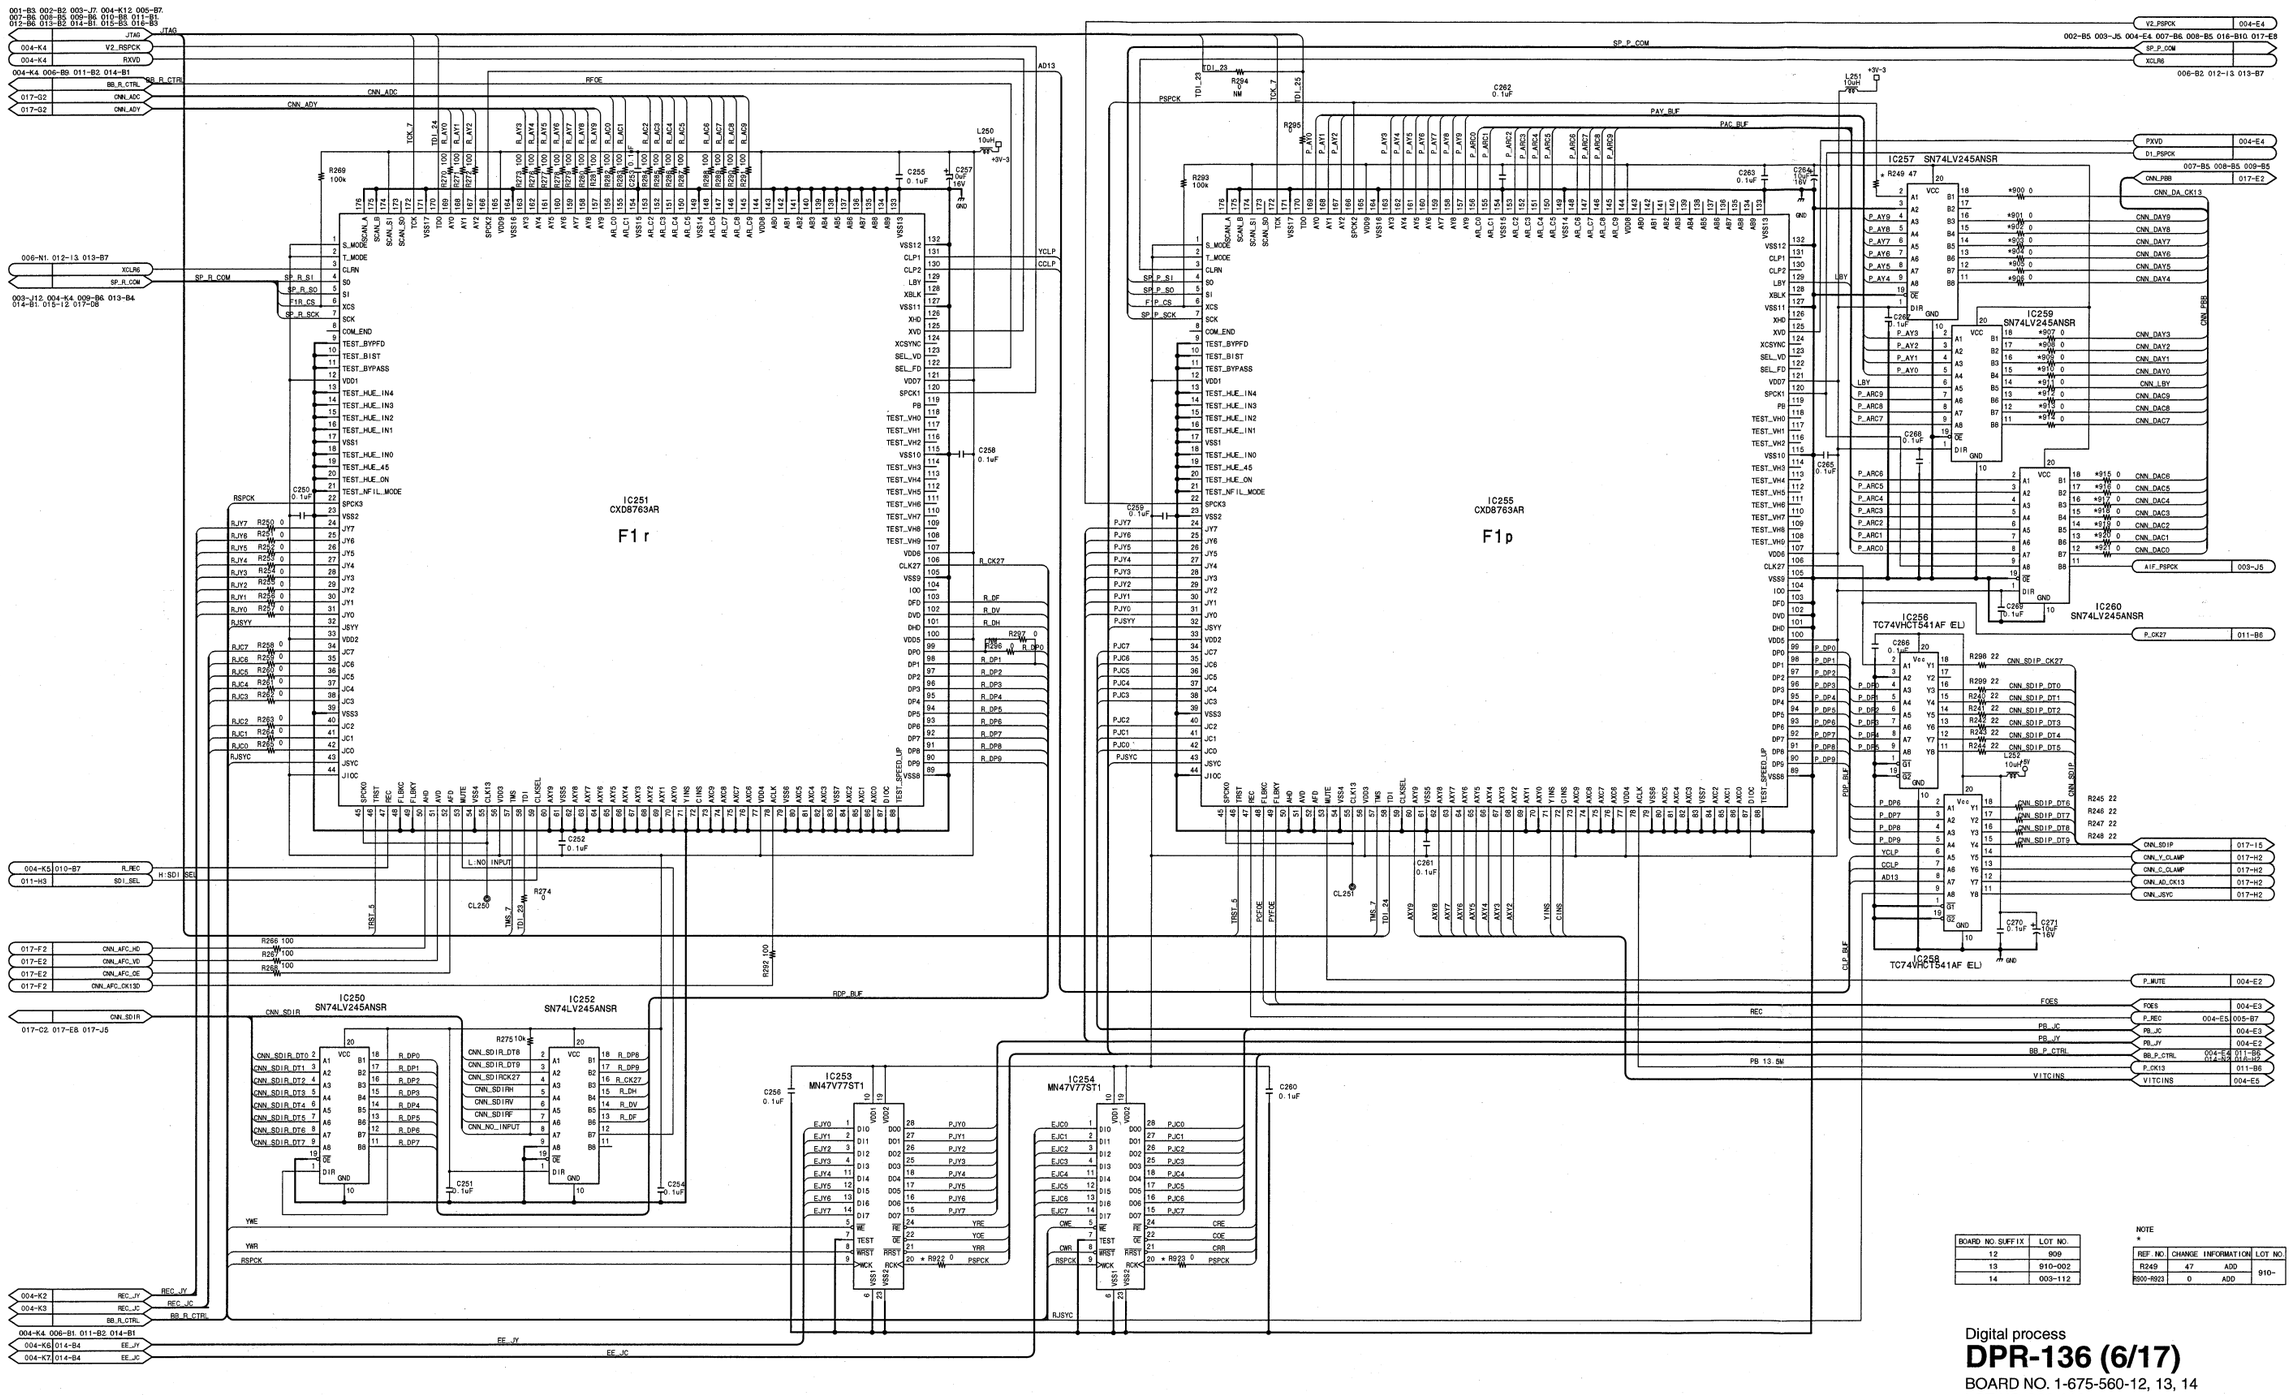

BOARD NO. SUFFIX	LOT NO.
12	909
13	910-002
14	003-112

NOTE
*

REF. NO.	CHANGE INFORMATION	LOT NO.
R249	47 ADD	
R900-R923	0 ADD	910-

Digital process
DPR-136 (6/17)
BOARD NO. 1-675-560-12, 13, 14
LOT NO. 909-112
DSR-2000_DPR-136_014_6

DPR-136 (7/17)

DSR-2000 (UC) : S/N 100291 through 101240
DSR-2000 (J) : S/N 300241 through 301310
DSR-2000P (CE) : S/N 400301 through 401550

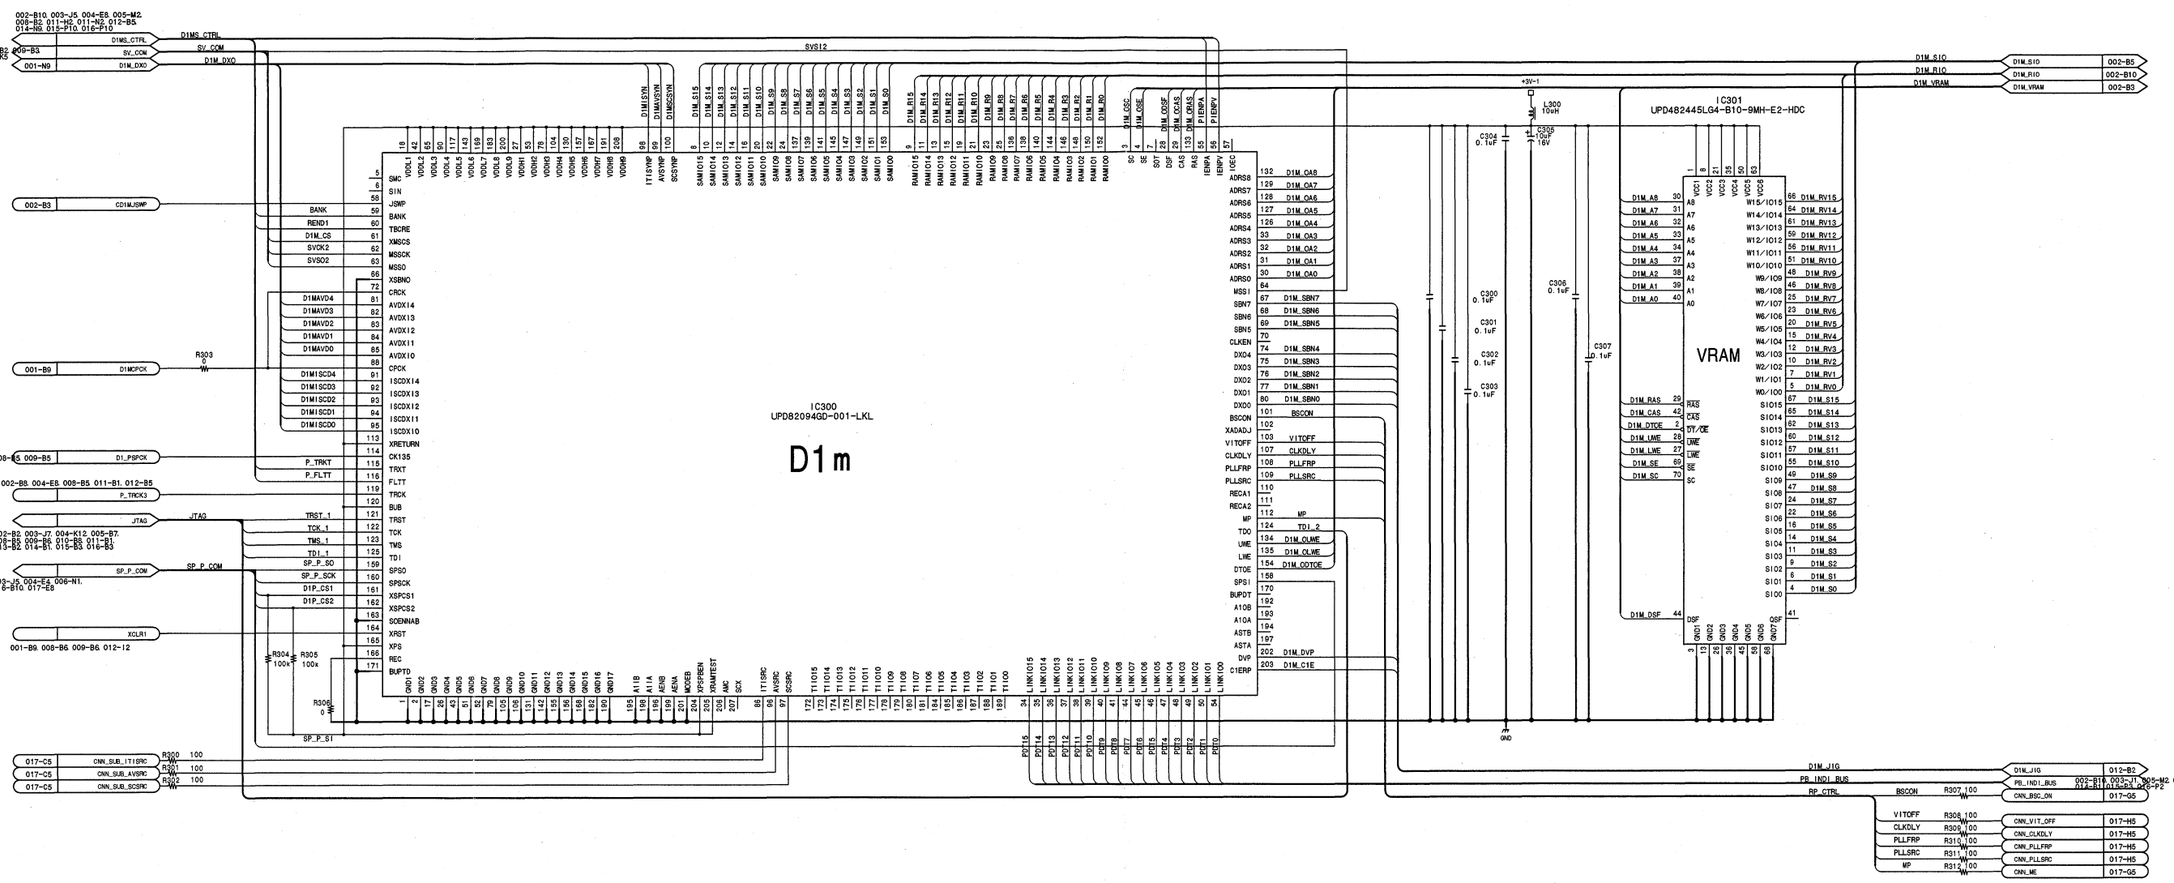

BOARD NO. SUFFIX	LOT NO.
12	909
13	910-002
14	003-112

Digital process
DPR-136 (7/17)
BOARD NO. 1-675-560-12, 13, 14
LOT NO. 909-112
DSR-2000_DPR-136_014_7

DPR-136 (8/17)

DSR-2000 (UC) : S/N 100291 through 101240
DSR-2000 (J) : S/N 300241 through 301310
DSR-2000P (CE) : S/N 400301 through 401550

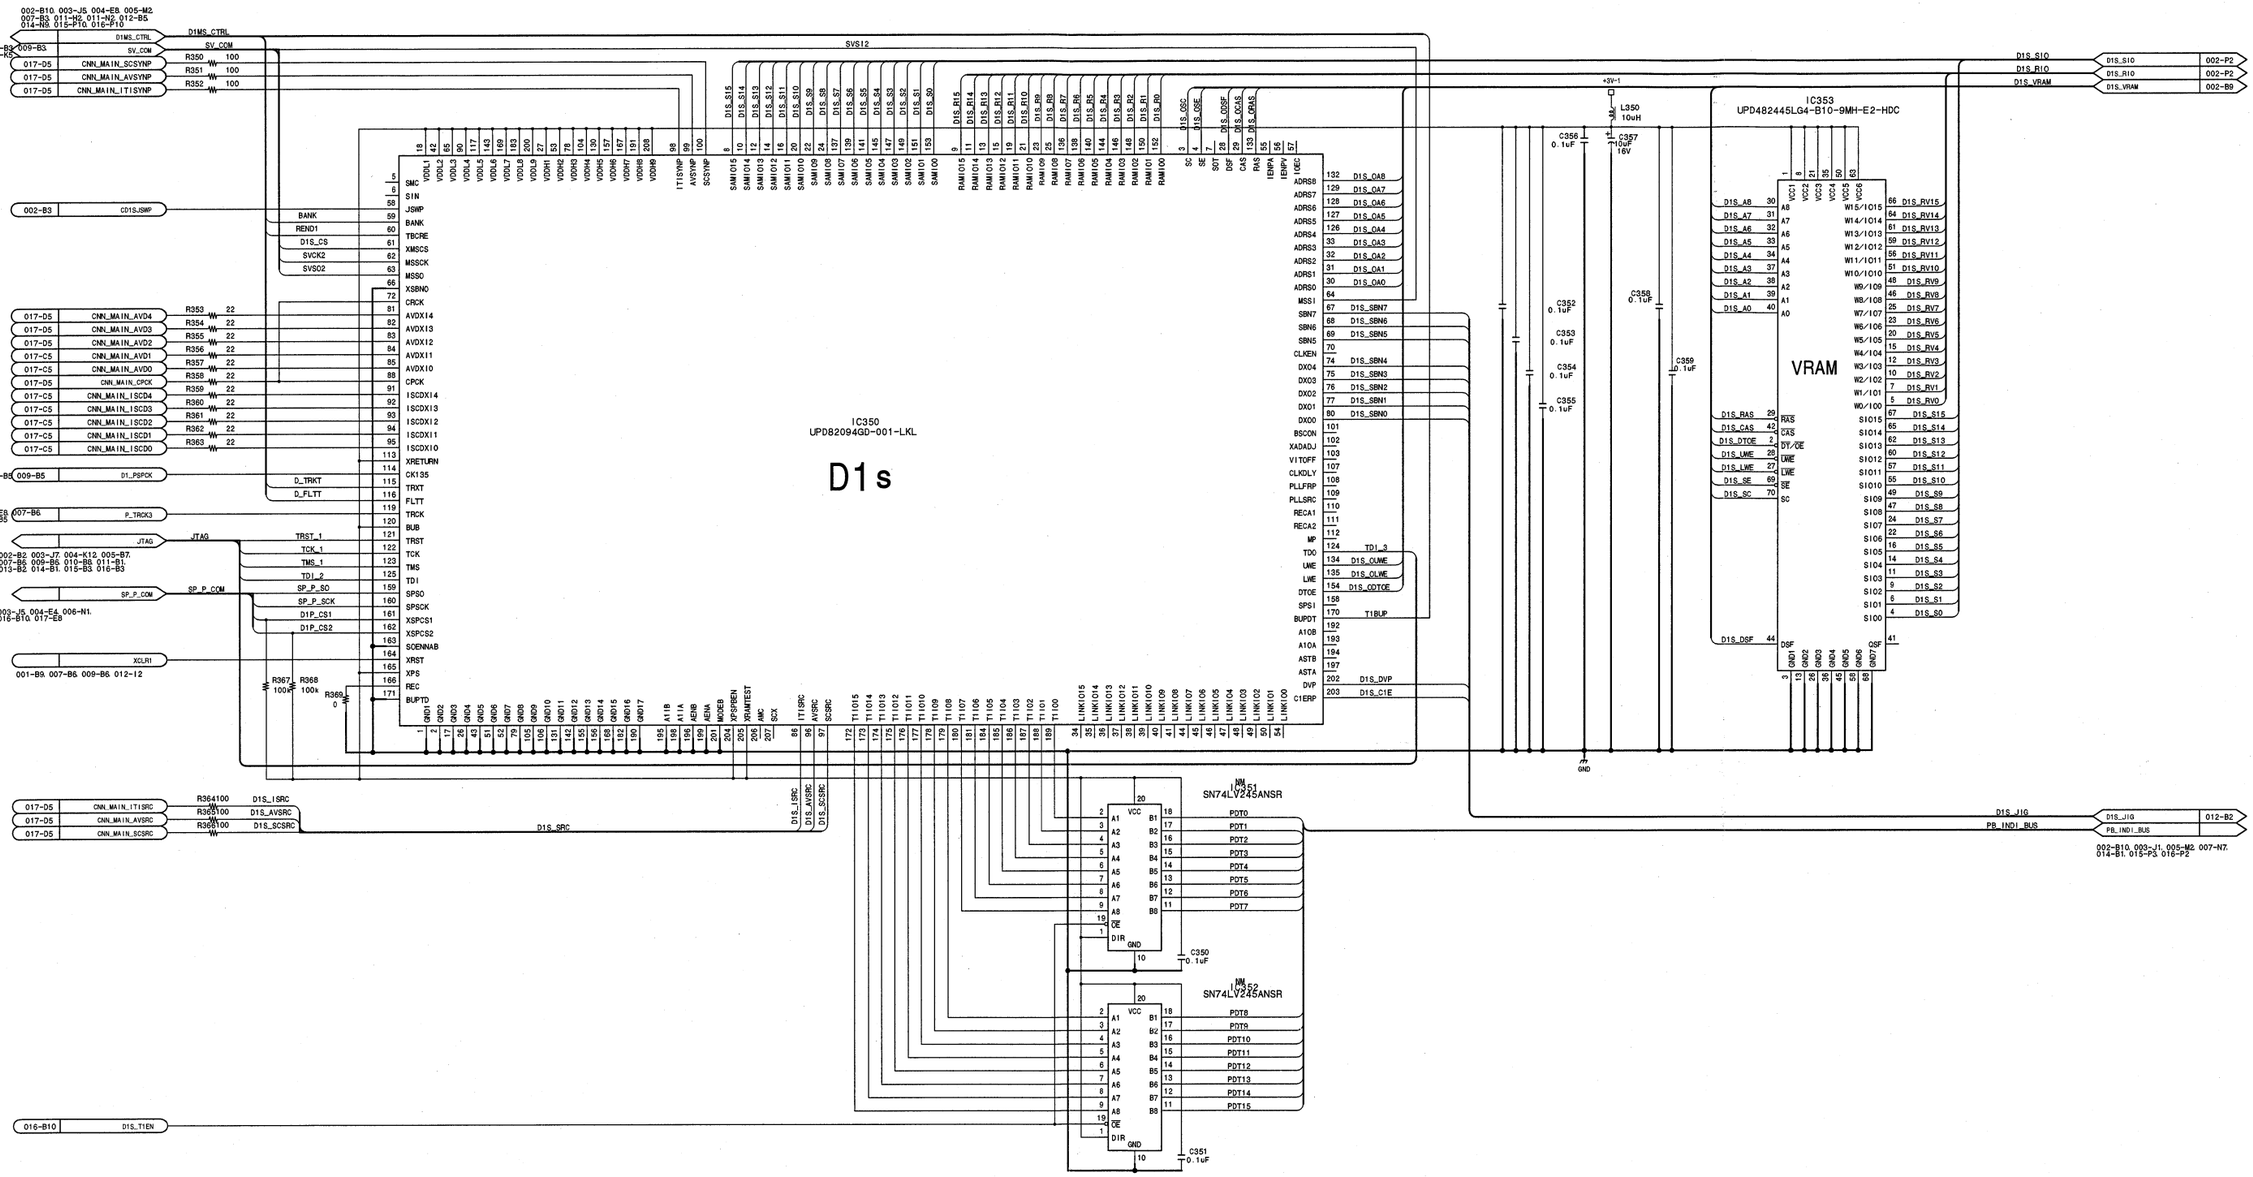

BOARD NO. SUFFIX	LOT NO.
12	909
13	910-002
14	003-112

Digital process

DPR-136 (8/17)

BOARD NO. 1-675-560-12, 13, 14
LOT NO. 909-112
DSR-2000_DPR-136_014_8

DPR-136 (9/17)

DSR-2000 (UC) : S/N 100291 through 101240
DSR-2000 (J) : S/N 300241 through 301310
DSR-2000P (CE) : S/N 400301 through 401550

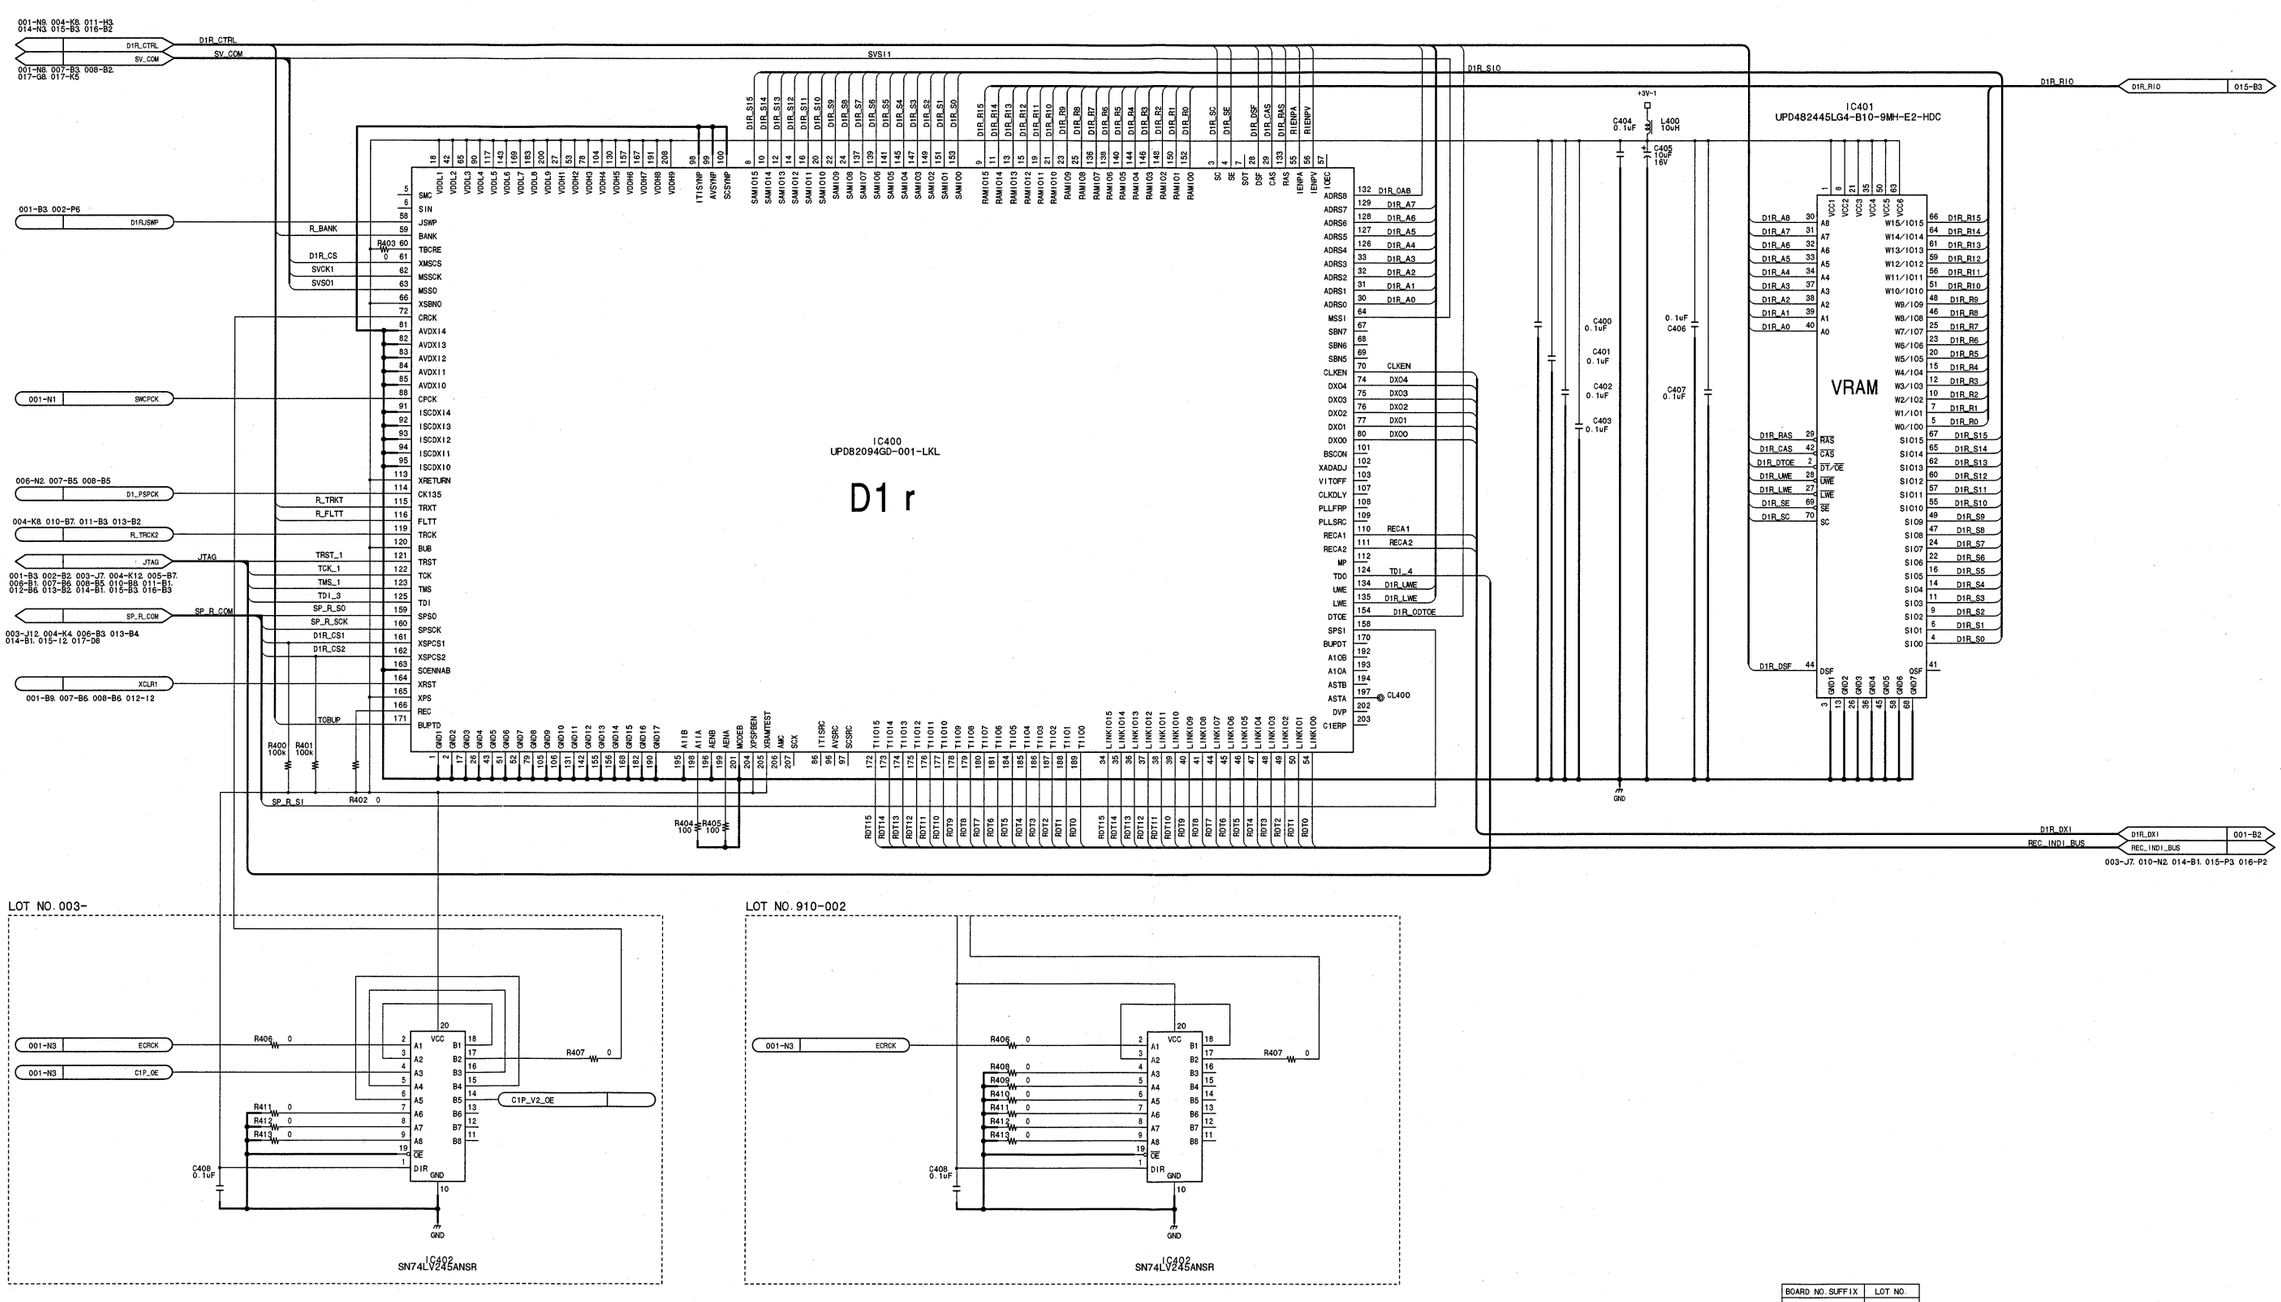

BOARD NO. SUFFIX	LOT NO.
12	909
13	910-002
14	003-112

Digital process

DPR-136 (9/17)

BOARD NO. 1-675-560-12, 13, 14
LOT NO. 909-112
DSR-2000_DPR-136_014_9

DPR-136 (10/17)

DSR-2000 (UC) : S/N 100291 through 101240
DSR-2000 (J) : S/N 300241 through 301310
DSR-2000P (CE) : S/N 400301 through 401550

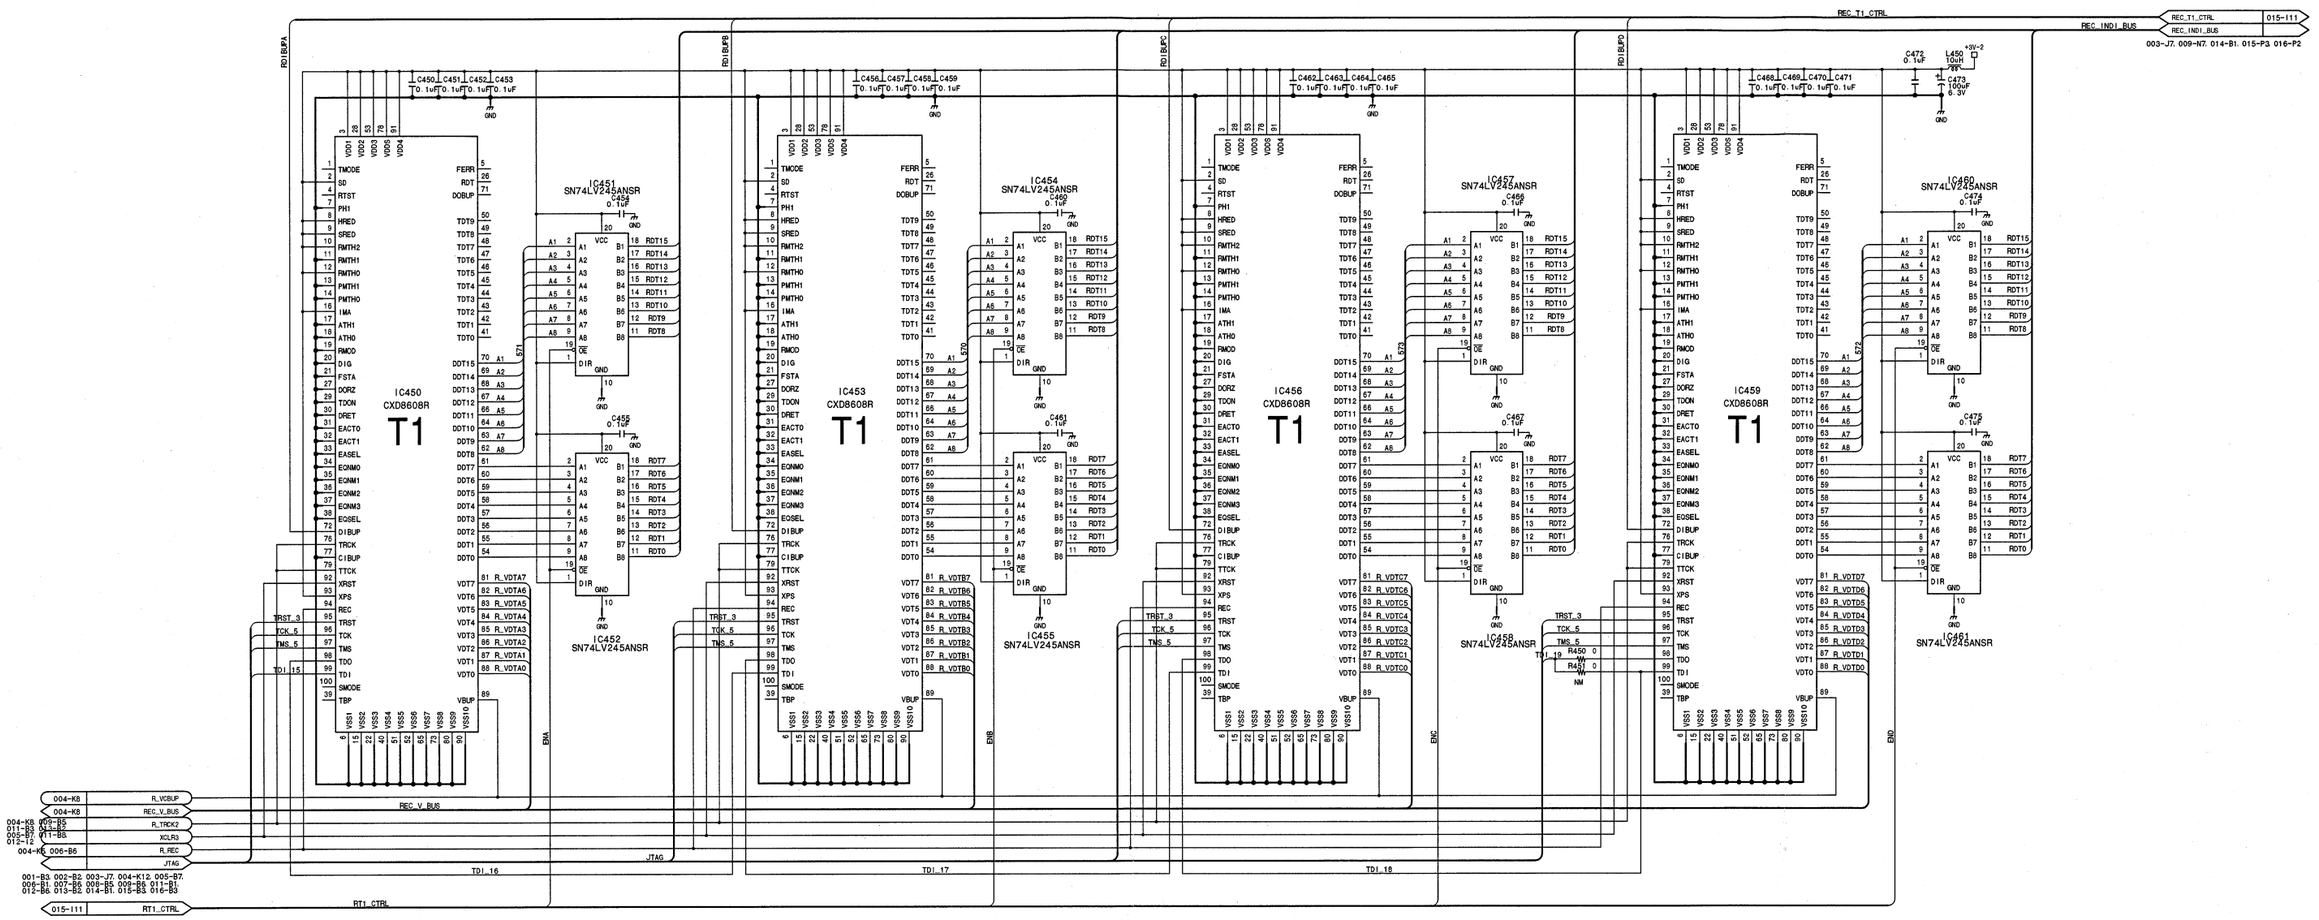

BOARD NO. SUFFIX	LOT NO.
12	909
13	910-002
14	003-112

Digital process
DPR-136 (10/17)
BOARD NO. 1-675-560-12, 13, 14
LOT NO. 909-112
DSR-2000_DPR-136_014_10

DPR-136 (11/17)

DSR-2000 (UC) : S/N 100291 through 101240
DSR-2000 (J) : S/N 300241 through 301310
DSR-2000P (CE) : S/N 400301 through 401550

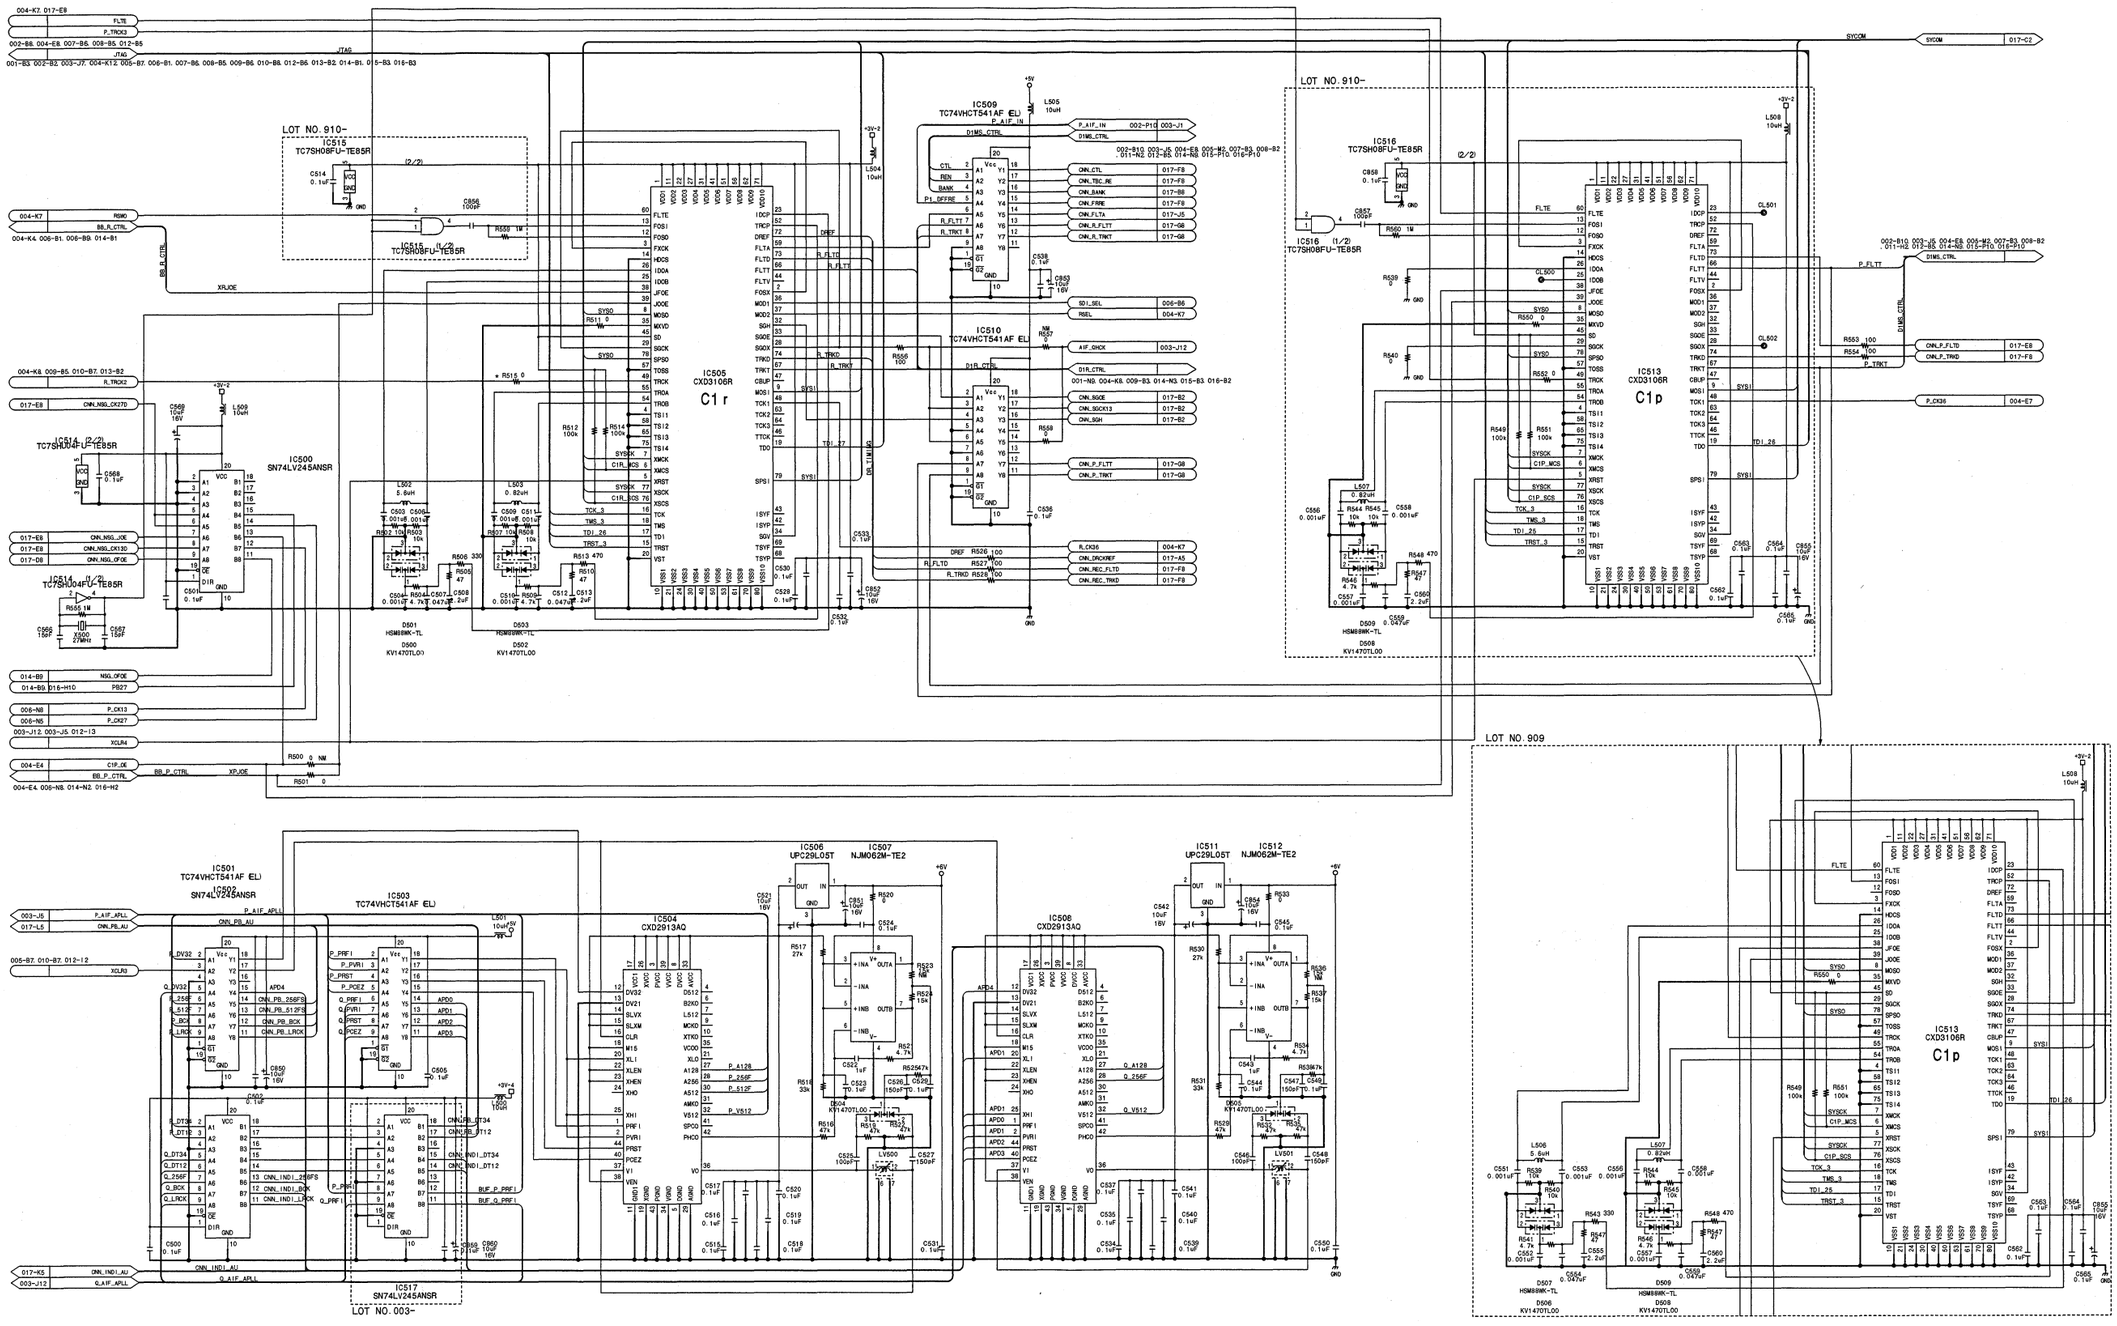

BOARD NO. SUFFIX	LOT NO.
12	909
13	910-002
14	003-112

NOTE
*

REF. NO	CHANGE INFORMATION	LOT NO.
R515	0 ADD	910-

Digital process
DPR-136 (11/17)
BOARD NO. 1-675-560-12, 13, 14
LOT NO. 909-112
DSR-2000_DPR-136_014_11

DPR-136 (12/17)

DSR-2000 (UC) : S/N 100291 through 101240
DSR-2000 (J) : S/N 300241 through 301310
DSR-2000P (CE) : S/N 400301 through 401550

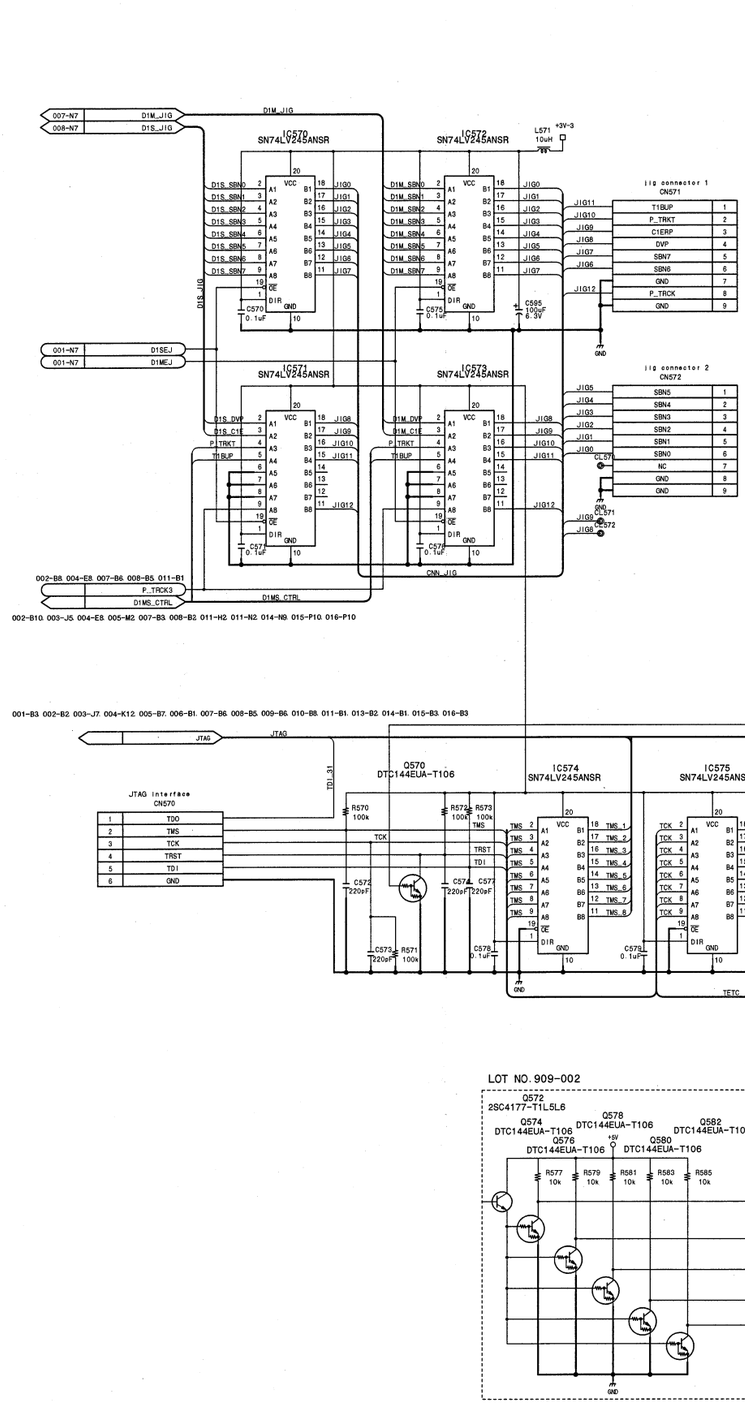

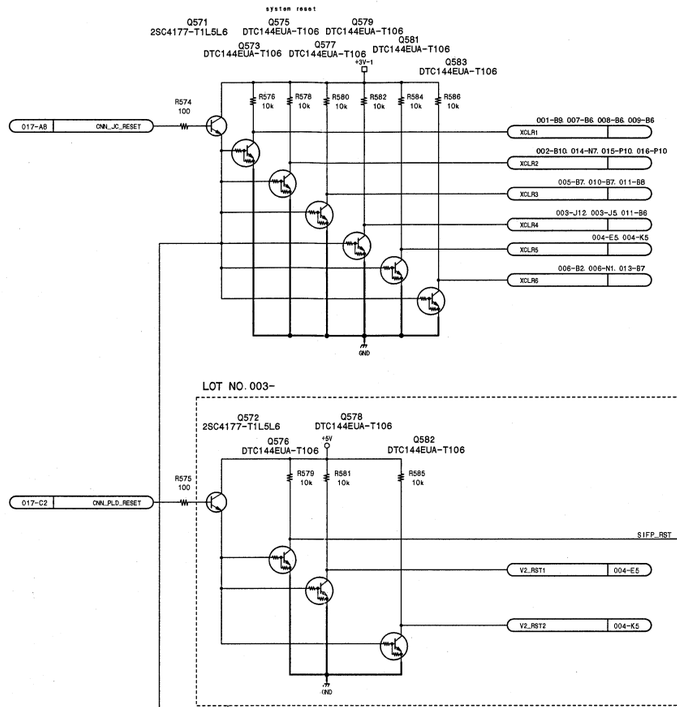

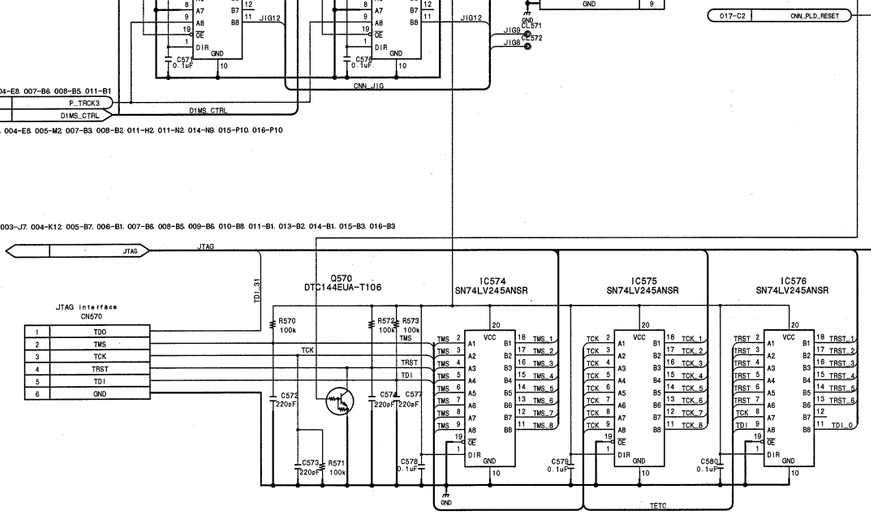

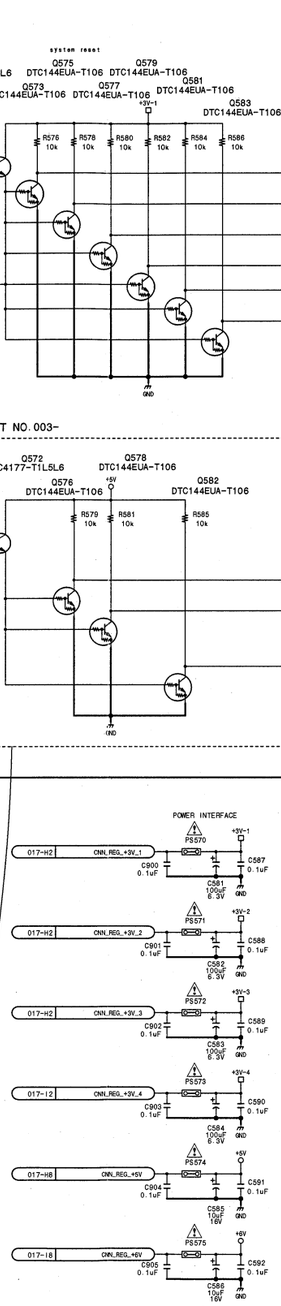

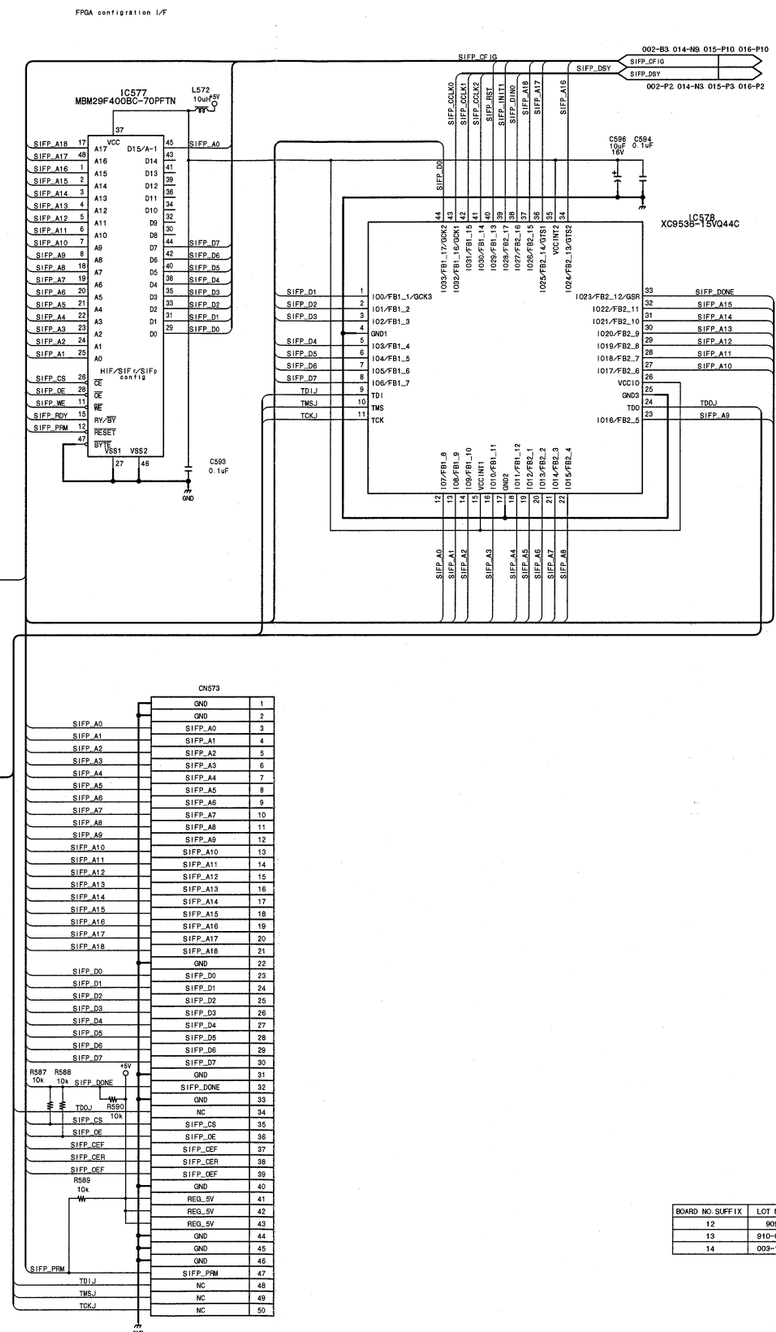

CN573

	GND	1	
	GND	2	
SIFP_A0	SIFP_A0	3	
SIFP_A1	SIFP_A1	4	
SIFP_A2	SIFP_A2	5	
SIFP_A3	SIFP_A3	6	
SIFP_A4	SIFP_A4	7	
SIFP_A5	SIFP_A5	8	
SIFP_A6	SIFP_A6	9	
SIFP_A7	SIFP_A7	10	
SIFP_A8	SIFP_A8	11	
SIFP_A9	SIFP_A9	12	
SIFP_A10	SIFP_A10	13	
SIFP_A11	SIFP_A11	14	
SIFP_A12	SIFP_A12	15	
SIFP_A13	SIFP_A13	16	
SIFP_A14	SIFP_A14	17	
SIFP_A15	SIFP_A15	18	
SIFP_A16	SIFP_A16	19	
SIFP_A17	SIFP_A17	20	
SIFP_A18	SIFP_A18	21	
	GND	22	
SIFP_D0	SIFP_D0	23	
SIFP_D1	SIFP_D1	24	
SIFP_D2	SIFP_D2	25	
SIFP_D3	SIFP_D3	26	
SIFP_D4	SIFP_D4	27	
SIFP_D5	SIFP_D5	28	
SIFP_D6	SIFP_D6	29	
SIFP_D7	SIFP_D7	30	
	GND	31	
SIFP_DONE	SIFP_DONE	32	
	GND	33	
	NC	34	
SIFP_CS	SIFP_CS	35	
SIFP_OE	SIFP_OE	36	
SIFP_CEF	SIFP_CEF	37	
SIFP_CER	SIFP_CER	38	
SIFP_OEF	SIFP_OEF	39	
	GND	40	
	REG_5V	41	
	REG_5V	42	
	REG_5V	43	
	GND	44	
	GND	45	
	GND	46	
SIFP_PRM	SIFP_PRM	47	
	NC	48	
	NC	49	
	NC	50	

BOARD NO. SUFFIX	LOT NO.
12	909
13	910-002
14	003-112

Digital process
DPR-136 (12/17)
BOARD NO. 1-675-560-12, 13, 14
LOT NO. 909-112
DSR-2000_DPR-136_014_12

DPR-136 (13/17)

DSR-2000 (UC) : S/N 100291 through 101240
DSR-2000 (J) : S/N 300241 through 301310
DSR-2000P (CE) : S/N 400301 through 401550

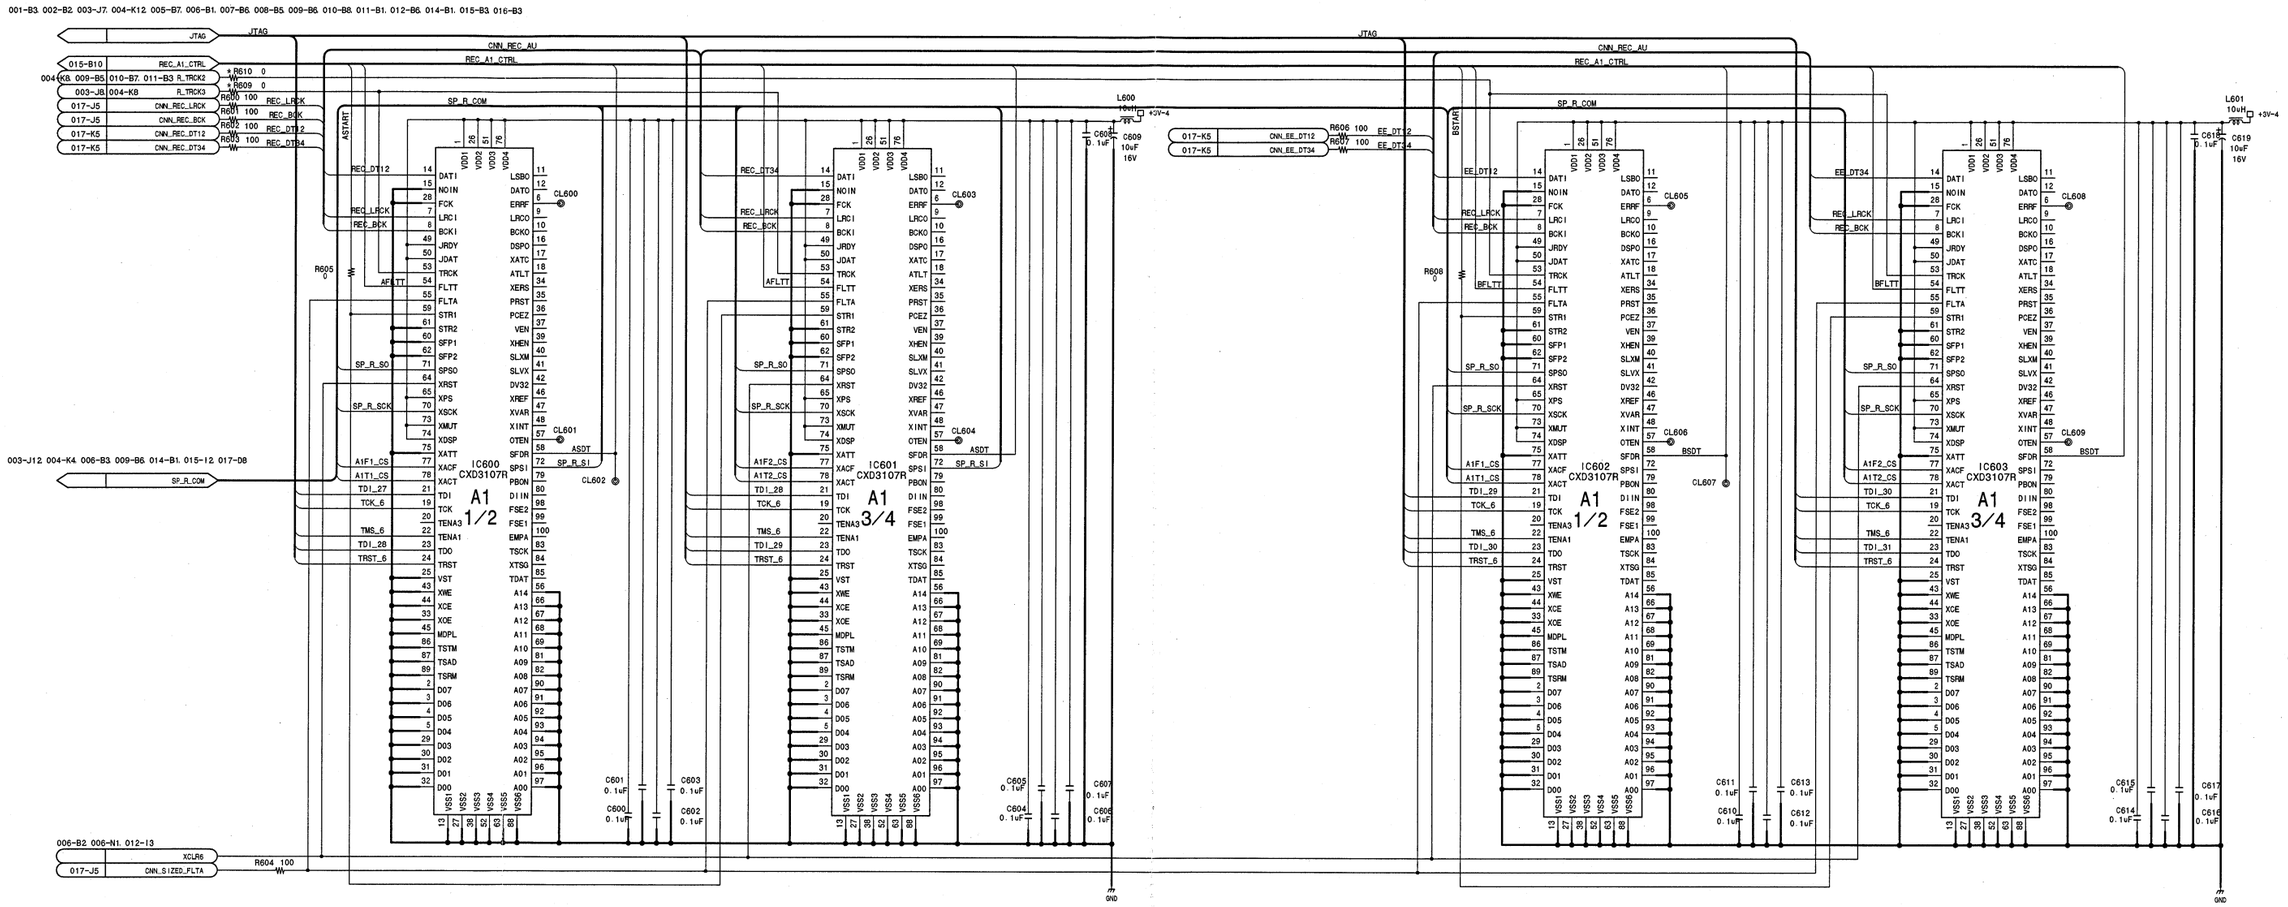

BOARD NO. SUFFIX	LOT NO.
12	909
13	910-002
14	003-112

NOTE
*

REF. NO.	CHANGE INFORMATION	LOT NO.
R609	0 ADD	910-
R610		

Digital process
DPR-136 (13/17)
BOARD NO. 1-675-560-12, 13, 14
LOT NO. 909-112
DSR-2000_DPR-136_014_13

DPR-136 (14/17)

DSR-2000 (UC) : S/N 100291 through 101240
DSR-2000 (J) : S/N 300241 through 301310
DSR-2000P (CE) : S/N 400301 through 401550

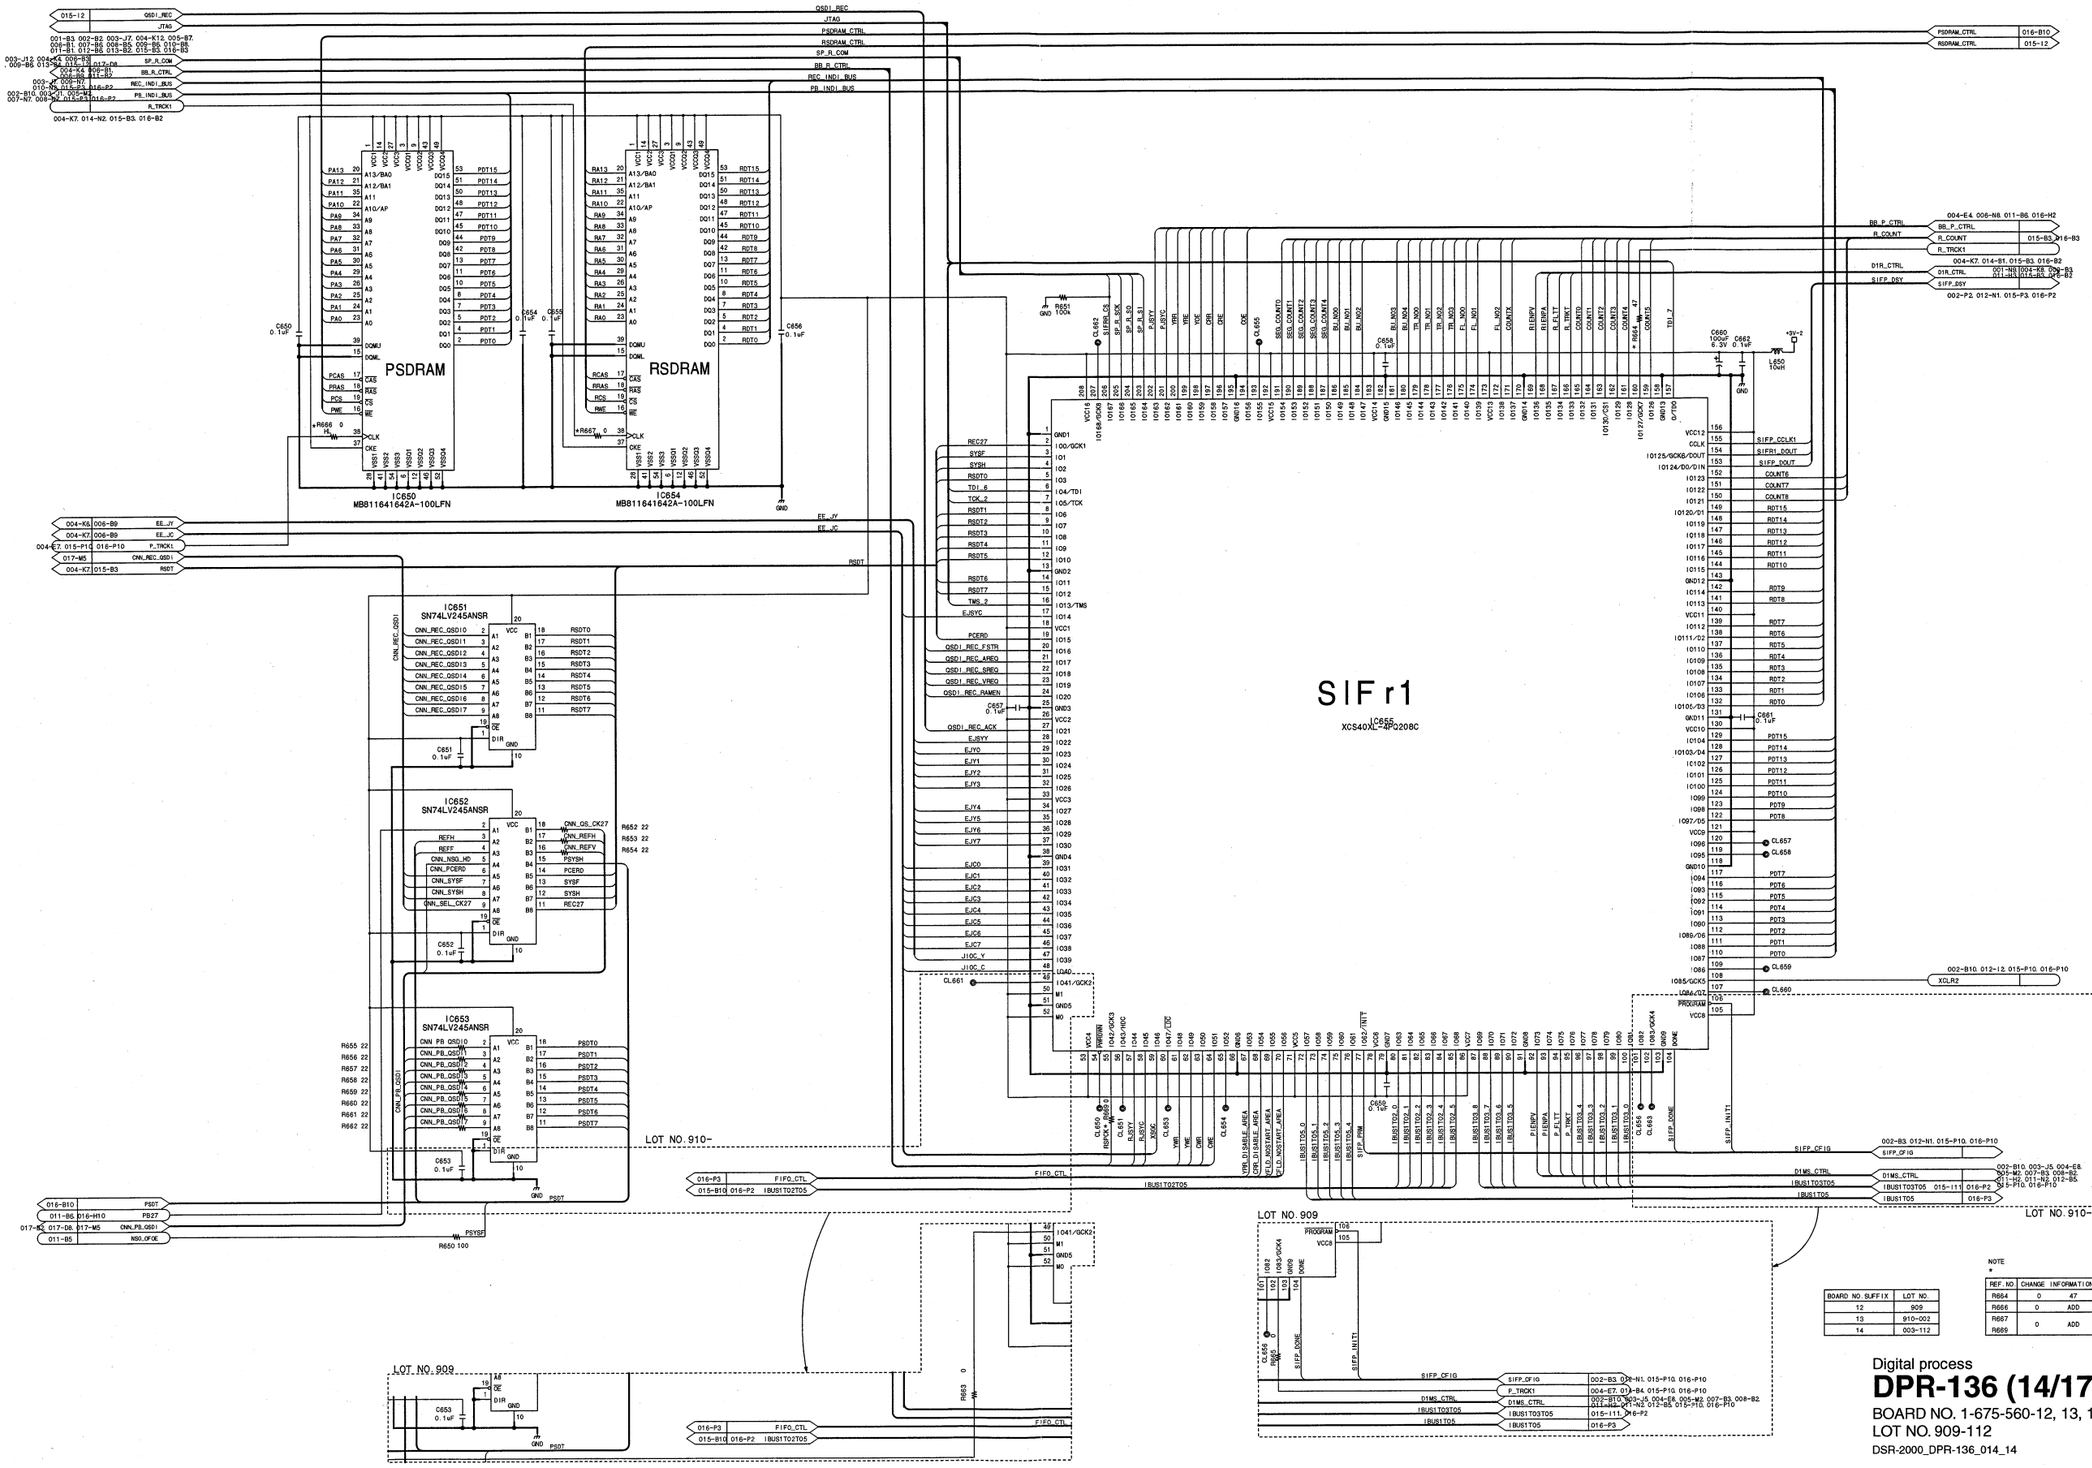

BOARD NO. SUFFIX	LOT NO.
12	909
13	910-002
14	003-112

NOTE
*

REF. NO.	CHANGE	INFORMATION	LOT NO.
R654	0	47	910-
R666	0	ADD	003-
R667	0	ADD	910-
R669			

Digital process
DPR-136 (14/17)
BOARD NO. 1-675-560-12, 13, 14
LOT NO. 909-112
DSR-2000_DPR-136_014_14

DPR-136 (15/17)

DSR-2000 (UC) : S/N 100291 through 101240
DSR-2000 (J) : S/N 300241 through 301310
DSR-2000P (CE) : S/N 400301 through 401550

BOARD NO. SUFFIX	LOT NO.
12	909
13	910~002
14	003~112

NOTE
*

REF. NO.	CHANGE INFORMATION	LOT NO.
R701	0 → 47	910~
R703		

Digital process
DPR-136 (15/17)
BOARD NO. 1-675-560-12, 13, 14
LOT NO. 909-112
DSR-2000_DPR-136_014_15

15-52 (b) 15-52 (b)

DSR-2000/2000P

DPR-136 (16/17)

DSR-2000 (UC) : S/N 100291 through 101240
DSR-2000 (J) : S/N 300241 through 301310
DSR-2000P (CE) : S/N 400301 through 401550

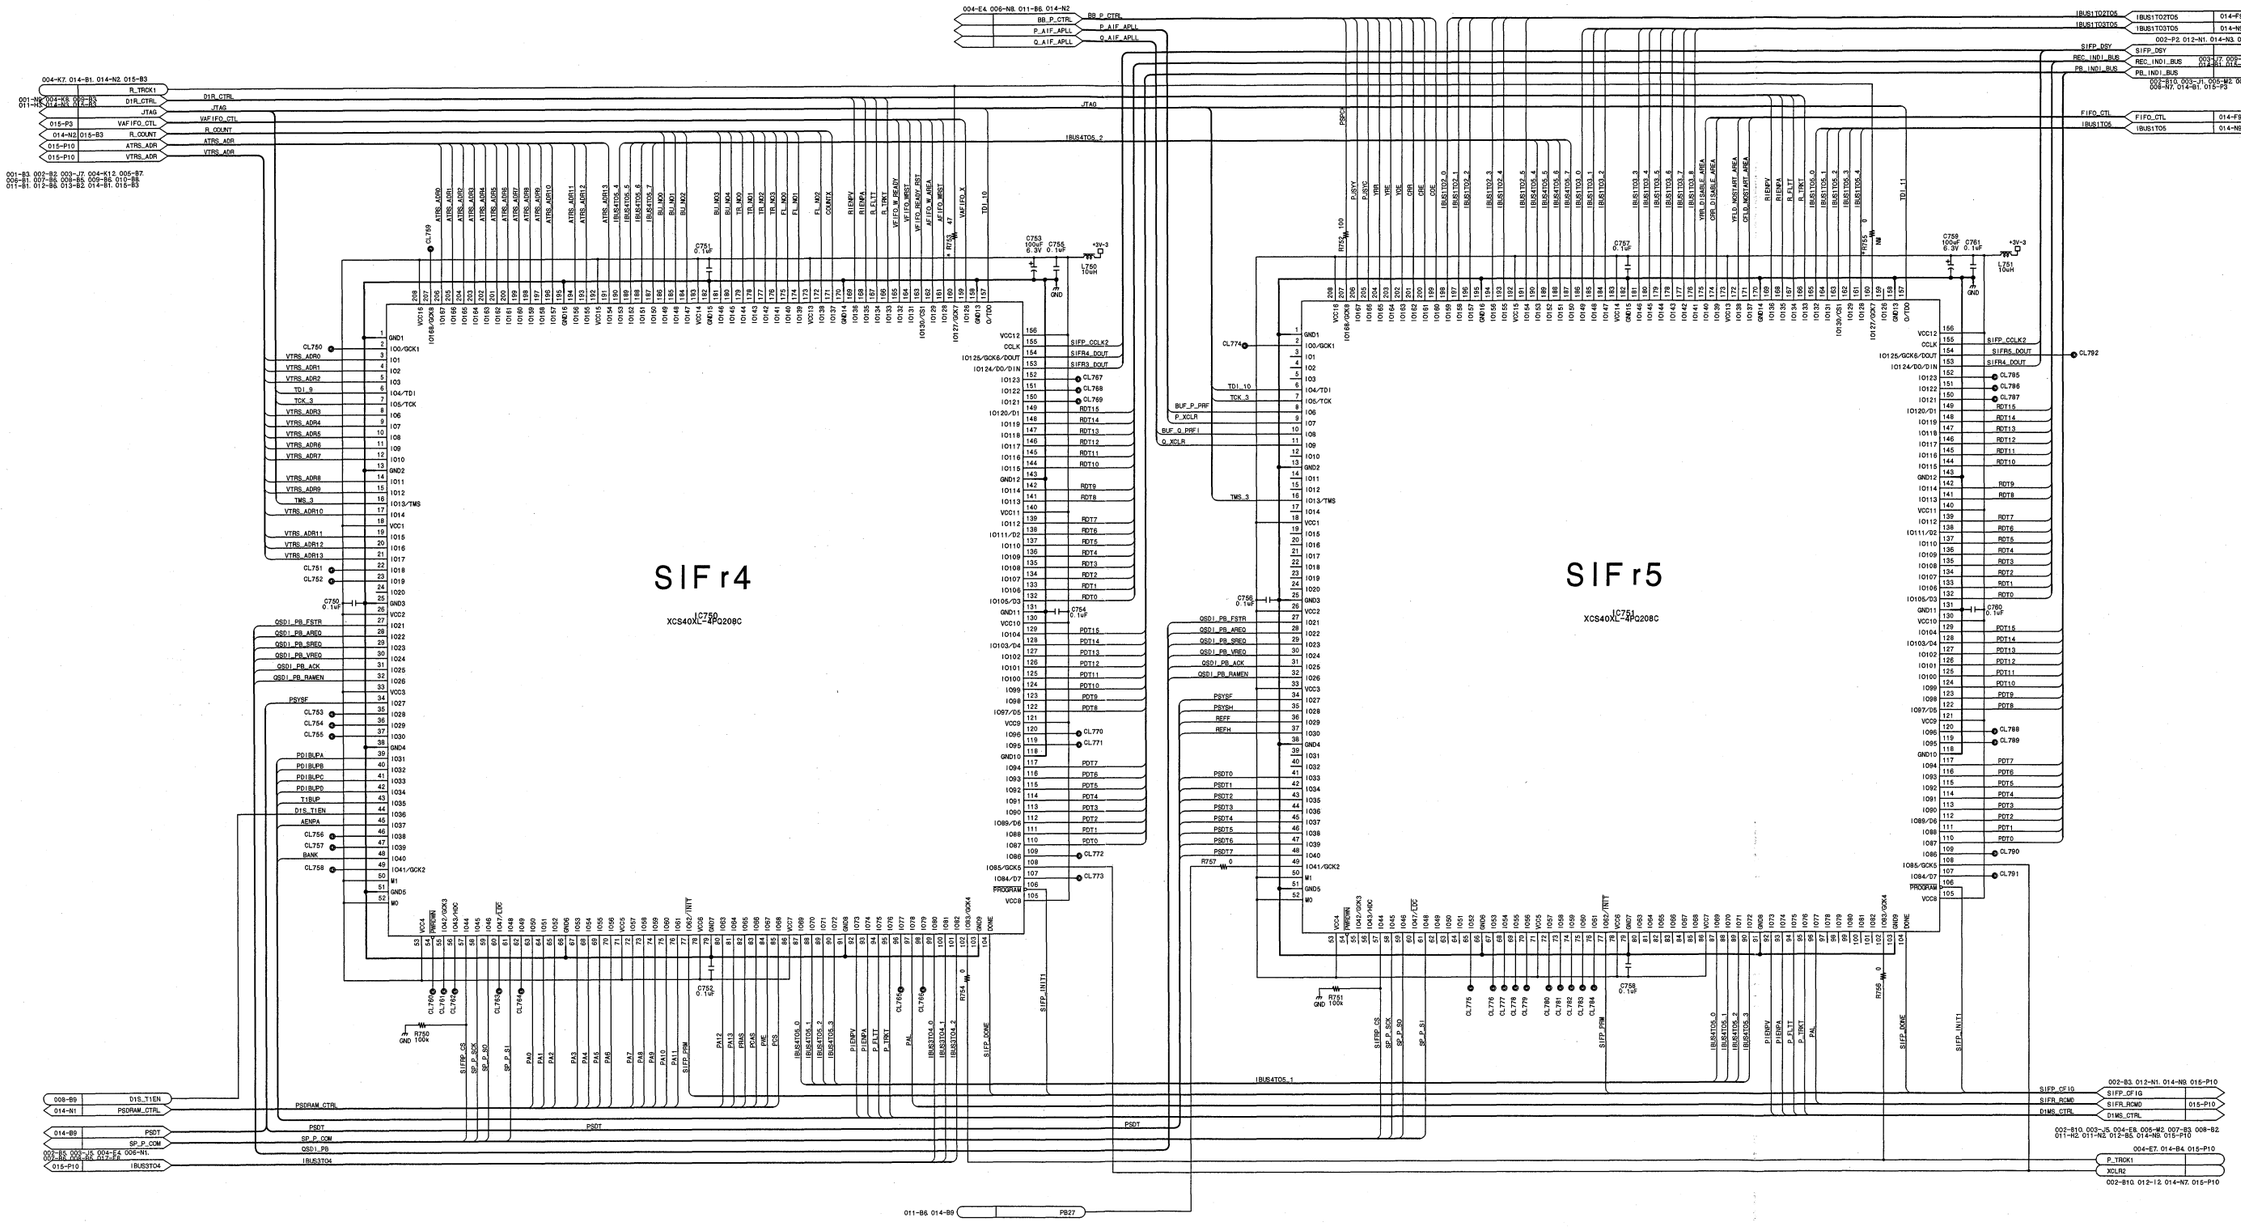

BOARD NO. SUFF1X	LOT NO.
12	909
13	910-002
14	003-112

NOTE
*

REF. NO.	CHANGE INFORMATION	LOT NO.
R753	0 ⟶ 47	910-
R755	0	DELETE

Digital process
DPR-136 (16/17)
BOARD NO. 1-675-560-12, 13, 14
LOT NO. 909-112
DSR-2000_DPR-136_014_16

DPR-136 (17/17)

DSR-2000 (UC) : S/N 100291 through 101240
DSR-2000 (J) : S/N 300241 through 301310
DSR-2000P (CE) : S/N 400301 through 401550

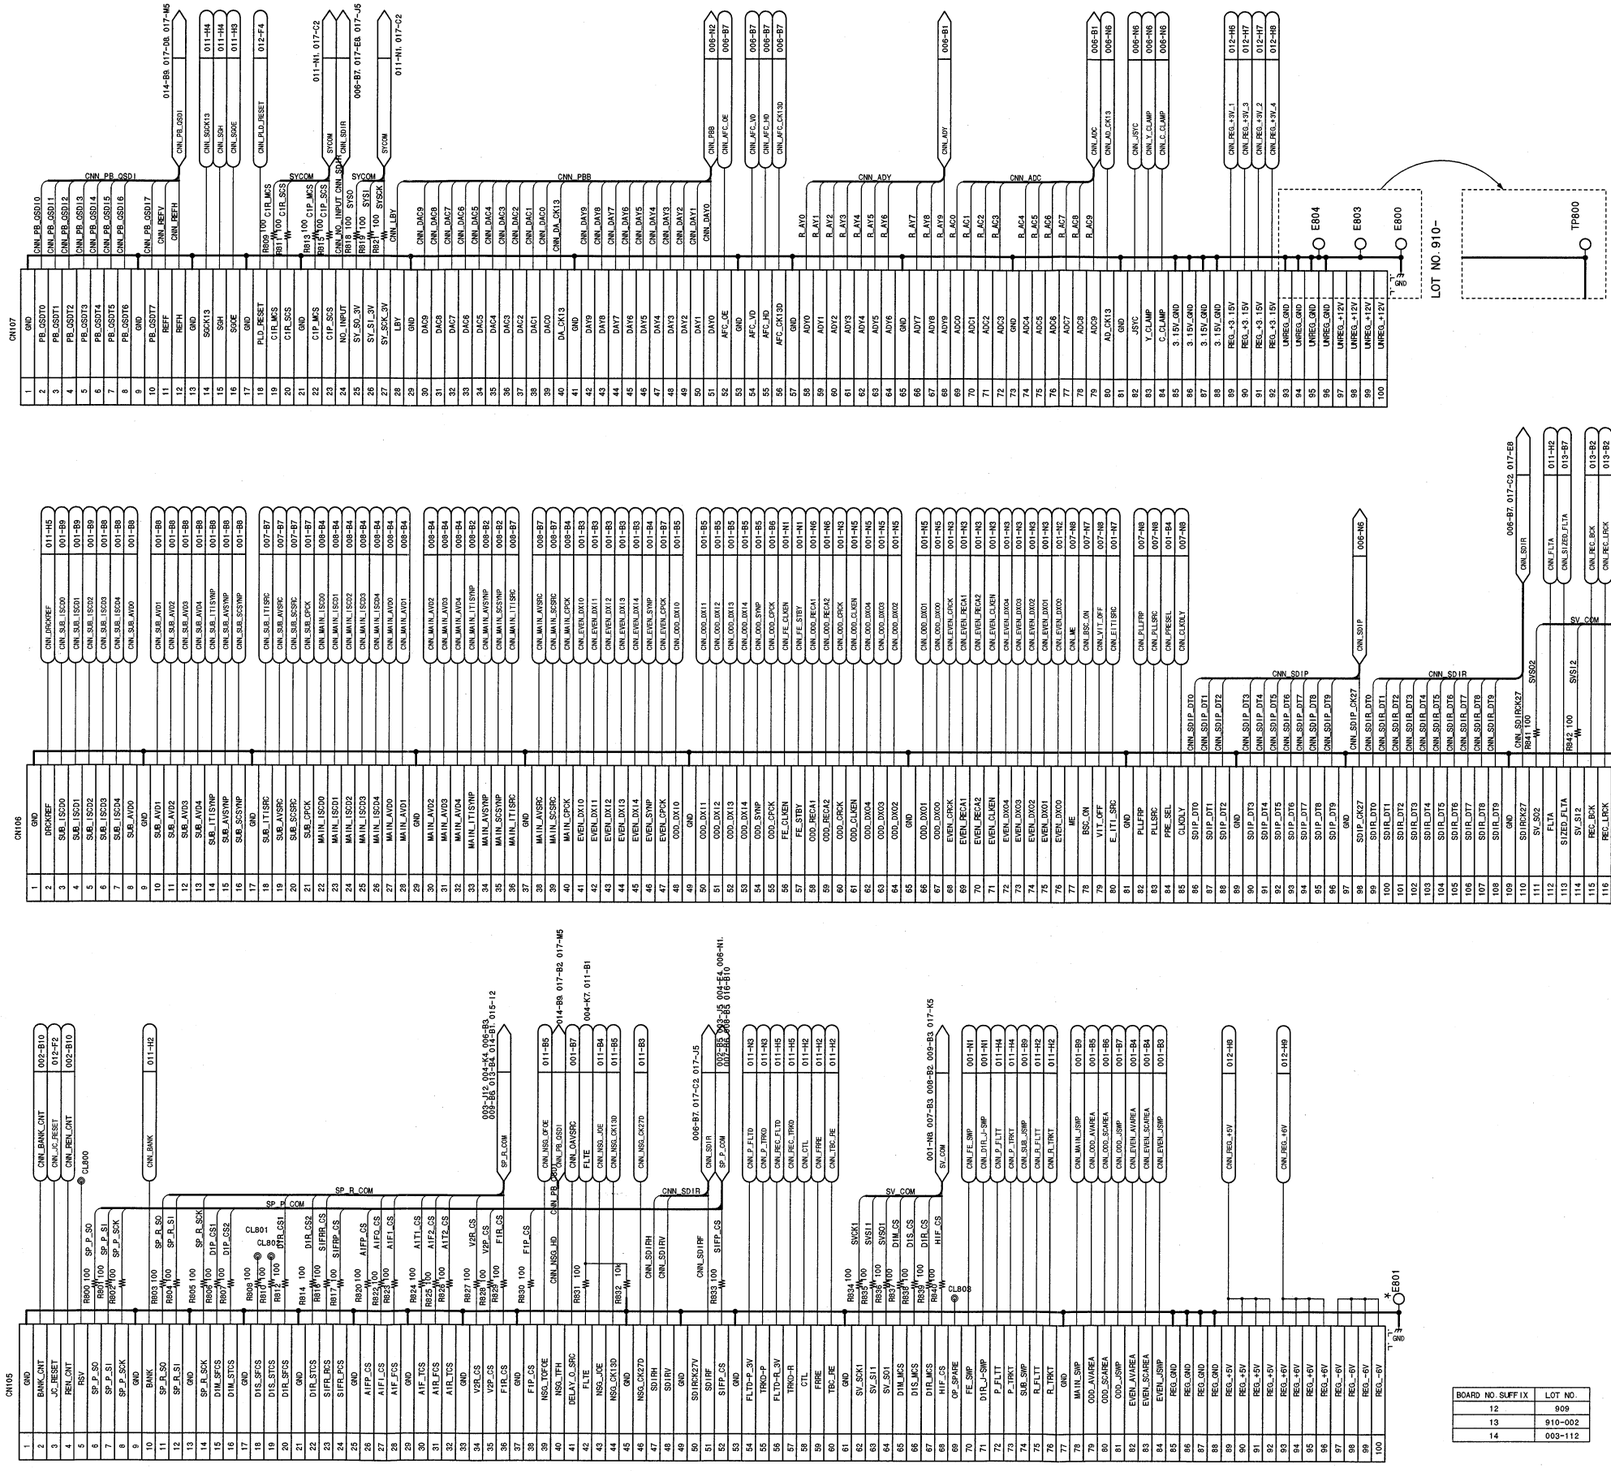

BOARD NO. SUFFIX	LOT NO.
12	909
13	910~002
14	003~112

NOTE
*

REF. NO.	CHANGE INFORMATION		LOT NO.
E801 E802	TP ⟶ E		910~
R855	0	ADD	003~
R844 R845 R847~854	22	ADD	

Digital process

DPR-136 (17/17)

BOARD NO. 1-675-560-12, 13, 14
LOT NO. 909-112
DSR-2000_DPR-136_014_17

DPR-136 (1/17)

DSR-2000 (UC) : S/N 100001 through 100290
DSR-2000 (J) : S/N 300001 through 300240
DSR-2000P (CE) : S/N 400001 through 400300

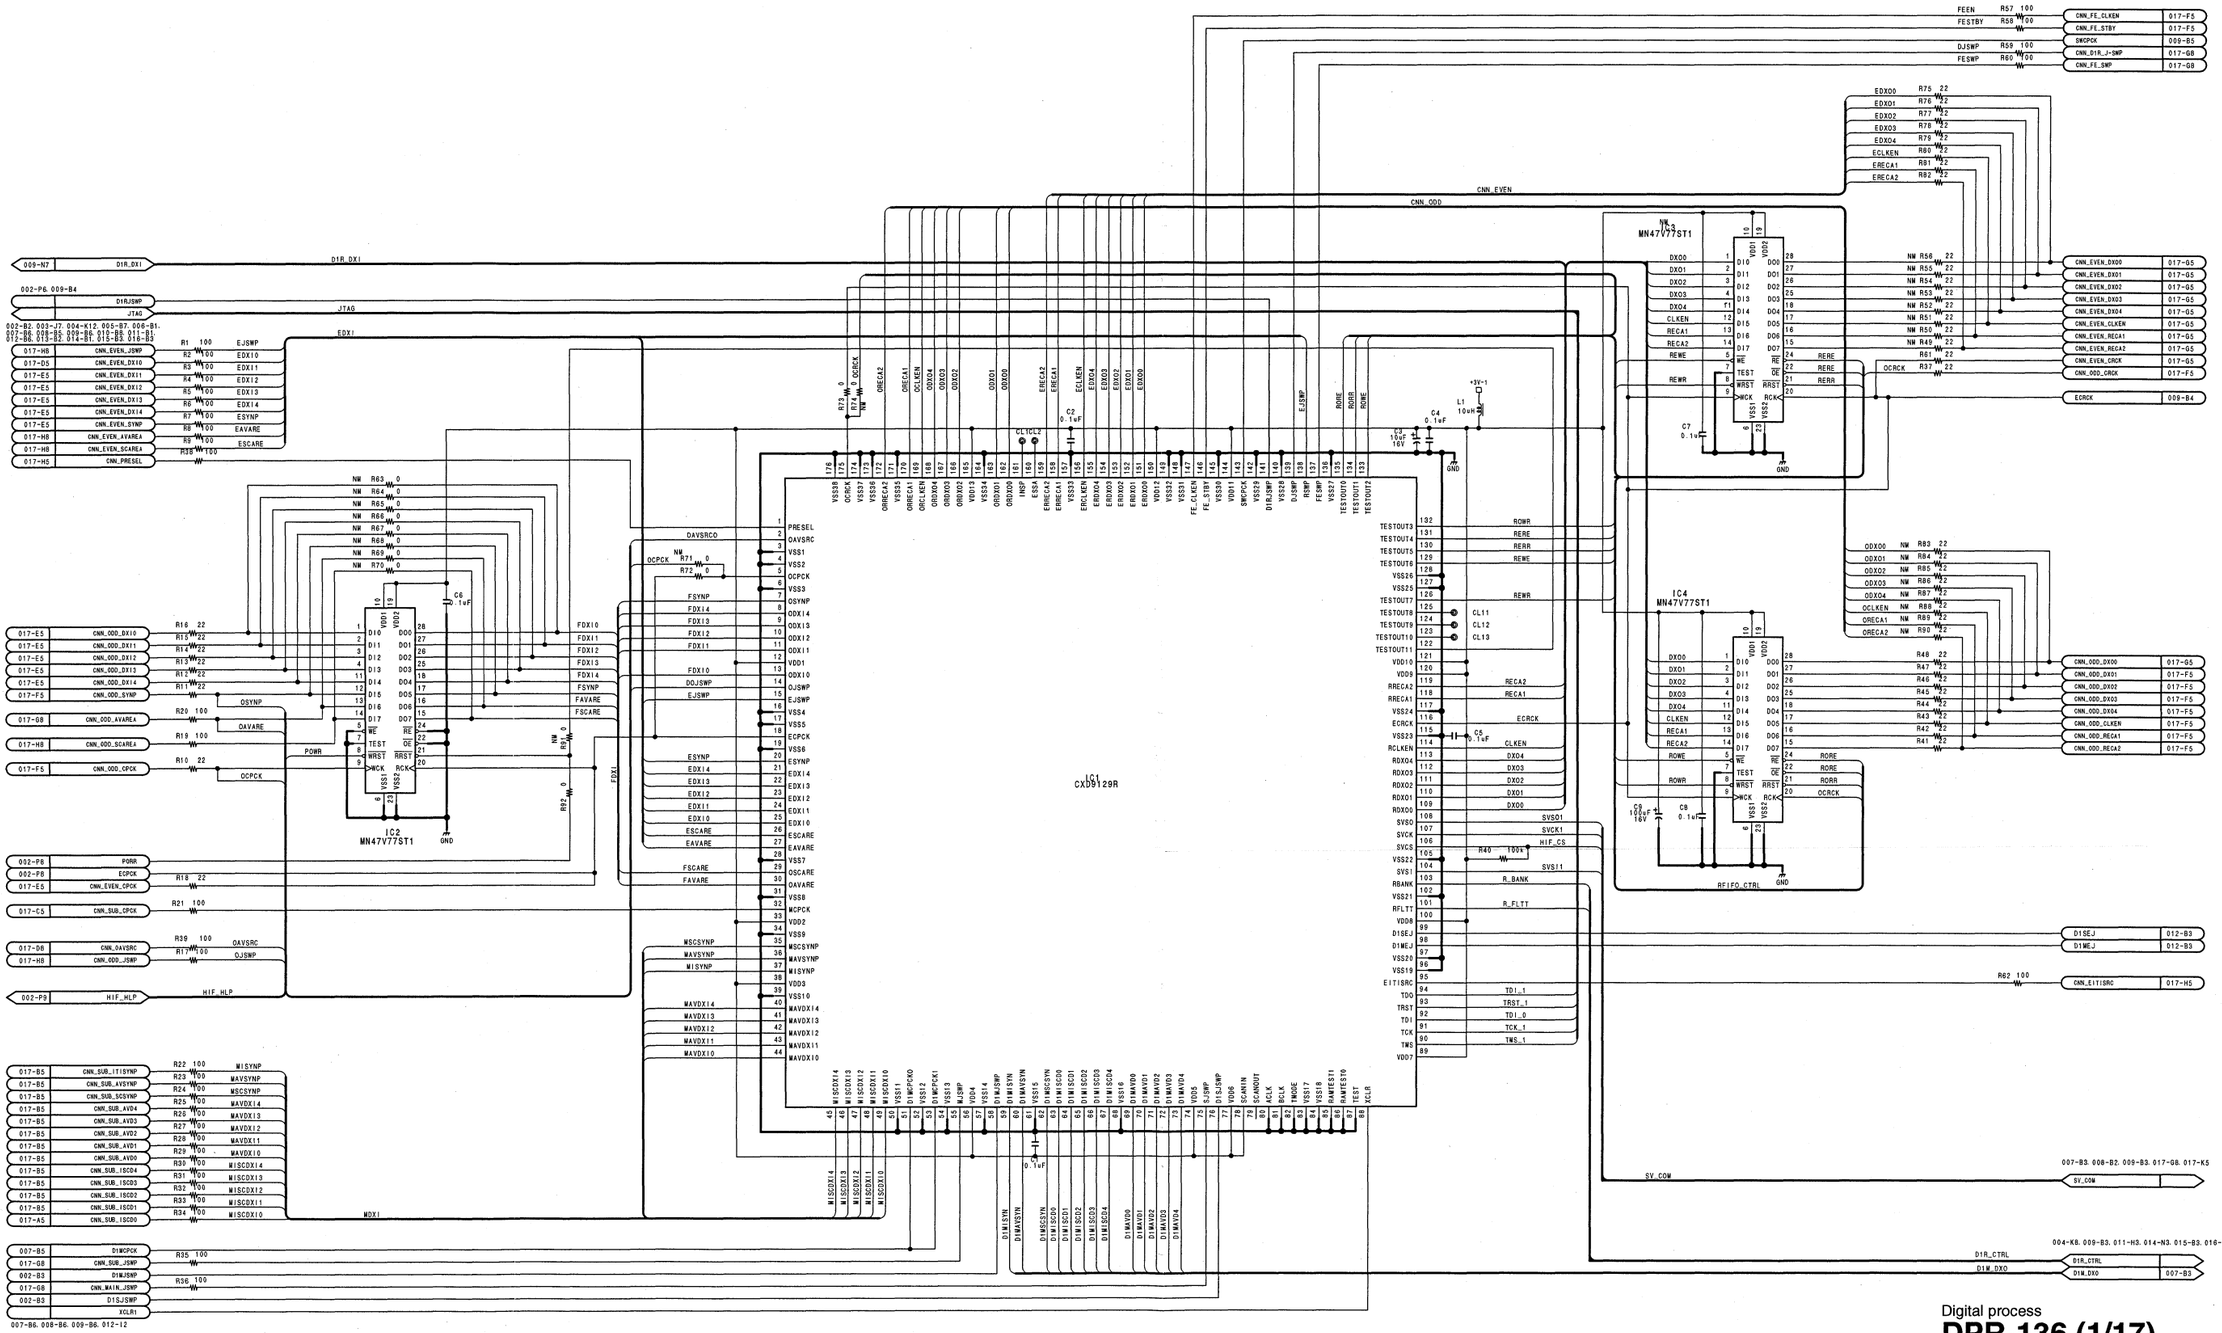

Digital process
DPR-136 (1/17)
BOARD NO. 1-675-560-12
LOT NO. 907-908
DSR-2000_DPR-136_C12_1

DPR-136 (2/17)

DSR-2000 (UC) : S/N 100001 through 100290
DSR-2000 (J) : S/N 300001 through 300240
DSR-2000P (CE) : S/N 400001 through 400300

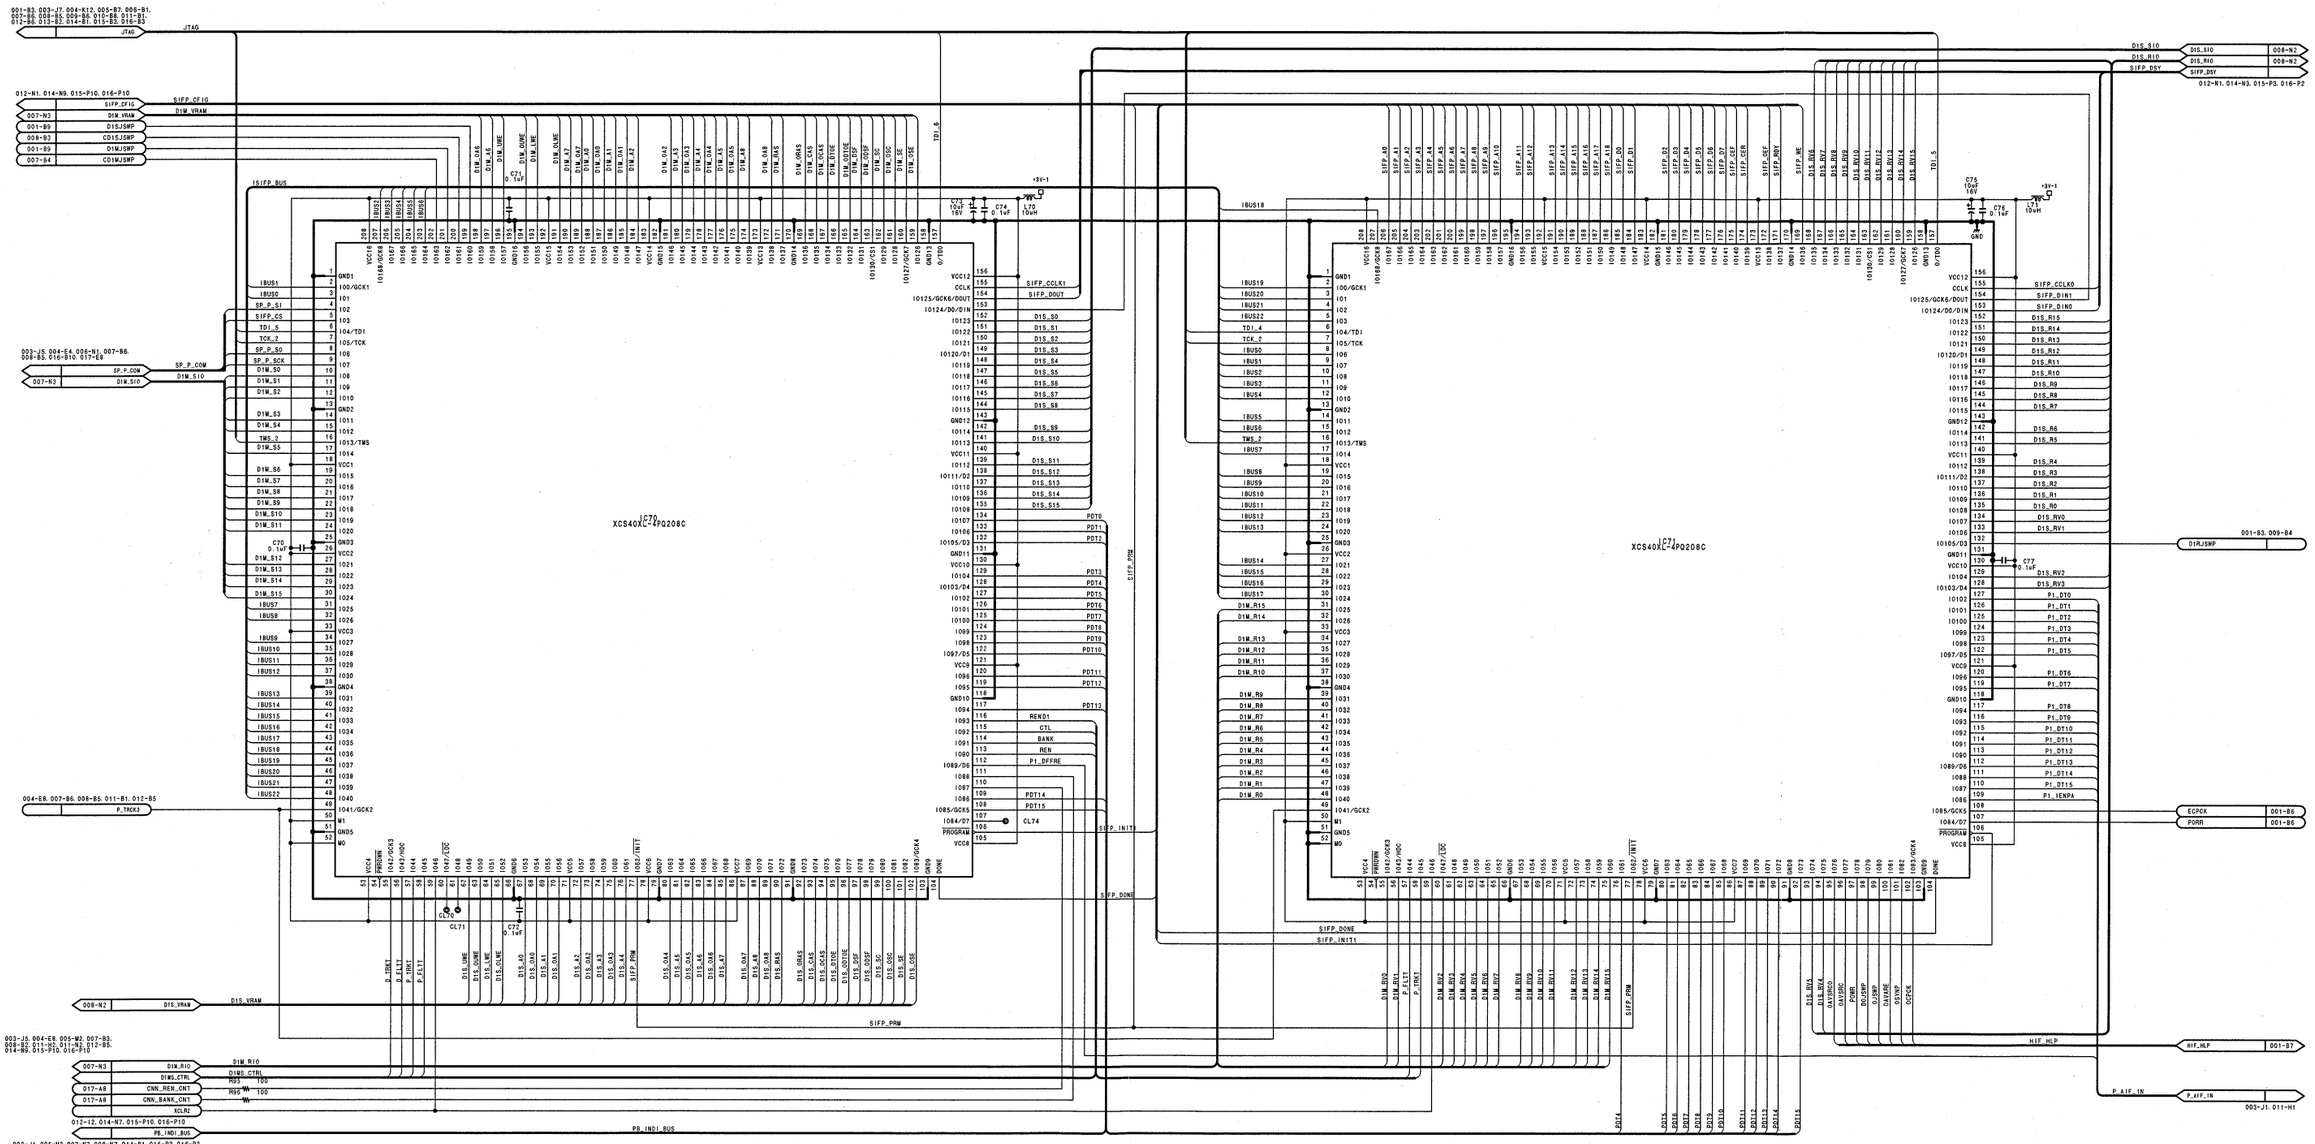

Digital process
DPR-136 (2/17)
BOARD NO. 1-675-560-12
LOT NO. 907-908
DSR-2000_DPR-136_C12_2

DPR-136 (3/17)

DSR-2000 (UC) : S/N 100001 through 100290
DSR-2000 (J) : S/N 300001 through 300240
DSR-2000P (CE) : S/N 400001 through 400300

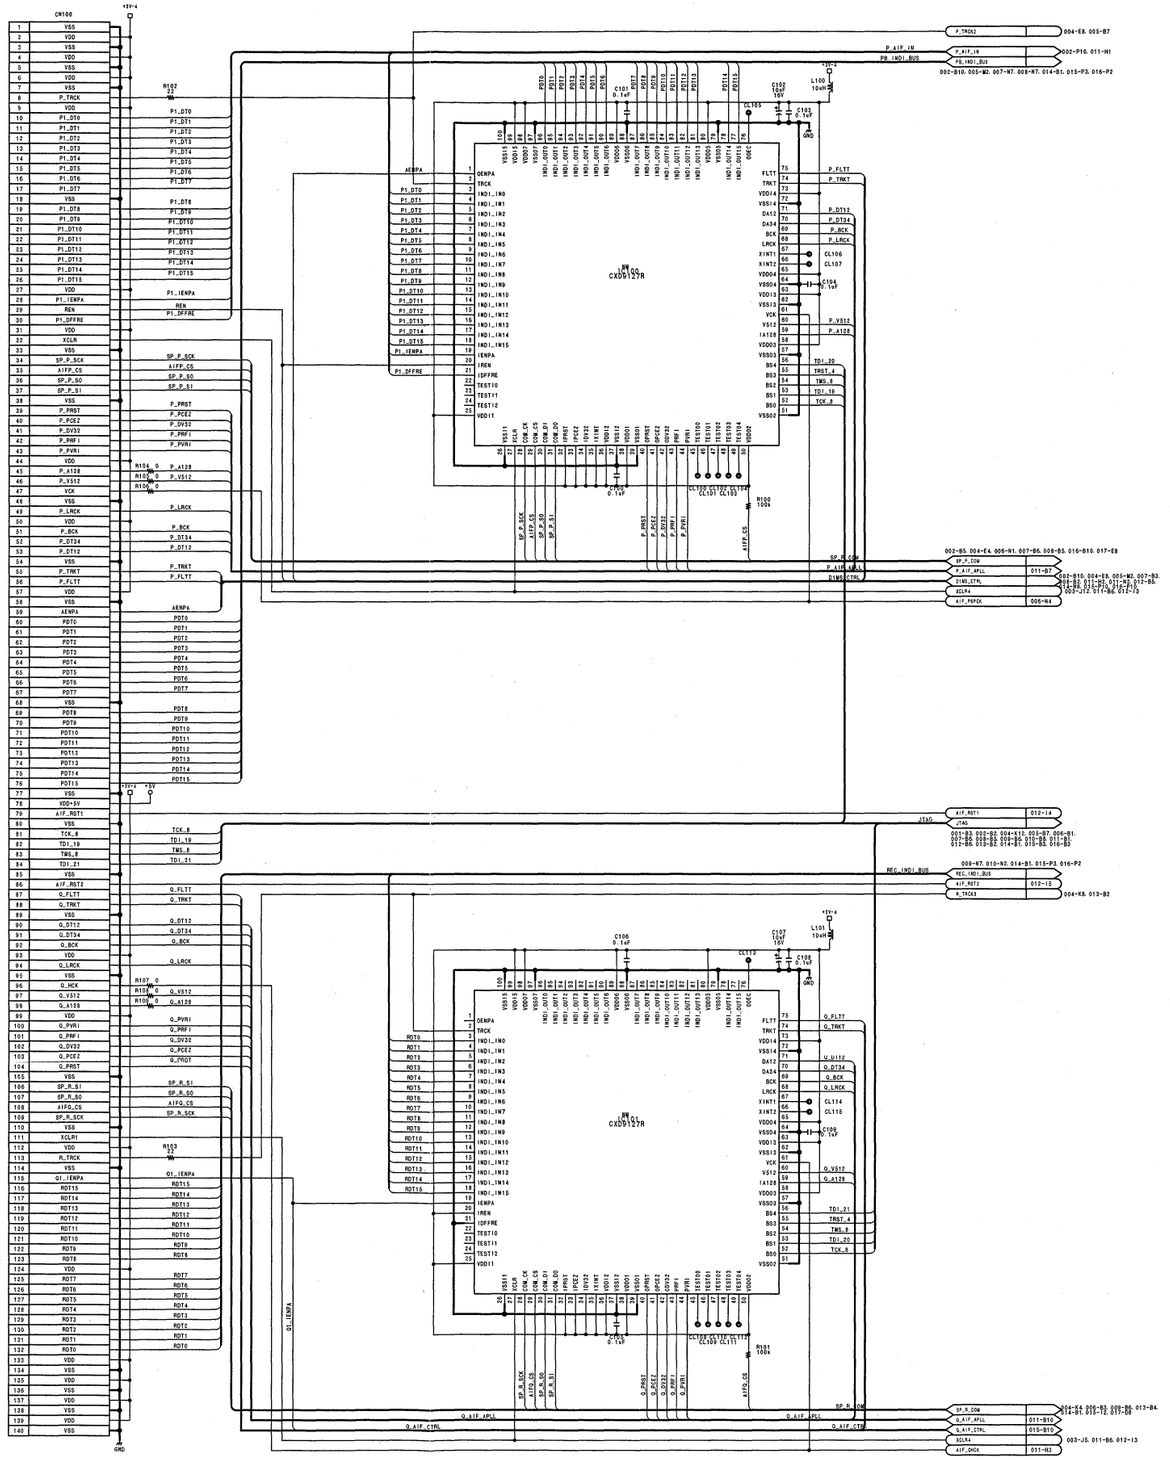

Digital process
DPR-136 (3/17)
BOARD NO. 1-675-560-12
LOT NO. 907-908
DSR-2000_DPR-136_C12_3

15-40 (a) 15-40 (a)

DSR-2000/2000P

DPR-136 (4/17)

DSR-2000 (UC) : S/N 100001 through 100290
DSR-2000 (J) : S/N 300001 through 300240
DSR-2000P (CE) : S/N 400001 through 400300

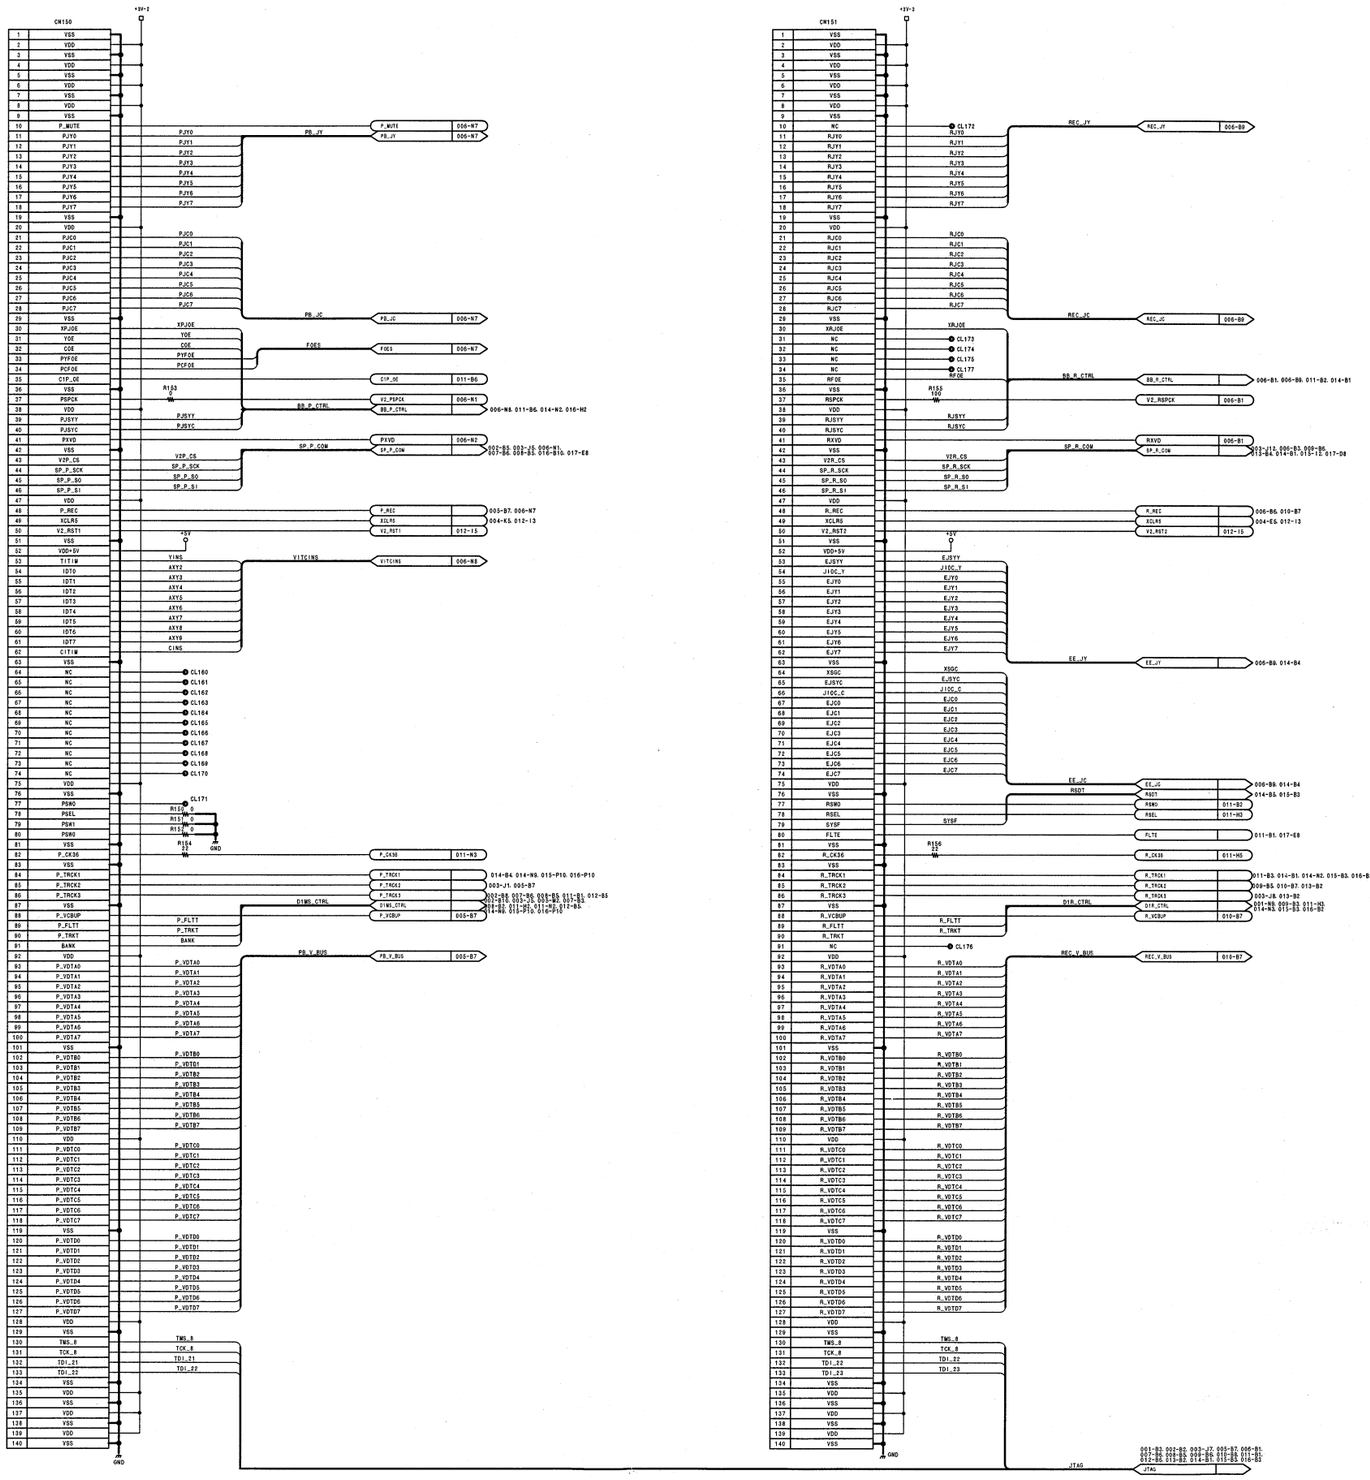

Digital process
DPR-136 (4/17)
BOARD NO. 1-675-560-12
LOT NO. 907-908
DSR-2000_DPR-136_C12_4

DSR-2000/2000P

15-41 (a) 15-41 (a)

DPR-136 (5/17)

DSR-2000 (UC) : S/N 100001 through 100290
DSR-2000 (J) : S/N 300001 through 300240
DSR-2000P (CE) : S/N 400001 through 400300

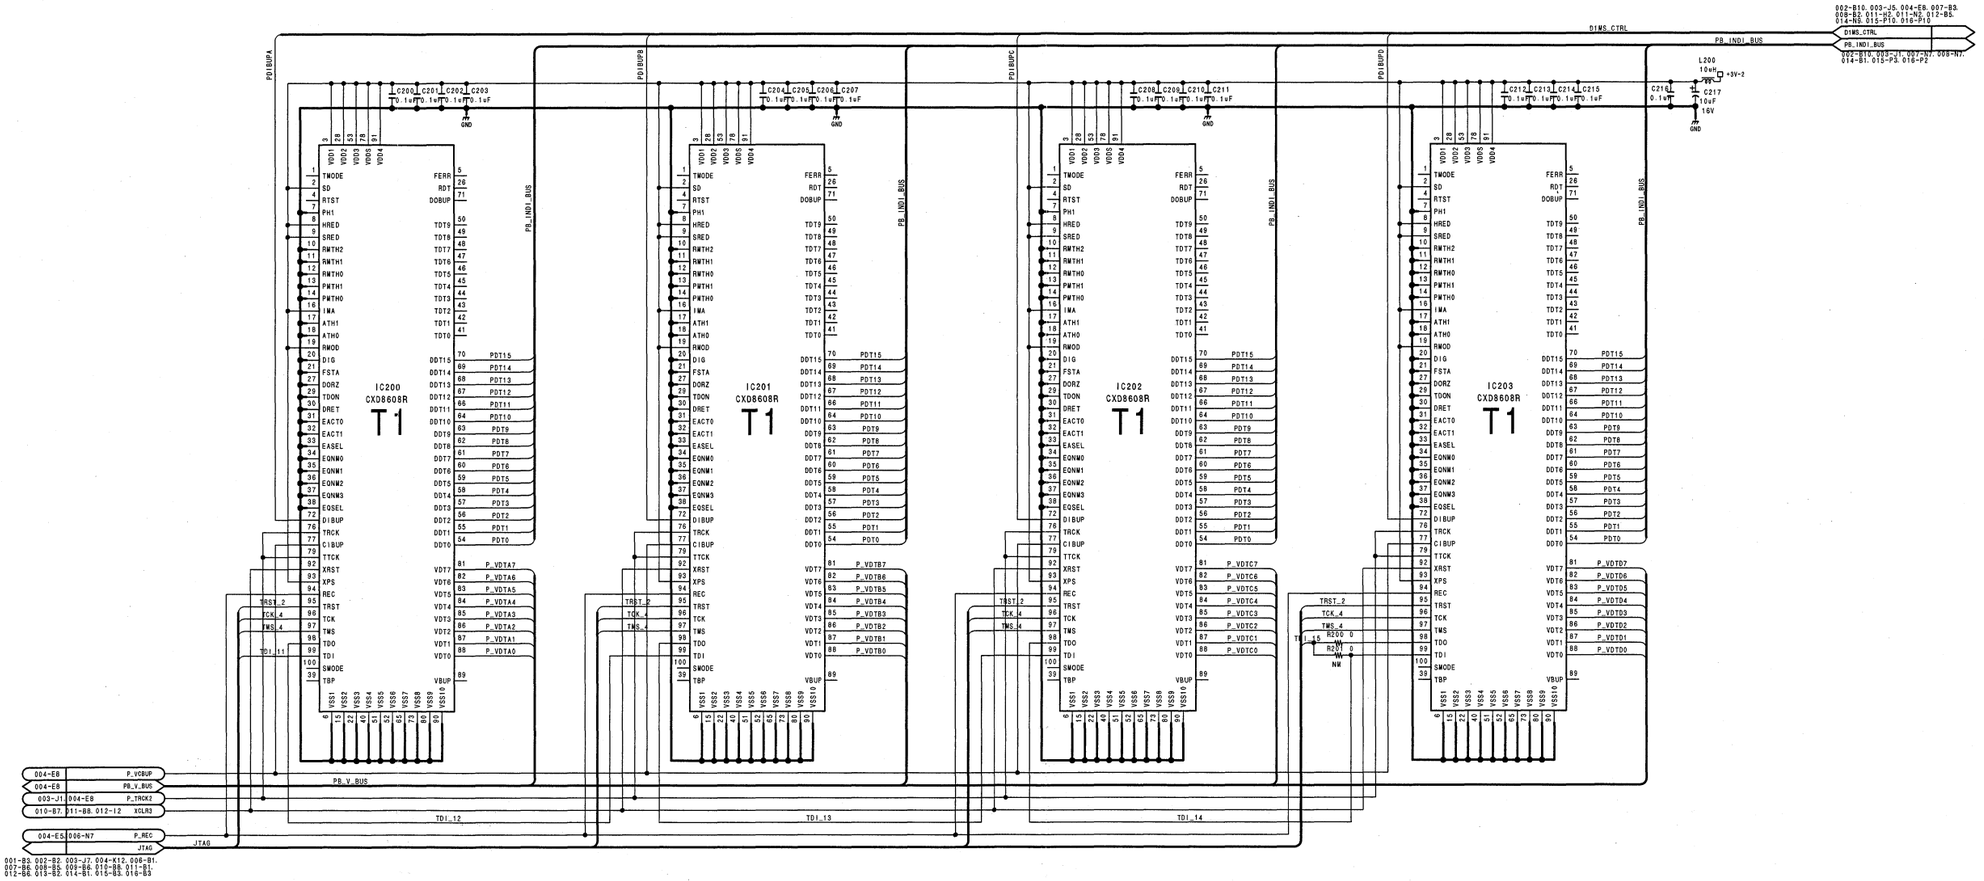

Digital process
DPR-136 (5/17)
BOARD NO. 1-675-560-12
LOT NO. 907-908
DSR-2000_DPR-136_C12_5

DPR-136 (6/17)

DSR-2000 (UC) : S/N 100001 through 100290
DSR-2000 (J) : S/N 300001 through 300240
DSR-2000P (CE) : S/N 400001 through 400300

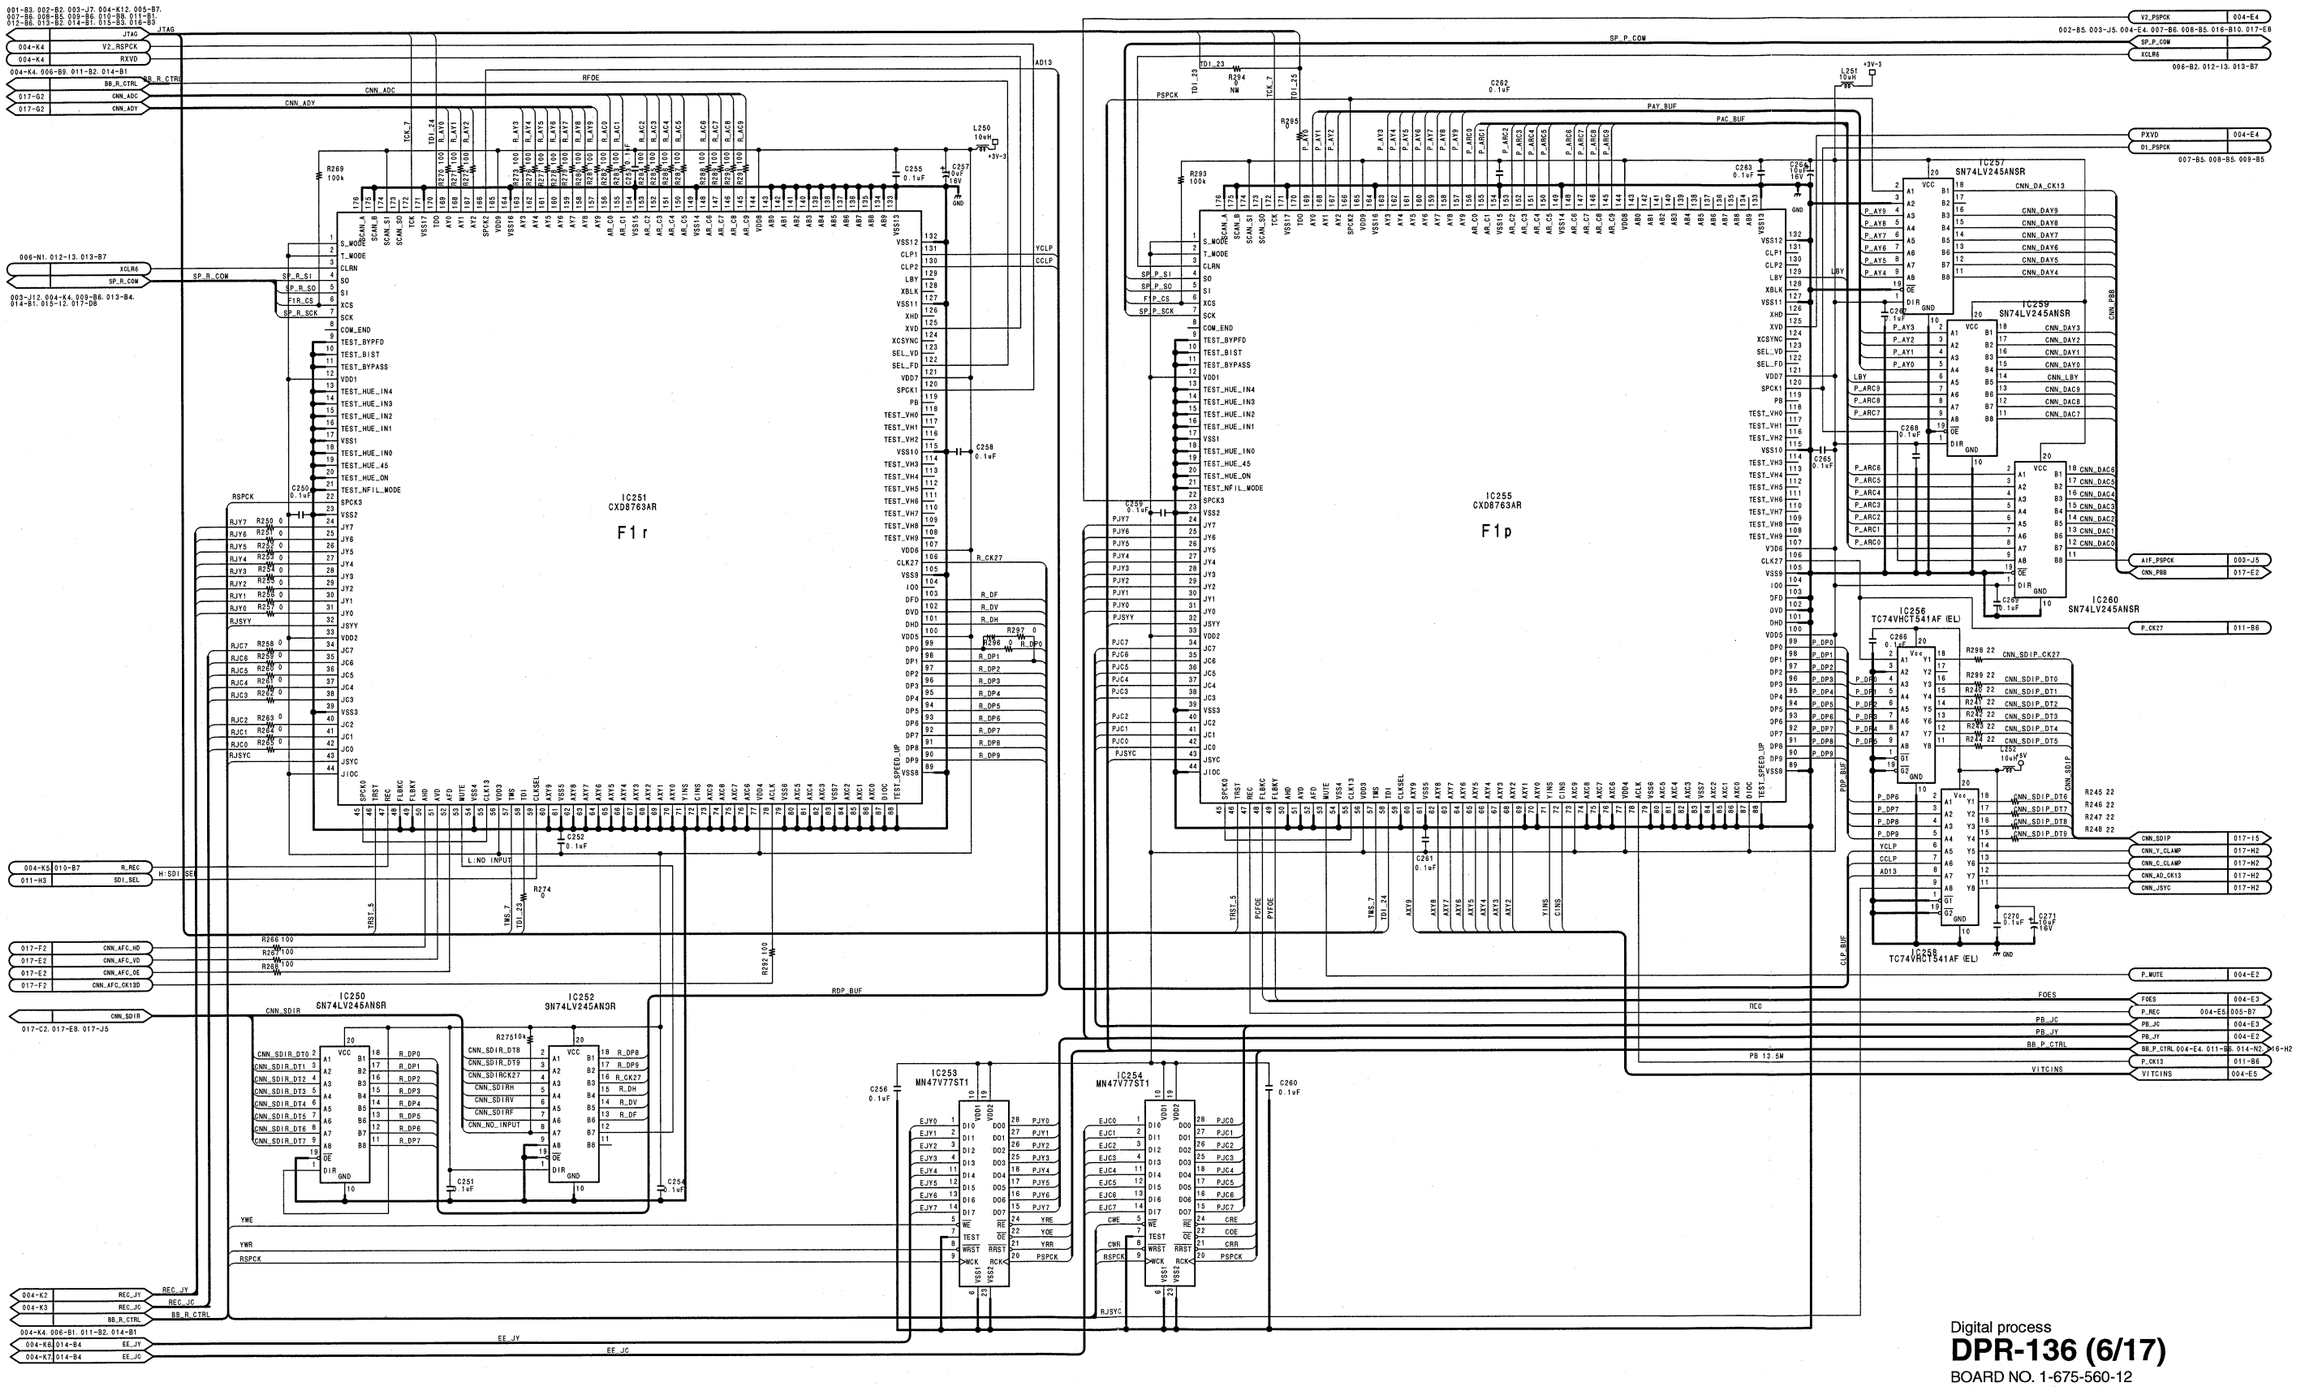

Digital process
DPR-136 (6/17)
BOARD NO. 1-675-560-12
LOT NO. 907-908
DSR-2000_DPR-136_C12_6

DPR-136 (7/17)

DSR-2000 (UC) : S/N 100001 through 100290
DSR-2000 (J) : S/N 300001 through 300240
DSR-2000P (CE) : S/N 400001 through 400300

1

2

3

4

5

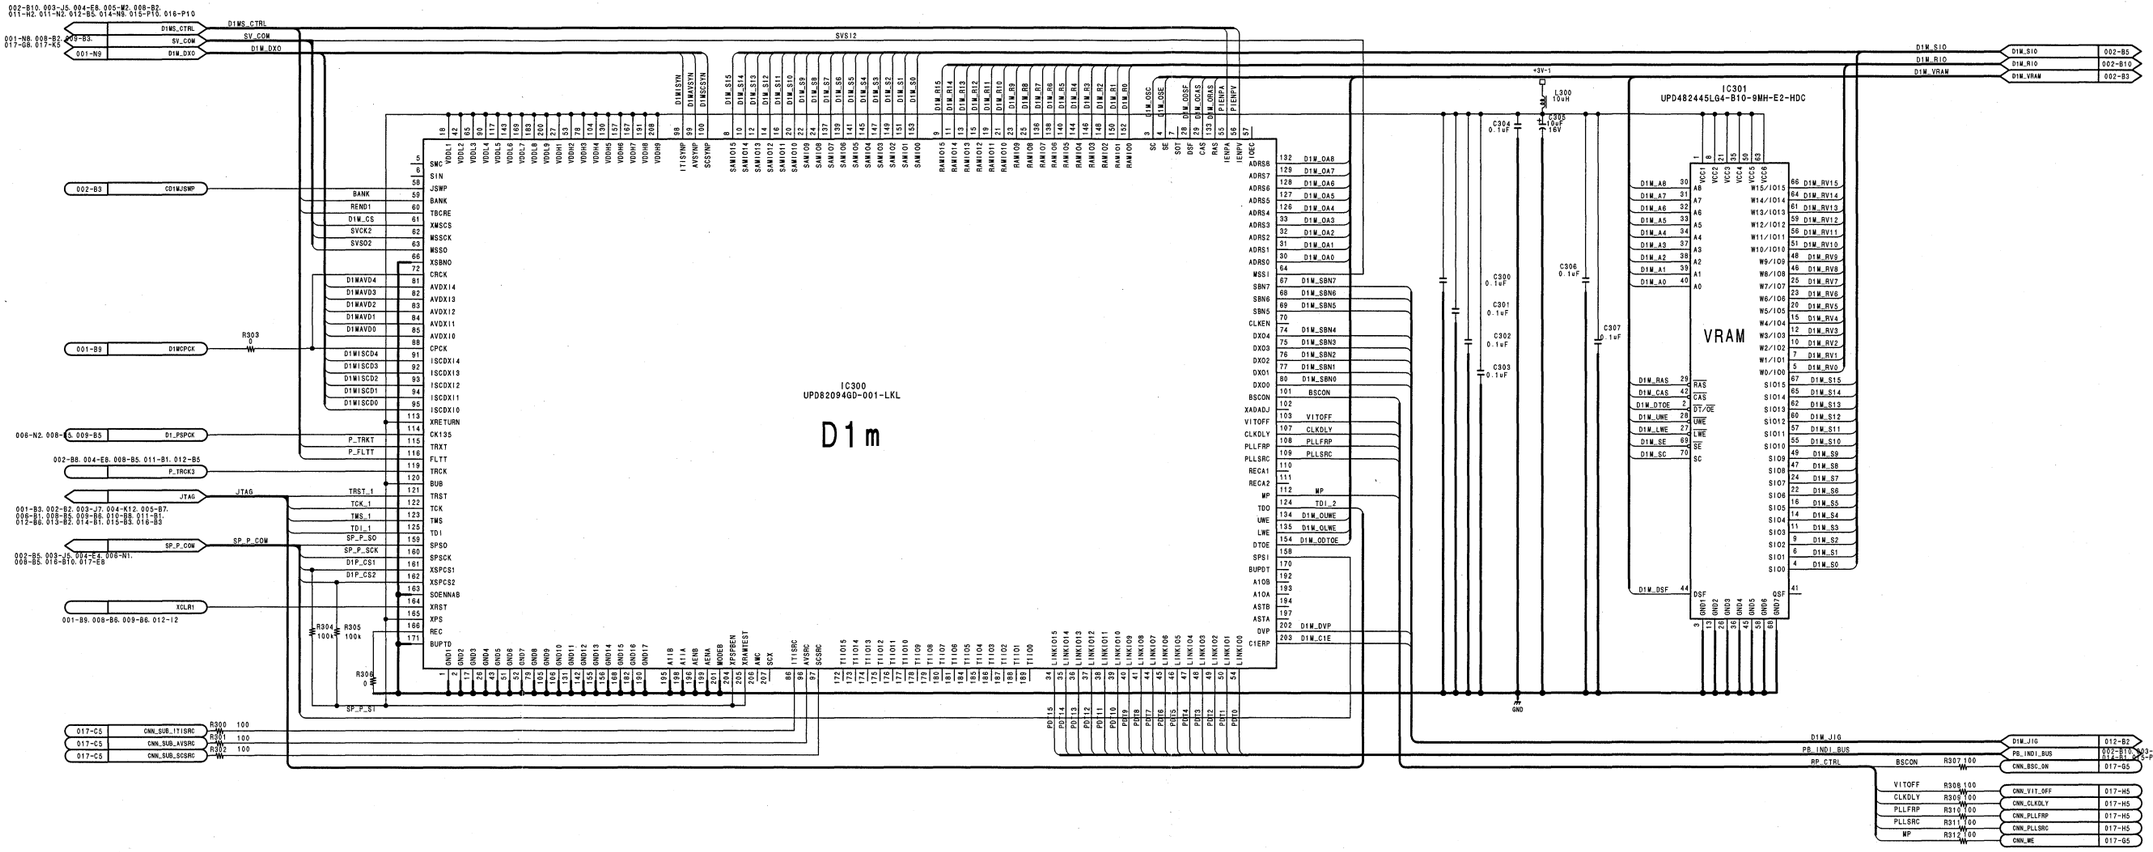

Digital process
DPR-136 (7/17)
BOARD NO. 1-675-560-12
LOT NO. 907-908
DSR-2000_DPR-136_C12_7

15-44 (a) 15-44 (a)

DSR-2000/2000P

A | B | C | D | E | F | G | H

DPR-136 (8/17)

DSR-2000 (UC) : S/N 100001 through 100290
DSR-2000 (J) : S/N 300001 through 300240
DSR-2000P (CE) : S/N 400001 through 400300

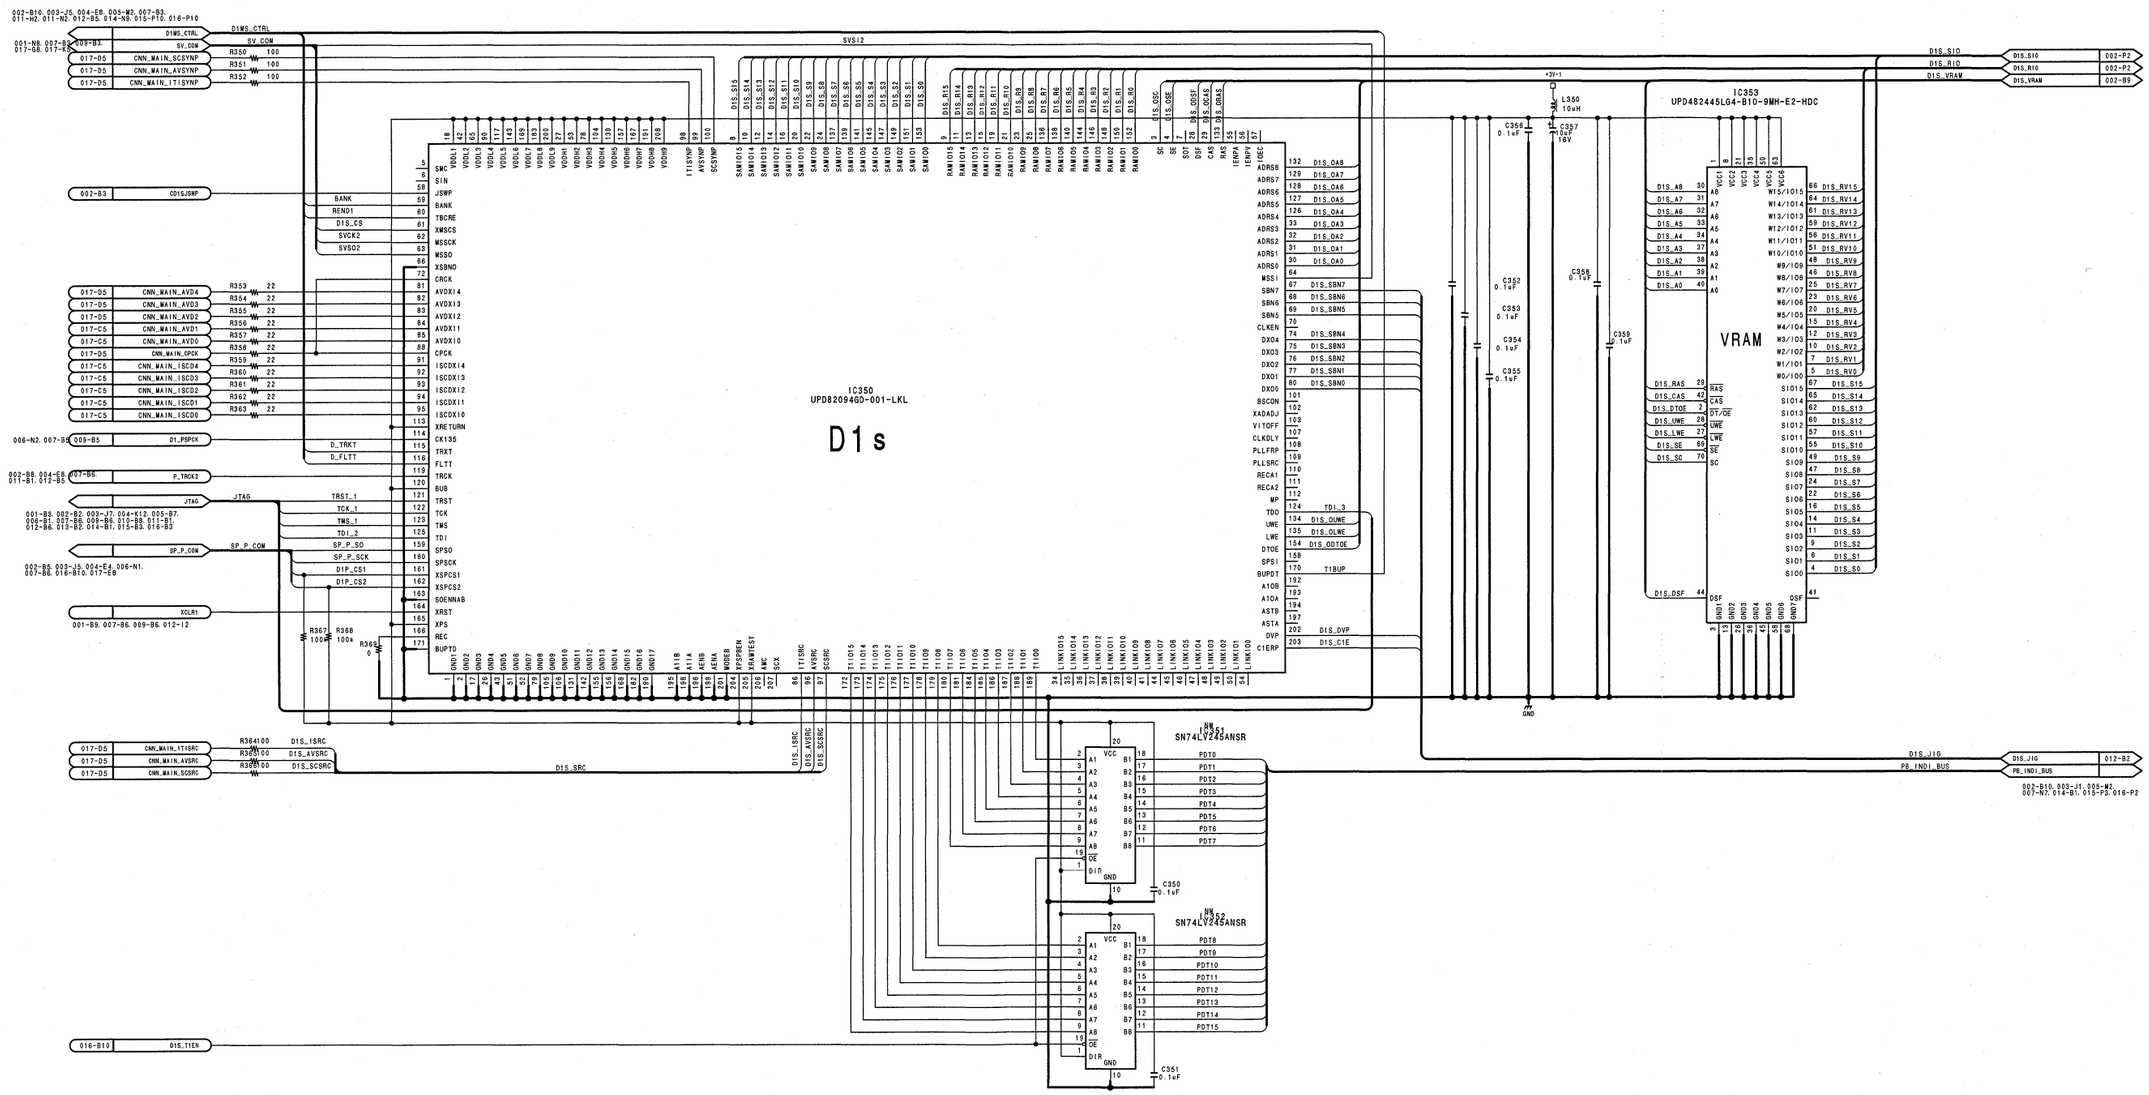

Digital process
DPR-136 (8/17)
BOARD NO. 1-675-560-12
LOT NO. 907-908
DSR-2000_DPR-136_C12_8

DPR-136 (9/17)

DSR-2000 (UC) : S/N 100001 through 100290
DSR-2000 (J) : S/N 300001 through 300240
DSR-2000P (CE) : S/N 400001 through 400300

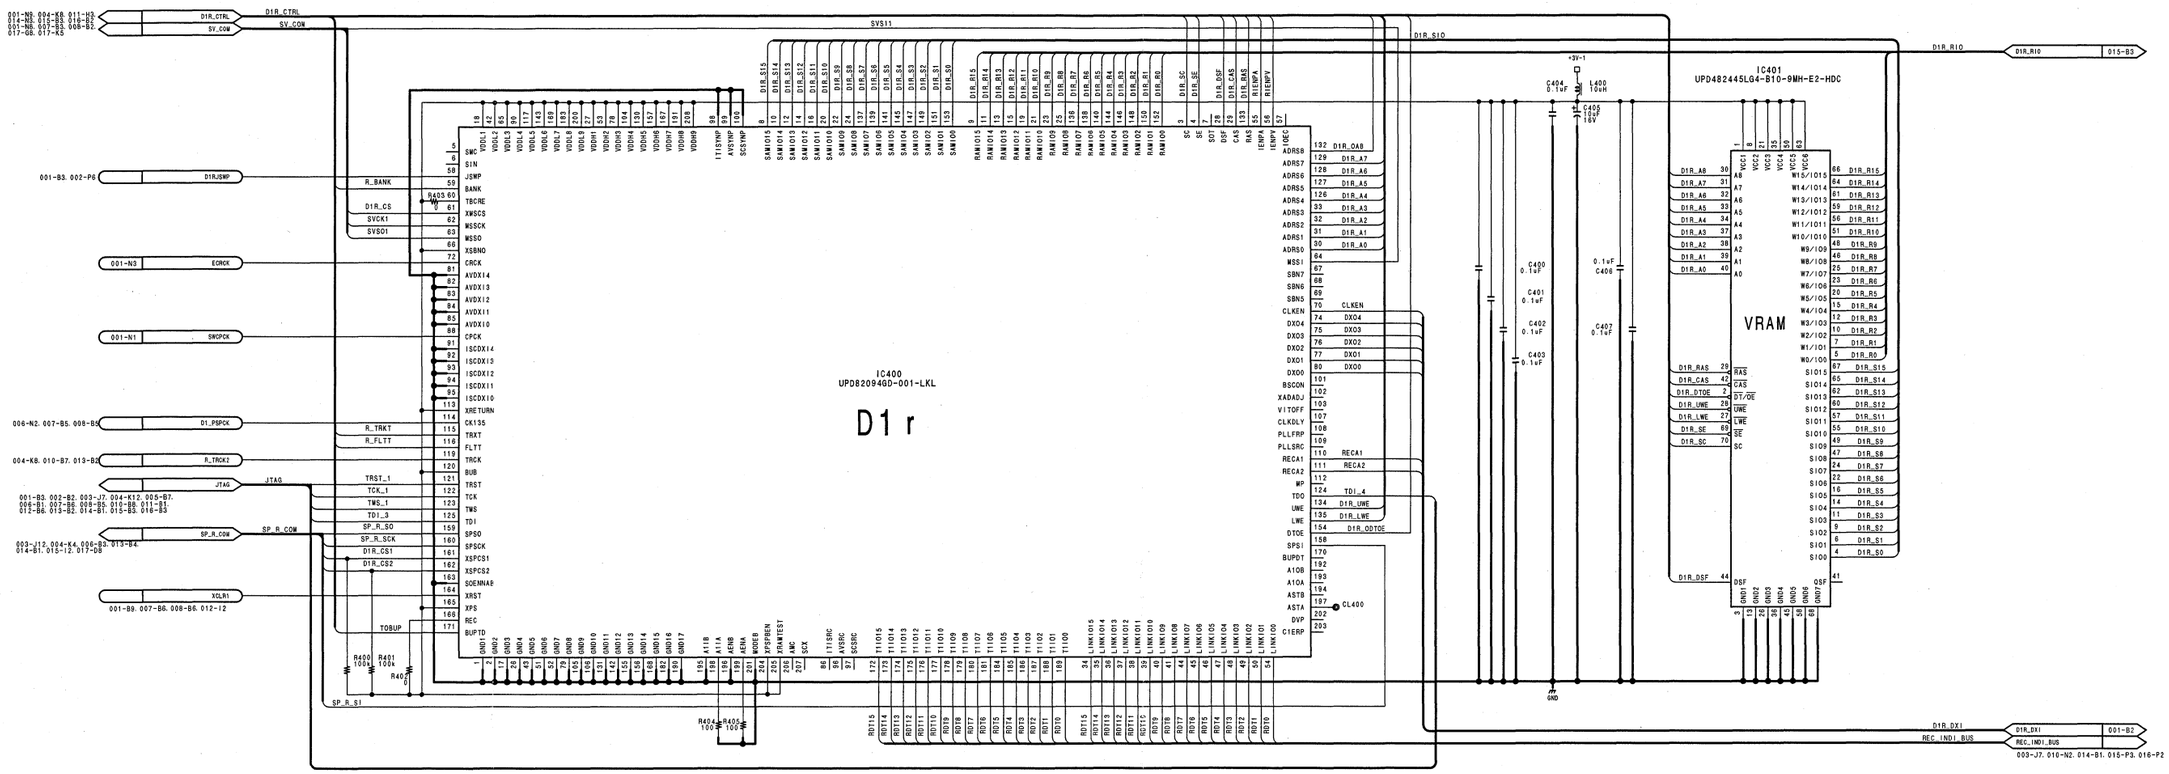

Digital process
DPR-136 (9/17)
BOARD NO. 1-675-560-12
LOT NO. 907-908
DSR-2000_DPR-136_C12_9

DPR-136 (10/17)

DSR-2000 (UC) : S/N 100001 through 100290
DSR-2000 (J) : S/N 300001 through 300240
DSR-2000P (CE) : S/N 400001 through 400300

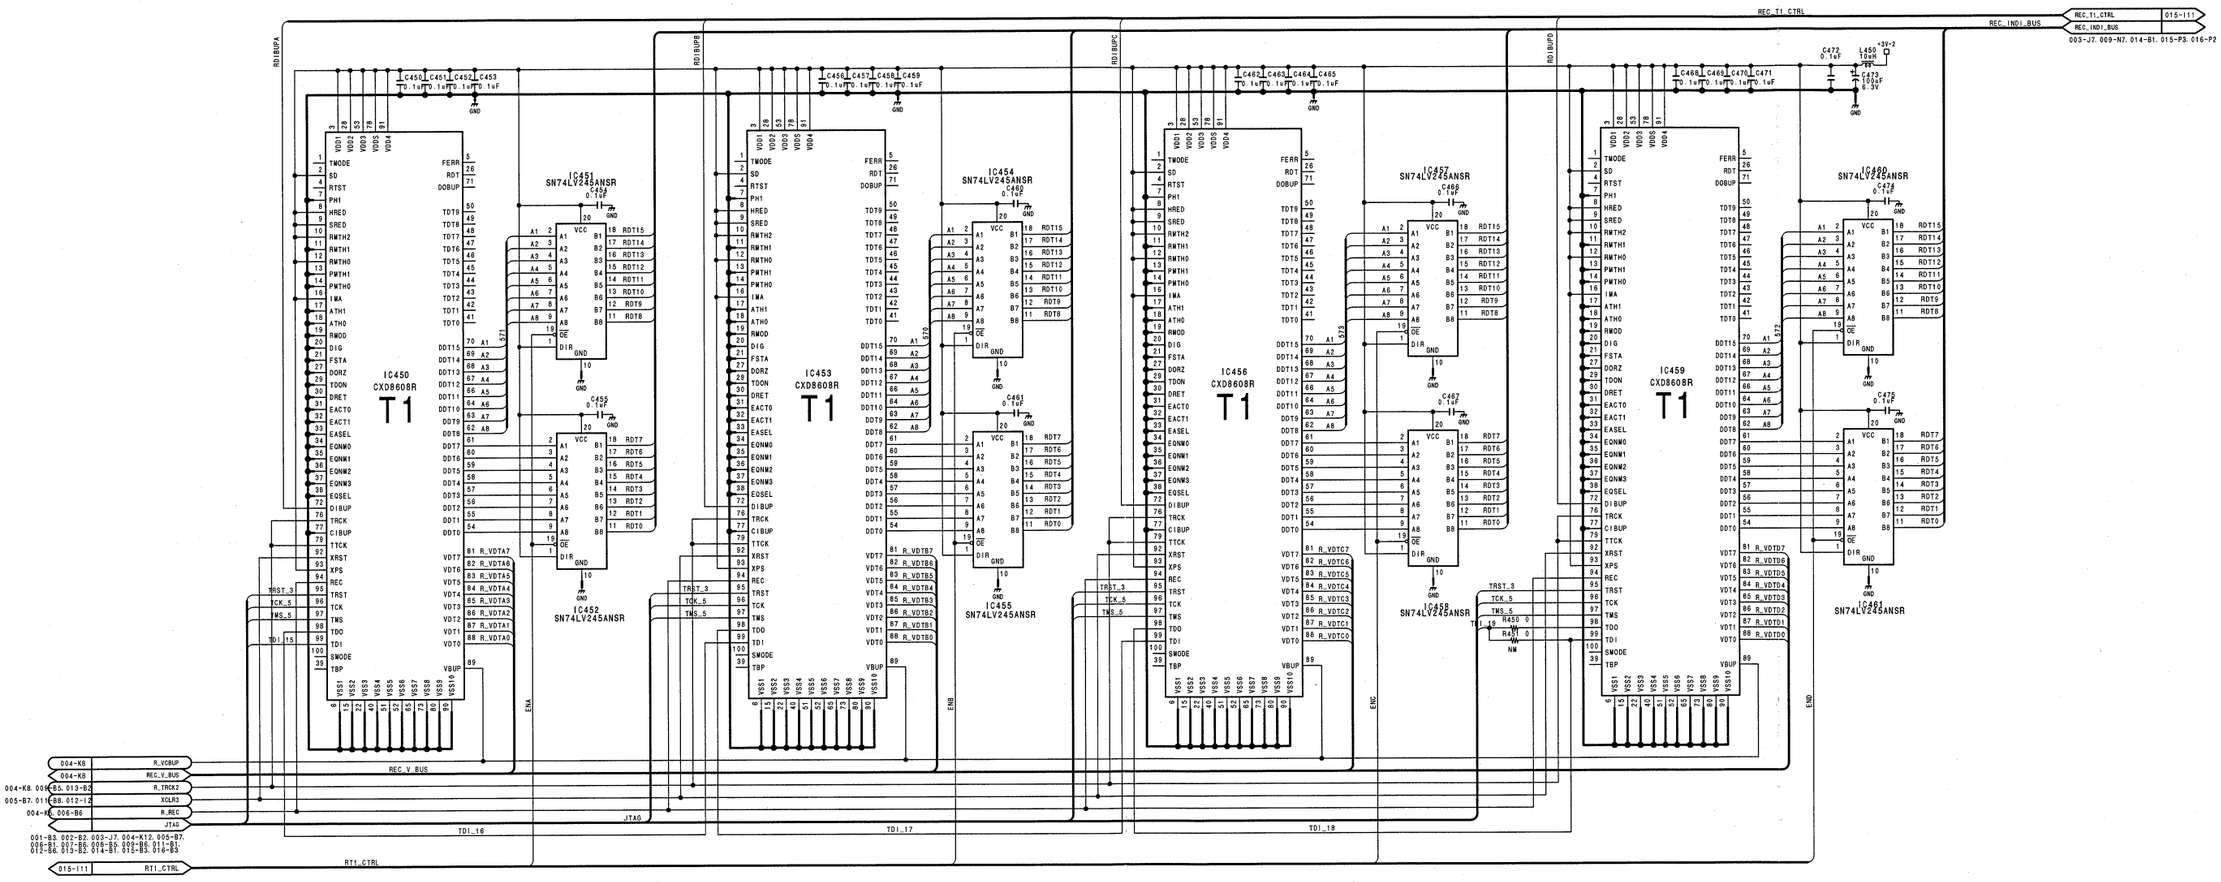

Digital process
DPR-136 (10/17)
BOARD NO. 1-675-560-12
LOT NO. 907-908
DSR-2000_DPR-136_C12_10

DPR-136 (11/17)

DSR-2000 (UC) : S/N 100001 through 100290
DSR-2000 (J) : S/N 300001 through 300240
DSR-2000P (CE) : S/N 400001 through 400300

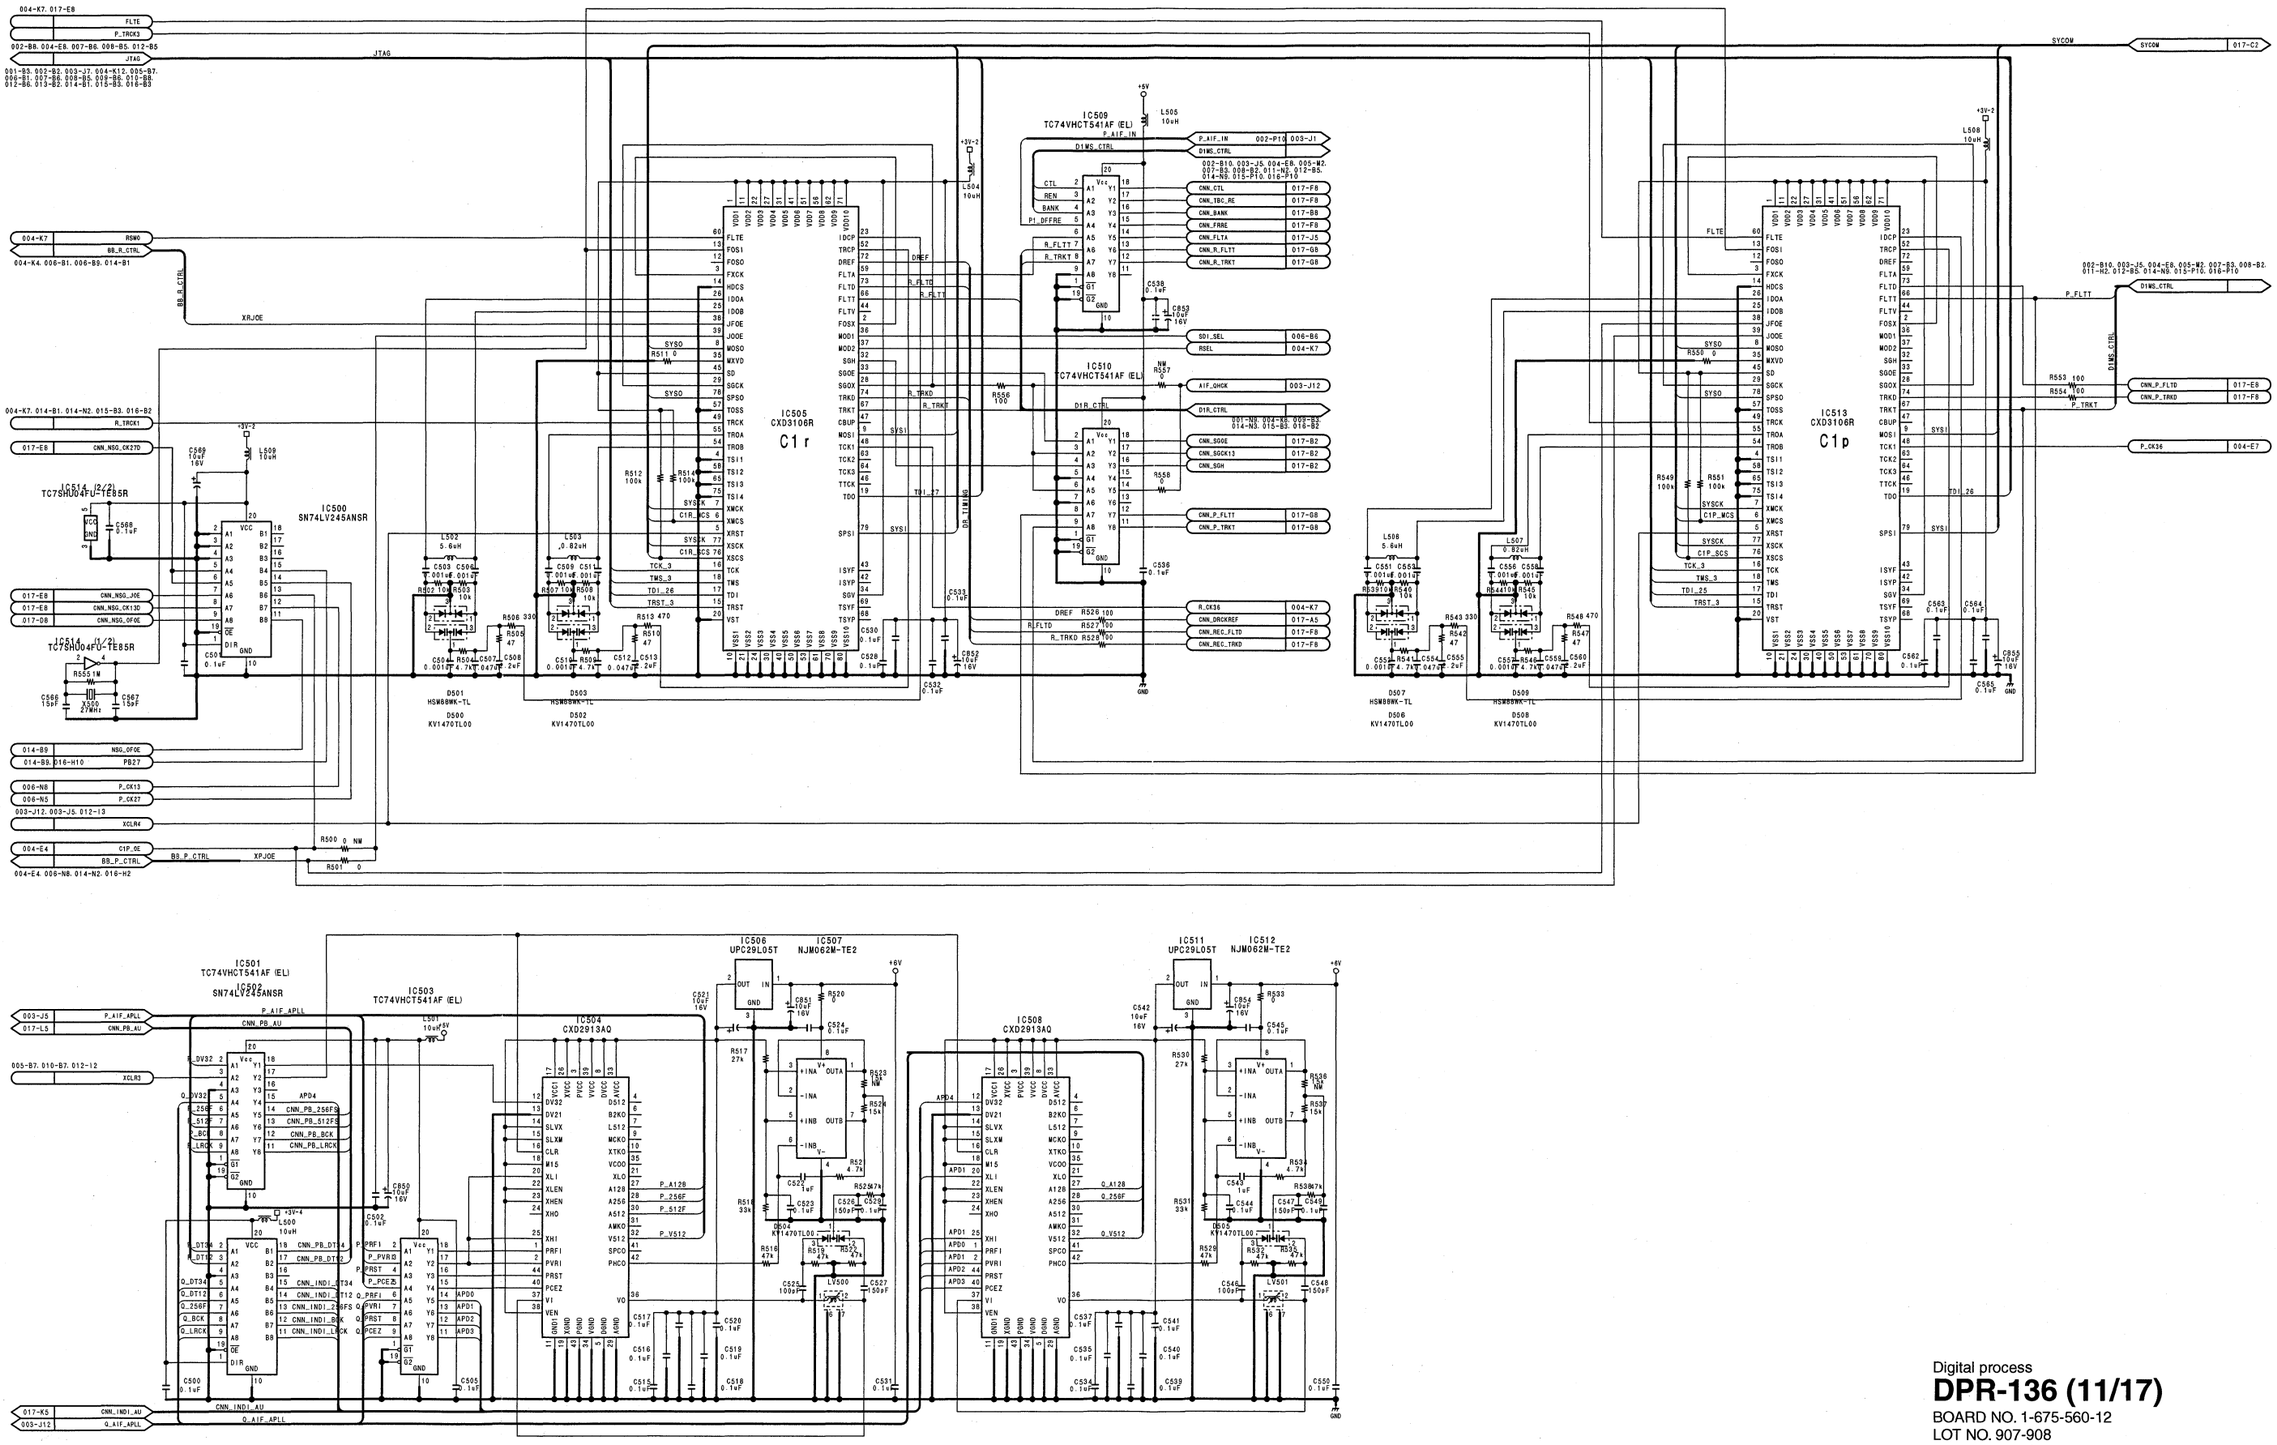

Digital process
DPR-136 (11/17)
BOARD NO. 1-675-560-12
LOT NO. 907-908
DSR-2000_DPR-136_C12_11

DPR-136 (12/17)

DSR-2000 (UC) : S/N 100001 through 100290
DSR-2000 (J) : S/N 300001 through 300240
DSR-2000P (CE) : S/N 400001 through 400300

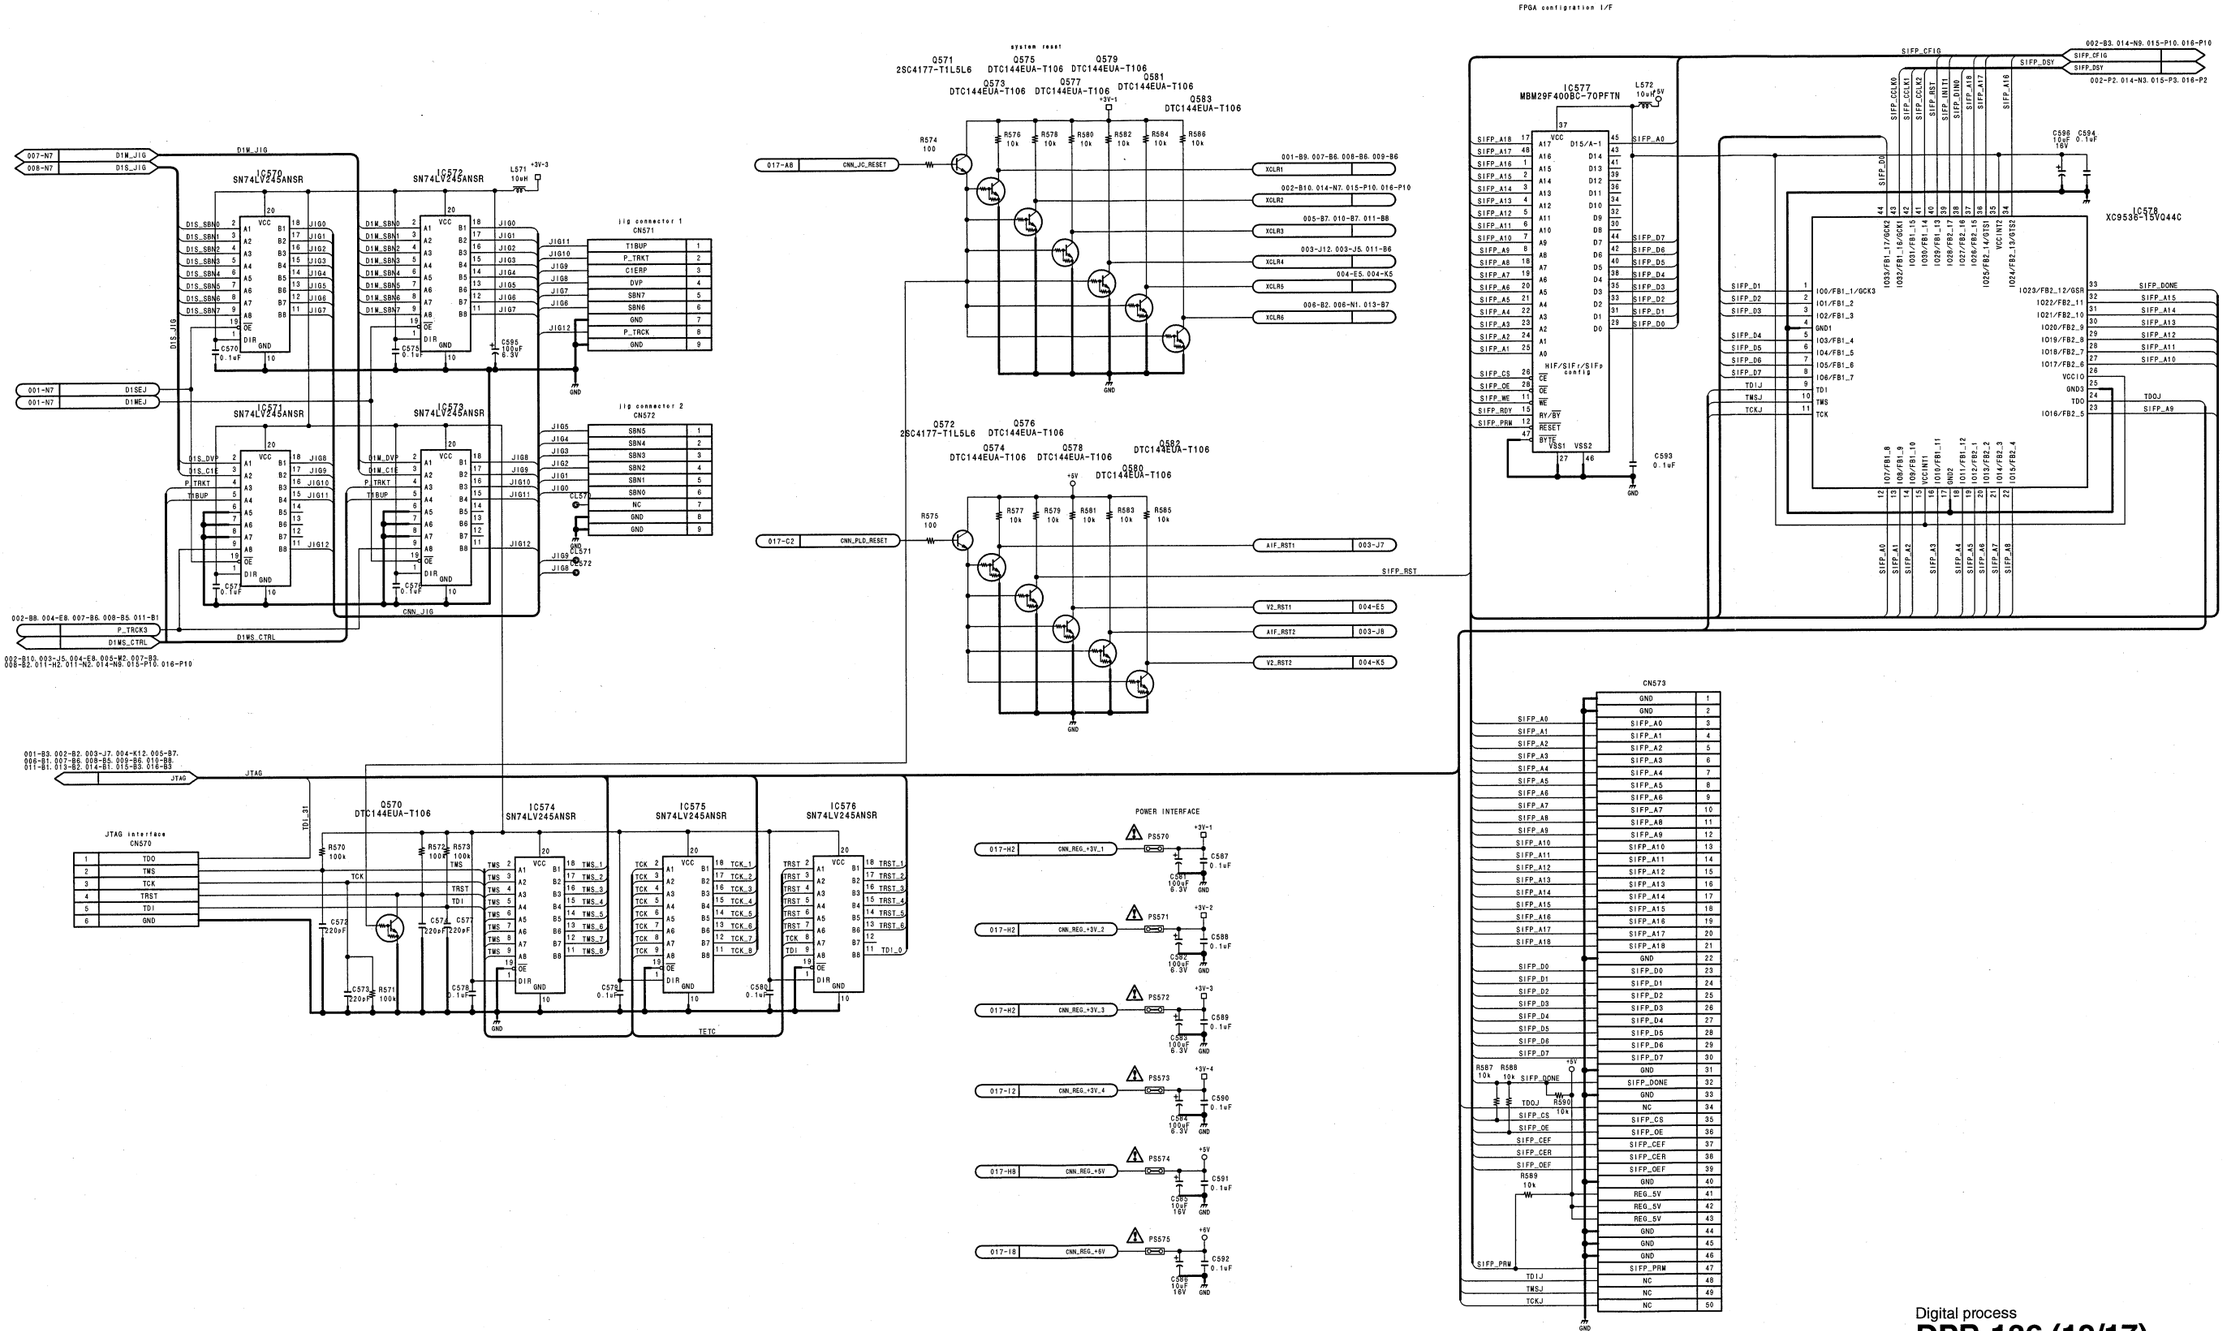

DSR-2000/2000P

15-49 (a)

15-49 (a)

Digital process
DPR-136 (12/17)
BOARD NO. 1-675-560-12
LOT NO. 907-908
DSR-2000_DPR-136_C12_12

DPR-136 (13/17)

DSR-2000 (UC) : S/N 100001 through 100290
DSR-2000 (J) : S/N 300001 through 300240
DSR-2000P (CE) : S/N 400001 through 400300

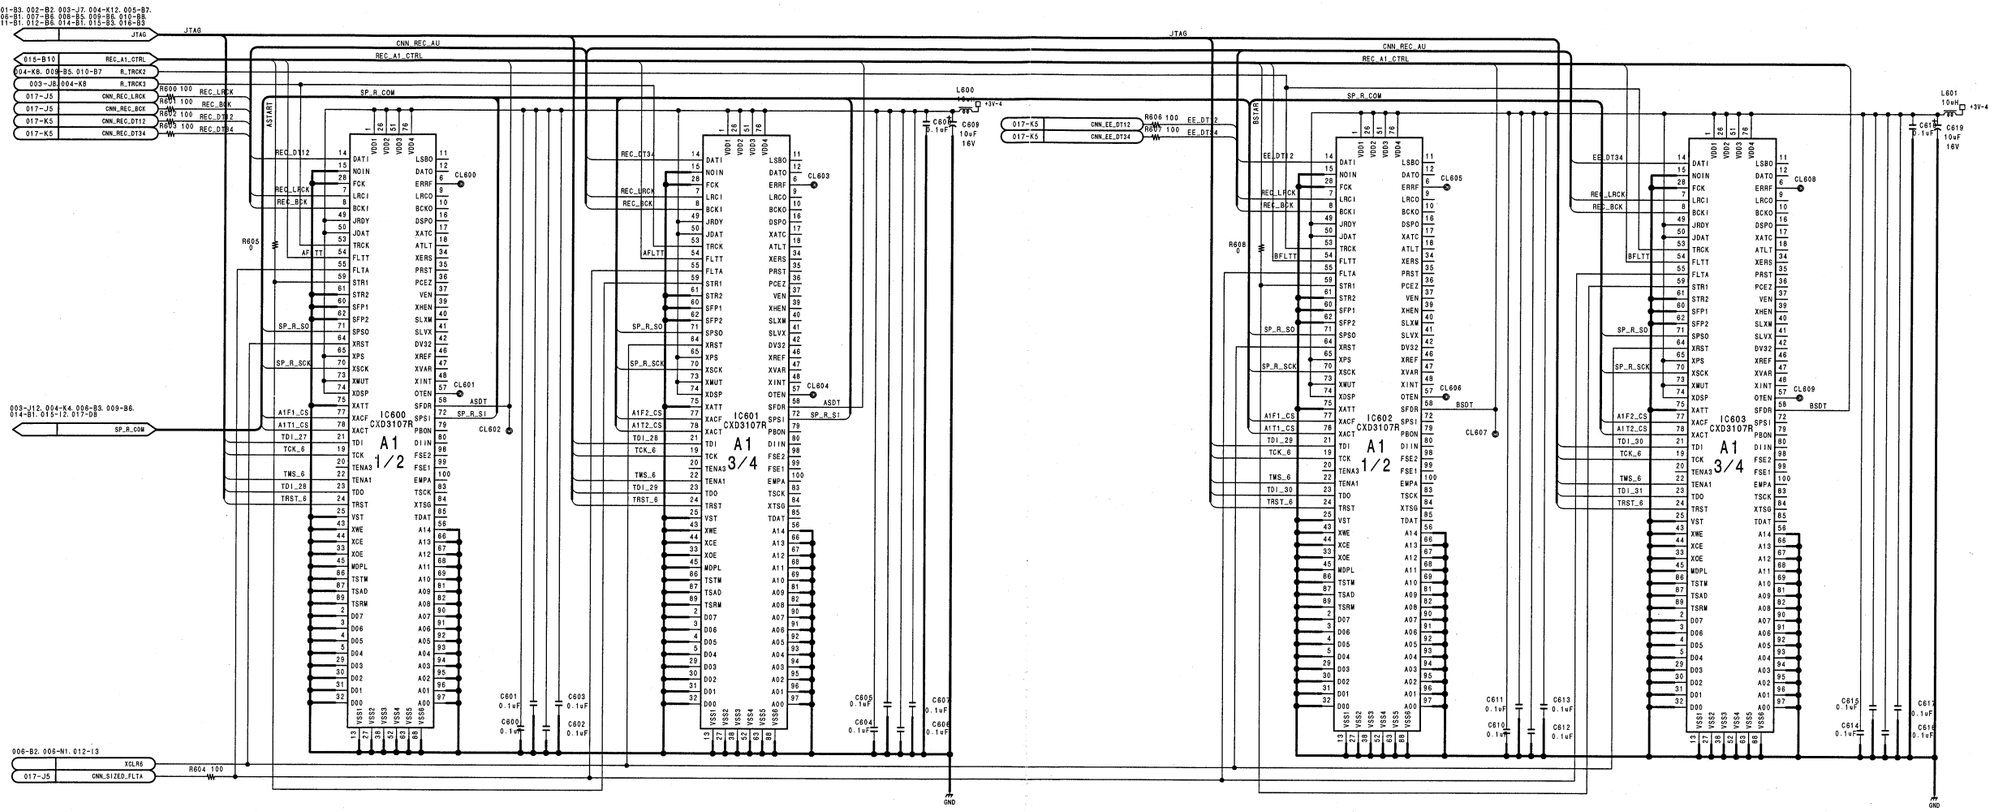

Digital process
DPR-136 (13/17)
BOARD NO. 1-675-560-12
LOT NO. 907-908
DSR-2000_DPR-136_C12_13

15-50 (a) 15-50 (a)

DSR-2000/2000P

DSR-2000 (UC) : S/N 100001 through 100290
DSR-2000 (J) : S/N 300001 through 300240
DSR-2000P (CE) : S/N 400001 through 400300

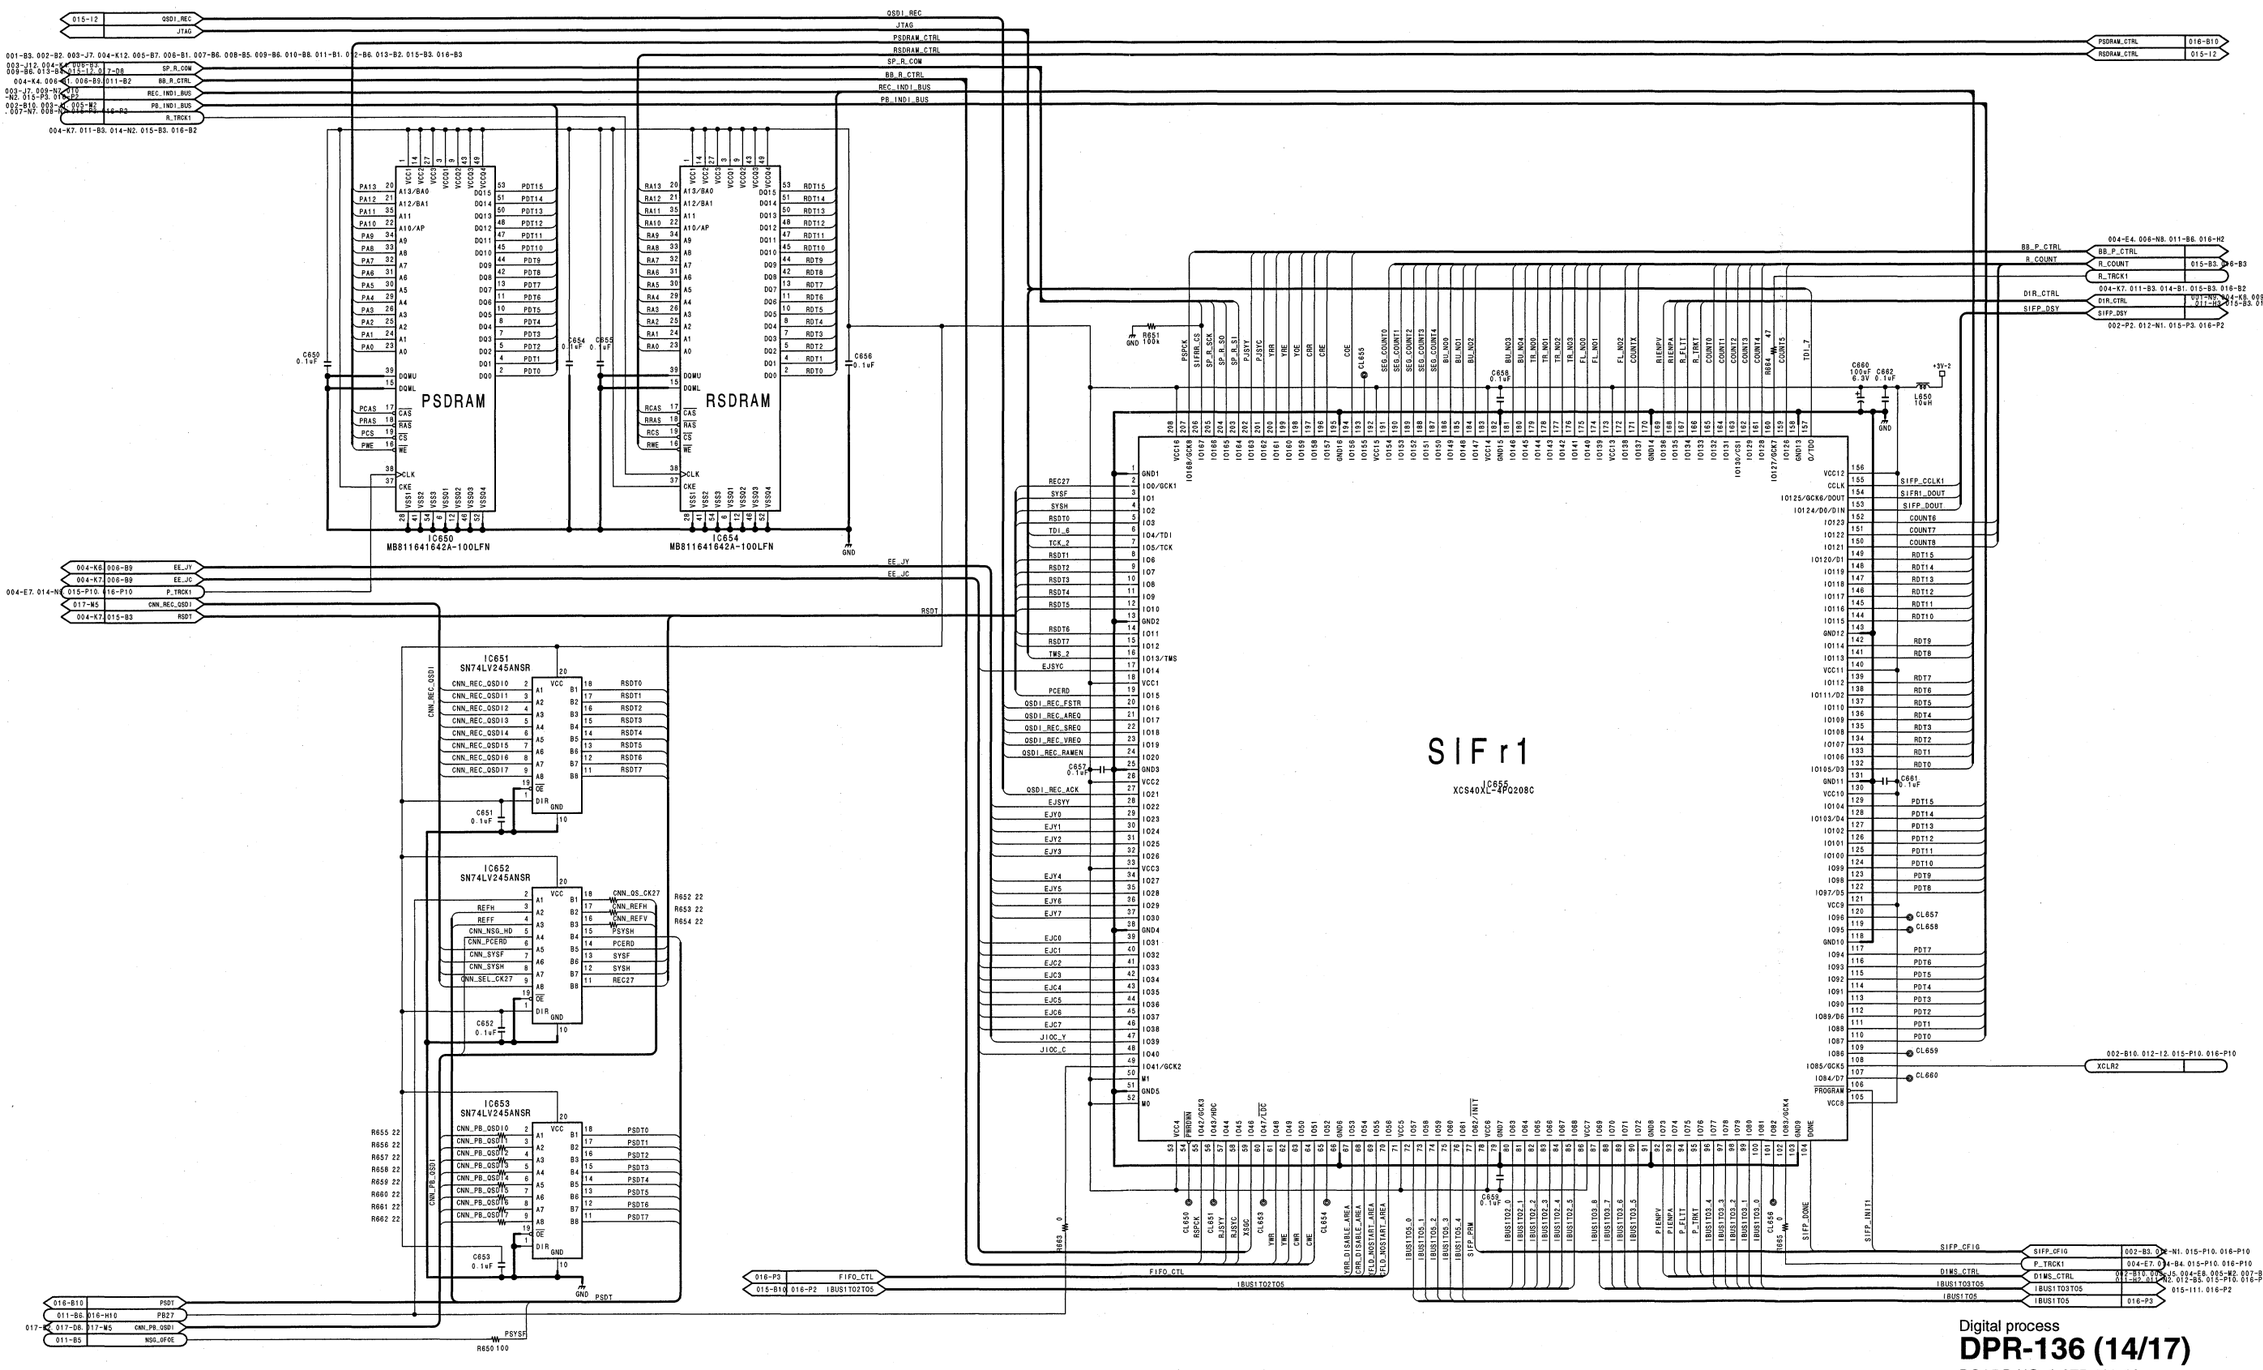

DPR-136 (15/17)

DSR-2000 (UC) : S/N 100001 through 100290
DSR-2000 (J) : S/N 300001 through 300240
DSR-2000P (CE) : S/N 400001 through 400300

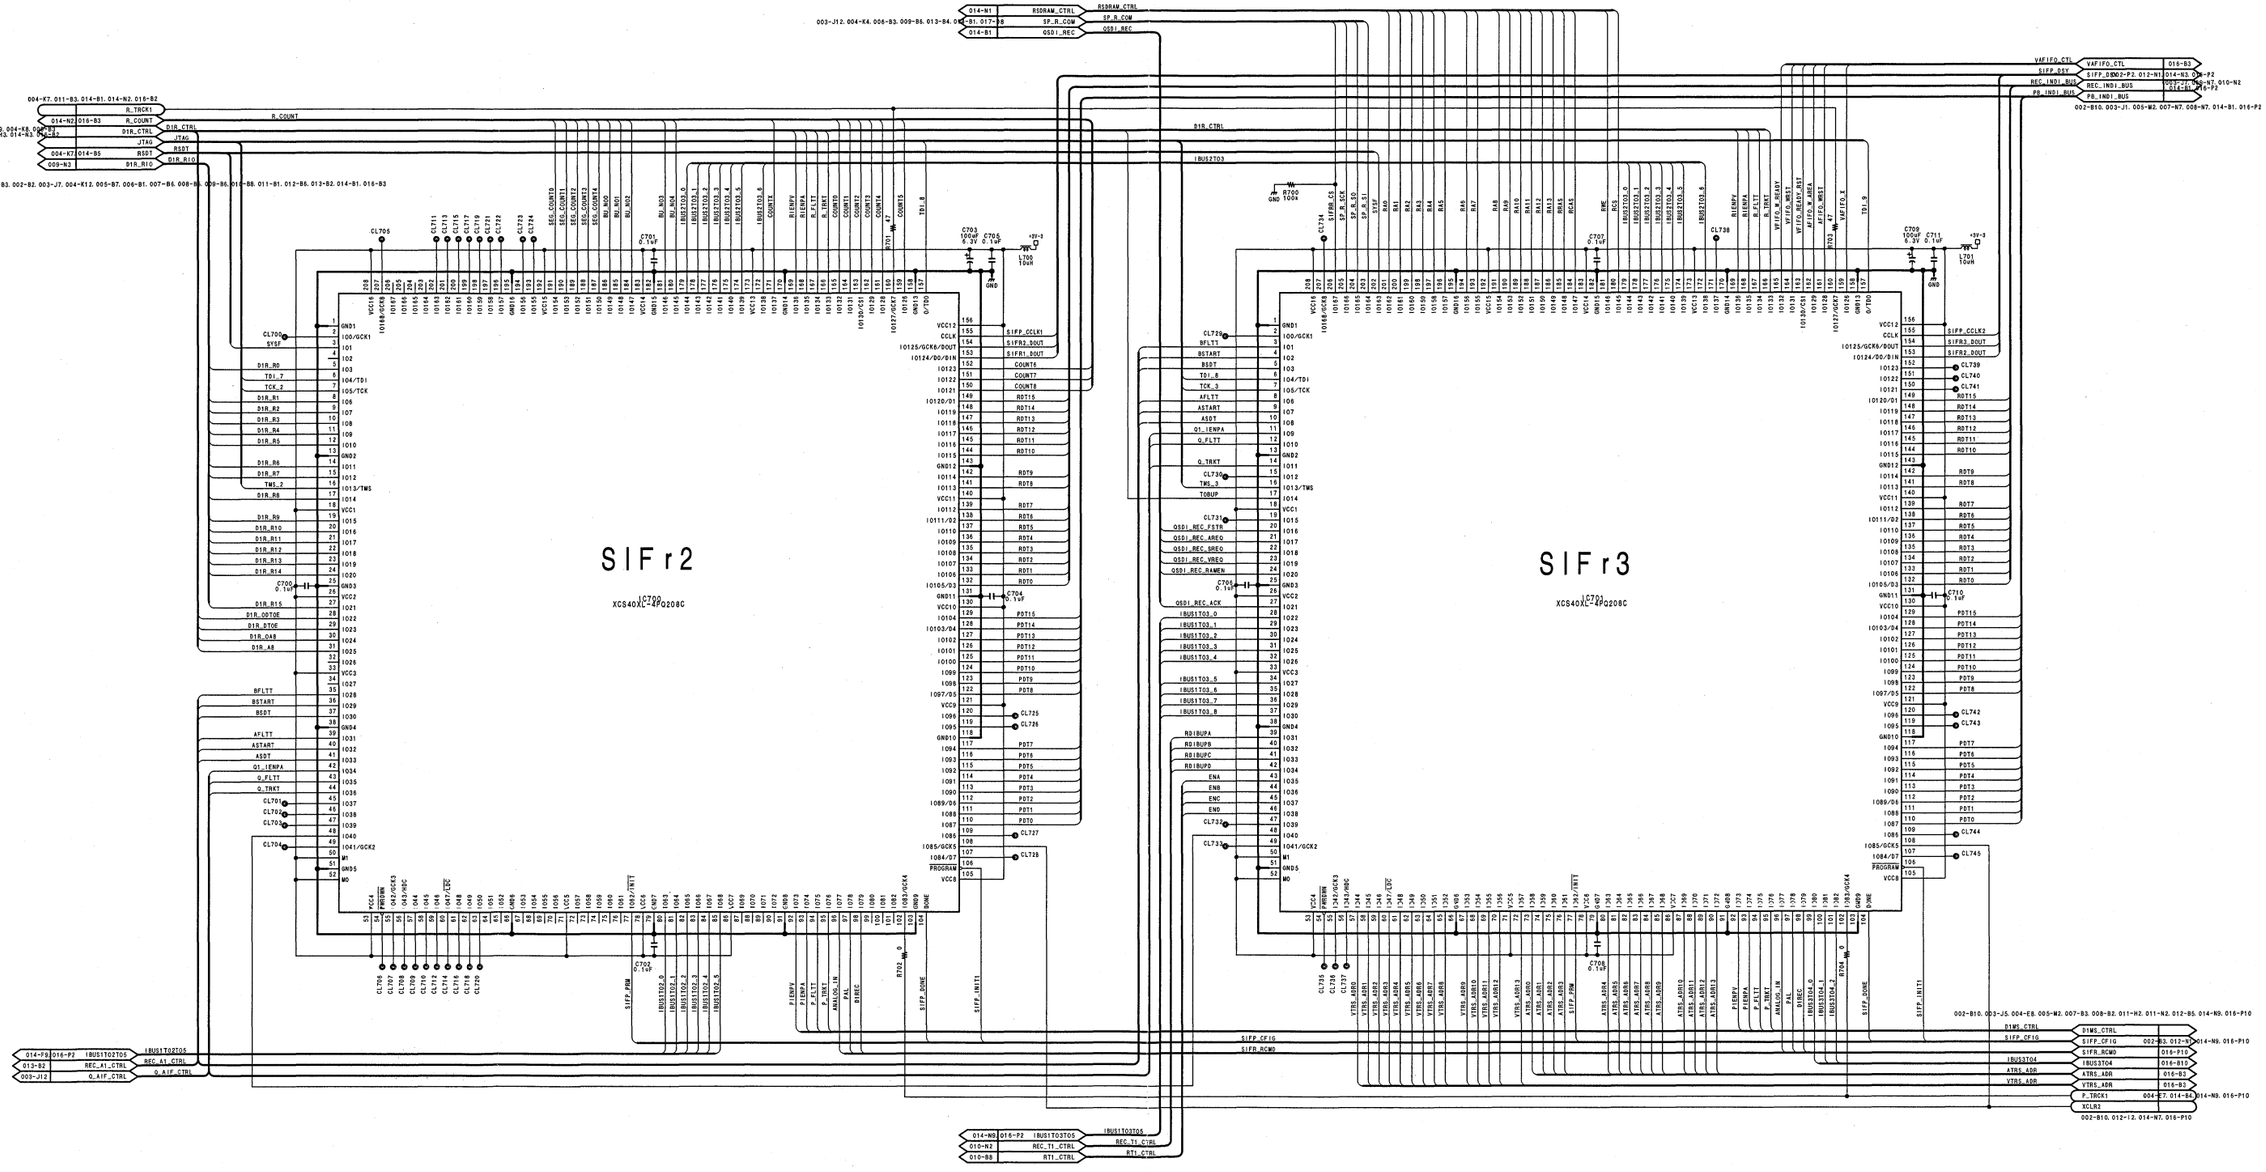

Digital process
DPR-136 (15/17)
BOARD NO. 1-675-560-12
LOT NO. 907-908
DSR-2000_DPR-136_C12_15

DPR-136 (16/17)

DSR-2000 (UC) : S/N 100001 through 100290
DSR-2000 (J) : S/N 300001 through 300240
DSR-2000P (CE) : S/N 400001 through 400300

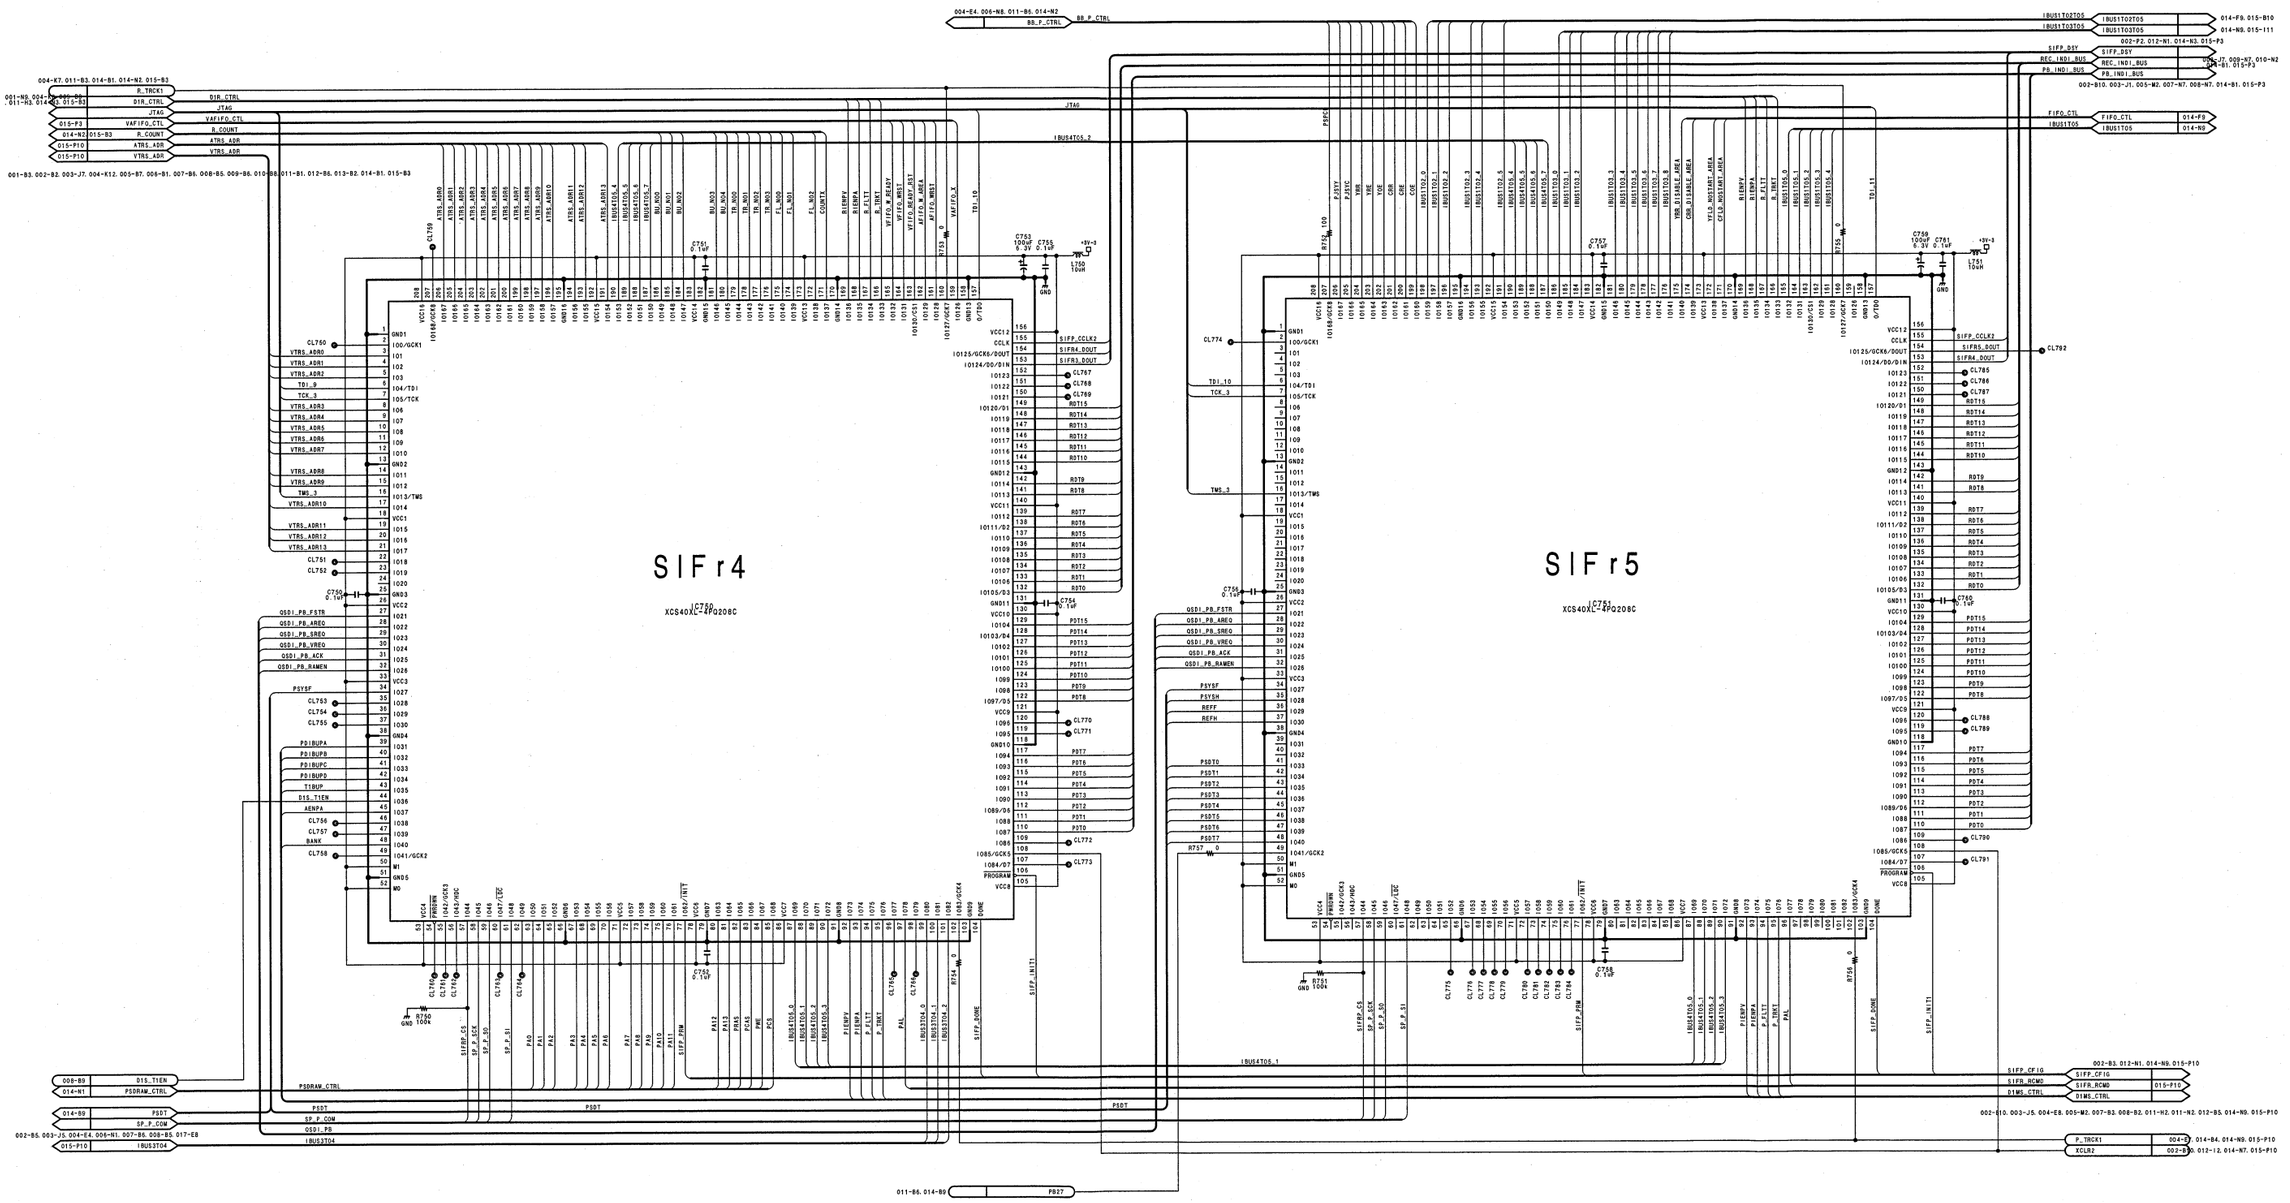

Digital process
DPR-136 (16/17)
BOARD NO. 1-675-560-12
LOT NO. 907-908
DSR-2000_DPR-136_C12_16

DPR-136 (17/17)

DSR-2000 (UC) : S/N 100001 through 100290
DSR-2000 (J) : S/N 300001 through 300240
DSR-2000P (CE) : S/N 400001 through 400300

15-54 (a) 15-54 (a)

Digital process

DPR-136 (17/17)

BOARD NO. 1-675-560-12
LOT NO. 907-908

DSR-2000_DPR-136_C12_17

DU-83 (1/7)

DSR-2000 (UC) : S/N 100001 through 100910
DSR-2000 (J) : S/N 300000 through 301040
DSR-2000P (CE) : S/N 400001 through 401550

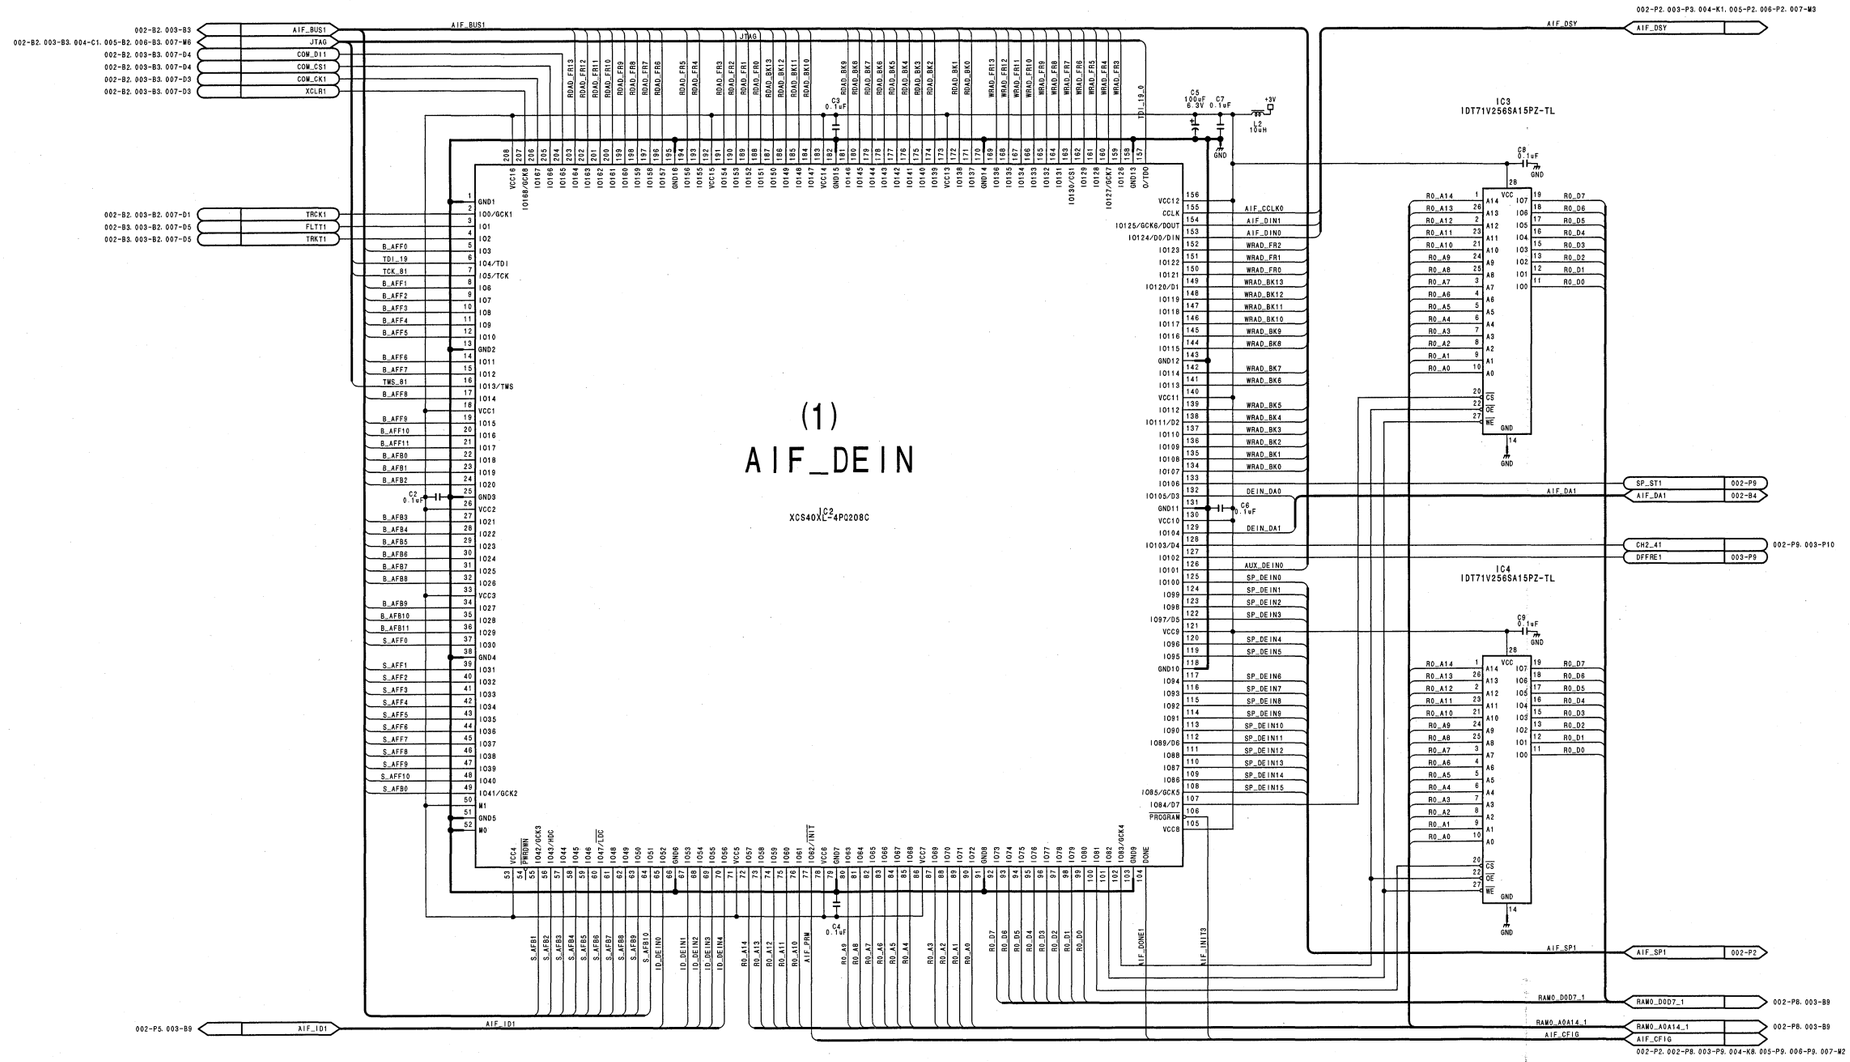

Digital process
DU-83 (1/7)
BOARD NO. 1-675-787-11, 12
LOT NO. 907-002
DSR-2000_DU-83_C12_1

DSR-2000 (UC) : S/N 100001 through 100910
DSR-2000 (J) : S/N 300001 through 301040
DSR-2000P (CE) : S/N 400001 through 401550

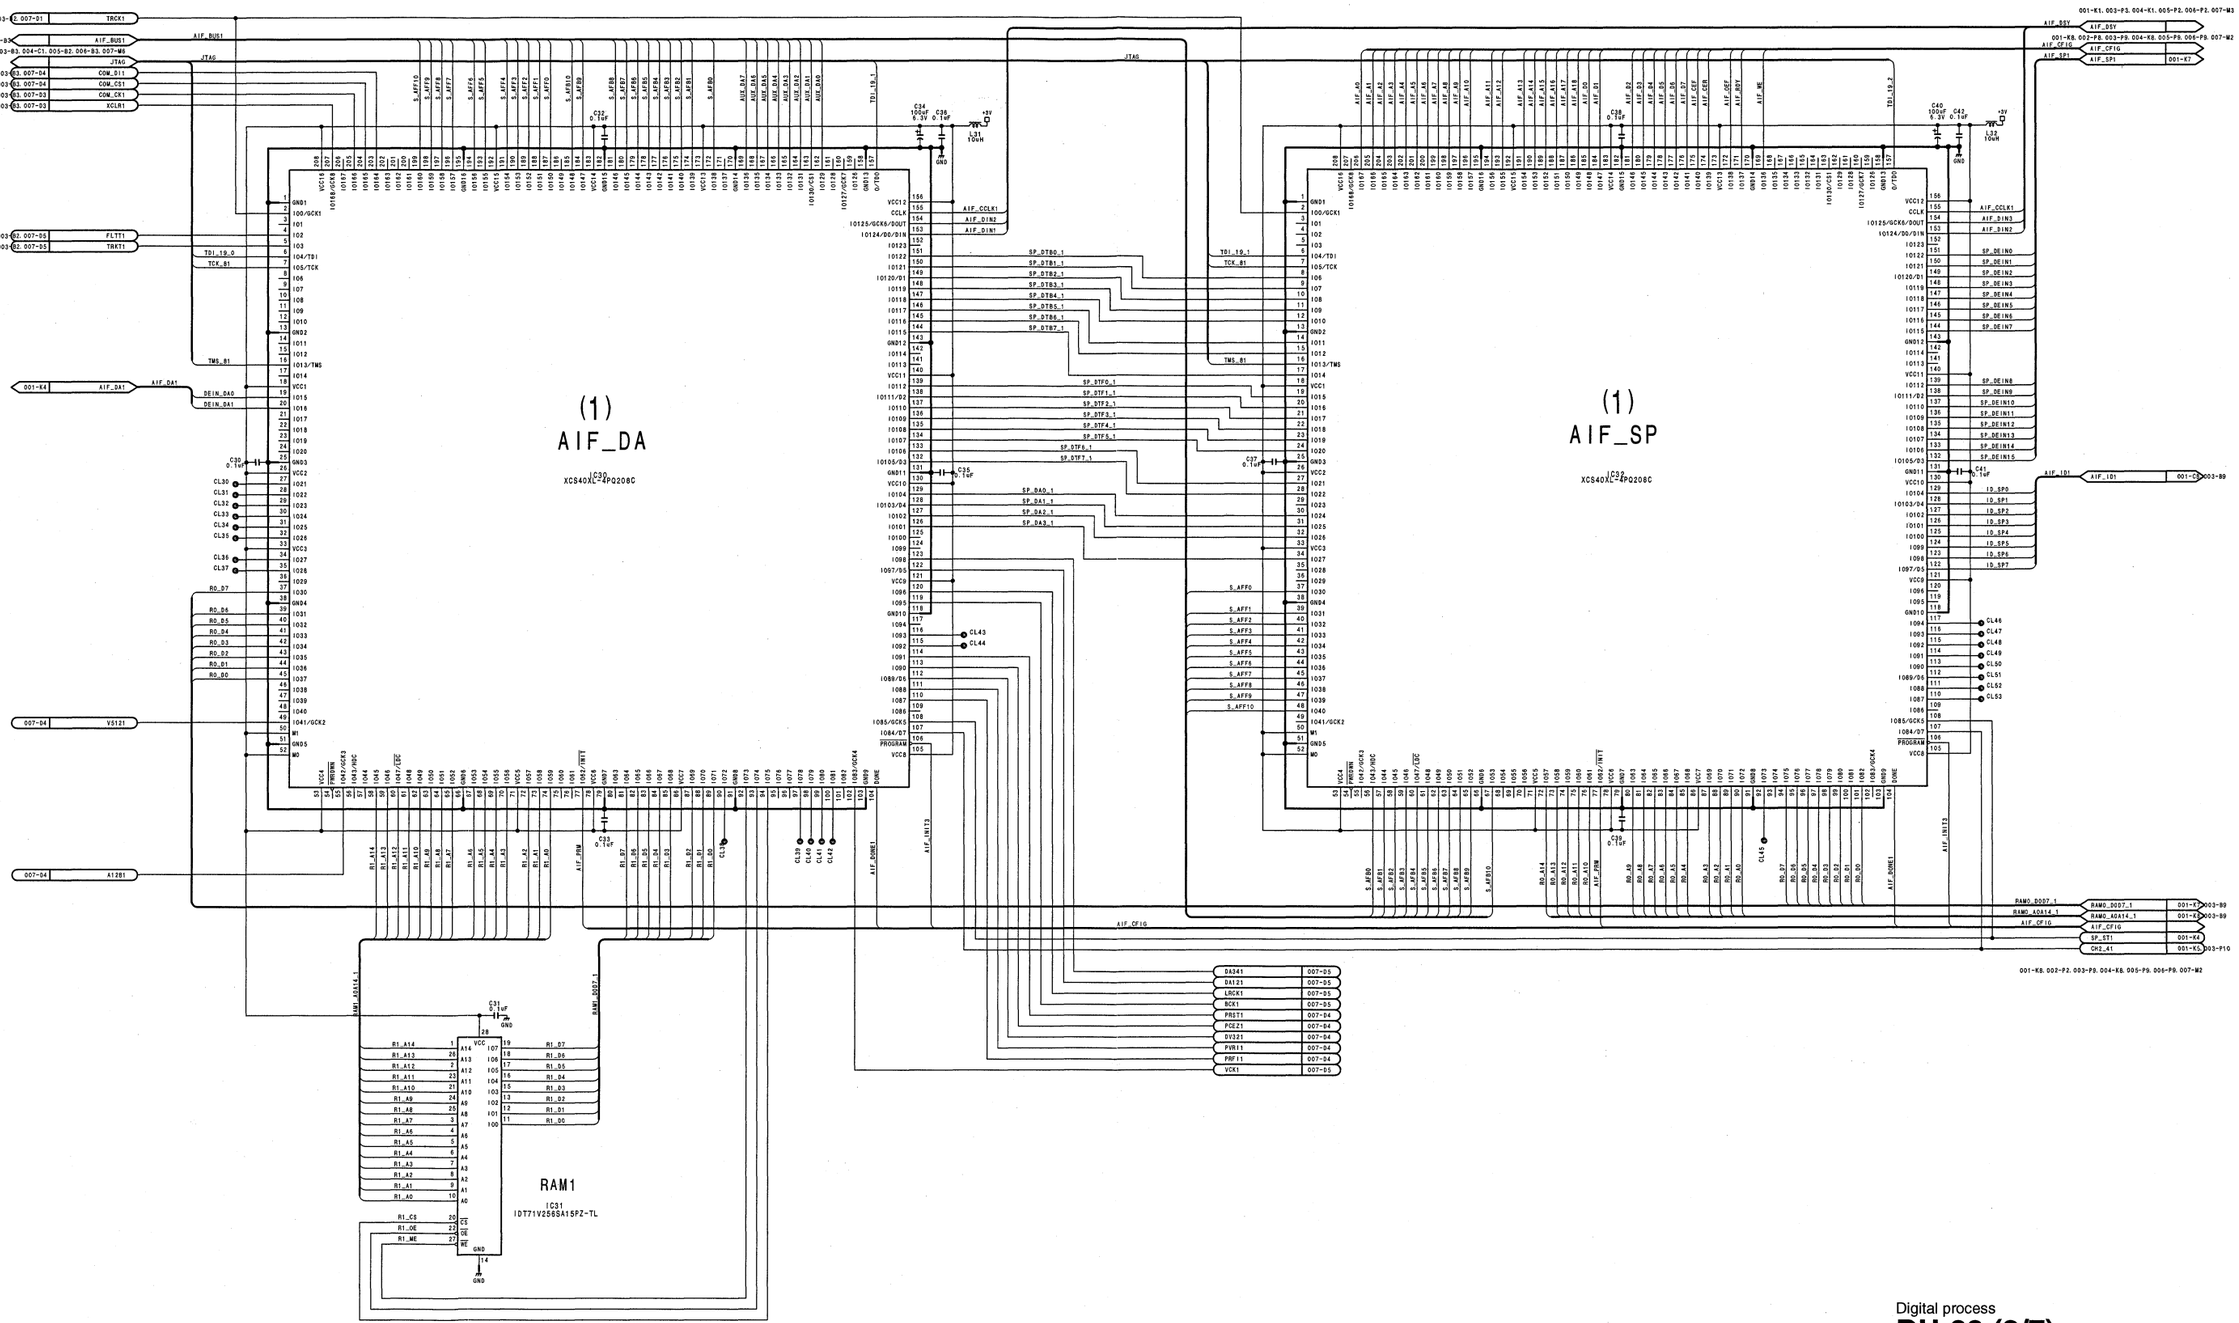

Digital process
DU-83 (2/7)
BOARD NO. 1-675-787-11, 12
LOT NO. 907-002
DSR-2000_DU-83_C12_2

DSR-2000 (UC) : S/N 100001 through 100910
DSR-2000 (J) : S/N 300001 through 301040
DSR-2000P (CE) : S/N 400001 through 401550

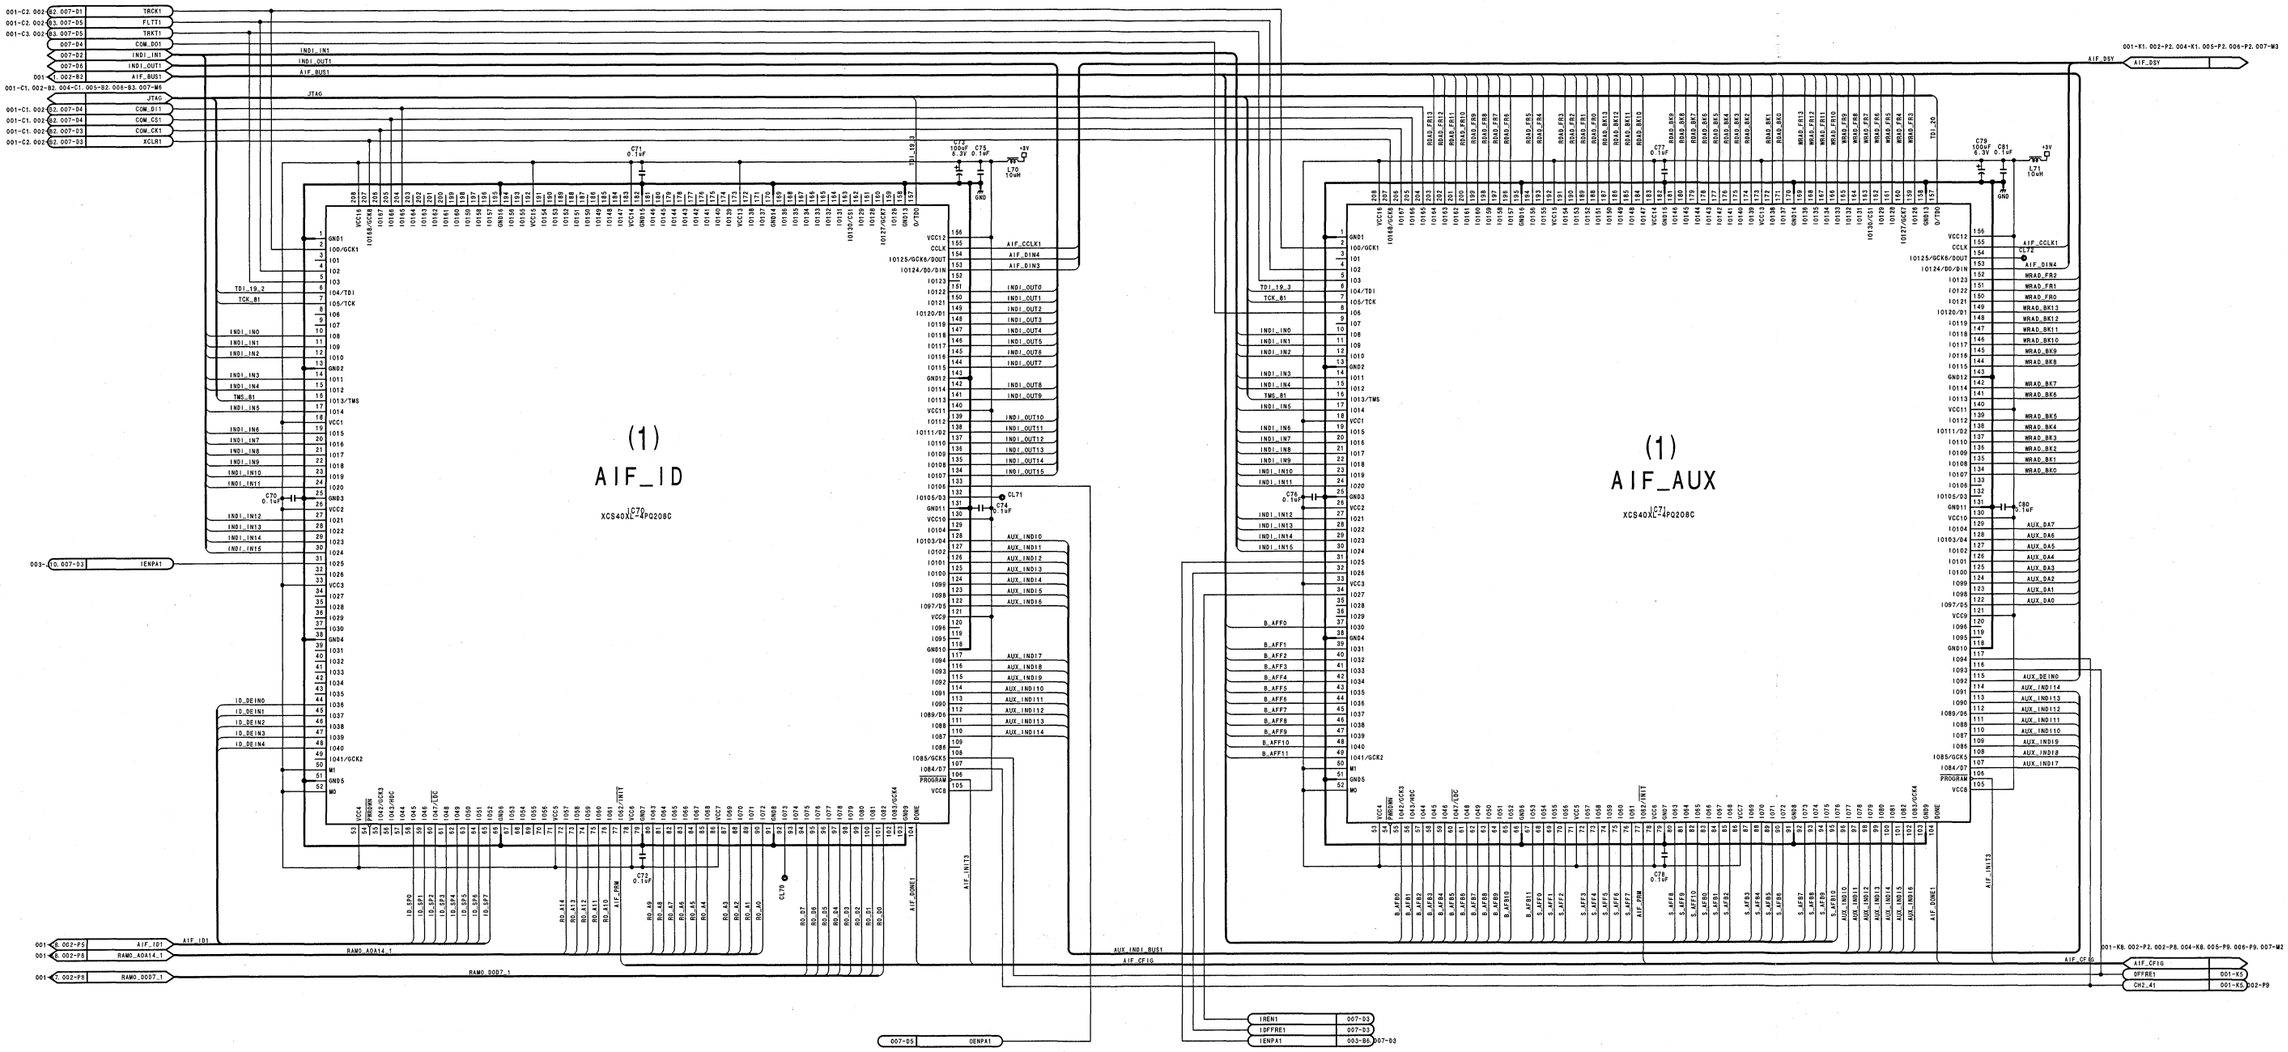

Digital process
DU-83 (3/7)
BOARD NO. 1-675-787-11, 12
LOT NO. 907-002
DSR-2000_DU-83_C12_3

DSR-2000 (UC) : S/N 100001 through 100910
DSR-2000 (J) : S/N 300001 through 301040
DSR-2000P (CE) : S/N 400001 through 401550

(2)
AIF_DEIN

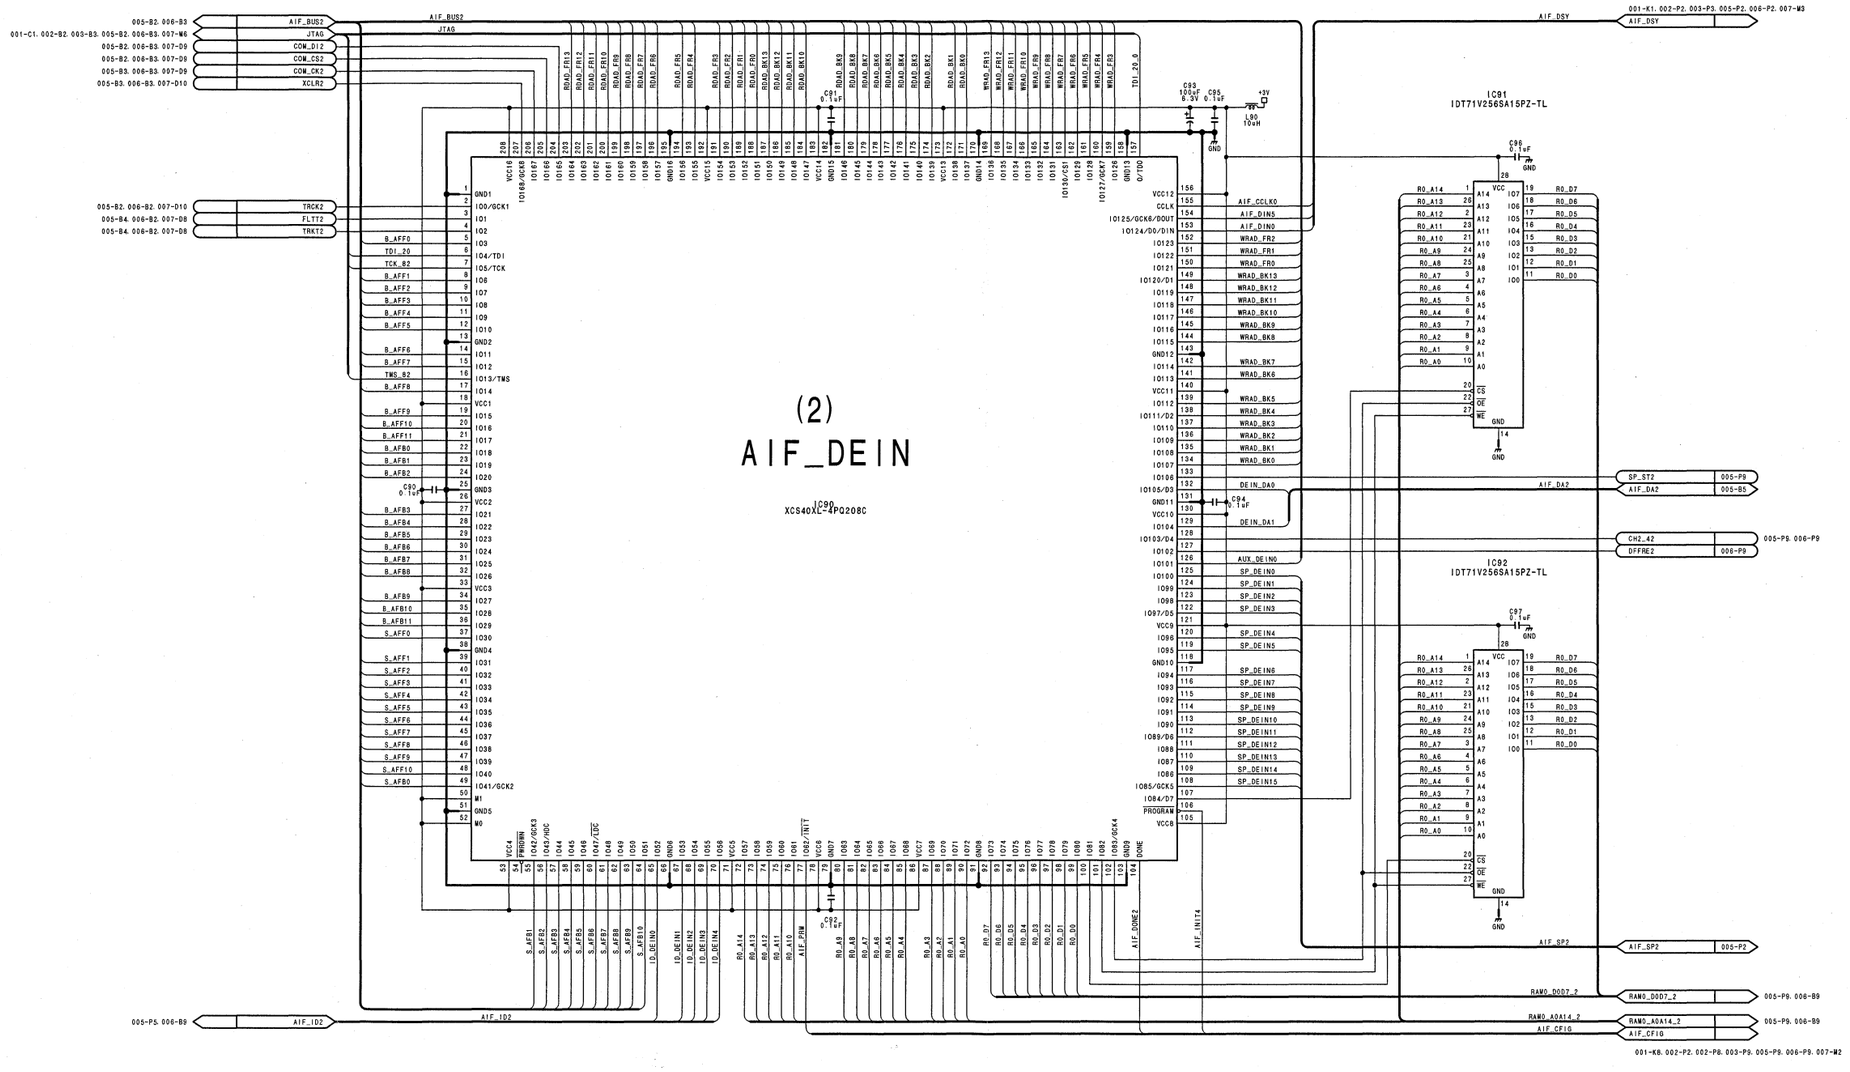

Digital process
DU-83 (4/7)
BOARD NO. 1-675-787-11, 12
LOT NO. 907-002
DSR-2000_DU-83_C12_4

DSR-2000 (UC) : S/N 100001 through 100910
DSR-2000 (J) : S/N 300001 through 301040
DSR-2000P (CE) : S/N 400001 through 401550

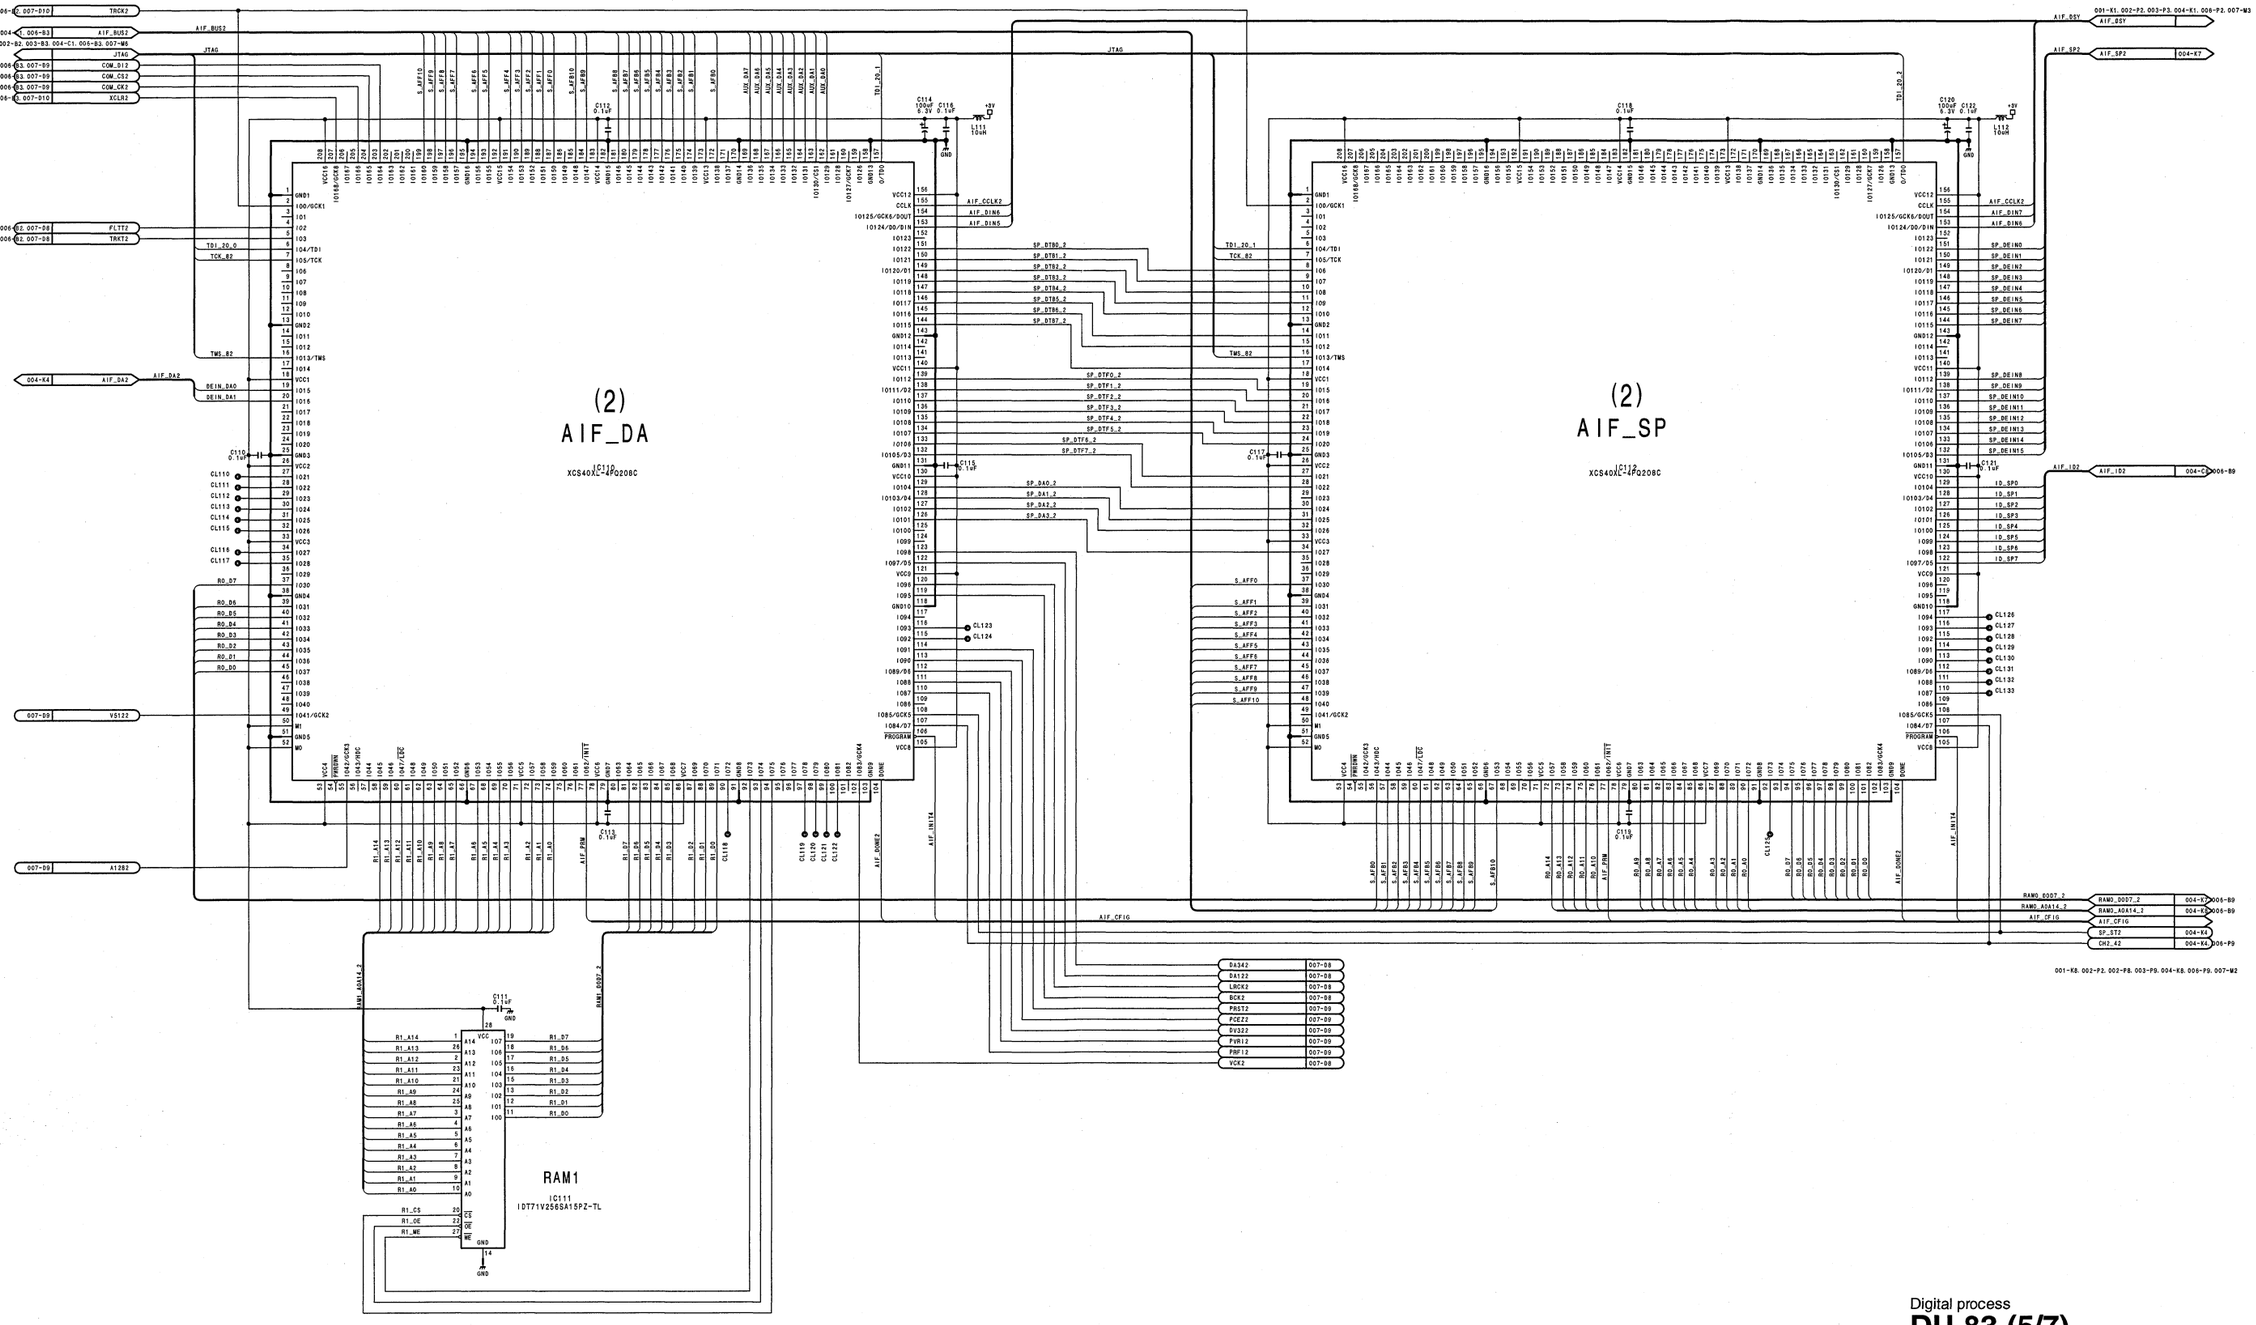

Digital process
DU-83 (5/7)
BOARD NO. 1-675-787-11, 12
LOT NO. 907-002
DSR-2000_DU-83_C12_5

DU-83 (6/7)

DSR-2000 (UC) : S/N 100001 through 100910
DSR-2000 (J) : S/N 300001 through 301040
DSR-2000P (CE) : S/N 400001 through 401550

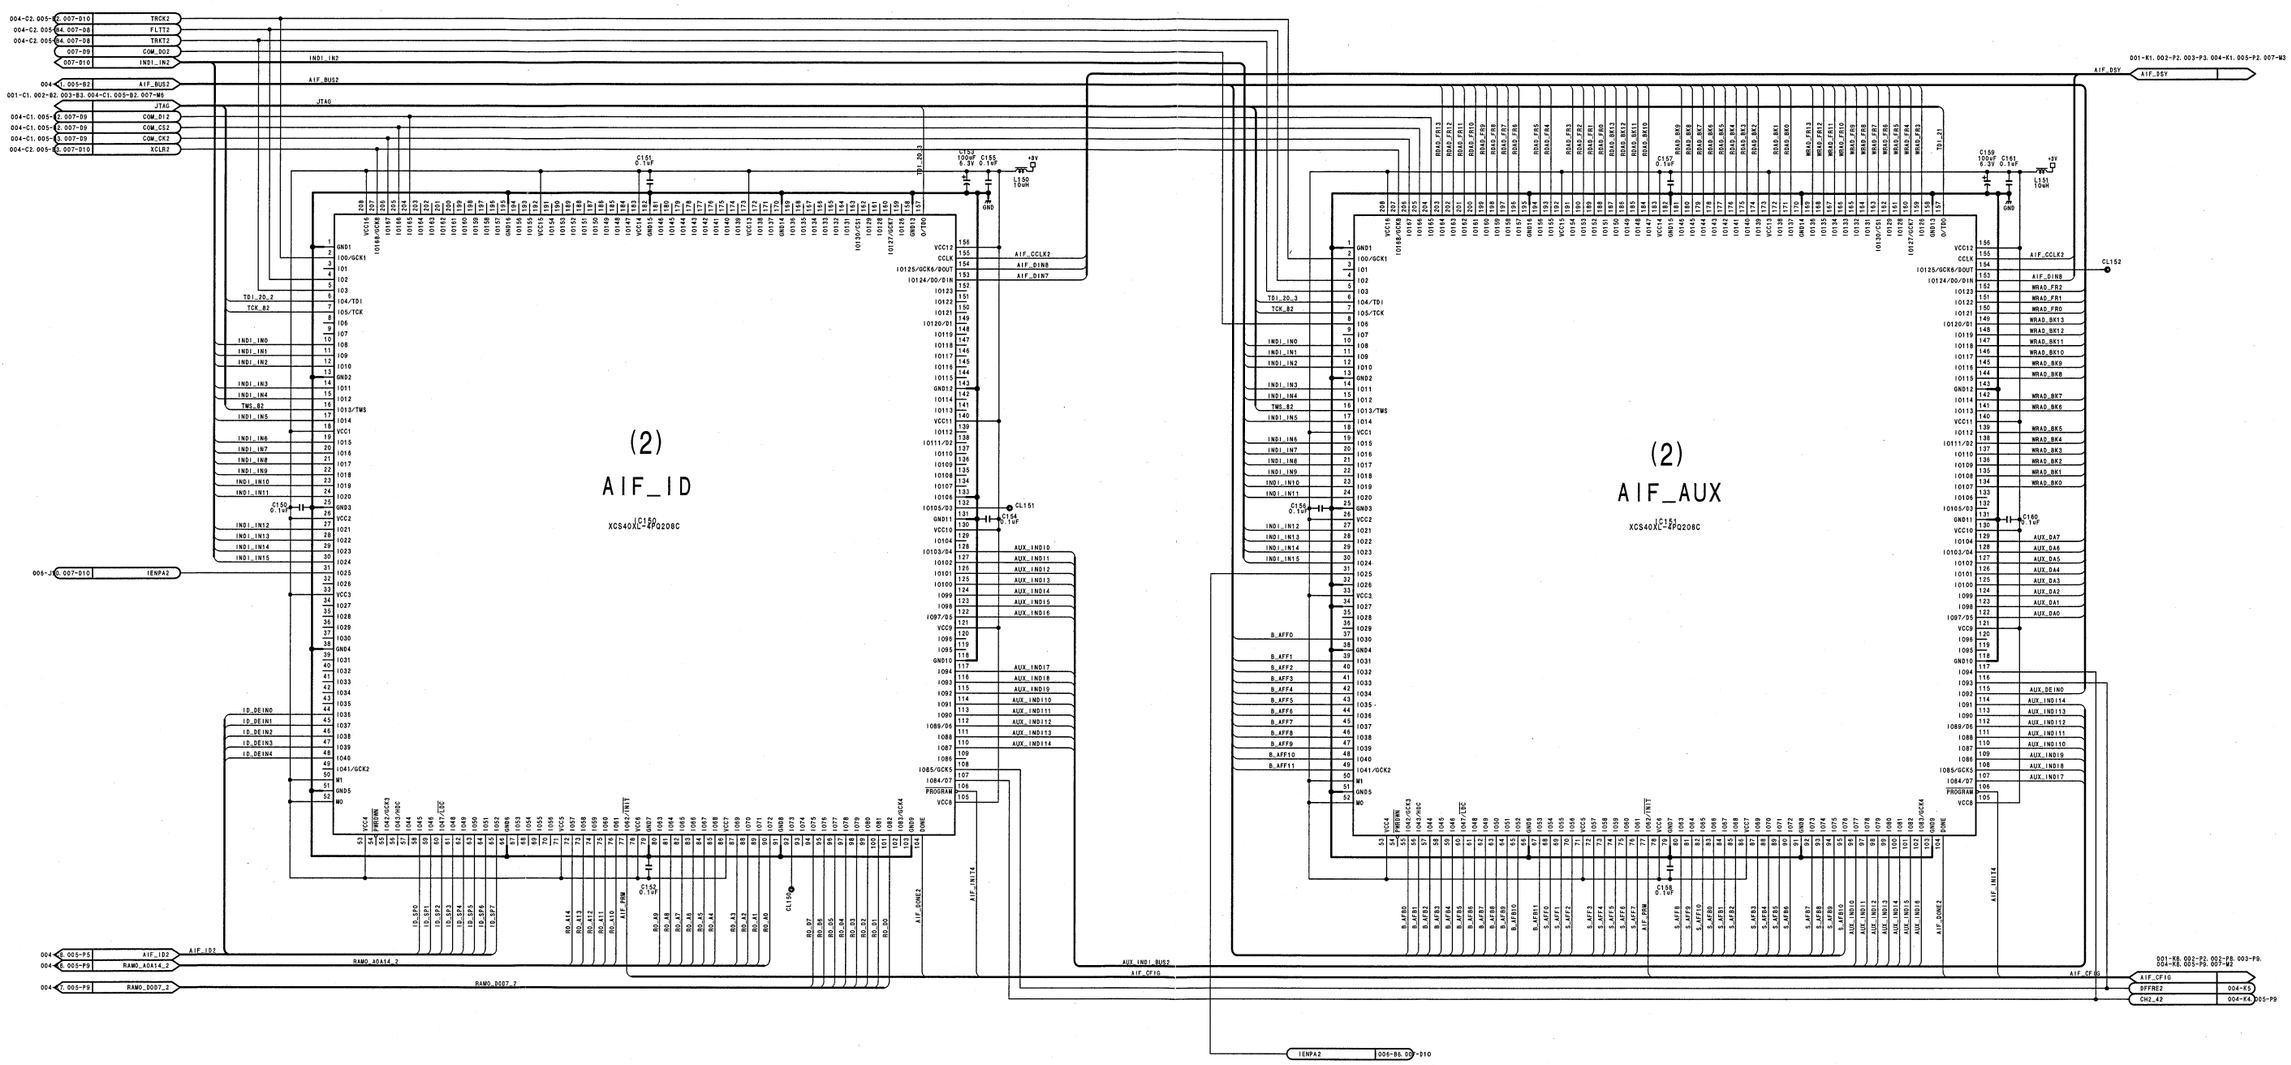

Digital process
DU-83 (6/7)
BOARD NO. 1-675-787-11, 12
LOT NO. 907-002
DSR-2000_DU-83_C12_6

DU-83 (7/7)

DSR-2000 (UC) : S/N 100001 through 100910
DSR-2000 (J) : S/N 300001 through 301040
DSR-2000P (CE) : S/N 400001 through 401550

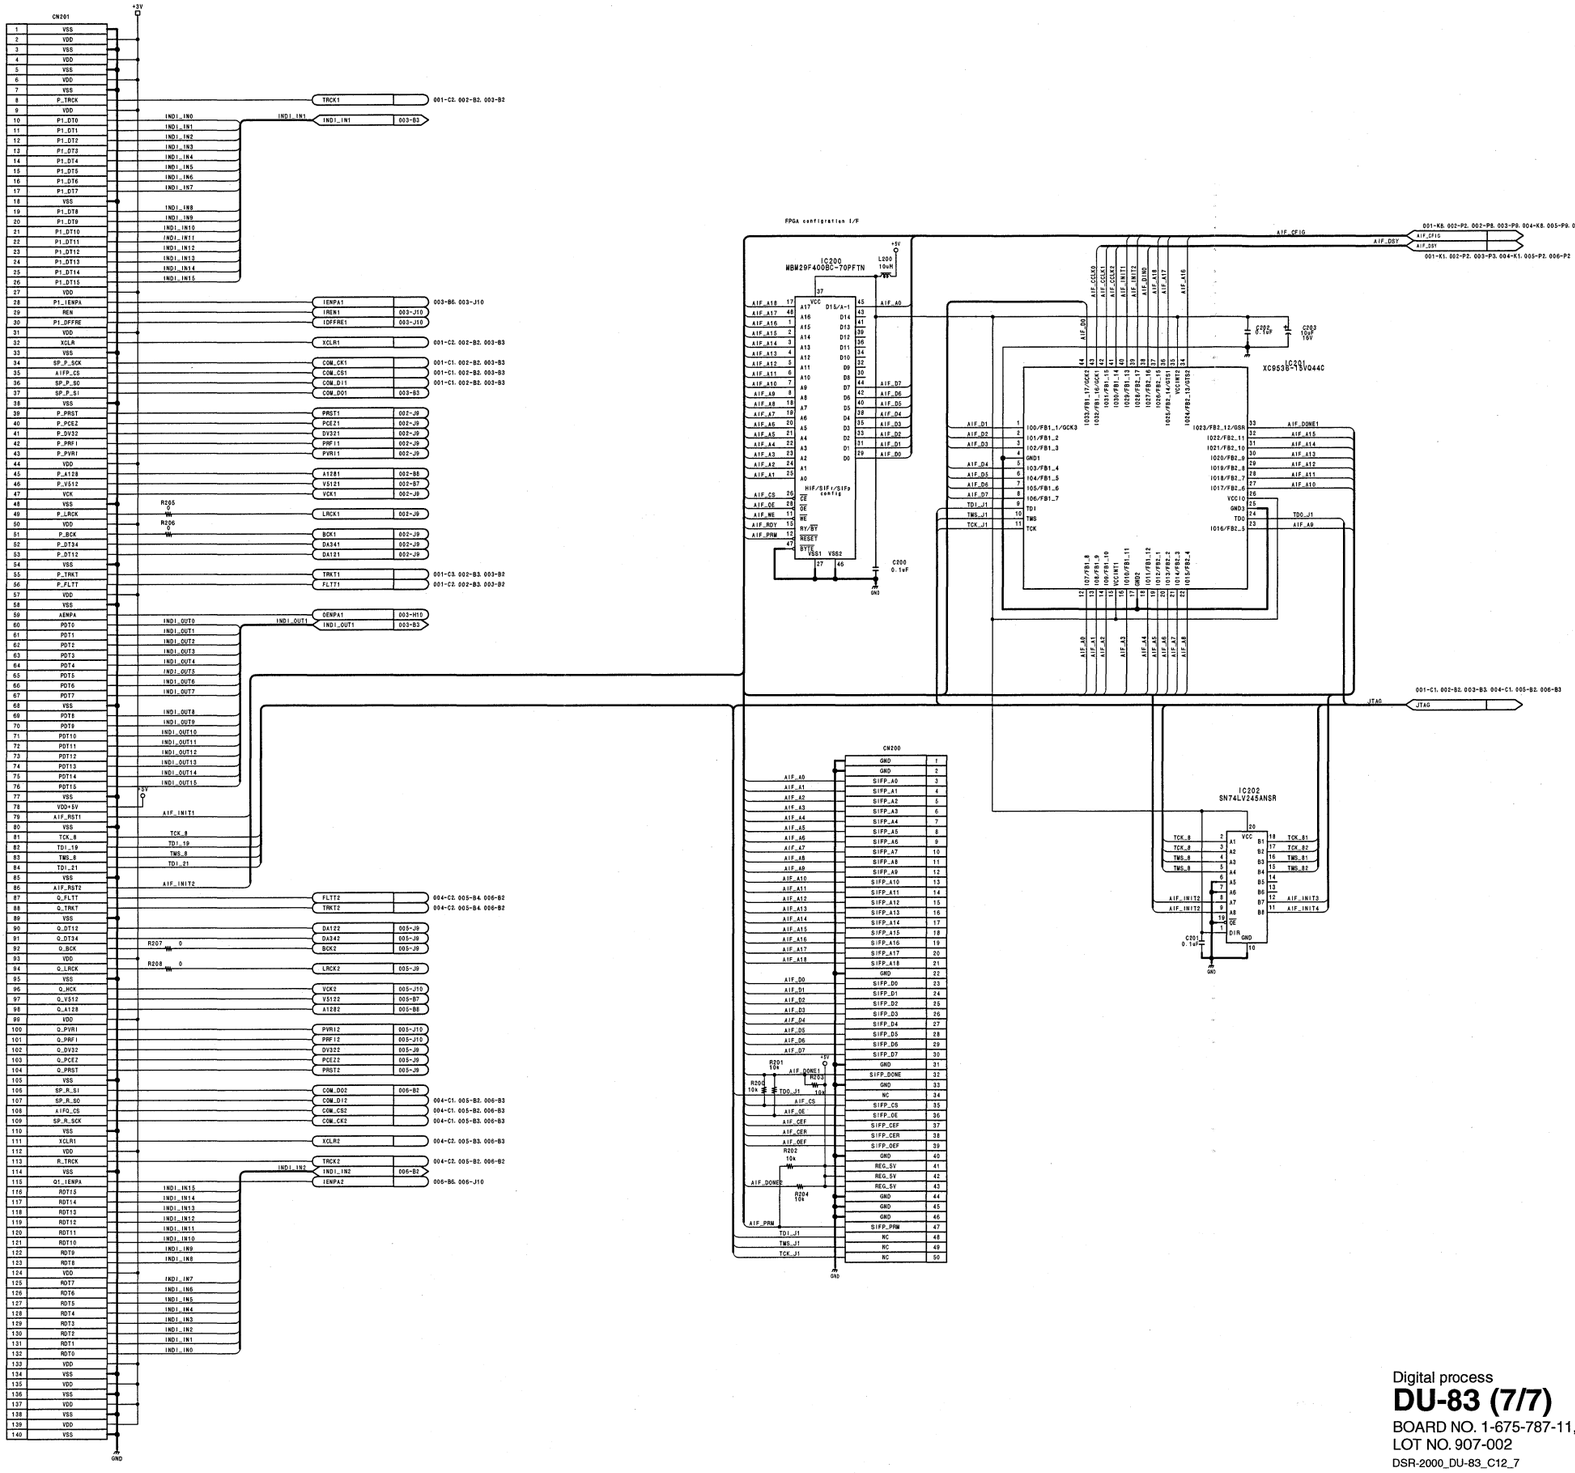

DU-89 (1/3)

DSR-2000 (UC) : S/N 100001 through 101240
DSR-2000 (J) : S/N 300001 through 301330
DSR-2000P (CE) : S/N 400001 through 401550

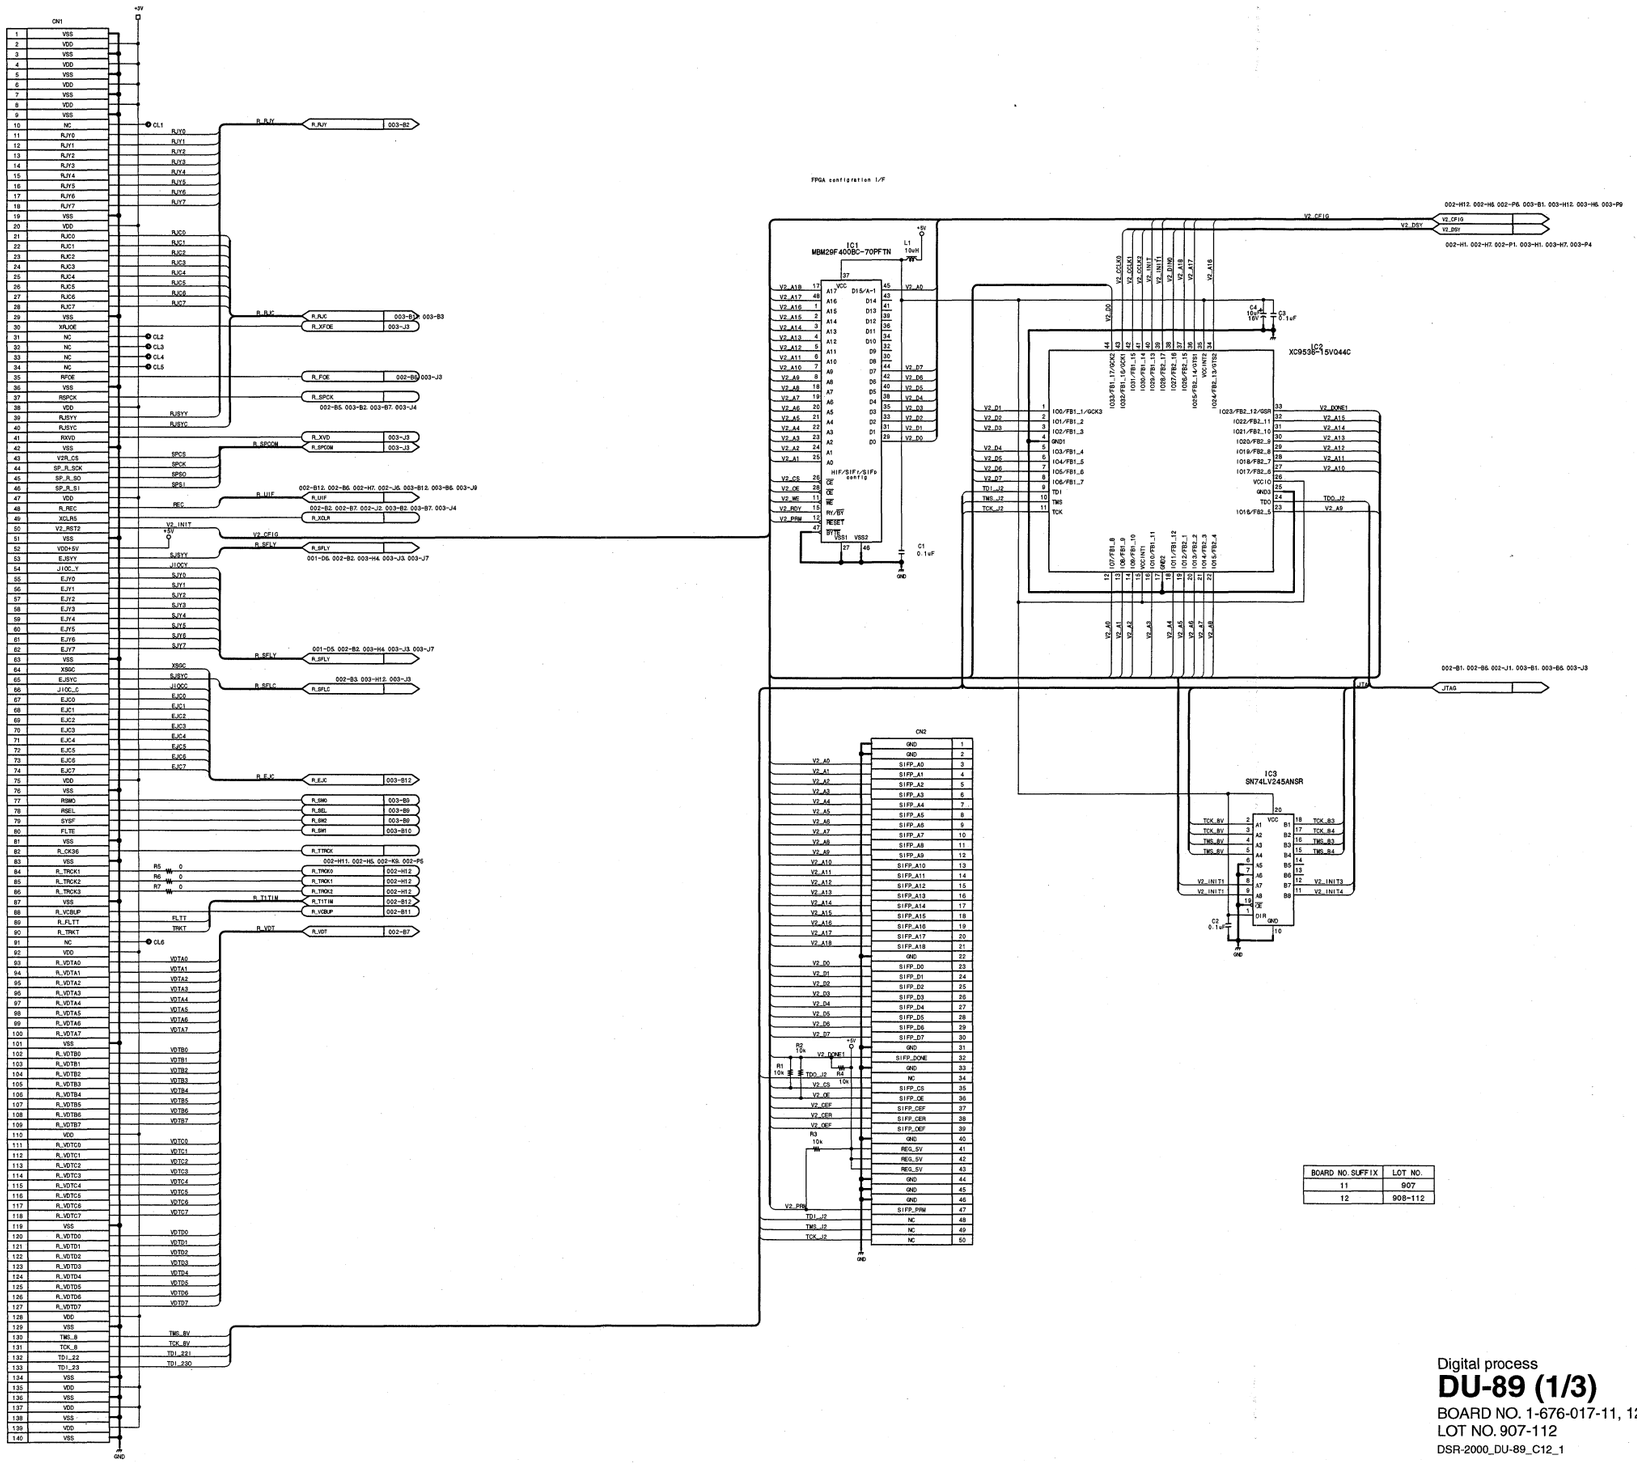

Digital process
DU-89 (1/3)
BOARD NO. 1-676-017-11, 12
LOT NO. 907-112
DSR-2000_DU-89_C12_1

DU-89 (2/3)

DSR-2000 (UC) : S/N 100001 through 101240
DSR-2000 (J) : S/N 300001 through 301330
DSR-2000P (CE) : S/N 400001 through 401550

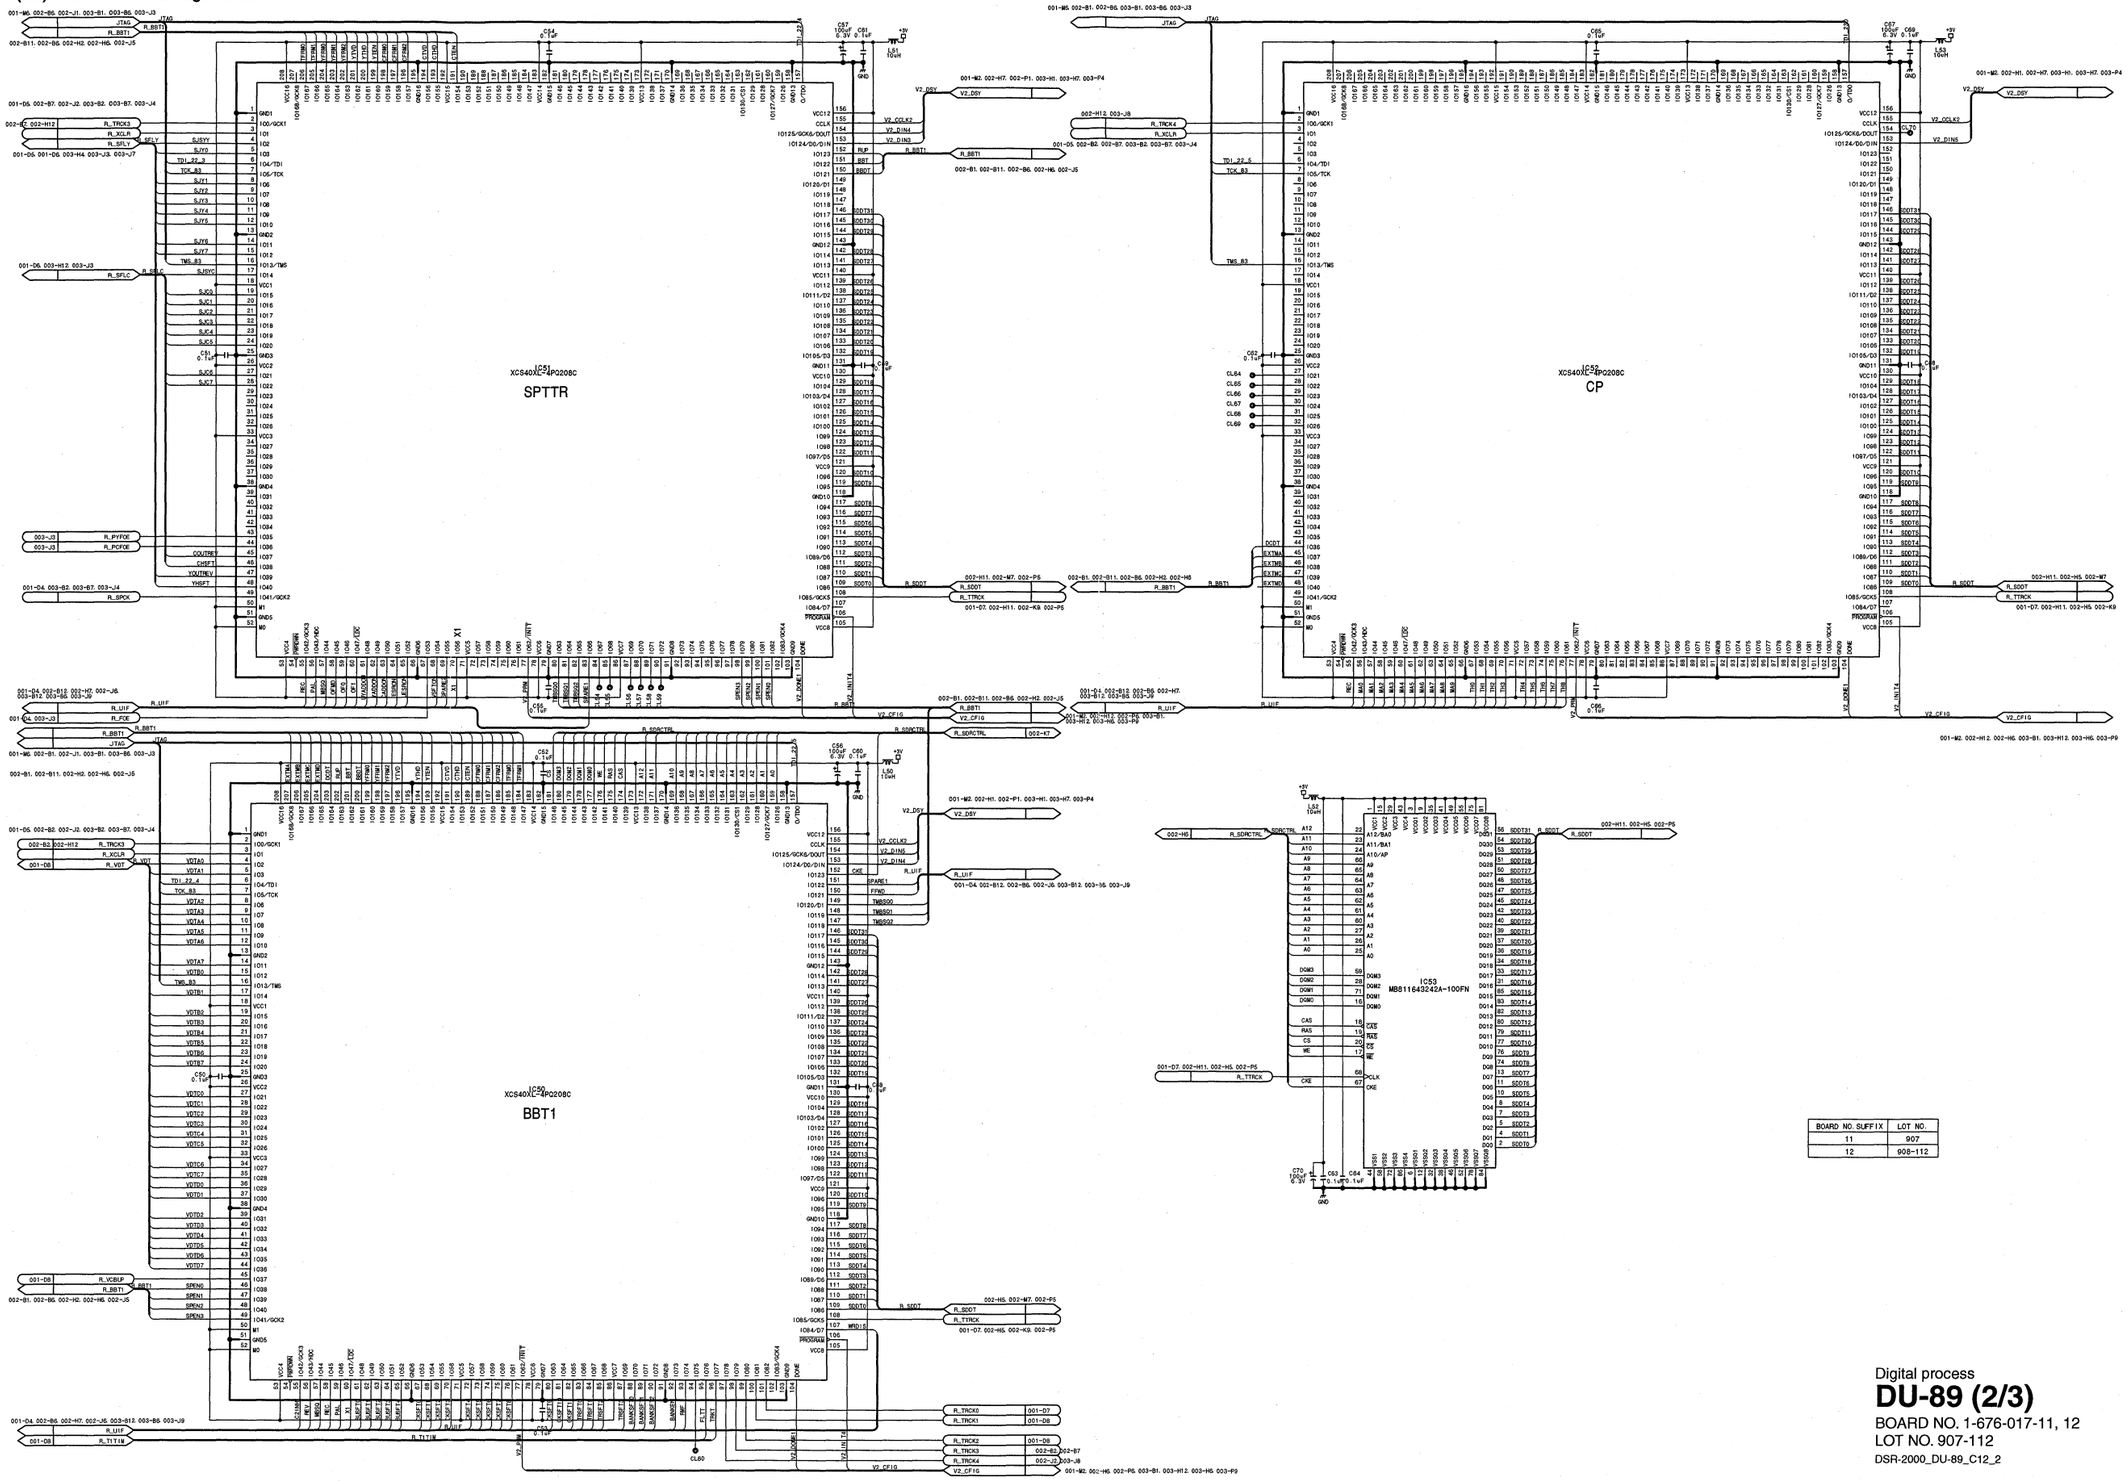

BOARD NO. SUFFIX	LOT NO.
11	907
12	908-112

Digital process

DU-89 (2/3)

BOARD NO. 1-676-017-11, 12
LOT NO. 907-112

DSR-2000_DU-89_C12_2

DSR-2000 (UC) : S/N 100001 through 101240
DSR-2000 (J) : S/N 300001 through 301330
DSR-2000P (CE) : S/N 400001 through 401550

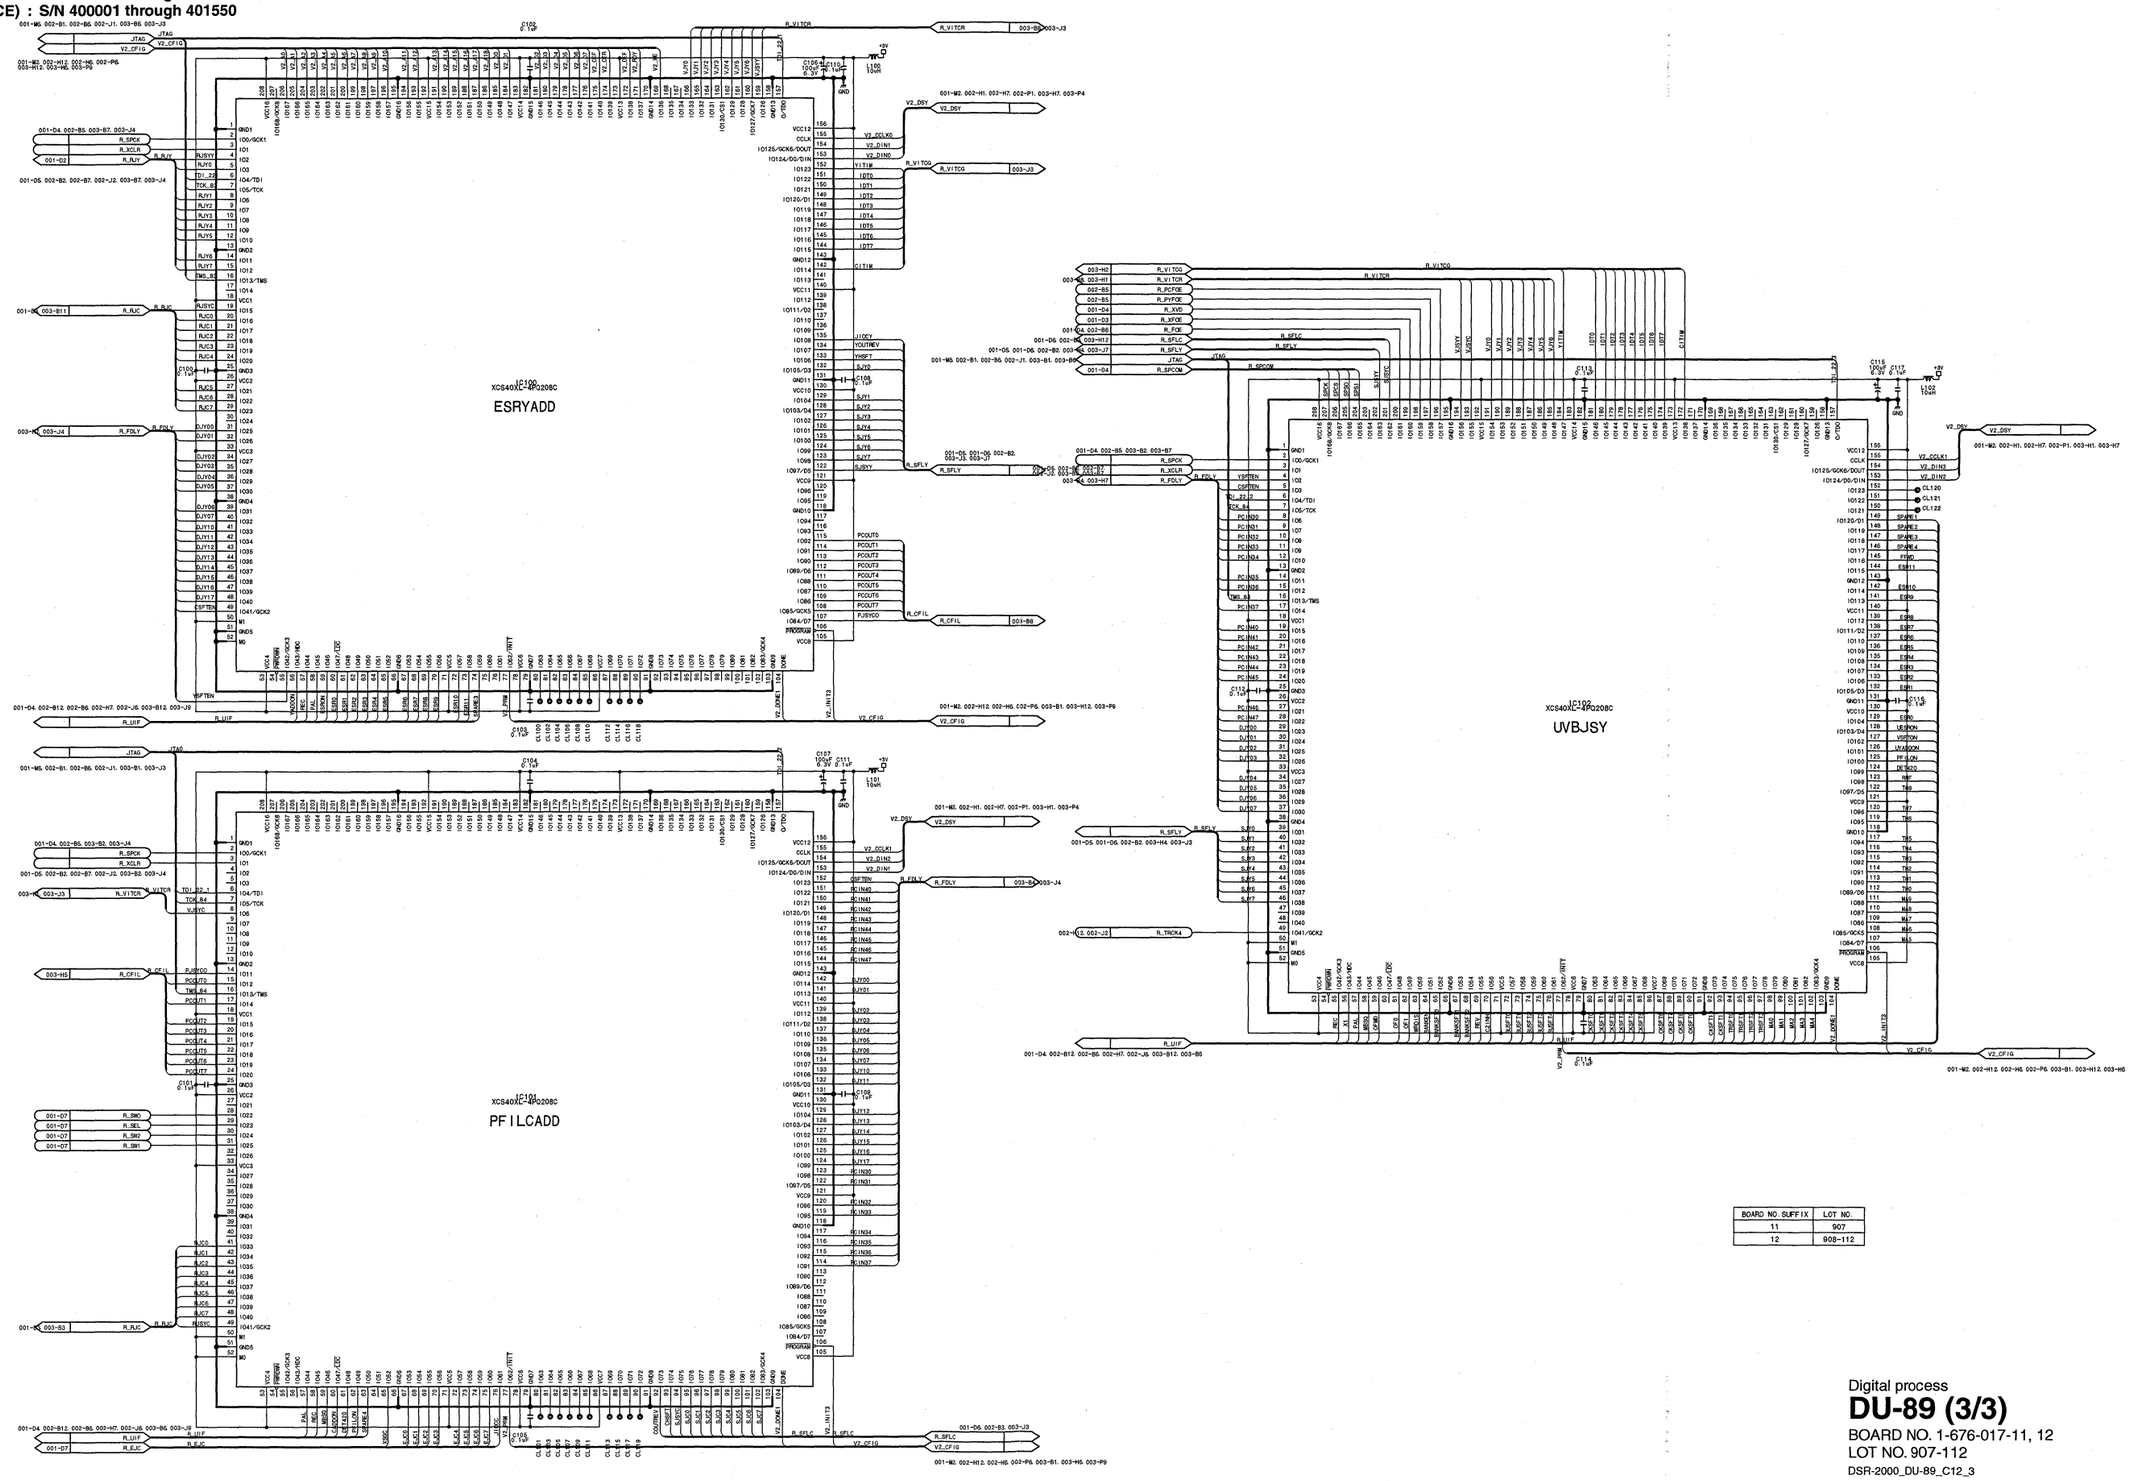

BOARD NO. SUFFIX	LOT NO.
11	907
12	908-112

Digital process
DU-89 (3/3)
BOARD NO. 1-676-017-11, 12
LOT NO. 907-112
DSR-2000_DU-89_C12_3

DSR-2000 (UC) : S/N 100001 through 100290
DSR-2000 (J) : S/N 300001 through 300240
DSR-2000P (CE) : S/N 400001 through 400300

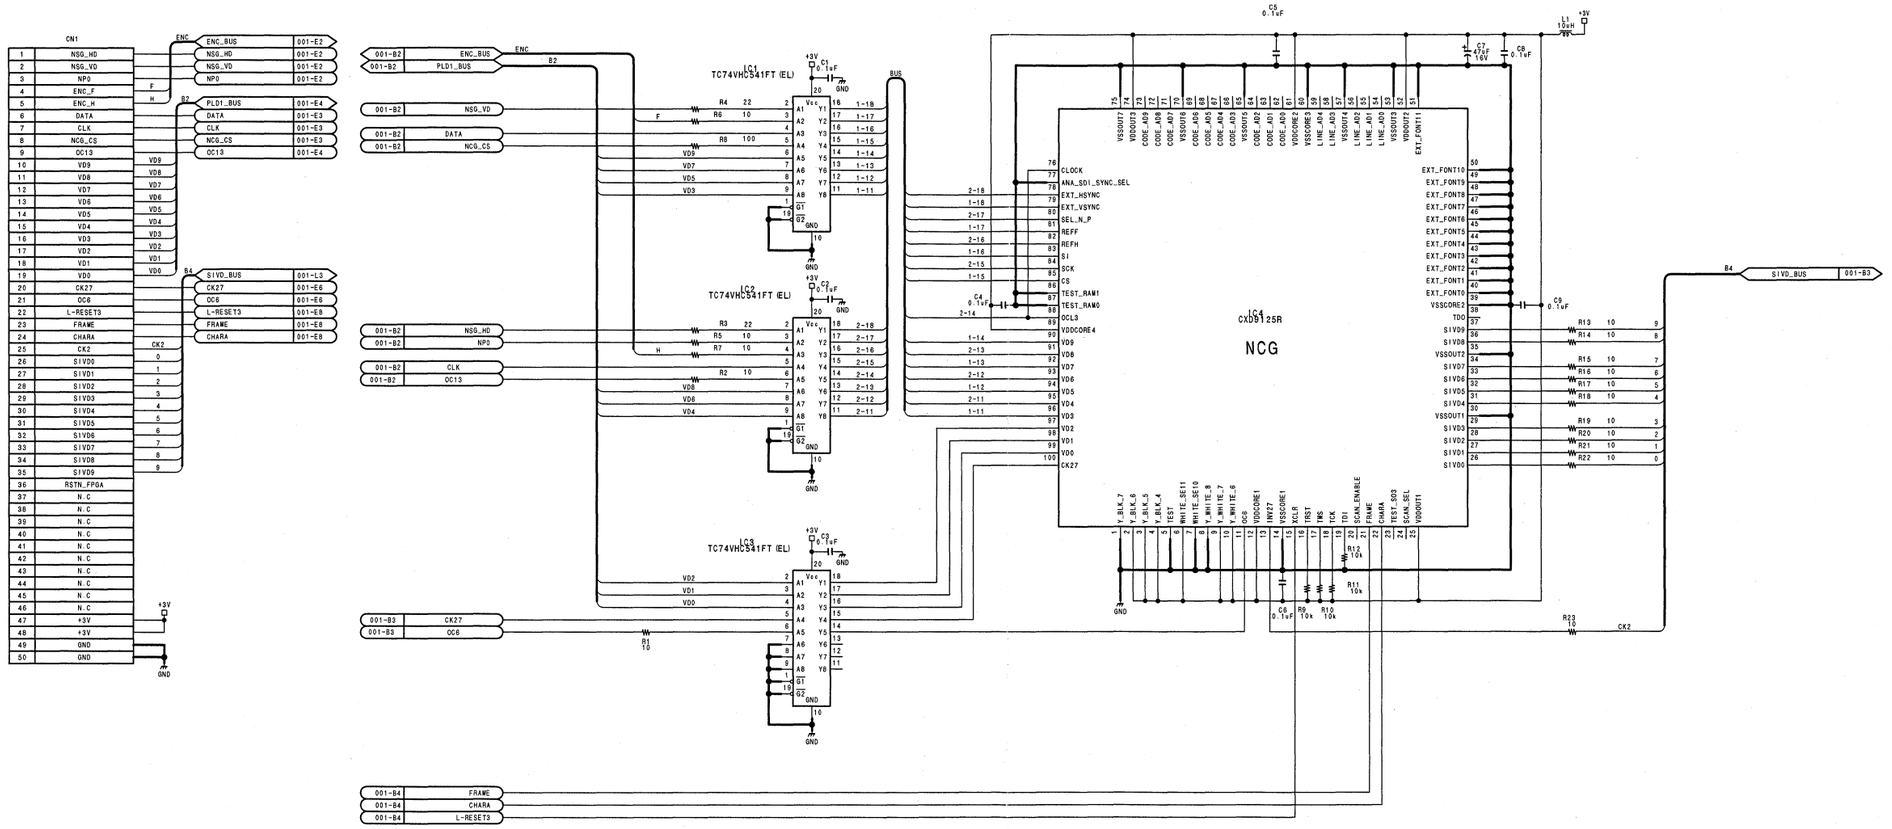

SDI character generator
DU-95
BOARD NO. 1-676-569-11
LOT NO. 907-908
DSR-2000_DU-95_C11_1

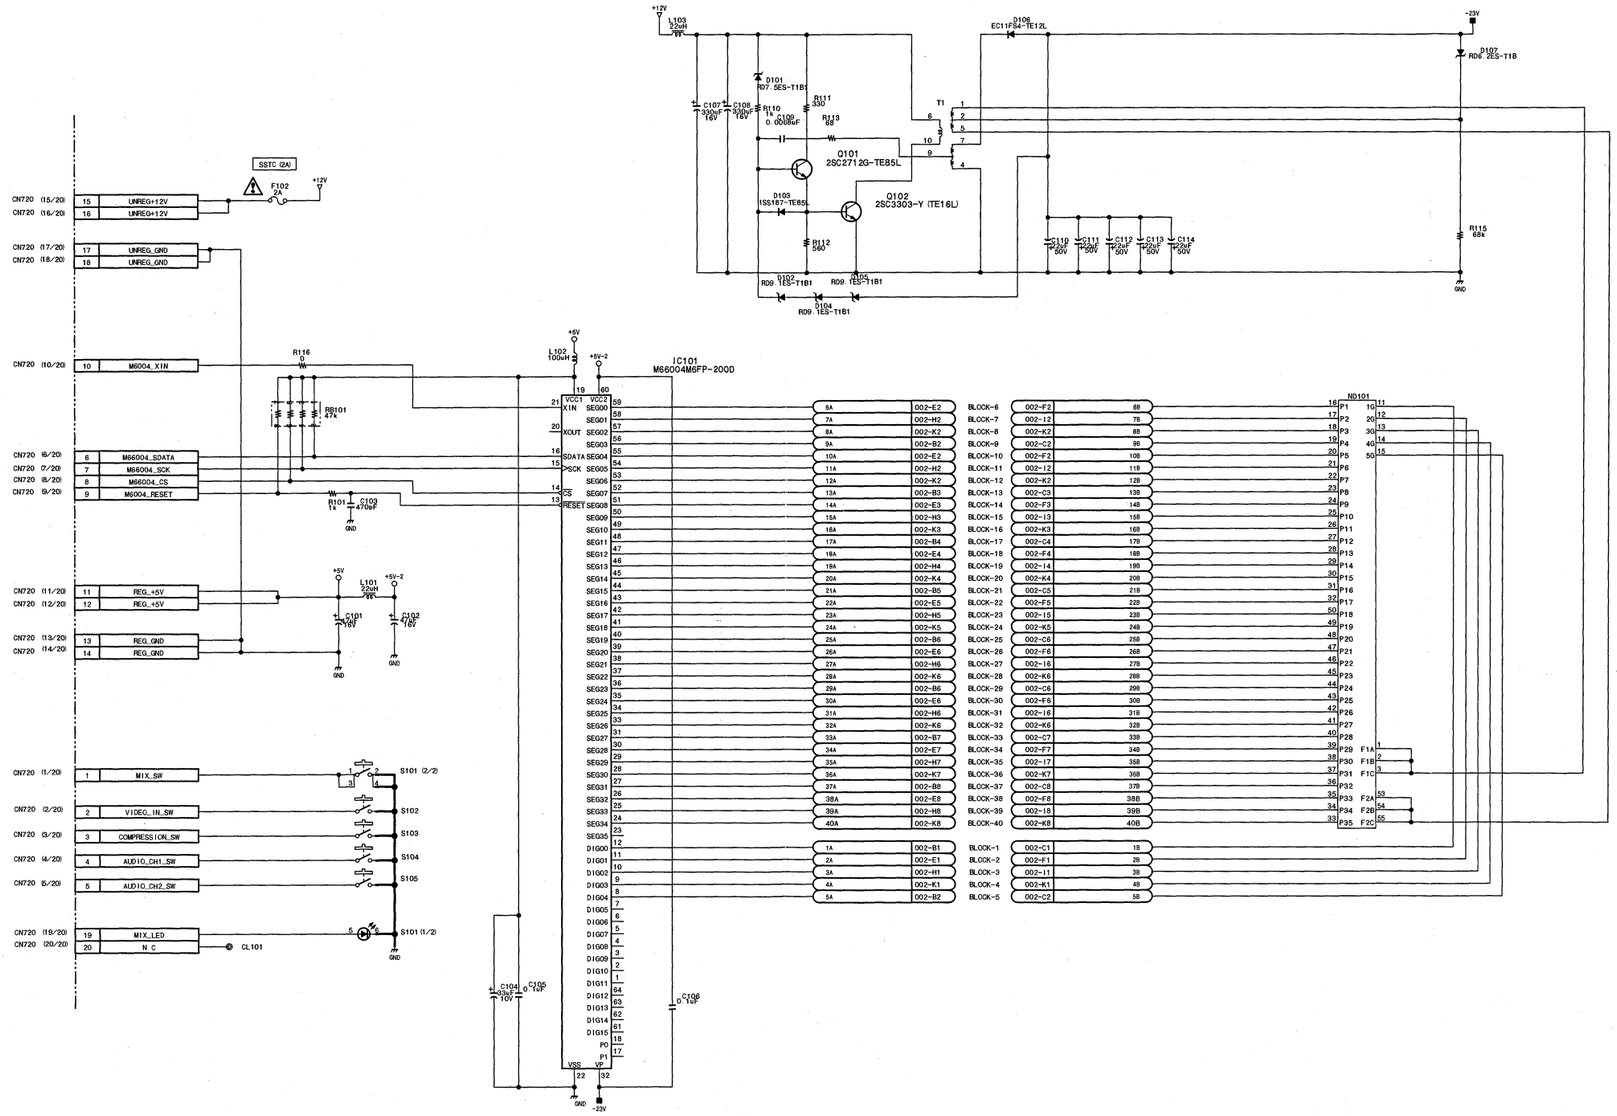

Fluorescent display board/audio meter/input • output selection

DY-15 (1/2)

BOARD NO. 1-675-556-11, 12
LOT NO. 907-
DSR-2000_DY-15_C11_1

DY-15 (2/2)

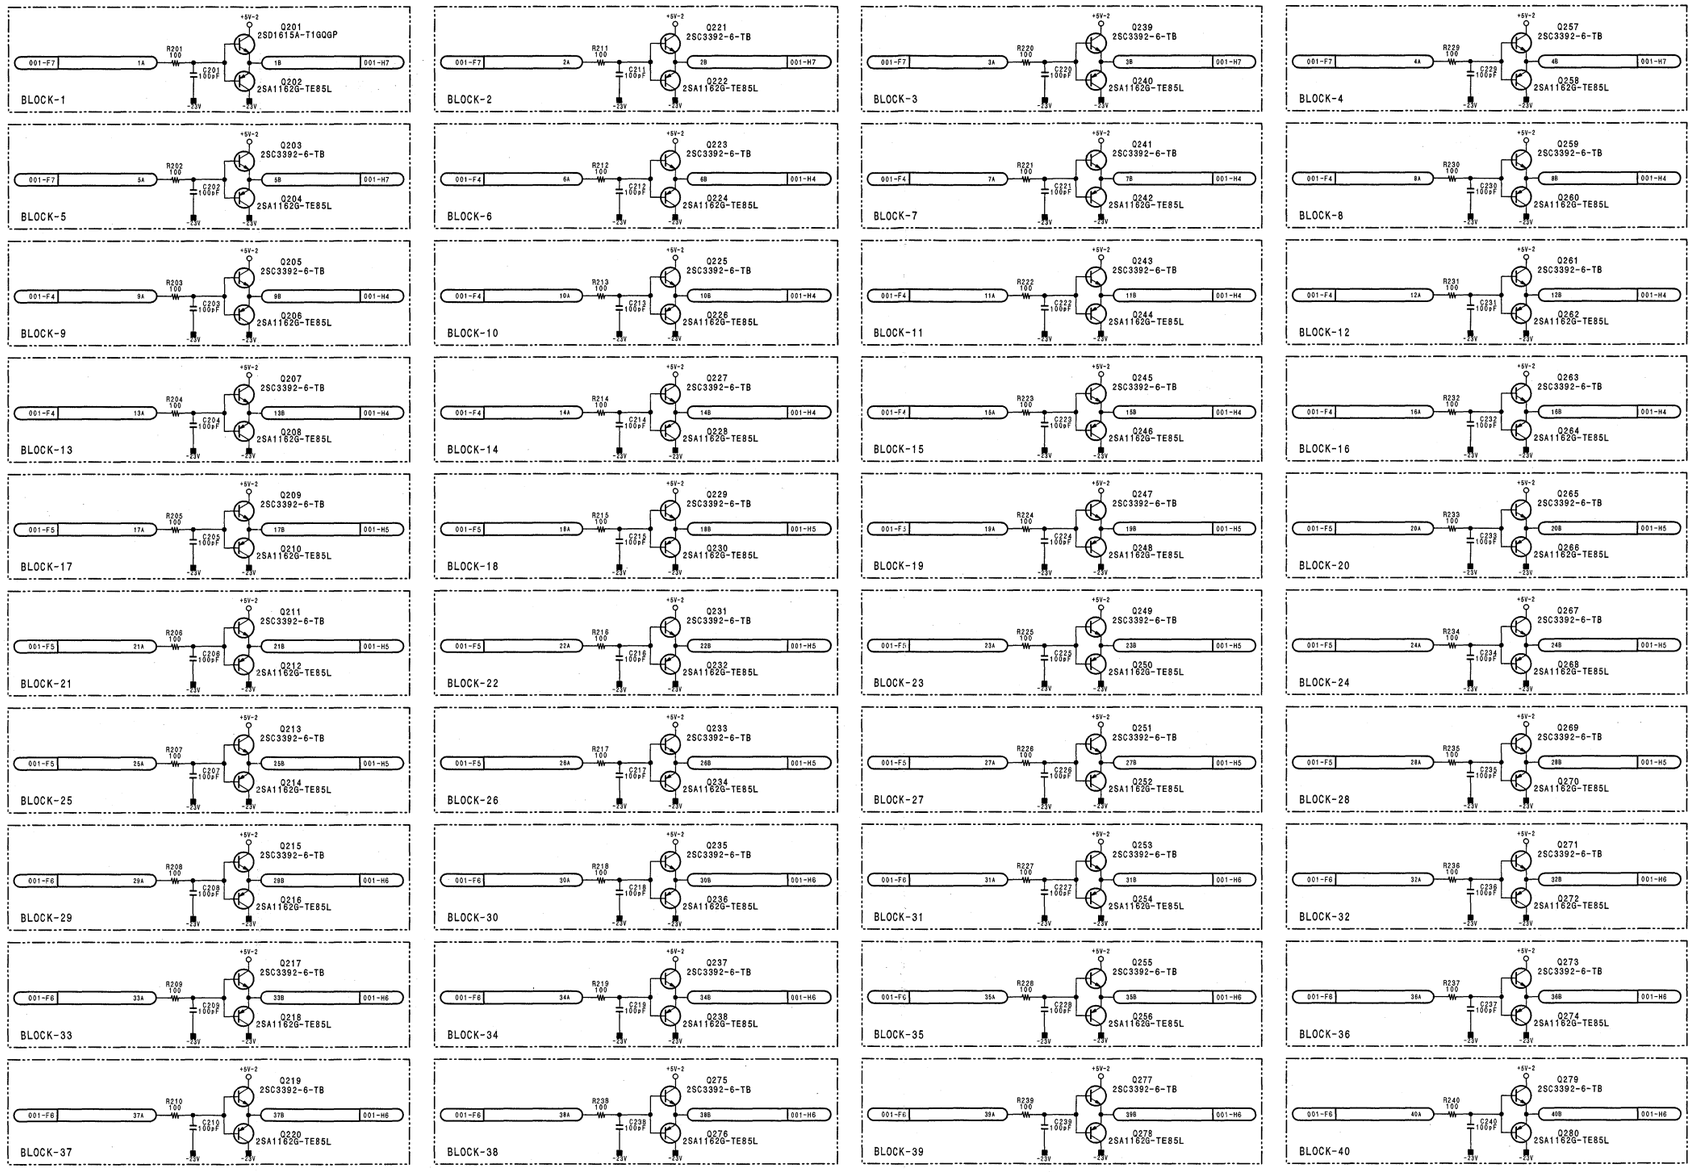

Fluorescent display board/audio meter/input • output selection

DY-15 (2/2)

BOARD NO. 1-675-556-11, 12
LOT NO. 907-
DSR-2000_DY-15_C11_2

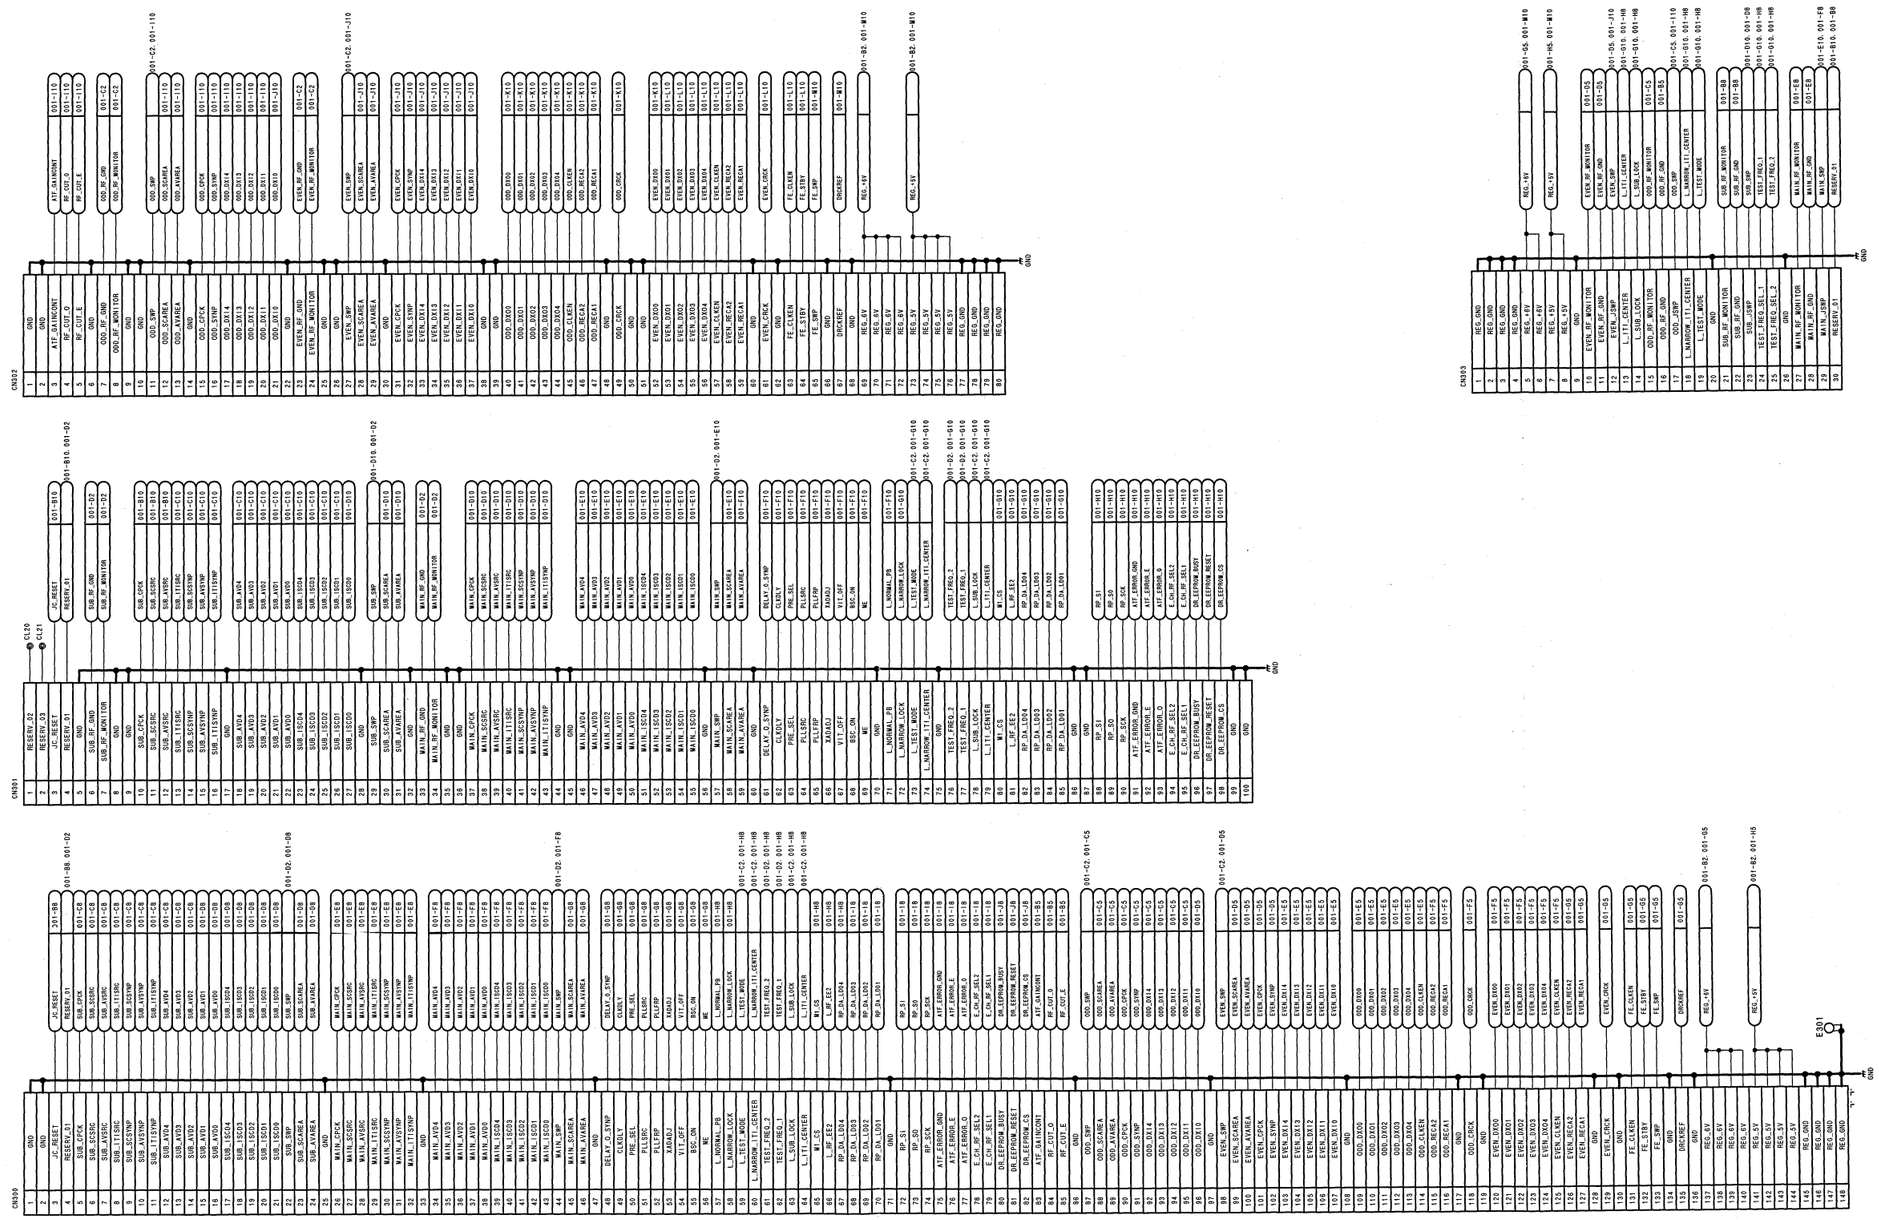

Intermediate board
EX-752
BOARD NO. 1-675-523-11
LOT NO. 907-
DSR-2000_EX-752_C11_1

DSR-2000 (UC) : S/N 101241 and Higher
DSR-2000 (J) : S/N 301311 and Higher
DSR-2000P (CE) : S/N 401551 and Higher

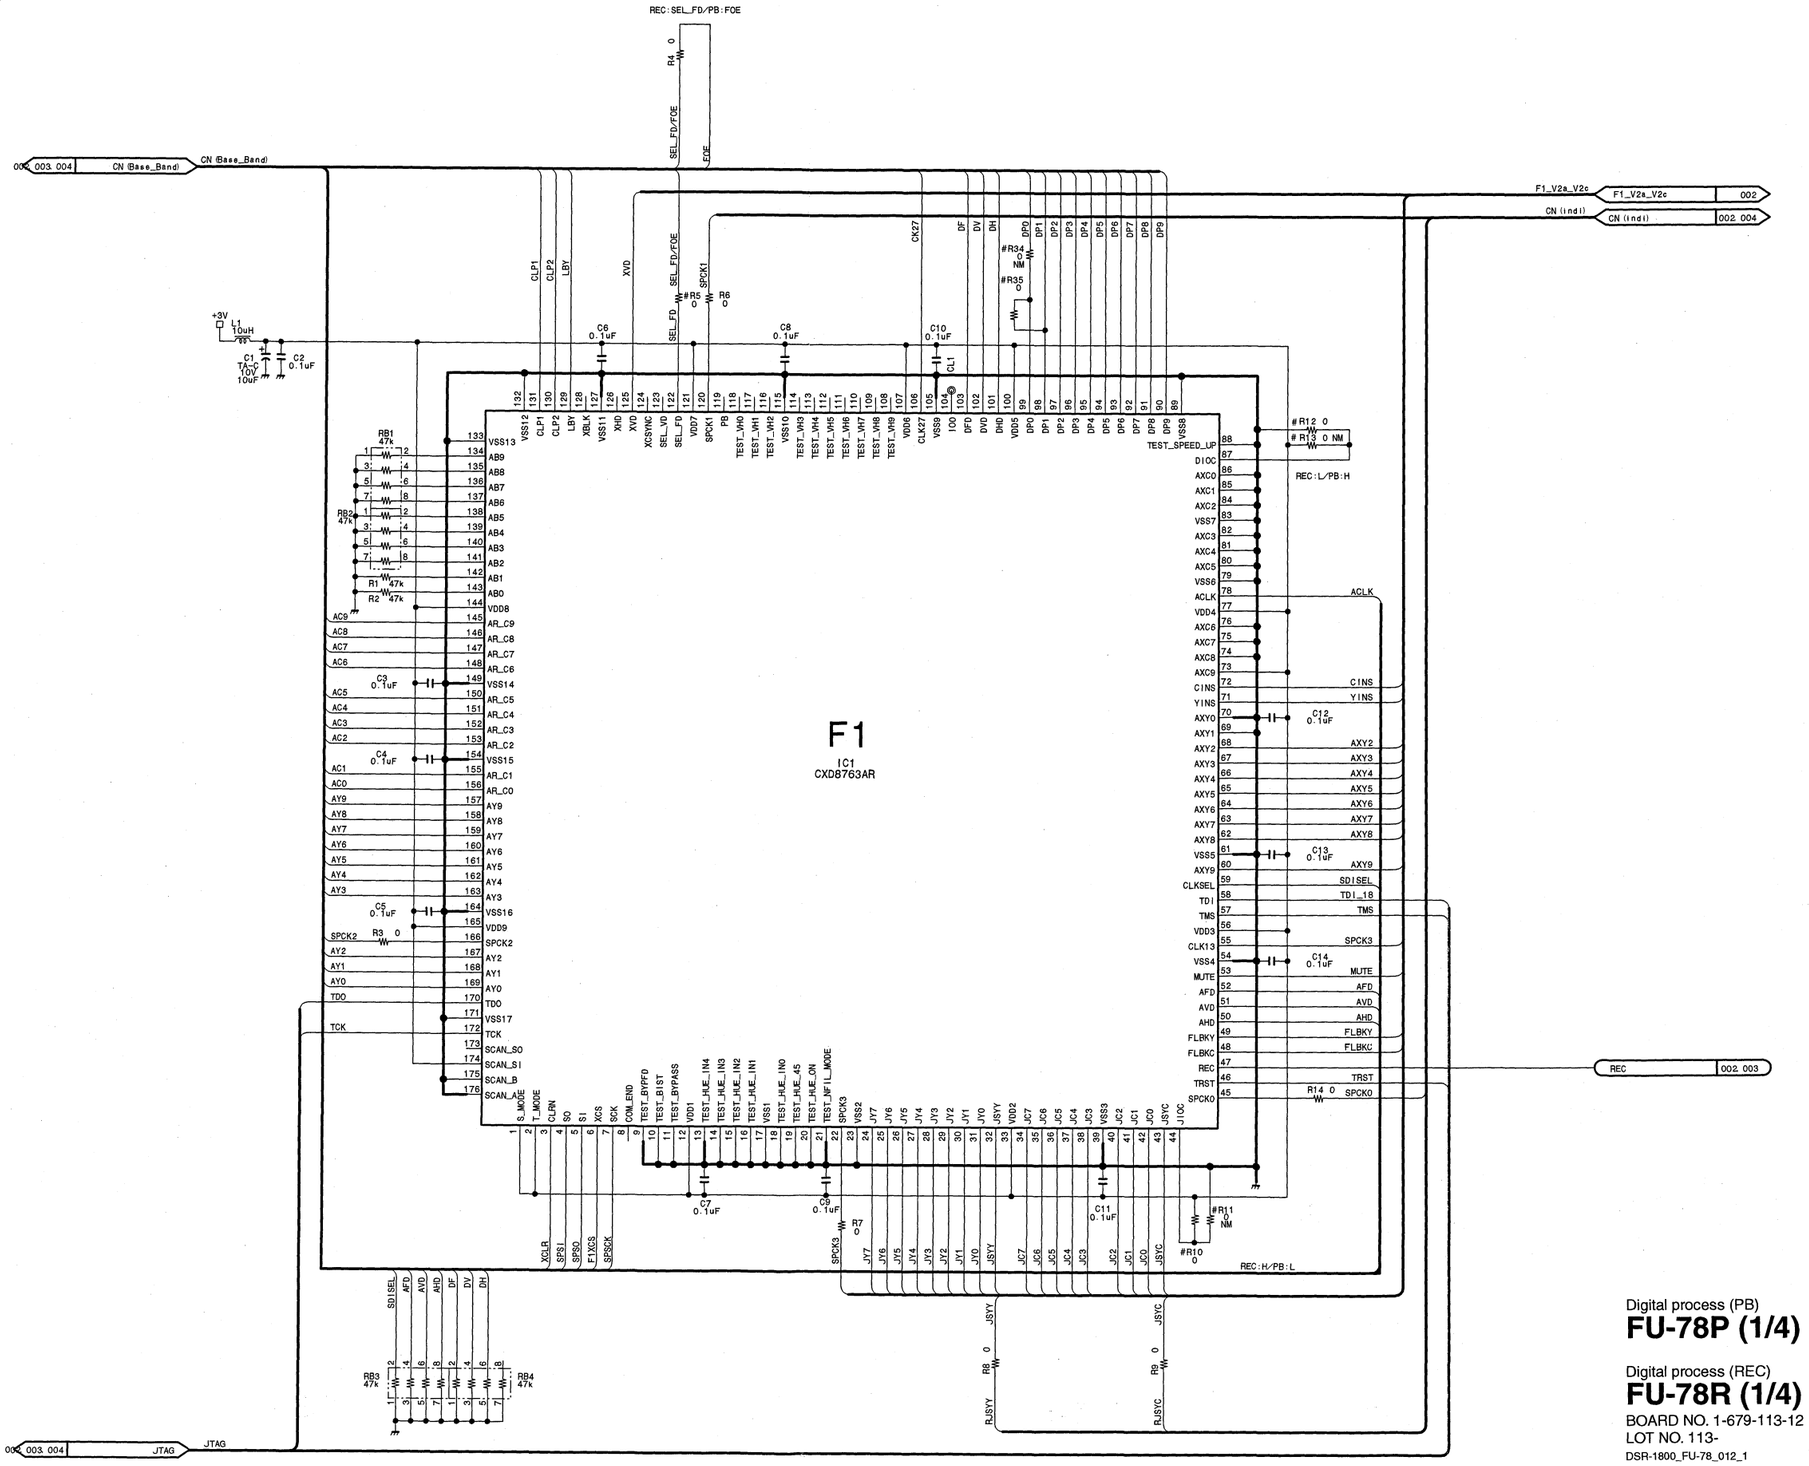

Digital process (PB)
FU-78P (1/4)

Digital process (REC)
FU-78R (1/4)

BOARD NO. 1-679-113-12
LOT NO. 113-
DSR-1800_FU-78_012_1

FU-78P/78R (2/4)

DSR-2000 (UC) : S/N 101241 and Higher
DSR-2000 (J) : S/N 301311 and Higher
DSR-2000P (CE) : S/N 401551 and Higher

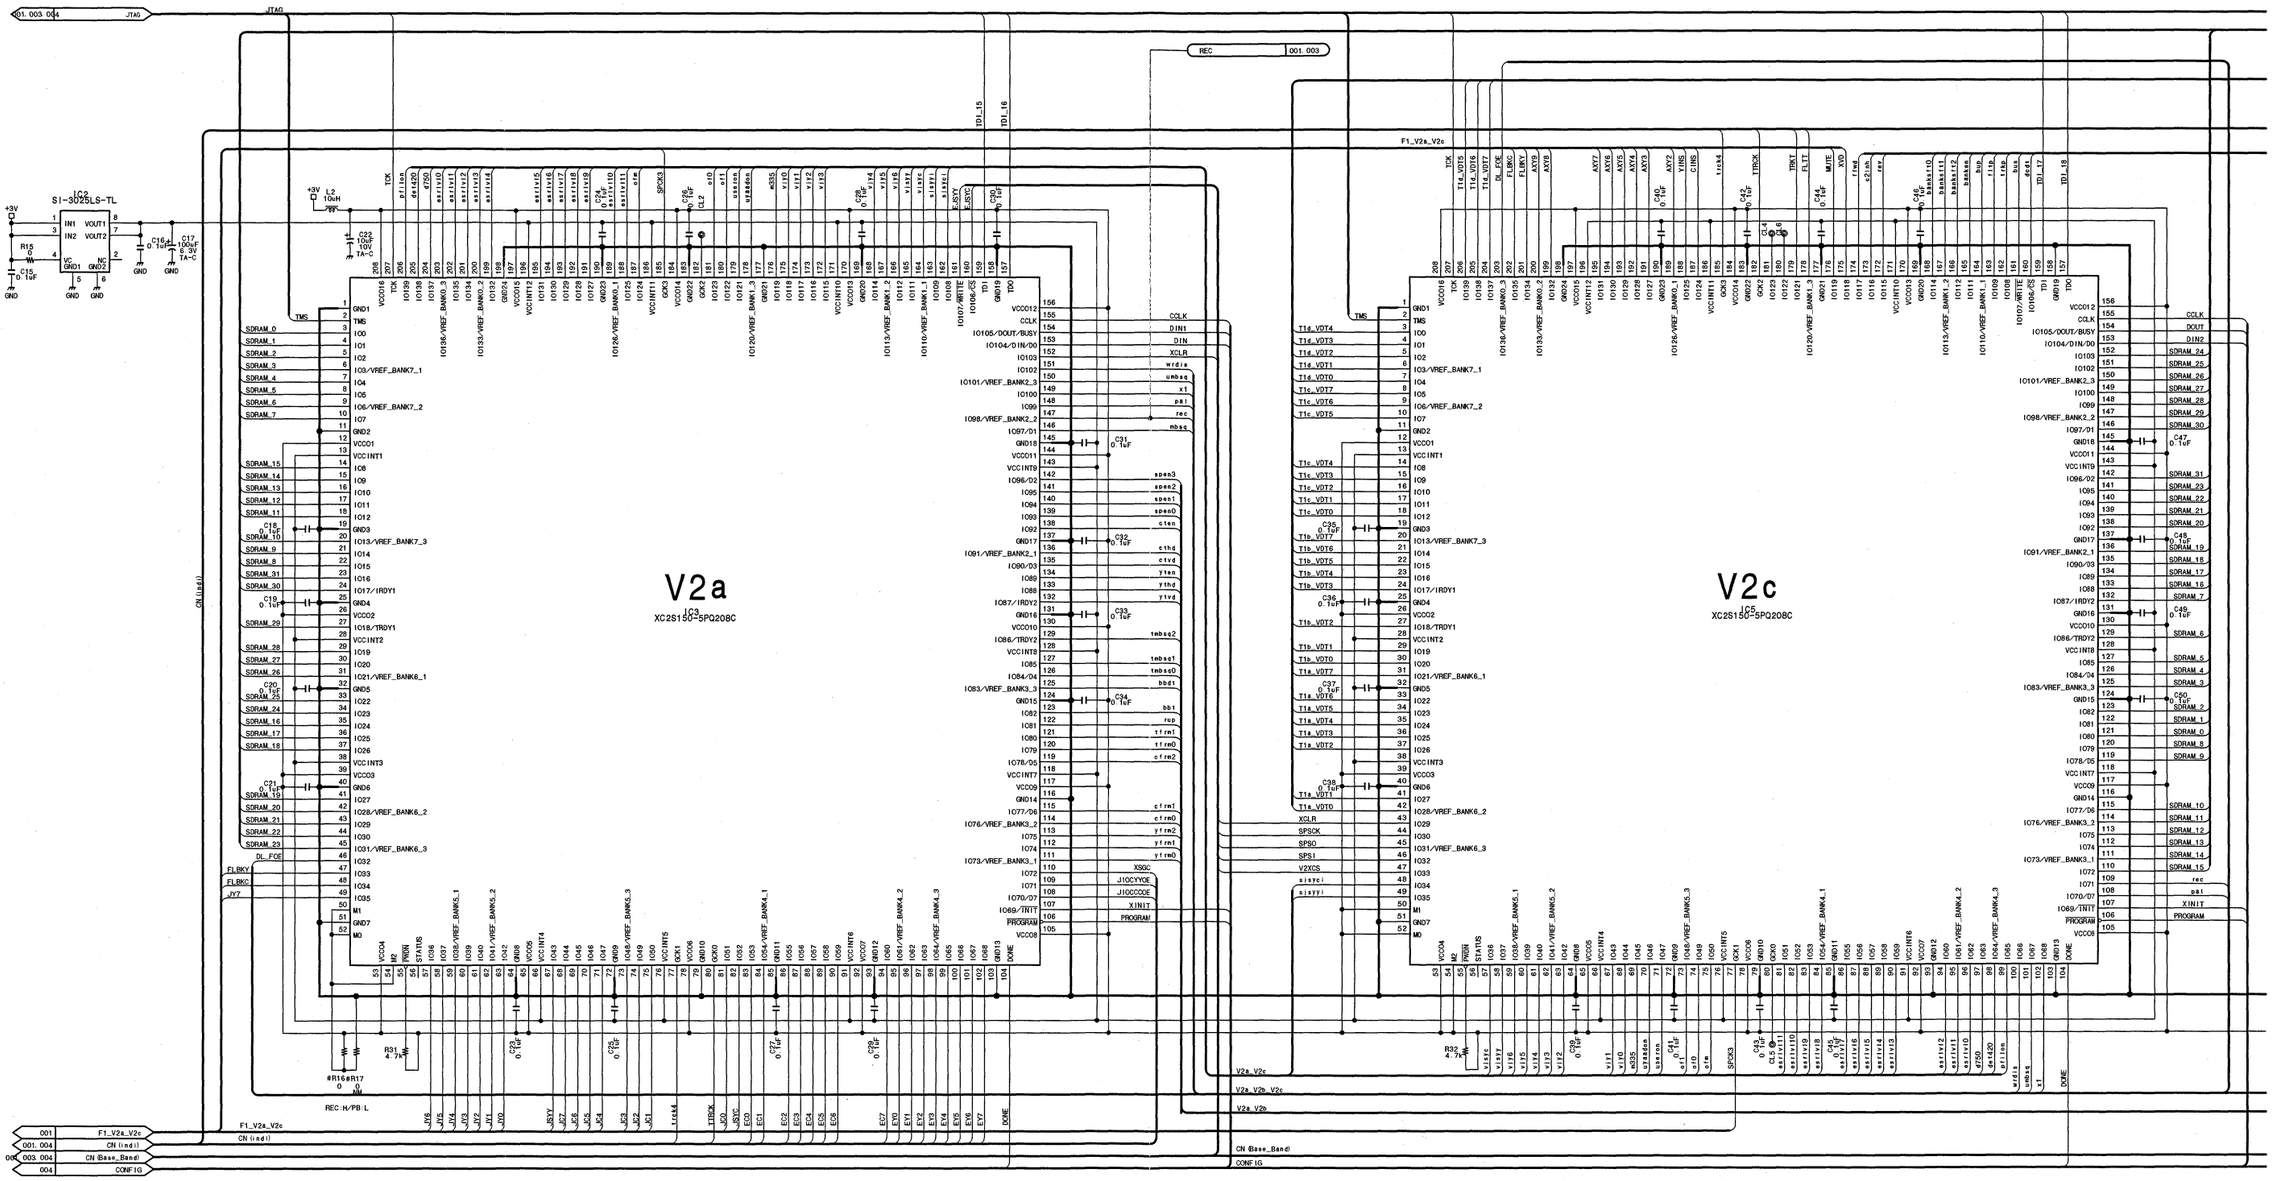

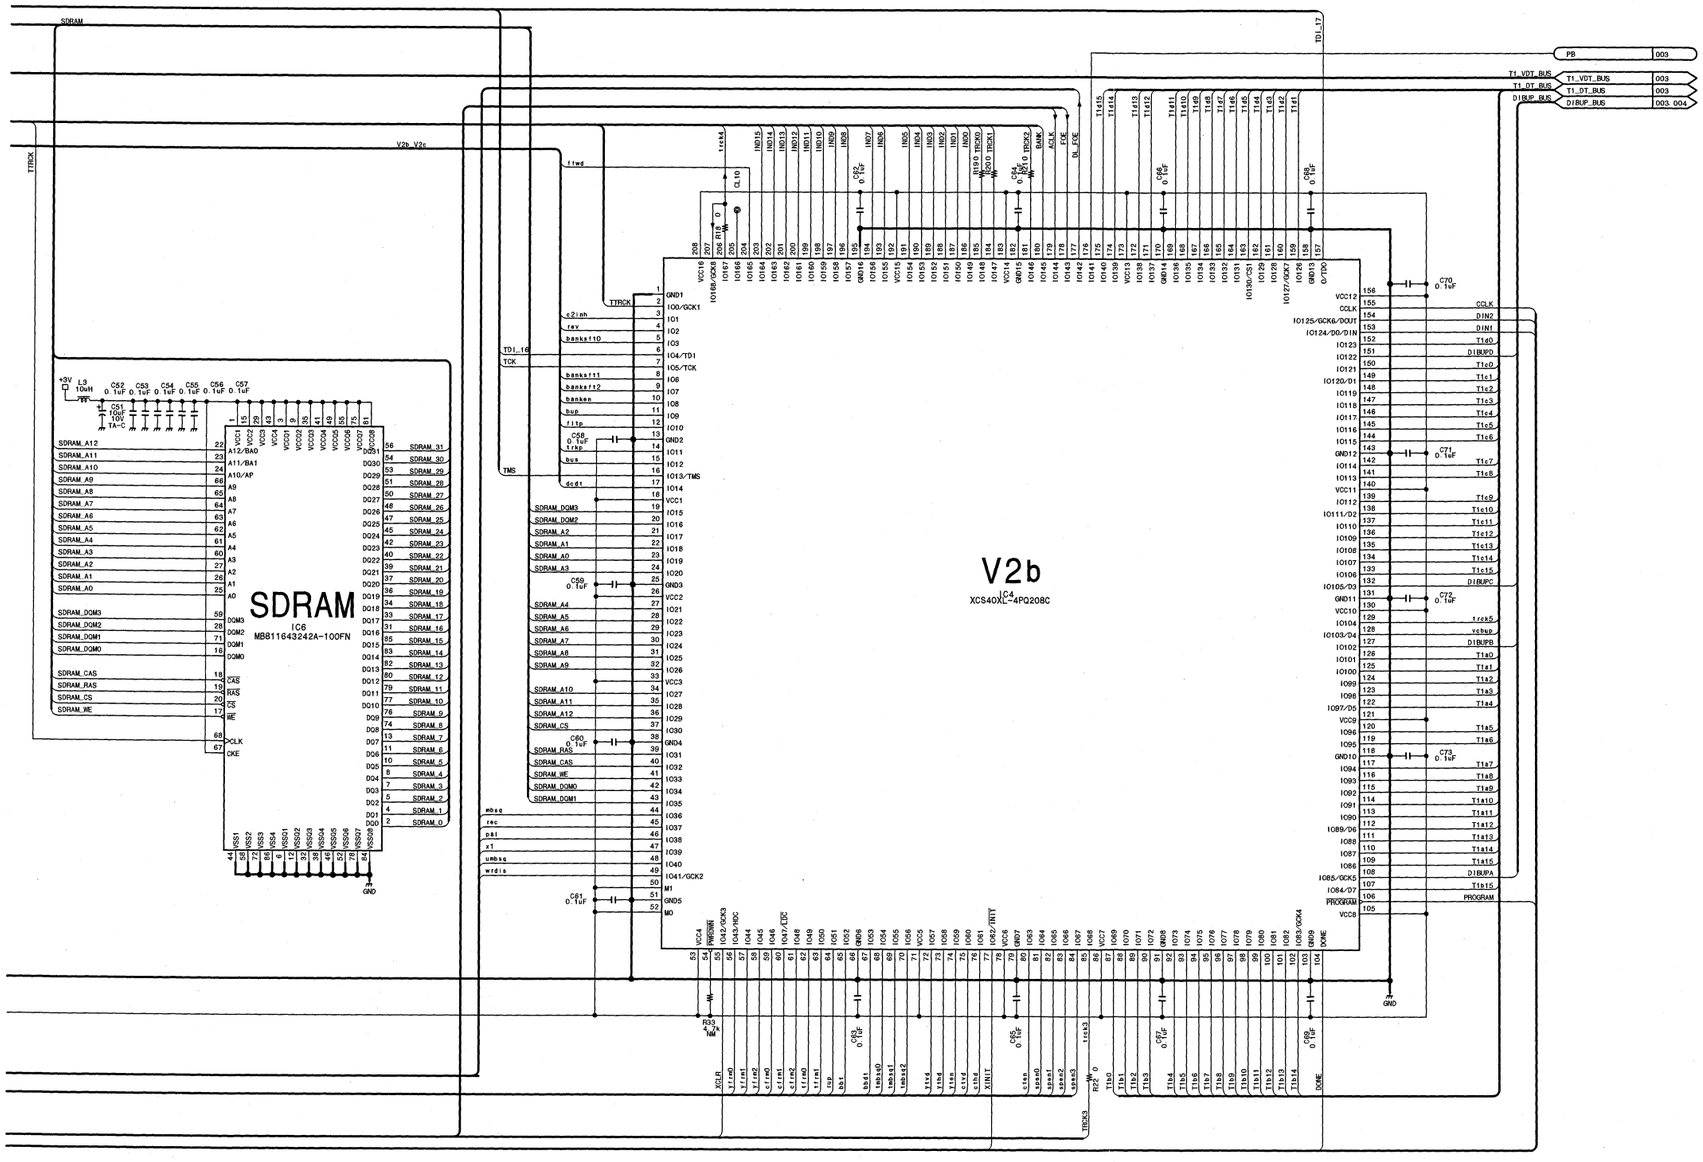

Digital process (PB)
FU-78P (2/4)

Digital process (REC)
FU-78R (2/4)
BOARD NO. 1-679-113-12
LOT NO. 113-
DSR-1800_FU-78_012_2

DSR-2000 (UC) : S/N 101241 and Higher
DSR-2000 (J) : S/N 301311 and Higher
DSR-2000P (CE) : S/N 401551 and Higher

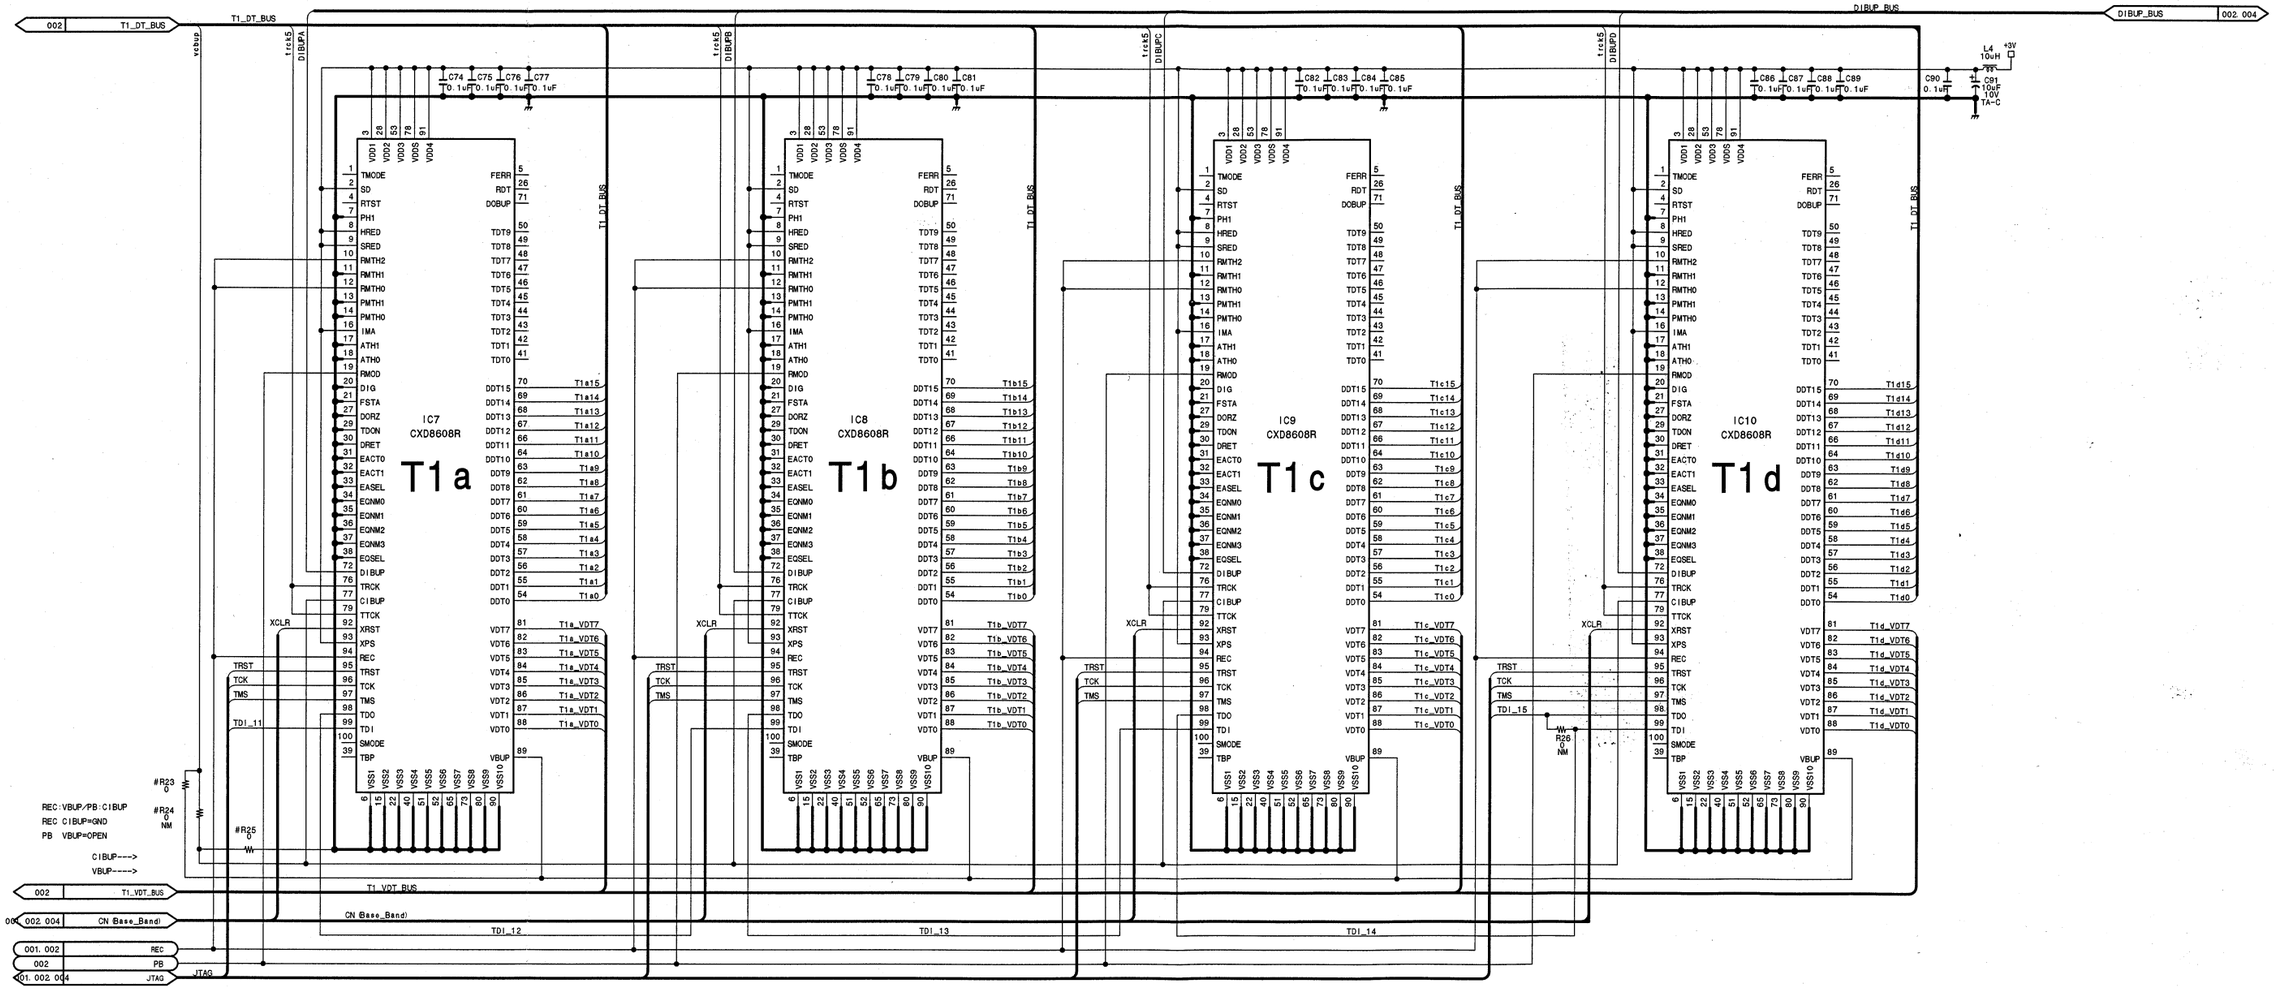

Digital process (PB)
FU-78P (3/4)

Digital process (REC)
FU-78R (3/4)
BOARD NO. 1-679-113-12
LOT NO. 113-
DSR-1800_FU-78_012_3

FU-78P/78R (4/4)

DSR-2000 (UC) : S/N 101241 and Higher
DSR-2000 (J) : S/N 301311 and Higher
DSR-2000P (CE) : S/N 401551 and Higher

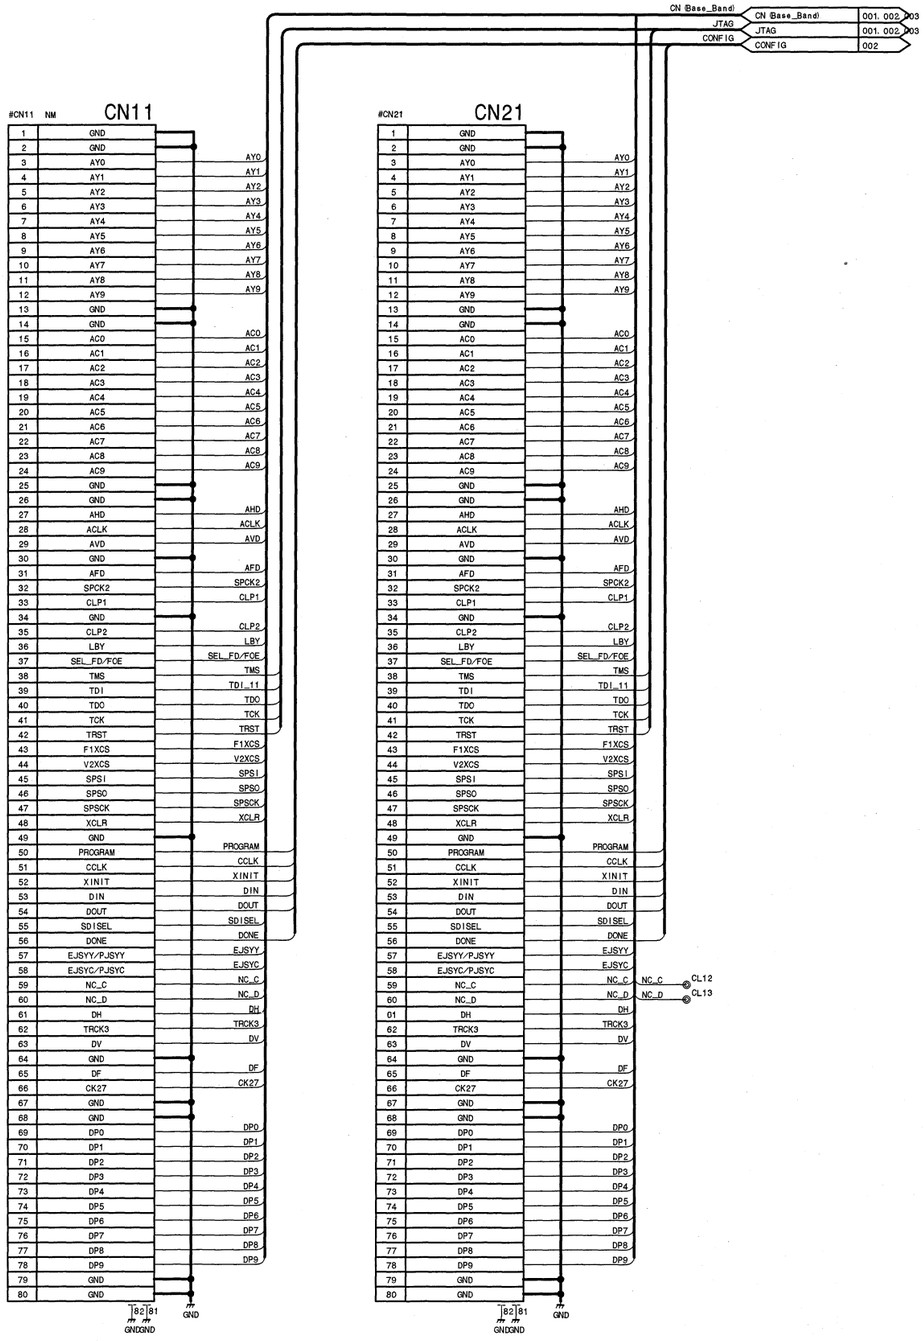

Digital process (PB)
FU-78P (4/4)

Digital process (REC)
FU-78R (4/4)

BOARD NO. 1-679-113-12
LOT NO. 113-
DSR-1800_FU-78_012_4

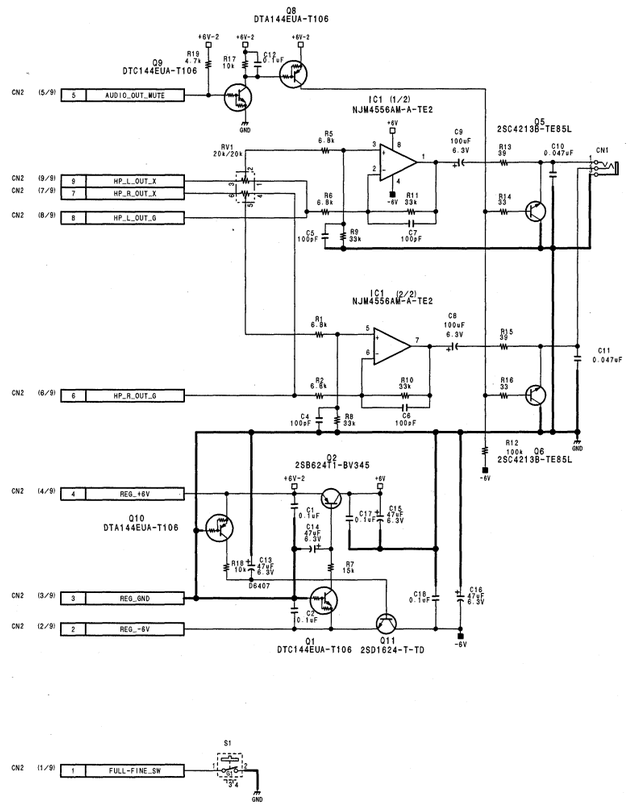

Headphone interface

HP-99

BOARD NO. 1-675-555-11, 12
LOT NO. 907-

DSR-2000_HP-99_C12_1

IF-763 (1/5)

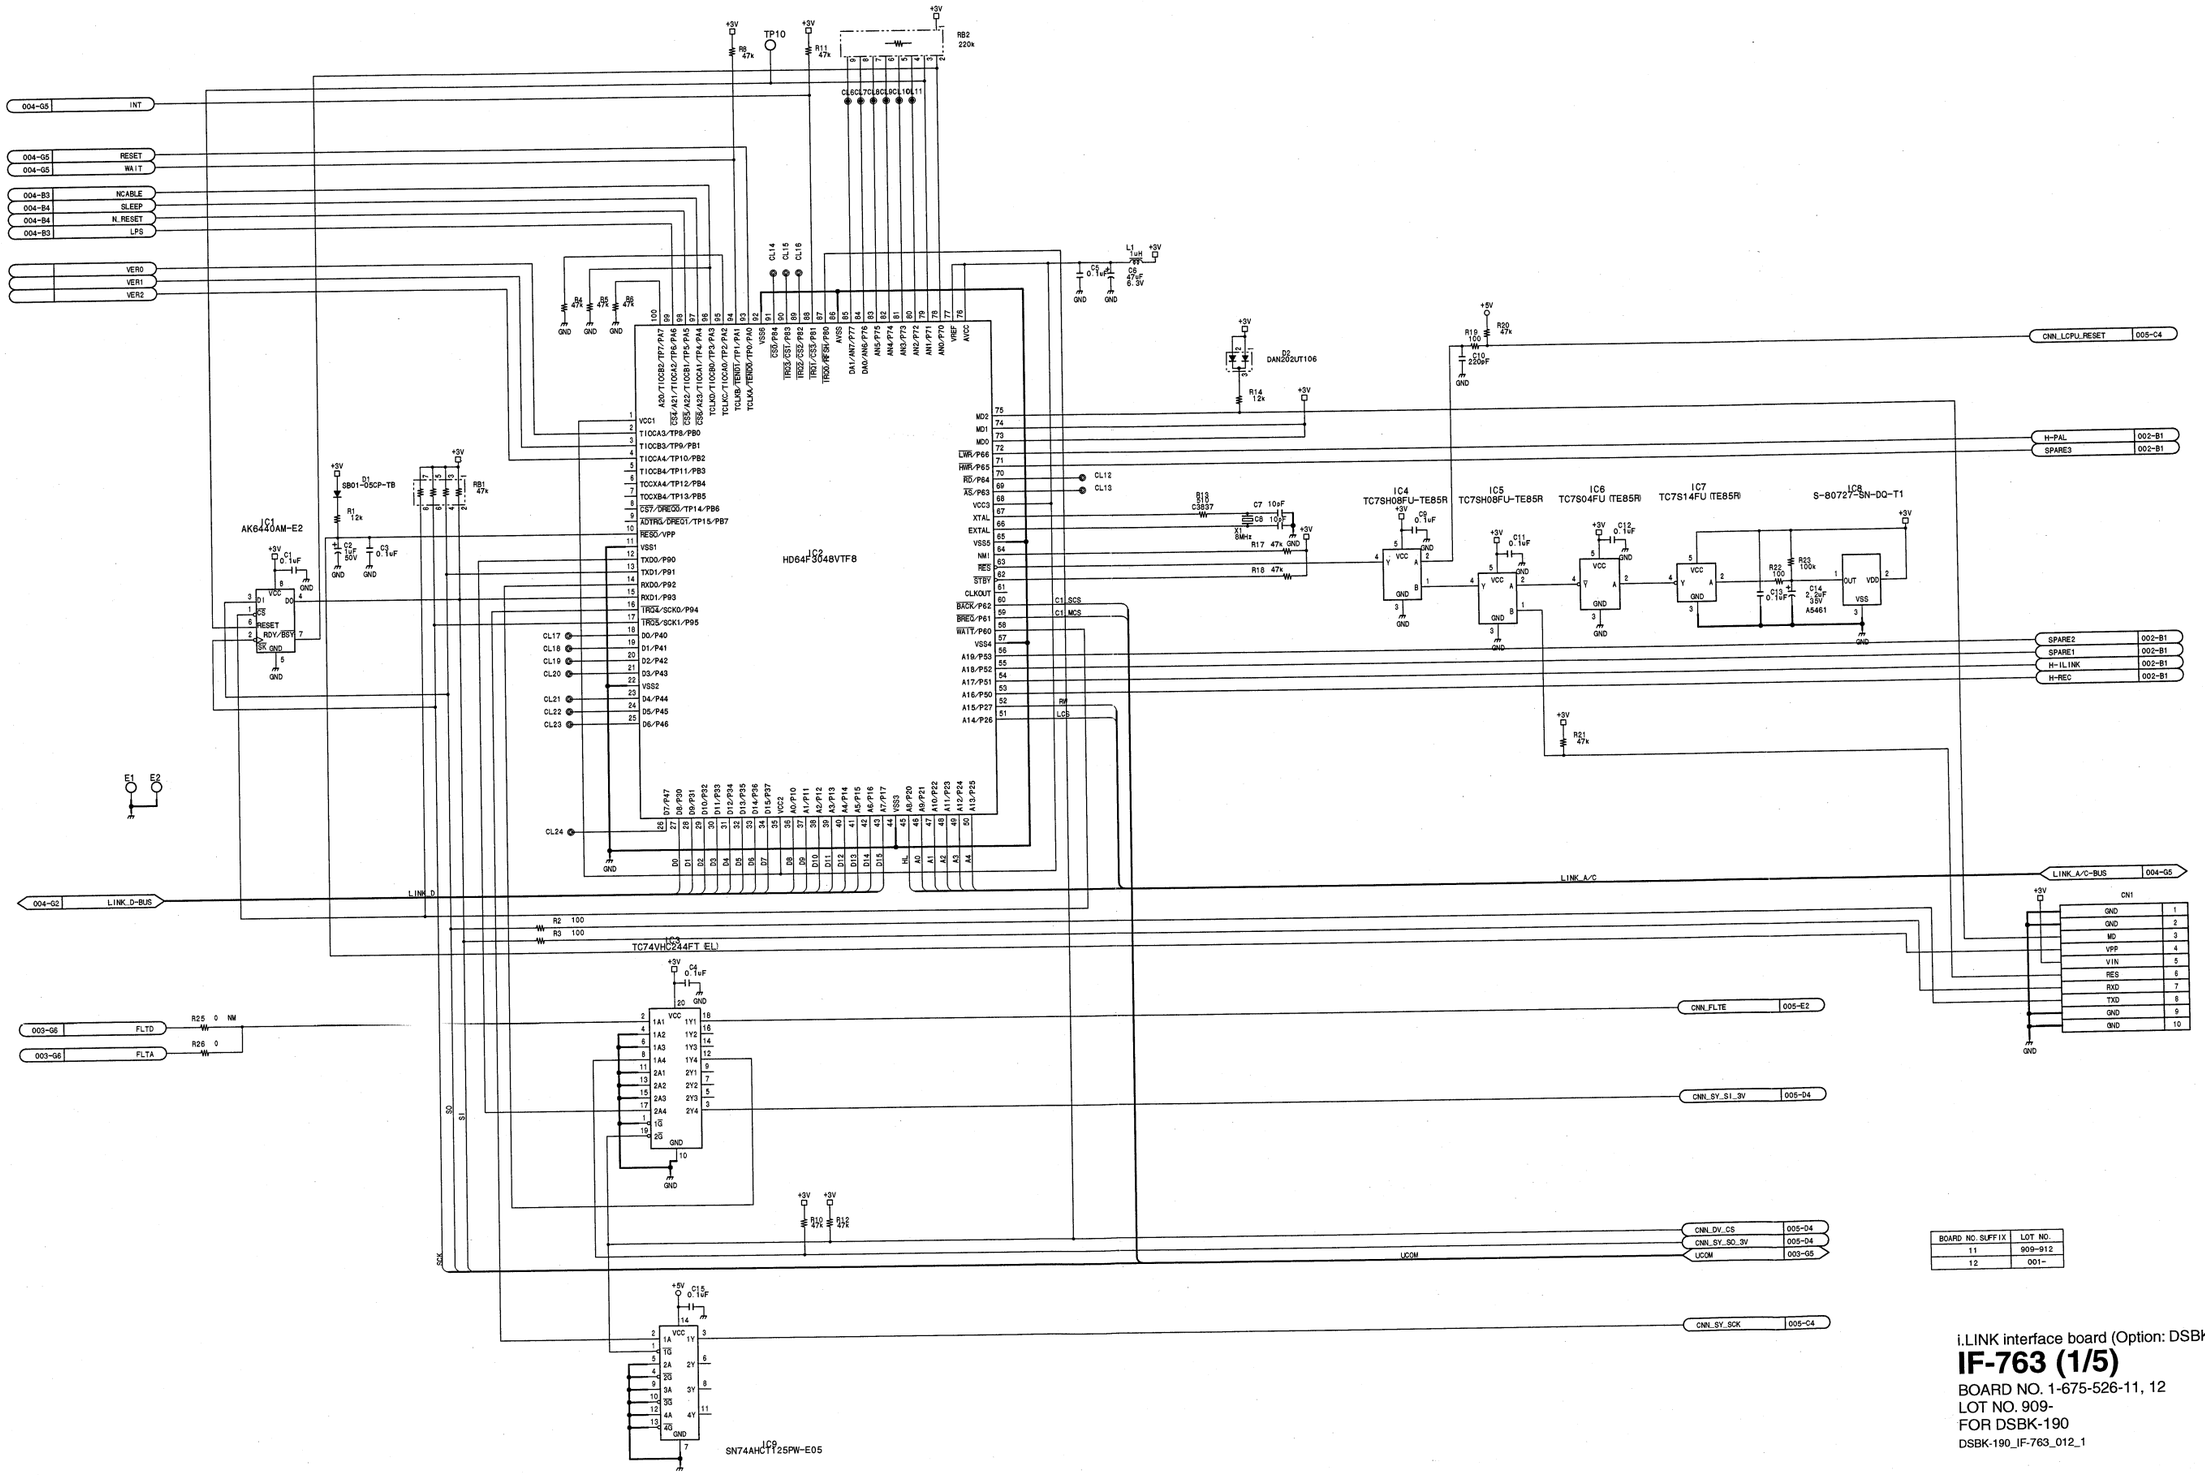

BOARD NO. SUFFIX	LOT NO.
11	909-912
12	001-

i.LINK interface board (Option: DSBK-190)

IF-763 (1/5)

BOARD NO. 1-675-526-11, 12
LOT NO. 909-
FOR DSBK-190

DSBK-190_IF-763_012_1

IF-763 (2/5)

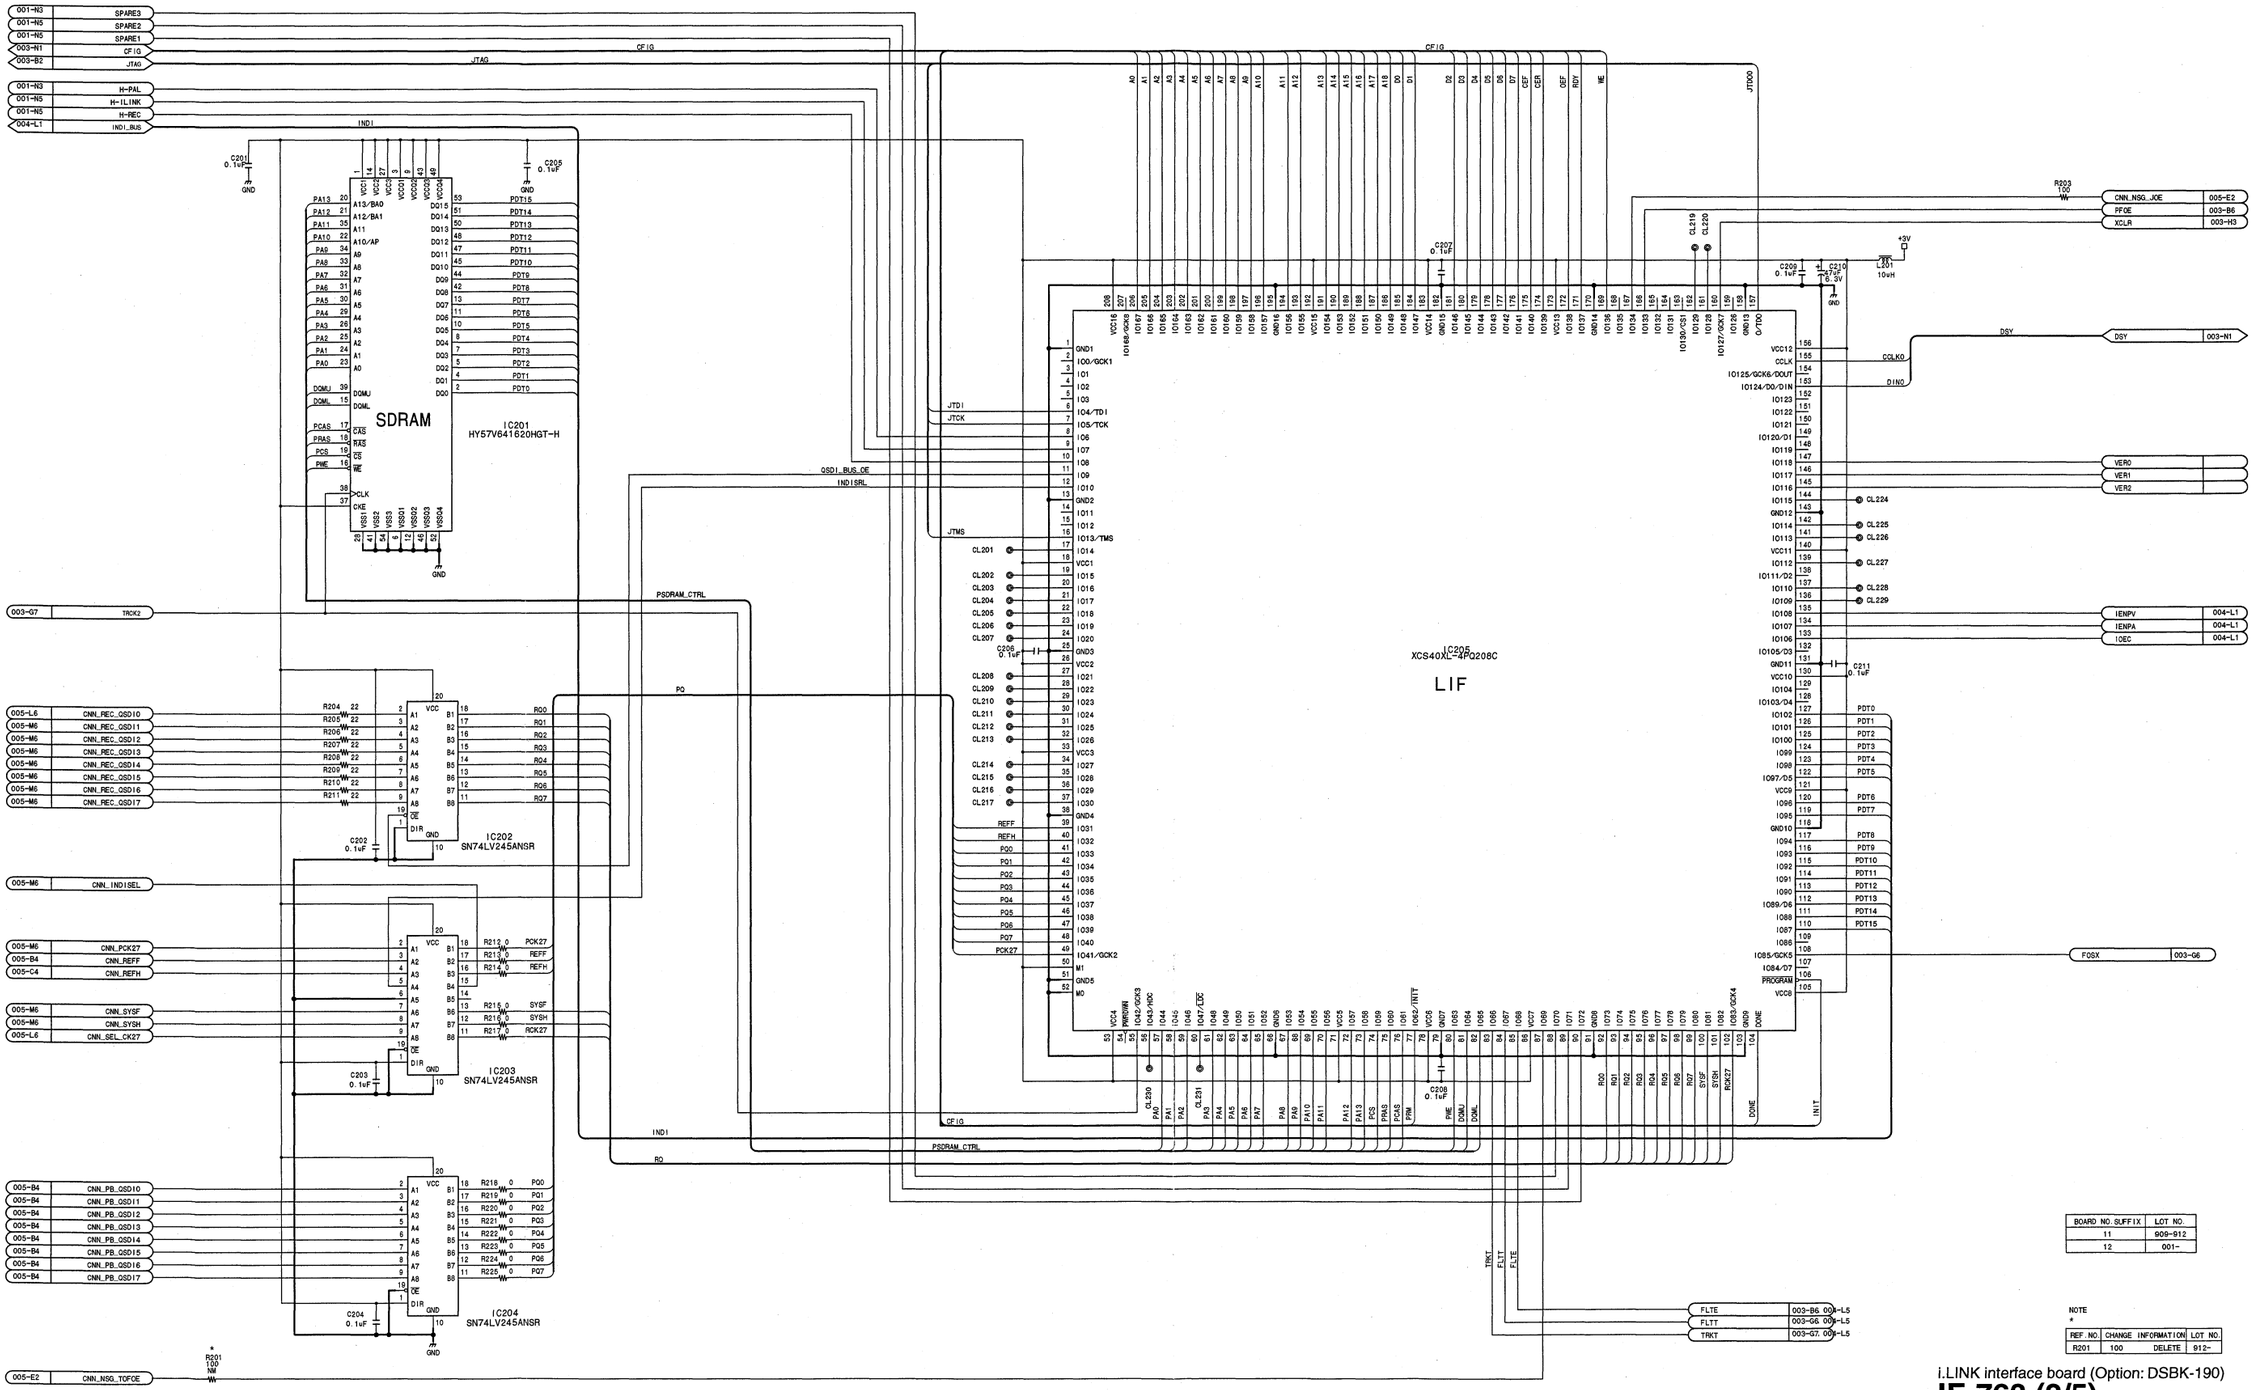

BOARD NO. SUFFIX	LOT NO.
11	909-912
12	001-

NOTE
*

REF. NO.	CHANGE INFORMATION	LOT NO.
R201	100 DELETE	912-

i.LINK interface board (Option: DSBK-190)

IF-763 (2/5)

BOARD NO. 1-675-526-11, 12
LOT NO. 909-
FOR DSBK-190

DSBK-190_IF-763_012_2

15-80

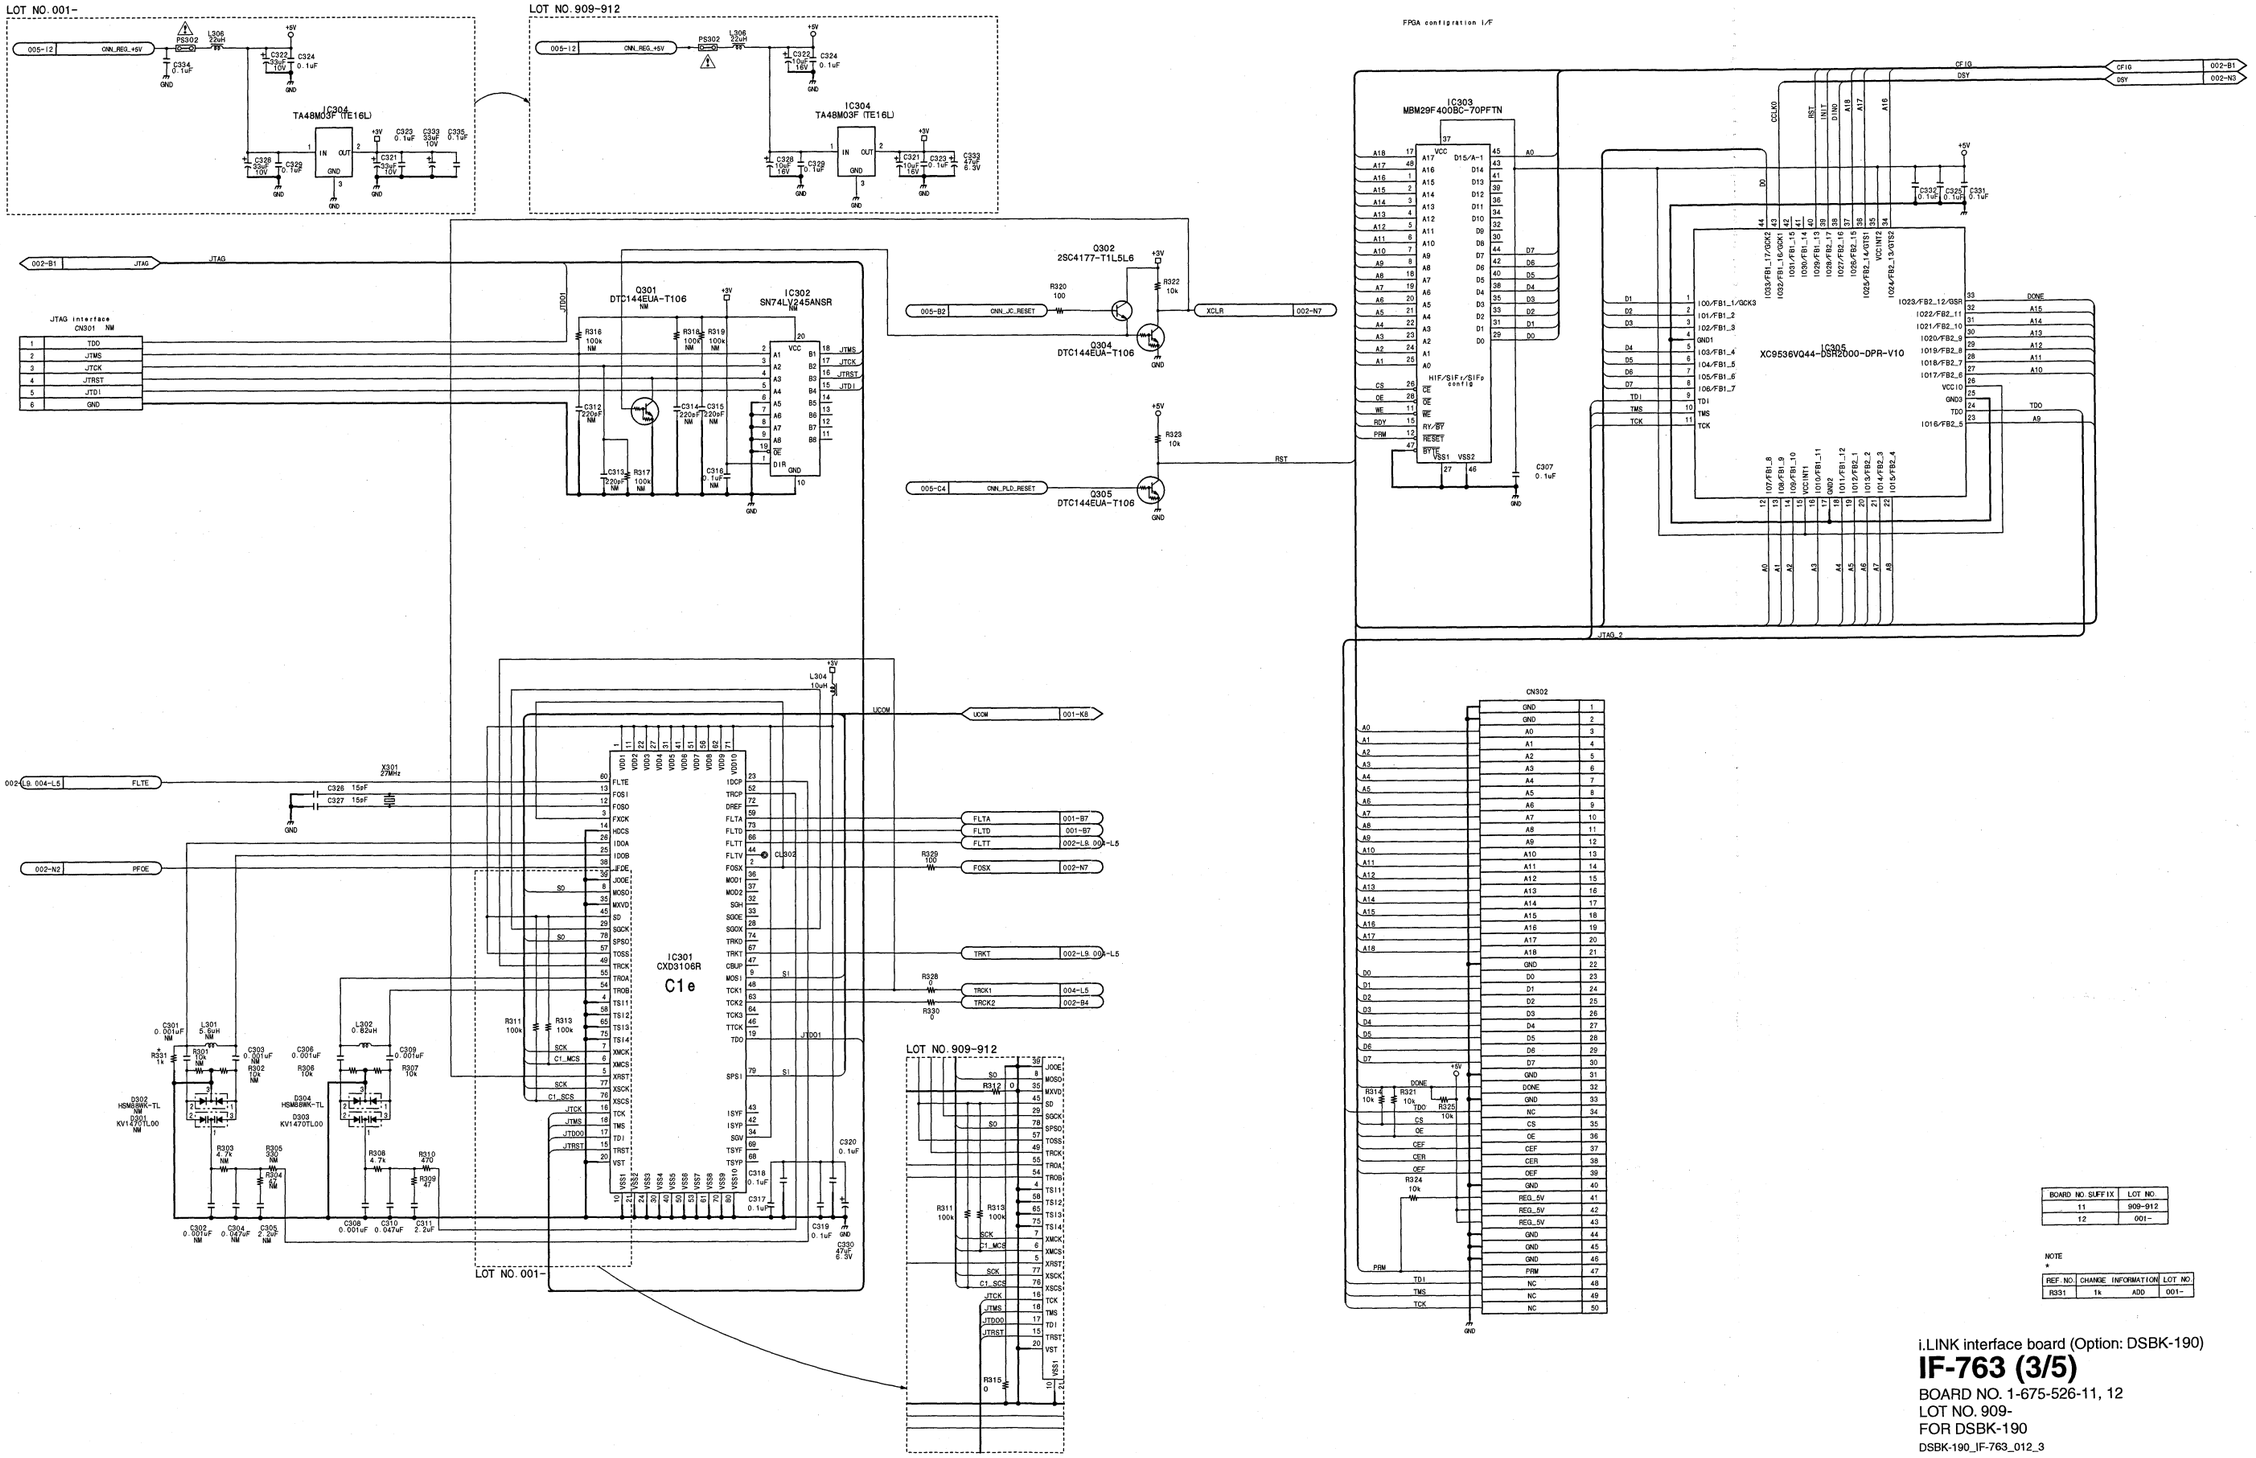

BOARD NO. SUFFIX	LOT NO.
11	909-912
12	001-

NOTE
*

REF. NO.	CHANGE INFORMATION	LOT NO.
R331	1k ADD	001-

i.LINK interface board (Option: DSBK-190)

IF-763 (3/5)

BOARD NO. 1-675-526-11, 12
LOT NO. 909-
FOR DSBK-190
DSBK-190_IF-763_012_3

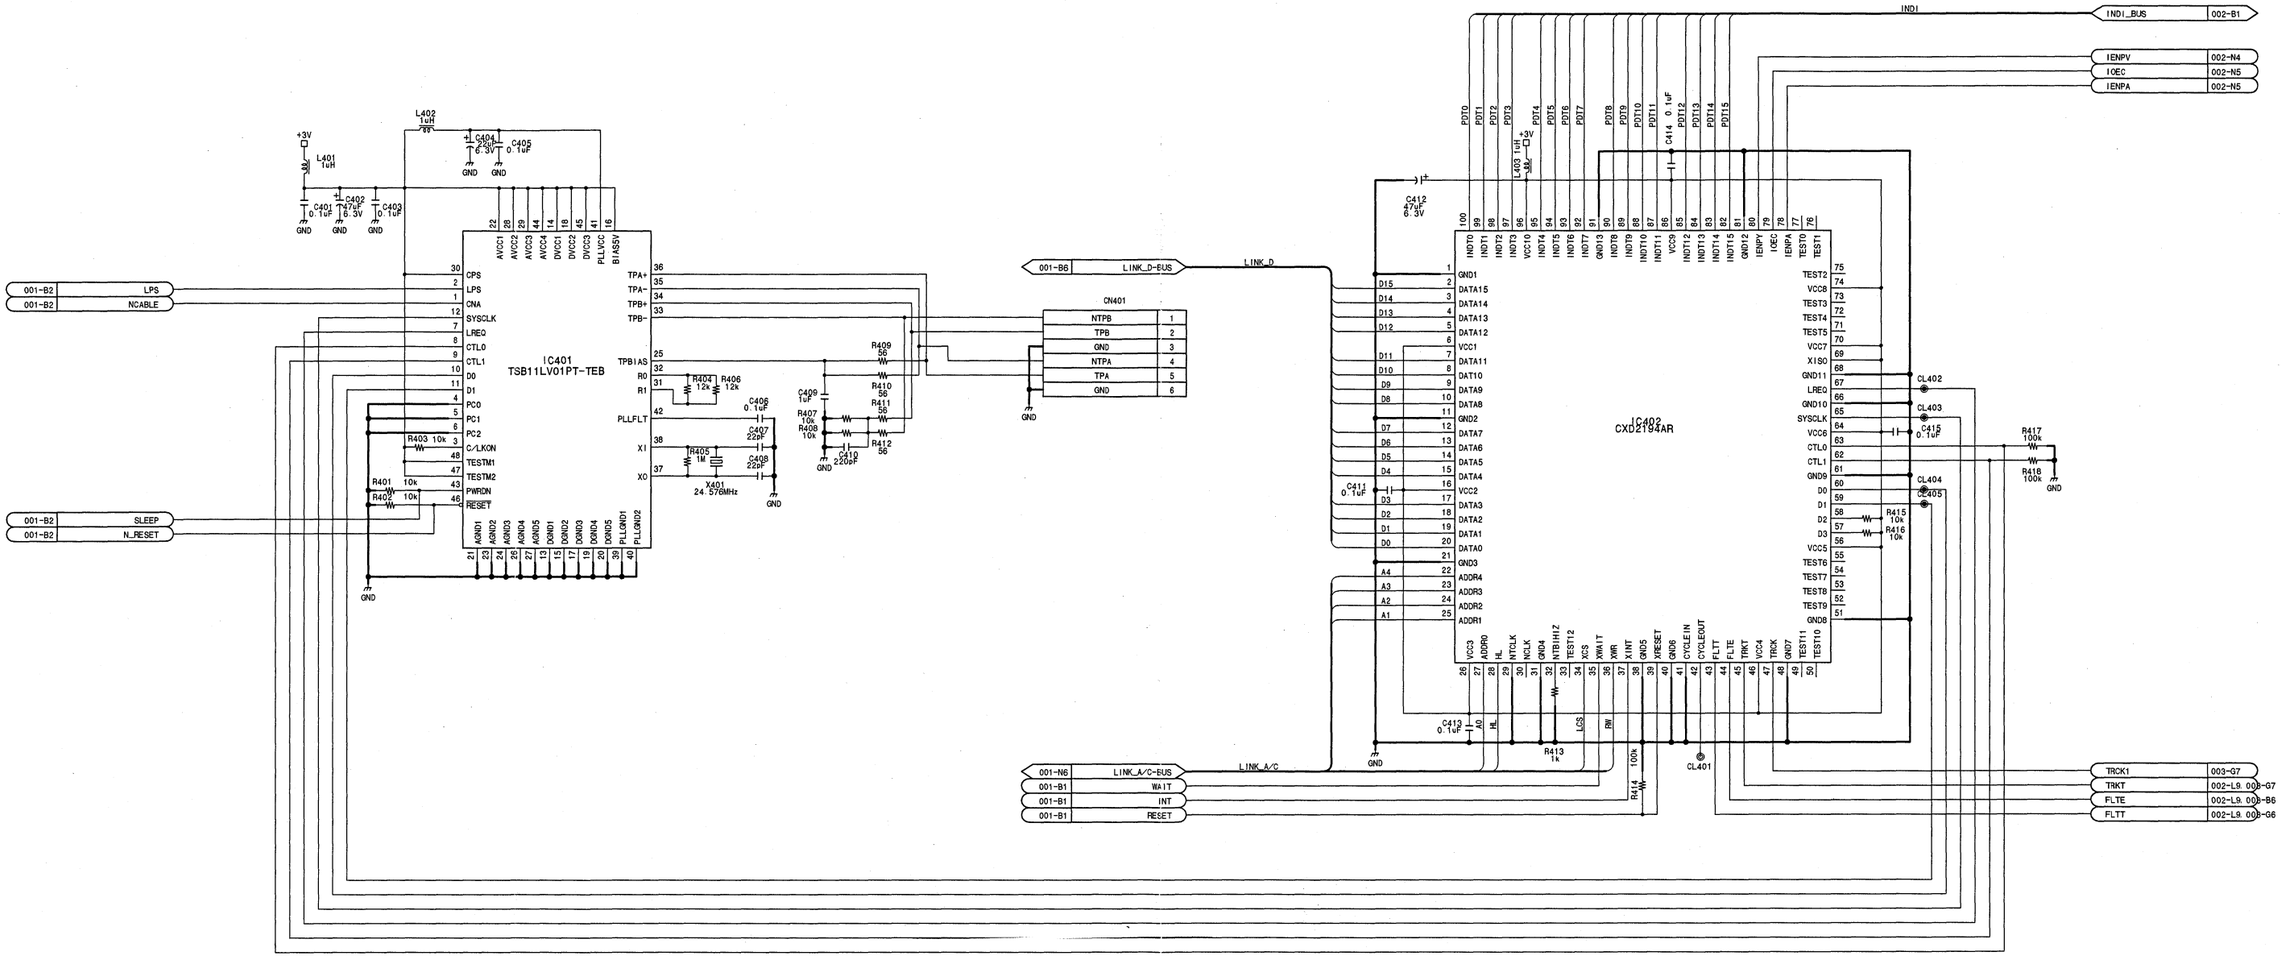

BOARD NO. SUFFIX	LOT NO.
11	909-912
12	001-

i.LINK interface board (Option: DSBK-190)

IF-763 (4/5)

BOARD NO. 1-675-526-11, 12
LOT NO. 909-
FOR DSBK-190

DSBK-190_IF-763_012_4

IF-763 (5/5)

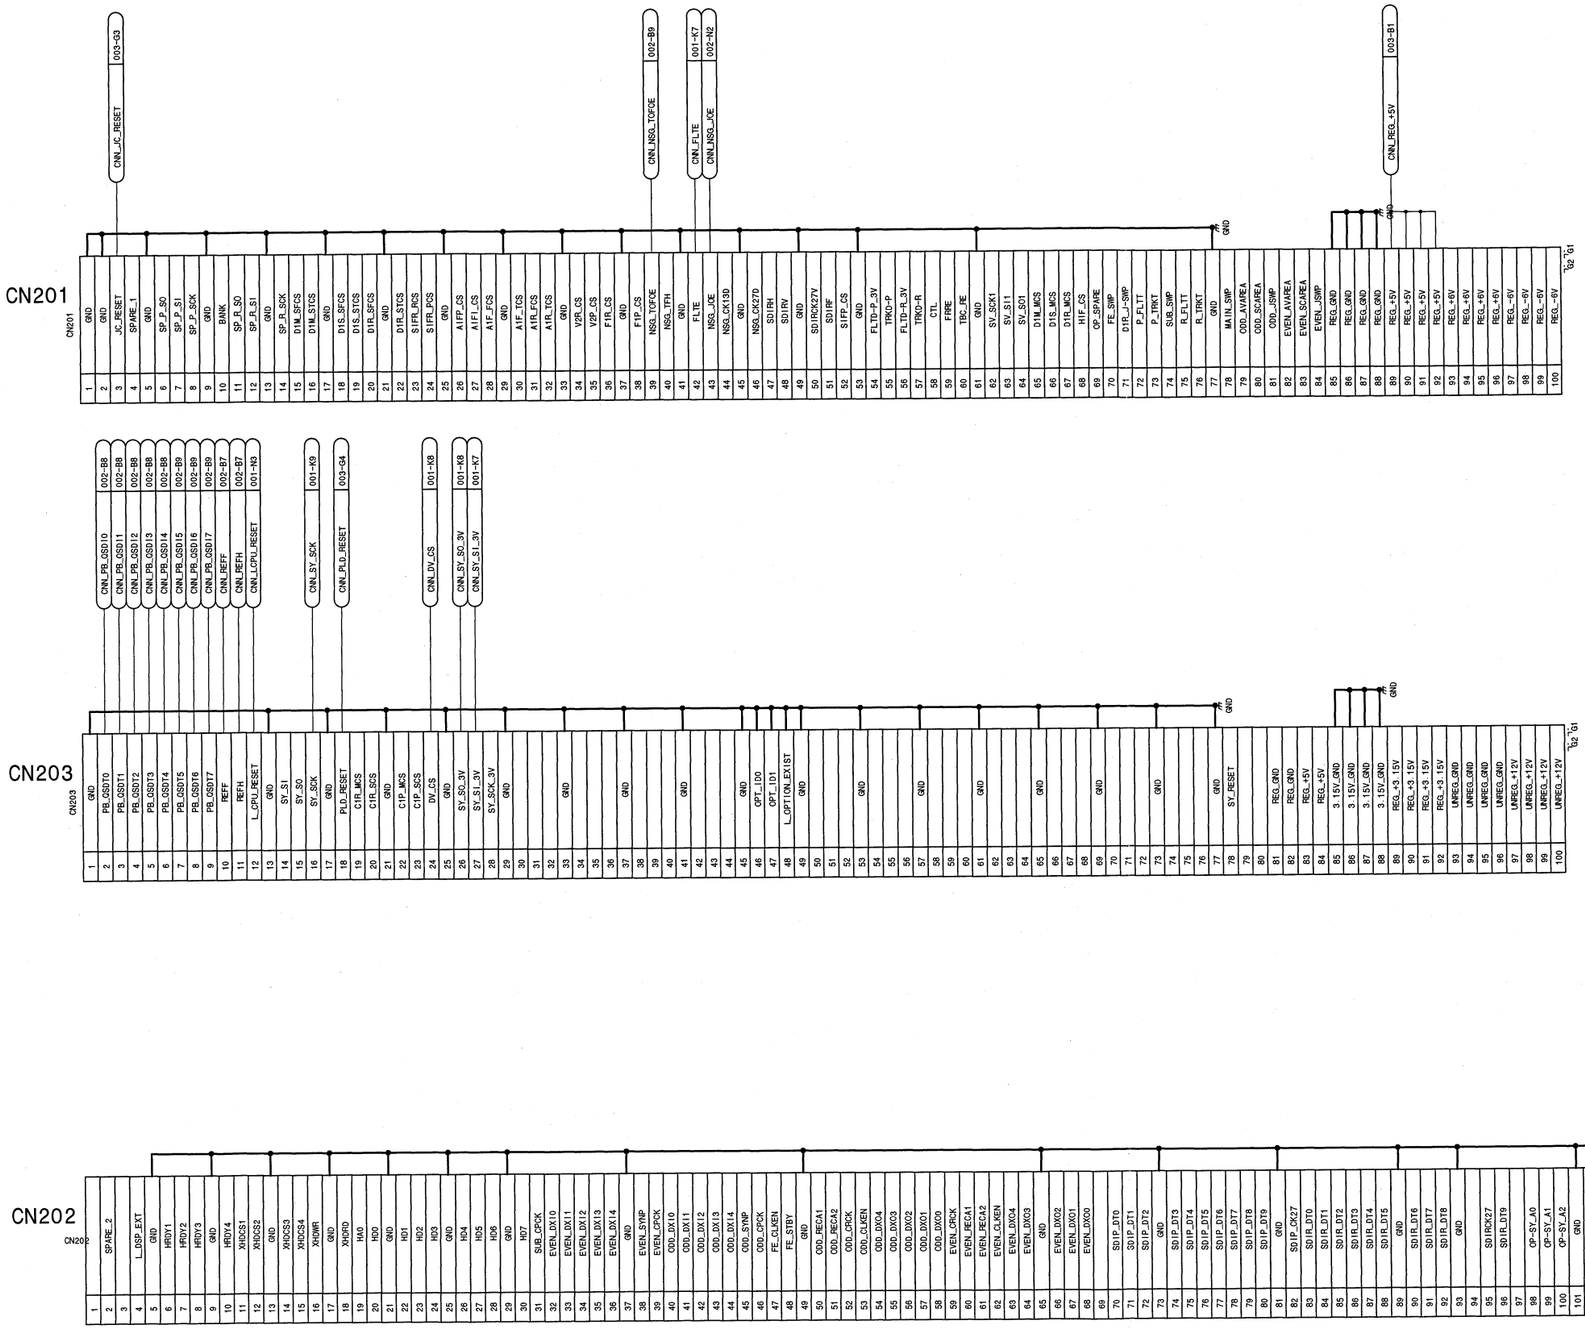

BOARD NO. SUFFIX	LOT NO.
11	909-912
12	001~

i.LINK interface board (Option: DSBK-190)

IF-763 (5/5)

BOARD NO. 1-675-526-11, 12
LOT NO. 909-
FOR DSBK-190
DSBK-190_IF-763_012_5

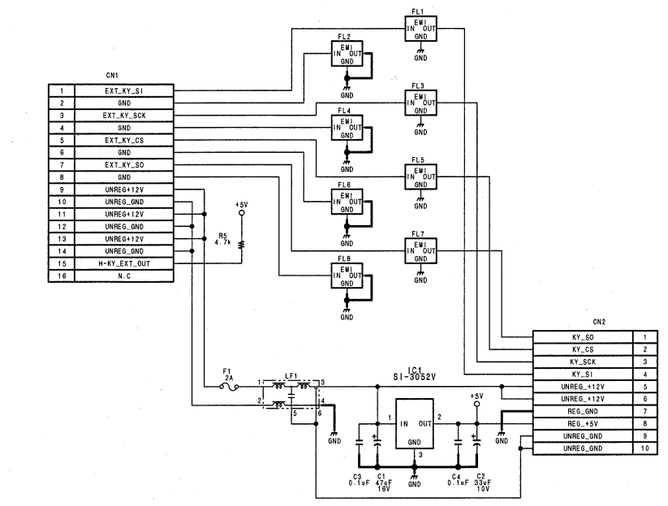

Operation panel intermediate board (Option: DSBK-200)

IF-778

BOARD NO. 1-676-646-11
LOT NO. 910-
FOR DSBK-200

DSBK-200_IF-778_C11_1

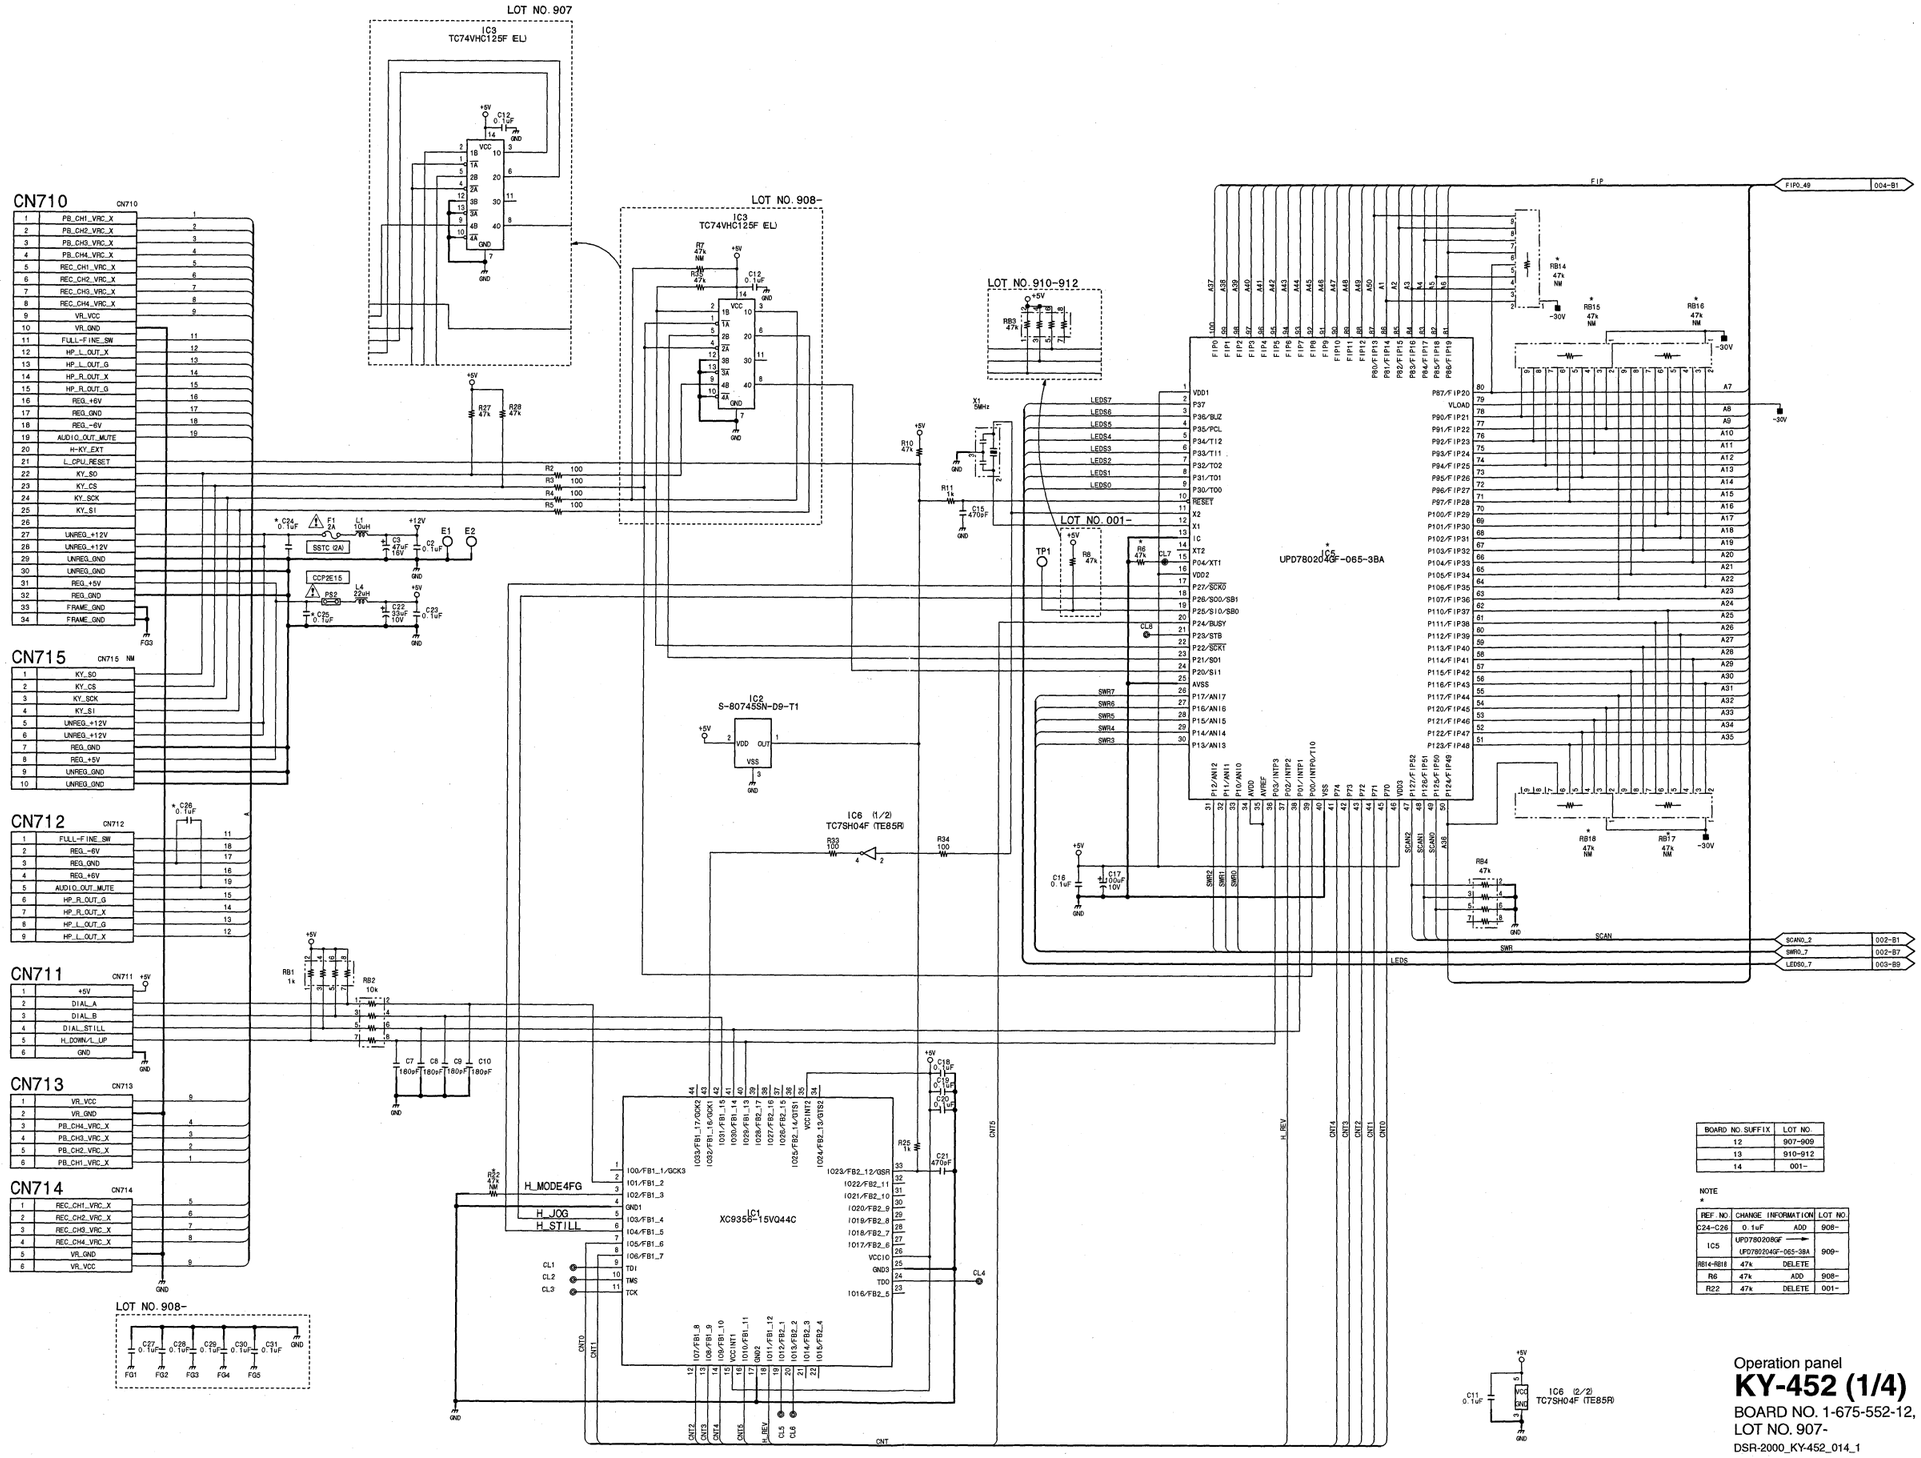

BOARD NO. SUFFIX	LOT NO.
12	907-909
13	910-912
14	001-

NOTE
*

REF. NO.	CHANGE INFORMATION	LOT NO.
C24-C26	0.1uF ADD	908-
IC5	UPD78020GF → UPD78020GF-065-3BA	909-
RB14-RB18	47k DELETE	
R6	47k ADD	908-
R22	47k DELETE	001-

Operation panel
KY-452 (1/4)
BOARD NO. 1-675-552-12, 13, 14
LOT NO. 907-
DSR-2000_KY-452_014_1

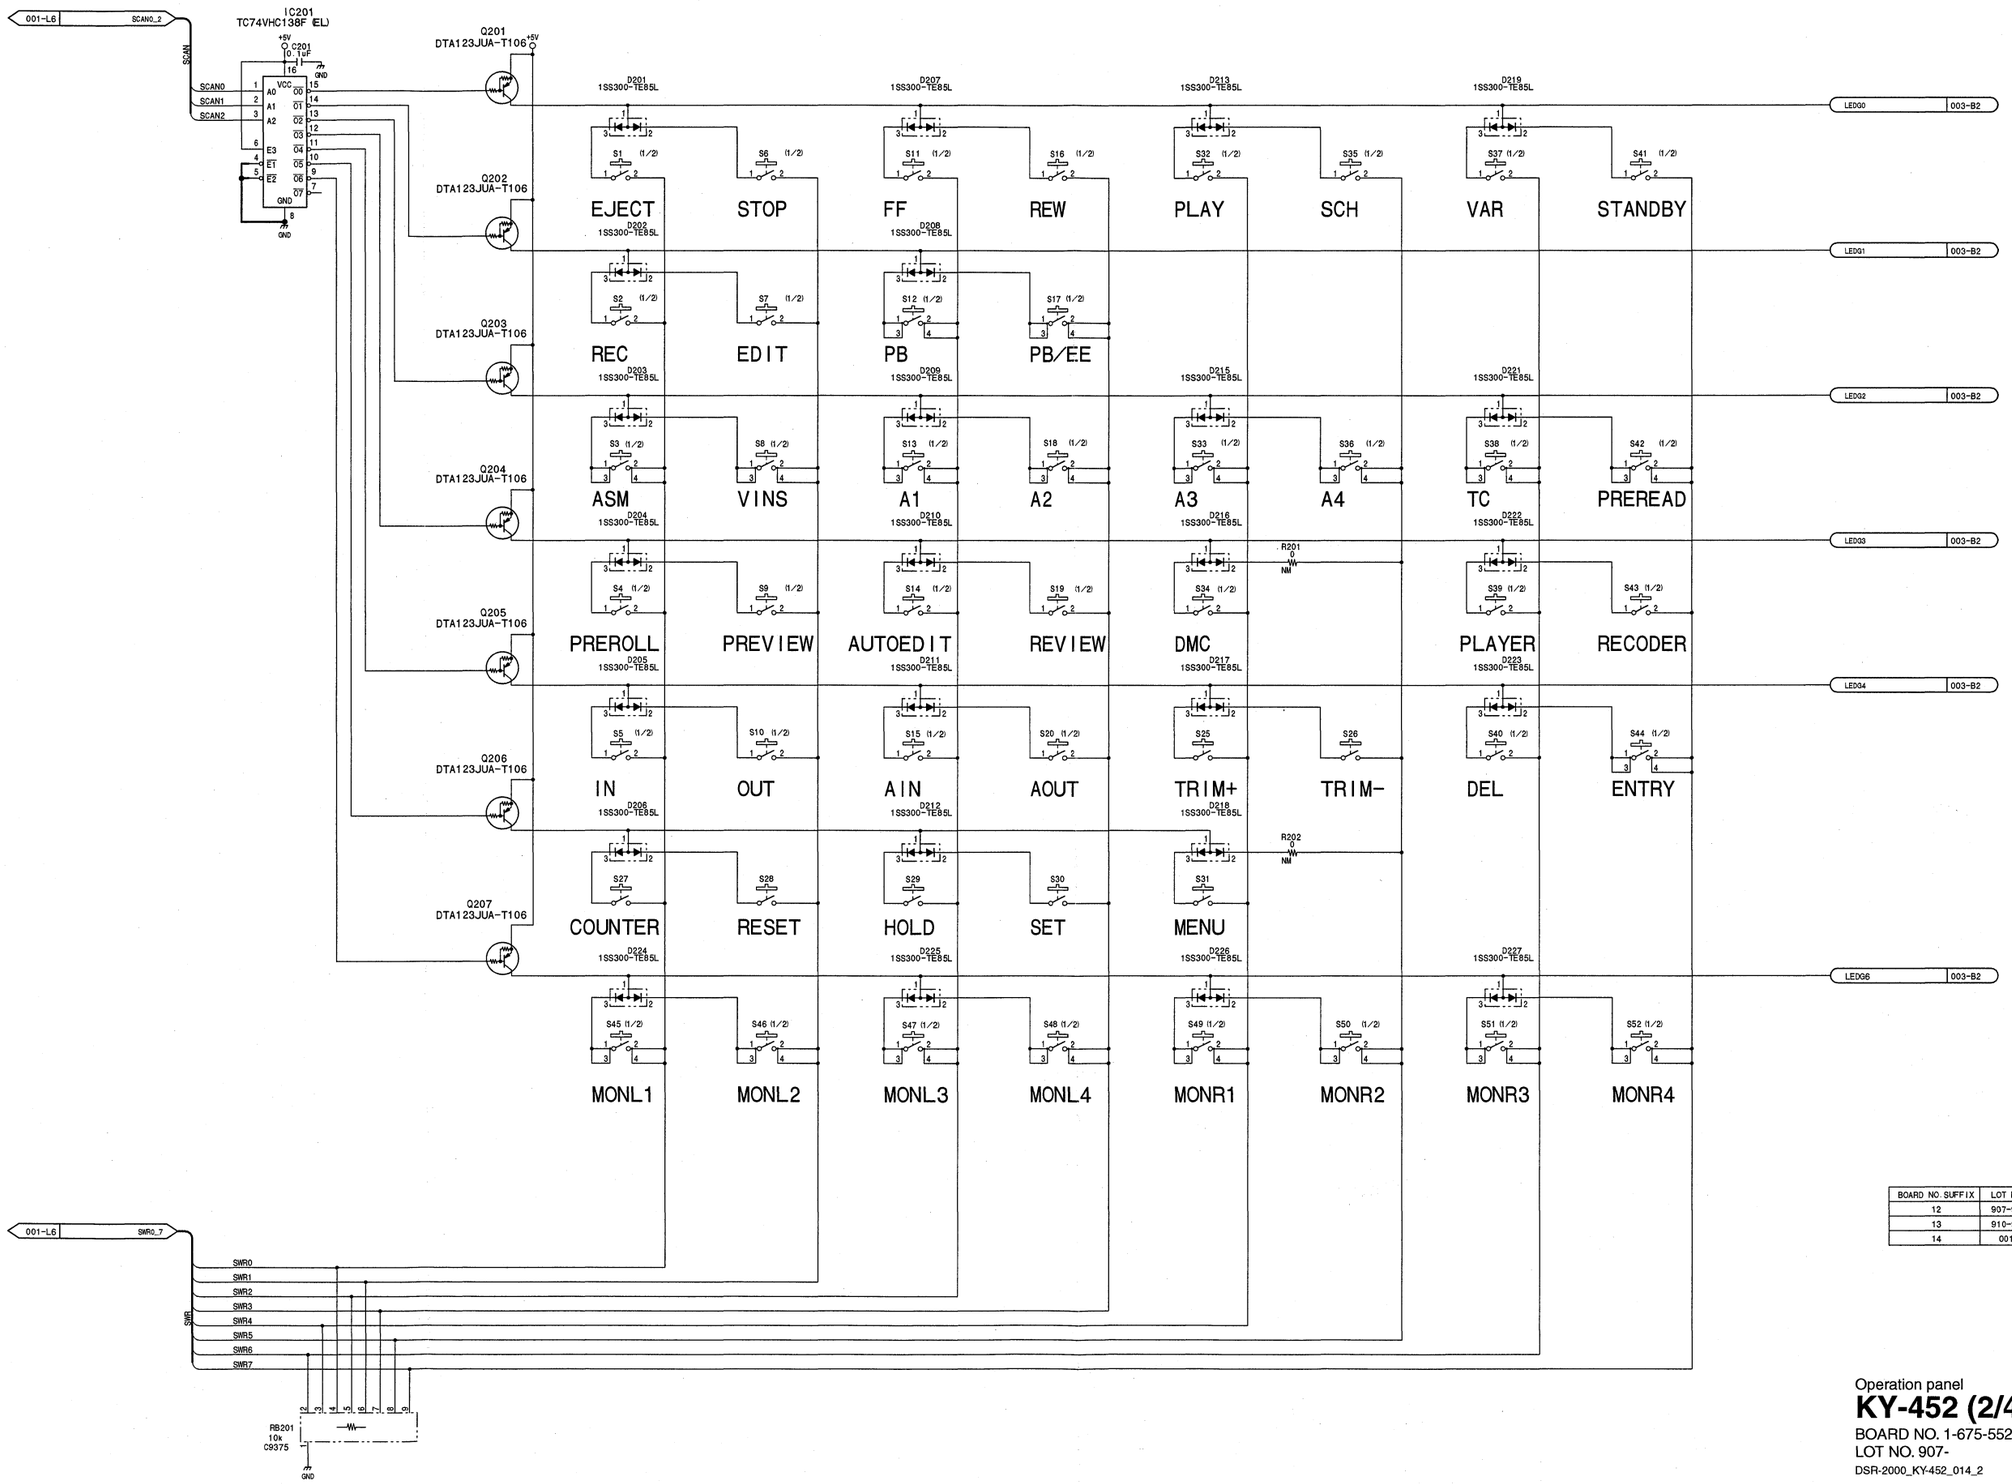

BOARD NO. SUFFIX	LOT NO.
12	907-909
13	910-912
14	001-

Operation panel

KY-452 (2/4)

BOARD NO. 1-675-552-12, 13, 14

LOT NO. 907-

DSR-2000_KY-452_014_2

KY-452 (3/4)

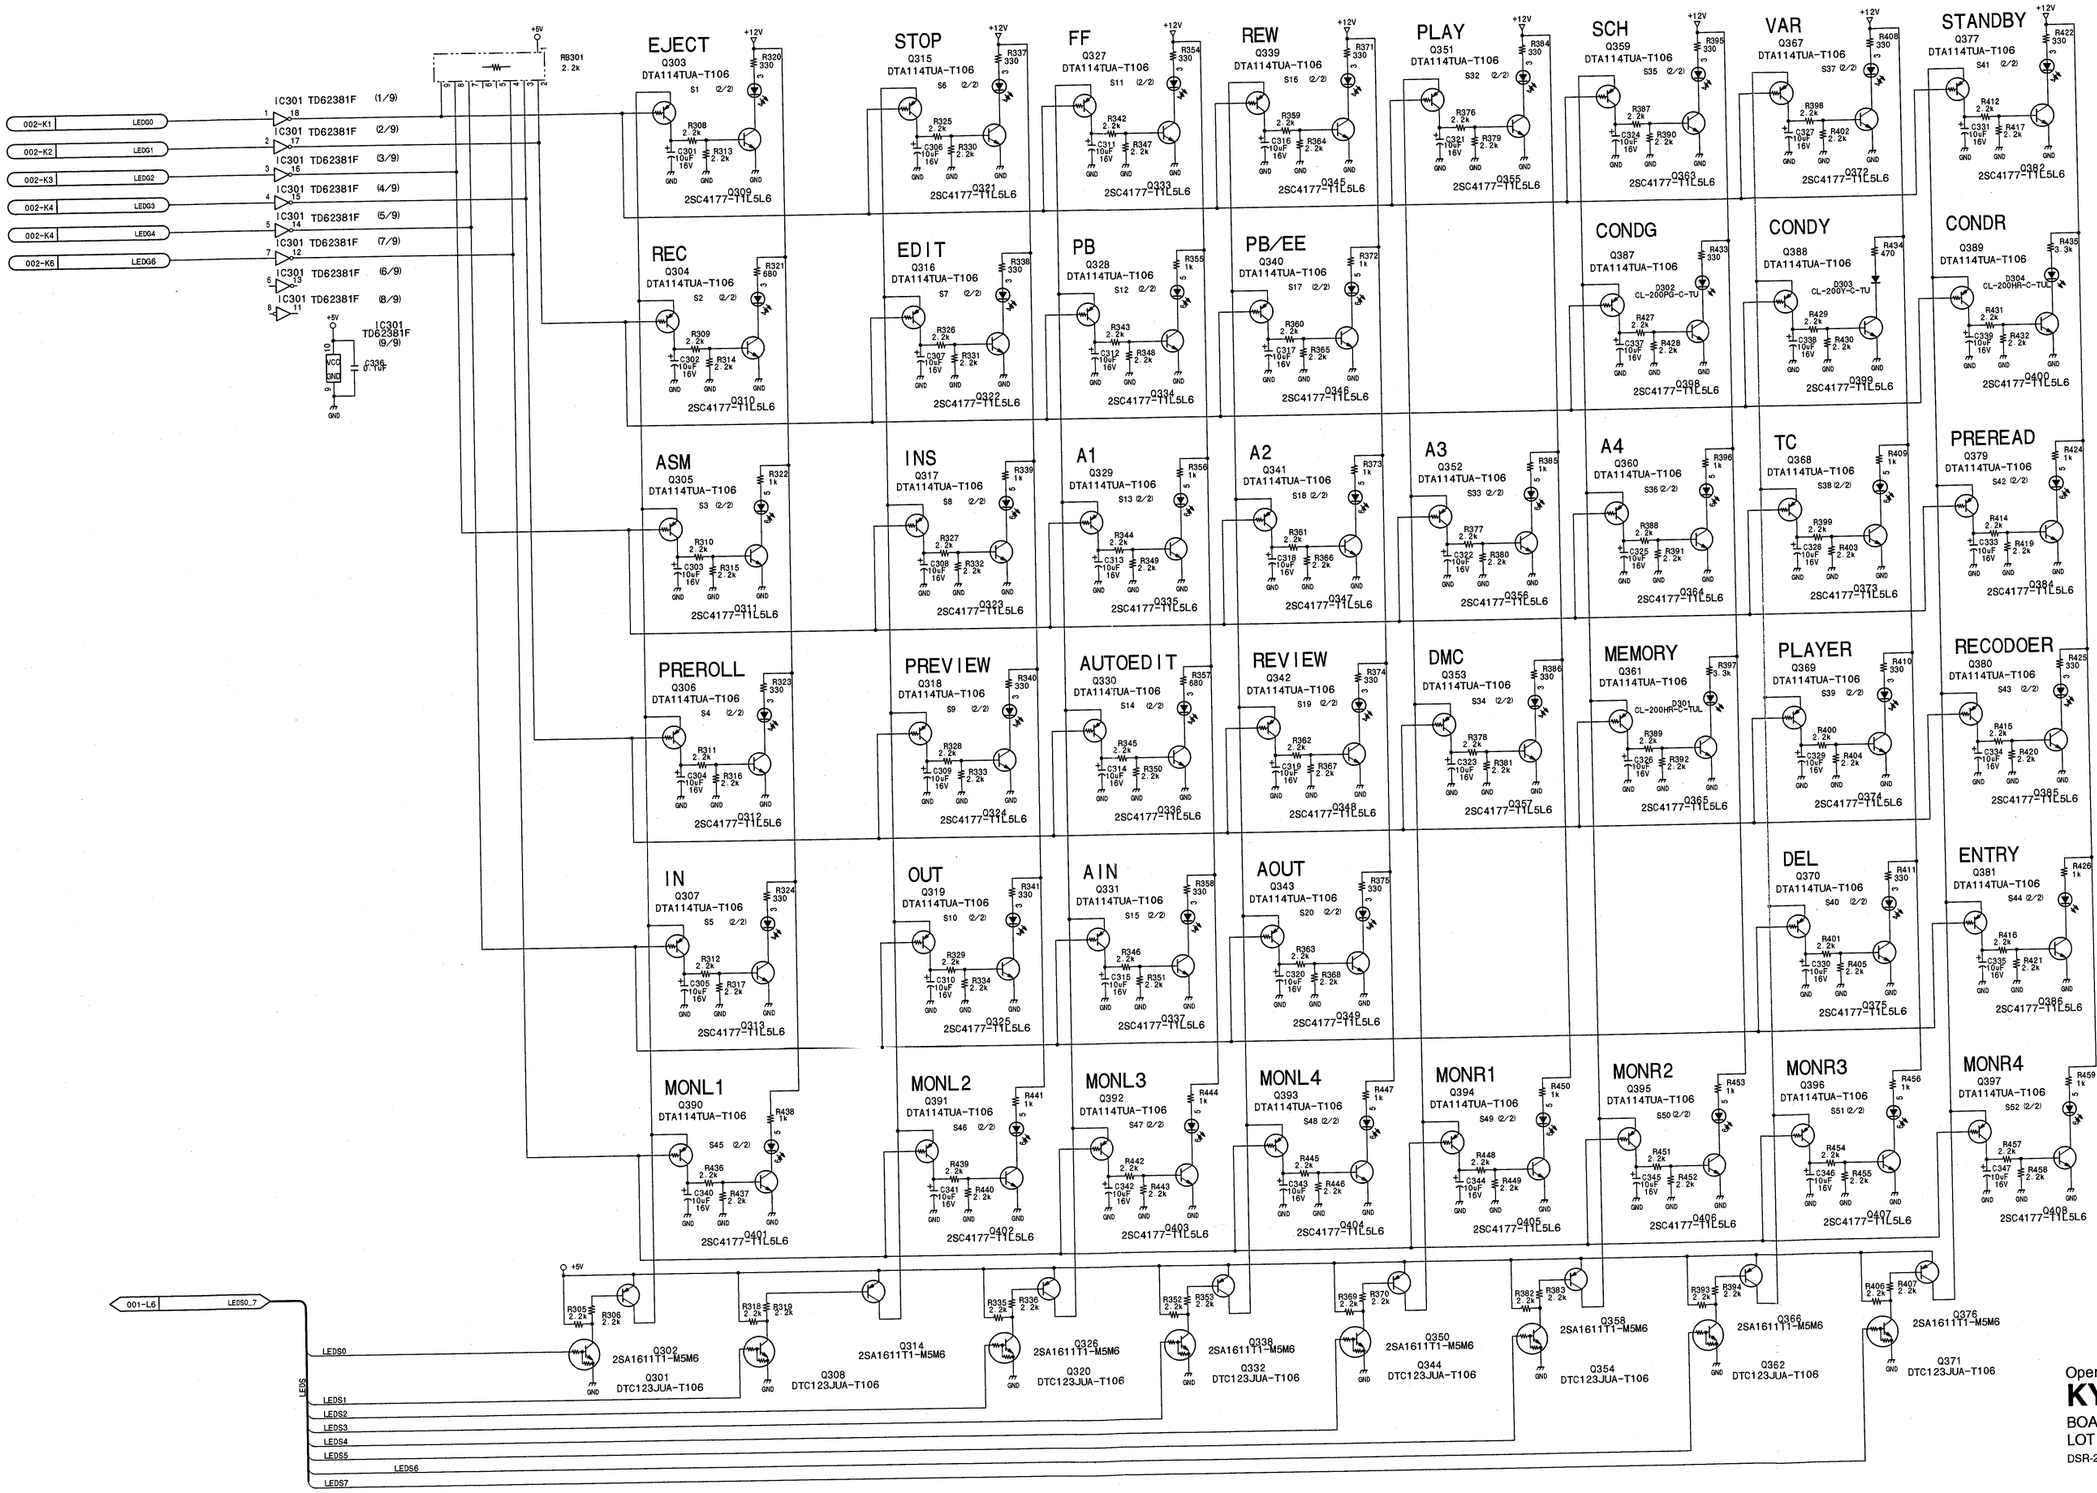

BOARD NO. SUFFIX	LOT NO.
12	907-909
13	910-912
14	001-

Operation panel
KY-452 (3/4)
BOARD NO. 1-675-552-12, 13, 14
LOT NO. 907-
DSR-2000_KY-452_014_3

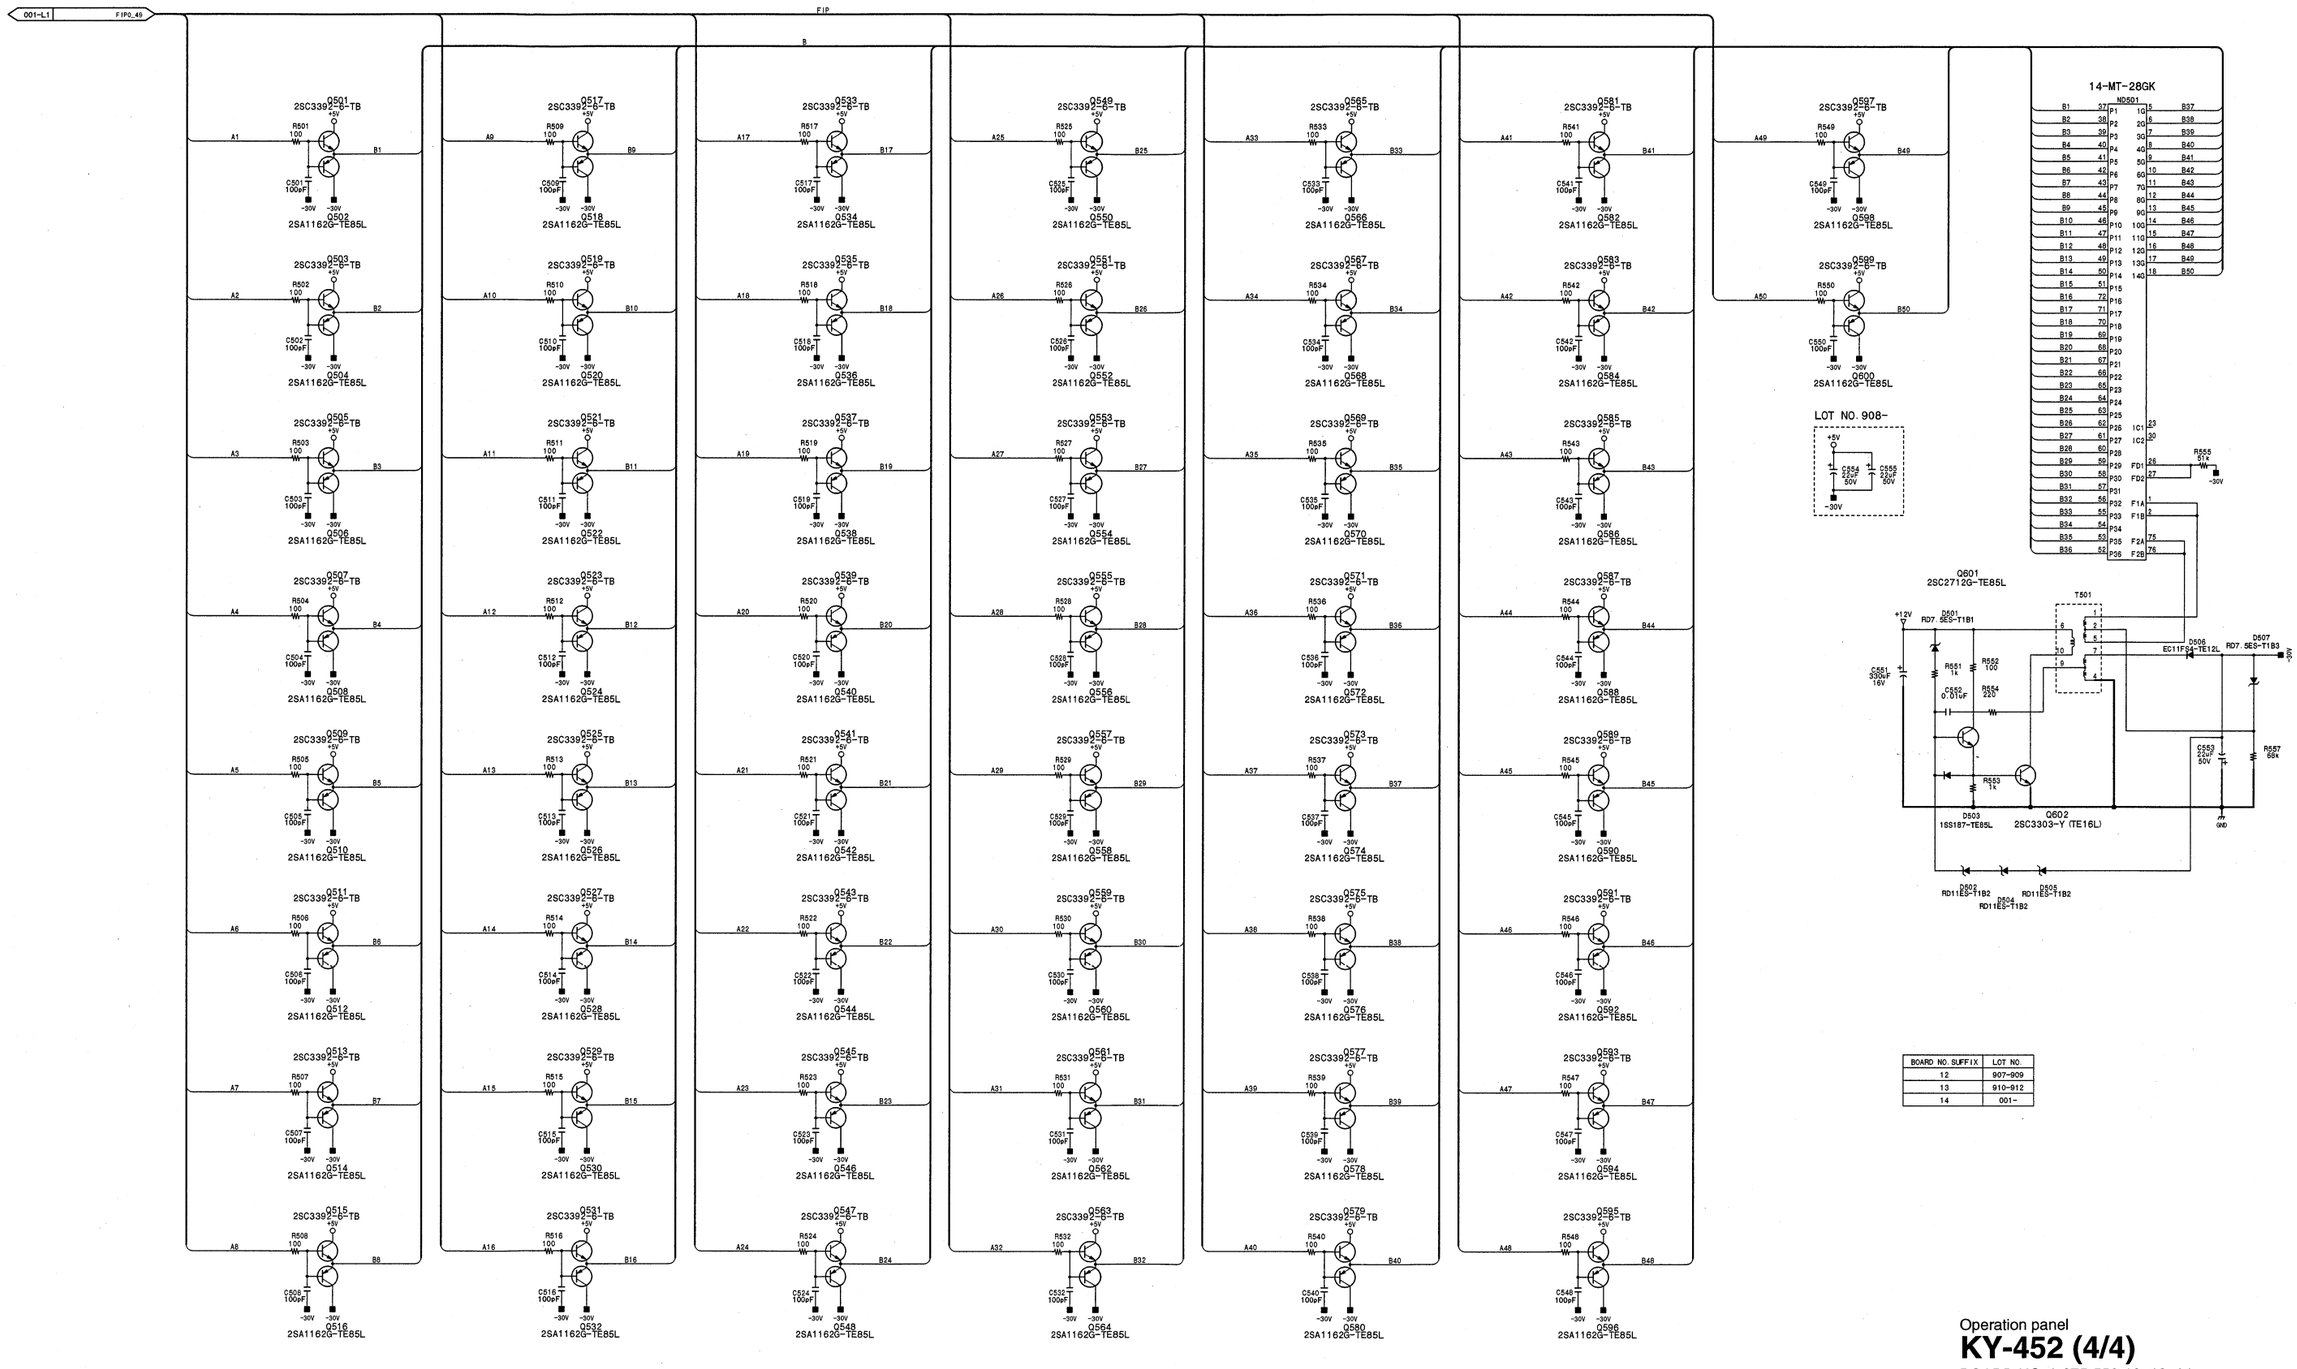

BOARD NO. SUFFIX	LOT NO.
12	907-909
13	910-912
14	001-

Operation panel

KY-452 (4/4)

BOARD NO. 1-675-552-12, 13, 14

LOT NO. 907-

DSR-2000_KY-452_014_4

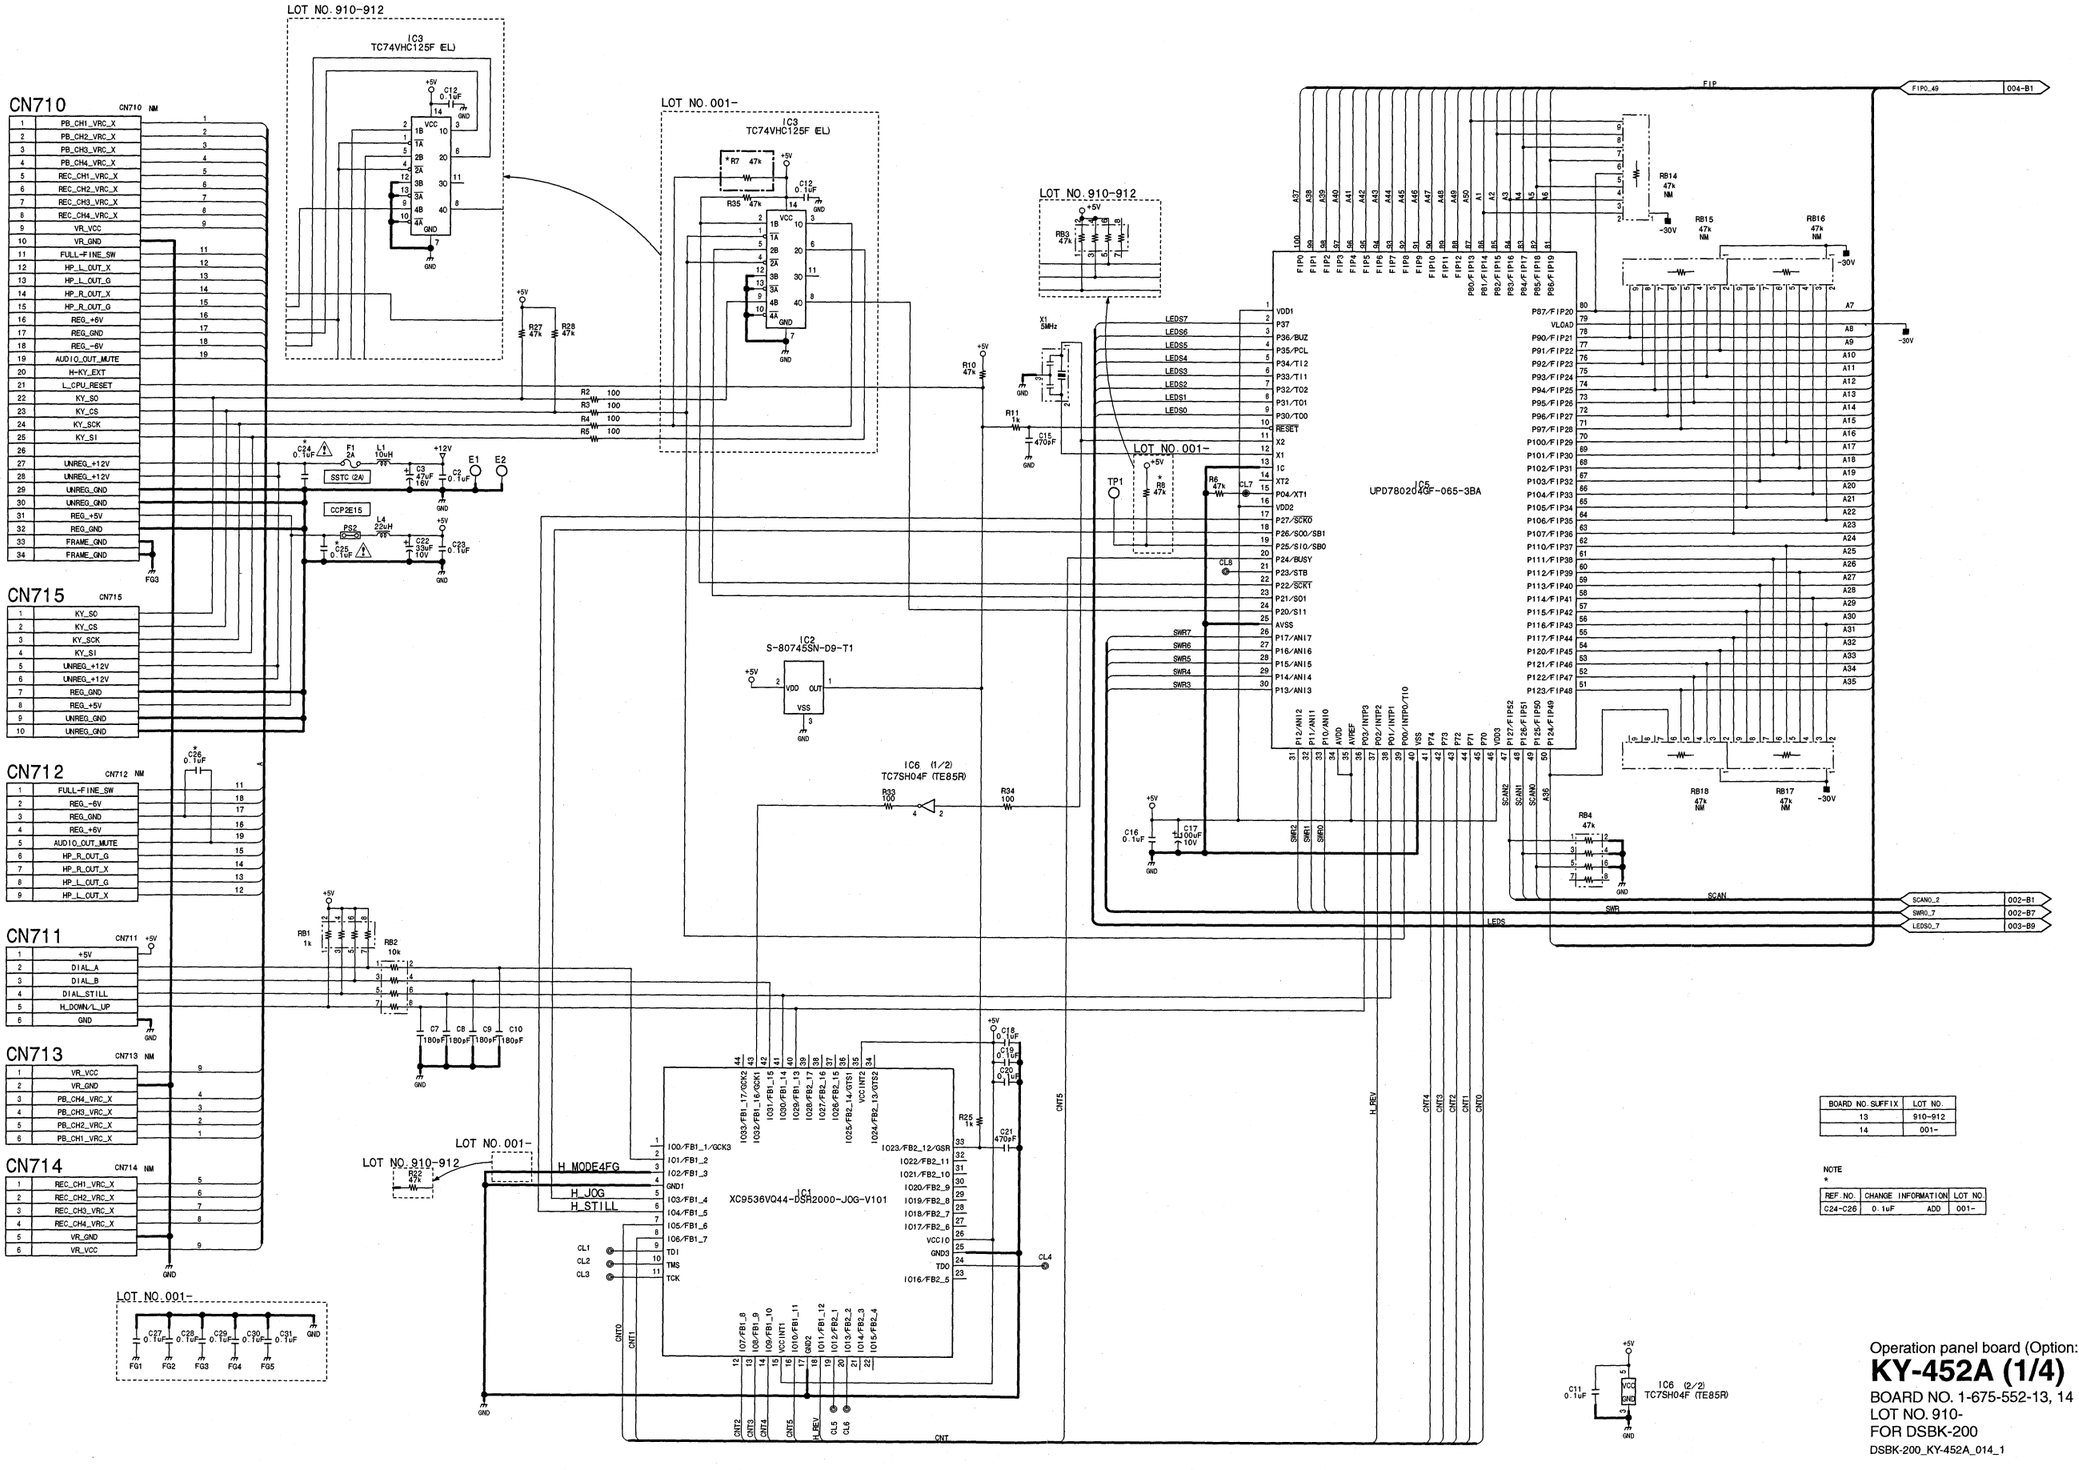

BOARD NO. SUFFIX	LOT NO.
13	910-912
14	001-

NOTE
*

REF. NO.	CHANGE INFORMATION	LOT NO.
C24-C26	0.1uF ADD	001-

Operation panel board (Option: DSBK-200)

KY-452A (1/4)

BOARD NO. 1-675-552-13, 14
LOT NO. 910-
FOR DSBK-200

DSBK-200_KY-452A_014_1

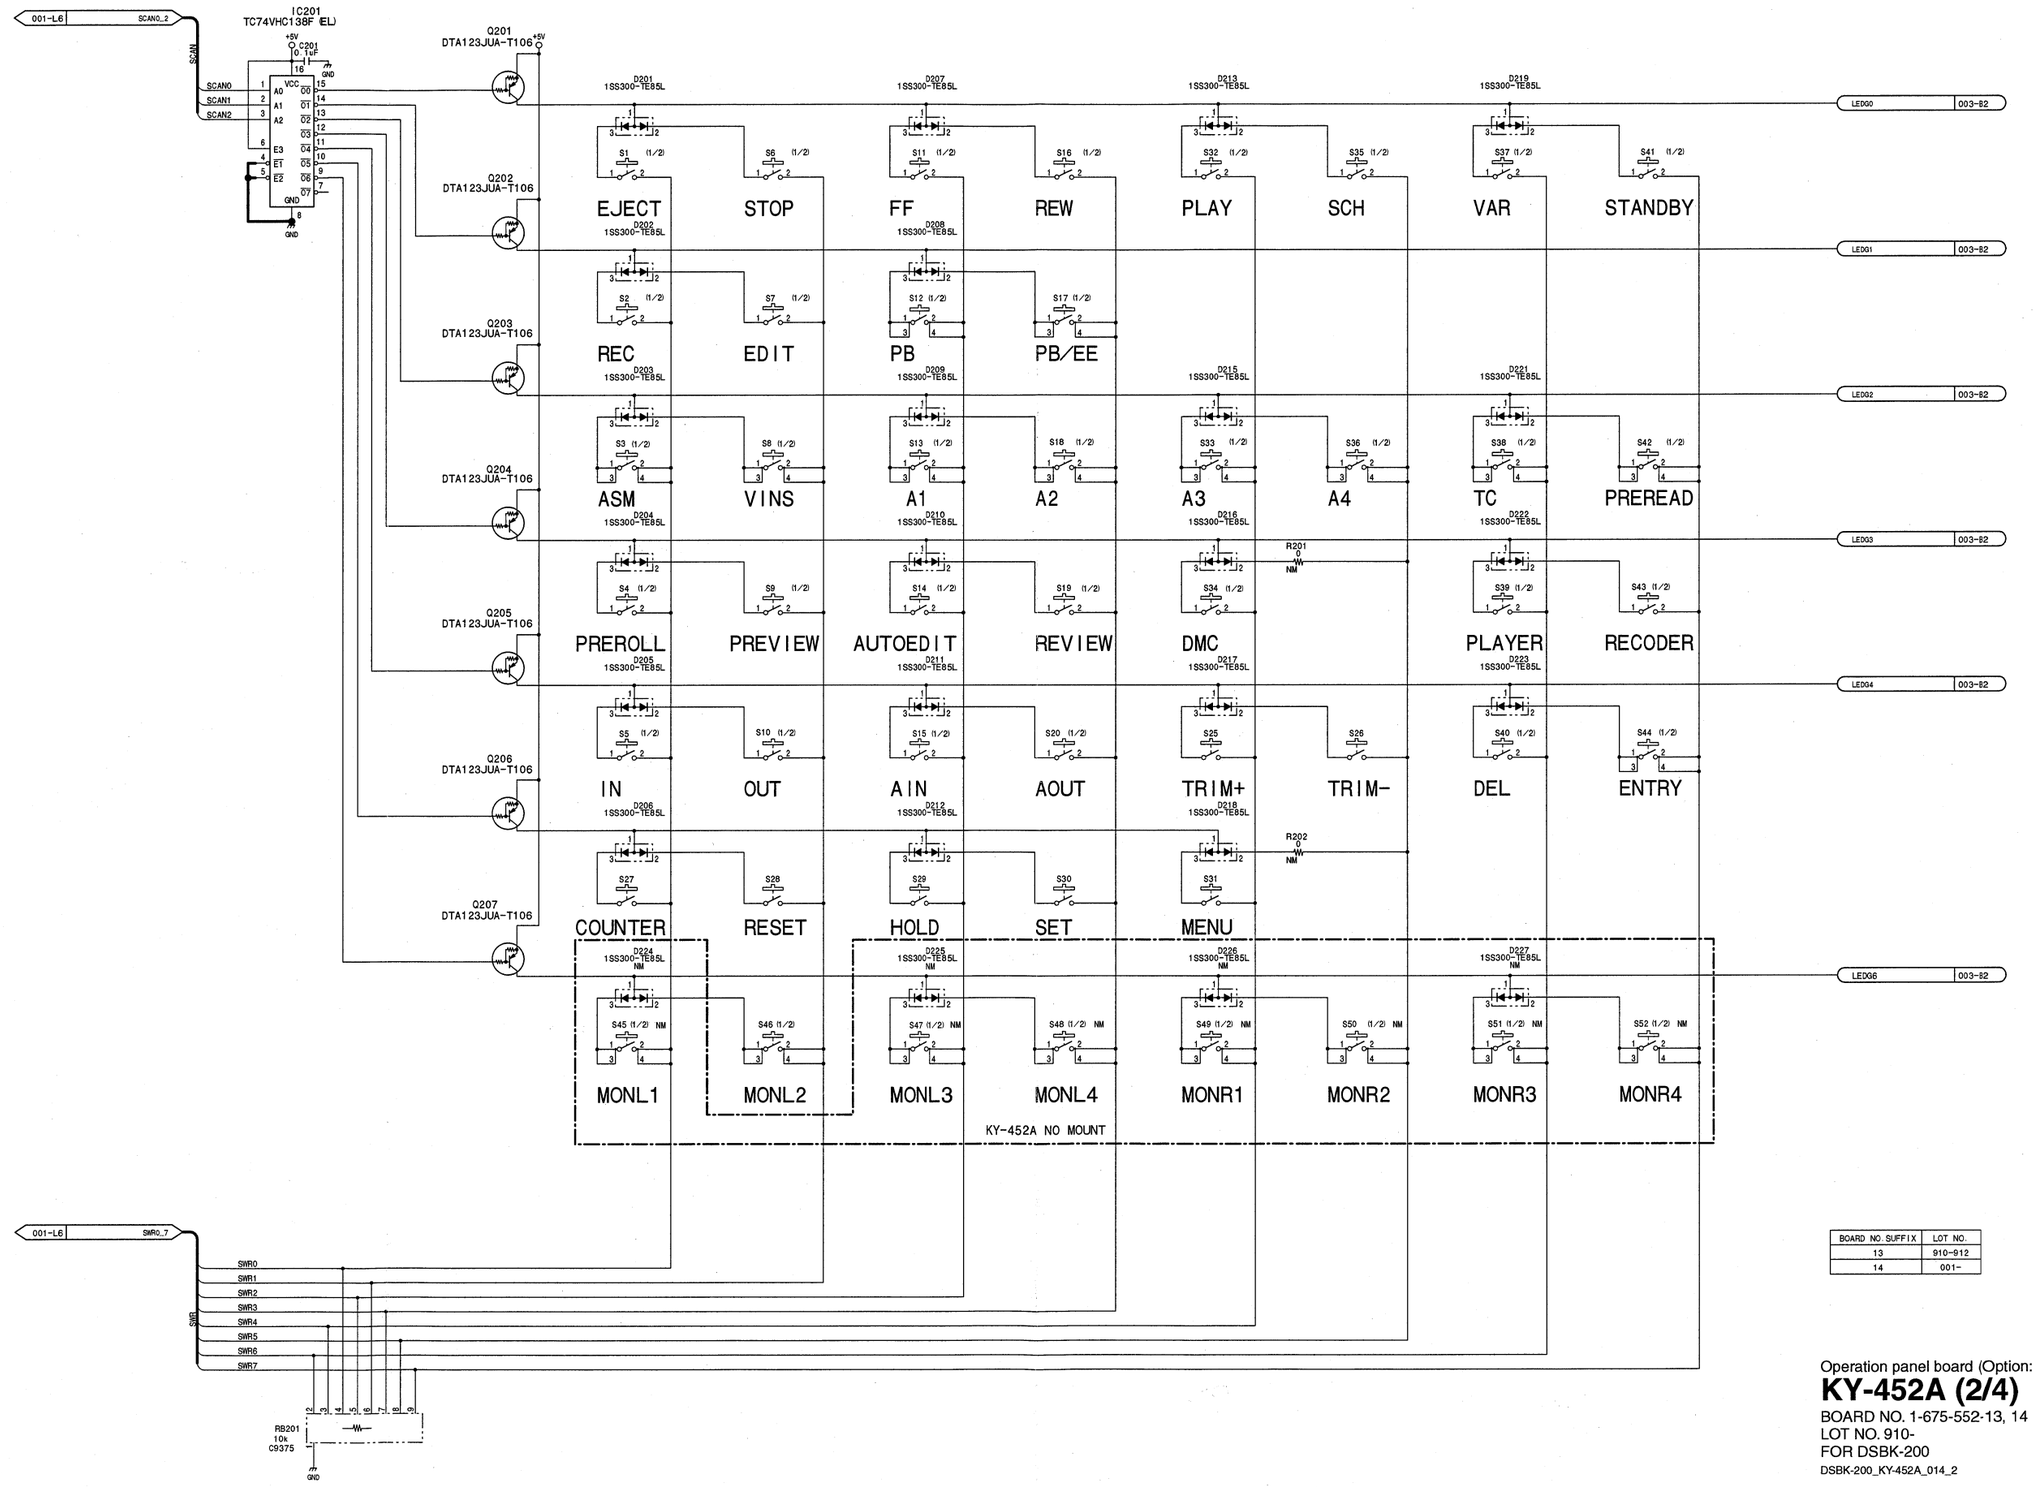

BOARD NO. SUFFIX	LOT NO.
13	910-912
14	001-

Operation panel board (Option: DSBK-200)

KY-452A (2/4)

BOARD NO. 1-675-552-13, 14
LOT NO. 910-
FOR DSBK-200

DSBK-200_KY-452A_014_2

KY-452A (3/4)

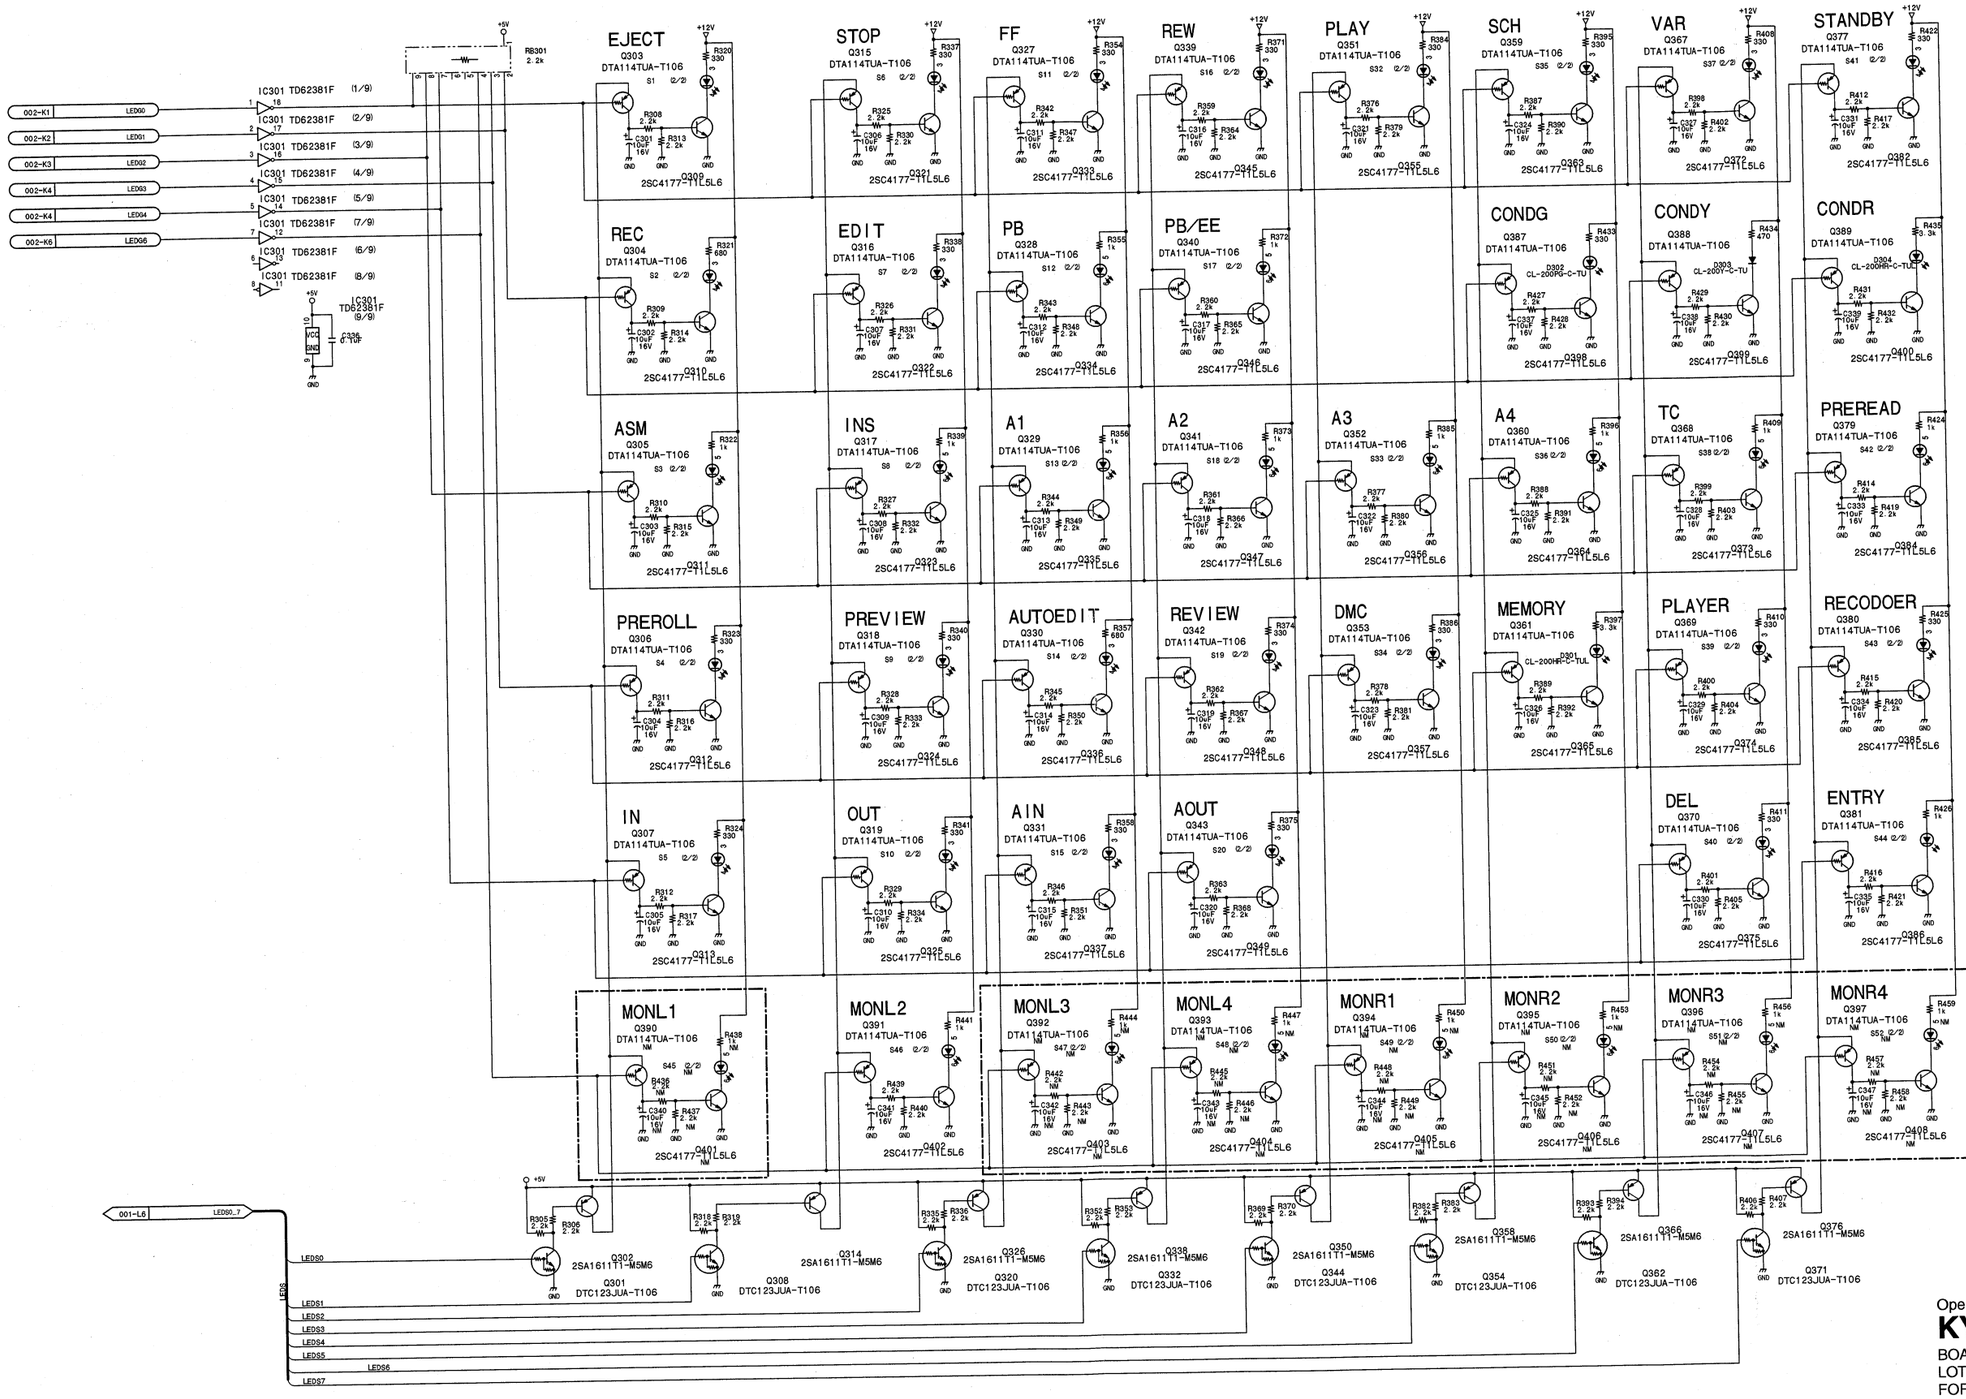

BOARD NO. SUFFIX	LOT NO.
13	910-912
14	001-

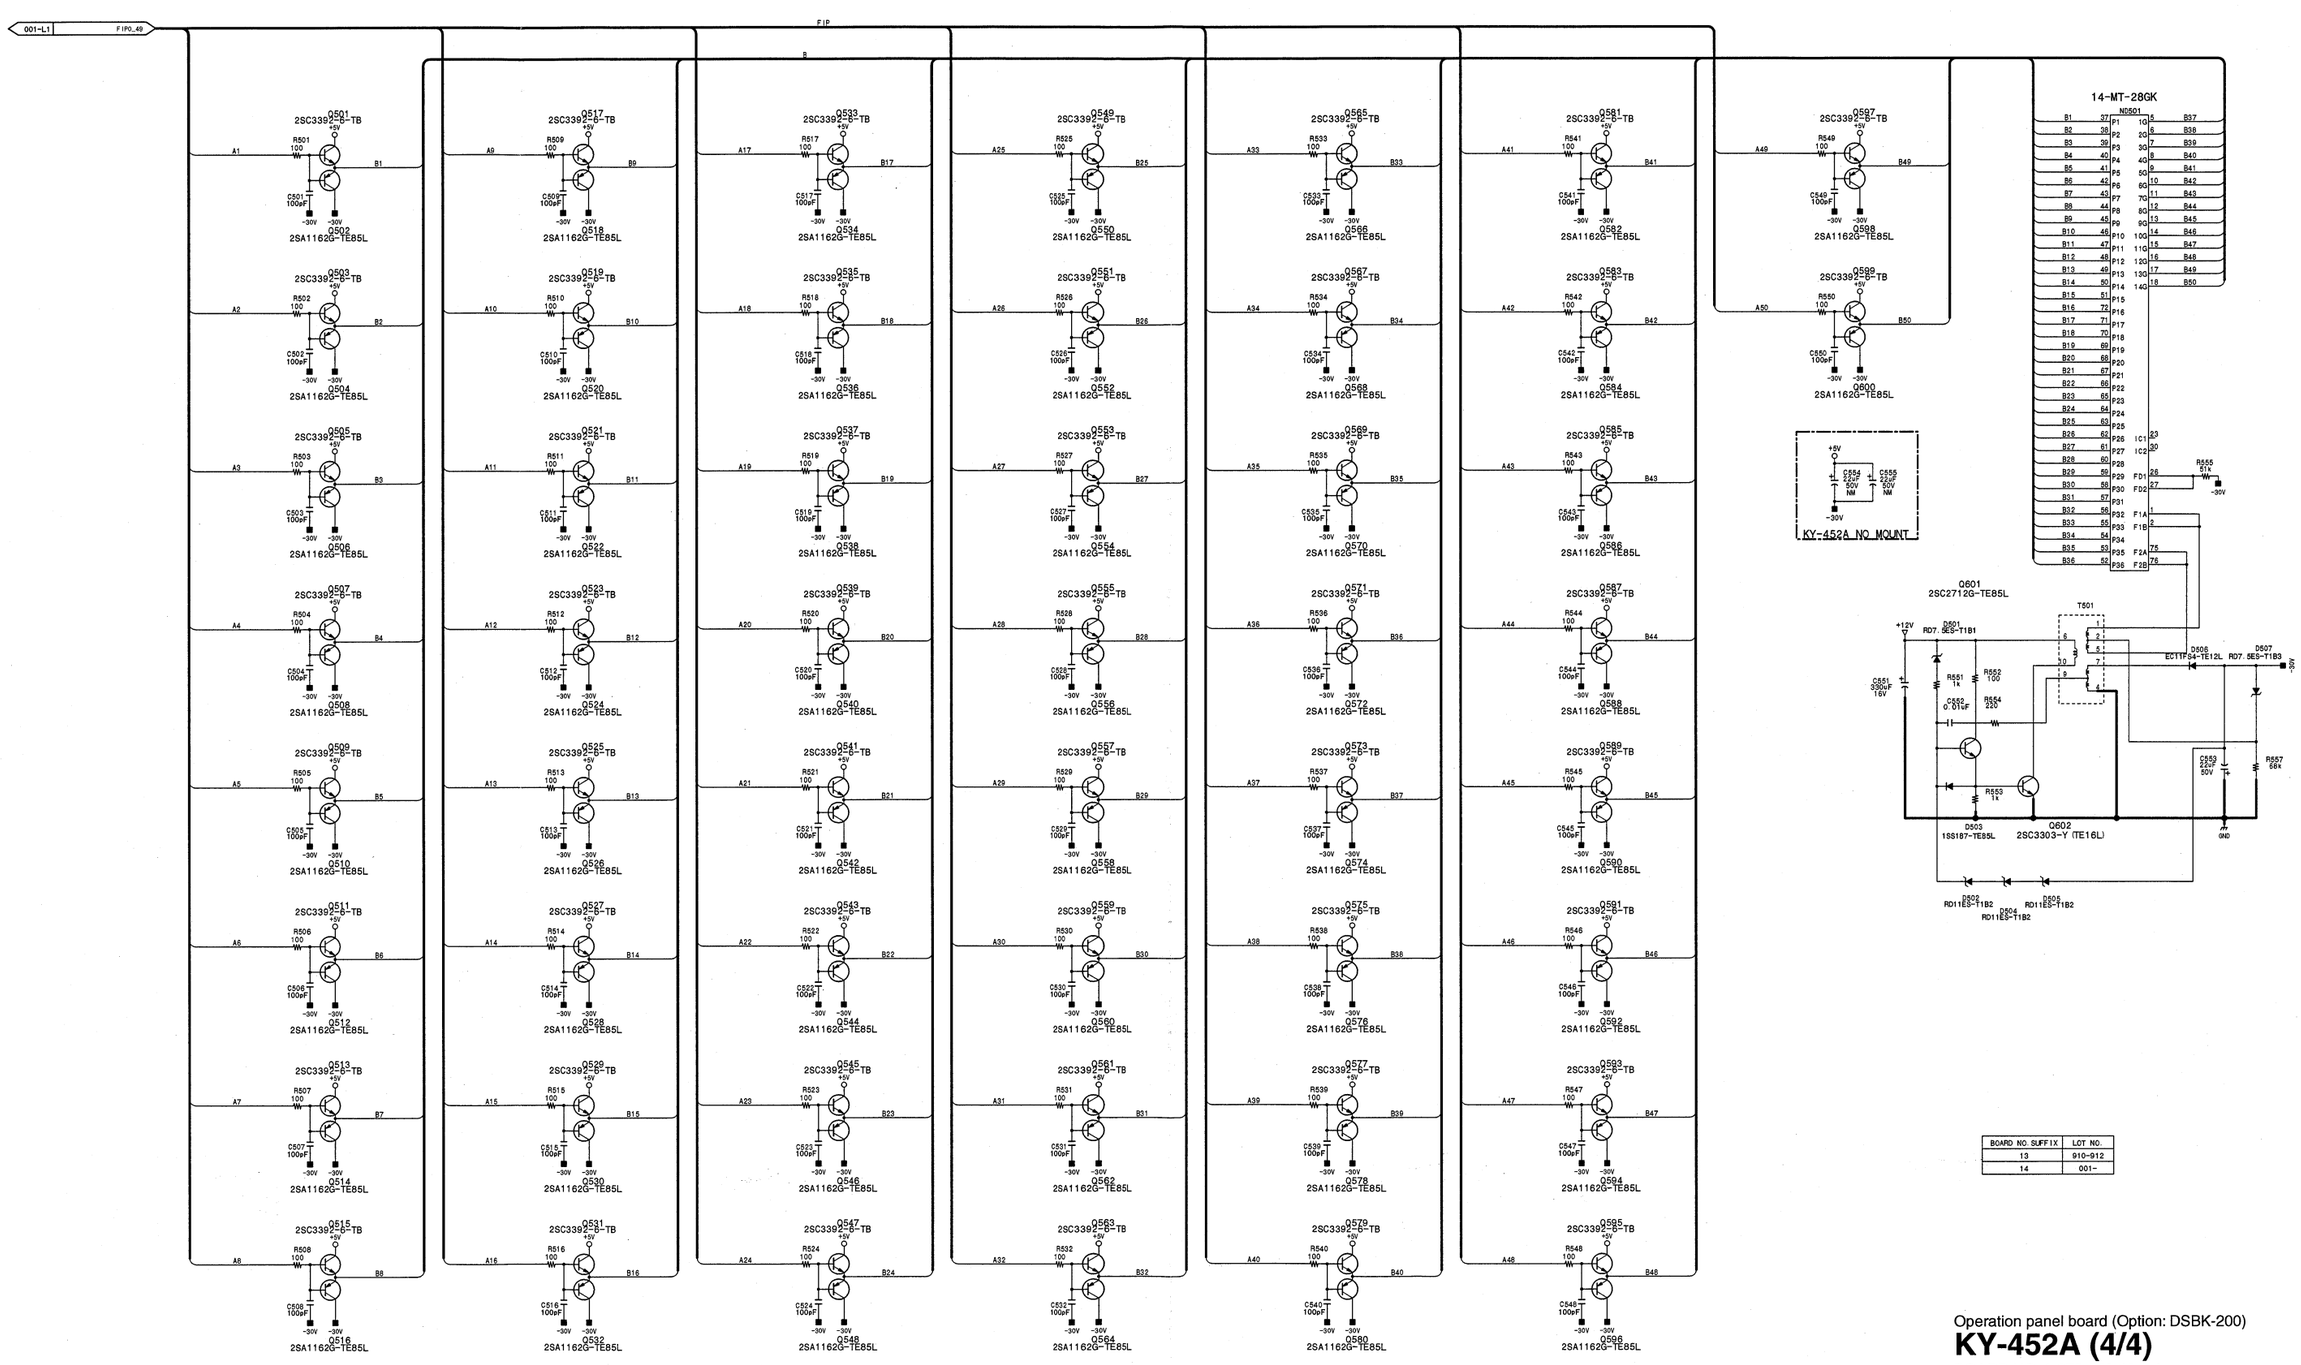

BOARD NO. SUFFIX	LOT NO.
13	910-912
14	001-

Operation panel board (Option: DSBK-200)

KY-452A (4/4)

BOARD NO. 1-675-552-13, 14
LOT NO. 910-
FOR DSBK-200

DSBK-200_KY-452A_014_4

APR-45 CN101

CN101

1	CH1_A/D_X	26	EE_A1DT34	51	SDTIRH	76	HA0
2	CH1_A/D_Y	27	MONI_OUT_X	52	SDTIRV	77	HD0
3	CH1_A/D_G	28	MONI_OUT_G	53	GND	78	HD1
4	CH2_A/D_X	29	HP_L_OUT_X	54	SDTICK27	79	HD2
5	CH2_A/D_Y	30	HP_L_OUT_G	55	SDTIRF	80	HD3
6	CH2_A/D_G	31	HP_R_OUT_X	56	SDIRH	81	HD4
7	CH3_A/D_X	32	HP_R_OUT_G	57	SDIRV	82	HD5
8	CH3_A/D_Y	33	AES/EBU12_IN_X	58	GND	83	HD6
9	CH3_A/D_G	34	AES/EBU12_IN_G	59	SDIRCK27V	84	HD7
10	CH4_A/D_X	35	AES/EBU34_IN_X	60	SDIRF	85	GND (REG_GND)
11	CH4_A/D_Y	36	AES/EBU34_IN_G	61	AFC_CK13A	86	GND (REG_GND)
12	CH4_A/D_G	37	AES/EBU12_OUT_X	62	GND	87	GND (REG_GND)
13	APR_ID0	38	AES/EBU12_OUT_G	63	CHARA_FRAME	88	GND (REG_GND)
14	APR_ID1	39	AES/EBU34_OUT_X	64	CHARA_SIG	89	REG_+5V
15		40	AES/EBU34_OUT_G	65	GND	90	REG_+5V
16	L_OPT_SEL	41	GND	66	HRDY1	91	REG_+5V
17	CH1_OUT_X	42	NSG_OFOE	67	HRDY2	92	REG_+5V
18	CH1_OUT_G	43	NSG_FH	68	HRDY3	93	REG_+6V
19	CH2_OUT_X	44	P_TRKT	69	HRDY4	94	REG_+6V
20	CH2_OUT_G	45	R_TRKT	70	XHDCS1	95	REG_+6V
21	CH3_OUT_X	46	NSG_VD	71	XHDCS2	96	REG_+6V
22	CH3_OUT_G	47	NSG_HD	72	XHDCS3	97	REG_-6V
23	CH4_OUT_X	48	NSG_CK13A	73	XHDCS4	98	REG_-6V
24	CH4_OUT_G	49	GND	74	XHDWR	99	REG_-6V
25	EE_A1DT12	50	JC_RESET	75	XHDRD	100	REG_-6V

APR-45 CN102

CN102

1	GND	26	SDIR_DT0	51	INDI_DT34	76	PB_QSDT2
2	SP_R_SO	27	SDIR_DT1	52	PB_BCK	77	PB_QSDT3
3	SP_R_SI	28	SDIR_DT2	53	PB_LRCK	78	PB_QSDT4
4	SP_R_SCK	29	SDIR_DT3	54	PB_512FS	79	PB_QSDT5
5	AU_CS	30	SDIR_DT4	55	PB_256FS	80	PB_QSDT6
6	AUDIO_OUT_MUTE	31	SDIR_DT5	56	PB_DT12	81	GND
7	NCG_CS	32	SDIR_DT6	57	GND	82	PB_QSDT7
8	DIF_CS	33	SDIR_DT7	58	PB_DT34	83	REFF
9	L_CPU_RESET	34	SDIR_DT8	59	REC_QSDT0	84	REFH
10	SY_SI	35	SDIR_DT9	60	REC_QSDT1	85	GND (3.15V_GND)
11	SY_SO	36	SDIRCK27	61	REC_QSDT2	86	GND (3.15V_GND)
12	SY_SCK	37	GND	62	REC_QSDT3	87	GND (3.15V_GND)
13	GND	38	FLTA	63	REC_QSDT4	88	GND (3.15V_GND)
14	SDIP_DT0	39	SIZED_FLTA	64	REC_QSDT5	89	REG_+3.15V
15	SDIP_DT1	40	R_FLTT	65	REC_QSDT6	90	REG_+3.15V
16	SDIP_DT2	41	P_FLTT	66	REC_QSDT7	91	REG_+3.15V
17	SDIP_DT3	42	REC_BCK	67	PCERD	92	REG_+3.15V
18	SDIP_DT4	43	REC_LRCK	68	SEL_CK27	93	GND (UNREG_GND)
19	SDIP_DT5	44		69	GND	94	GND (UNREG_GND)
20	SDIP_DT6	45	REC_DT12	70	SYSF	95	GND (UNREG_GND)
21	SDIP_DT7	46	REC_DT34	71	SYSH	96	GND (UNREG_GND)
22	SDIP_DT8	47	INDI_BCK	72	QS_CK27	97	UNREG_+12V
23	SDIP_DT9	48	INDI_LRCK	73	GND	98	UNREG_+12V
24	SDIP_CK27	49	INDI_256FS	74	PB_QSDT0	99	UNREG_+12V
25	GND	50	INDI_DT12	75	PB_QSDT1	100	UNREG_+12V

VPR-62 CN103

CN103

1	INPUT_Y_G	26	OUTPUT_SY_X	51	NSG_JOE	76	
2	INPUT_Y_X	27	OUTPUT_VIDEO1_G	52	NSG_CK13D	77	GND
3	INPUT_RY_G	28	OUTPUT_VIDEO1_X	53	GND	78	GND
4	INPUT_RY_X	29	OUTPUT_VIDEO2_G	54	NSG_CK27D	79	GND
5	INPUT_BY_G	30	OUTPUT_VIDEO2_X	55	SDTIRH	80	
6	INPUT_BY_X	31	OUTPUT_VIDEO3_G	56	SDTIRV	81	GND
7	INPUT_SY_G	32	OUTPUT_VIDEO3_X	57	SDTICK27	82	
8	INPUT_SY_X	33	OUTPUT_REF_G	58	SDTIRF	83	NSG_1ST_FIELD
9	INPUT_SC_G	34	OUTPUT_REF_X	59	SDIRH	84	NSG_OE
10	INPUT_SC_X	35	REM_YC_DELAY	60	SDIRV	85	GND (REG_GND)
11	INPUT_VIDEO_G	36	REM_SYNC_PHASE	61	GND	86	GND (REG_GND)
12	INPUT_VIDEO_X	37	GND	62	SDIRCK27V	87	GND (REG_GND)
13	INPUT_REF_G	38	H-TBC_LOCAL	63	SDIRF	88	GND (REG_GND)
14	INPUT_REF_X	39	LOC_YC_DELAY	64	AFC_CK13A	89	REG_+5V
15	GND	40	LOC_SYNC_PHASE	65	GND	90	REG_+5V
16	GND	41	GND	66	CHARA_FRAME	91	REG_+5V
17	OUTPUT_Y_G	42	NSG_OFOE	67	CHARA_SIG	92	REG_+5V
18	OUTPUT_Y_X	43	NSG_FH	68		93	REG_+6V
19	OUTPUT_RY_G	44	NSG_TOFOE	69	GND	94	REG_+6V
20	OUTPUT_RY_X	45	NSG_TFH	70	GND	95	REG_+6V
21	OUTPUT_BY_G	46	NSG_VD	71	GND	96	REG_+6V
22	OUTPUT_BY_X	47	NSG_HD	72		97	REG_-6V
23	OUTPUT_SC_G	48	NSG_CK13A	73	GND	98	REG_-6V
24	OUTPUT_SC_X	49	GND	74	GND	99	REG_-6V
25	OUTPUT_SY_G	50	JC_RESET	75	GND	100	REG_-6V

VPR-62 CN104

CN104

1	GND	26		51	DAY0	76	ADC6
2		27	GND	52	AFC_OE	77	ADC7
3	VPR_ID0	28	LBY	53	GND	78	ADC8
4	VPR_ID1	29	GND	54	AFC_VD	79	ADC9
5	GND	30	DAC9	55	AFC_HD	80	AD_CK13
6	NSG_CS	31	DAC8	56	AFC_CK13D	81	GND
7	RTG_STB	32	DAC7	57	GND	82	JSYC
8	VPR_AD_CE	33	DAC6	58	ADY0	83	Y_CLAMP
9	L_CPU_RESET	34	DAC5	59	ADY1	84	C_CLAMP
10	SY_SI	35	DAC4	60	ADY2	85	GND (3.15V_GND)
11	SY_SO	36	DAC3	61	ADY3	86	GND (3.15V_GND)
12	SY_SCK	37	DAC2	62	ADY4	87	GND (3.15V_GND)
13	GND	38	DAC1	63	ADY5	88	GND (3.15V_GND)
14	SGCK13	39	DAC0	64	ADY6	89	REG_+3.15V
15	SGH	40	DA_CK13	65	GND	90	REG_+3.15V
16	SGOE	41	GND	66	ADY7	91	REG_+3.15V
17	GND	42	DAY9	67	ADY8	92	REG_+3.15V
18	PLD_RESET	43	DAY8	68	ADY9	93	GND (UNREG_GND)
19	GND	44	DAY7	69	ADC0	94	GND (UNREG_GND)
20		45	DAY6	70	ADC1	95	GND (UNREG_GND)
21	GND	46	DAY5	71	ADC2	96	GND (UNREG_GND)
22	GND	47	DAY4	72	ADC3	97	UNREG_+12V
23	GND	48	DAY3	73	GND	98	UNREG_+12V
24	NO_INPUT	49	DAY2	74	ADC4	99	UNREG_+12V
25	GND	50	DAY1	75	ADC5	100	UNREG_+12V

DPR-136 CN105

CN105

1	GND	26	AIFP_CS	51	SDIRF	76	R_TRKT
2	BANK_CNT	27	AIFI_CS	52	SIFP_CS	77	GND
3	JC_RESET	28	A1F_FCS	53	GND	78	MAIN_SWP
4	REN_CNT	29	GND	54	FLTD-P_3V	79	ODD_AVAREA
5	CNT_SEL	30	A1F_TCS	55	TRKD-P	80	ODD_SCAREA
6	SP_P_SO	31	A1R_FCS	56	FLTD-R_3V	81	ODD_JSWP
7	SP_P_SI	32	A1R_TCS	57	TRKD-R	82	EVEN_AVAREA
8	SP_P_SCK	33	GND	58	CTL	83	EVEN_SCAREA
9	GND	34	V2R_CS	59	FRRE	84	EVEN_JSWP
10	BANK	35	V2P_CS	60	TBC_RE	85	GND (REG_GND)
11	SP_R_SO	36	F1R_CS	61	GND	86	GND (REG_GND)
12	SP_R_SI	37	GND	62	SV_SCK1	87	GND (REG_GND)
13	GND	38	F1P_CS	63	SV_SI1	88	GND (REG_GND)
14	SP_R_SCK	39	NSG_TOFOE	64	SV_SO1	89	REG_+5V
15	D1M_SFCS	40	NSG_TFH	65	D1M_MCS	90	REG_+5V
16	D1M_STCS	41	DELAY_O_SRC	66	D1S_MCS	91	REG_+5V
17	GND	42	FLTE	67	D1R_MCS	92	REG_+5V
18	D1S_SFCS	43	NSG_JOE	68	HIF_CS	93	REG_+6V
19	D1S_STCS	44	NSG_CK13D	69	OP_SPARE	94	REG_+6V
20	D1R_SFCS	45	GND	70	FE_SWP	95	REG_+6V
21	GND	46	NSG_CK27D	71	D1R_J-SWP	96	REG_+6V
22	D1R_STCS	47	SDIRH	72	P_FLTT	97	REG_-6V
23	SIFR_RCS	48	SDIRV	73	P_TRKT	98	REG_-6V
24	SIFR_PCS	49	GND	74	SUB_SWP	99	REG_-6V
25	GND	50	SDIRCK27V	75	R_FLTT	100	REG_-6V

DPR-136 CN107

CN107

1	GND	26	SY_SI_3V	51	DAY0	76	ADC6
2	PB_QSDT0	27	SY_SCK_3V	52	AFC_OE	77	ADC7
3	PB_QSDT1	28	LBY	53	GND	78	ADC8
4	PB_QSDT2	29	GND	54	AFC_VD	79	ADC9
5	PB_QSDT3	30	DAC9	55	AFC_HD	80	AD_CK13
6	PB_QSDT4	31	DAC8	56	AFC_CK13D	81	GND
7	PB_QSDT5	32	DAC7	57	GND	82	JSYC
8	PB_QSDT6	33	DAC6	58	ADY0	83	Y_CLAMP
9	GND	34	DAC5	59	ADY1	84	C_CLAMP
10	PB_QSDT7	35	DAC4	60	ADY2	85	GND (3.15V_GND)
11	REFF	36	DAC3	61	ADY3	86	GND (3.15V_GND)
12	REFH	37	DAC2	62	ADY4	87	GND (3.15V_GND)
13	GND	38	DAC1	63	ADY5	88	GND (3.15V_GND)
14	SGCK13	39	DAC0	64	ADY6	89	REG_+3.15V
15	SGH	40	DA_CK13	65	GND	90	REG_+3.15V
16	SGOE	41	GND	66	ADY7	91	REG_+3.15V
17	DPR_ID0	42	DAY9	67	ADY8	92	REG_+3.15V
18	PLD_RESET	43	DAY8	68	ADY9	93	GND (UNREG_GND)
19	C1R_MCS	44	DAY7	69	ADC0	94	GND (UNREG_GND)
20	C1R_SCS	45	DAY6	70	ADC1	95	GND (UNREG_GND)
21	DPR_ID1	46	DAY5	71	ADC2	96	GND (UNREG_GND)
22	C1P_MCS	47	DAY4	72	ADC3	97	UNREG_+12V
23	C1P_SCS	48	DAY3	73	GND	98	UNREG_+12V
24	NO_INPUT	49	DAY2	74	ADC4	99	UNREG_+12V
25	SY_SO_3V	50	DAY1	75	ADC5	100	UNREG_+12V

DPR-136 CN106

CN106

1	GND	2	DRCKREF
3	SUB_ISCD0	4	SUB_ISCD1
5	SUB_ISCD2	6	SUB_ISCD3
7	SUB_ISCD4	8	SUB_AVD0
9	GND	10	SUB_AVD1
11	SUB_AVD2	12	SUB_AVD3
13	SUB_AVD4	14	SUB_ITISYNP
15	SUB_AVSYNP	16	SUB_SCSYNP
17	GND	18	SUB_ITISRC
19	SUB_AVSRC	20	SUB_SCSRC
21	SUB_CPCK	22	MAIN_ISCD0
23	MAIN_ISCD1	24	MAIN_ISCD2
25	MAIN_ISCD3	26	MAIN_ISCD4
27	MAIN_AVD0	28	MAIN_AVD1
29	GND	30	MAIN_AVD2
31	MAIN_AVD3	32	MAIN_AVD4
33	MAIN_ITISYNP	34	MAIN_AVSYNP
35	MAIN_SCSYNP	36	MAIN_ITISRC
37	GND	38	MAIN_AVSRC
39	MAIN_SCSRC	40	MAIN_CPCK
41	EVEN_DXI0	42	EVEN_DXI1
43	EVEN_DXI2	44	EVEN_DXI3
45	EVEN_DXI4	46	EVEN_SYNP
47	EVEN_CPCK	48	ODD_DXI0
49	GND	50	ODD_DXI1
51	ODD_DXI2	52	ODD_DXI3
53	ODD_DXI4	54	ODD_SYNP
55	ODD_CPCK	56	FE_CLKEN
57	FE_STBY	58	ODD_RECA1
59	ODD_RECA2	60	ODD_CRCK
61	ODD_CLKEN	62	ODD_DXO4
63	ODD_DXO3	64	ODD_DXO2
65	GND	66	ODD_DXO1
67	ODD_DXO0	68	EVEN_CRCK
69	EVEN_RECA1	70	EVEN_RECA2
71	EVEN_CLKEN	72	EVEN_DXO4
73	EVEN_DXO3	74	EVEN_DXO2
75	EVEN_DXO1	76	EVEN_DXO0
77	ME	78	BSC_ON
79	VIT_OFF	80	XADADJ
81	GND	82	PLLFRP
83	PLLSRC	84	PRE_SEL
85	CLKDLY	86	SDIP_DT0
87	SDIP_DT1	88	SDIP_DT2
89	GND	90	SDIP_DT3
91	SDIP_DT4	92	SDIP_DT5
93	SDIP_DT6	94	SDIP_DT7
95	SDIP_DT8	96	SDIP_DT9
97	GND	98	SDIP_CK27
99	SDIR_DT0	100	SDIR_DT1
101	SDIR_DT2	102	SDIR_DT3
103	SDIR_DT4	104	SDIR_DT5
105	SDIR_DT6	106	SDIR_DT7
107	SDIR_DT8	108	SDIR_DT9
109	GND	110	SDIRCK27
111	SV_SO2	112	FLTA
113	SIZED_FLTA	114	SV_SI2
115	REC_BCK	116	REC_LRCK
117	EE_A1DT12	118	SV_SCK2
119	REC_DT12	120	REC_DT34
121	INDI_BCK	122	INDI_LRCK
123	INDI_256FS	124	INDI_DT12
125	EE_A1DT34	126	INDI_DT34
127	PB_BCK	128	PB_LRCK
129	PB_512FS	130	PB_256FS
131	PB_DT12	132	PB_DT34
133	GND	134	SEL_CK27
135	REC_QSDT0	136	REC_QSDT1
137	REC_QSDT2	138	REC_QSDT3
139	REC_QSDT4	140	REC_QSDT5
141	GND	142	REC_QSDT6
143	REC_QSDT7	144	PCERD
145	SYSF	146	SYSH
147	QS_CK27	148	GND

CN300

CN300

1	GND	2	GND
3	JC_RESET	4	N.C
5	SUB_CPCK	6	SUB_SCSRC
7	SUB_AVSRC	8	SUB_ITISRC
9	SUB_SCSYNP	10	SUB_AVSYNP
11	SUB_ITISYNP	12	SUB_AVD4
13	SUB_AVD3	14	SUB_AVD2
15	SUB_AVD1	16	SUB_AVD0
17	SUB_ISCD4	18	SUB_ISCD3
19	SUB_ISCD2	20	SUB_ISCD1
21	SUB_ISCD0	22	SUB_SWP
23	SUB_SCAREA	24	SUB_AVAREA
25	GND	26	MAIN_CPCK
27	MAIN_SCSRC	28	MAIN_AVSRC
29	MAIN_ITISRC	30	MAIN_SCSYNP
31	MAIN_AVSYNP	32	MAIN_ITISYNP
33	GND	34	MAIN_AVD4
35	MAIN_AVD3	36	MAIN_AVD2
37	MAIN_AVD1	38	MAIN_AVD0
39	MAIN_ISCD4	40	MAIN_ISCD3
41	MAIN_ISCD2	42	MAIN_ISCD1
43	MAIN_ISCD0	44	MAIN_SWP
45	MAIN_SCAREA	46	MAIN_AVAREA
47	GND	48	DELAY_O_SRC
49	CLKDLY	50	PRE_SEL
51	PLLSRC	52	PLLFRP
53	XADADJ	54	VIT_OFF
55	BSC_ON	56	ME
57	L_NORMAL_PB	58	L_NARROW_LOCK
59	RP_DIP_SW2	60	RP_DIP_SW1
61	TEST_FREQ_2	62	TEST_FREQ_1
63	L_SUB_LOCK	64	L_ITI_CENTER
65	M1_CS	66	RP_DIP_SW3
67	RP_DA_LDD4	68	RP_DA_LDD3
69	RP_DA_LDD2	70	RP_DA_LDD1
71	GND	72	RP_SI
73	RP_SO	74	RP_SCK
75	ATF_ERROR_GND	76	ATF_ERROR_E
77	ATF_ERROR_O	78	E_CH_RF_SEL2
79	E_CH_RF_SEL1	80	DR_EEPROM_BUSY
81	DR_EEPROM_RESET	82	DR_EEPROM_CS
83	ATF_GAINCONT	84	RF_CUT_O
85	RF_CUT_E	86	GND
87	ODD_JSWP	88	ODD_SCAREA
89	ODD_AVAREA	90	ODD_CPCK
91	ODD_SYNP	92	ODD_DXI4
93	ODD_DXI3	94	ODD_DXI2
95	ODD_DXI1	96	ODD_DXI0
97	GND	98	EVEN_JSWP
99	EVEN_SCAREA	100	EVEN_AVAREA
101	EVEN_CPCK	102	EVEN_SYNP
103	EVEN_DXI4	104	EVEN_DXI3
105	EVEN_DXI2	106	EVEN_DXI1
107	EVEN_DXI0	108	GND
109	ODD_DXO0	110	ODD_DXO1
111	ODD_DXO2	112	ODD_DXO3
113	ODD_DXO4	114	ODD_CLKEN
115	ODD_RECA2	116	ODD_RECA1
117	GND	118	ODD_CRCK
119	GND	120	EVEN_DXO0
121	EVEN_DXO1	122	EVEN_DXO2
123	EVEN_DXO3	124	EVEN_DXO4
125	EVEN_CLKEN	126	EVEN_RECA2
127	EVEN_RECA1	128	GND
129	EVEN_CRCK	130	GND
131	FE_CLKEN	132	FE_STBY
133	FE_SWP	134	GND
135	DRCKREF	136	GND
137	REG_+6V	138	REG_+6V
139	REG_+6V	140	REG_+6V
141	REG_+5V	142	REG_+5V
143	REG_+5V	144	REG_+5V
145	GND (REG_GND)	146	GND (REG_GND)
147	GND (REG_GND)	148	GND (REG_GND)

BOARD NO.SUFFIX	LOT NO.
11	907-910
12	911-092
13	093-

Mother board

MB-859 (1/7)

BOARD NO. 1-675-524-11, 12, 13

LOT NO. 907-

DSR-2000_MB-859_013_1

MB-859 (2/7)

OPTION IF-763 CN201

CN201

1	GND	26	AIFP_CS	51	SDIRF	76	R_TRKT
2	GND	27	AIFI_CS	52	SIFP_CS	77	GND
3	JC_RESET	28	A1F_FCS	53	GND	78	MAIN_SWP
4	SPARE_1	29	GND	54	FLTD-P_3V	79	ODD_AVAREA
5	GND	30	A1F_TCS	55	TRKD-P	80	ODD_SCAREA
6	SP_P_SO	31	A1R_FCS	56	FLTD-R_3V	81	ODD_JSWP
7	SP_P_SI	32	A1R_TCS	57	TRKD-R	82	EVEN_AVAREA
8	SP_P_SCK	33	GND	58	CTL	83	EVEN_SCAREA
9	GND	34	V2R_CS	59	FRRE	84	EVEN_JSWP
10	BANK	35	V2P_CS	60	TBC_RE	85	GND (REG_GND)
11	SP_R_SO	36	F1R_CS	61	GND	86	GND (REG_GND)
12	SP_R_SI	37	GND	62	SV_SCK1	87	GND (REG_GND)
13	GND	38	F1P_CS	63	SV_SI1	88	GND (REG_GND)
14	SP_R_SCK	39	NSG_TOFOE	64	SV_SO1	89	REG_+5V
15	D1M_SFCS	40	NSG_TFH	65	D1M_MCS	90	REG_+5V
16	D1M_STCS	41	GND	66	D1S_MCS	91	REG_+5V
17	GND	42	FLTE	67	D1R_MCS	92	REG_+5V
18	D1S_SFCS	43	NSG_JOE	68	HIF_CS	93	REG_+6V
19	D1S_STCS	44	NSG_CK13D	69	OP_SPARE	94	REG_+6V
20	D1R_SFCS	45	GND	70	FE_SWP	95	REG_+6V
21	GND	46	NSG_CK27D	71	D1R_J-SWP	96	REG_+6V
22	D1R_STCS	47	SDIRH	72	P_FLTT	97	REG_-6V
23	SIFR_RCS	48	SDIRV	73	P_TRKT	98	REG_-6V
24	SIFR_PCS	49	GND	74	SUB_SWP	99	REG_-6V
25	GND	50	SDIRCK27V	75	R_FLTT	100	REG_-6V

OPTION IF-763 CN203

CN203

1	GND	26	SY_SO_3V	51		76	
2	PB_OSDT0	27	SY_SI_3V	52		77	GND
3	PB_OSDT1	28	SY_SCK_3V	53	GND	78	SY_RESET
4	PB_OSDT2	29	GND	54		79	
5	PB_OSDT3	30		55		80	
6	PB_OSDT4	31		56		81	GND (REG_GND)
7	PB_OSDT5	32		57	GND	82	GND (REG_GND)
8	PB_OSDT6	33	GND	58		83	REG_+5V
9	PB_OSDT7	34		59		84	REG_+5V
10	REFF	35		60		85	GND (3.15V_GND)
11	REFH	36		61	GND	86	GND (3.15V_GND)
12	L_CPU_RESET	37	GND	62		87	GND (3.15V_GND)
13	GND	38		63		88	GND (3.15V_GND)
14	SY_SI	39		64		89	REG_+3.15V
15	SY_SO	40		65	GND	90	REG_+3.15V
16	SY_SCK	41	GND	66		91	REG_+3.15V
17	GND	42		67		92	REG_+3.15V
18	PLD_RESET	43		68		93	GND (UNREG_GND)
19	C1R_MCS	44		69	GND	94	GND (UNREG_GND)
20	C1R_SCS	45	GND	70		95	GND (UNREG_GND)
21	GND	46	OPT_ID0	71		96	GND (UNREG_GND)
22	C1P_MCS	47	OPT_ID1	72		97	UNREG_+12V
23	C1P_SCS	48	L_OPTION_EXIST	73	GND	98	UNREG_+12V
24	DV_CS	49	GND	74		99	UNREG_+12V
25	GND	50		75		100	UNREG_+12V

OPTION IF-763 CN202

LOT NO.907-092

1		2	SPARE_2
3		4	L_DSP_EXT

LOT NO.093-

CN202

1	NC	2	AES/EBU12_OUT_X
3	AES/EBU34_OUT_X	4	L_DSP_EXT
5	GND	6	HRDY1
7	HRDY2	8	HRDY3
9	GND	10	HRDY4
11	XHDCS1	12	XHDCS2
13	GND	14	XHDCS3
15	XHDCS4	16	XHDWR
17	GND	18	XHDRD
19	HA0	20	HD0
21	GND	22	HD1
23	HD2	24	HD3
25	GND	26	HD4
27	HD5	28	HD6
29	GND	30	HD7
31	SUB_CPCK	32	EVEN_DX10
33	GND	34	EVEN_DX12
35	EVEN_DX13	36	EVEN_DX14
37	GND	38	EVEN_SYNP
39	EVEN_CPCK	40	ODD_DX10
41	ODD_DX11	42	ODD_DX12
43	ODD_DX13	44	ODD_DX14
45	ODD_SYNP	46	ODD_CPCK
47	FE_CLKEN	48	FE_STBY
49	GND	50	ODD_RECA1
51	ODD_RECA2	52	ODD_CRCK
53	ODD_CLKEN	54	ODD_DX04
55	ODD_DX03	56	ODD_DX02
57	ODD_DX01	58	ODD_DX00
59	EVEN_CRCK	60	EVEN_RECA1
61	EVEN_RECA2	62	EVEN_CLKEN
63	EVEN_DX04	64	EVEN_DX03
65	GND	66	EVEN_DX02
67	EVEN_DX01	68	EVEN_DX00
69	NC	70	SDIP_DT0
71	SDIP_DT1	72	SDIP_DT2
73	GND	74	SDIP_DT3
75	SDIP_DT4	76	SDIP_DT5
77	SDIP_DT6	78	SDIP_DT7
79	SDIP_DT8	80	SDIP_DT9
81	GND	82	SDIP_CK27
83	SDIR_DT0	84	SDIR_DT1
85	SDIR_DT2	86	SDIR_DT3
87	SDIR_DT4	88	SDIR_DT5
89	GND	90	SDIR_DT6
91	SDIR_DT7	92	SDIR_DT8
93	GND	94	SDIR_DT9
95	SDIRCK27	96	NC
97	NC	98	OP-SY_A0
99	OP-SY_A1	100	OP-SY_A2
101	GND	102	OP-SY_A3
103	OP-SY_A4	104	OP-SY_A5
105	GND	106	OP-SY_A6
107	OP-SY_A7	108	OP-SY_A8
109	GND	110	OP-SY_A9
111	OP-SY_A10	112	OP-SY_D0
113	GND	114	OP-SY_D1
115	OP-SY_D2	116	OP-SY_D3
117	GND	118	OP-SY_D4
119	OP-SY_D5	120	OP-SY_D6
121	GND	122	OP-SY_D7
123	OP-SY_D8	124	OP-SY_D9
125	GND	126	SY_CLOCK_X
127	SY_CLOCK_G	128	OP-SY_A11
129	GND	130	OP-SY_RAM_WAIT
131	OP-SY_RAM_CS	132	OP-SY_A12
133	GND	134	SEL_CK27
135	REC_OSDT0	136	REC_OSDT1
137	REC_OSDT2	138	REC_OSDT3
139	REC_OSDT4	140	REC_OSDT5
141	L_OPT_SEL	142	REC_OSDT6
143	REC_OSDT7	144	PCERD
145	SYSF	146	SYSH
147	OS_CK27	148	GND

SY-278 CN111

CN111

1	GND	2	
3		4	APR_ID0
5	APR_ID1	6	NSG_1ST_FIELD
7	NSG_OE	8	
9	GND	10	
11		12	
13	GND	14	AU_CS
15	AUDIO_OUT_MUTE	16	L_DSP_EXT
17	GND	18	HRDY1
19	HRDY2	20	HRDY3
21	GND	22	HRDY4
23	XHDCS1	24	XHDCS2
25	GND	26	XHDCS3
27	XHDCS4	28	XHDWR
29	GND	30	XHDRD
31	HA0	32	HD0
33	GND	34	HD1
35	HD2	36	HD3
37	GND	38	HD4
39	HD5	40	HD6
41	GND	42	HD7
43		44	
45	GND	46	SV_A0
47	SV_A1	48	SV_A2
49	GND	50	SV_A3
51	SV_A4	52	SV_A5
53	GND	54	SV_A6
55	SV_A7	56	SV_A8
57	GND	58	SV_A9
59	SV_A10	60	SV_D0
61	GND	62	SV_D1
63	SV_D2	64	SV_D3
65	GND	66	SV_D4
67	SV_D5	68	SV_D6
69	GND	70	SV_D7
71	SV_RD	72	SV_WR
73	GND	74	SV-SP_RAM_WAIT
75	SV-SP_RAM_CS	76	
77	GND	78	SV_CLOCK_X
79	SV_CLOCK_G	80	FRAME_PULSE
81	GND	82	OP-SY_A0
83	OP-SY_A1	84	OP-SY_A2
85	GND	86	OP-SY_A3
87	OP-SY_A4	88	OP-SY_A5
89	GND	90	OP-SY_A6
91	OP-SY_A7	92	OP-SY_A8
93	GND	94	OP-SY_A9
95	OP-SY_A10	96	OP-SY_D0
97	GND	98	OP-SY_D1
99	OP-SY_D2	100	OP-SY_D3
101	GND	102	OP-SY_D4
103	OP-SY_D5	104	OP-SY_D6
105	GND	106	OP-SY_D7
107	OP-SY_D8	108	OP-SY_D9
109	GND	110	SV-SY_RAM_WAIT
111	SV-SY_RAM_CS	112	
113	GND	114	SY_CLOCK_X
115	SY_CLOCK_G	116	OP-SY_A11
117	GND	118	OP-SY_RAM_WAIT
119	OP-SY_RAM_CS	120	OP-SY_A12
121	GND	122	L_SV_EXIST
123	H_MOTOR_OFF	124	
125	GND	126	BANK_CNT
127	REN_CNT	128	CNT_SEL
129	GND	130	
131		132	
133	GND	134	
135		136	
137	GND	138	
139		140	
141	GND	142	
143		144	
145	GND	146	GND
147	GND	148	GND

SV-212 CN114

CN114

1	GND	2	RP_DIP_SW1
3	RP_DIP_SW2	4	L_NARROW_LOCK
5	L_NORMAL_PB	6	
7		8	
9	GND	10	
11		12	
13		14	
15		16	
17	GND	18	
19		20	
21	GND	22	SV_A0
23	SV_A1	24	SV_A2
25	GND	26	SV_A3
27	SV_A4	28	SV_A5
29	GND	30	SV_A6
31	SV_A7	32	SV_A8
33	GND	34	SV_A9
35	SV_A10	36	SV_D0
37	GND	38	SV_D1
39	SV_D2	40	SV_D3
41	GND	42	SV_D4
43	SV_D5	44	SV_D6
45	GND	46	SV_D7
47	SV_RD	48	SV_WR
49	GND	50	SV-SP_RAM_WAIT
51	SV-SP_RAM_CS	52	
53	GND	54	SV_CLOCK_X
55	SV_CLOCK_G	56	FRAME_PULSE
57	GND	58	
59		60	
61	GND	62	
63		64	
65	GND	66	
67		68	
69	GND	70	
71		72	
73	GND	74	BANK_CNT
75	REN_CNT	76	CNT_SEL
77	GND	78	SV_SC2
79	SV_SI2	80	SV_SCK2
81	GND	82	
83		84	
85	GND	86	SV-SY_RAM_WAIT
87	SV-SY_RAM_CS	88	
89	GND	90	
91		92	
93	L_SV_EXIST	94	H_MOTOR_OFF
95	GND_SV	96	DRUM_MOTOR_U
97	DRUM_MOTOR_V	98	DRUM_MOTOR_W
99	GND_SV	100	CAPSTAN_MOTOR_W
101	CAPSTAN_MOTOR_V	102	CAPSTAN_MOTOR_U
103	GND_SV	104	HC_SOL_HOLDER
105	HC_SOL_STARTER	106	HC_SOL_COMMON
107	GND_SV	108	REG+6V_SV
109	LOADING_MOTOR_-	110	LOADING_MOTOR_+
111	PINCH_SOL_ON	112	PINCH_SOL_COMMON
113	PINCH_SOL_OFF	114	GND_SV
115	5V-2	116	GND_SV
117	GND_SV	118	DRUM_PG
119	DRUM_W_HE_-	120	DRUM_W_HE_+
121	DRUM_V_HE_-	122	DRUM_V_HE_+
123	DRUM_U_HE_-	124	DRUM_U_HE_+
125	DRUM_FG	126	GND_SV
127	CAPSTAN_V_HE_-	128	CAPSTAN_V_HE_+
129	CAPSTAN_W_HE_-	130	CAPSTAN_W_HE_+
131	CAPSTAN_U_HE_+	132	CAPSTAN_U_HE_-
133	GND_SV	134	CAPSTAN_FG_A
135	GND_SV	136	CAPSTAN_FG_B
137	GND_SV	138	DEW_SENSOR_X
139	END_SENSOR_X	140	LOADING_SENSOR2_X
141	LOADING_SENSOR1_X	142	LOADING_SENSOR_LED
143	LOADING_FG_X	144	GND_SV
145	REG_-6V_SV	146	TENSION
147	TENSION_CURRENT	148	GND

SY-278 CN110

CN110

1	GND	26	SP_R_SI	51	F1P_CS	76	R_TRKT
2	GND	27	SP_R_SCK	52	SIFP_CS	77	GND
3	JC_RESET	28	D1M_SFCS	53	GND	78	MAIN_SWP
4	SPARE_1	29	GND	54	FLTD-P_3V	79	ODD_AVAREA
5	GND	30	D1M_STCS	55	TRKD-P	80	ODD_SCAREA
6	LTC_IN	31	D1S_SFCS	56	FLTD-R_3V	81	ODD_JSWP
7	LTC_GND	32	D1S_STCS	57	TRKD-R	82	EVEN_AVAREA
8	LTC_OUT	33	GND	58	CTL	83	EVEN_SCAREA
9	GND	34	D1R_SFCS	59	FRRE	84	EVEN_JSWP
10	BANK	35	D1R_STCS	60	TBC_RE	85	GND (REG_GND)
11	RM_TX_+	36	SIFR_RCS	61	GND	86	GND (REG_GND)
12	RM_TX_-	37	GND	62	SV_SCK1	87	GND (REG_GND)
13	GND	38	SIFR_PCS	63	SV_SI1	88	GND (REG_GND)
14	RM_RX_+	39	AIFP_CS	64	SV_SO1	89	REG_+5V
15	RM_RX_-	40	AIFI_CS	65	D1M_MCS	90	REG_+5V
16	PRIORITY_IN	41	GND	66	D1S_MCS	91	REG_+5V
17	GND	42	A1F_FCS	67	D1R_MCS	92	REG_+5V
18	PRIORITY_OUT	43	A1F_TCS	68	HIF_CS	93	REG_+6V
19		44	A1R_FCS	69	OP_SPARE	94	REG_+6V
20	SP_P_SO	45	GND	70	FE_SWP	95	REG_+6V
21	GND	46	A1R_TCS	71	D1R_J-SWP	96	REG_+6V
22	SP_P_SI	47	V2R_CS	72	P_FLTT	97	REG_-6V
23	SP_P_SCK	48	V2P_CS	73	P_TRKT	98	REG_-6V
24	SP_R_SO	49	GND	74	SUB_SWP	99	REG_-6V
25	GND	50	F1R_CS	75	R_FLTT	100	REG_-6V

SY-278 CN112

CN112

1	GND	26	SY_SO_3V	51		76	
2	NCG_CS	27	SY_SI_3V	52		77	GND
3	DIF_CS	28	SY_SCK_3V	53	GND	78	SY_RESET
4		29	GND	54		79	
5	GND	30	KYSUB_CS	55		80	
6	VPR_ID0	31	EXT_KY_SO	56		81	GND
7	VPR_ID1	32	EXT_KY_CS	57	GND	82	
8	NSG_CS	33	GND	58		83	UNREG_+12V
9	GND	34	EXT_KY_SCK	59		84	
10	RTG_STB	35	EXT_KY_SI	60		85	GND (3.15V_GND)
11	VPR_AD_CE	36		61	GND	86	GND (3.15V_GND)
12	L_CPU_RESET	37	GND	62		87	GND (3.15V_GND)
13	GND	38	H-KY_EXT_OUT	63		88	GND (3.15V_GND)
14	SY_SI	39	KY_SO	64		89	REG_+3.15V
15	SY_SO	40	KY_CS	65	GND	90	REG_+3.15V
16	SY_SCK	41	GND	66		91	REG_+3.15V
17	DPR_ID0	42	KY_SCK	67		92	REG_+3.15V
18	PLD_RESET	43	KY_SI	68		93	GND (UNREG_GND)
19	C1R_MCS	44		69	GND	94	GND (UNREG_GND)
20	C1R_SCS	45	GND	70		95	GND (UNREG_GND)
21	DPR_ID1	46	OPT_ID0	71		96	GND (UNREG_GND)
22	C1P_MCS	47	OPT_ID1	72		97	UNREG_+12V
23	C1P_SCS	48	L_OPTION_EXIST	73	GND	98	UNREG_+12V
24	DV_CS	49	GND	74		99	UNREG_+12V
25	GND	50		75		100	UNREG_+12V

SV-212 CN113

CN113

1	GND	26	RF_CUT_E	51	TEST_FREQ_1	76	MAIN_SCAREA
2	GND	27	RF_CUT_O	52	TEST_FREQ_2	77	GND
3	JC_RESET	28	ATF_GAINCONT	53	GND	78	MAIN_SWP
4		29	GND	54	FLTD-P_3V	79	ODD_AVAREA
5		30	DR_EEPROM_CS	55	TRKD-P	80	ODD_SCAREA
6	FAN_MOTOR_STOP	31	DR_EEPROM_RESET	56	FLTD-R_3V	81	ODD_JSWP
7		32	DR_EEPROM_BUSY	57	TRKD-R	82	EVEN_AVAREA
8		33	E_CH_RF_SEL1	58	CTL	83	EVEN_SCAREA
9	GND	34	E_CH_RF_SEL2	59	FRRE	84	EVEN_JSWP
10	BANK	35	ATF_ERROR_O	60	TBC_RE	85	GND (REG_GND)
11		36	ATF_ERROR_E	61		86	GND (REG_GND)
12		37	GND	62	SV_SCK1	87	GND (REG_GND)
13	GND	38	ATF_ERROR_GND	63	SV_SI1	88	GND (REG_GND)
14		39	RP_SCK	64	SV_SO1	89	REG_+5V
15		40	RP_SO	65	D1M_MCS	90	REG_+5V
16		41	RP_SI	66	D1S_MCS	91	REG_+5V
17		42	RP_DA_LD01	67	D1R_MCS	92	REG_+5V
18		43	RP_DA_LD02	68	HIF_CS	93	REG_+6V
19		44	RP_DA_LD03	69	OP_SPARE	94	REG_+6V
20		45	GND	70	FE_SWP	95	REG_+6V
21	GND	46	RP_DA_LD04	71	D1R_J-SWP	96	REG_+6V
22		47	RP_DIP_SW3	72	SUB_AVAREA	97	REG_-6V
23		48	M1_CS	73	SUB_SCAREA	98	REG_-6V
24		49	L_ITI_CENTER	74	SUB_SWP	99	REG_-6V
25		50	L_SUB_LOCK	75	MAIN_AVAREA	100	REG_-6V

SV-212 CN115

CN115

1	GND	26	R-POSITION_LED2	51	S-REEL_FG_A	76	GND_SV
2	L_CPU_RESET	27	SV_EEPROM_SO	52	GND_SV	77	R-BRAKE_SOL_ON
3	GND_SV	28	SV_EEPROM_SI	53	S-REEL_FG_B	78	R-BRAKE_SOL_COMMON
4	CASSECON_MOTOR_-	29	SV_EEPROM_SCK	54	GND_SV	79	R-BRAKE_SOL_OFF
5	CASSECON_MOTOR_+	30	SV_EEPROM_CS	55	S-REEL_W_HE_+	80	GND_SV
6	CASSE_6V	31	SV_EEPROM_BUSY	56	S-REEL_W_HE_-	81	S-REEL_MOTOR_W
7	CASSECOM_SENSOR1_X	32	M-POSITION_X	57	S-REEL_V_HE_+	82	S-REEL_MOTOR_V
8	CASSECOM_SENSOR3_X	33	C-POSITION_X	58	S-REEL_V_HE_-	83	S-REEL_MOTOR_U
9	CASSECOM_SENSOR2_X	34	T-REEL_W_HE_-	59	S-REEL_U_HE_+	84	
10	CC83_LED	35	T-REEL_W_HE_+	60	S-REEL_U_HE_-	85	GND (3.15V_GND)
11	L_CASSE_EXIST	36	T-REEL_V_HE_+	61	GND_SV	86	GND (3.15V_GND)
12	SIZE_M	37	T-REEL_V_HE_-	62	GND_SV	87	GND (3.15V_GND)
13	SIZE_L	38	T-REEL_U_HE_+	63	R-SHIFT_MOTOR_-	88	GND (3.15V_GND)
14	SIZE_M-ADPT	39	T-REEL_U_HE_-	64	R-SHIFT_MOTOR_+	89	REG_+3.15V
15	CASSE_IN_S1	40	GND_SV	65	REG+5V_SV	90	REG_+3.15V
16	CASSE_IN_S2	41	T-REEL_FG_A	66	REG+3.15V_SV	91	REG_+3.15V
17	CASSE_IN_M	42	GND_SV	67	GND_SV	92	REG_+3.15V
18	CASSE_IN_L	43	T-REEL_FG_B	68	T-REEL_MOTOR_W	93	GND (UNREG_GND)
19	GND_SV	44	GND_SV	69	T-REEL_MOTOR_V	94	GND (UNREG_GND)
20	TOP_END_SENSOR_LED	45	REC_INH_SW	70	T-REEL_MOTOR_U	95	GND (UNREG_GND)
21	TOP_SENSOR_X	46	MIC_VCC	71	GND_SV	96	GND (UNREG_GND)
22	MINI_POSITION_X	47	MIC_SDA	72	GND_SV	97	UNREG_+12V
23	R-POSITION_LED1	48	MIC_GND	73	M-STOP_SOL_ON	98	UNREG_+12V
24	STD_POSITION_X	49	MIC_SCK	74	M-STOP_SOL_COMMON	99	UNREG_+12V
25	THERMO_SENSOR_X	50	GND_SV	75	M-STOP_SOL_OFF	100	UNREG_+12V

BOARD NO.SUFFIX	LOT NO.
11	907-910
12	911-092
13	093-

Mother board

MB-859 (2/7)

BOARD NO. 1-675-524-11, 12, 13

LOT NO. 907-

DSR-2000_MB-859_013_2

15-94

MB-859 (3/7)

CP-341 CN-601

CN601

1	OUTPUT_BY_G	OUTPUT_BY_G	001
2	OUTPUT_BY_X	OUTPUT_BY_X	001
3	AES/EBU12_OUT_G	AES/EBU12_OUT_G	001
4	AES/EBU12_OUT_X	AES/EBU12_OUT_X	001, 002
5	AES/EBU34_OUT_G	AES/EBU34_OUT_G	001
6	AES/EBU34_OUT_X	AES/EBU34_OUT_X	001, 002
7	GND		
8	MONI_OUT_G	MONI_OUT_G	001
9	MONI_OUT_X	MONI_OUT_X	001
10	GND		
11	AES/EBU12_IN_G	AES/EBU12_IN_G	001
12	AES/EBU12_IN_X	AES/EBU12_IN_X	001
13	AES/EBU34_IN_G	AES/EBU34_IN_G	001
14	AES/EBU34_IN_X	AES/EBU34_IN_X	001

CP-341 CN-602

CN602

1	OUTPUT_VIDEO1_G	OUTPUT_VIDEO1_G	001
2	OUTPUT_VIDEO1_X	OUTPUT_VIDEO1_X	001
3	INPUT_VIDEO_G	INPUT_VIDEO_G	001
4	INPUT_VIDEO_X	INPUT_VIDEO_X	001
5	INPUT_Y_G	INPUT_Y_G	001
6	INPUT_Y_X	INPUT_Y_X	001
7	INPUT_RY_G	INPUT_RY_G	001
8	INPUT_RY_X	INPUT_RY_X	001
9	INPUT_BY_G	INPUT_BY_G	001
10	INPUT_BY_X	INPUT_BY_X	001
11	OUTPUT_Y_G	OUTPUT_Y_G	001
12	OUTPUT_Y_X	OUTPUT_Y_X	001
13	OUTPUT_RY_G	OUTPUT_RY_G	001
14	OUTPUT_RY_X	OUTPUT_RY_X	001

CP-341 CN-603

CN603

1	INPUT_SY_G	INPUT_SY_G	001
2	INPUT_SY_X	INPUT_SY_X	001
3	OUTPUT_REF_G	OUTPUT_REF_G	001
4	OUTPUT_REF_X	OUTPUT_REF_X	001
5	INPUT_REF_G	INPUT_REF_G	001
6	INPUT_REF_X	INPUT_REF_X	001
7	OUTPUT_SC_G	OUTPUT_SC_G	001
8	OUTPUT_SC_X	OUTPUT_SC_X	001
9	OUTPUT_SY_G	OUTPUT_SY_G	001
10	OUTPUT_SY_X	OUTPUT_SY_X	001
11	OUTPUT_VIDEO3_G	OUTPUT_VIDEO3_G	001
12	OUTPUT_VIDEO3_X	OUTPUT_VIDEO3_X	001
13	OUTPUT_VIDEO2_G	OUTPUT_VIDEO2_G	001
14	OUTPUT_VIDEO2_X	OUTPUT_VIDEO2_X	001

CP-341 CN-604

CN604

1	PRIORITY_OUT	PRIORITY_OUT	002
2	GND		
3	REM_YC_DELAY	REM_YC_DELAY	001
4	REM_SYNC_PHASE	REM_SYNC_PHASE	001
5	REM_HUE	REM_HUE	003
6	REM_SC_PHASE	REM_SC_PHASE	003
7	REM_VIDEO_LEVEL	REM_VIDEO_LEVEL	003
8	REM_SETUP_LEVEL	REM_SETUP_LEVEL	003
9	REM_CHROMA_LEVEL	REM_CHROMA_LEVEL	003
10	LTC_OUT	LTC_OUT	002
11	LTC_GND	LTC_GND	002
12	LTC_IN	LTC_IN	002
13	INPUT_SC_G	INPUT_SC_G	001
14	INPUT_SC_X	INPUT_SC_X	001

CP-341 CN-605

CN605

1	UNREG_-12V	UNREG_-12V	002, 003
2	GND (UNREG_GND)		
3	UNREG_+12V	UNREG_+12V	001, 002, 003
4	H-KY_EXT_OUT	H-KY_EXT_OUT	002, 003
5	EXT_KY_SO	EXT_KY_SO	002
6	EXT_KY_CS	EXT_KY_CS	002
7	EXT_KY_SCK	EXT_KY_SCK	002
8	EXT_KY_SI	EXT_KY_SI	002
9	GND		
10	RM_RX_-	RM_RX_-	002
11	RM_RX_+	RM_RX_+	002
12	RM_TX_-	RM_TX_-	002
13	RM_TX_+	RM_TX_+	002
14	PRIORITY_IN	PRIORITY_IN	002

GND

CP-342 CN-606

CN606

1	CH4_OUT_X	CH4_OUT_X	001
2	CH4_OUT_G	CH4_OUT_G	001
3	GND		
4	GND		
5	CH3_A/D_X	CH3_A/D_X	001
6	CH3_A/D_Y	CH3_A/D_Y	001
7	CH3_A/D_G	CH3_A/D_G	001
8	GND		
9	GND		
10	CH4_A/D_X	CH4_A/D_X	001
11	CH4_A/D_Y	CH4_A/D_Y	001
12	CH4_A/D_G	CH4_A/D_G	001
13	GND		
14	GND		

CP-342 CN-607

CN607

1	GND		
2	GND		
3	CH1_A/D_X	CH1_A/D_X	001
4	CH1_A/D_Y	CH1_A/D_Y	001
5	CH1_A/D_G	CH1_A/D_G	001
6	GND		
7	GND		
8	CH2_A/D_X	CH2_A/D_X	001
9	CH2_A/D_Y	CH2_A/D_Y	001
10	CH2_A/D_G	CH2_A/D_G	001
11	GND		
12	GND		
13	CH3_OUT_X	CH3_OUT_X	001
14	CH3_OUT_G	CH3_OUT_G	001

CP-342 CN-608

CN608

1	UNREG_-12V	UNREG_-12V	002, 003
2	UNREG_-12V	UNREG_-12V	002, 003
3	GND (UNREG_GND)		
4	GND (UNREG_GND)		
5	UNREG_+12V	UNREG_+12V	001, 002, 003
6	UNREG_+12V	UNREG_+12V	001, 002, 003
7	AUDIO_OUT_MUTE	AUDIO_OUT_MUTE	001, 002, 003
8	GND		
9	CH1_OUT_X	CH1_OUT_X	001
10	CH1_OUT_G	CH1_OUT_G	001
11	GND		
12	GND		
13	CH2_OUT_X	CH2_OUT_X	001
14	CH2_OUT_G	CH2_OUT_G	001

GND

SW-11 CN-701

CN701

1	H-TBC_LOCAL	H-TBC_LOCAL	001
2	LOC_YC_DELAY	LOC_YC_DELAY	001
3	LOC_SYNC_PHASE	LOC_SYNC_PHASE	001
4	GND		
5	REM_HUE	REM_HUE	003
6	REM_SC_PHASE	REM_SC_PHASE	003
7	REM_VIDEO_LEVEL	REM_VIDEO_LEVEL	003
8	REM_SETUP_LEVEL	REM_SETUP_LEVEL	003
9	REM_CHROMA_LEVEL	REM_CHROMA_LEVEL	003
10	GND		
11	MIC_VCC	MIC_VCC	002, 004
12	MIC_SDA	MIC_SDA	002, 004
13	MIC_GND	MIC_GND	002, 004
14	MIC_SCK	MIC_SCK	002, 004

SW-11 CN-702

CN702

1	GND		
2	SY_SI	SY_SI	001, 002
3	SY_SO	SY_SO	001, 002
4	SY_SCK	SY_SCK	001, 002
5	GND		
6	L_CPU_RESET	L_CPU_RESET	001, 002
7	KYSUB_CS	KYSUB_CS	002
8	H-KY_EXT_OUT	H-KY_EXT_OUT	002, 003
9	KY_SO	KY_SO	002
10	KY_CS	KY_CS	002
11	GND		
12	KY_SCK	KY_SCK	002
13	KY_SI	KY_SI	002
14	GND		

SW-11 CN-703

CN703

1	GND		
2	GND		
3	GND		
4	GND		
5	GND		
6	GND		
7	GND (REG_GND)		
8	GND (REG_GND)		
9	REG_+5V	REG_+5V	001, 002, 003
10	REG_+5V	REG_+5V	001, 002, 003
11	GND (UNREG_GND)		
12	GND (UNREG_GND)		
13	UNREG_+12V	UNREG_+12V	001, 002, 003
14	UNREG_+12V	UNREG_+12V	001, 002, 003

SW-11 CN-704

CN704

1	REG_-6V	REG_-6V	001, 002, 003
2	REG_-6V	REG_-6V	001, 002, 003
3	GND (REG_GND)		
4	GND (REG_GND)		
5	REG_+6V	REG_+6V	001, 002, 003
6	REG_+6V	REG_+6V	001, 002, 003
7			
8	GND		
9	HP_L_OUT_X	HP_L_OUT_X	001
10	HP_L_OUT_G	HP_L_OUT_G	001
11	GND		
12	HP_R_OUT_X	HP_R_OUT_X	001
13	HP_R_OUT_G	HP_R_OUT_G	001
14	AUDIO_OUT_MUTE	AUDIO_OUT_MUTE	001, 002, 003

GND

SW-REG CN-901

CN901

1	FAN_MOTOR_STOP	FAN_MOTOR_STOP	002
2	REG_+5V	REG_+5V	001, 002, 003
3	GND (REG_GND)		
4	REG_+6V	REG_+6V	001, 002, 003
5	GND (REG_GND)		
6	REG_-6V	REG_-6V	001, 002, 003
7	GND (UNREG_GND)		
8	UNREG_-12V	UNREG_-12V	002, 003
9	GND (UNREG_GND)		
10	UNREG_+12V	UNREG_+12V	001, 002, 003

SW-REG CN-902

CN902

1	GND (3.15V_GND)		
2	GND (3.15V_GND)		
3	REG_+3.15V	REG_+3.15V	001, 002, 003
4	REG_+3.15V	REG_+3.15V	001, 002, 003

GND

BOARD NO. SUFFIX	LOT NO.
11	907-910
12	911-092
13	093-

Mother board

MB-859 (3/7)

BOARD NO. 1-675-524-11, 12, 13

LOT NO. 907-

DSR-2000_MB-859_013_3

MB-859 (4/7)

MS-64 CN502

CN502

1	GND_SV
2	REG+6V_SV
3	5V-2
4	GND_SV
5	DRUM_PG
6	DRUM_W_HE_-
7	DRUM_W_HE_+
8	DRUM_V_HE_-
9	DRUM_V_HE_+
10	DRUM_U_HE_-
11	DRUM_U_HE_+
12	DRUM_FG
13	GND_SV
14	CAPSTAN_V_HE_-
15	CAPSTAN_V_HE_+
16	CAPSTAN_W_HE_-
17	CAPSTAN_W_HE_+
18	CAPSTAN_U_HE_+
19	CAPSTAN_U_HE_-
20	GND_SV
21	CAPSTAN_FG_A
22	GND_SV
23	CAPSTAN_FG_B
24	GND_SV
25	DEW_SENSOR_X
26	END_SENSOR_X
27	LOADING_SENSOR2_X
28	LOADING_SENSOR1_X
29	LOADING_SENSOR_LED
30	LOADING_FG_X

MS-64 CN503

CN503

1	GND_SV
2	GND_SV
3	TENSION
4	TENSION_CURRENT
5	REG_-6V_SV
6	GND_SV
7	TOP_END_SENSOR_LED
8	TOP_SENSOR_X
9	MINI_POSITION_X
10	R-POSITION_LED1
11	STD_POSITION_X
12	THERMO_SENSOR_X
13	GND_SV
14	R-POSITION_LED2
15	C-POSITION_X
16	M-POSITION_X
17	GND_SV
18	SV_EEPROM_SO
19	SV_EEPROM_SI
20	SV_EEPROM_SCK
21	SV_EEPROM_CS
22	SV_EEPROM_BUSY
23	GND_SV
24	GND_SV
25	T-REEL_W_HE_-
26	T-REEL_W_HE_+
27	T-REEL_V_HE_+
28	T-REEL_V_HE_-
29	T-REEL_U_HE_+
30	T-REEL_U_HE_-

MS-64 CN504

CN504

1	NC
2	NC
3	NC
4	NC
5	NC
6	GND_SV
7	T-REEL_FG_A
8	GND_SV
9	T-REEL_FG_B
10	GND_SV
11	REC_INH_SW
12	MIC_VCC
13	MIC_SDA
14	MIC_GND
15	MIC_SCK
16	GND_SV
17	S-REEL_FG_A
18	GND_SV
19	S-REEL_FG_B
20	GND_SV
21	S-REEL_W_HE_+
22	S-REEL_W_HE_-
23	S-REEL_V_HE_+
24	S-REEL_V_HE_-
25	S-REEL_U_HE_+
26	S-REEL_U_HE_-
27	REG+5V_SV
28	REG+5V_SV
29	REG+3.15V_SV
30	GND_SV

MS-64 CN505

CN505

1	CASSE_IN_L
2	CASSE_IN_M
3	CASSE_IN_S2
4	CASSE_IN_S1
5	SIZE_M-ADPT
6	SIZE_L
7	SIZE_M
8	L_CASSE_EXIST
9	CC83_LED
10	CASSECOM_SENSOR2_X
11	CASSECOM_SENSOR3_X
12	CASSECOM_SENSOR1_X
13	CASSE_6V
14	CASSECON_MOTOR_+
15	CASSECON_MOTOR_+
16	CASSECON_MOTOR_-
17	CASSECON_MOTOR_-
18	GND_SV

MS-64 CN501

CN501

1	GND_SV
2	R-SHIFT_MOTOR_-
3	R-SHIFT_MOTOR_+
4	T-REEL_MOTOR_W
5	T-REEL_MOTOR_V
6	T-REEL_MOTOR_U
7	M-STOP_SOL_ON
8	M-STOP_SOL_ON
9	M-STOP_SOL_COMMON
10	M-STOP_SOL_COMMON
11	M-STOP_SOL_OFF
12	M-STOP_SOL_OFF
13	R-BRAKE_SOL_ON
14	R-BRAKE_SOL_ON
15	R-BRAKE_SOL_COMMON
16	R-BRAKE_SOL_COMMON
17	R-BRAKE_SOL_OFF
18	R-BRAKE_SOL_OFF
19	S-REEL_MOTOR_W
20	S-REEL_MOTOR_V
21	S-REEL_MOTOR_U
22	GND_SV

MS-64 CN500

CN500

1	GND_SV
2	DRUM_MOTOR_U
3	DRUM_MOTOR_V
4	DRUM_MOTOR_W
5	GND_SV
6	CAPSTAN_MOTOR_W
7	CAPSTAN_MOTOR_V
8	CAPSTAN_MOTOR_U
9	GND_SV
10	HC_SOL_HOLDER
11	HC_SOL_STARTER
12	HC_SOL_STARTER
13	HC_SOL_COMMON
14	HC_SOL_COMMON
15	LOADING_MOTOR_-
16	LOADING_MOTOR_+
17	PINCH_SOL_ON
18	PINCH_SOL_ON
19	PINCH_SOL_COMMON
20	PINCH_SOL_COMMON
21	PINCH_SOL_OFF
22	PINCH_SOL_OFF

BOARD NO. SUFFIX	LOT NO.
11	907-910
12	911-092
13	093-

Mother board

MB-859 (4/7)

BOARD NO. 1-675-524-11, 12, 13
LOT NO. 907-

DSR-2000_MB-859_013_4

MB-859 (5/7)

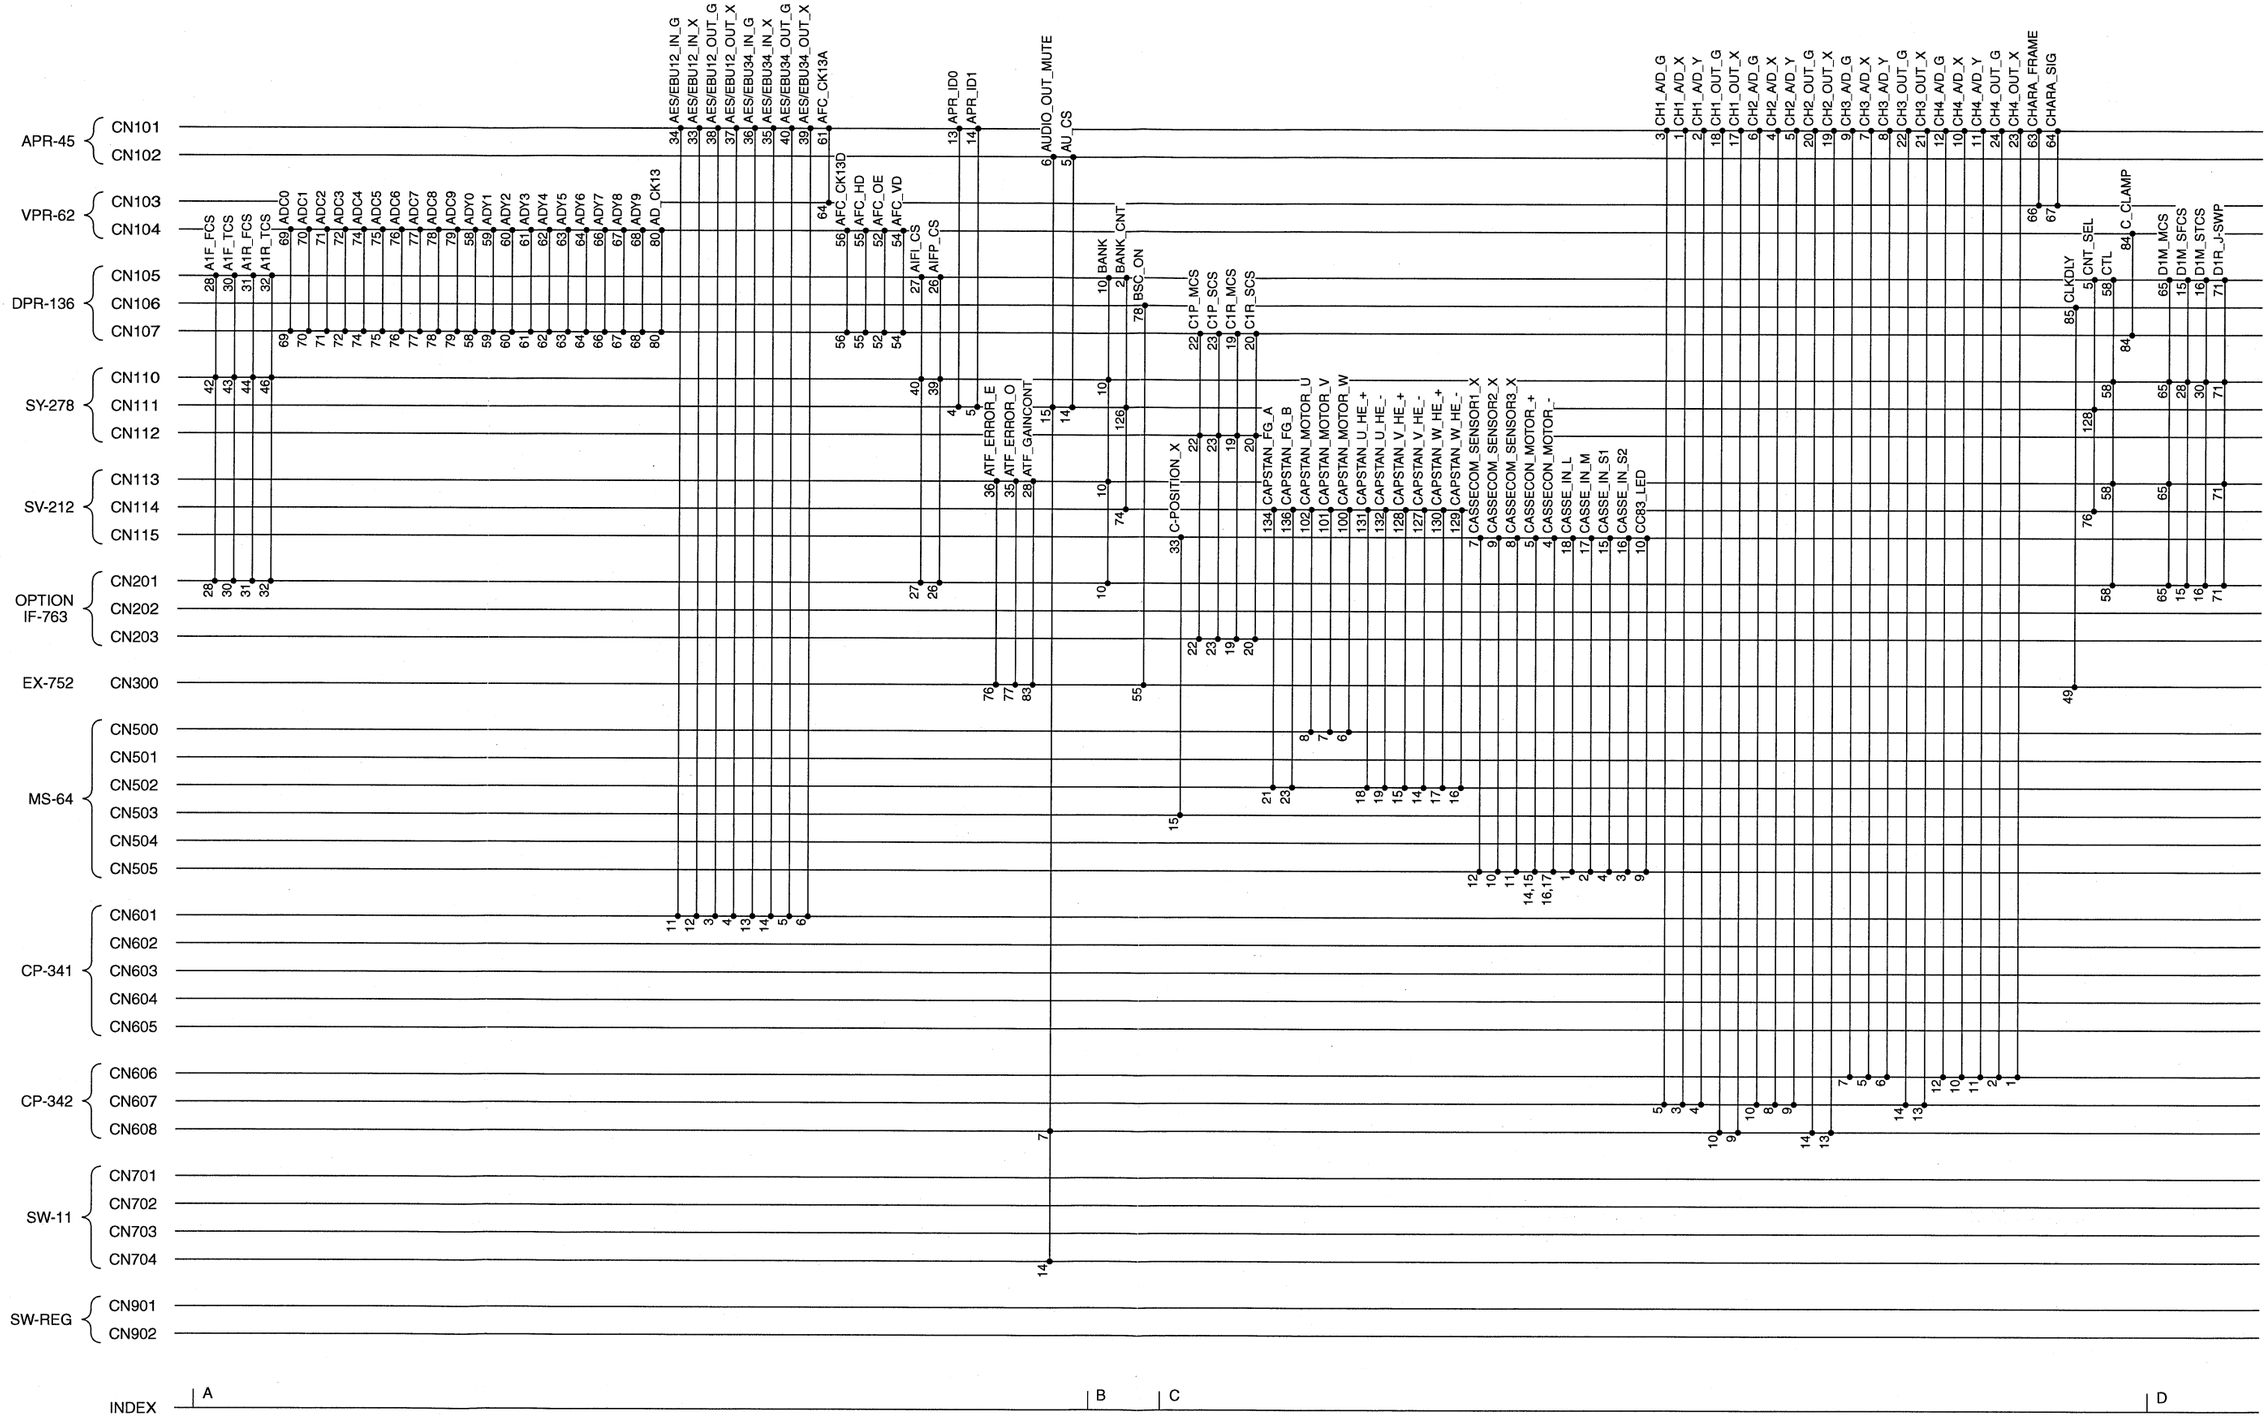
APR-45
CN101
CN102
VPR-62
CN103
CN104
DPR-136
CN105
CN106
CN107
SY-278
CN110
CN111
CN112
SV-212
CN113
CN114
CN115
OPTION IF-763
CN201
CN202
CN203
EX-752
CN300
MS-64
CN500
CN501
CN502
CN503
CN504
CN505
CP-341
CN601
CN602
CN603
CN604
CN605
CP-342
CN606
CN607
CN608
SW-11
CN701
CN702
CN703
CN704
SW-REG
CN901
CN902
INDEX
A
B
C
D
AES/EBU12_IN_G
AES/EBU12_IN_X
AES/EBU12_OUT_G
AES/EBU12_OUT_X
AES/EBU34_IN_G
AES/EBU34_IN_X
AES/EBU34_OUT_G
AES/EBU34_OUT_X
AFC_CK13A
APR_ID0
APR_ID1
AUDIO_OUT_MUTE
AU_CS
A1F_FCS
A1F_TCS
A1R_FCS
A1R_TCS
ADC0
ADC1
ADC2
ADC3
ADC4
ADC5
ADC6
ADC7
ADC8
ADC9
ADY0
ADY1
ADY2
ADY3
ADY4
ADY5
ADY6
ADY7
ADY8
ADY9
AD_CK13
AFC_CK13D
AFC_HD
AFC_OE
AFC_VD
AIFI_CS
AIFP_CS
BANK
BANK_CNT
BSC_ON
C1P_MCS
C1P_SCS
C1R_MCS
C1R_SCS
ATF_ERROR_E
ATF_ERROR_O
ATF_GAINCONT
CAPSTAN_FG_A
CAPSTAN_FG_B
CAPSTAN_MOTOR_U
CAPSTAN_MOTOR_V
CAPSTAN_MOTOR_W
CAPSTAN_U_HE_+
CAPSTAN_U_HE_-
CAPSTAN_V_HE_+
CAPSTAN_V_HE_-
CAPSTAN_W_HE_+
CAPSTAN_W_HE_-
C-POSITION_X
CASSECOM_SENSOR1_X
CASSECOM_SENSOR2_X
CASSECOM_SENSOR3_X
CASSECON_MOTOR_+
CASSECON_MOTOR_-
CASSE_IN_L
CASSE_IN_M
CASSE_IN_S1
CASSE_IN_S2
CC83_LED
CH1_A/D_G
CH1_A/D_X
CH1_A/D_Y
CH1_OUT_G
CH1_OUT_X
CH2_A/D_G
CH2_A/D_X
CH2_A/D_Y
CH2_OUT_G
CH2_OUT_X
CH3_A/D_G
CH3_A/D_X
CH3_A/D_Y
CH3_OUT_G
CH3_OUT_X
CH4_A/D_G
CH4_A/D_X
CH4_A/D_Y
CH4_OUT_G
CH4_OUT_X
CHARA_FRAME
CHARA_SIG
CLKDLY
CNT_SEL
CTL
C_CLAMP
D1M_MCS
D1M_SFCS
D1M_STCS
D1R_J-SWP

MB-859 (5/7)

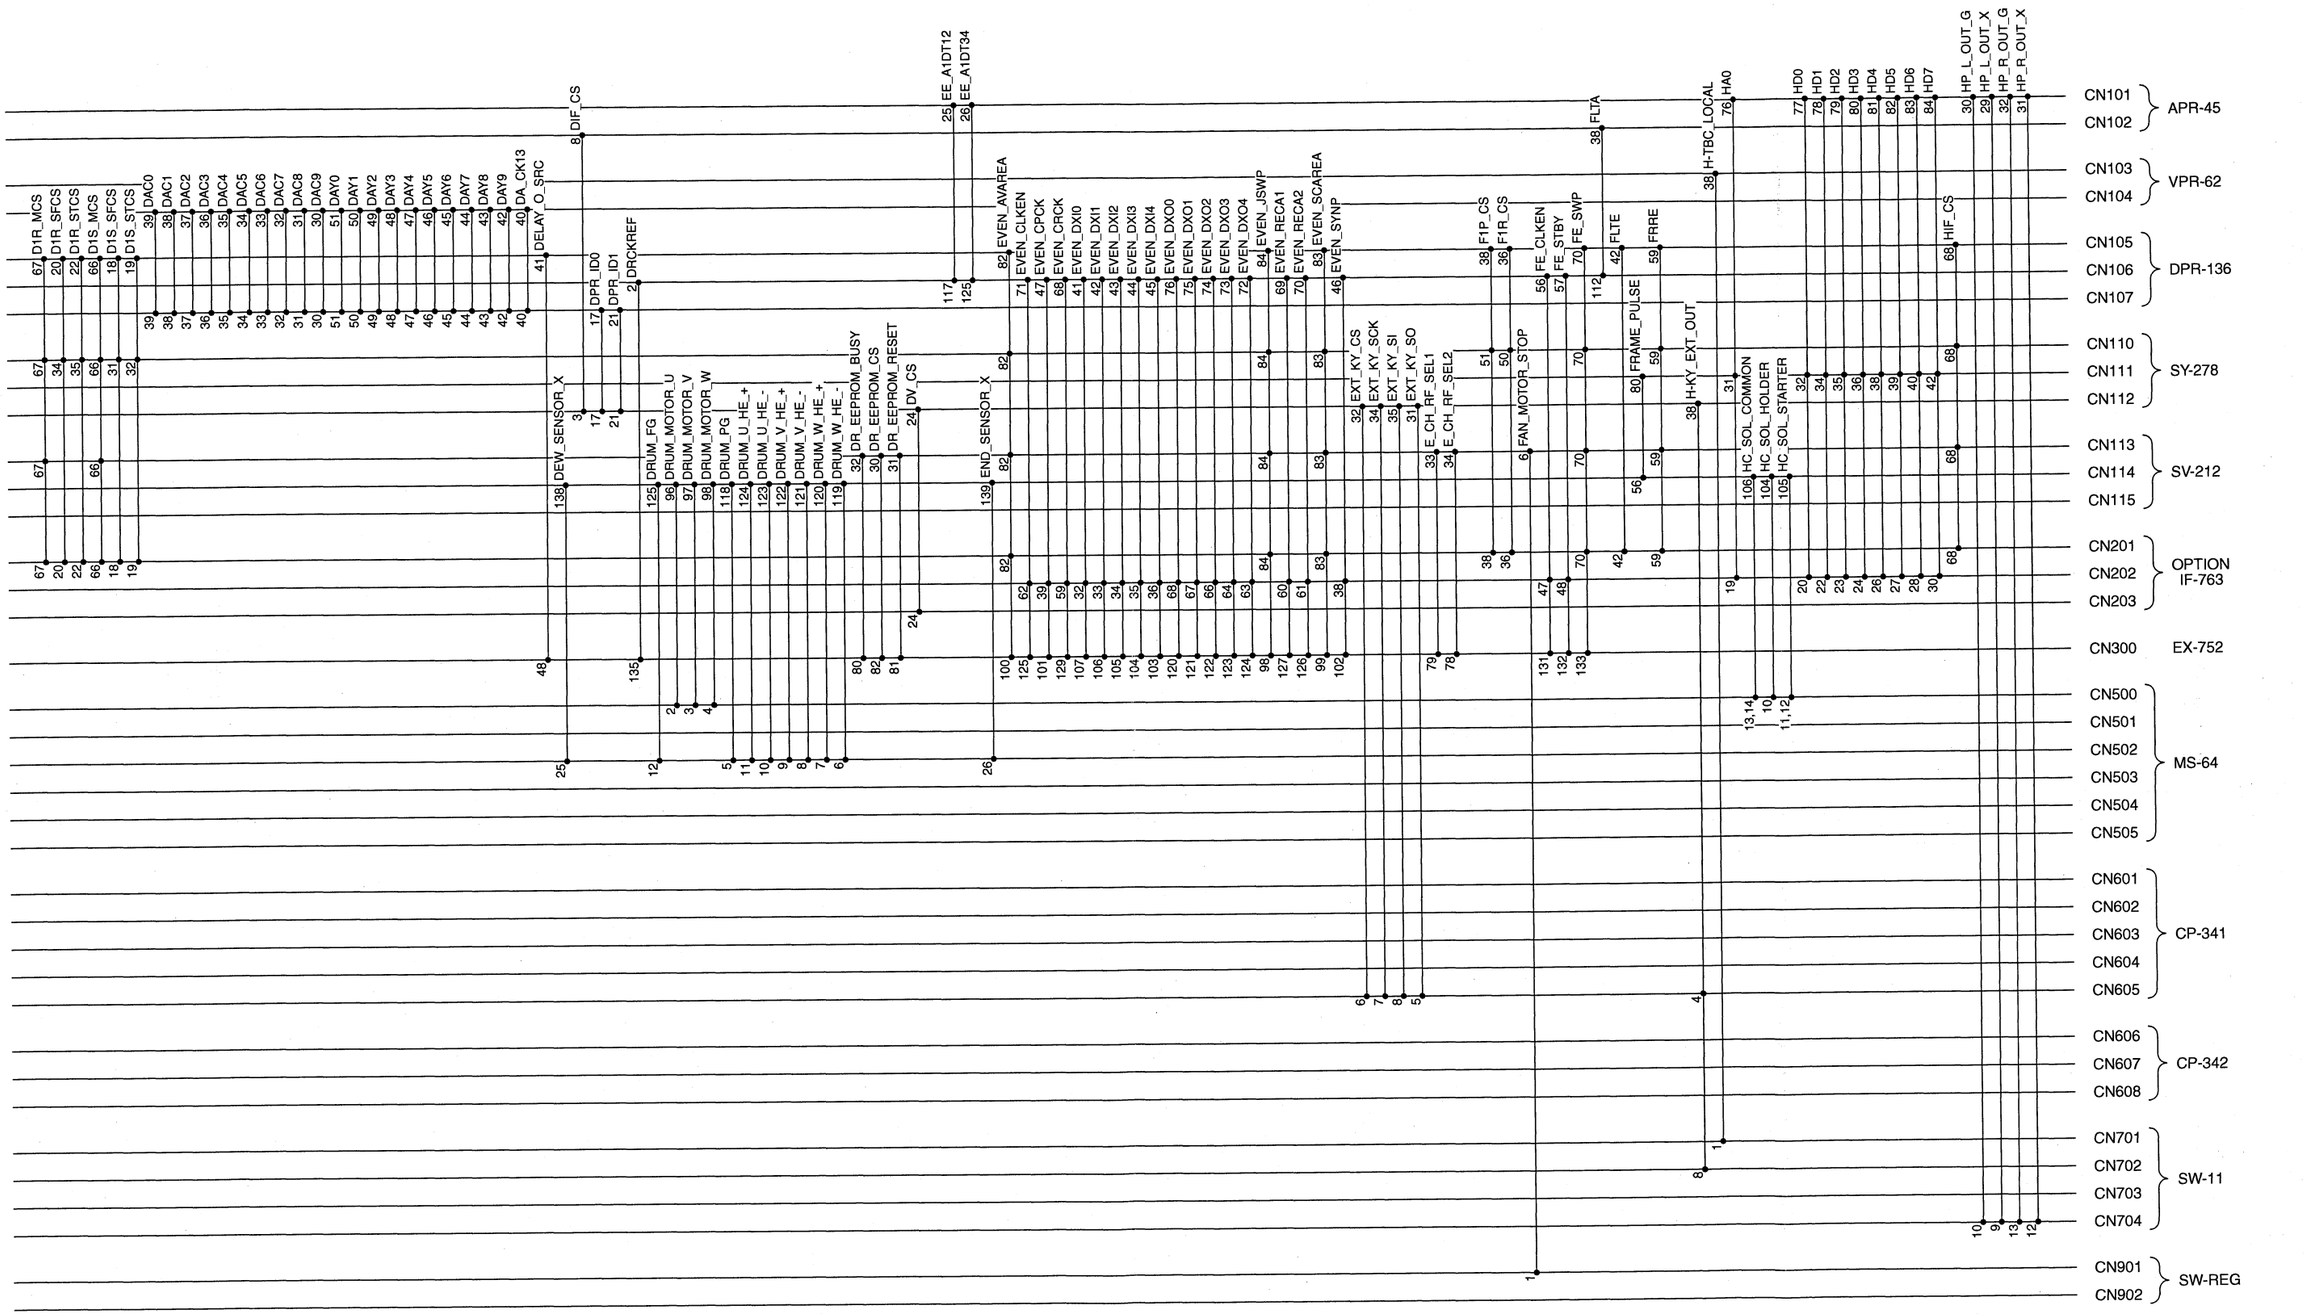

BOARD NO. SUFFIX	LOT NO.
11	907-910
12	911-092
13	093-

INDEX

Mother board

MB-859 (5/7)

BOARD NO. 1-675-524-11, 12, 13
LOT NO. 907-

DSR-2000/2000P

15-99

15-99

MB-859 (6/7)

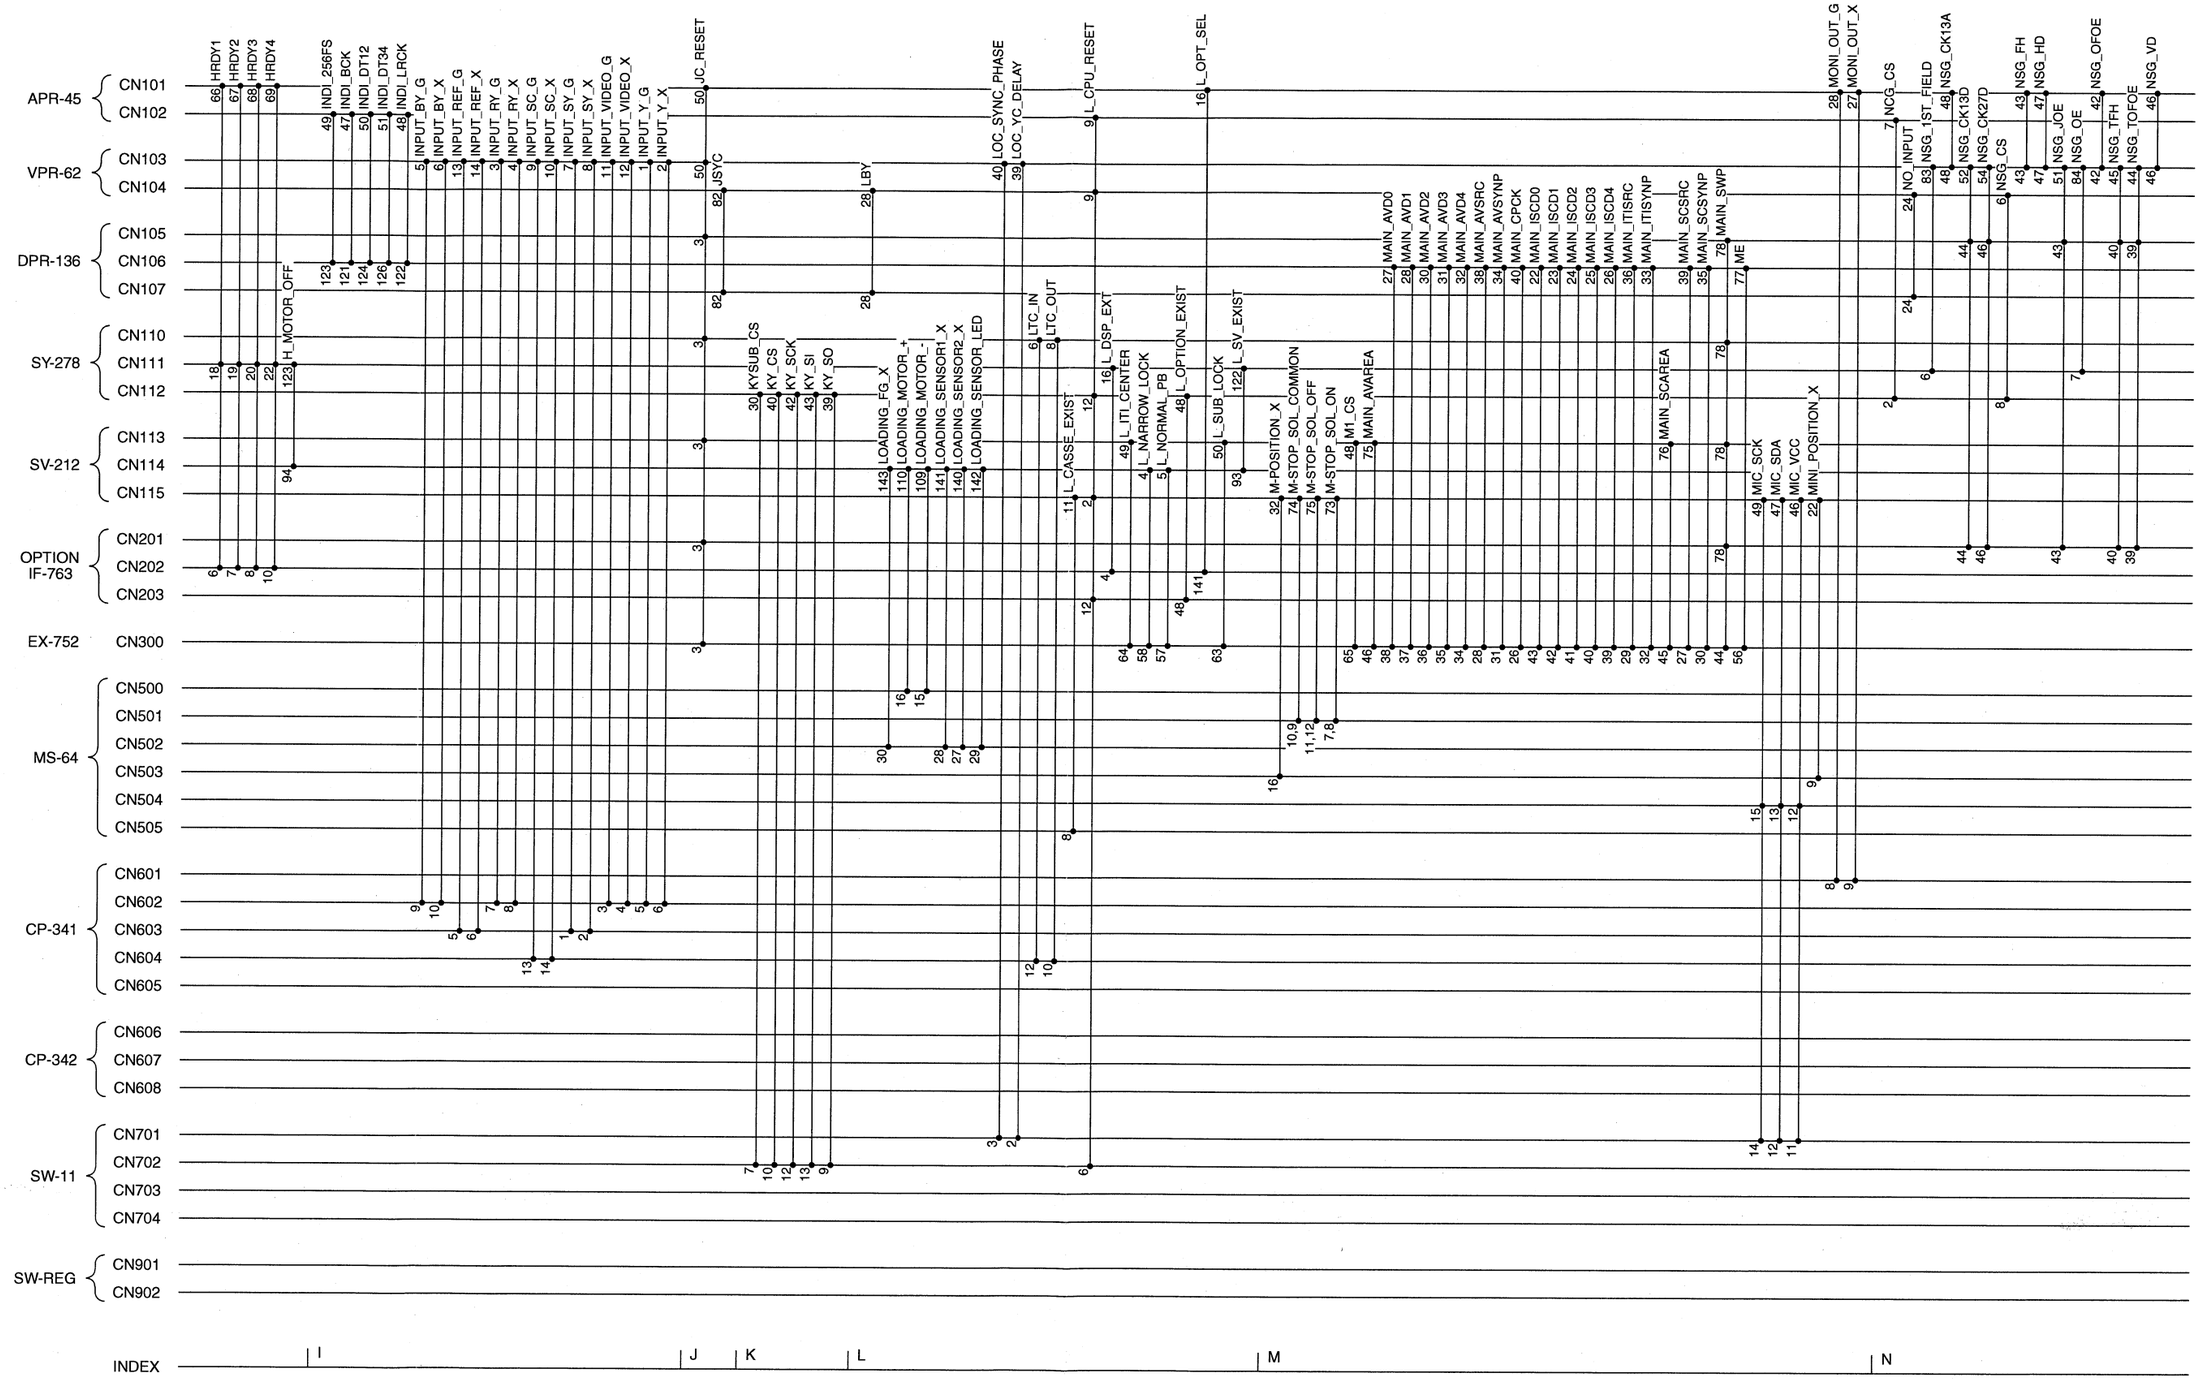

15-100 15-100

DSR-2000/2000P

MB-859 (6/7)

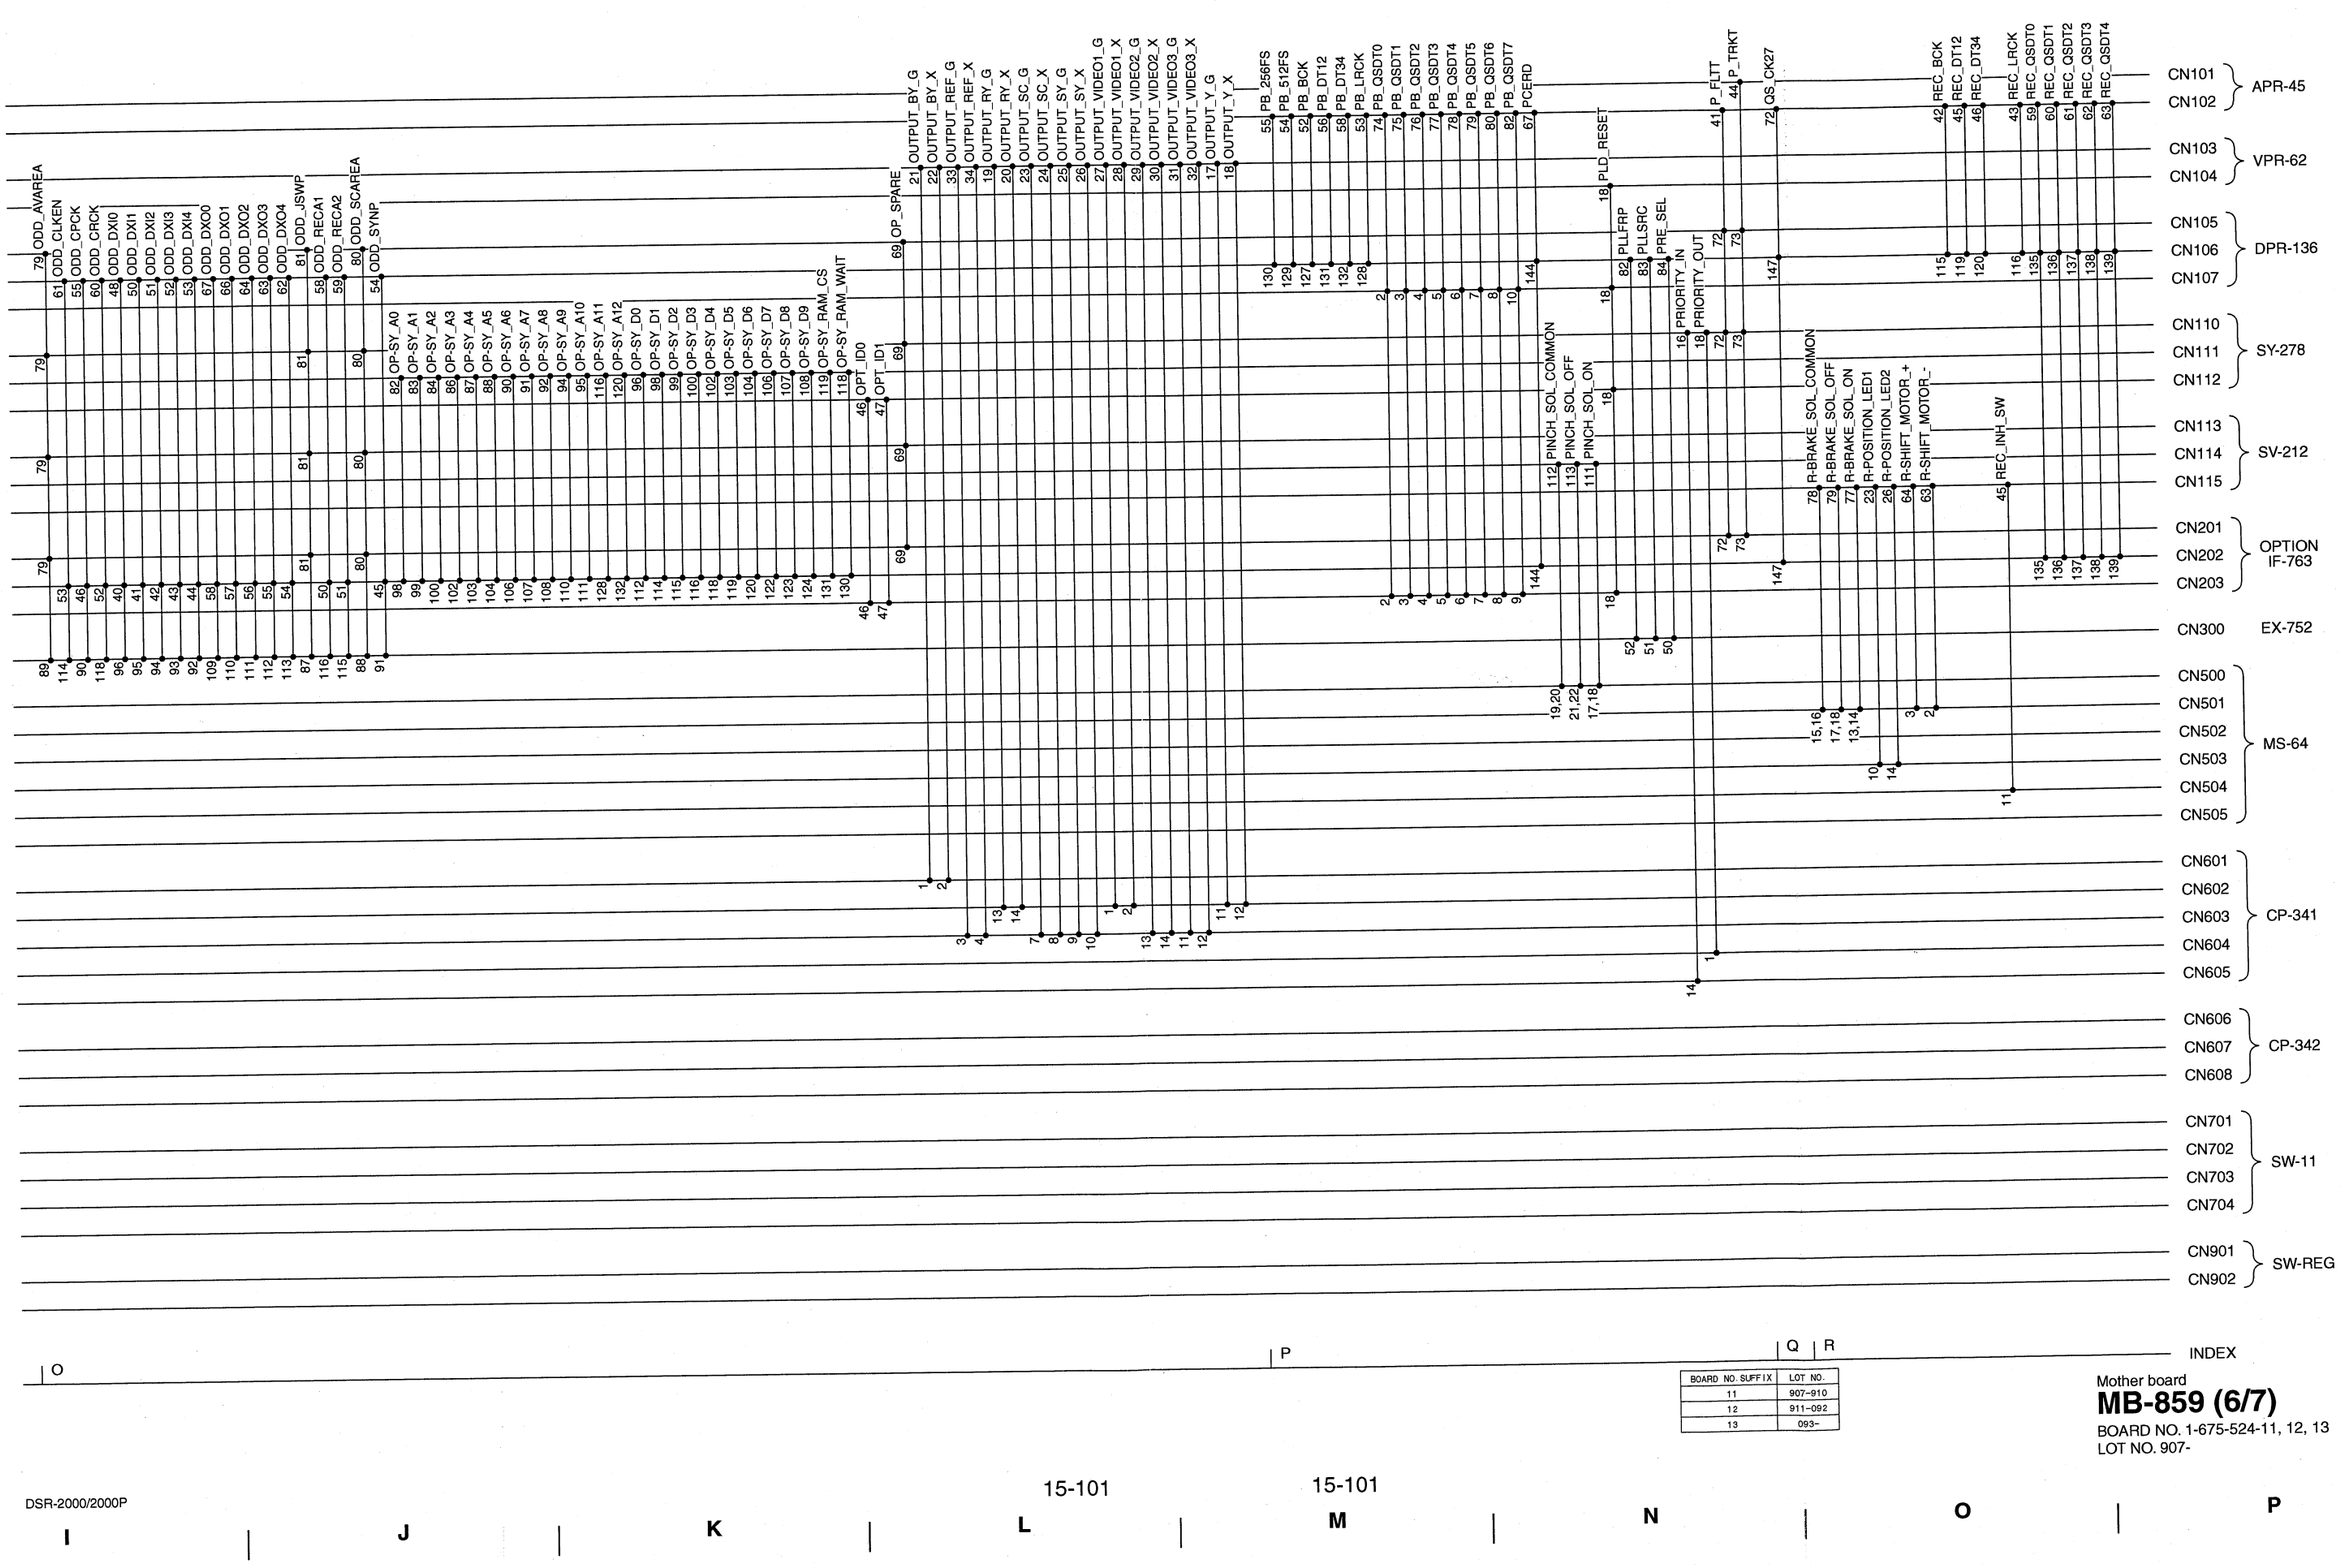

BOARD NO. SUFFIX	LOT NO.
11	907-910
12	911-092
13	093-

Mother board
MB-859 (6/7)
BOARD NO. 1-675-524-11, 12, 13
LOT NO. 907-

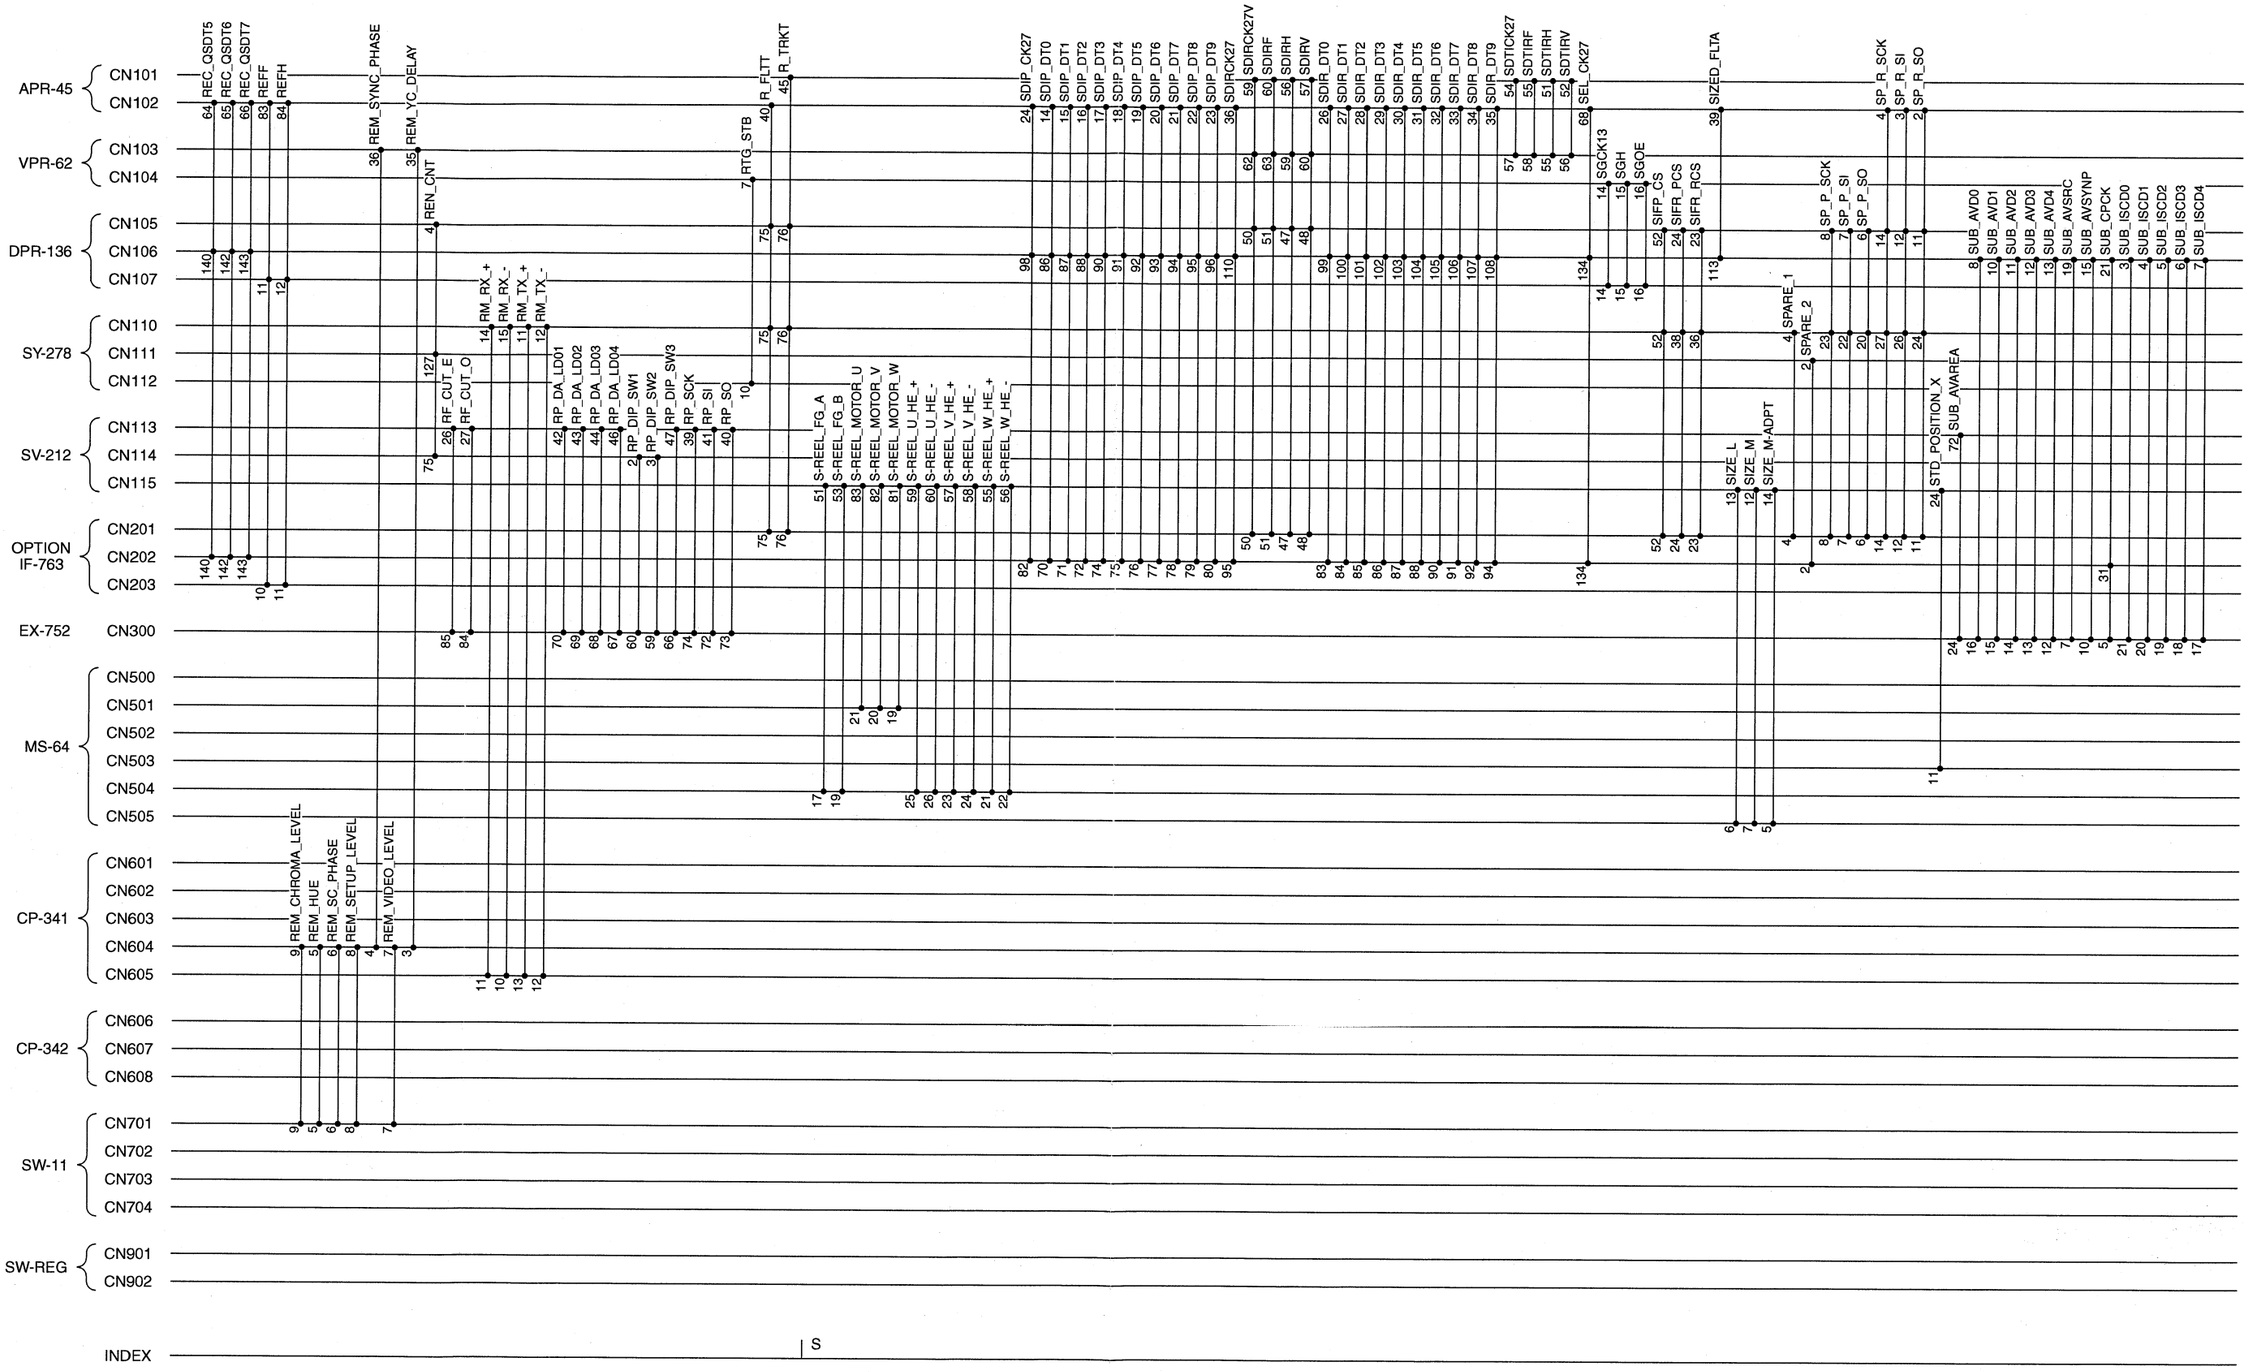
APR-45
CN101
CN102
VPR-62
CN103
CN104
DPR-136
CN105
CN106
CN107
SY-278
CN110
CN111
CN112
SV-212
CN113
CN114
CN115
OPTION IF-763
CN201
CN202
CN203
EX-752
CN300
MS-64
CN500
CN501
CN502
CN503
CN504
CN505
CP-341
CN601
CN602
CN603
CN604
CN605
CP-342
CN606
CN607
CN608
SW-11
CN701
CN702
CN703
CN704
SW-REG
CN901
CN902
INDEX
REC_QSDT5
REC_QSDT6
REC_QSDT7
REFF
REFH
REM_SYNC_PHASE
REM_YC_DELAY
REN_CNT
RTG_STB
R_FLTT
R_TRKT
RM_RX_+
RM_RX_-
RM_TX_+
RM_TX_-
RF_CUT_E
RF_CUT_O
RP_DA_LD01
RP_DA_LD02
RP_DA_LD03
RP_DA_LD04
RP_DIP_SW1
RP_DIP_SW2
RP_DIP_SW3
RP_SCK
RP_SI
RP_SO
S-REEL_FG_A
S-REEL_FG_B
S-REEL_MOTOR_U
S-REEL_MOTOR_V
S-REEL_MOTOR_W
S-REEL_U_HE_+
S-REEL_U_HE_-
S-REEL_V_HE_+
S-REEL_V_HE_-
S-REEL_W_HE_+
S-REEL_W_HE_-
SDIP_CK27
SDIP_DT0
SDIP_DT1
SDIP_DT2
SDIP_DT3
SDIP_DT4
SDIP_DT5
SDIP_DT6
SDIP_DT7
SDIP_DT8
SDIP_DT9
SDIRCK27
SDIRCK27V
SDIRF
SDIRH
SDIRV
SDIR_DT0
SDIR_DT1
SDIR_DT2
SDIR_DT3
SDIR_DT4
SDIR_DT5
SDIR_DT6
SDIR_DT7
SDIR_DT8
SDIR_DT9
SDTICK27
SDTIRF
SDTIRH
SDTIRV
SEL_CK27
SGCK13
SGH
SGOE
SIFP_CS
SIFR_PCS
SIFR_RCS
SIZED_FLTA
SPARE_1
SPARE_2
SIZE_L
SIZE_M
SIZE_M-ADPT
SP_P_SCK
SP_P_SI
SP_P_SO
SP_R_SCK
SP_R_SI
SP_R_SO
STD_POSITION_X
SUB_AVAREA
SUB_AVD0
SUB_AVD1
SUB_AVD2
SUB_AVD3
SUB_AVD4
SUB_AVSRC
SUB_AVSYNP
SUB_CPCK
SUB_ISCD0
SUB_ISCD1
SUB_ISCD2
SUB_ISCD3
SUB_ISCD4
REM_CHROMA_LEVEL
REM_HUE
REM_SC_PHASE
REM_SETUP_LEVEL
REM_VIDEO_LEVEL
S

MB-859 (7/7)

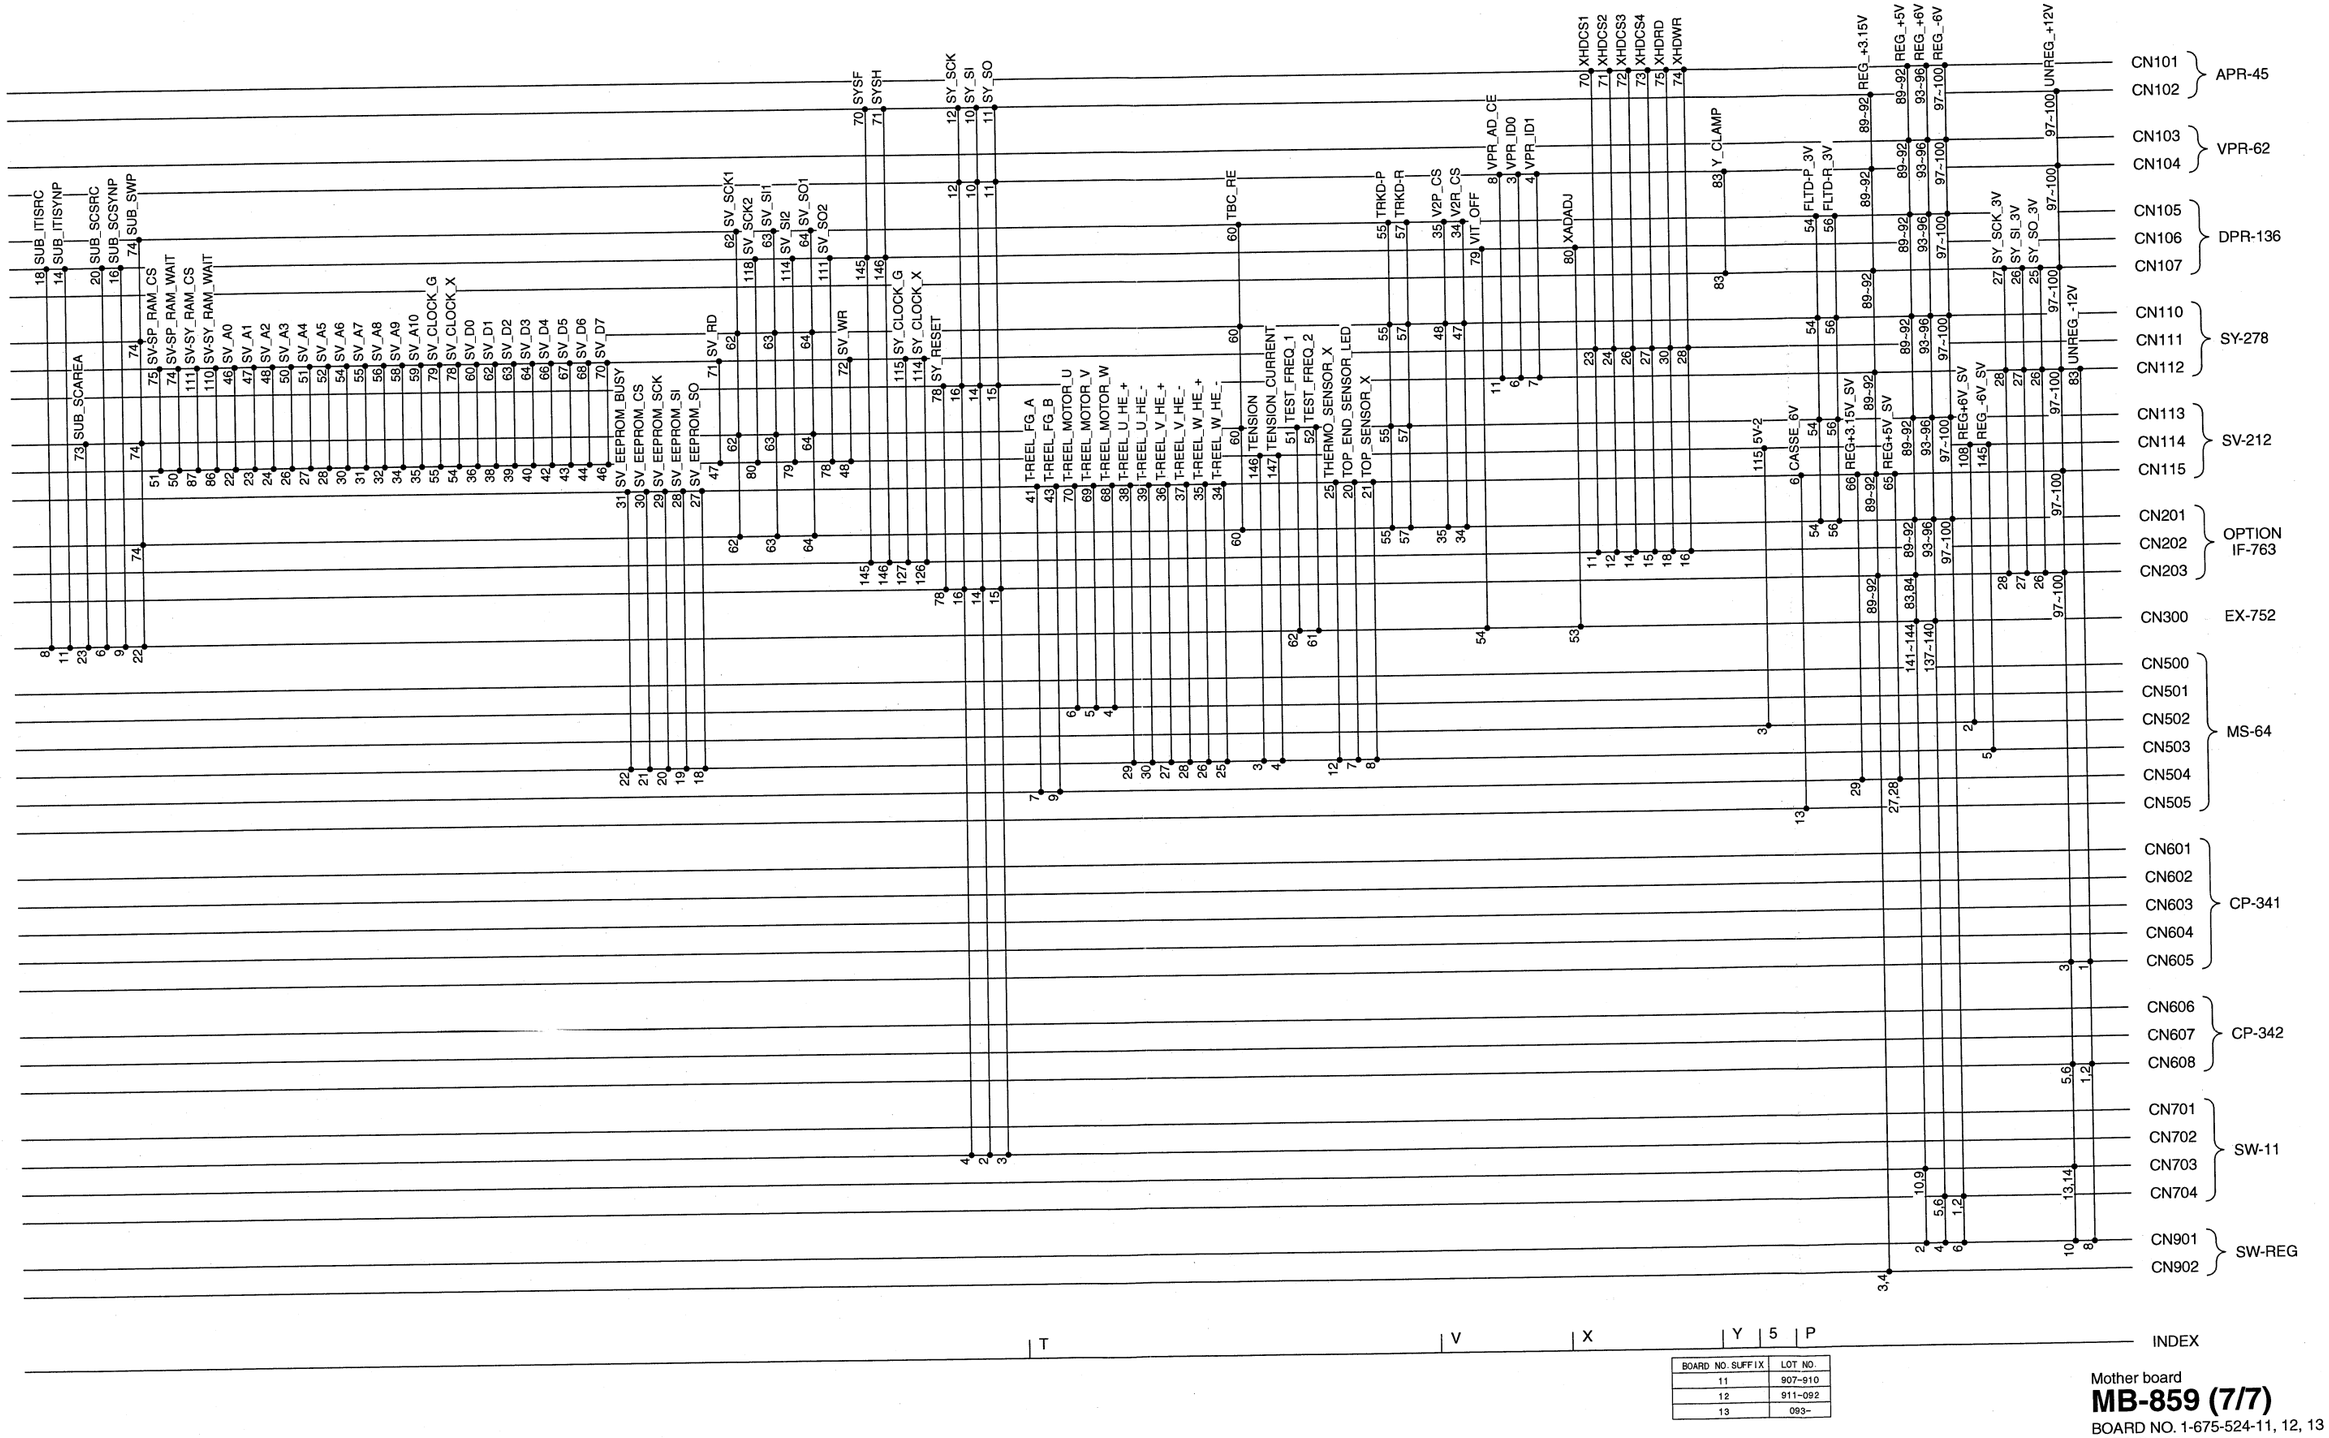

BOARD NO. SUFFIX	LOT NO.
11	907-910
12	911-092
13	093-

Mother board
MB-859 (7/7)
BOARD NO. 1-675-524-11, 12, 13
LOT NO. 907-

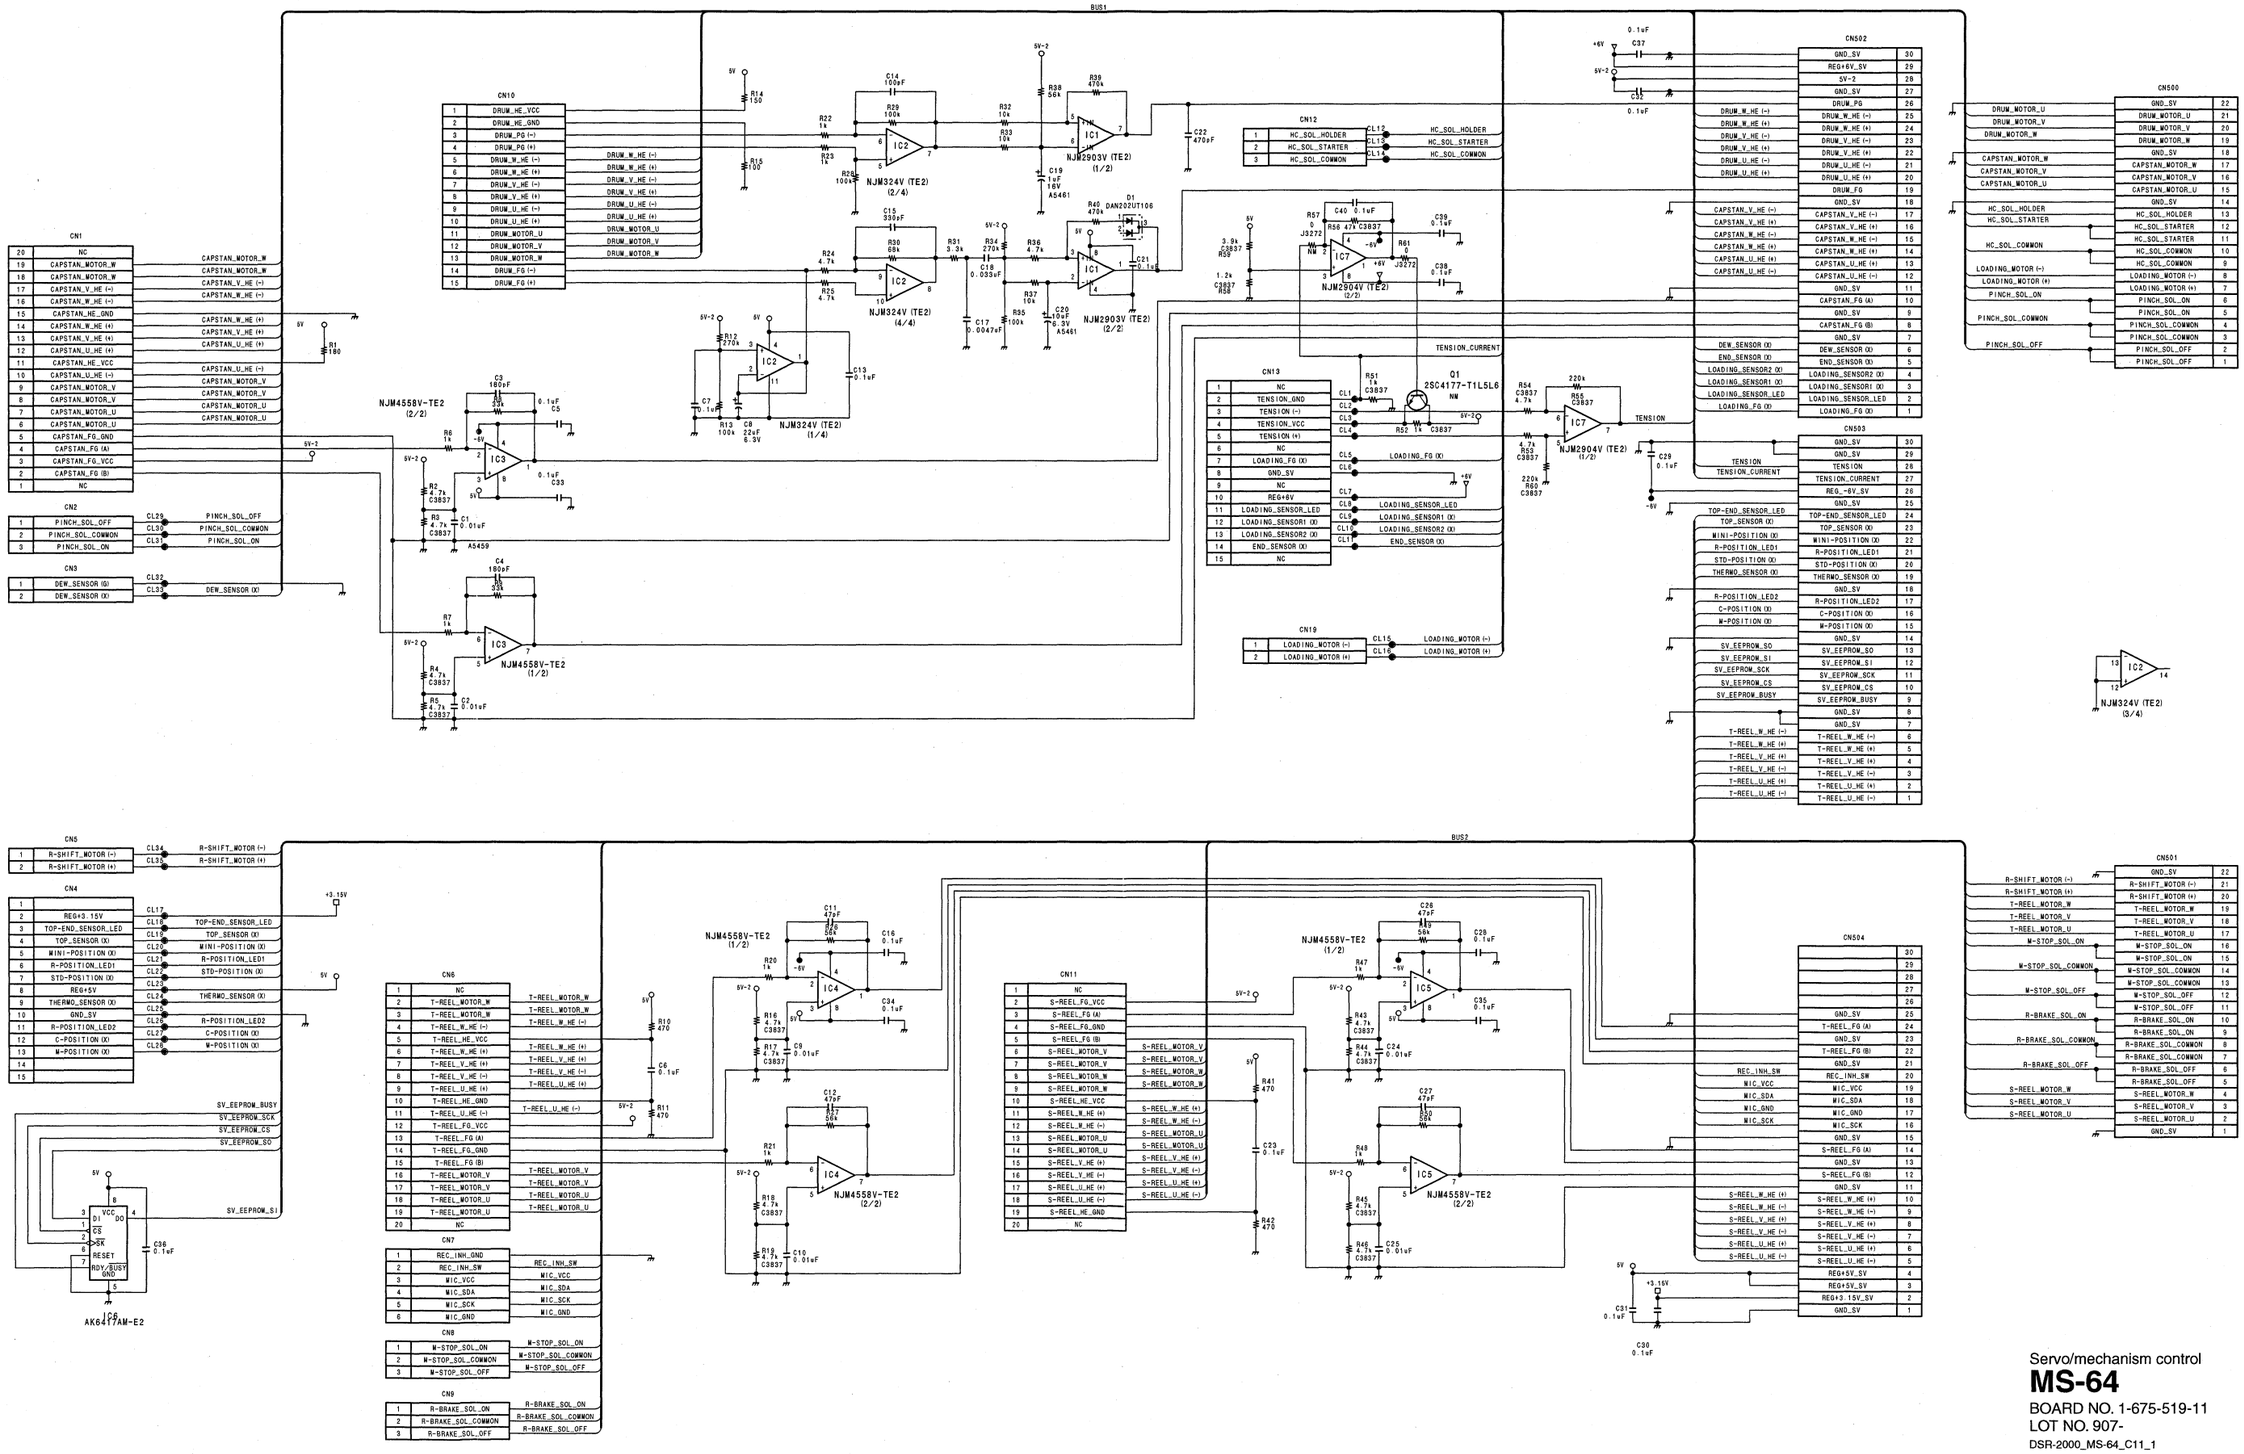

Servo/mechanism control

MS-64

BOARD NO. 1-675-519-11

LOT NO. 907-

DSR-2000_MS-64_C11_1

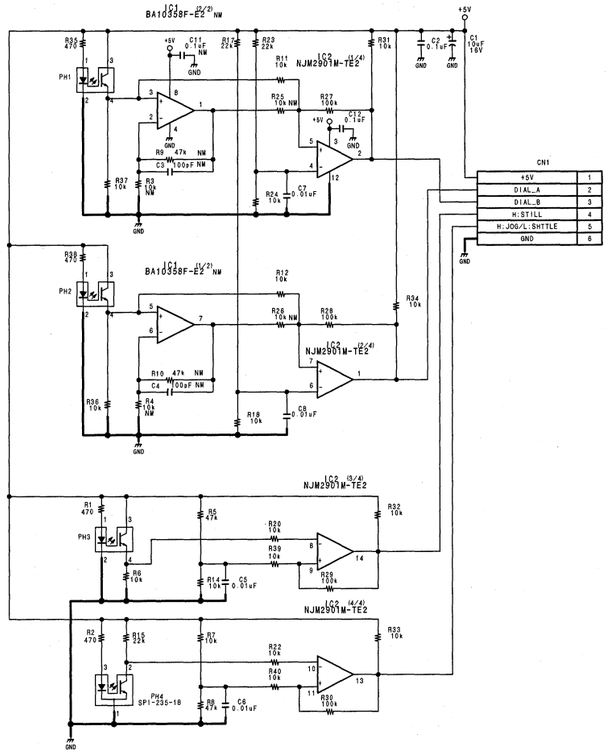

Search dial sensor

PTC-100

BOARD NO. 1-675-520-12, 13
FOR DSR-2000/2000P : LOT NO. 907-
FOR DSBK-200 : LOT NO. 910-

DSR-2000_PTC-100_C12_1

RP-111 (1/14)

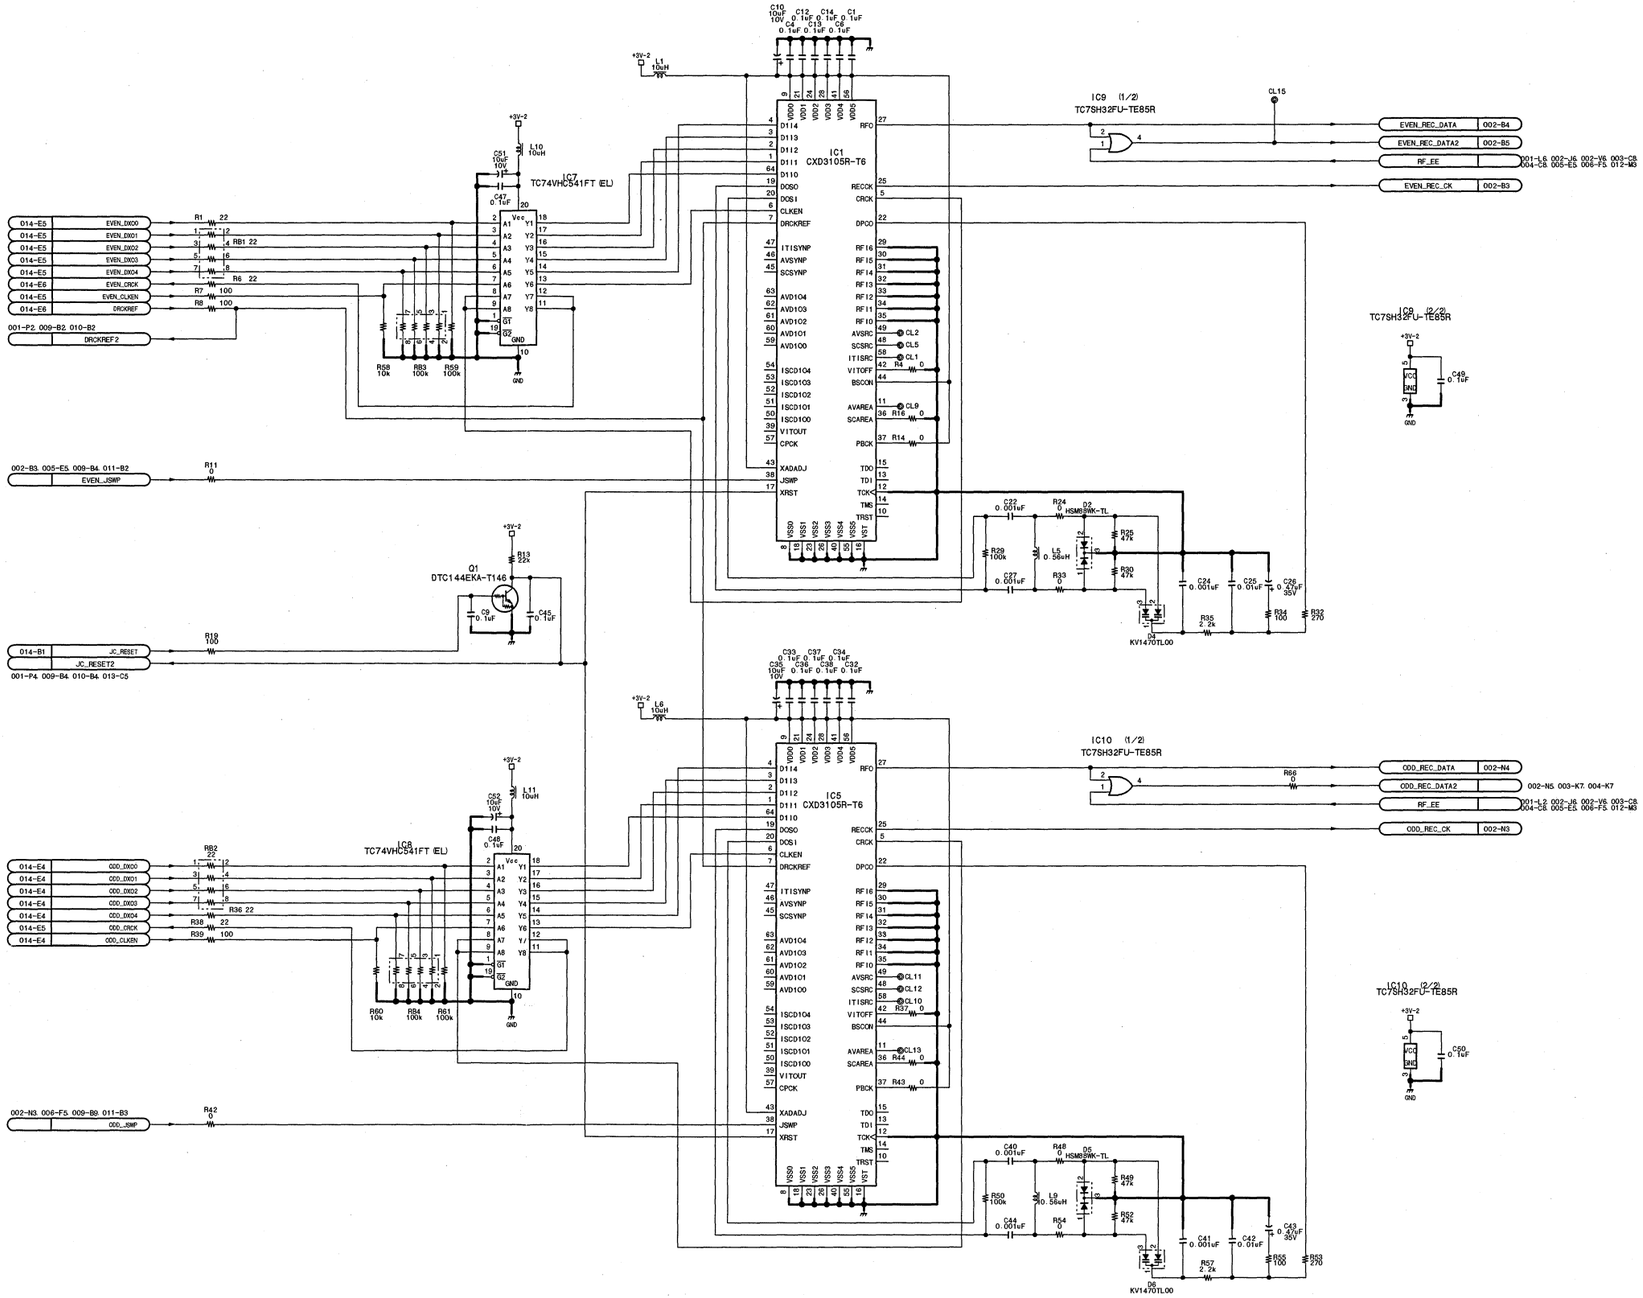

15-106

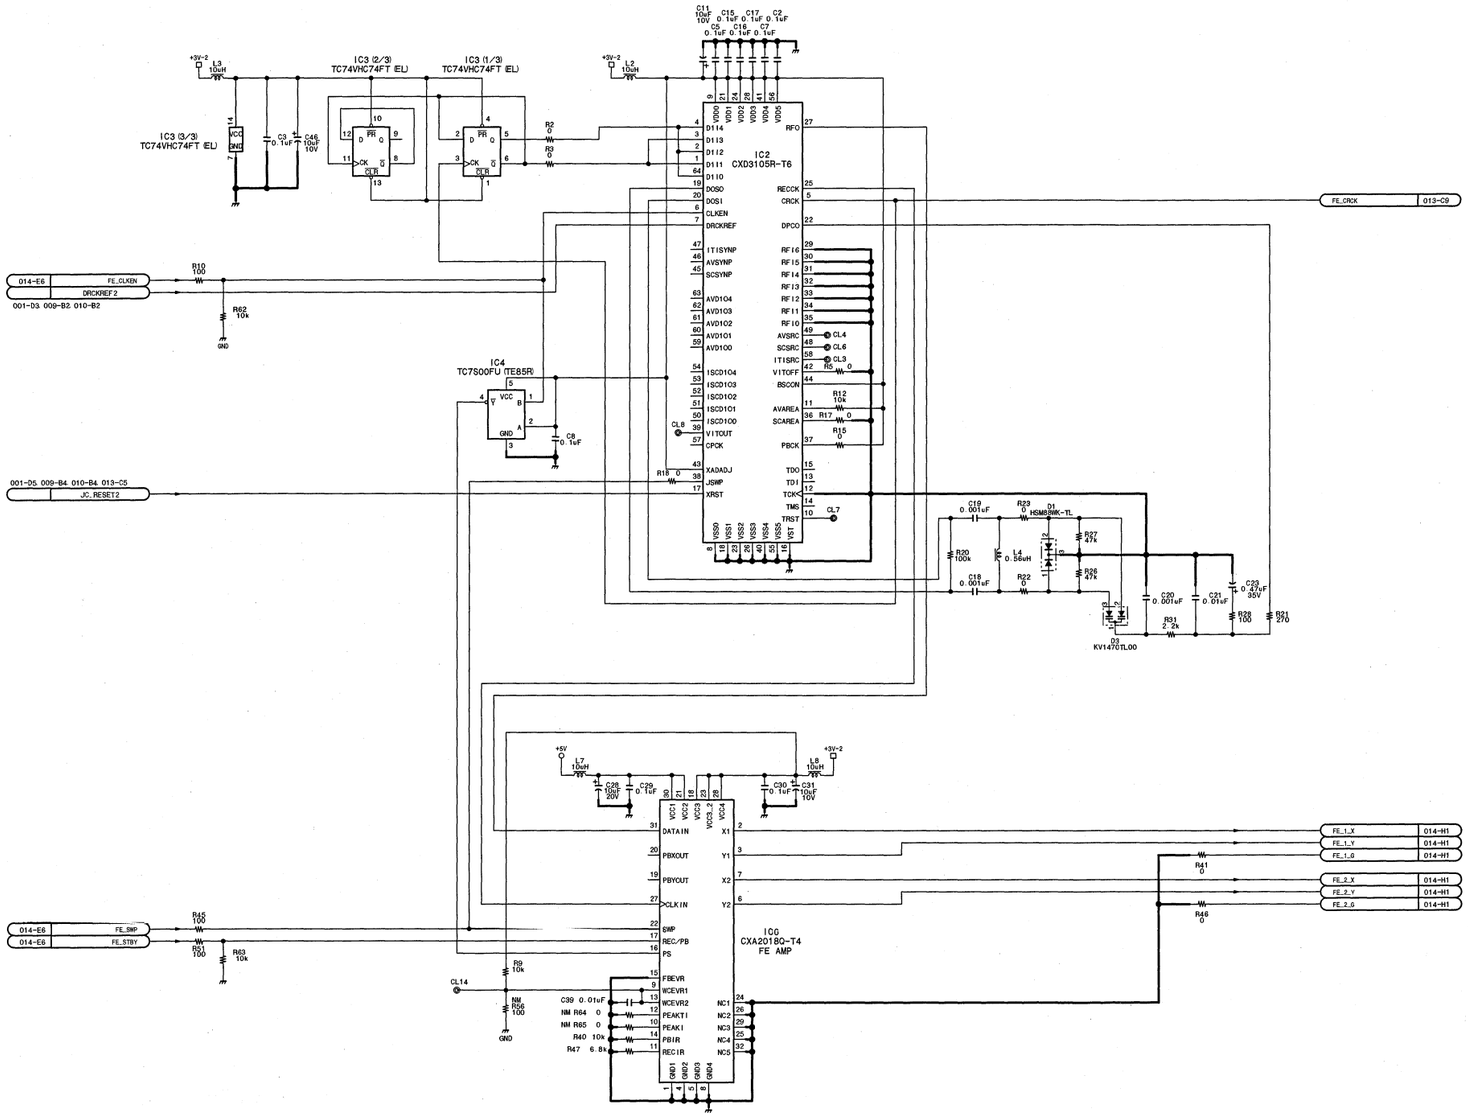

BOARD NO. SUFFIX	LOT NO.
11	907
12	908-911
13	912-

RF REC/PB, ATF detection

RP-111 (1/14)

BOARD NO. 1-675-521-11, 12, 13
LOT NO. 907-

DSR-2000_RP-111_C12_1

RP-111 (2/14)

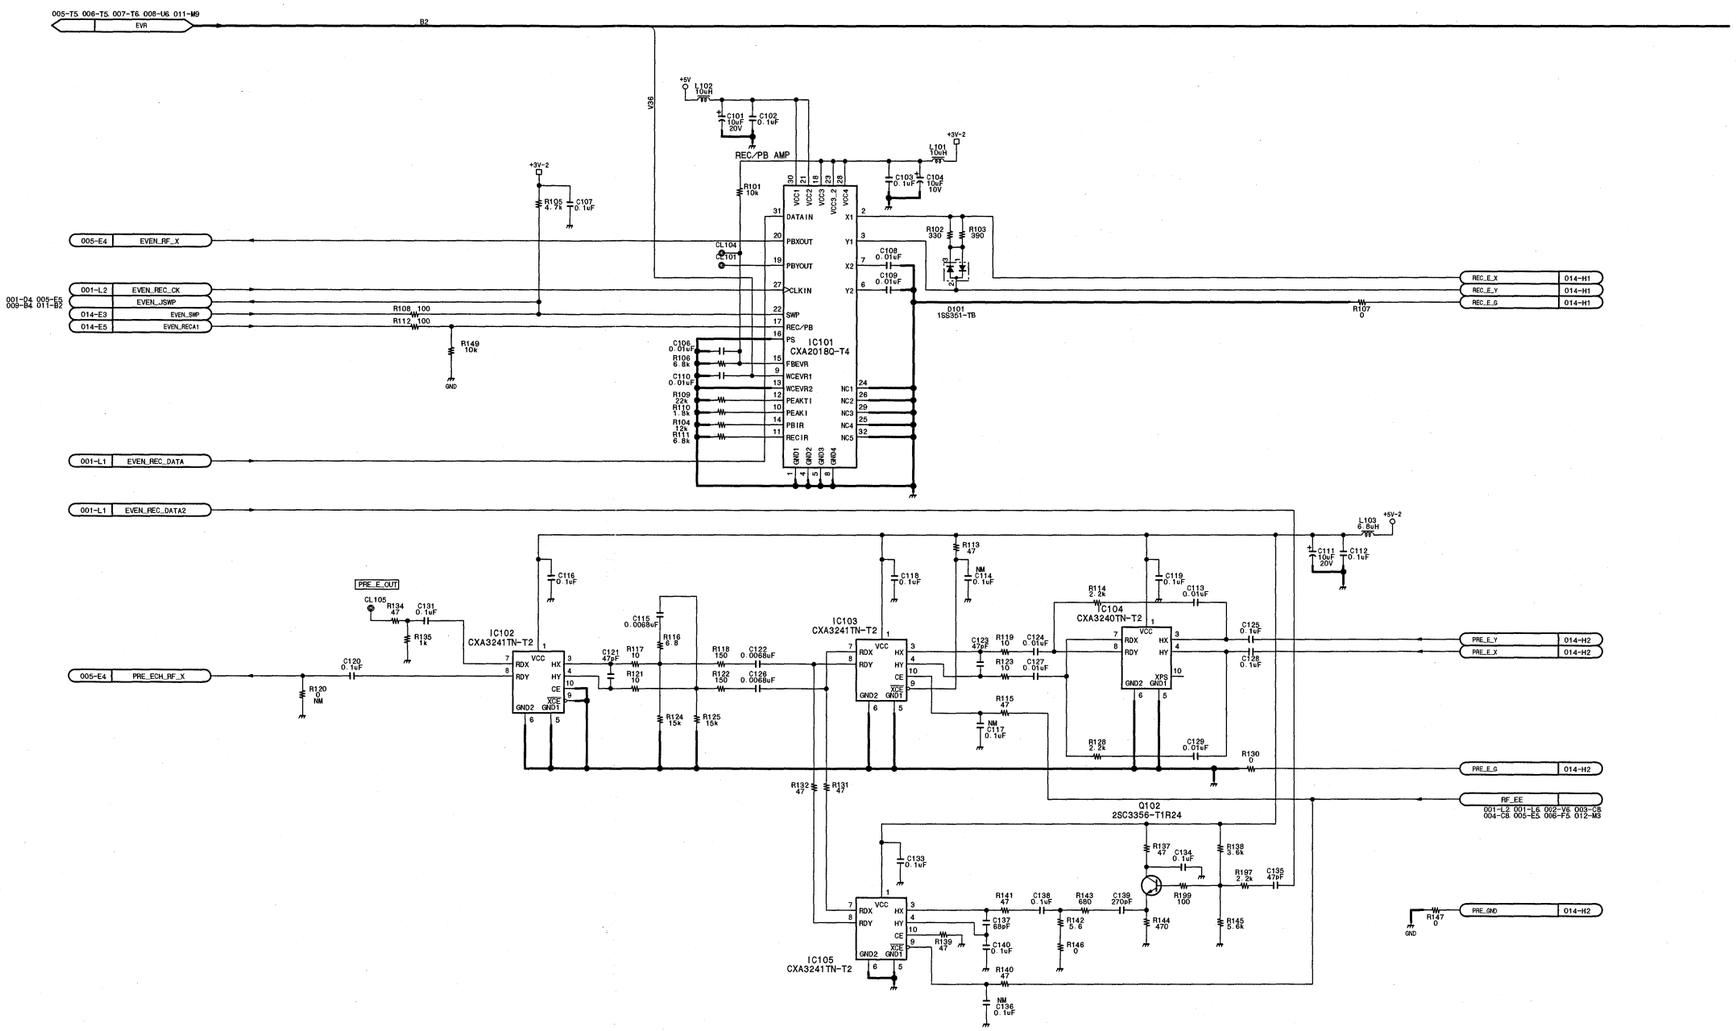

15-108

RP-111 (2/14)

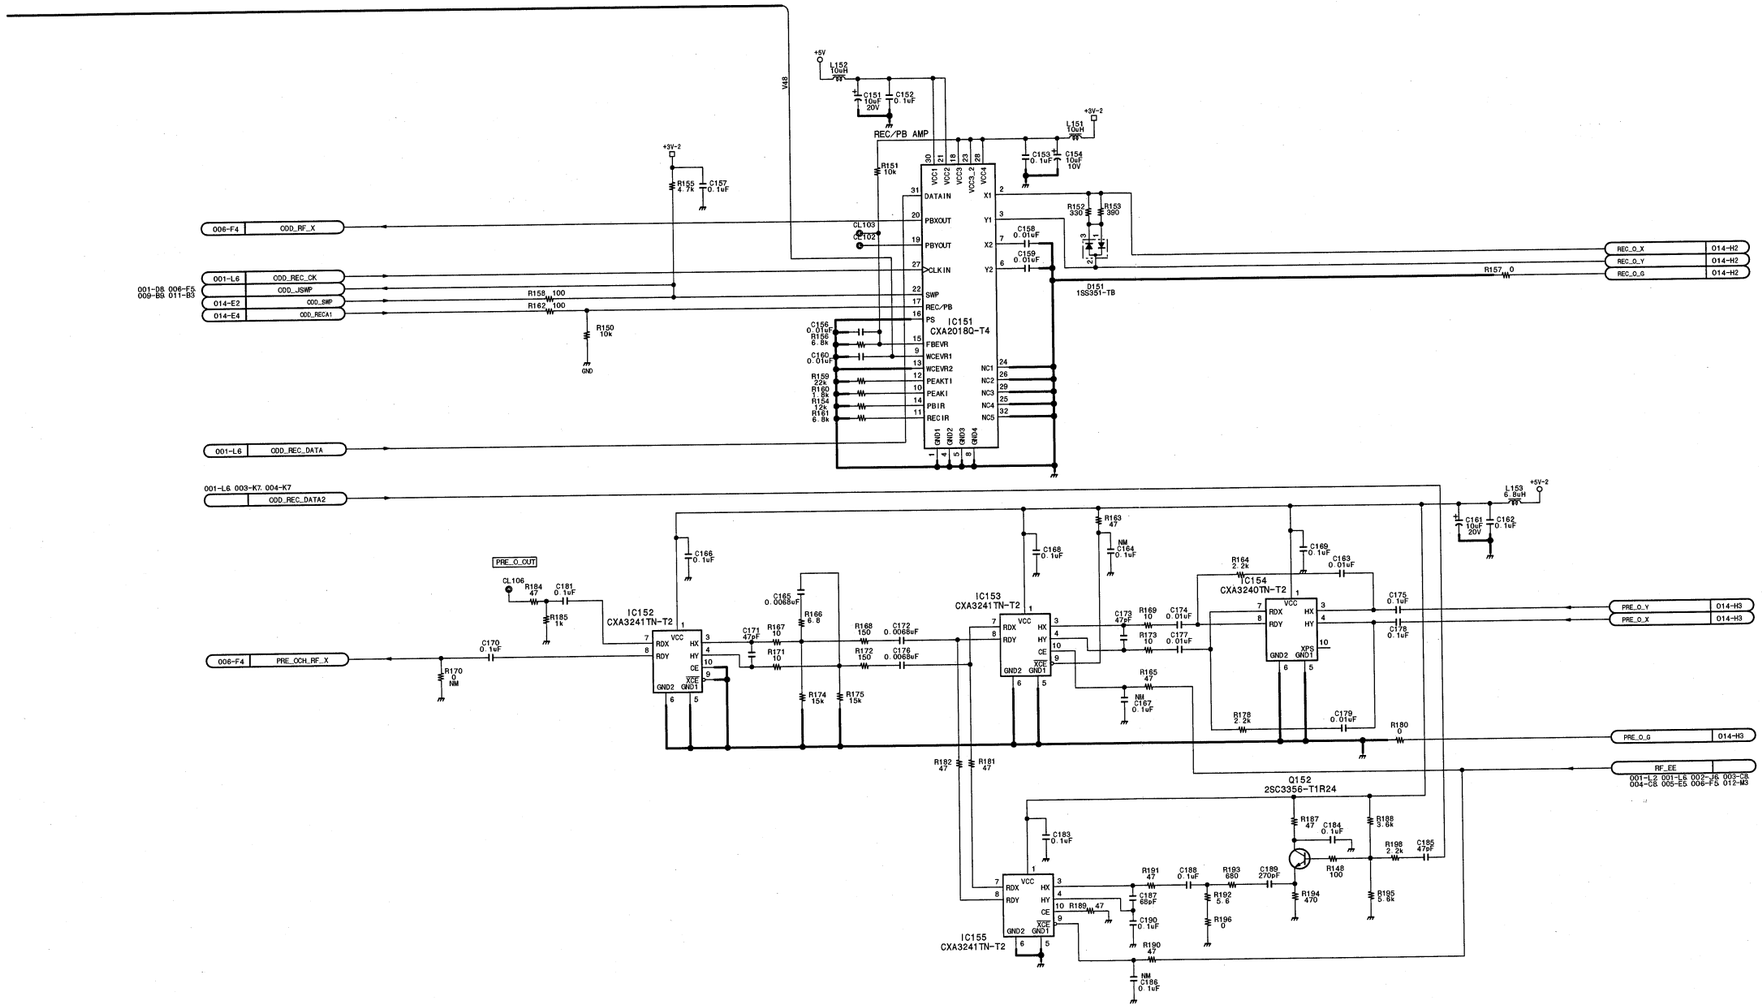

BOARD NO. SUFFIX	LOT NO.
11	907
12	908-911
13	912-

RF REC/PB, ATF detection

RP-111 (2/14)

BOARD NO. 1-675-521-11, 12, 13
LOT NO. 907-
DSR-2000_RP-111_C12_2

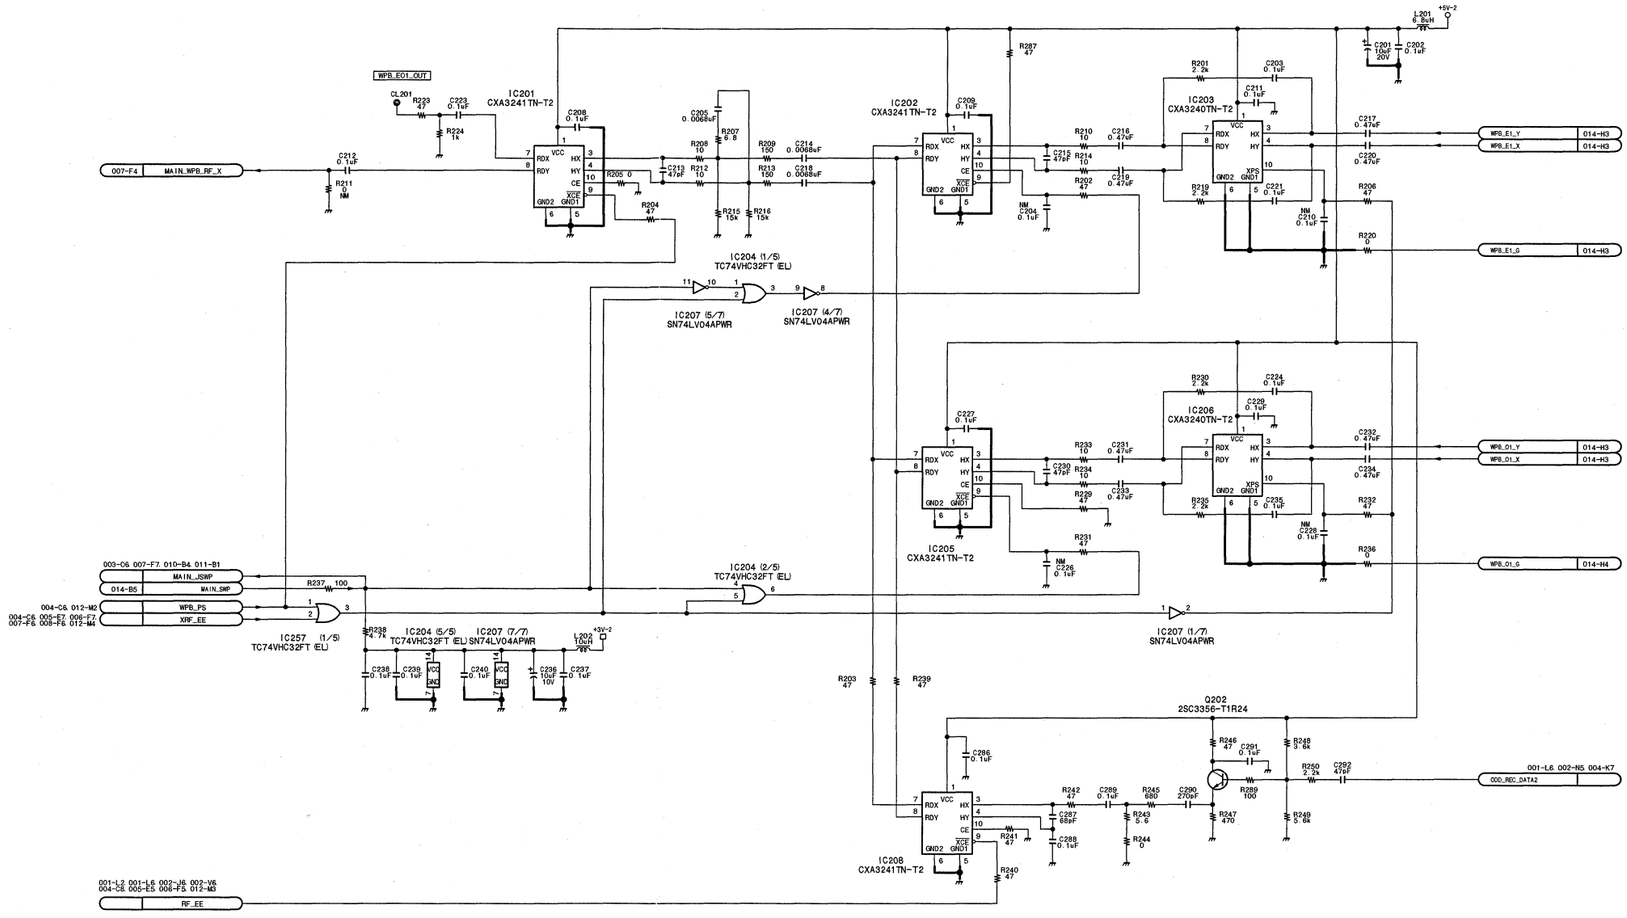
WPB_E01_OUT
CL201
R223 47
C223 0.1uF
R224 1k
IC201 CXA3241TN-T2
C208 0.1uF
C205 0.0068uF
R207 6.8
R208 10
R209 150
C214 0.0068uF
R212 10
R213 150
C218 0.0068uF
R215 15k
R216 15k
C213 47pF
R205 0
R204 47
007-F4 MAIN_WPB_RF_X
C212 0.1uF
R211 0 NM
IC202 CXA3241TN-T2
C209 0.1uF
R287 47
R210 10
C216 0.47uF
C215 47pF
R214 10
C219 0.47uF
R202 47
NM C204 0.1uF
IC203 CXA3240TN-T2
R201 2.2k
C203 0.1uF
C211 0.1uF
R218 2.2k
C221 0.1uF
NM C210 0.1uF
C217 0.47uF
C220 0.47uF
R206 47
R220 0
WPB_E1_Y 014-H3
WPB_E1_X 014-H3
WPB_E1_G 014-H3
L201 0.5uH
+5V-2
C201 10uF 20V
C202 0.1uF
IC204 (1/5) TC74VHC32FT (EL)
IC207 (5/7) SN74LV04APWR
IC207 (4/7) SN74LV04APWR
IC206 CXA3240TN-T2
R230 2.2k
C224 0.1uF
C229 0.1uF
C227 0.1uF
R233 10
C231 0.47uF
C230 47pF
R234 10
C233 0.47uF
R229 47
R231 47
C226 0.1uF
NM C228 0.1uF
C232 0.47uF
C234 0.47uF
R232 47
R236 0
WPB_01_Y 014-H3
WPB_01_X 014-H3
WPB_01_G 014-H4
IC205 CXA3241TN-T2
003-C6 007-F7 010-B4 011-B1
MAIN_JSMP
014-B5
MAIN_SMP
004-C8 012-M2
WPB_PS
004-C6 005-E7 006-F7 007-F6 008-F6 012-M4
XRF_EE
R237 100
IC257 (1/5) TC74VHC32FT (EL)
IC204 (2/5) TC74VHC32FT (EL)
IC204 (5/5) TC74VHC32FT (EL)
IC207 (7/7) SN74LV04APWR
IC207 (1/7) SN74LV04APWR
R238 4.7k
C238 0.1uF
C239 0.1uF
C240 0.1uF
C236 10uF 10V
C237 0.1uF
L202 10uH
+3V-2
R203 47
R239 47
Q202 2SC3356-T1R24
C286 0.1uF
R246 47
C291 0.1uF
R248 3.6k
R250 2.2k
C292 470F
R289 100
R247 470
R249 3.6k
R242 47
C289 0.1uF
R245 680
C290 2700F
C287 68pF
R243 5.6
C288 0.1uF
R244 0
R241 47 NM
IC208 CXA3241TN-T2
R240 47
001-L6 002-N5 004-K7
CDD_REC_DATA2
001-L2 001-L6 002-J6 002-V6
004-C8 005-E5 006-F5 012-M3
RF_EE

RP-111 (3/14)

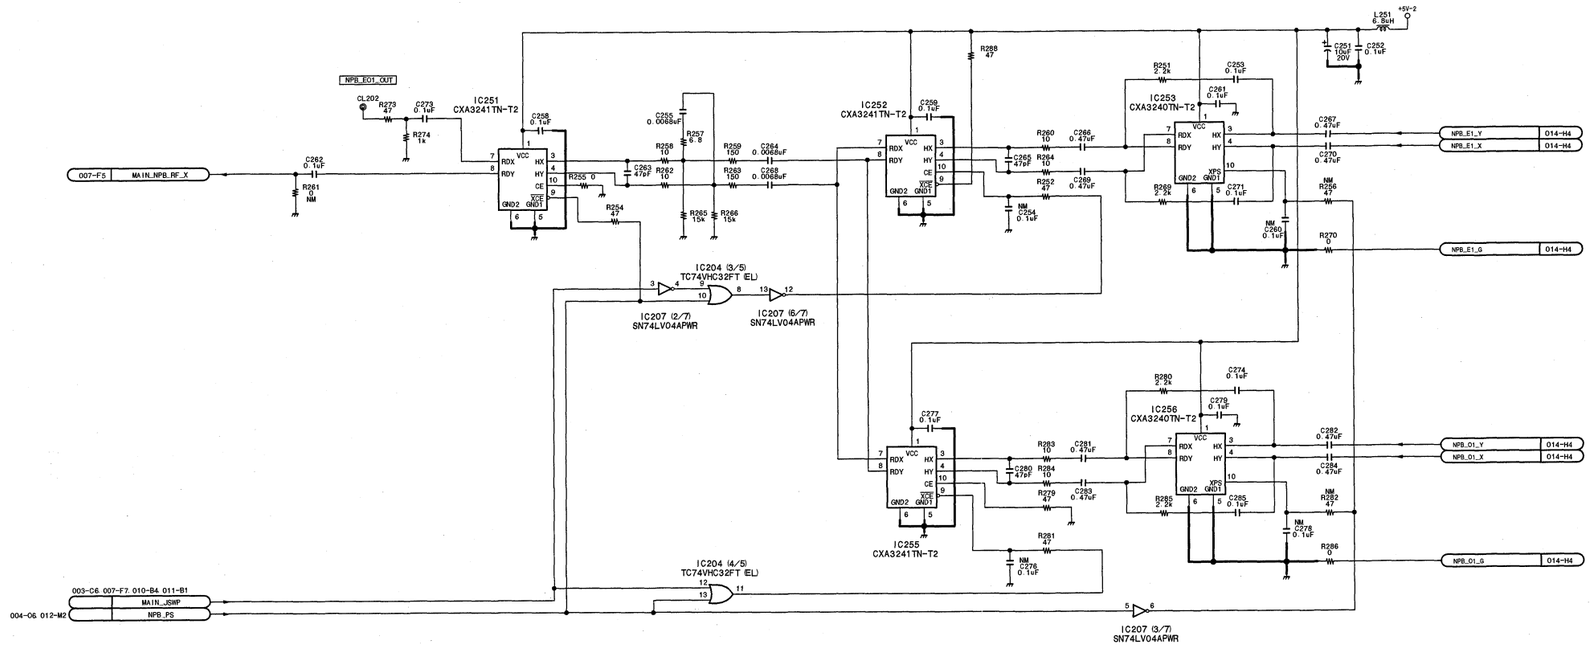

BOARD NO. SUFFIX	LOT NO.
11	907
12	908-911
13	912-

RF REC/PB, ATF detection

RP-111 (3/14)

BOARD NO. 1-675-521-11, 12, 13
LOT NO. 907-
DSR-2000_RP-111_C12_3

RP-111 (4/14)

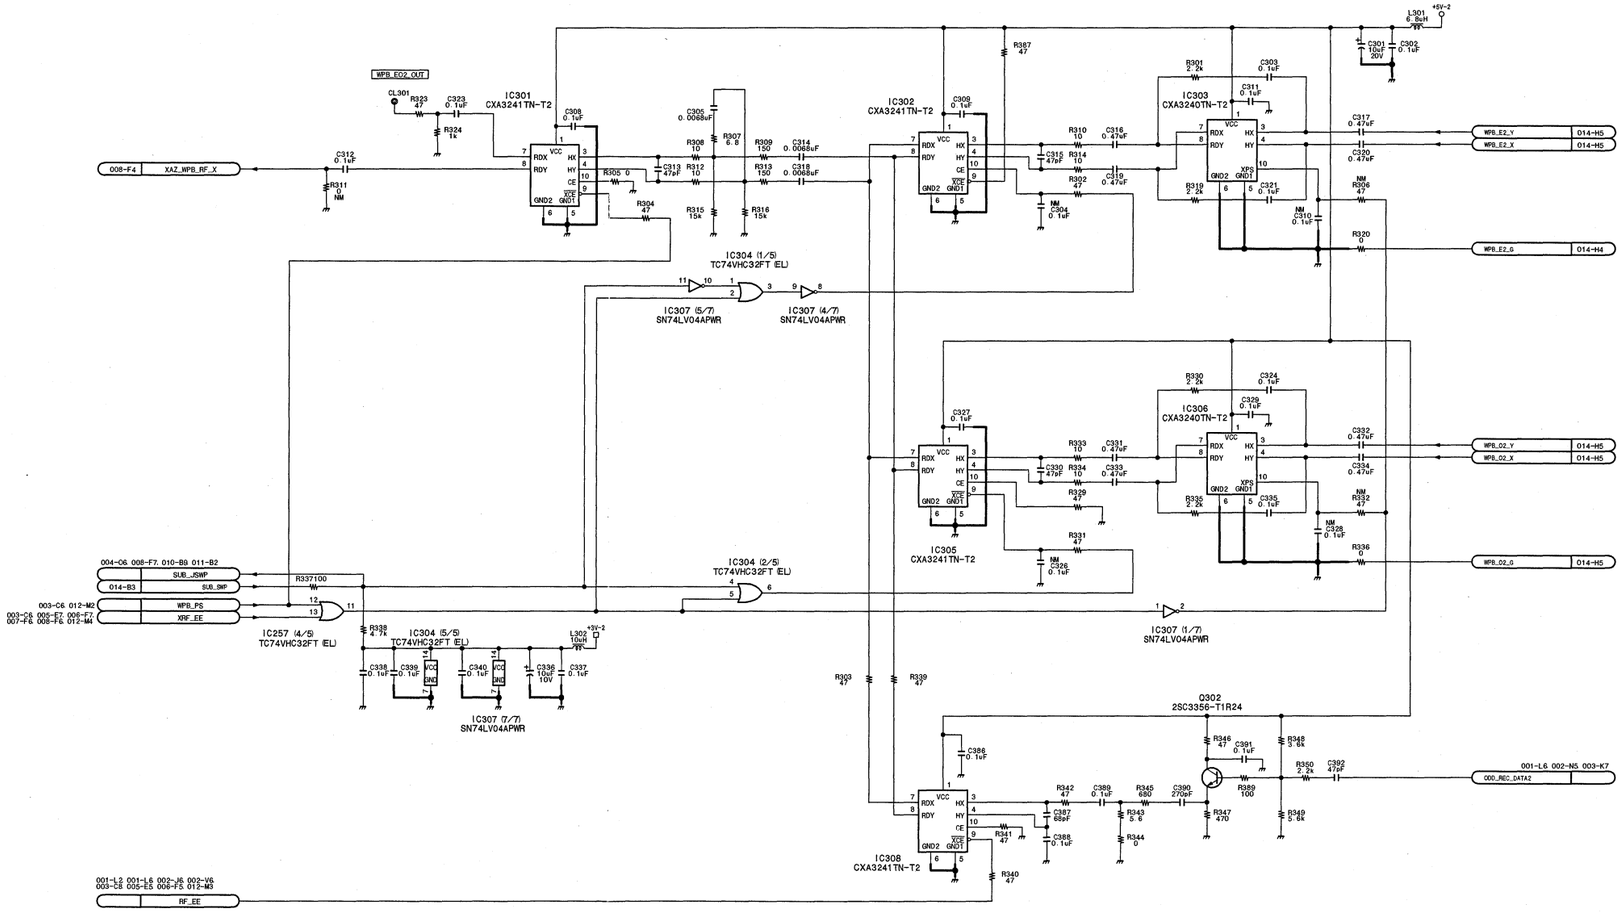

15-112

RP-111 (4/14)

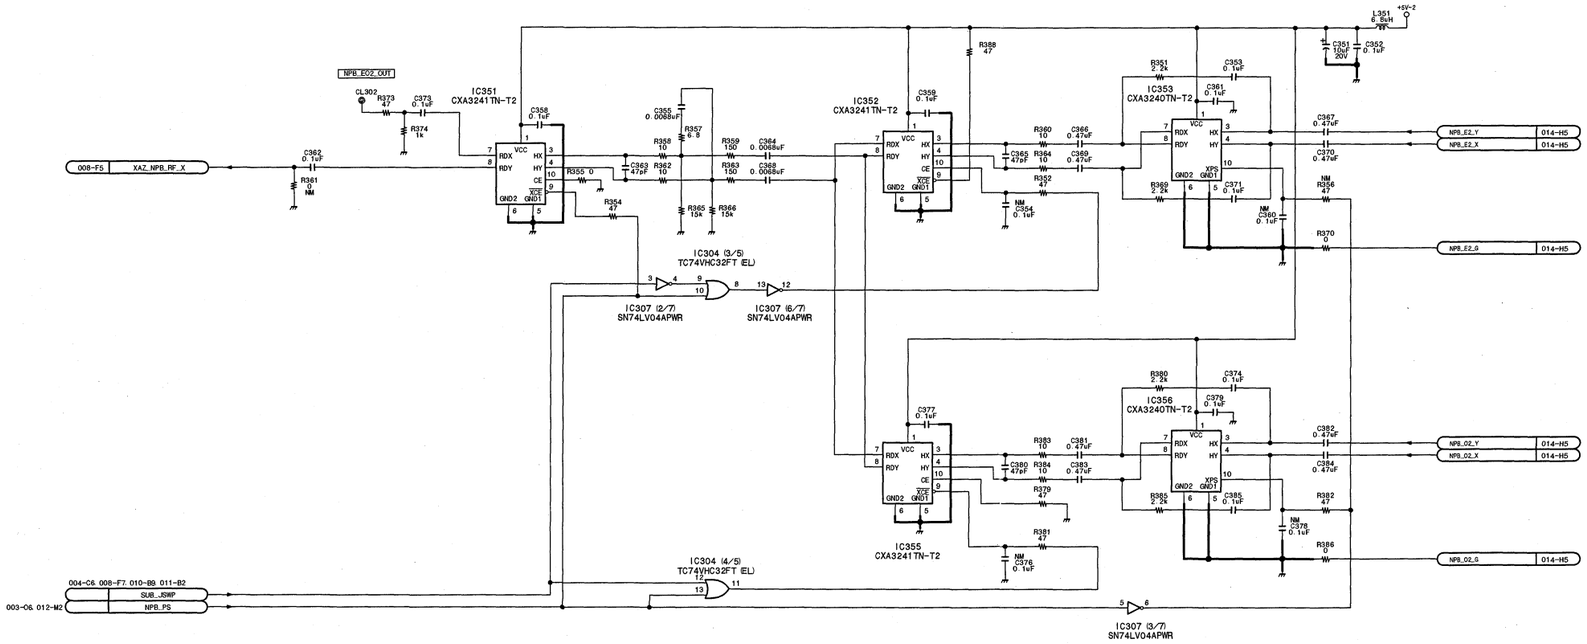

BOARD NO. SUFFIX	LOT NO.
11	907
12	908-911
13	912-

RF REC/PB, ATF detection

RP-111 (4/14)

BOARD NO. 1-675-521-11, 12, 13
LOT NO. 907-
DSR-2000_RP-111_C12_4

RP-111 (5/14)

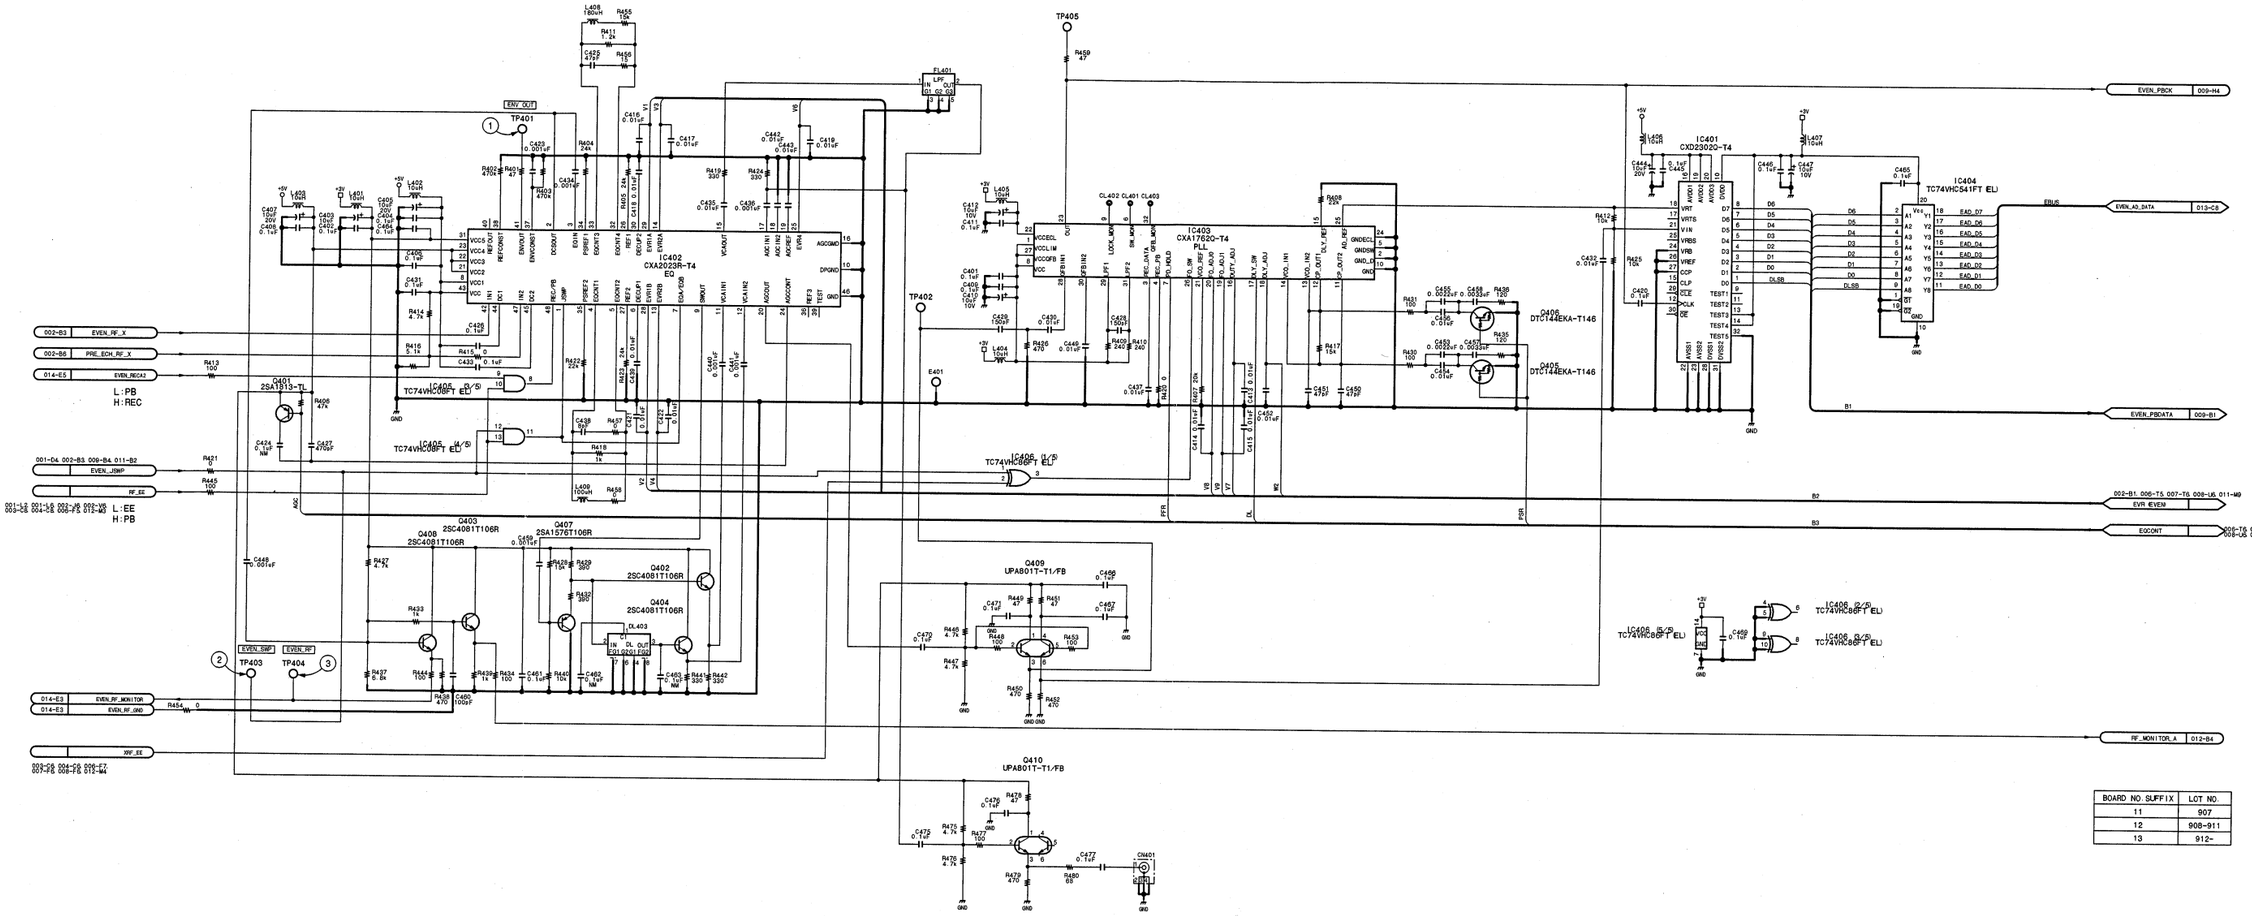

BOARD NO. SUFFIX	LOT NO.
11	907
12	908-911
13	912-

① TP401 ENV OUT
② TP403 EVEN_SWP

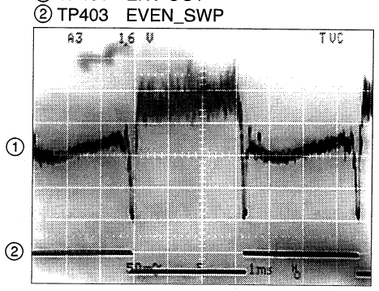

② TP403 EVEN_SWP
③ TP404 EVEN_RF

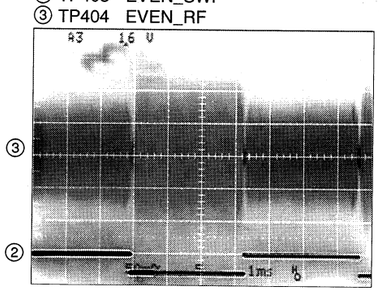

RF REC/PB, ATF detection

RP-111 (5/14)

BOARD NO. 1-675-521-11, 12, 13
LOT NO. 907-

DSR-2000_RP-111_C12_5

15-114

DSR-2000/2000P

RP-111 (6/14)

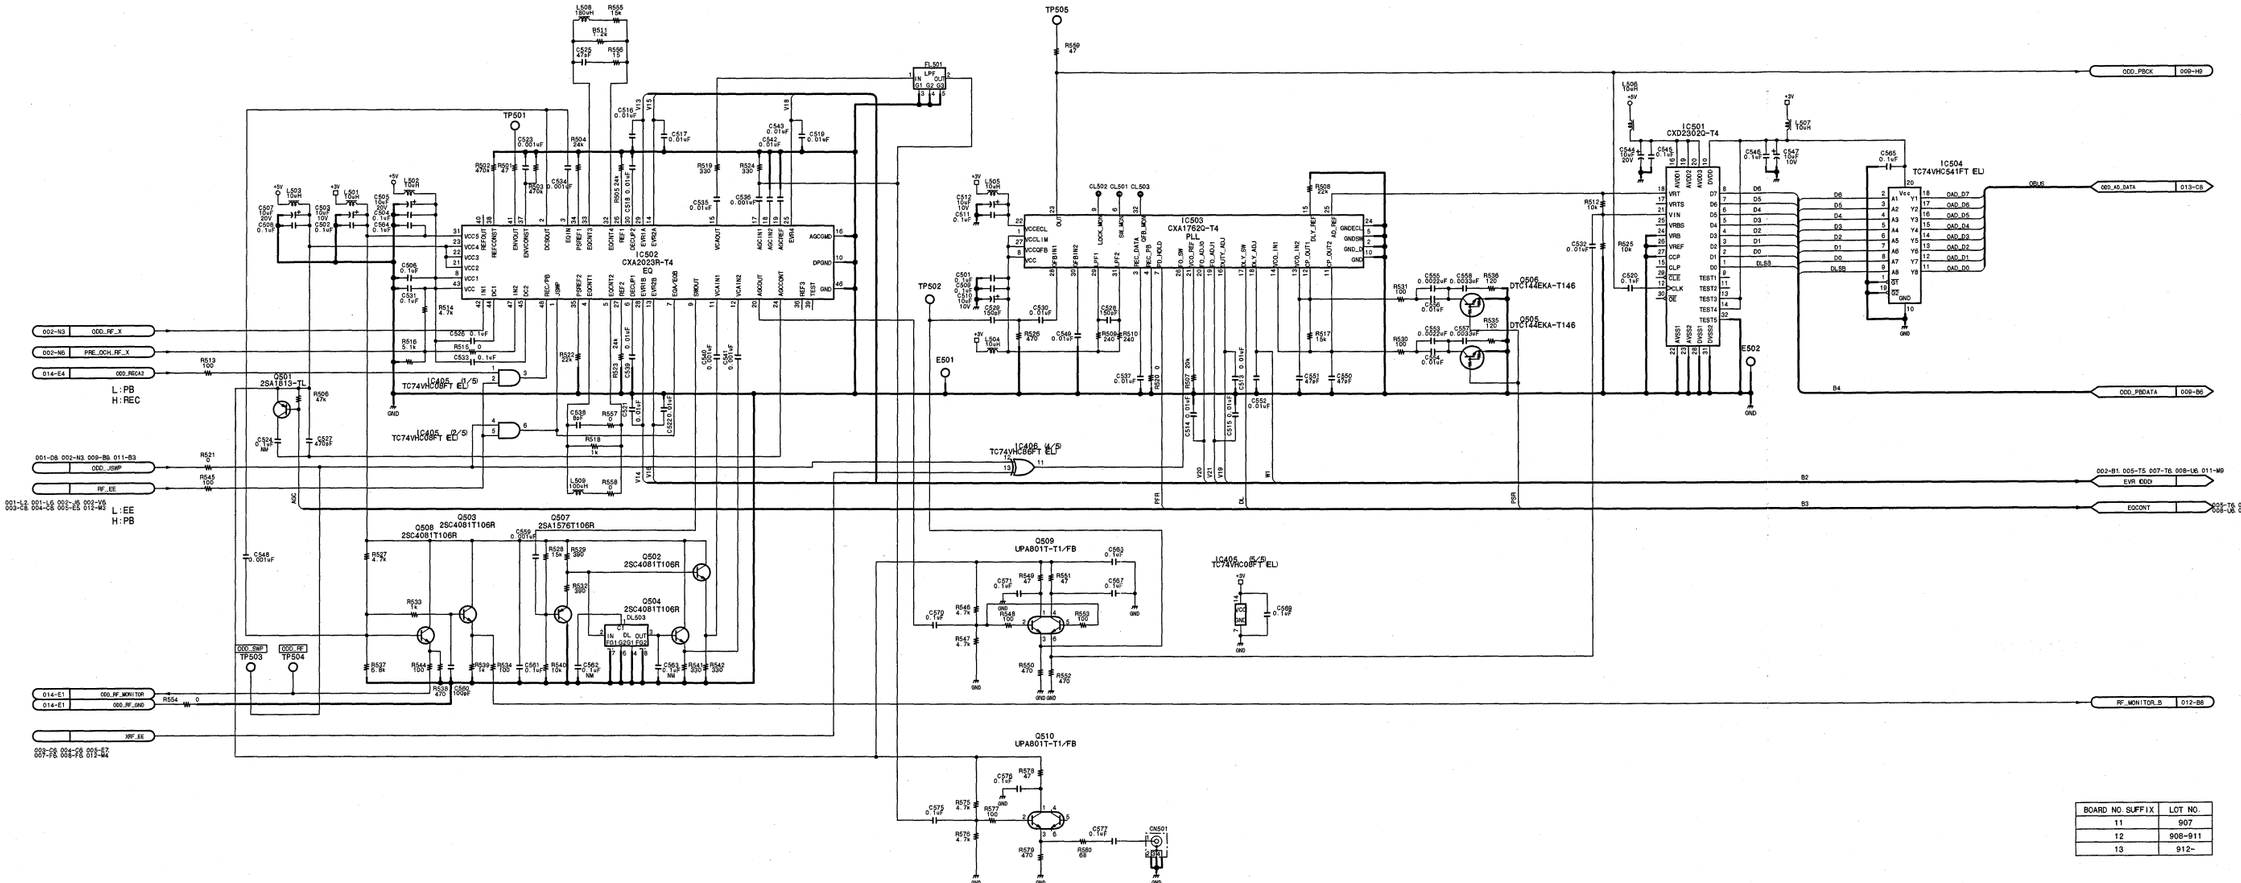

BOARD NO. SUFFIX	LOT NO.
11	907
12	908-911
13	912~

RF REC/PB, ATF detection

RP-111 (6/14)

BOARD NO. 1-675-521-11, 12, 13
LOT NO. 907-
DSR-2000_RP-111_C12_6

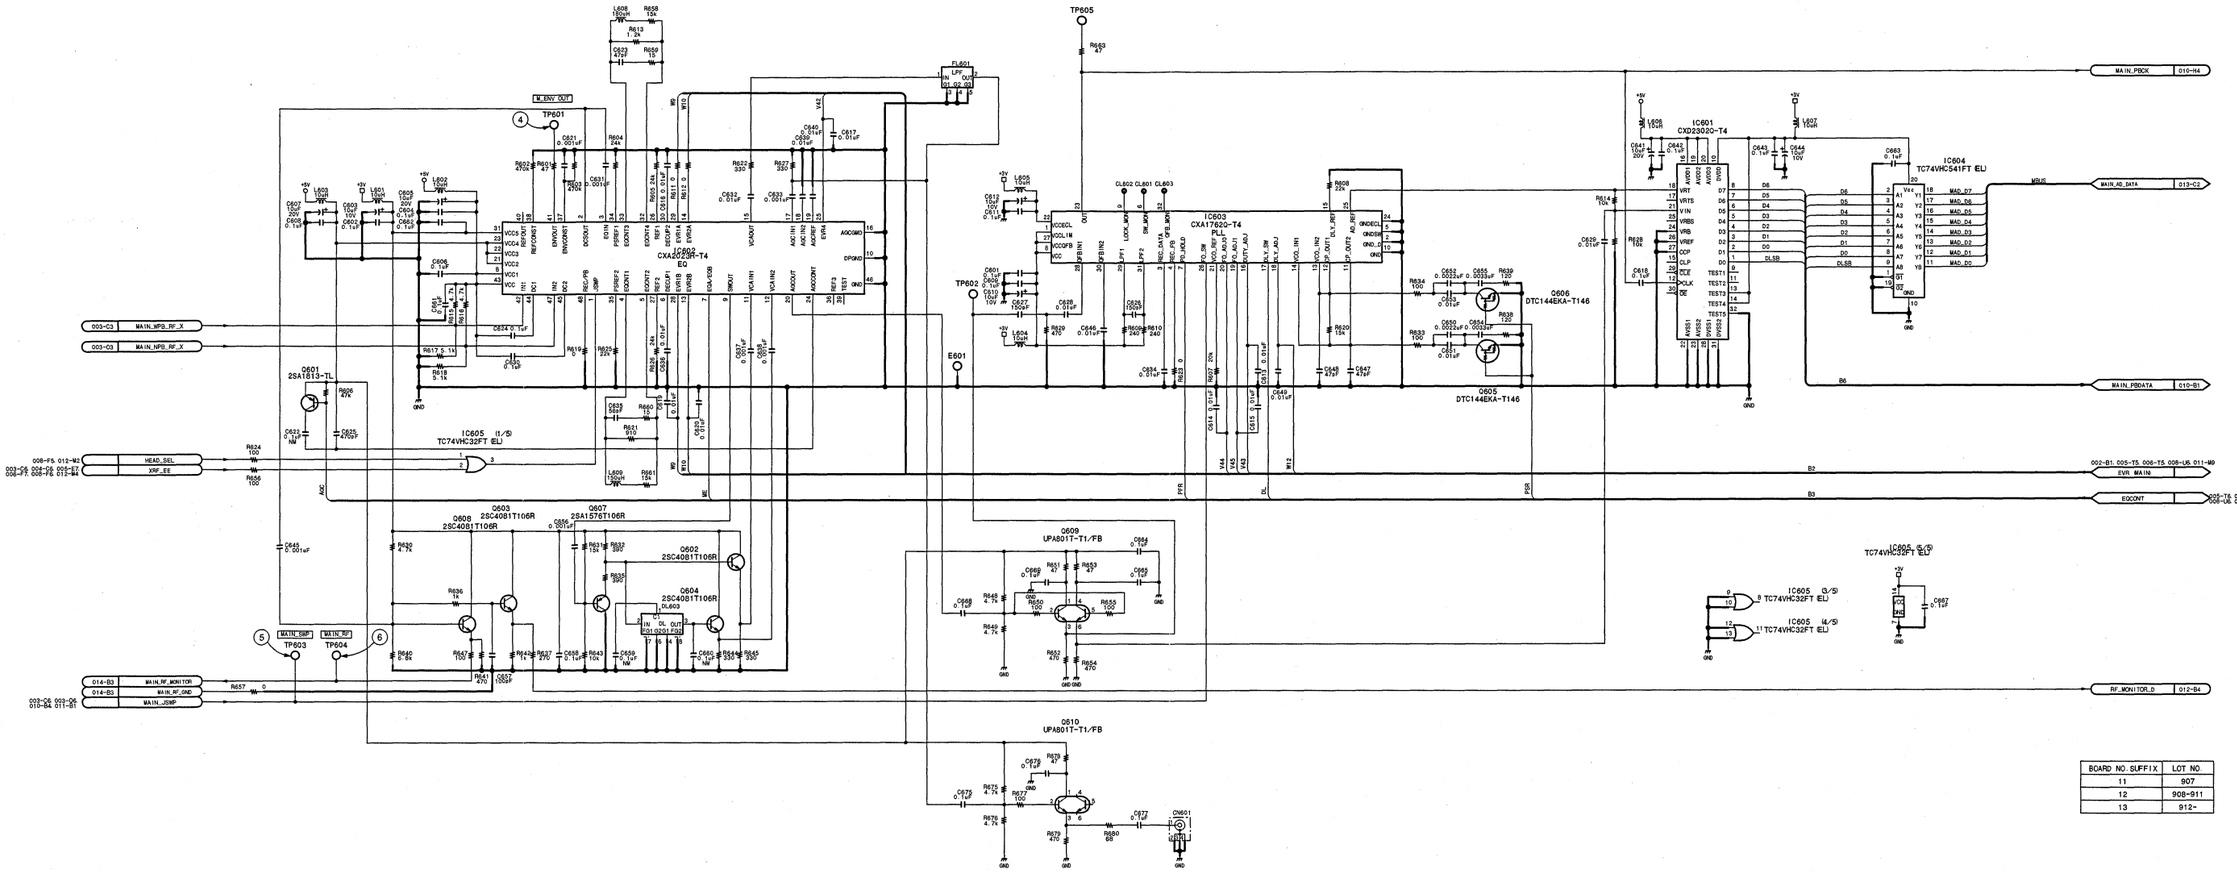

BOARD NO. SUFFIX	LOT NO.
11	907
12	908-911
13	912-

④ TP601 M_ENV OUT
⑤ TP603 MAIN_SWP

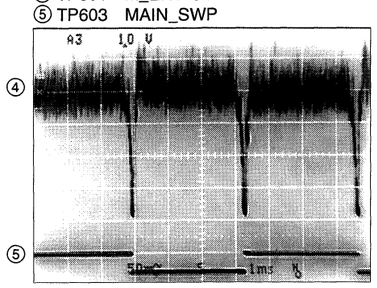

⑤ TP603 MAIN_SWP
⑥ TP604 MAIN_RF

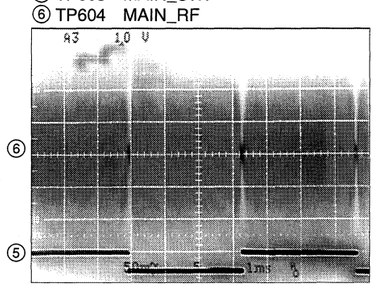

RF REC/PB, ATF detection

RP-111 (7/14)

BOARD NO. 1-675-521-11, 12, 13
LOT NO. 907-

DSR-2000_RP-111_C12_7

RP-111 (8/14)

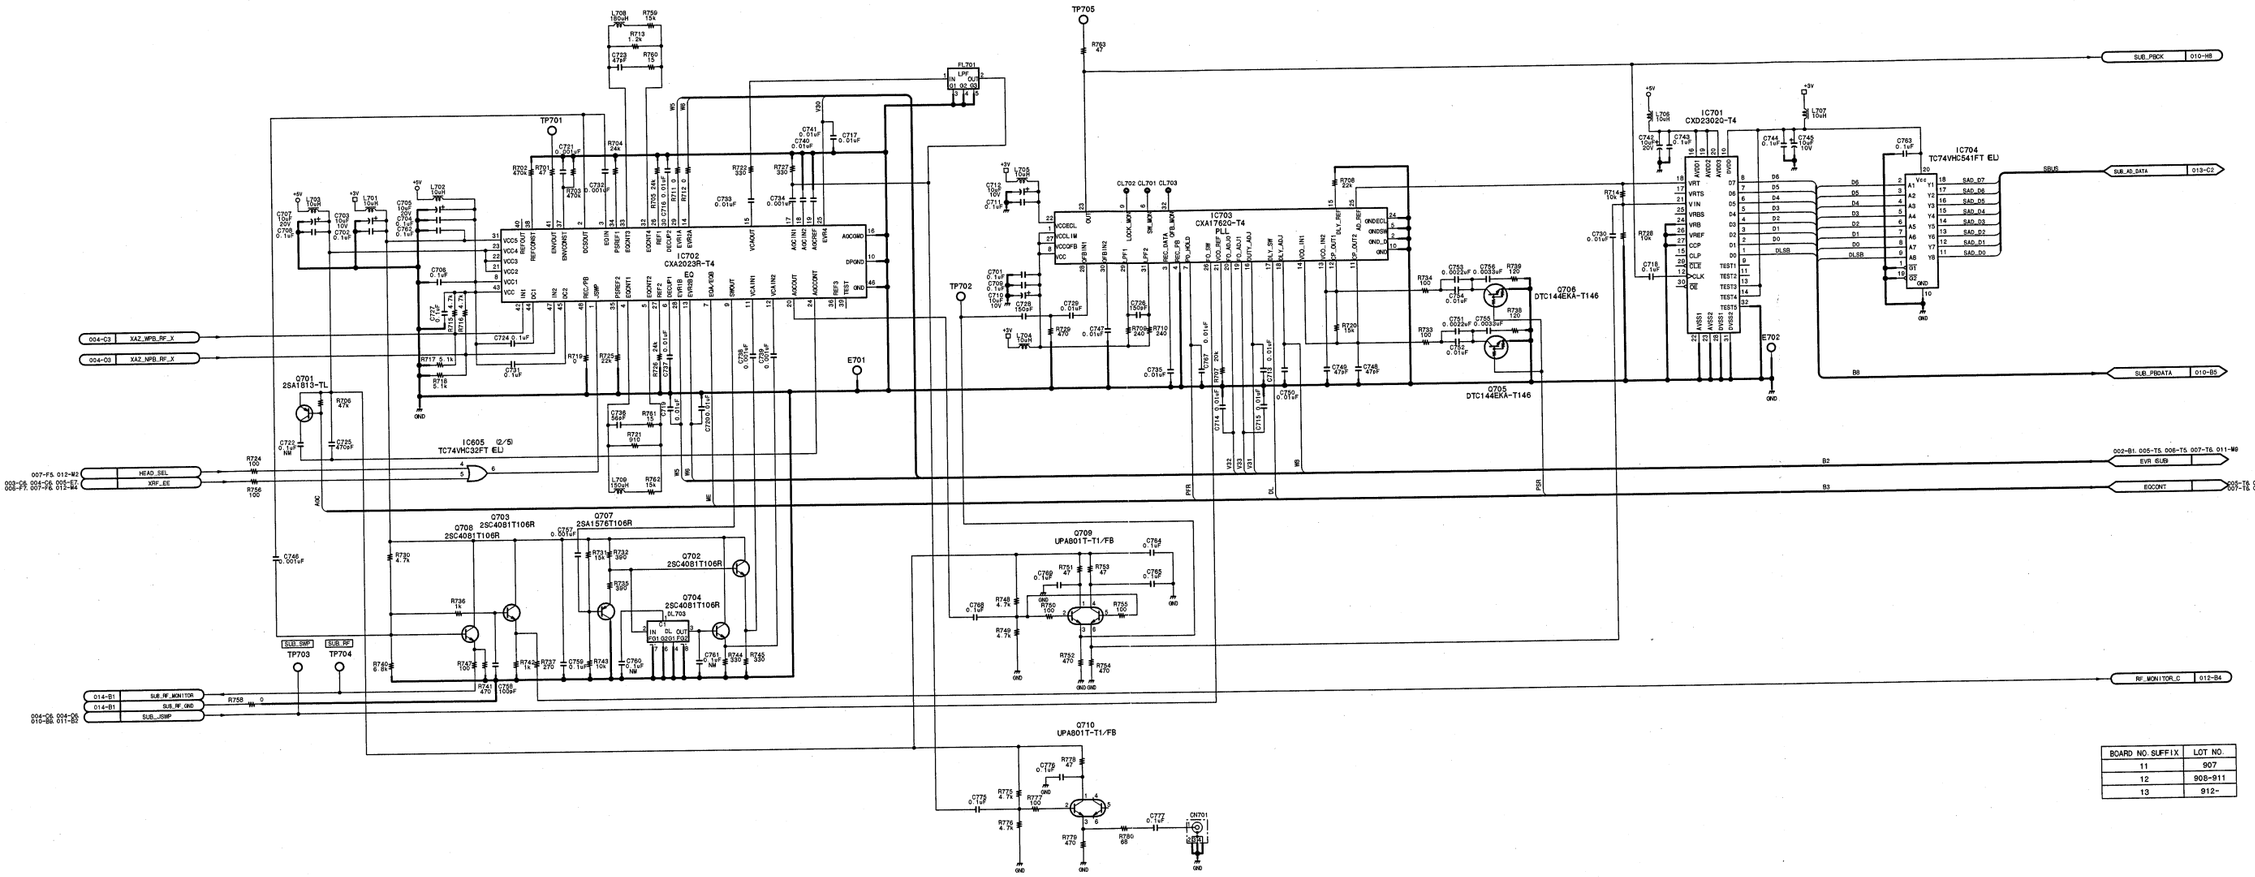

BOARD NO. SUFFIX	LOT NO.
11	907
12	908-911
13	912-

RF REC/PB, ATF detection

RP-111 (8/14)

BOARD NO. 1-675-521-11, 12, 13
LOT NO. 907-
DSR-2000_RP-111_C12_8

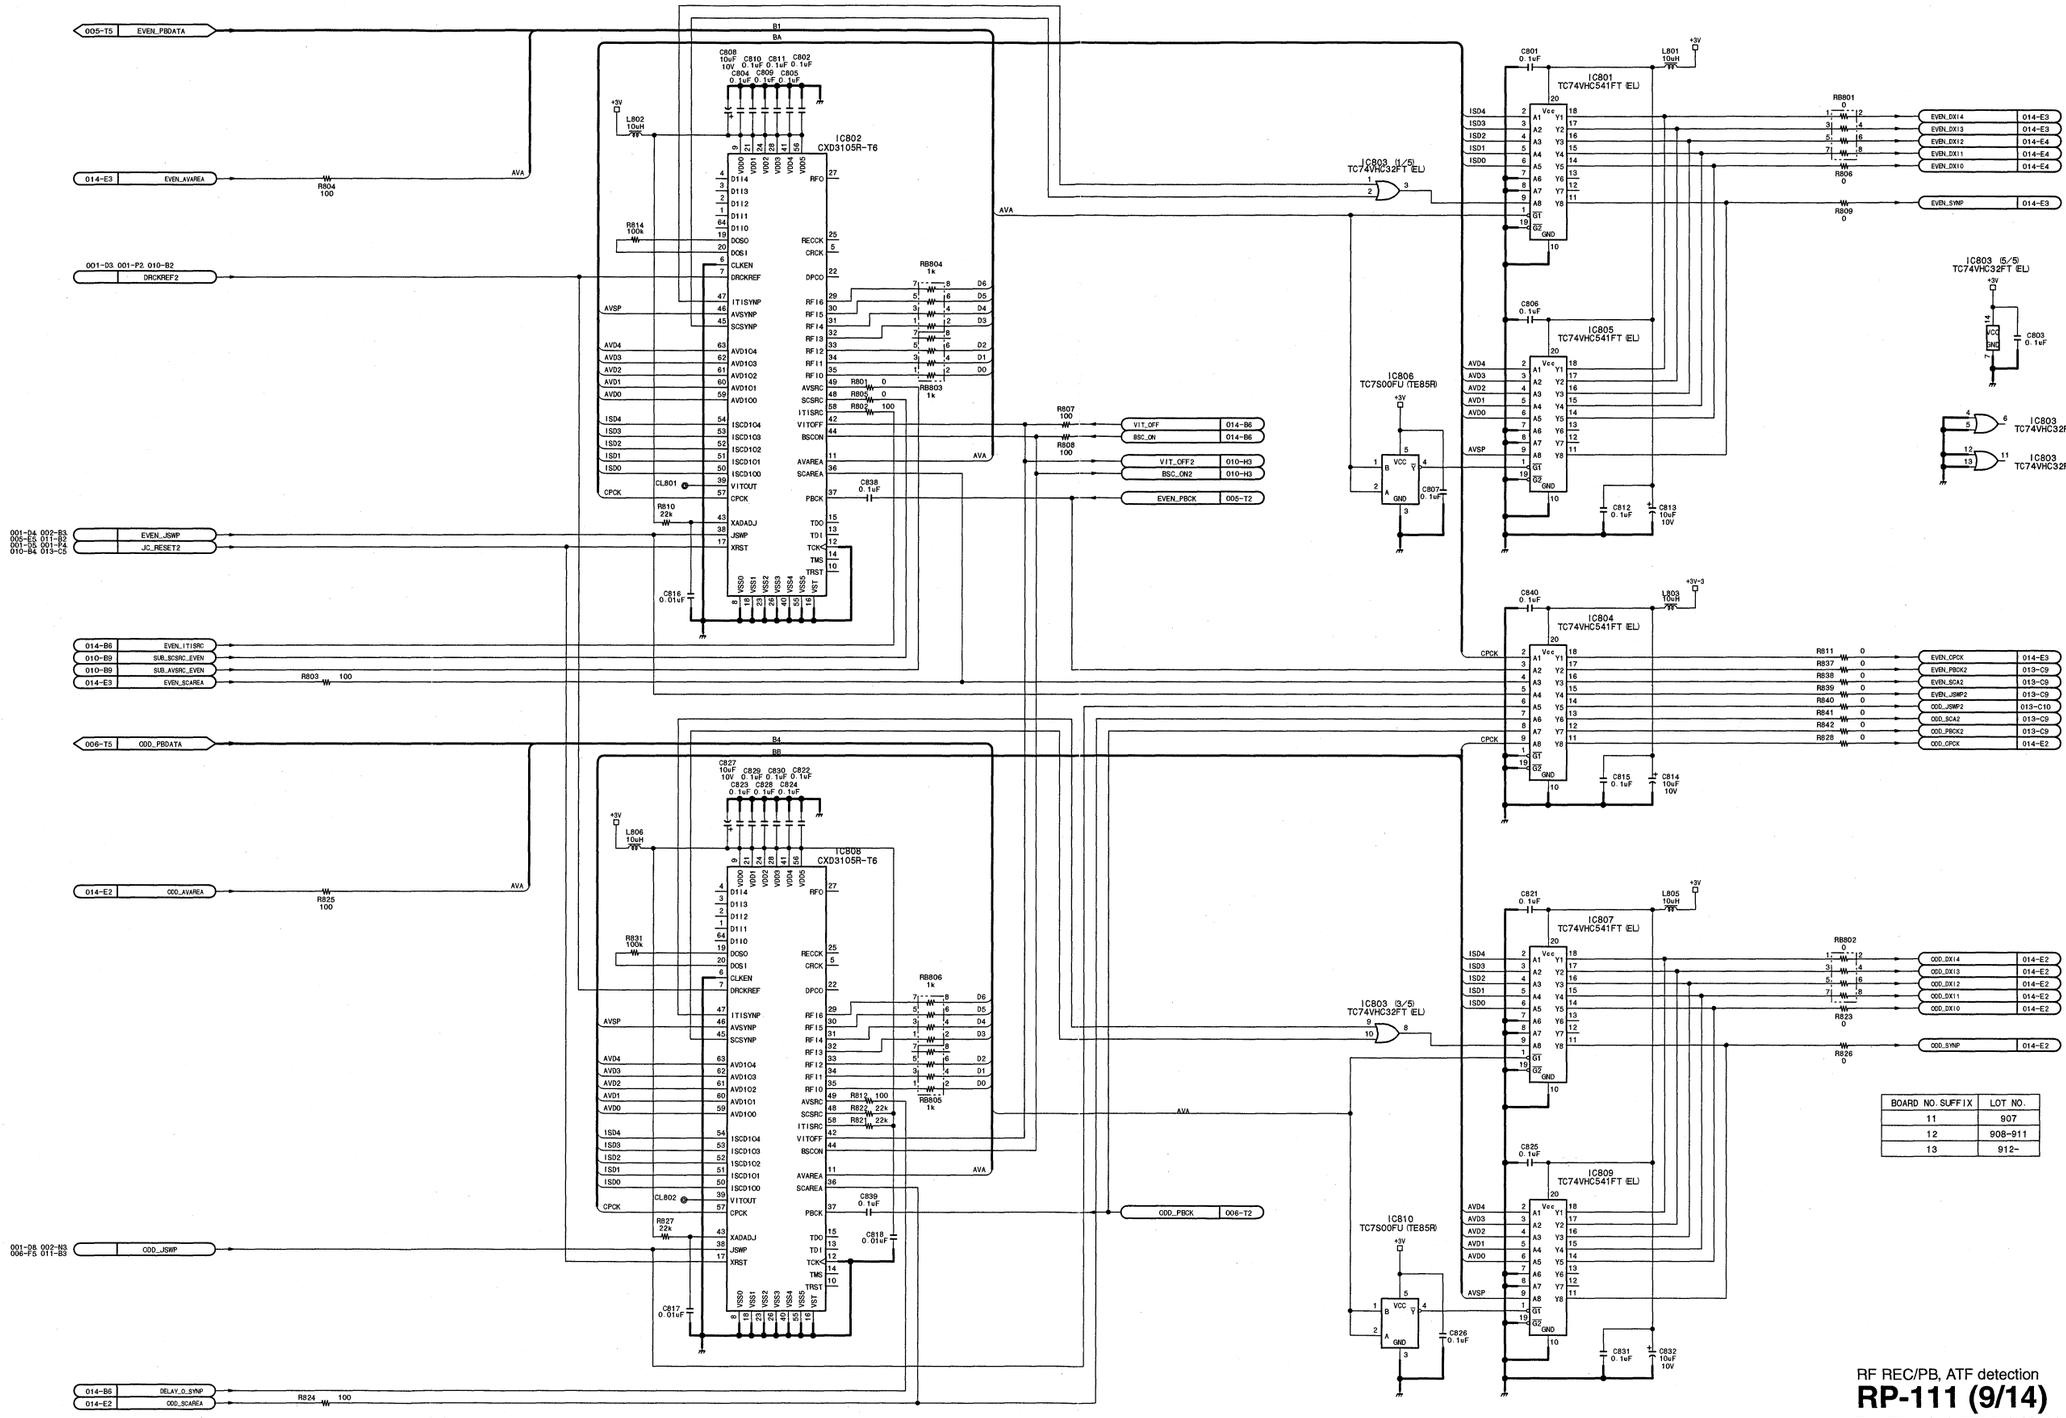
005-T5 EVEN_PBDATA
014-E3 EVEN_AVAREA
R804 100
AVA
001-D3, 001-P2, 010-B2 DRCKREF2
EVEN_JSWP
JC_RESET2
001-D4, 002-B3, 005-E5, 011-B2, 001-B3, 001-P4, 010-B4, 013-C5
014-B6 EVEN_ITISRC
010-B9 SUB_SCSRC_EVEN
010-B9 SUB_AVSRC_EVEN
014-E3 EVEN_SCAREA
R803 100
006-T5 ODD_PBDATA
014-E2 ODD_AVAREA
R825 100
001-P5, 002-B3, 006-F5, 011-B3 ODD_JSWP
014-B6 DELAY_O_SYNP
014-E2 ODD_SCAREA
R824 100
IC802 CXD3105R-T6
IC808 CXD3105R-T6
L802 10uH
L806 10uH
+3V
C808 10uF 10V
C810 C811 C802 C804 C809 C805 0.1uF
C827 10uF 10V
C829 C830 C822 C823 C828 C824 0.1uF
B1
BA
B4
BB
VD00 VD01 VD02 VD03 VD04 VD05
D114 D113 D112 D111 D110
DOSO DOSI
CLKEN DRCKREF
ITISYNP AVSYNP SCSYNP
AVD104 AVD103 AVD102 AVD101 AVD100
ISCD104 ISCD103 ISCD102 ISCD101 ISCD100
VITOUT CPCK
XADADJ JSWP XRST
VSS0 VSS1 VSS2 VSS3 VSS4 VSS5 VSS6
RFO RECCK CRCK DPCO RF16 RF15 RF14 RF13 RF12 RF11 RF10 AVSRC SCSRC ITISRC VITOFF BSCON AVAREA SCAREA PBCK TDO TDI TCK TMS TRST VDD
RB804 1k
RB803 1k
RB806 1k
RB805 1k
D6 D5 D4 D3 D2 D1 D0
R801 0
R805 0
R802 100
R812 100
R822 22k
R821 22k
R814 100k
R831 100k
R810 22k
R827 22k
C816 0.01uF
C817 0.01uF
C838 0.1uF
C839 0.1uF
C818 0.01uF
CL801
CL802
R807 100
R808 100
VIT_OFF 014-B6
BSC_ON 014-B6
VIT_OFF2 010-H3
BSC_ON2 010-H3
EVEN_PBCK 005-T2
ODD_PBCK 006-T2
IC803 (1/5) TC74VHC32FT (EL)
IC803 (3/5) TC74VHC32FT (EL)
IC803 (5/5) TC74VHC32FT (EL)
IC803 (2/5) TC74VHC32FT (EL)
IC803 (4/5) TC74VHC32FT (EL)
IC806 TC7S00FU (TE85R)
IC810 TC7S00FU (TE85R)
C803 0.1uF
C807 0.1uF
C826 0.1uF
IC801 TC74VHC541FT (EL)
IC805 TC74VHC541FT (EL)
IC804 TC74VHC541FT (EL)
IC807 TC74VHC541FT (EL)
IC809 TC74VHC541FT (EL)
C801 C806 C840 C821 C825 0.1uF
L801 10uH
L803 10uH
L805 10uH
+3V-3
C812 0.1uF
C813 10uF 10V
C815 0.1uF
C814 10uF 10V
C831 0.1uF
C832 10uF 10V
ISD4 ISD3 ISD2 ISD1 ISD0
AVD4 AVD3 AVD2 AVD1 AVD0 AVSP
CPCK
RB801 0
RB809 0
RB806 0
RB802 0
RB823 0
RB826 0
EVEN_DXI4 014-E3
EVEN_DXI3 014-E3
EVEN_DXI2 014-E4
EVEN_DXI1 014-E4
EVEN_DXI0 014-E4
EVEN_SYNP 014-E3
R811 0
R837 0
R838 0
R839 0
R840 0
R841 0
R842 0
R828 0
EVEN_CPCK 014-E3
EVEN_PBCK2 013-C9
EVEN_SCA2 013-C9
EVEN_JSWP2 013-C9
ODD_JSWP2 013-C10
ODD_SCA2 013-C9
ODD_PBCK2 013-C9
ODD_CPCK 014-E2
ODD_DXI4 014-E2
ODD_DXI3 014-E2
ODD_DXI2 014-E2
ODD_DXI1 014-E2
ODD_DXI0 014-E2
ODD_SYNP 014-E2
BOARD NO. SUFFIX
LOT NO.
11 907
12 908-911
13 912-
RF REC/PB, ATF detection
RP-111 (9/14)
BOARD NO. 1-675-521-11, 12, 13
LOT NO. 907-
DSR-2000_RP-111_C12_9

RP-111 (10/14)

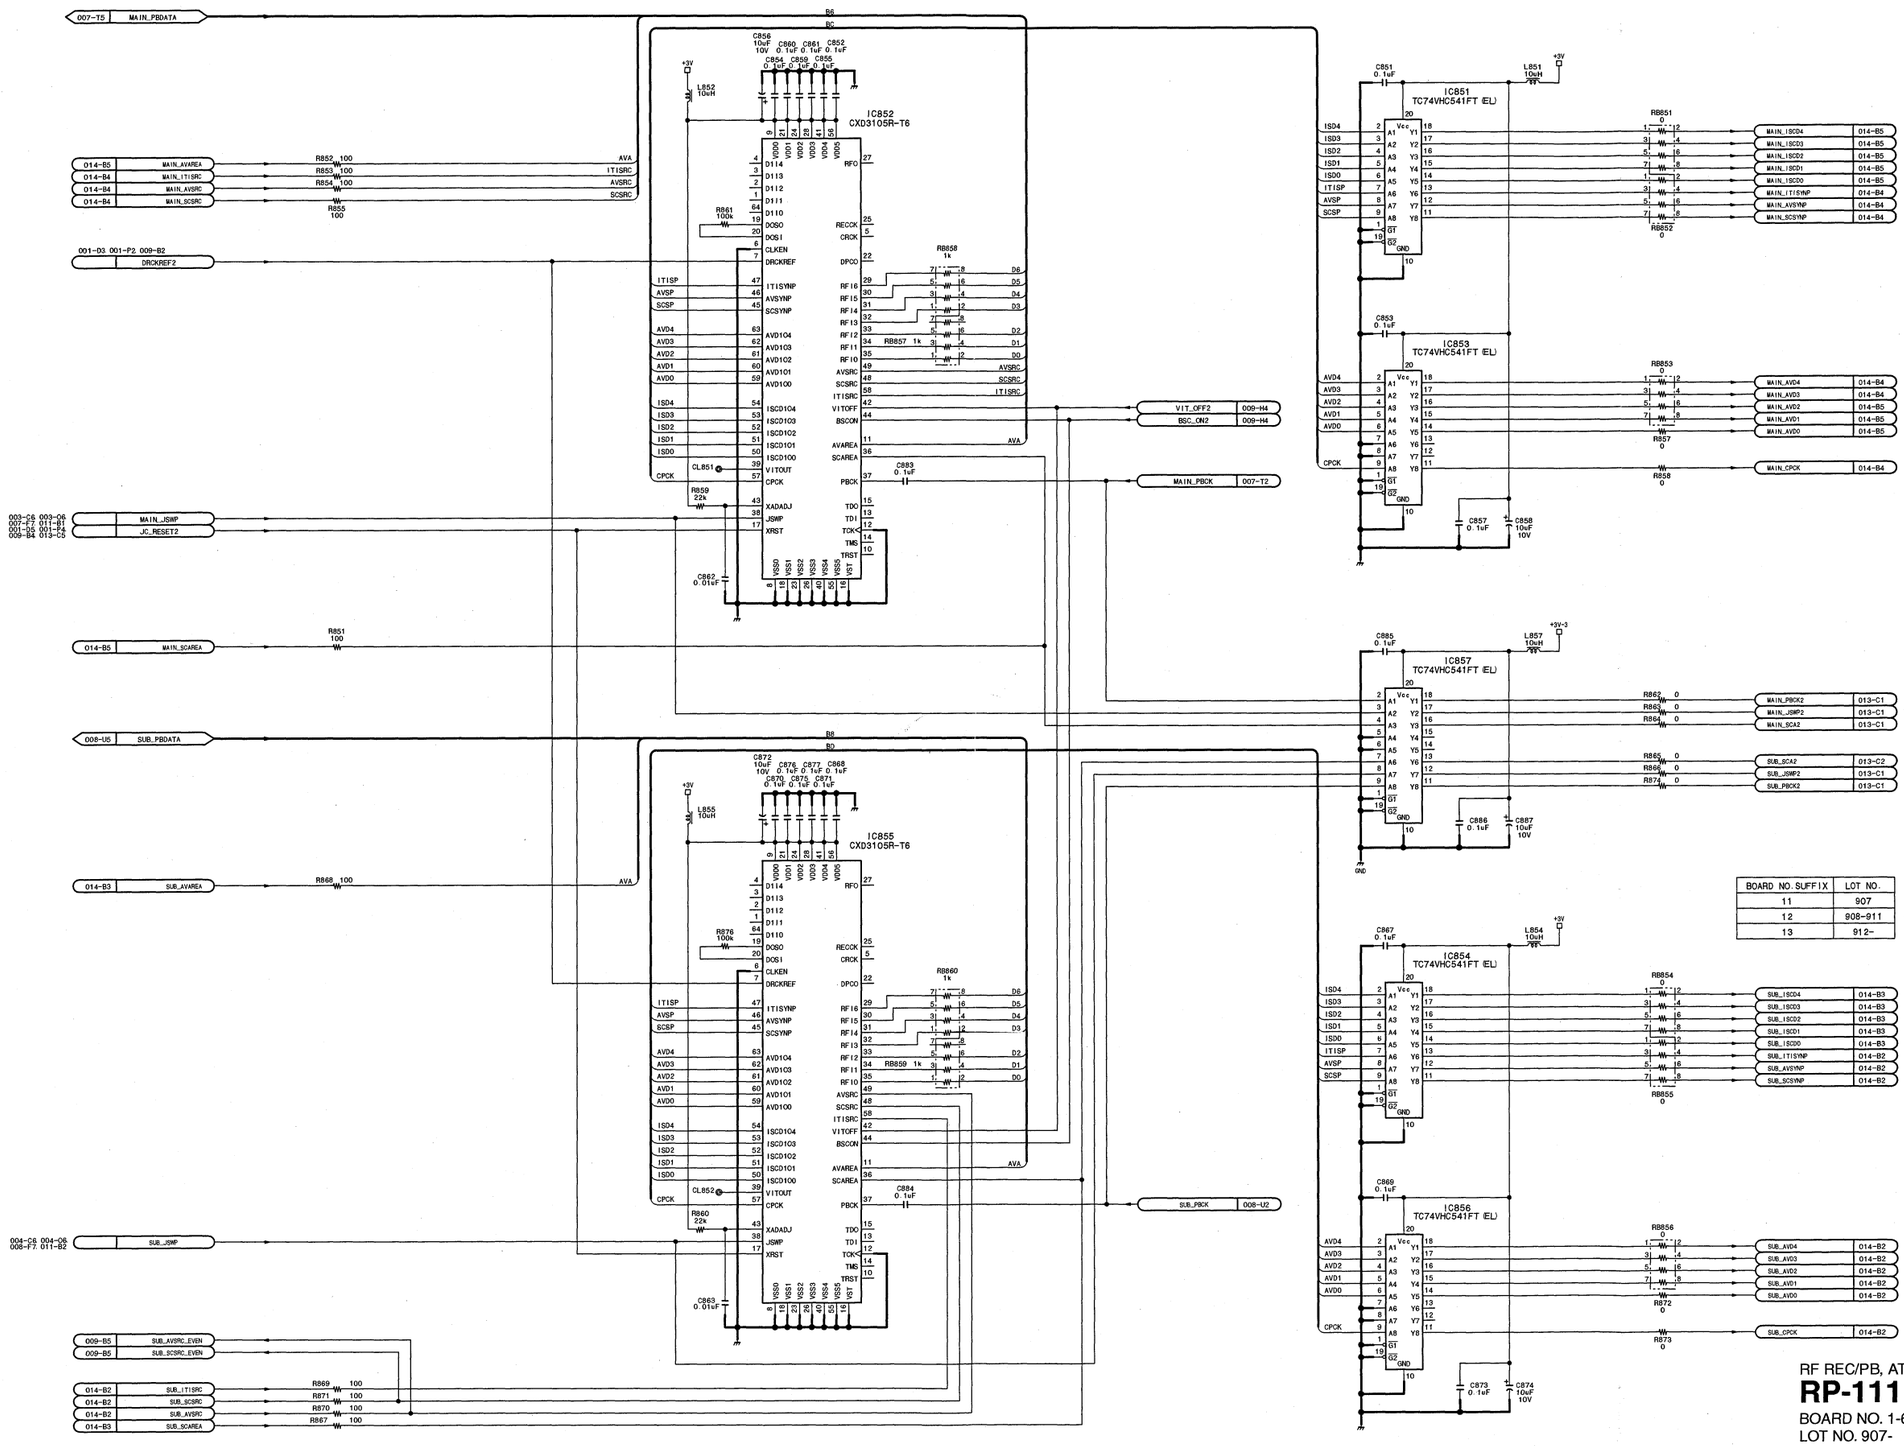
IC852 CXD3105R-T6
IC851 TC74VHC541FT (EL)
IC853 TC74VHC541FT (EL)
IC855 CXD3105R-T6
IC857 TC74VHC541FT (EL)
IC854 TC74VHC541FT (EL)
IC856 TC74VHC541FT (EL)
007-T5 MAIN_PBDATA
008-U5 SUB_PBDATA
001-D3 001-P2 009-B2 DRCKREF2
002-C6 003-D6 007-F2 011-B1 007-T6 011-B2 009-B4 013-C5 MAIN_JSWP JC_RESET2
004-C6 004-D6 008-F7 011-B2 SUB_JSWP
014-B5 MAIN_AVAREA
014-B4 MAIN_ITISRC
014-B4 MAIN_AVSRC
014-B4 MAIN_SCSRC
014-B3 SUB_AVAREA
014-B5 MAIN_SCAREA
009-B5 SUB_AVSRC_EVEN
009-B5 SUB_SCSRC_EVEN
014-B2 SUB_ITISRC
014-B2 SUB_SCSRC
014-B2 SUB_AVSRC
014-B3 SUB_SCAREA
VIT_OFF2 009-H4
BSC_ON2 009-H4
MAIN_PBCK 007-T2
SUB_PBCK 008-U2
MAIN_ISD4 014-B5
MAIN_ISD3 014-B5
MAIN_ISD2 014-B5
MAIN_ISD1 014-B5
MAIN_ISD0 014-B5
MAIN_ITISYNP 014-B4
MAIN_AVSYNP 014-B4
MAIN_SCSYNP 014-B4
MAIN_AVD4 014-B4
MAIN_AVD3 014-B4
MAIN_AVD2 014-B5
MAIN_AVD1 014-B5
MAIN_AVD0 014-B5
MAIN_CPCK 014-B4
MAIN_PBCK2 013-C1
MAIN_JSWP2 013-C1
MAIN_SCA2 013-C1
SUB_SCA2 013-C2
SUB_JSWP2 013-C1
SUB_PBCK2 013-C1
SUB_ISD4 014-B3
SUB_ISD3 014-B3
SUB_ISD2 014-B3
SUB_ISD1 014-B3
SUB_ISD0 014-B3
SUB_ITISYNP 014-B2
SUB_AVSYNP 014-B2
SUB_SCSYNP 014-B2
SUB_AVD4 014-B2
SUB_AVD3 014-B2
SUB_AVD2 014-B2
SUB_AVD1 014-B2
SUB_AVD0 014-B2
SUB_CPCK 014-B2
BOARD NO. SUFFIX | LOT NO.
11 | 907
12 | 908-911
13 | 912-
RF REC/PB, ATF detection
RP-111 (10/14)
BOARD NO. 1-675-521-11, 12, 13
LOT NO. 907-
DSR-2000_RP-111_C12_10

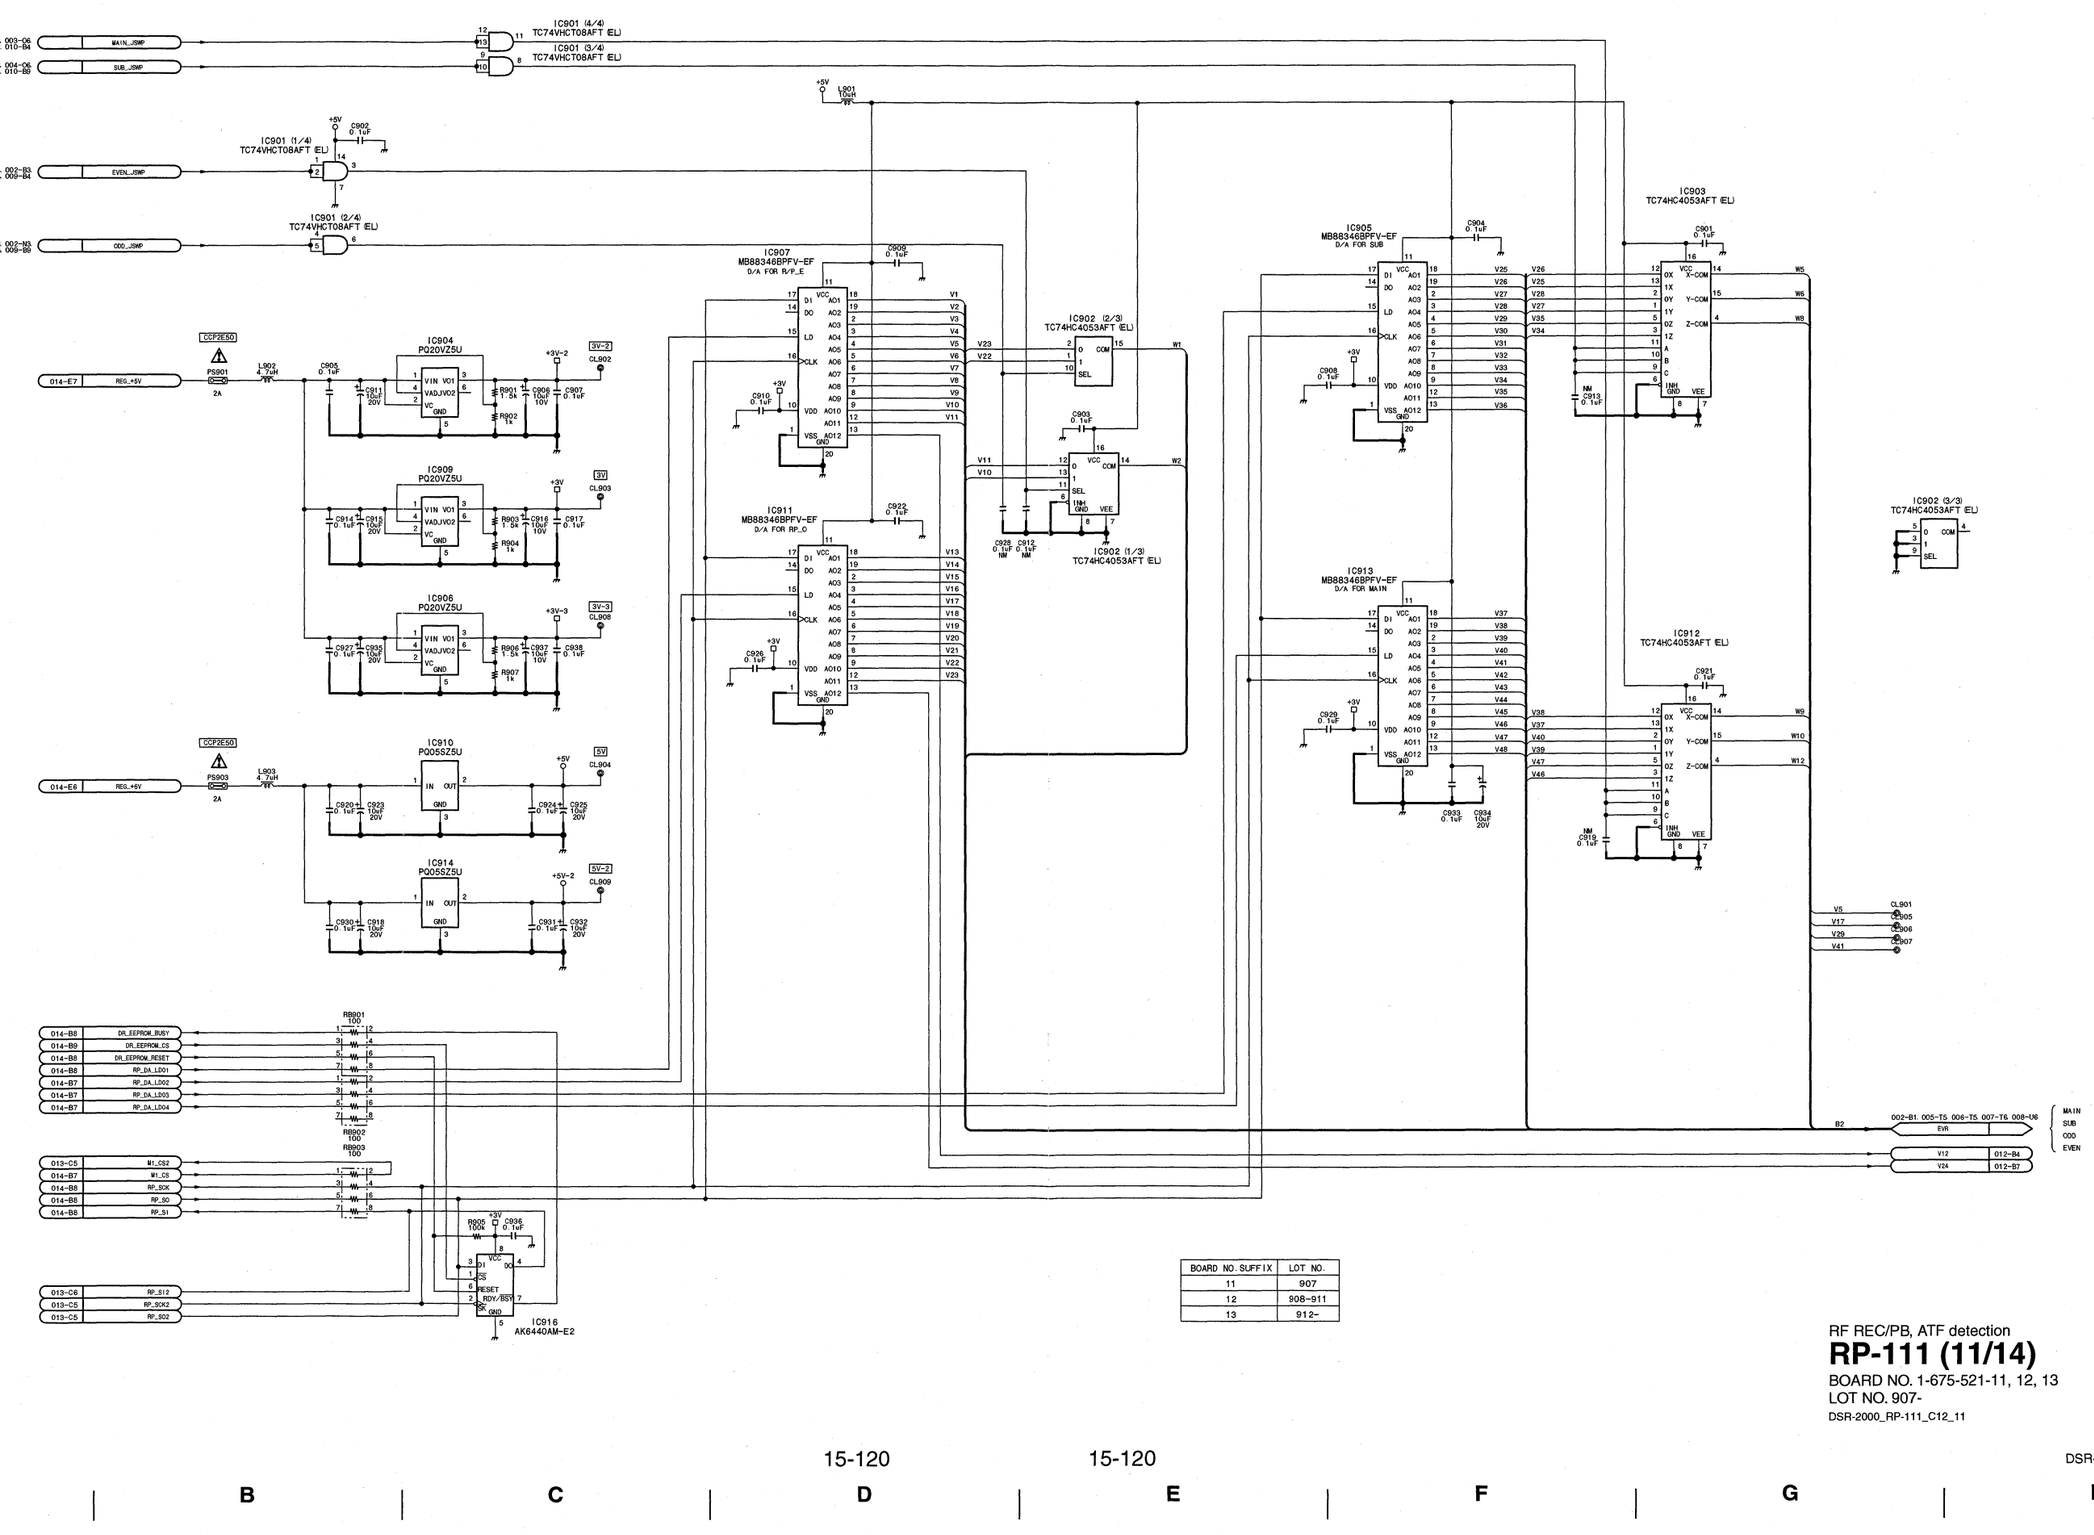

BOARD NO. SUFFIX	LOT NO.
11	907
12	908-911
13	912-

RF REC/PB, ATF detection

RP-111 (11/14)

BOARD NO. 1-675-521-11, 12, 13
LOT NO. 907-

DSR-2000_RP-111_C12_11

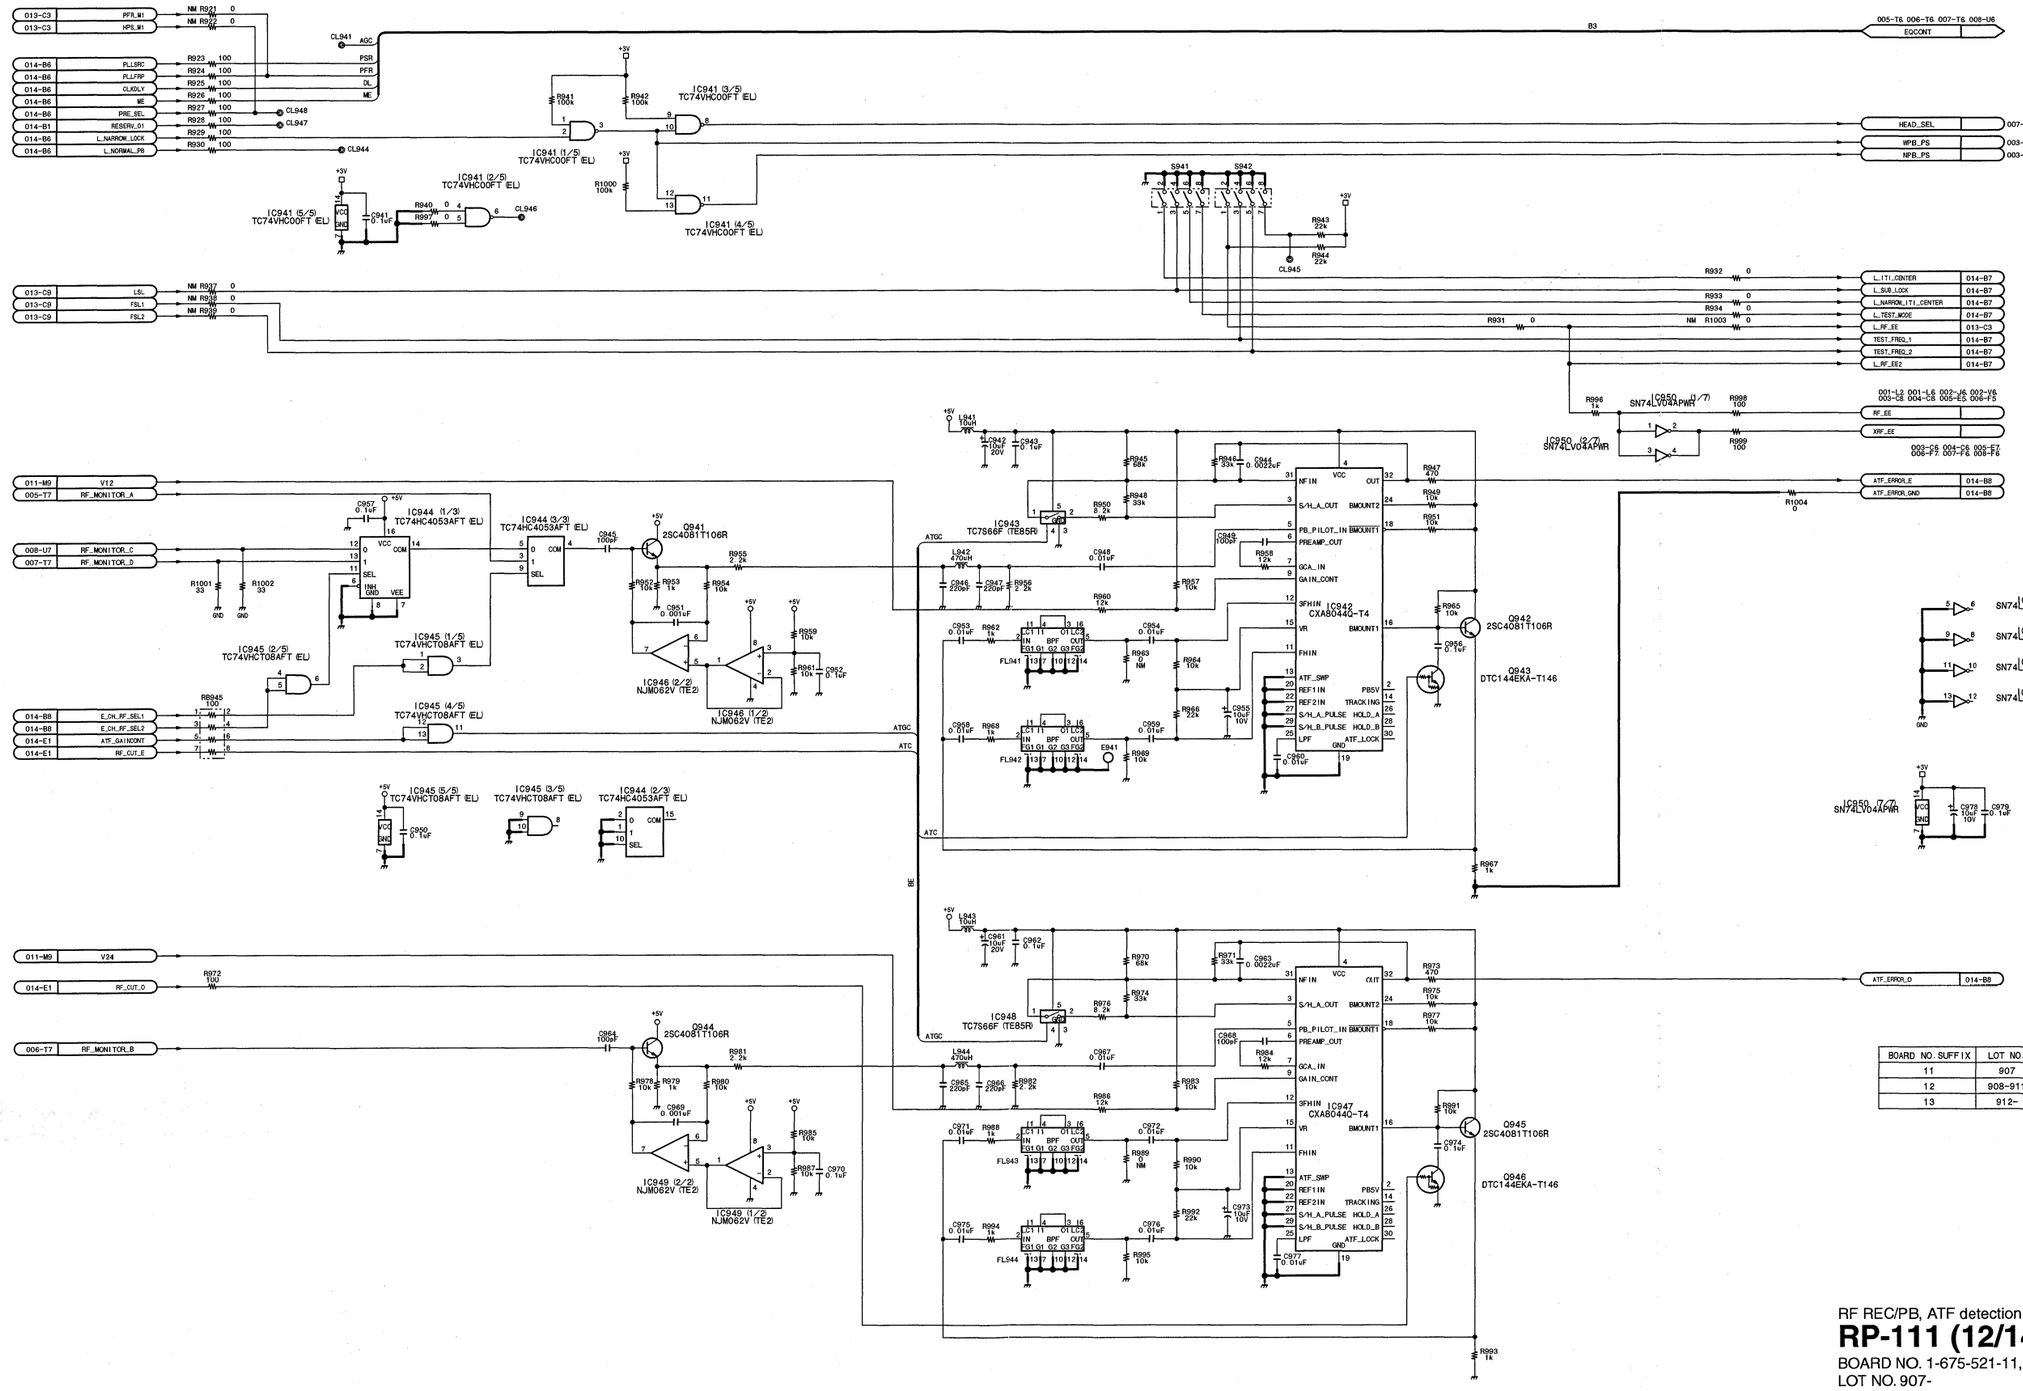

BOARD NO. SUFFIX	LOT NO.
11	907
12	908-911
13	912-

RF REC/PB, ATF detection

RP-111 (12/14)

BOARD NO. 1-675-521-11, 12, 13
LOT NO. 907-

DSR-2000_RP-111_C12_12

RP-111 (13/14)

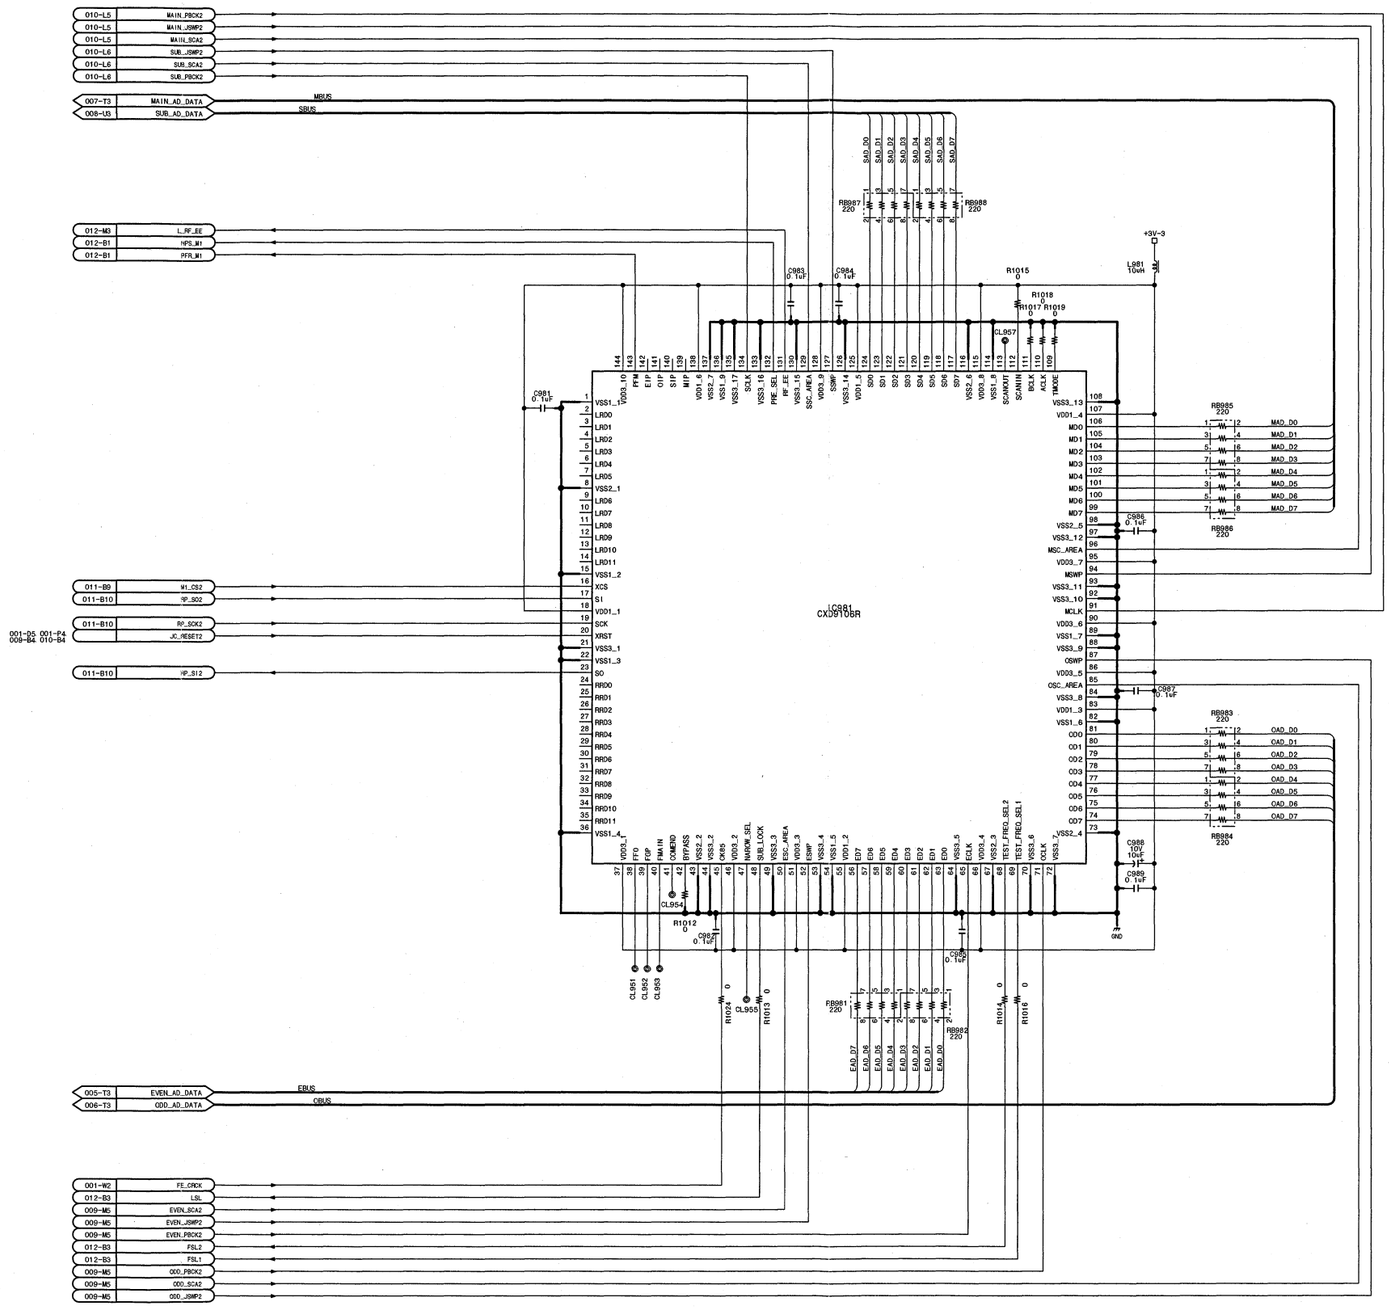

BOARD NO. SUFFIX	LOT NO.
11	907
12	908-911
13	912-

RF REC/PB, ATF detection

RP-111 (13/14)

BOARD NO. 1-675-521-11, 12, 13
LOT NO. 907-
DSR-2000_RP-111_C12_13

15-122

RP-111 (14/14)

CN301

1	RESERV_02	→ CL20	
2	RESERV_03	→ CL21	
3	JC_RESET	JC_RESET	001-D5
4	RESERV_01	RESERV_01	012-B2
5	GND		
6	SUB_RF_GND	SUB_RF_GND	008-F7
7	SUB_RF_MONITOR	SUB_RF_MONITOR	008-F7
8	GND		
9	GND		
10	SUB_CPCK	SUB_CPCK	010-L9
11	SUB_SCSRC	SUB_SCSRC	010-B10
12	SUB_AVSRC	SUB_AVSRC	010-B10
13	SUB_ITISRC	SUB_ITISRC	010-B10
14	SUB_SCSYNP	SUB_SCSYNP	010-L8
15	SUB_AVSYNP	SUB_AVSYNP	010-L8
16	SUB_ITISYNP	SUB_ITISYNP	010-L8
17	GND		
18	SUB_AVD4	SUB_AVD4	010-L9
19	SUB_AVD3	SUB_AVD3	010-L9
20	SUB_AVD2	SUB_AVD2	010-L9
21	SUB_AVD1	SUB_AVD1	010-L9
22	SUB_AVD0	SUB_AVD0	010-L9
23	SUB_ISCD4	SUB_ISCD4	010-L7
24	SUB_ISCD3	SUB_ISCD3	010-L7
25	SUB_ISCD2	SUB_ISCD2	010-L7
26	SUB_ISCD1	SUB_ISCD1	010-L7
27	SUB_ISCD0	SUB_ISCD0	010-L7
28	GND		
29	SUB_SWP	SUB_SWP	004-C6
30	SUB_SCAREA	SUB_SCAREA	010-B10
31	SUB_AVAREA	SUB_AVAREA	010-B6
32	GND		
33	MAIN_RF_GND	MAIN_RF_GND	007-F7
34	MAIN_RF_MONITOR	MAIN_RF_MONITOR	007-F7
35	GND		
36	GND		
37	MAIN_CPCK	MAIN_CPCK	010-L4
38	MAIN_SCSRC	MAIN_SCSRC	010-B2
39	MAIN_AVSRC	MAIN_AVSRC	010-B2
40	MAIN_ITISRC	MAIN_ITISRC	010-B2
41	MAIN_SCSYNP	MAIN_SCSYNP	010-L2
42	MAIN_AVSYNP	MAIN_AVSYNP	010-L2
43	MAIN_ITISYNP	MAIN_ITISYNP	010-L2
44	GND		
45	GND		
46	MAIN_AVD4	MAIN_AVD4	010-L3
47	MAIN_AVD3	MAIN_AVD3	010-L3
48	MAIN_AVD2	MAIN_AVD2	010-L3
49	MAIN_AVD1	MAIN_AVD1	010-L3
50	MAIN_AVD0	MAIN_AVD0	010-L3
51	MAIN_ISCD4	MAIN_ISCD4	010-L1
52	MAIN_ISCD3	MAIN_ISCD3	010-L2
53	MAIN_ISCD2	MAIN_ISCD2	010-L2
54	MAIN_ISCD1	MAIN_ISCD1	010-L2
55	MAIN_ISCD0	MAIN_ISCD0	010-L2
56	GND		
57	MAIN_SWP	MAIN_SWP	003-C6
58	MAIN_SCAREA	MAIN_SCAREA	010-B5
59	MAIN_AVAREA	MAIN_AVAREA	010-B2
60	GND		
61	DELAY_O_SYNP	DELAY_O_SYNP	009-B10
62	CLKDLY	CLKDLY	012-B1
63	PRE_SEL	PRE_SEL	012-B1
64	PLLSRC	PLLSRC	012-B1
65	PLLFRP	PLLFRP	012-B1
66	EVEN_ITISRC	EVEN_ITISRC	009-B5
67	V1T_OFF	V1T_OFF	009-H3
68	BSC_ON	BSC_ON	009-H4
69	ME	ME	012-B1
70	GND		
71	L_NORMAL_PB	L_NORMAL_PB	012-B2
72	L_NARROW_LOCK	L_NARROW_LOCK	012-B2
73	L_TEST_MODE	L_TEST_MODE	012-M3
74	L_NARROW_IT1_CENTER	L_NARROW_IT1_CENTER	012-M3
75	GND		
76	TEST_FREQ_2	TEST_FREQ_2	012-M3
77	TEST_FREQ_1	TEST_FREQ_1	012-M3
78	L_SUB_LOCK	L_SUB_LOCK	012-M3
79	L_IT1_CENTER	L_IT1_CENTER	012-M3
80	M1_CS	M1_CS	011-B9
81	L_RF_EE2	L_RF_EE2	012-M3
82	RP_DA_LD04	RP_DA_LD04	011-B8
83	RP_DA_LD03	RP_DA_LD03	011-B8
84	RP_DA_LD02	RP_DA_LD02	011-B8
85	RP_DA_LD01	RP_DA_LD01	011-B8
86	GND		
87	GND		
88	RP_SI	RP_SI	011-B9
89	RP_SO	RP_SO	011-B9
90	RP_SCK	RP_SCK	011-B9
91	ATF_ERROR_GND	ATF_ERROR_GND	012-M4
92	ATF_ERROR_E	ATF_ERROR_E	012-M4
93	ATF_ERROR_O	ATF_ERROR_O	012-M7
94	E_CH_RF_SEL2	E_CH_RF_SEL2	012-B5
95	E_CH_RF_SEL1	E_CH_RF_SEL1	012-B5
96	DR_EEPROM_BUSY	DR_EEPROM_BUSY	011-B8
97	DR_EEPROM_RESET	DR_EEPROM_RESET	011-B8
98	DR_EEPROM_CS	DR_EEPROM_CS	011-B8
99	GND		
100	GND		

→ GND

CN302

1	GND		
2	GND		
3	ATF_GAINCONT	ATF_GAINCONT	012-B6
4	RF_CUT_O	RF_CUT_O	012-B7
5	RF_CUT_E	RF_CUT_E	012-B6
6	GND		
7	ODD_RF_GND	ODD_RF_GND	006-F7
8	ODD_RF_MONITOR	ODD_RF_MONITOR	006-F7
9	GND		
10	GND		
11	ODD_SWP	ODD_SWP	002-N3
12	ODD_SCAREA	ODD_SCAREA	009-B10
13	ODD_AVAREA	ODD_AVAREA	009-B6
14	GND		
15	ODD_CPCK	ODD_CPCK	009-M6
16	ODD_SYNP	ODD_SYNP	009-M7
17	ODD_DX14	ODD_DX14	009-M7
18	ODD_DX13	ODD_DX13	009-M7
19	ODD_DX12	ODD_DX12	009-M7
20	ODD_DX11	ODD_DX11	009-M7
21	ODD_DX10	ODD_DX10	009-M7
22	GND		
23	EVEN_RF_GND	EVEN_RF_GND	005-E7
24	EVEN_RF_MONITOR	EVEN_RF_MONITOR	005-E7
25	GND		
26	GND		
27	EVEN_SWP	EVEN_SWP	002-B3
28	EVEN_SCAREA	EVEN_SCAREA	009-B5
29	EVEN_AVAREA	EVEN_AVAREA	009-B2
30	GND		
31	EVEN_CPCK	EVEN_CPCK	009-M5
32	EVEN_SYNP	EVEN_SYNP	009-M2
33	EVEN_DX14	EVEN_DX14	009-M1
34	EVEN_DX13	EVEN_DX13	009-M2
35	EVEN_DX12	EVEN_DX12	009-M2
36	EVEN_DX11	EVEN_DX11	009-M2
37	EVEN_DX10	EVEN_DX10	009-M2
38	GND		
39	GND		
40	ODD_DX00	ODD_DX00	001-D6
41	ODD_DX01	ODD_DX01	001-D6
42	ODD_DX02	ODD_DX02	001-D6
43	ODD_DX03	ODD_DX03	001-D6
44	ODD_DX04	ODD_DX04	001-D6
45	ODD_CLKEN	ODD_CLKEN	001-D7
46	ODD_RECA2	ODD_RECA2	006-F5
47	ODD_RECA1	ODD_RECA1	002-N3
48	GND		
49	ODD_CRCK	ODD_CRCK	001-D7
50	GND		
51	GND		
52	EVEN_DX00	EVEN_DX00	001-D2
53	EVEN_DX01	EVEN_DX01	001-D2
54	EVEN_DX02	EVEN_DX02	001-D2
55	EVEN_DX03	EVEN_DX03	001-D2
56	EVEN_DX04	EVEN_DX04	001-D2
57	EVEN_CLKEN	EVEN_CLKEN	001-D2
58	EVEN_RECA2	EVEN_RECA2	005-E4
59	EVEN_RECA1	EVEN_RECA1	002-B3
60	GND		
61	EVEN_CRCK	EVEN_CRCK	001-D2
62	GND		
63	FE_CLKEN	FE_CLKEN	001-P2
64	FE_STBY	FE_STBY	001-P7
65	FE_SWP	FE_SWP	001-P7
66	GND		
67	DRCKREF	DRCKREF	001-D3
68	GND		
69	REG_+6V	REG_+6V	011-B6
70	REG_+6V		
71	REG_+6V		
72	REG_+6V		
73	REG_+5V	REG_+5V	011-B4
74	REG_+5V		
75	REG_+5V		
76	REG_+5V		
77	REG_GND		
78	REG_GND		
79	REG_GND		
80	REG_GND		

→ GND

CN1

1	FE_1_G	FE_1_G	001-W6
2	FE_1_X	FE_1_X	001-W6
3	FE_1_Y	FE_1_Y	001-W6
4	FE_2_Y	FE_2_Y	001-W6
5	FE_2_X	FE_2_X	001-W6
6	FE_2_G	FE_2_G	001-W6
7	REC_E_Y	REC_E_Y	002-J3
8	REC_E_X	REC_E_X	002-J3
9	REC_E_G	REC_E_G	002-J3
10	REC_O_Y	REC_O_Y	002-V3
11	REC_O_X	REC_O_X	002-V3
12	REC_O_G	REC_O_G	002-V3

14 13

CN2

1	PRE_E_G	PRE_E_G	002-J6
2	PRE_E_X	PRE_E_X	002-J6
3	PRE_E_Y	PRE_E_Y	002-J5
4	PRE_GND	PRE_GND	002-J7
5	PRE_GND		
6	PRE_O_X	PRE_O_X	002-V5
7	PRE_O_Y	PRE_O_Y	002-V5
8	PRE_O_G	PRE_O_G	002-V6

CN3

1	WPB_E1_G	WPB_E1_G	003-K4
2	WPB_E1_X	WPB_E1_X	003-K3
3	WPB_E1_Y	WPB_E1_Y	003-K3
4	WPB_O1_X	WPB_O1_X	003-K5
5	WPB_O1_Y	WPB_O1_Y	003-K5
6	WPB_O1_G	WPB_O1_G	003-K6
7	NPB_E1_G	NPB_E1_G	003-W4
8	NPB_E1_X	NPB_E1_X	003-W3
9	NPB_E1_Y	NPB_E1_Y	003-W3
10	NPB_O1_X	NPB_O1_X	003-W5
11	NPB_O1_Y	NPB_O1_Y	003-W5
12	NPB_O1_G	NPB_O1_G	003-W6

14 13

CN4

1	WPB_E2_G	WPB_E2_G	004-K4
2	WPB_E2_X	WPB_E2_X	004-K3
3	WPB_E2_Y	WPB_E2_Y	004-K3
4	WPB_O2_X	WPB_O2_X	004-K5
5	WPB_O2_Y	WPB_O2_Y	004-K5
6	WPB_O2_G	WPB_O2_G	004-K6
7	NPB_E2_G	NPB_E2_G	004-W4
8	NPB_E2_X	NPB_E2_X	004-W3
9	NPB_E2_Y	NPB_E2_Y	004-W3
10	NPB_O2_X	NPB_O2_X	004-W5
11	NPB_O2_Y	NPB_O2_Y	004-W5
12	NPB_O2_G	NPB_O2_G	004-W6

14 13

BOARD NO. SUFFIX	LOT NO.
11	907
12	908-911
13	912-

RF REC/PB, ATF detection

RP-111 (14/14)

BOARD NO. 1-675-521-11, 12, 13
LOT NO. 907-

DSR-2000_RP-111_C12_14

SE-521, SE-522, SE-525, SE-538

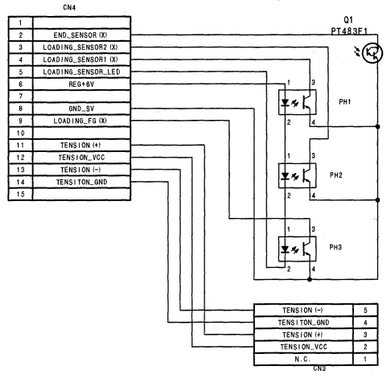

Mode sensor/tape end sensor/loading motor FG sensor

SE-521

BOARD NO. 1-675-532-11
LOT NO. 907-
DSR-2000_SE-521_C11_1



LED signal board

SE-525

BOARD NO. 1-675-522-11
LOT NO. 907-
DSR-2000_SE-525_C11_1

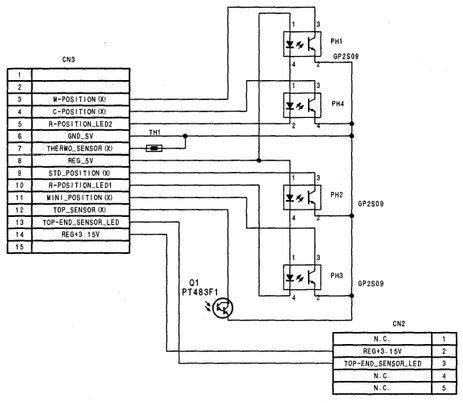

Tape top sensor/reel position sensor (Mini/M/Standard)

SE-522

BOARD NO. 1-675-546-11
LOT NO. 907-
DSR-2000_SE-522_C11_1



Tension sensor

SE-538

BOARD NO. 1-675-527-11
LOT NO. 907-
DSR-2000_SE-538_C11_1

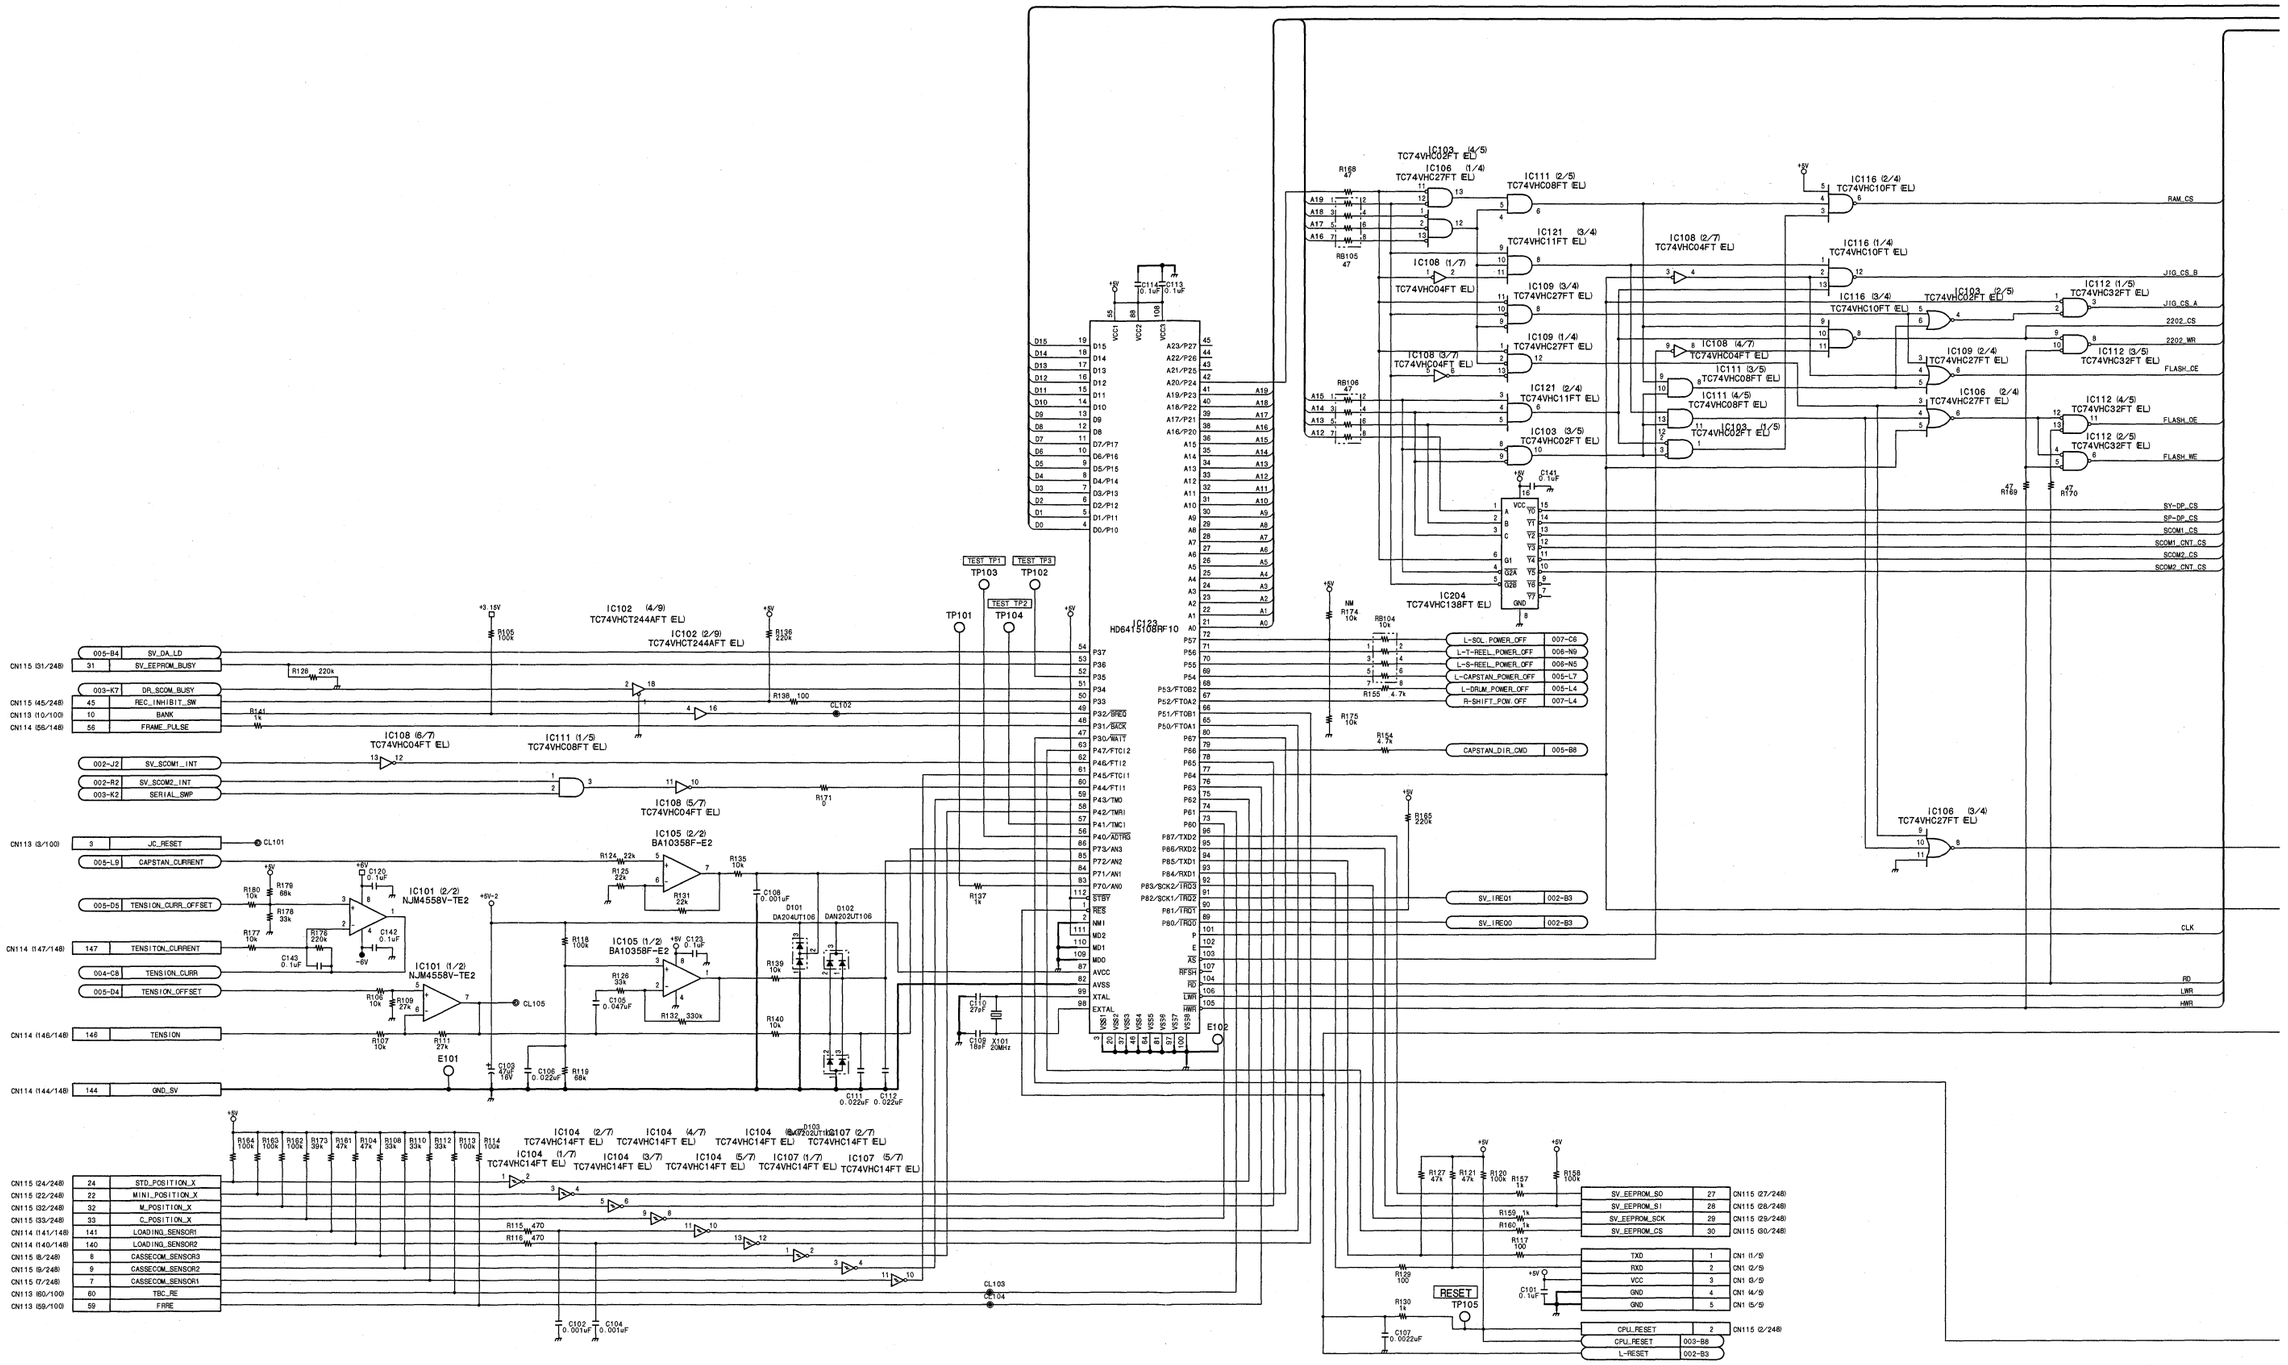
IC123 HD6415108RF10
IC204 TC74VHC138FT (EL)
IC103 (4/5) TC74VHC02FT (EL)
IC106 (1/4) TC74VHC27FT (EL)
IC111 (2/5) TC74VHC08FT (EL)
IC121 (3/4) TC74VHC11FT (EL)
IC108 (1/7) TC74VHC04FT (EL)
IC109 (3/4) TC74VHC27FT (EL)
IC109 (1/4) TC74VHC27FT (EL)
IC108 (3/7) TC74VHC04FT (EL)
IC121 (2/4) TC74VHC11FT (EL)
IC103 (3/5) TC74VHC02FT (EL)
IC108 (2/7) TC74VHC04FT (EL)
IC116 (2/4) TC74VHC10FT (EL)
IC116 (1/4) TC74VHC10FT (EL)
IC116 (3/4) TC74VHC10FT (EL)
IC103 (2/5) TC74VHC02FT (EL)
IC112 (1/5) TC74VHC32FT (EL)
IC112 (3/5) TC74VHC32FT (EL)
IC109 (2/4) TC74VHC27FT (EL)
IC106 (2/4) TC74VHC27FT (EL)
IC112 (4/5) TC74VHC32FT (EL)
IC112 (2/5) TC74VHC32FT (EL)
IC108 (4/7) TC74VHC04FT (EL)
IC111 (3/5) TC74VHC08FT (EL)
IC111 (4/5) TC74VHC08FT (EL)
IC103 (1/5) TC74VHC02FT (EL)
IC106 (3/4) TC74VHC27FT (EL)
IC102 (4/9) TC74VHCT244AFT (EL)
IC102 (2/9) TC74VHCT244AFT (EL)
IC108 (6/7) TC74VHC04FT (EL)
IC111 (1/5) TC74VHC08FT (EL)
IC108 (5/7) TC74VHC04FT (EL)
IC105 (2/2) BA10358F-E2
IC101 (2/2) NJM4558V-TE2
IC105 (1/2) BA10358F-E2
IC101 (1/2) NJM4558V-TE2
IC104 (2/7) TC74VHC14FT (EL)
IC104 (4/7) TC74VHC14FT (EL)
IC104 (6/7) TC74VHC14FT (EL)
IC107 (2/7) TC74VHC14FT (EL)
IC104 (1/7) TC74VHC14FT (EL)
IC104 (3/7) TC74VHC14FT (EL)
IC104 (5/7) TC74VHC14FT (EL)
IC107 (1/7) TC74VHC14FT (EL)
IC107 (5/7) TC74VHC14FT (EL)
D101 DA204UT106
D102 DAN202UT106
E101
E102
X101 20MHz
RESET TP105
TEST_TP1 TP103
TEST_TP3 TP102
TEST_TP2 TP104
TP101
CL101
CL102
CL103
CL104
CL105
RAM_CS
JIG_CS_B
JIG_CS_A
2202_CS
2202_WR
FLASH_CE
FLASH_OE
FLASH_WE
SY-DP_CS
SP-DP_CS
SCOM1_CS
SCOM1_CNT_CS
SCOM2_CS
SCOM2_CNT_CS
CLK
RD
LWR
HWR
L-SOL_POWER_OFF 007-C6
L-T-REEL_POWER_OFF 006-N9
L-S-REEL_POWER_OFF 006-N5
L-CAPSTAN_POWER_OFF 005-L7
L-DRUM_POWER_OFF 005-L4
R-SHIFT_POW_OFF 007-L4
CAPSTAN_DIR_CMD 005-B8
SV_IREQ1 002-B3
SV_IREQ0 002-B3
SV_EEPROM_SO 27 CN115 (27/248)
SV_EEPROM_SI 28 CN115 (28/248)
SV_EEPROM_SCK 29 CN115 (29/248)
SV_EEPROM_CS 30 CN115 (30/248)
TXD 1 CN1 (1/5)
RXD 2 CN1 (2/5)
VCC 3 CN1 (3/5)
GND 4 CN1 (4/5)
GND 5 CN1 (5/5)
CPU_RESET 2 CN115 (2/248)
CPU_RESET 003-B8
L-RESET 002-B3
005-B4 SV_DA_LD
CN115 (31/248) 31 SV_EEPROM_BUSY
003-K7 DR_SCOM_BUSY
CN115 (45/248) 45 REC_INHIBIT_SW
CN113 (10/100) 10 BANK
CN114 (56/148) 56 FRAME_PULSE
002-J2 SV_SCOM1_INT
002-R2 SV_SCOM2_INT
003-K2 SERIAL_SWP
CN113 (3/100) 3 JC_RESET
005-L9 CAPSTAN_CURRENT
005-D5 TENSION_CURR_OFFSET
CN114 (147/148) 147 TENSITION_CURRENT
004-C8 TENSION_CURR
005-D4 TENSION_OFFSET
CN114 (146/148) 146 TENSION
CN114 (144/148) 144 GND_SV
CN115 (24/248) 24 STD_POSITION_X
CN115 (22/248) 22 MINI_POSITION_X
CN115 (32/248) 32 M_POSITION_X
CN115 (33/248) 33 C_POSITION_X
CN114 (141/148) 141 LOADING_SENSOR1
CN114 (140/148) 140 LOADING_SENSOR2
CN115 (8/248) 8 CASSECOM_SENSOR3
CN115 (9/248) 9 CASSECOM_SENSOR2
CN115 (7/248) 7 CASSECOM_SENSOR1
CN113 (60/100) 60 TBC_RE
CN113 (59/100) 59 FIRE

SV-212 (1/7)

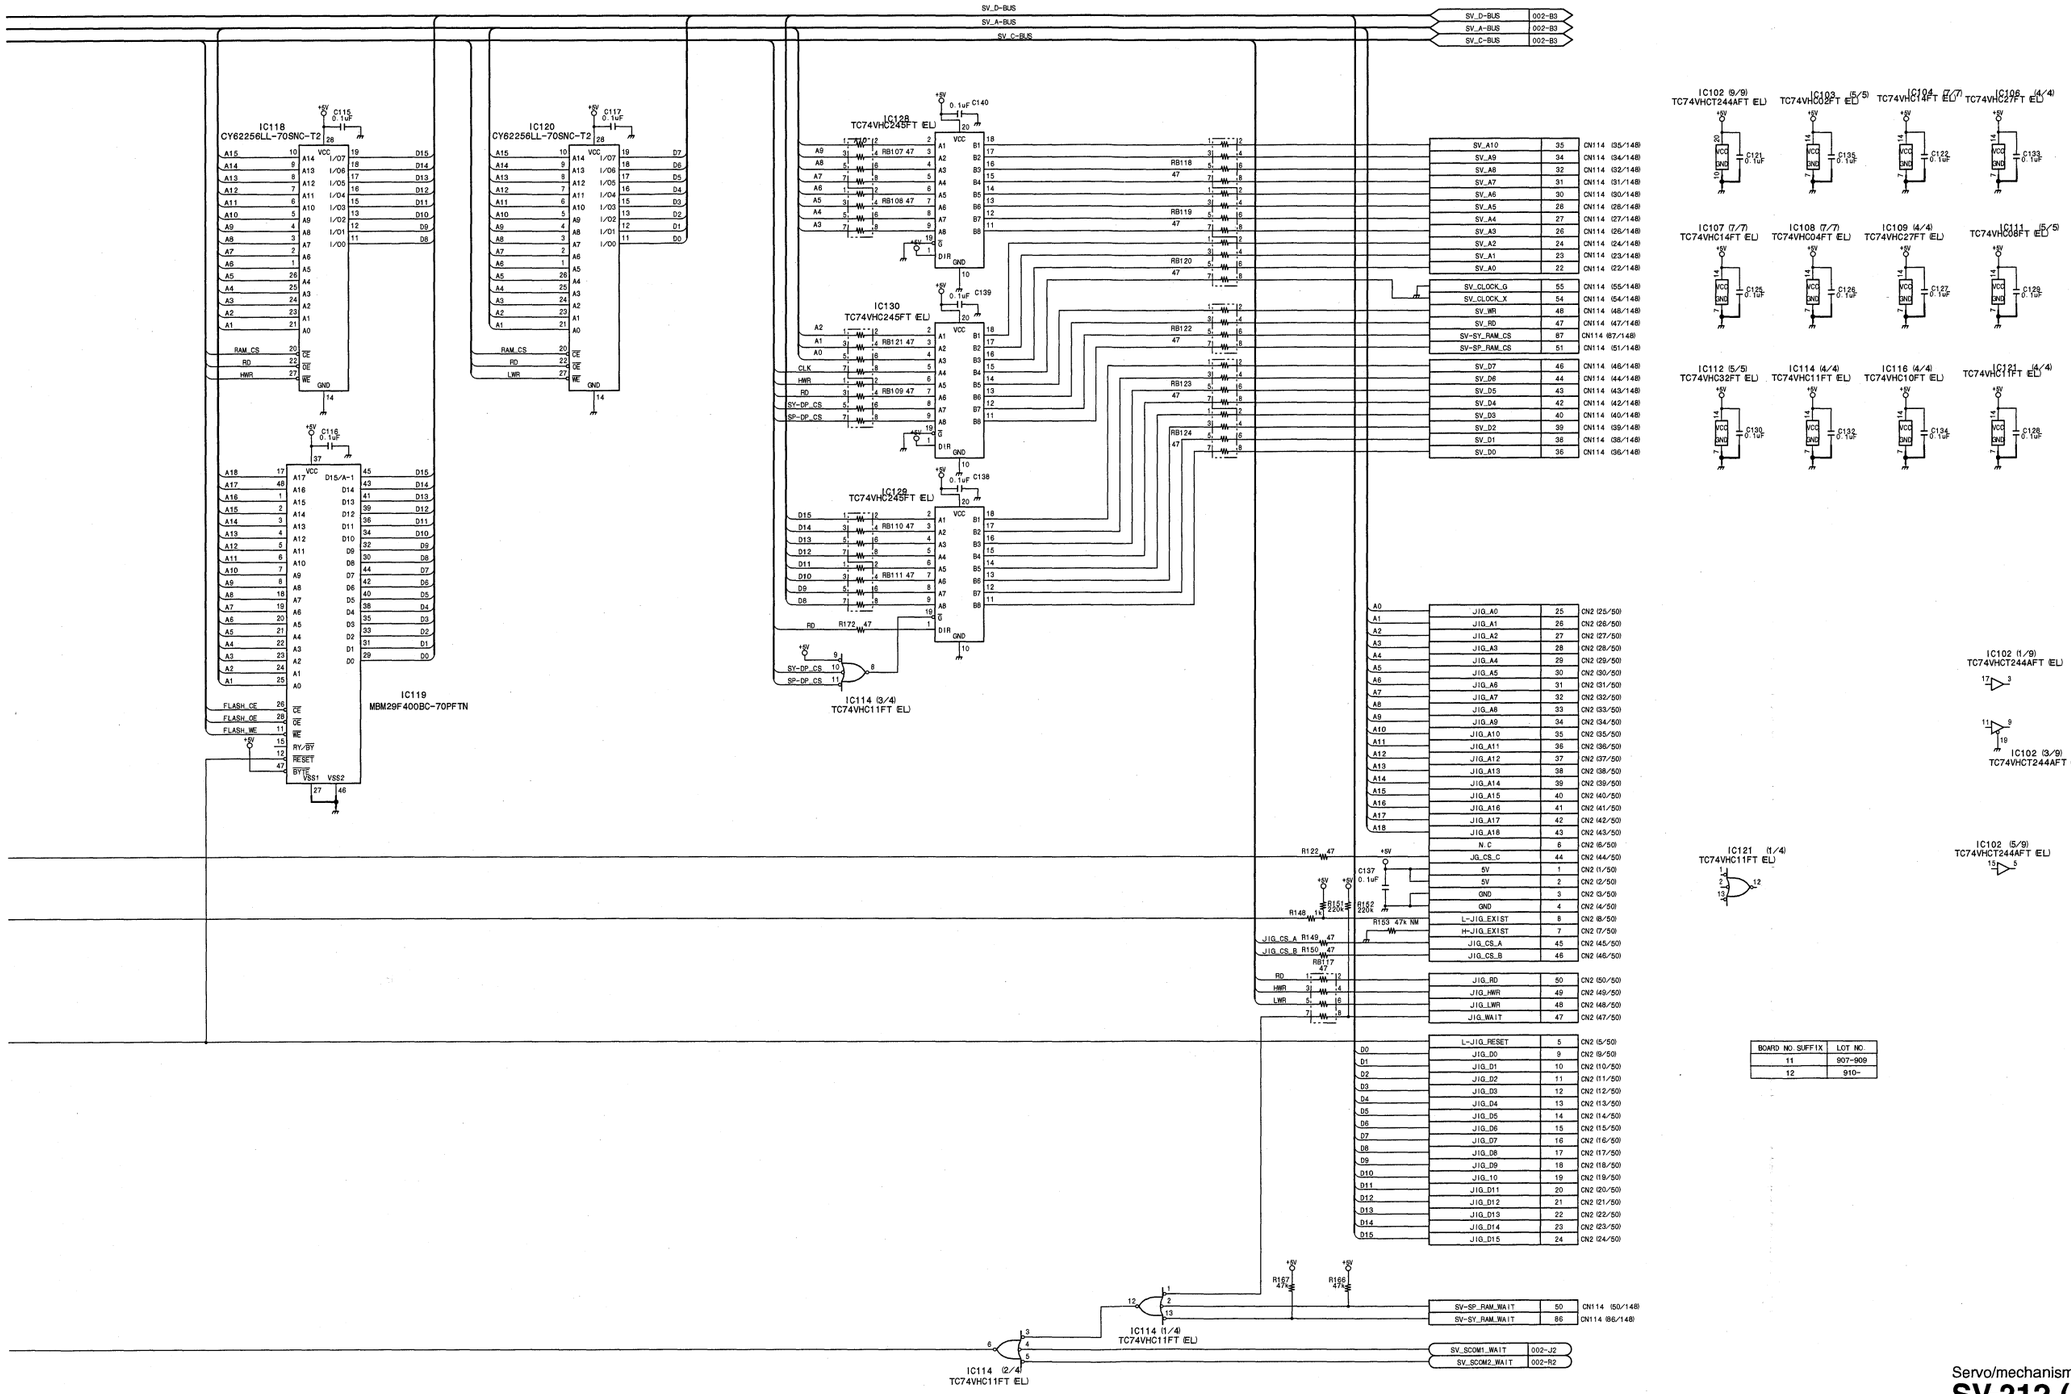

BOARD NO. SUFFIX	LOT NO.
11	907-909
12	910-

Servo/mechanism control

SV-212 (1/7)

BOARD NO. 1-675-528-11, 12
LOT NO. 907-
DSR-2000_SV-212_012_1

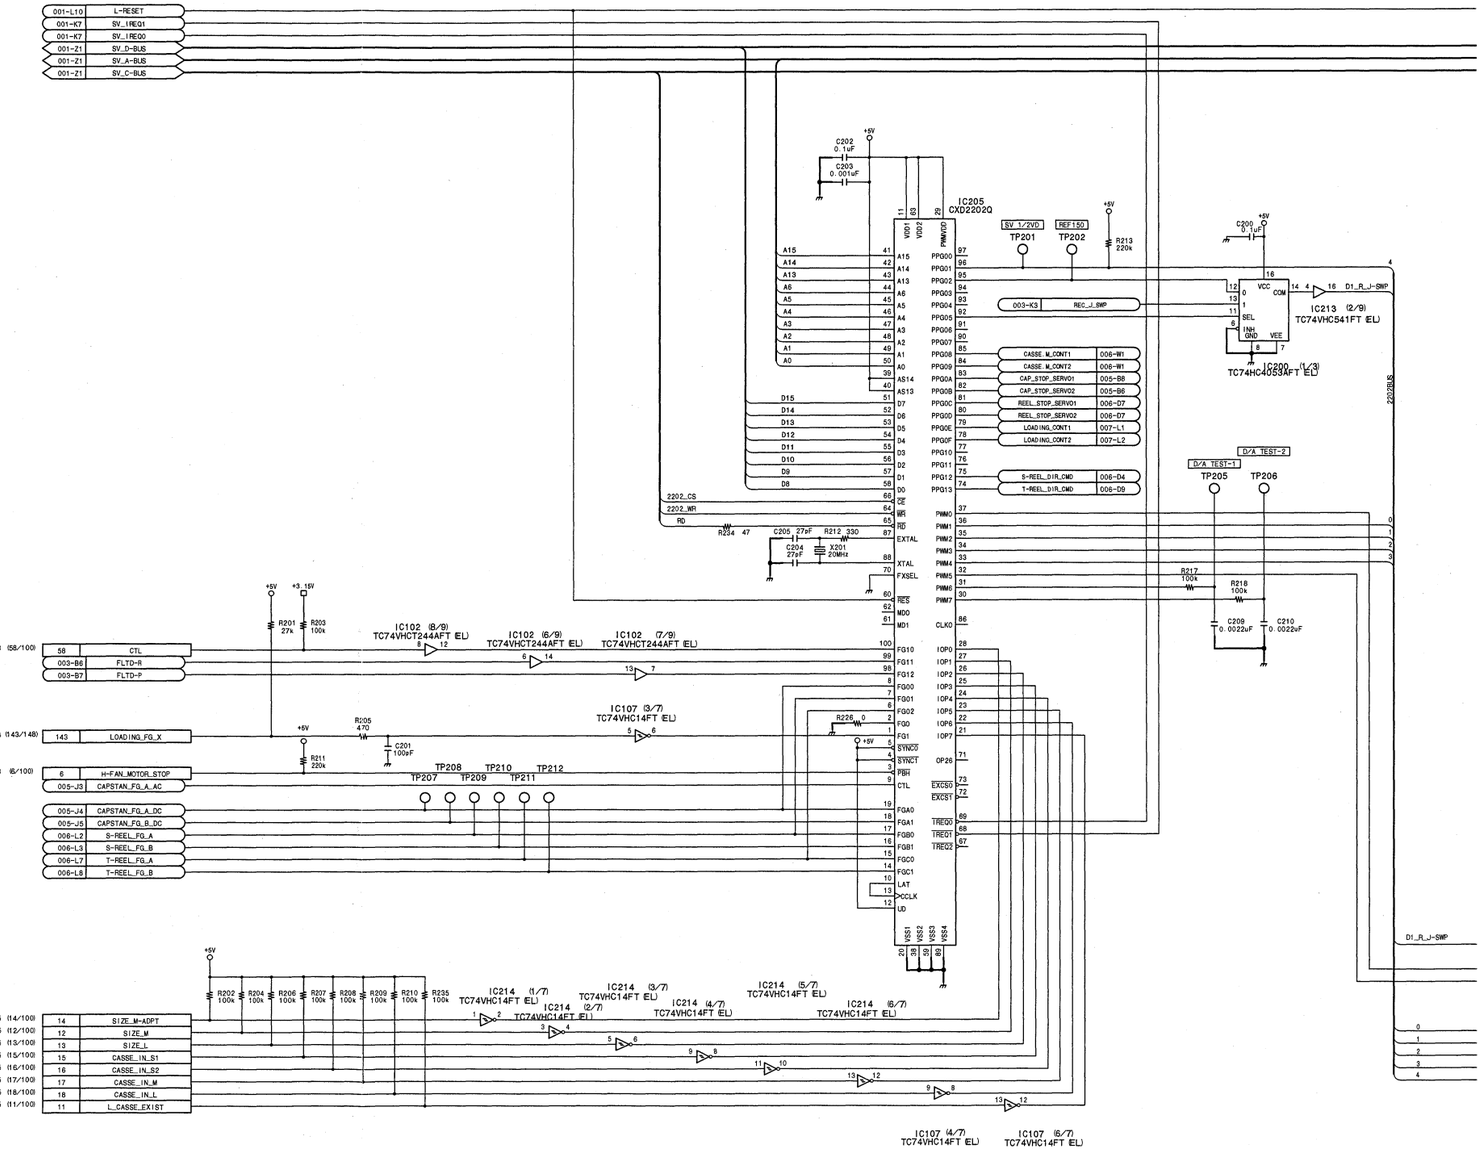
001-L10 L-RESET
001-K7 SV_1REQ1
001-K7 SV_1REQ0
001-Z1 SV_D-BUS
001-Z1 SV_A-BUS
001-Z1 SV_C-BUS
IC205 CXD2202Q
SV_1/2VD
REF150
TP201
TP202
R213 220k
C202 0.1uF
C203 0.001uF
C200 0.1uF
IC213 (2/9) TC74VHC541FT (EL)
IC200 (1/3) TC74HC4053AFT (EL)
D1_R_J-SMP
003-K3 REC_J_SMP
CASSE_M_CONT1 006-W1
CASSE_M_CONT2 006-W1
CAP_STOP_SERVO1 005-B8
CAP_STOP_SERVO2 005-B6
REEL_STOP_SERVO1 006-D7
REEL_STOP_SERVO2 006-D7
LOADING_CONT1 007-L1
LOADING_CONT2 007-L2
S-REEL_DIR_CMD 006-D4
T-REEL_DIR_CMD 006-D9
D/A TEST-1
D/A TEST-2
TP205
TP206
R217 100k
R218 100k
C209 0.0022uF
C210 0.0022uF
2202_CS
2202_WR
RD
R234 47
C205 27pF
R212 330
C204 27pF
X201 20MHz
R201 27k
R203 100k
IC102 (8/9) TC74VHCT244AFT (EL)
IC102 (6/9) TC74VHCT244AFT (EL)
IC102 (7/9) TC74VHCT244AFT (EL)
CN113 (58/100)
58 CTL
003-B6 FLTD-R
003-B7 FLTD-P
CN114 (143/148)
143 LOADING_FG_X
IC107 (3/7) TC74VHC14FT (EL)
R205 470
C201 100pF
R211 220k
R226 0
CN113 (6/100)
6 H-FAN_MOTOR_STOP
005-J3 CAPSTAN_FG_A_AC
TP207 TP208 TP209 TP210 TP211 TP212
005-J4 CAPSTAN_FG_A_DC
005-J5 CAPSTAN_FG_B_DC
006-L2 S-REEL_FG_A
006-L3 S-REEL_FG_B
006-L7 T-REEL_FG_A
006-L8 T-REEL_FG_B
R202 100k
R204 100k
R206 100k
R207 100k
R208 100k
R209 100k
R210 100k
R235 100k
IC214 (1/7) TC74VHC14FT (EL)
IC214 (2/7) TC74VHC14FT (EL)
IC214 (3/7) TC74VHC14FT (EL)
IC214 (4/7) TC74VHC14FT (EL)
IC214 (5/7) TC74VHC14FT (EL)
IC214 (6/7) TC74VHC14FT (EL)
CN115 (14/100) 14 SIZE_M-ADPT
CN115 (12/100) 12 SIZE_M
CN115 (13/100) 13 SIZE_L
CN115 (15/100) 15 CASSE_IN_S1
CN115 (16/100) 16 CASSE_IN_S2
CN115 (17/100) 17 CASSE_IN_M
CN115 (18/100) 18 CASSE_IN_L
CN115 (11/100) 11 L_CASSE_EXIST
IC107 (4/7) TC74VHC14FT (EL)
IC107 (6/7) TC74VHC14FT (EL)

SV-212 (2/7)

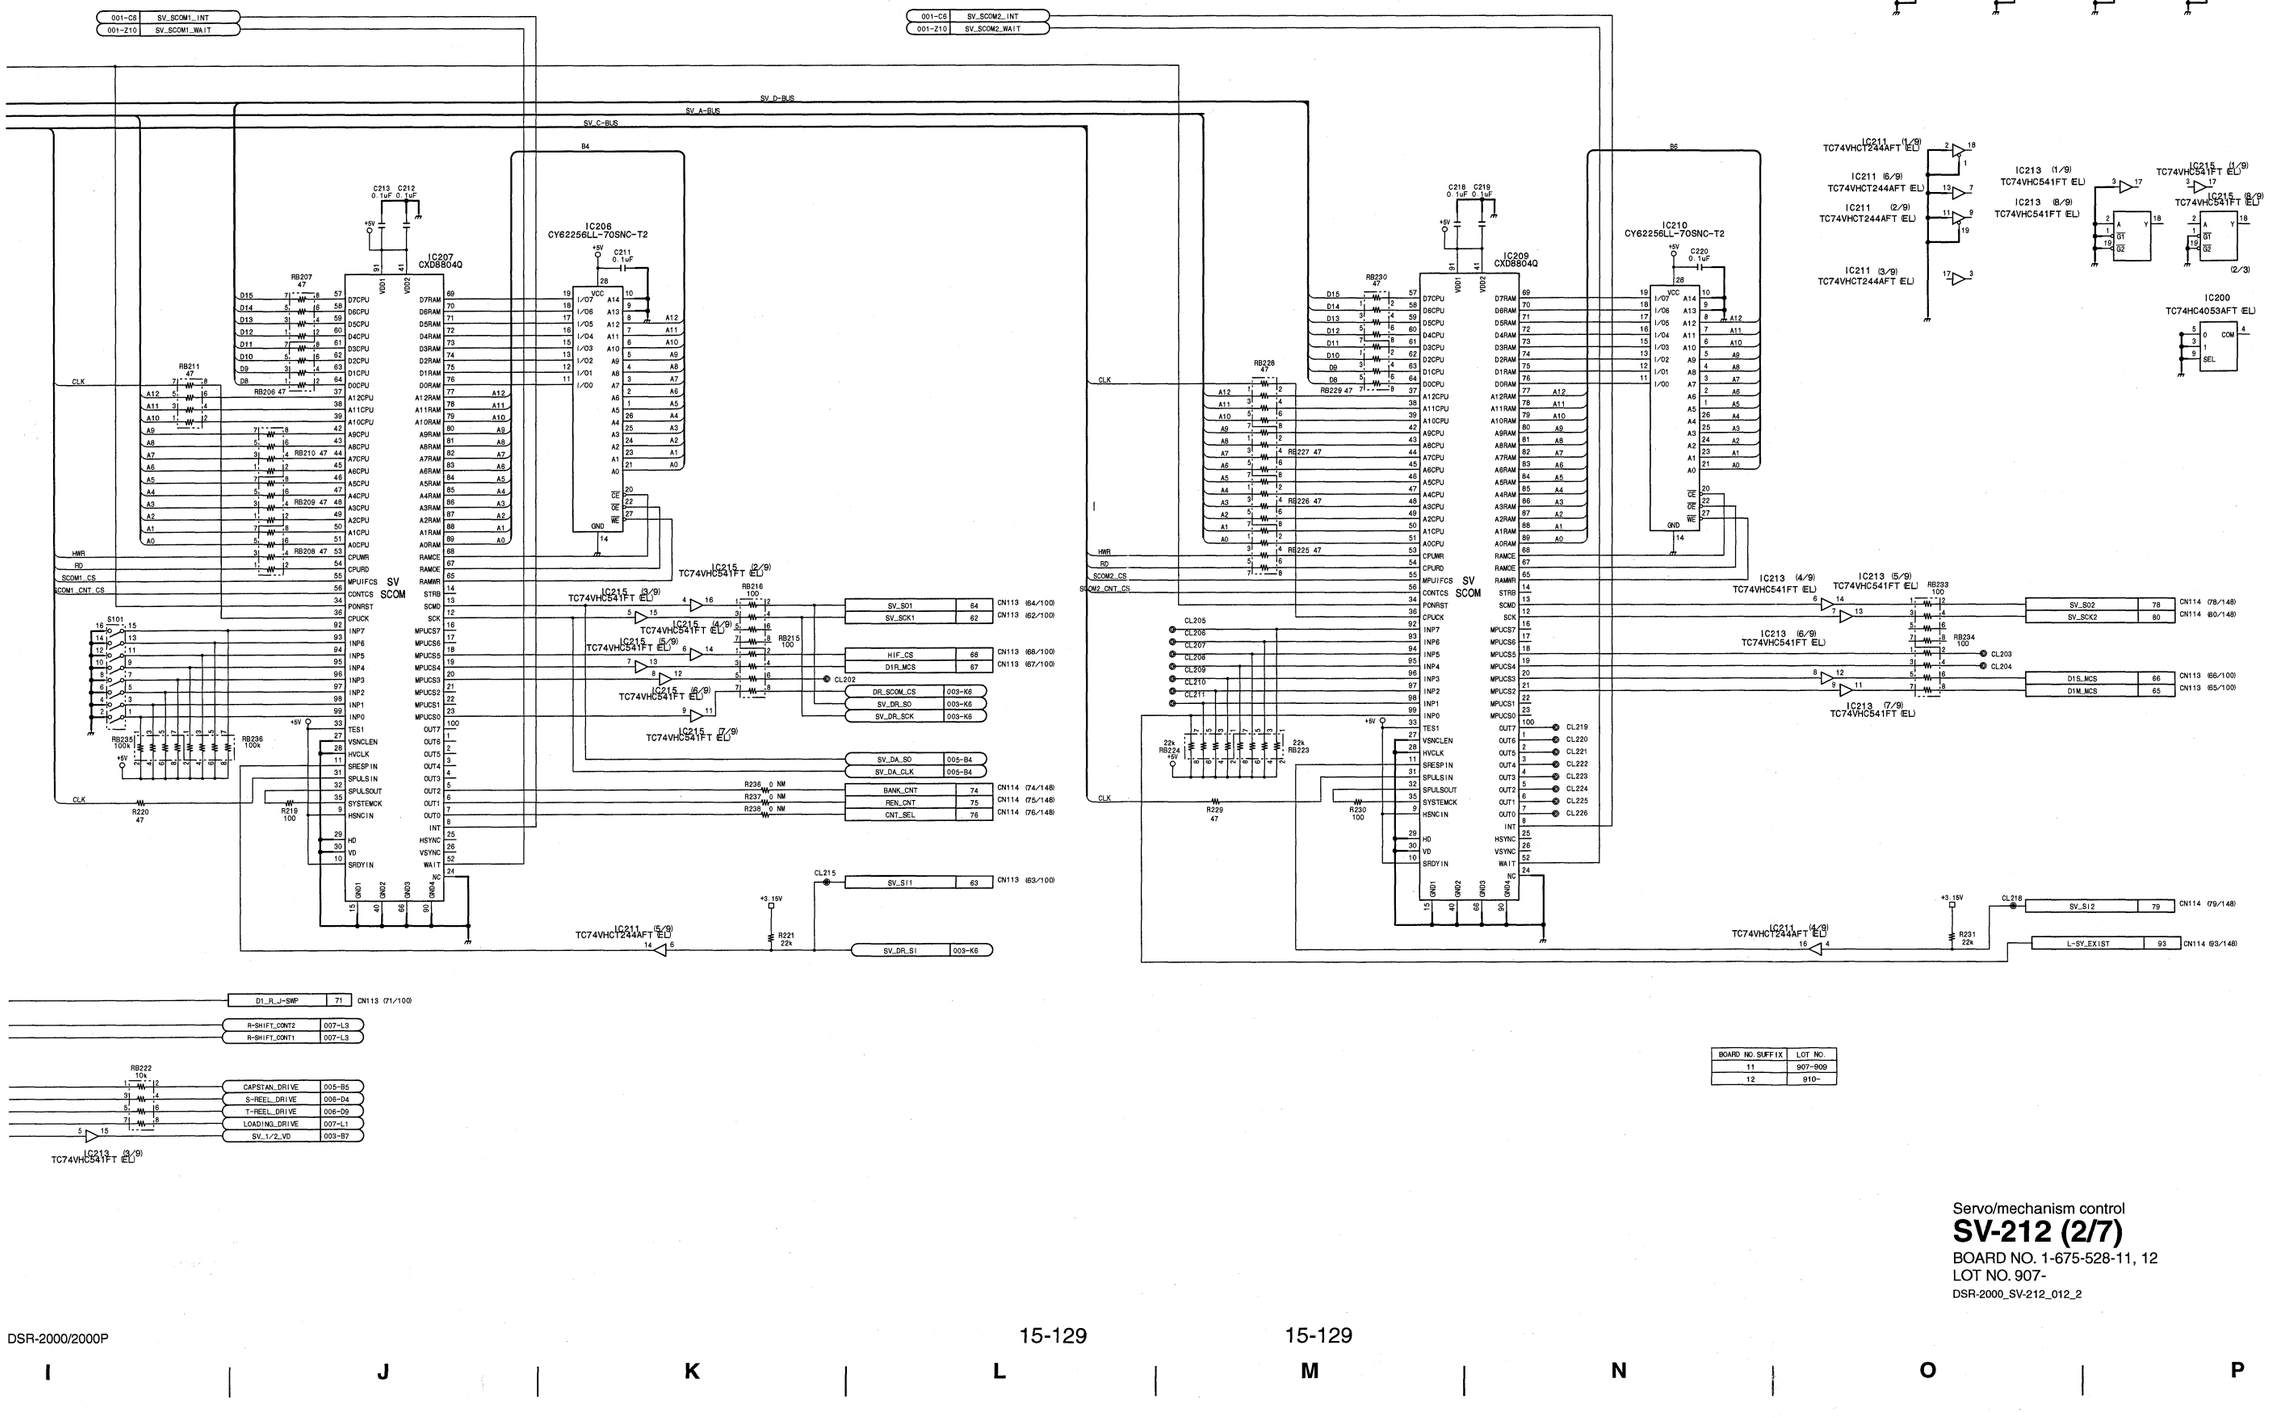

BOARD NO. SUFFIX	LOT NO.
11	907-909
12	910-

Servo/mechanism control

SV-212 (2/7)

BOARD NO. 1-675-528-11, 12
LOT NO. 907-
DSR-2000_SV-212_012_2

SV-212 (3/7)

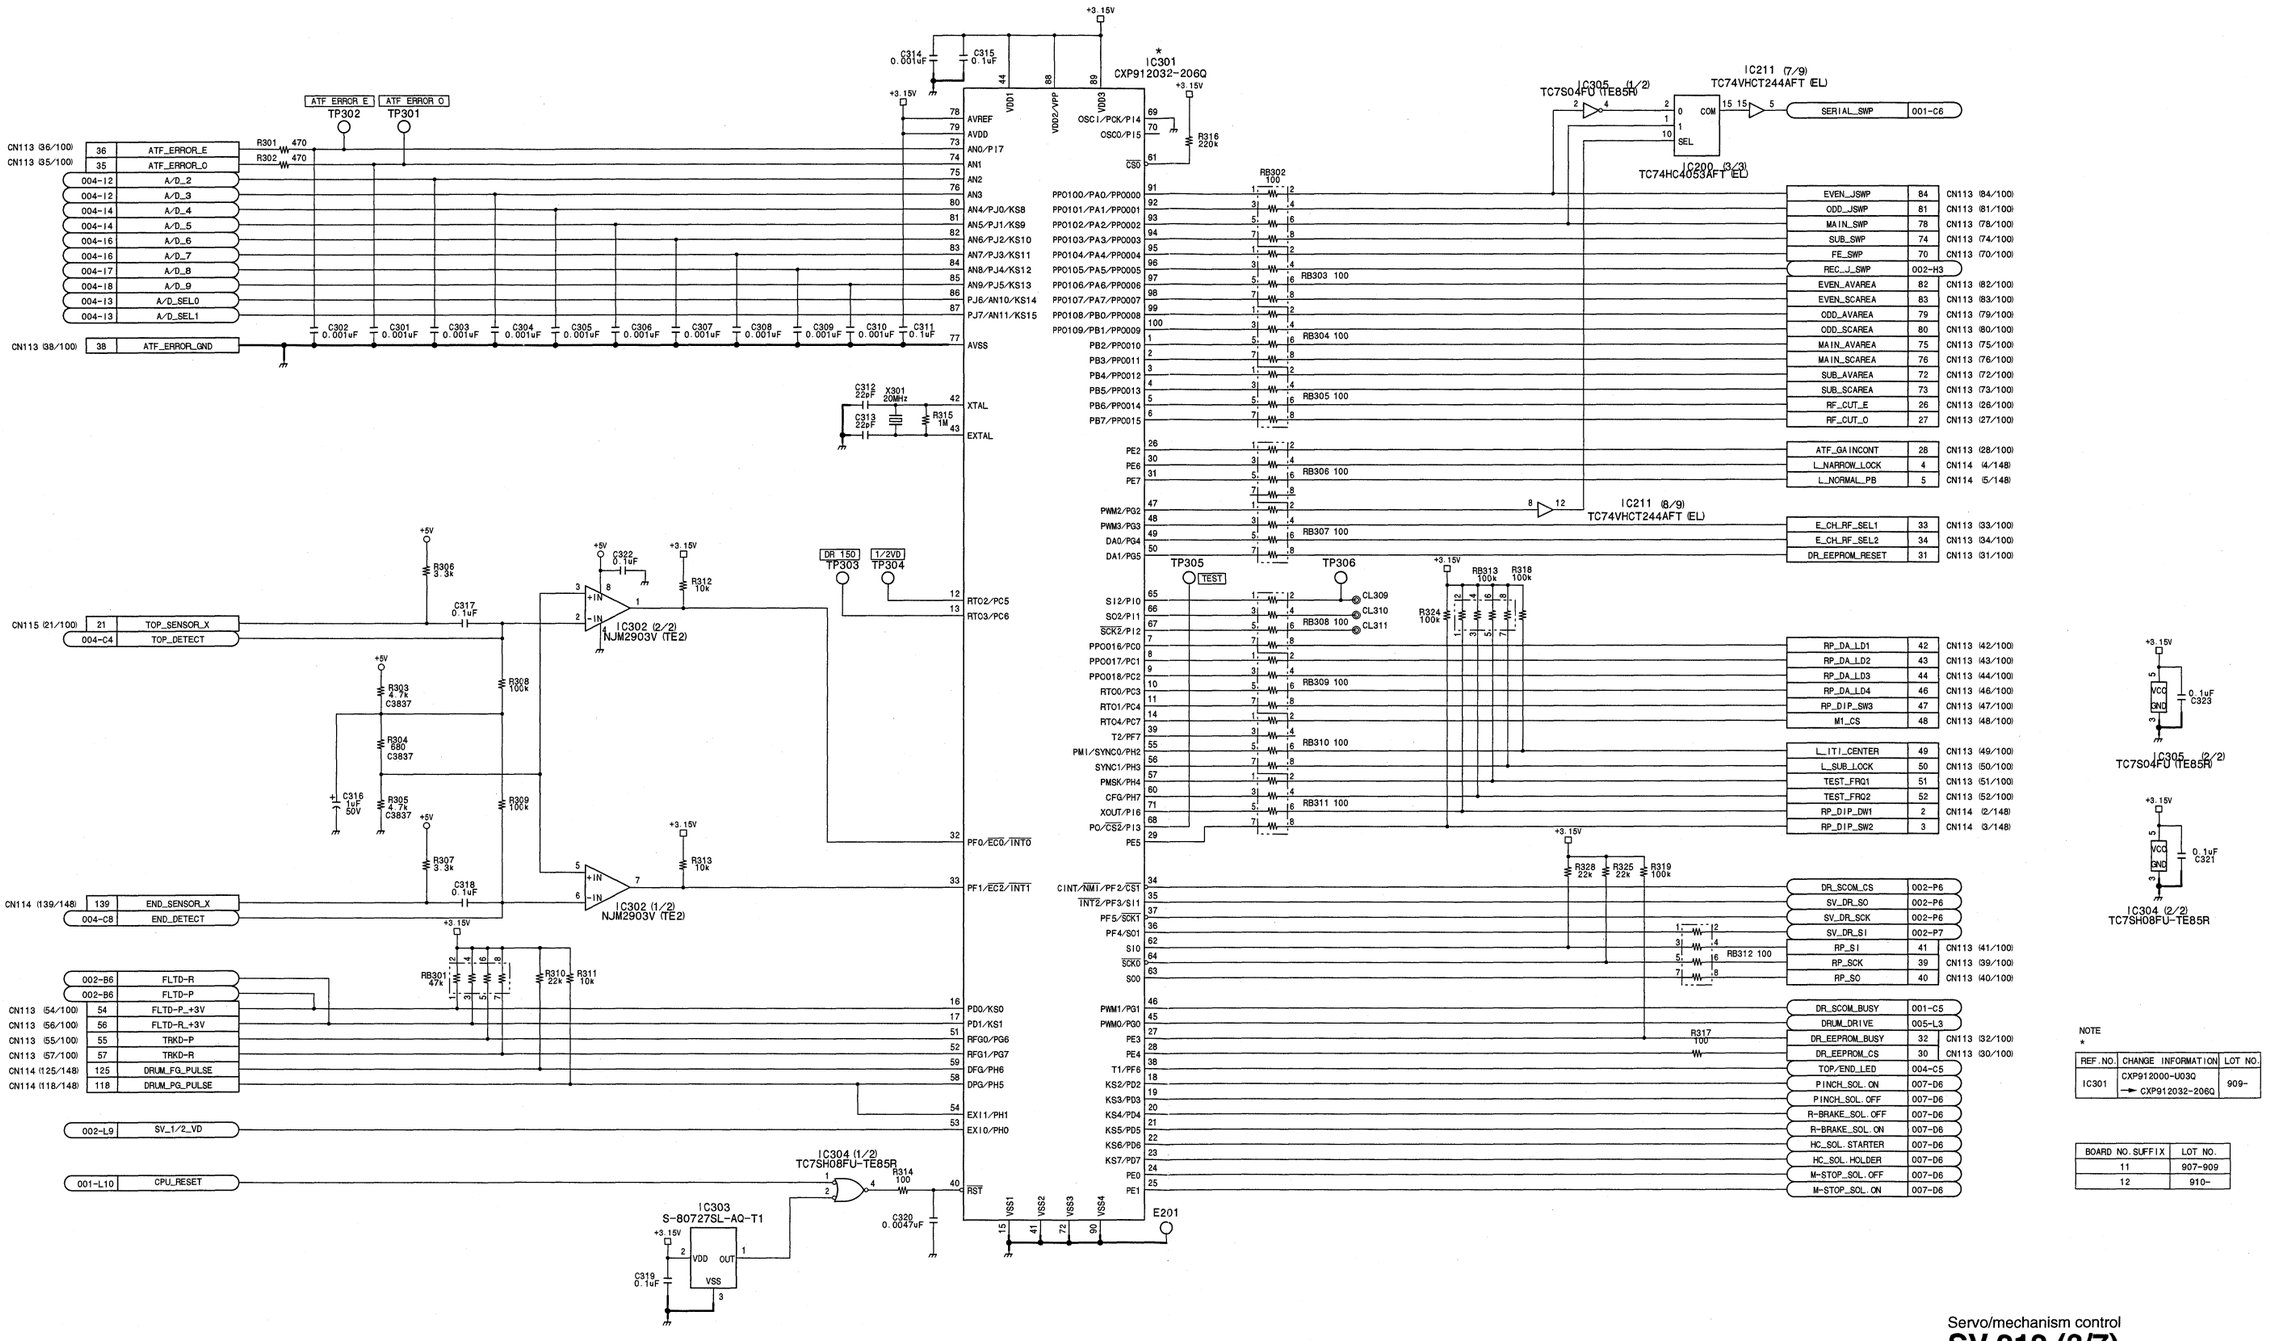

NOTE
*

REF.NO.	CHANGE INFORMATION	LOT NO.
IC301	CXP912000-U03Q → CXP912032-206Q	909-

BOARD NO. SUFFIX	LOT NO.
11	907-909
12	910-

Servo/mechanism control

SV-212 (3/7)

BOARD NO. 1-675-528-11, 12
LOT NO. 907-
DSR-2000_SV-212_012_3

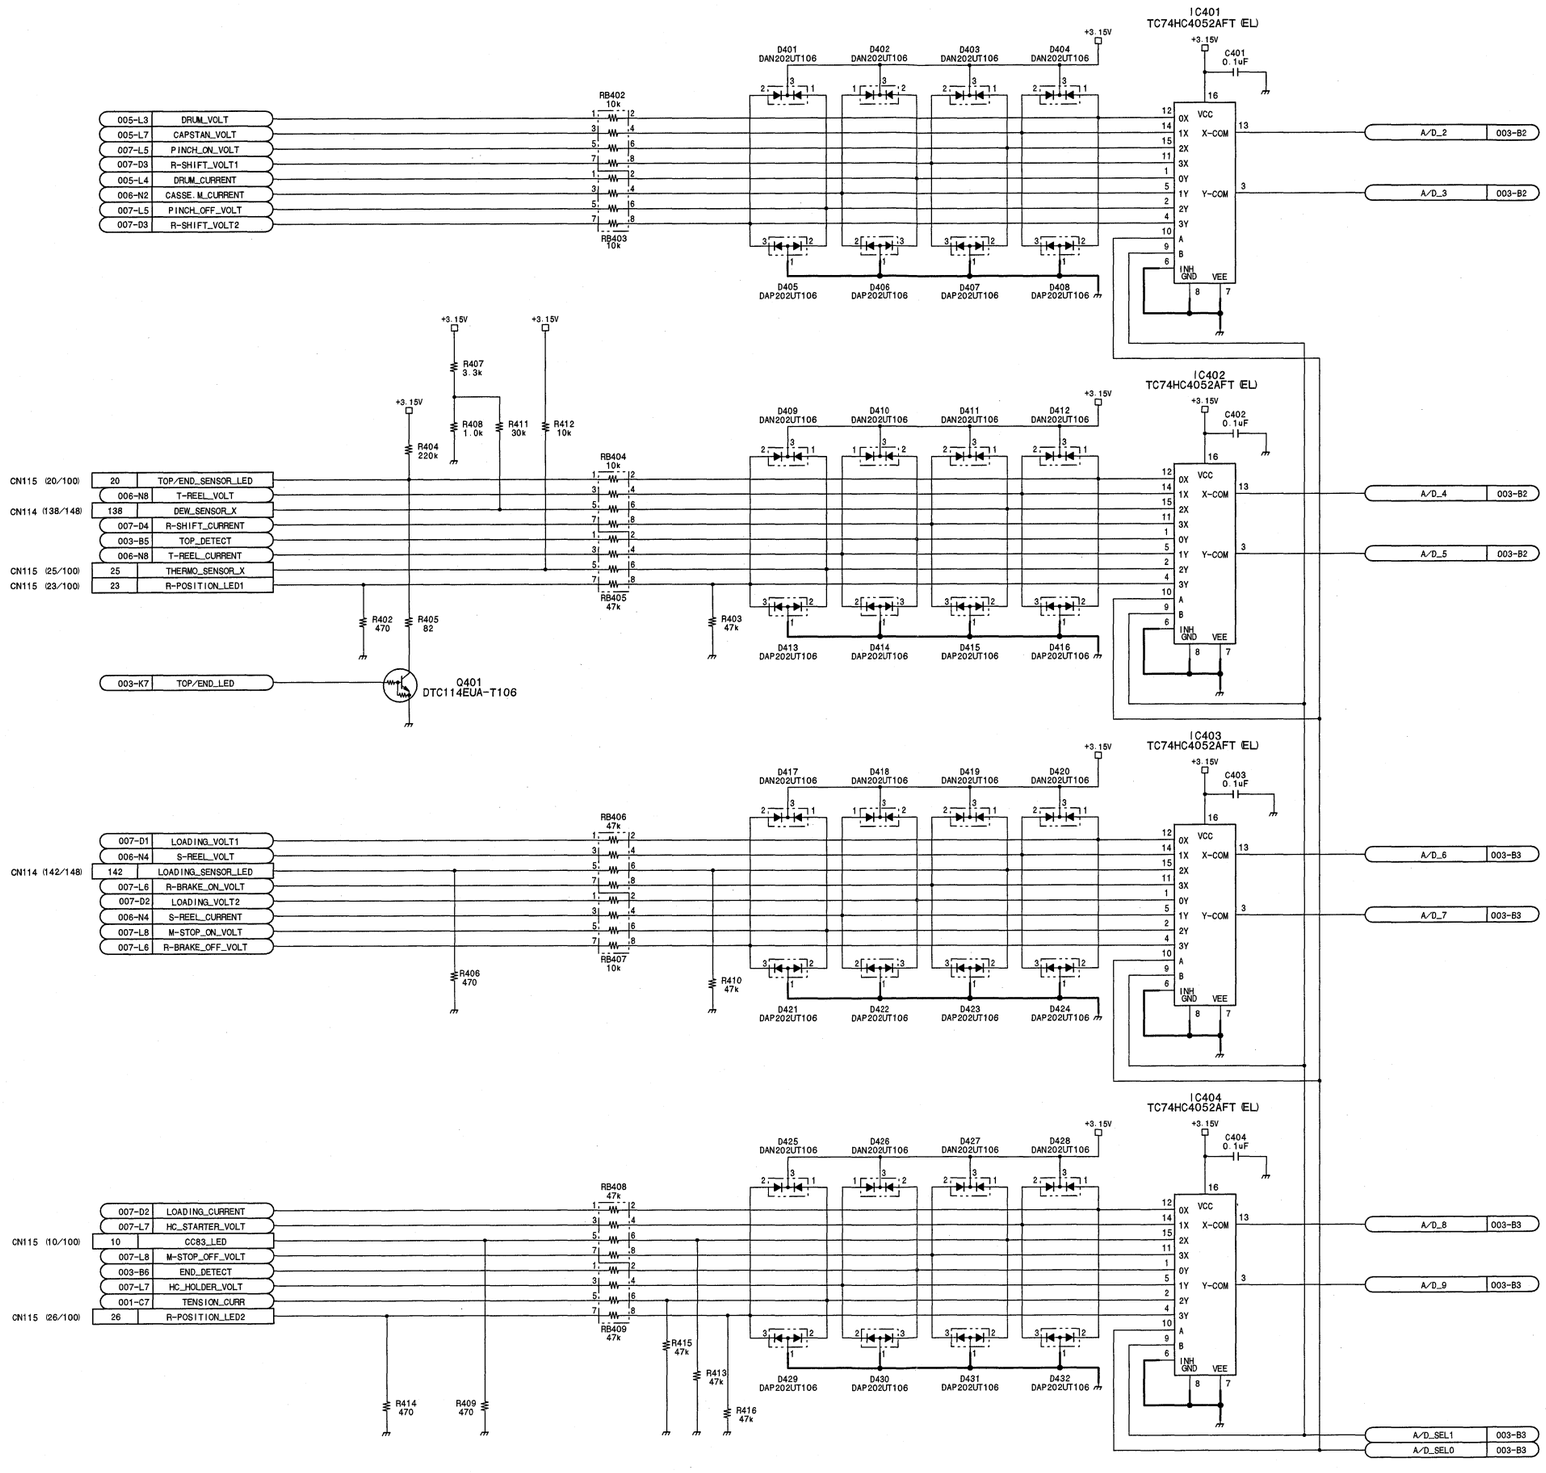

BOARD NO. SUFFIX	LOT NO.
11	907-909
12	910-

Servo/mechanism control

SV-212 (4/7)

BOARD NO. 1-675-528-11, 12

LOT NO. 907-

DSR-2000_SV-212_012_4

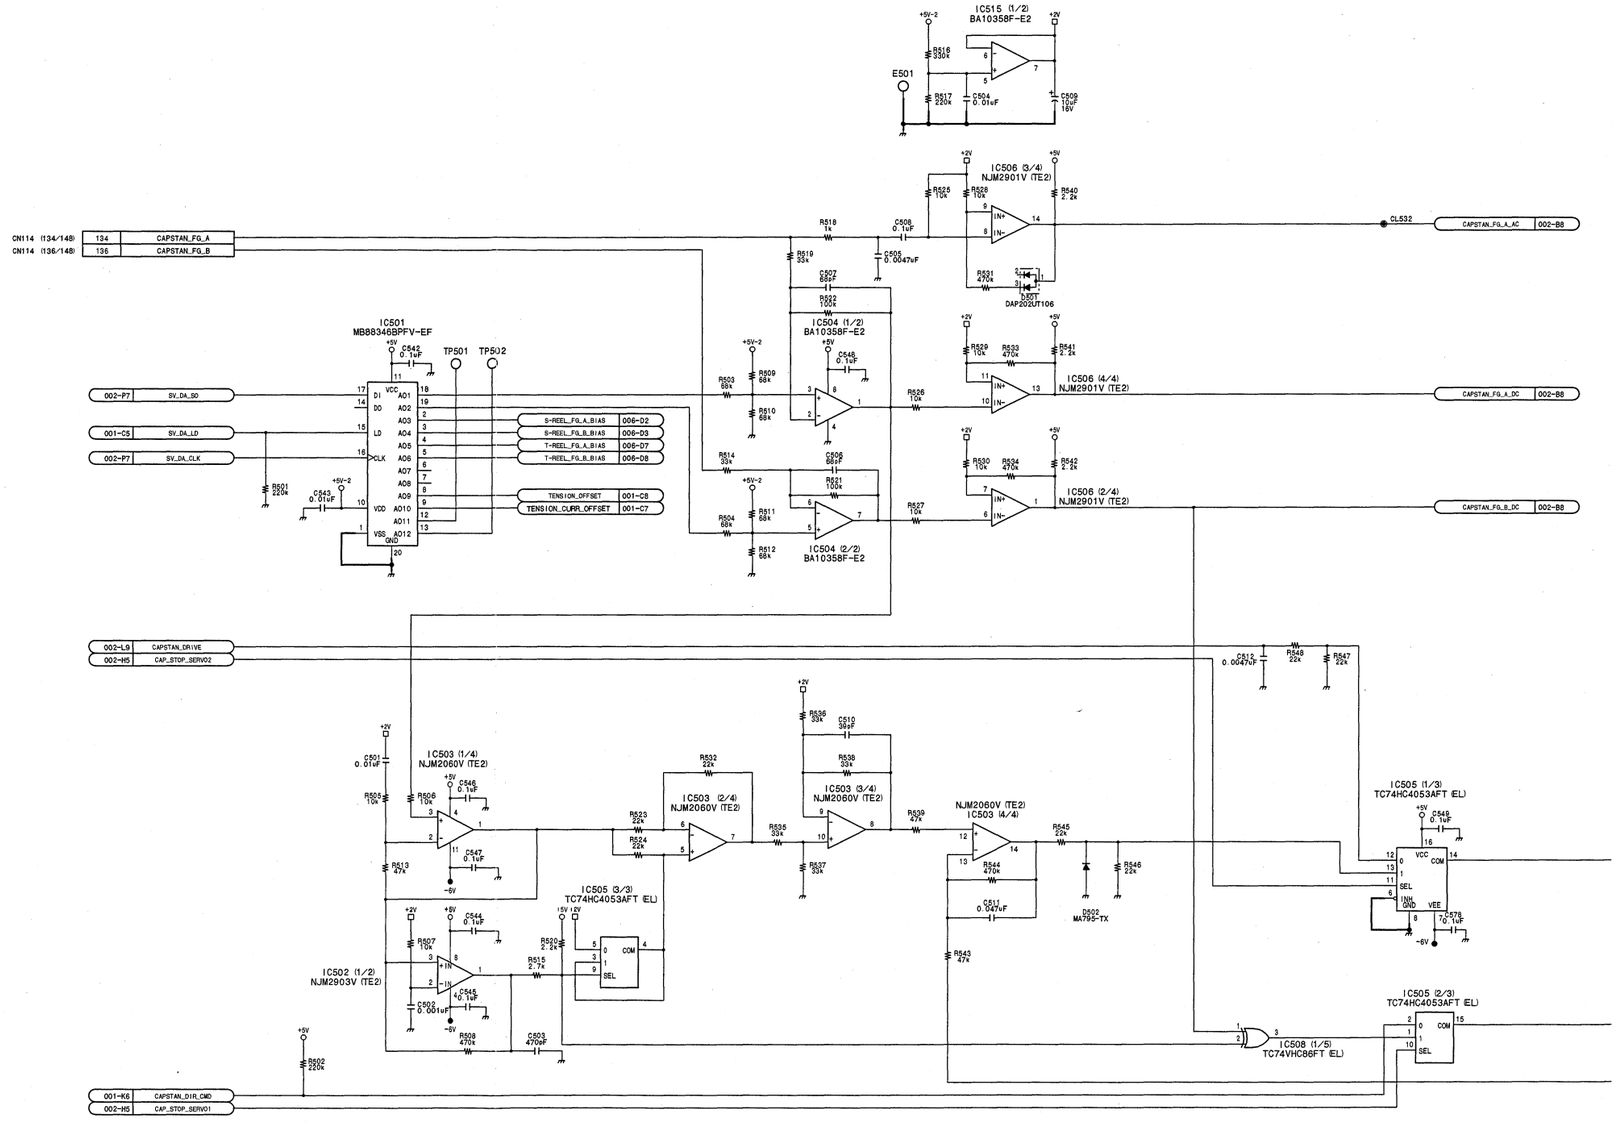
IC515 (1/2)
BA10358F-E2
E501
IC506 (3/4)
NJM2901V (TE2)
IC506 (4/4)
NJM2901V (TE2)
IC506 (2/4)
NJM2901V (TE2)
IC501
MB88346BPFV-EF
TP501
TP502
IC504 (1/2)
BA10358F-E2
IC504 (2/2)
BA10358F-E2
IC503 (1/4)
NJM2060V (TE2)
IC503 (2/4)
NJM2060V (TE2)
IC503 (3/4)
NJM2060V (TE2)
IC503 (4/4)
NJM2060V (TE2)
IC505 (3/3)
TC74HC4053AFT (EL)
IC505 (1/3)
TC74HC4053AFT (EL)
IC505 (2/3)
TC74HC4053AFT (EL)
IC502 (1/2)
NJM2903V (TE2)
IC508 (1/5)
TC74VHC86FT (EL)
D501
DAP202UT106
D502
MA795-TX
CN114 (134/148)
CN114 (136/148)
CAPSTAN_FG_A
CAPSTAN_FG_B
CL532
CAPSTAN_FG_A_AC
CAPSTAN_FG_A_DC
CAPSTAN_FG_B_DC
002-B8
002-P7
SV_DA_SO
001-C5
SV_DA_LD
002-P7
SV_DA_CLK
S-REEL_FG_A_BIAS
006-D2
S-REEL_FG_B_BIAS
006-D3
T-REEL_FG_A_BIAS
006-D7
T-REEL_FG_B_BIAS
006-D8
TENSION_OFFSET
001-C8
TENSION_CURR_OFFSET
001-C7
002-L9
CAPSTAN_DRIVE
002-H5
CAP_STOP_SERVO2
001-K6
CAPSTAN_DIR_CMD
002-H5
CAP_STOP_SERVO1

SV-212 (5/7)

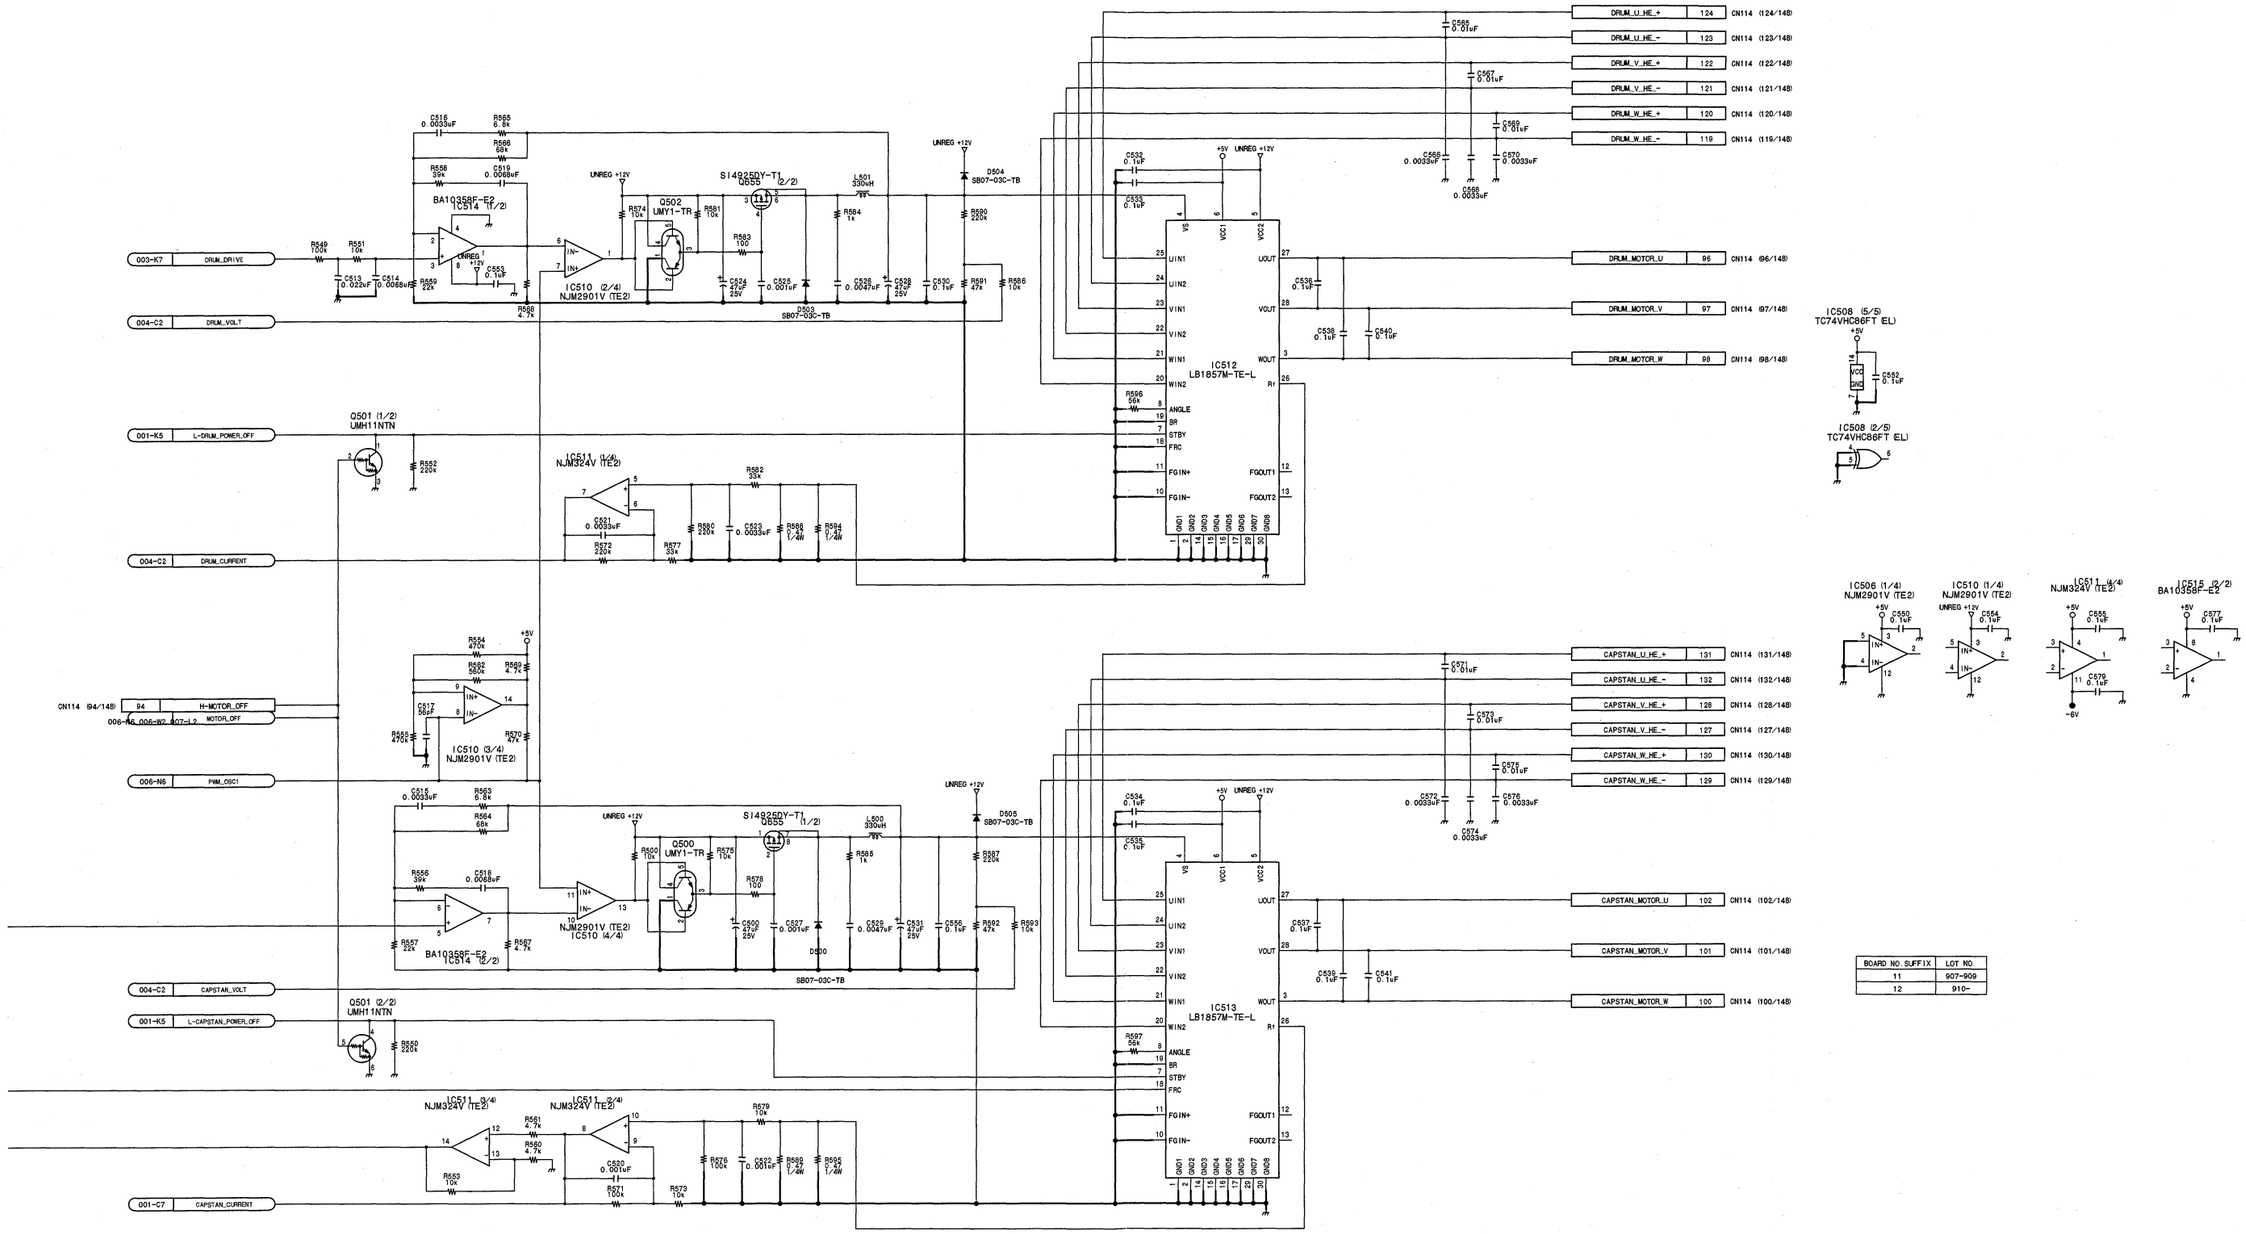

BOARD NO. SUFFIX	LOT NO.
11	907-909
12	910-

Servo/mechanism control

SV-212 (5/7)

BOARD NO. 1-675-528-11, 12
LOT NO. 907-
DSR-2000_SV-212_012_5

SV-212 (6/7)

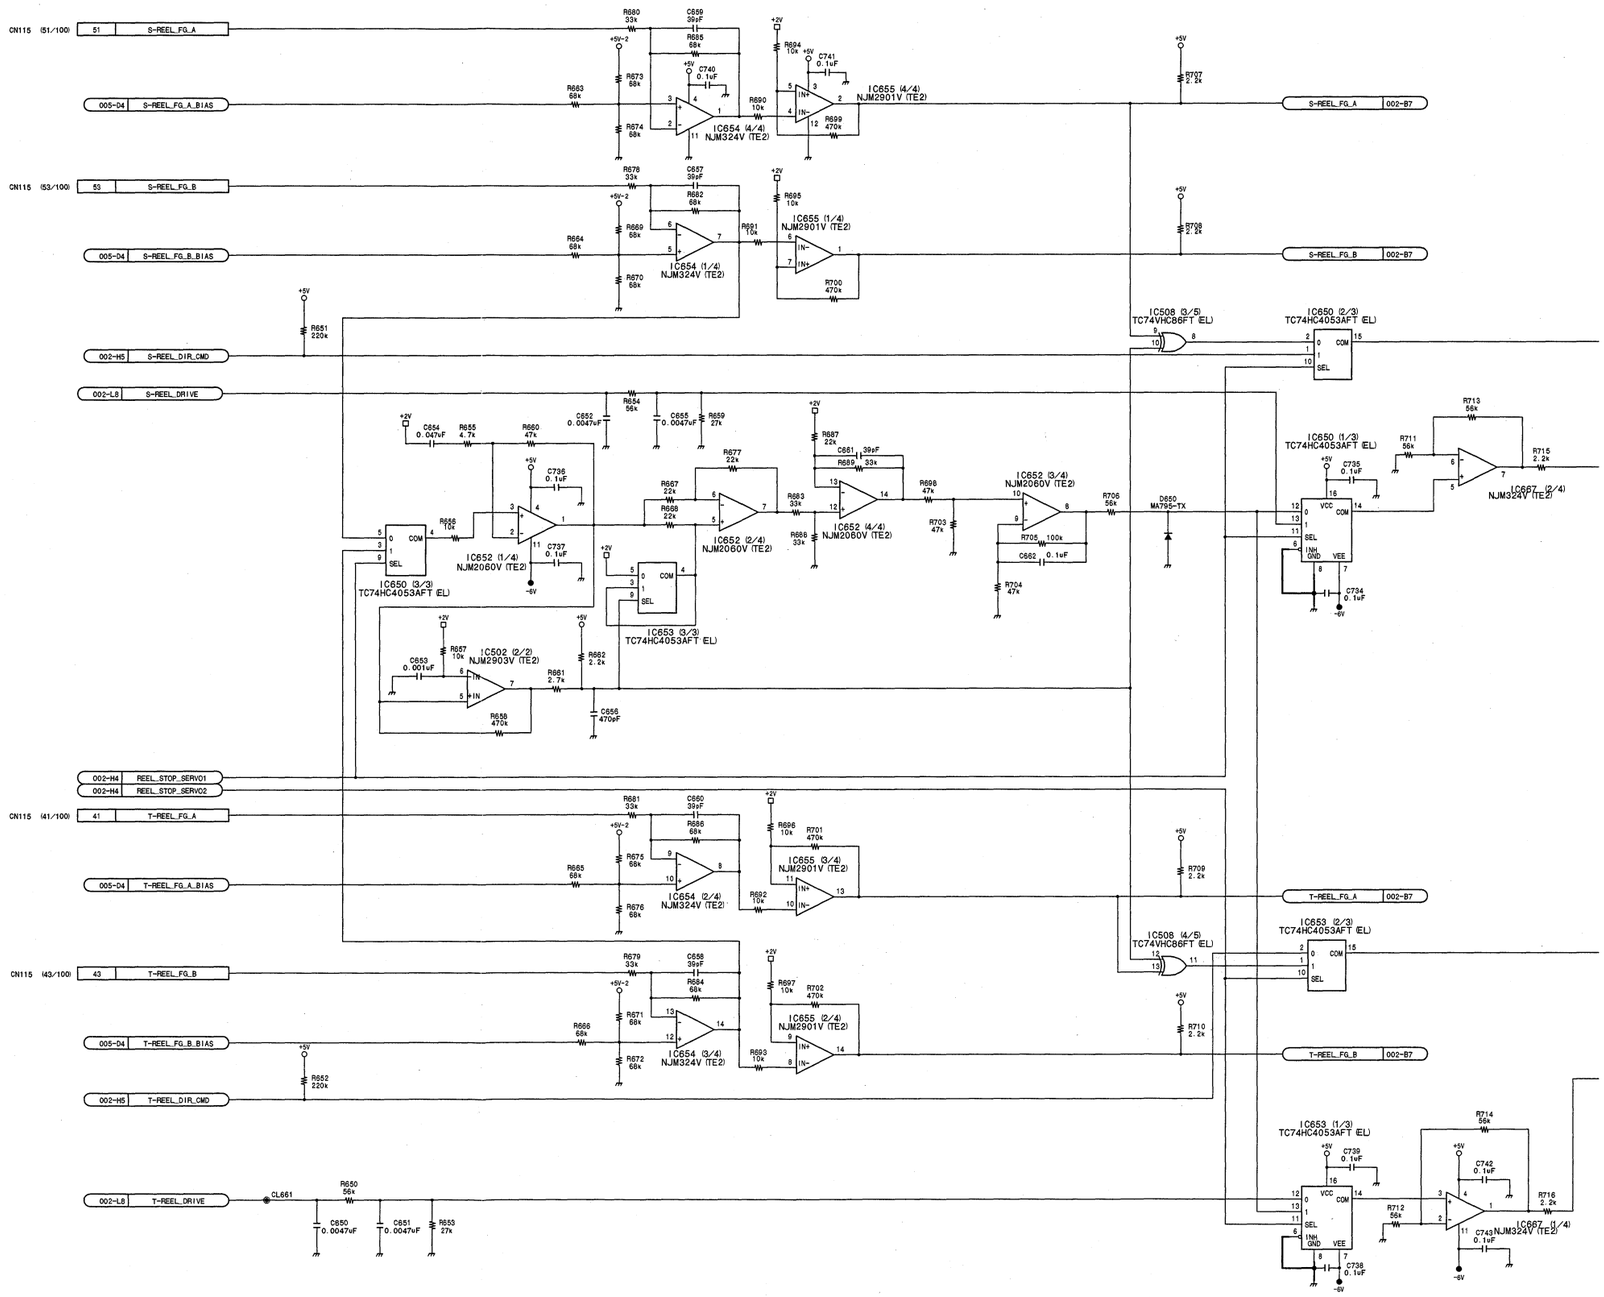

15-134

SV-212 (6/7)

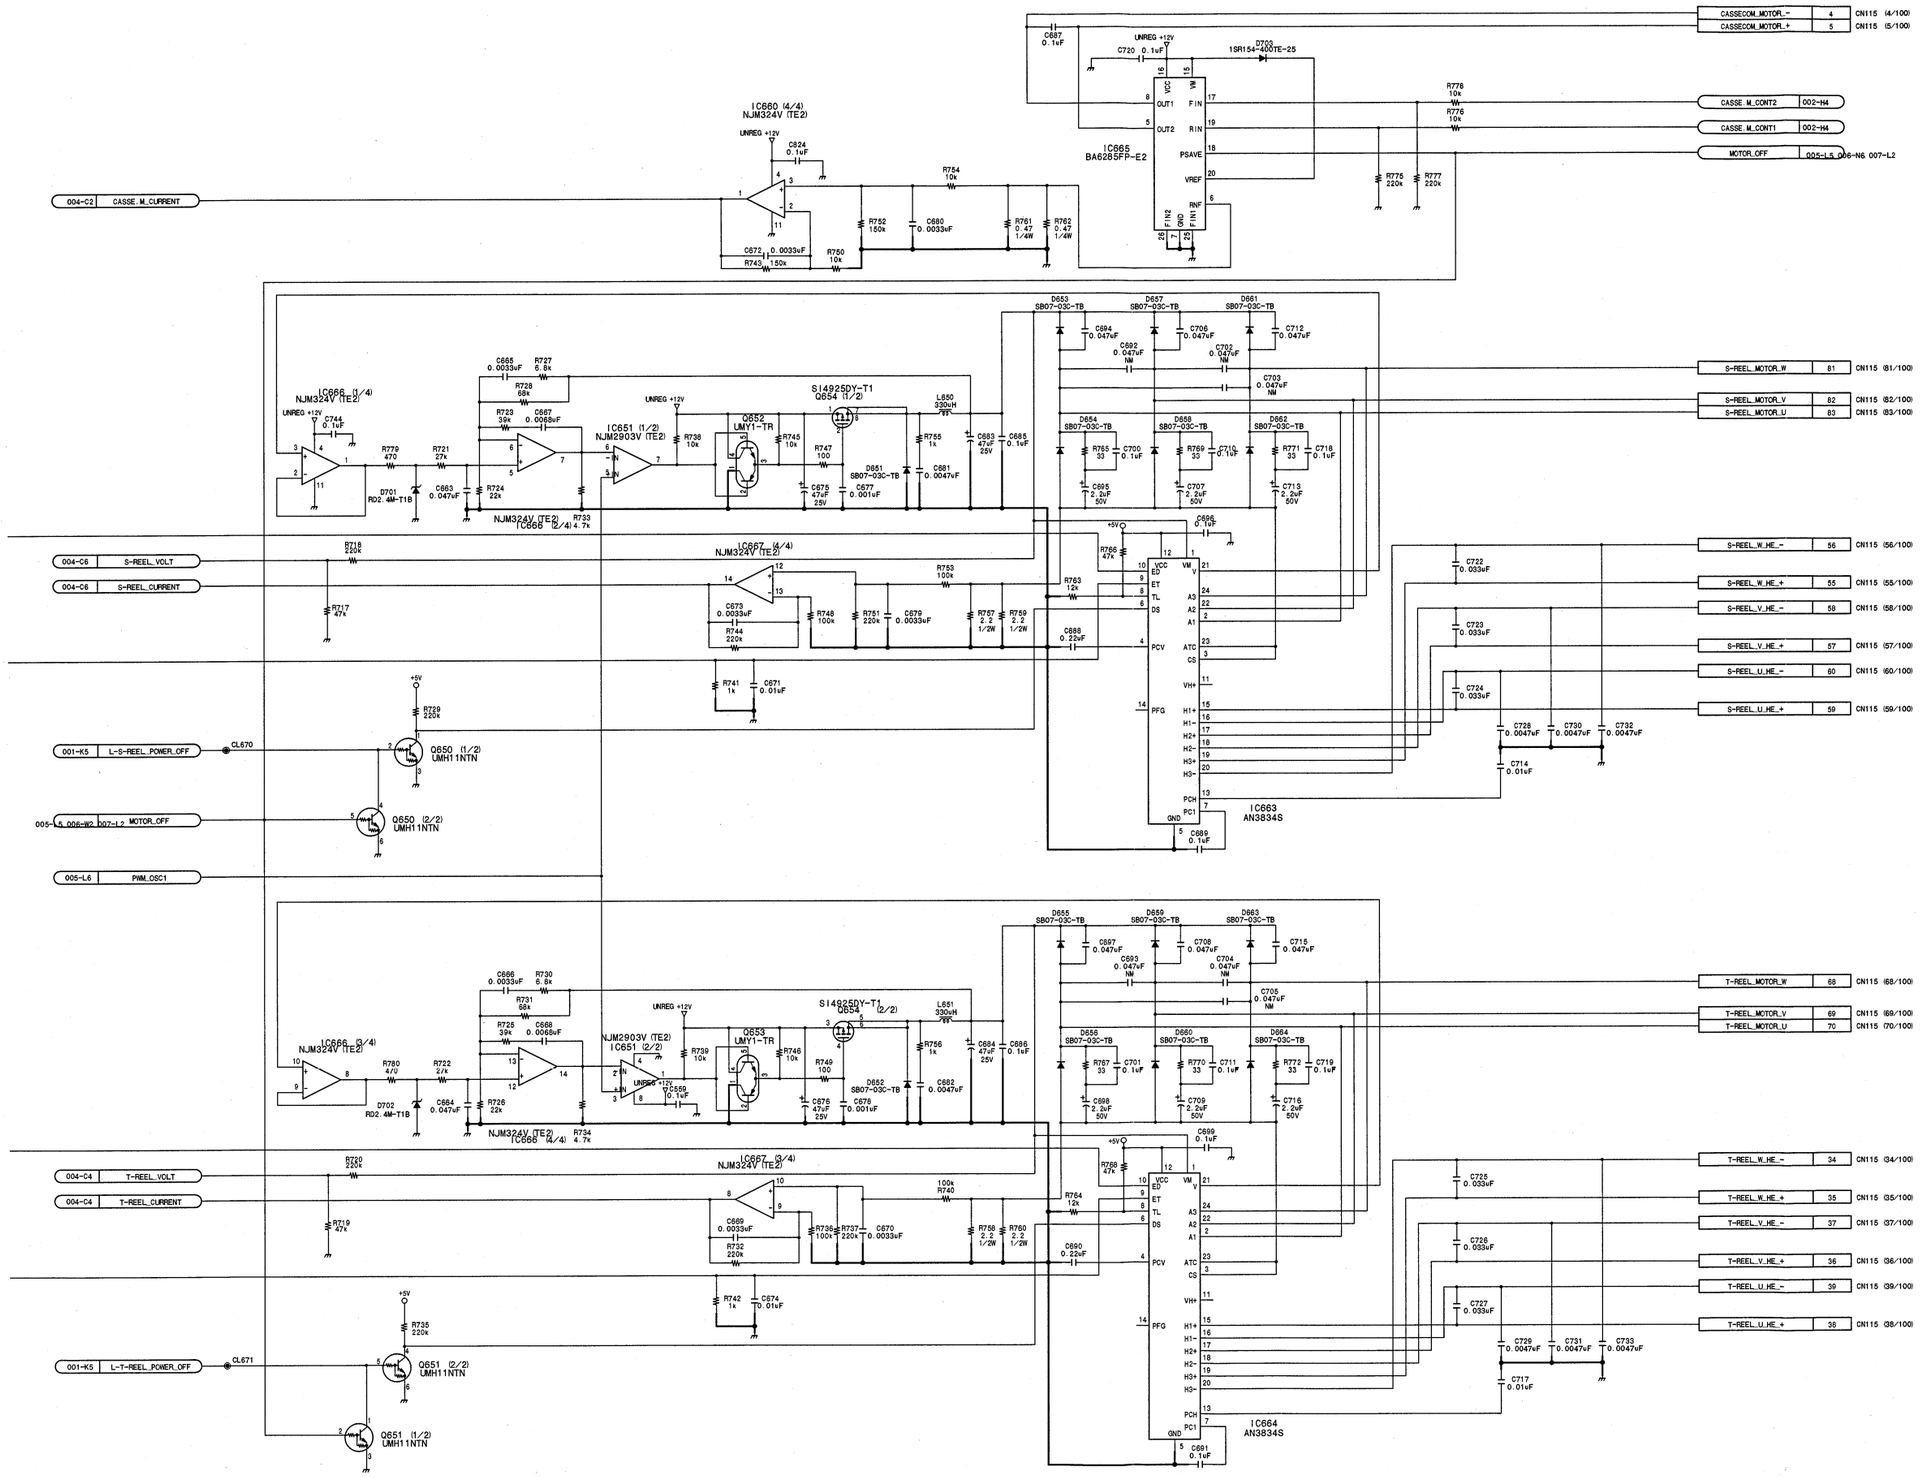

BOARD NO. SUFFIX	LOT NO.
11	907-909
12	910-

Servo/mechanism control

SV-212 (6/7)

BOARD NO. 1-675-528-11, 12
LOT NO. 907-
DSR-2000_SV-212_012_6

SV-212 (7/7)

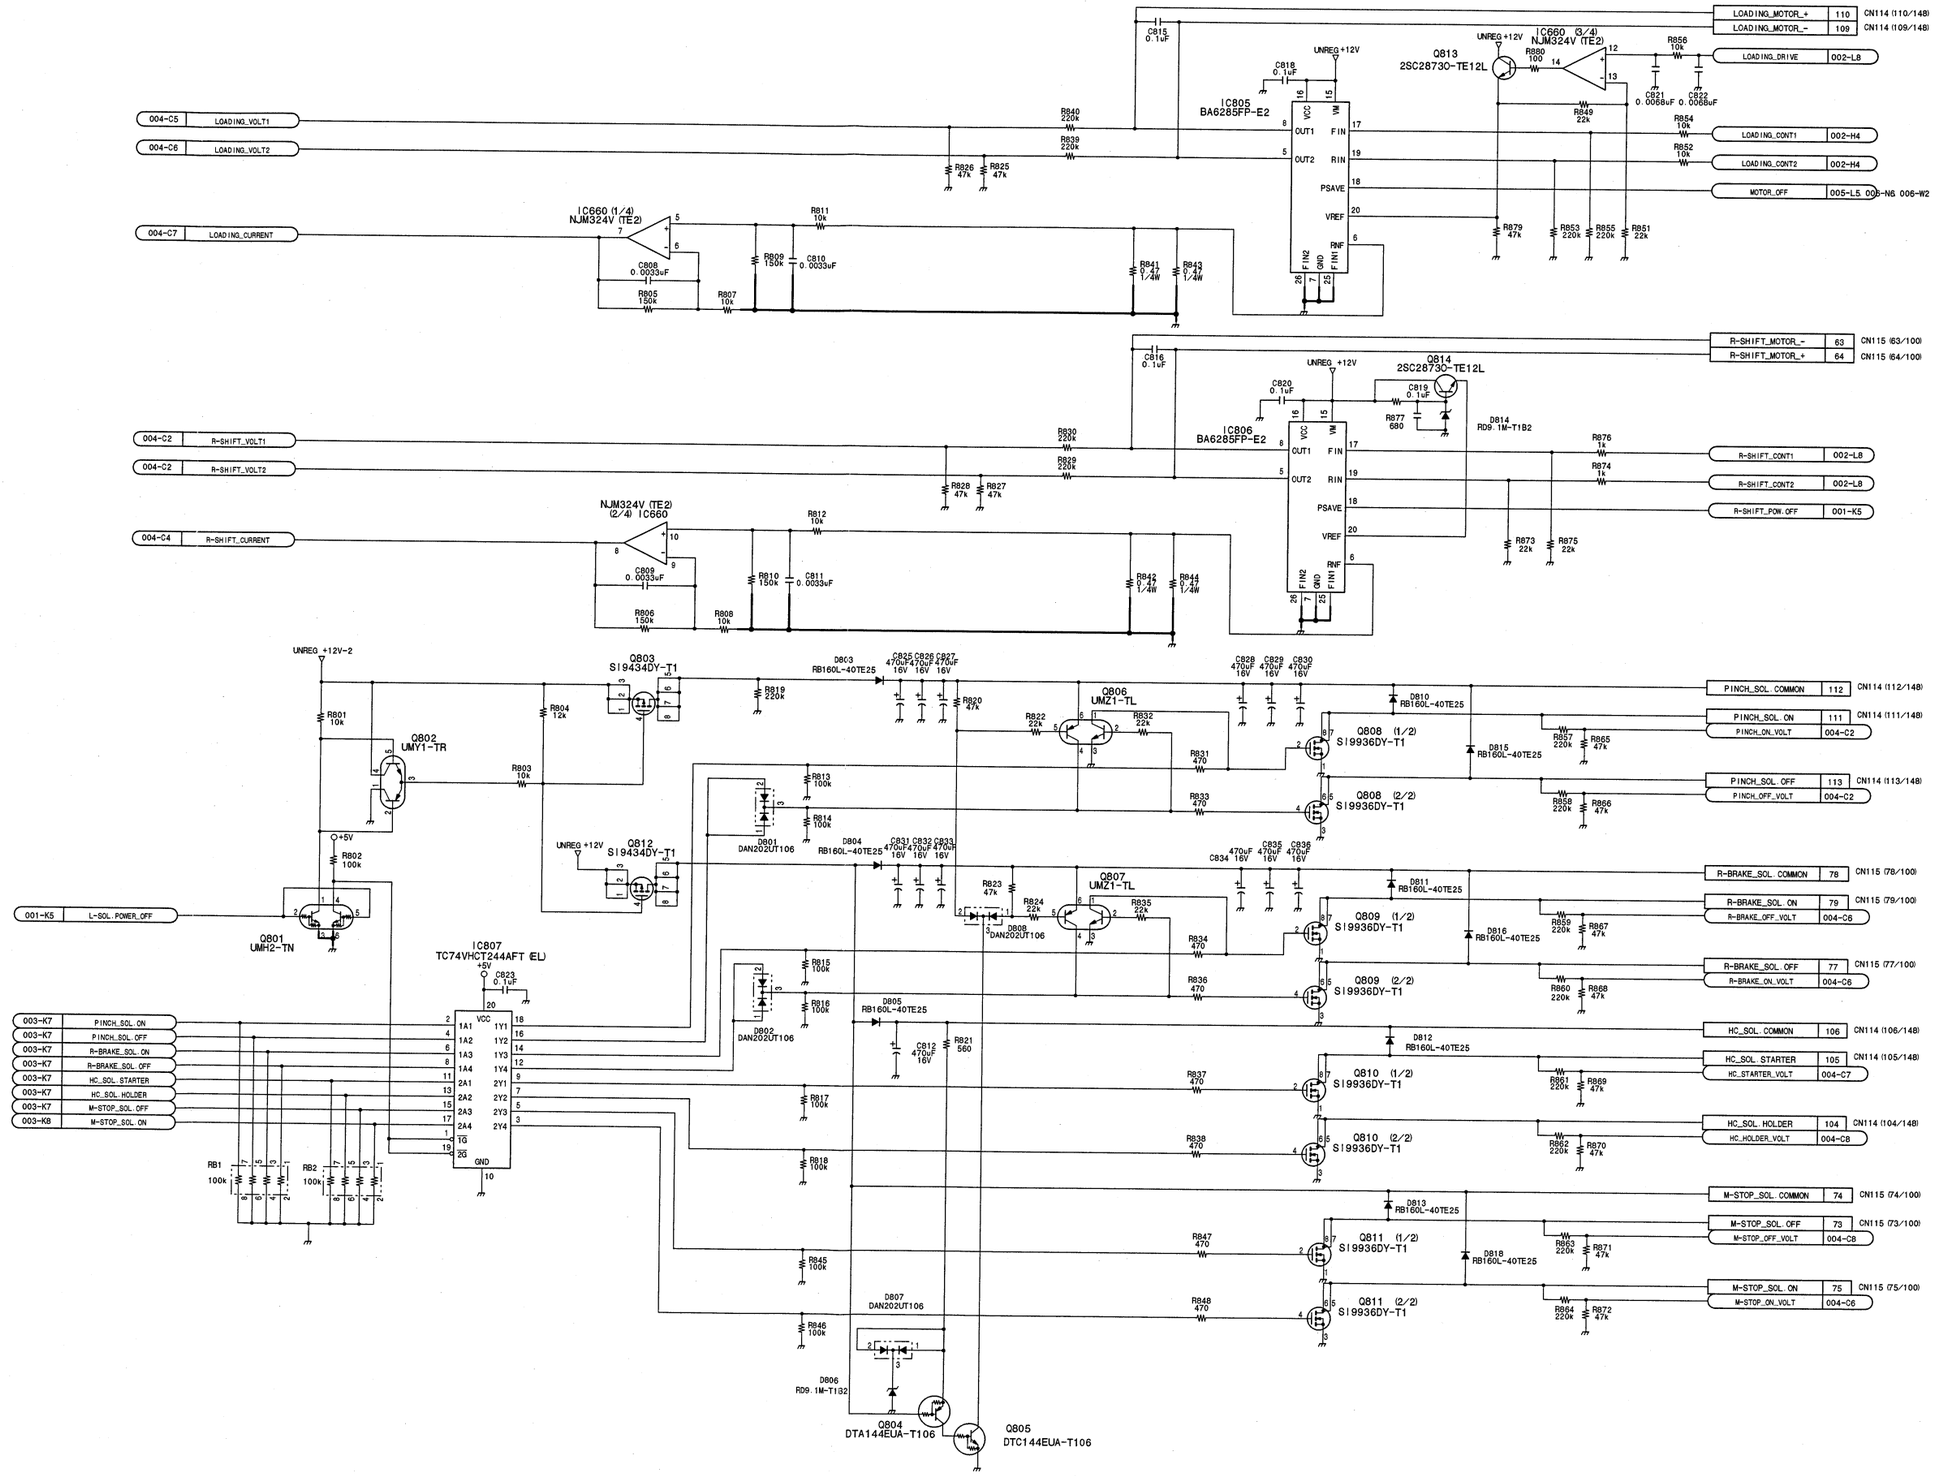

15-136

SV-212 (7/7)

CN113 (4/100)	4	NC
CN113 (5/100)	5	NC
CN113 (7/100)	7	NC
CN113 (8/100)	8	NC
CN113 (11/100)	11	NC
CN113 (12/100)	12	NC
CN113 (14/100)	14	NC
CN113 (15/100)	15	NC
CN113 (16/100)	16	NC
CN113 (17/100)	17	NC
CN113 (18/100)	18	NC
CN113 (19/100)	19	NC
CN113 (20/100)	20	NC
CN113 (22/100)	22	NC
CN113 (23/100)	23	NC
CN113 (24/100)	24	NC
CN113 (25/100)	25	NC
CN113 (61/100)	61	NC

CN114 (6/148)	6	NC
CN114 (7/148)	7	NC
CN114 (8/148)	8	NC
CN114 (10/148)	10	NC
CN114 (11/148)	11	NC
CN114 (12/148)	12	NC
CN114 (13/148)	13	NC
CN114 (14/148)	14	NC
CN114 (15/148)	15	NC
CN114 (16/148)	16	NC
CN114 (18/148)	18	NC
CN114 (19/148)	19	NC
CN114 (20/148)	20	NC
CN114 (52/148)	52	NC
CN114 (88/148)	88	NC
CN114 (92/148)	92	NC

(84/148) CN114	84	NC
(83/148) CN114	83	NC
(82/148) CN114	82	NC
(72/148) CN114	72	NC
(71/148) CN114	71	NC
(70/148) CN114	70	NC
(68/148) CN114	68	NC
(67/148) CN114	67	NC
(66/148) CN114	66	NC
(64/148) CN114	64	NC
(63/148) CN114	63	NC
(62/148) CN114	62	NC
(60/148) CN114	60	NC
(59/148) CN114	59	NC
(58/148) CN114	58	NC
(91/148) CN114	91	NC
(90/148) CN114	90	NC

CN115 (84/100)	84	NC
CN115 (46/100)	46	M1C_VCC
CN115 (47/100)	47	M1C_SDA
CN115 (48/100)	48	M1C_GND
CN115 (49/100)	49	M1C_SCK

CL801

CN113 (69/100)	69	OP_SPARE
CN113 (1/100)	1	GND
CN113 (2/100)	2	GND
CN113 (9/100)	9	GND
CN113 (13/100)	13	GND
CN113 (21/100)	21	GND
CN113 (29/100)	29	GND
CN113 (37/100)	37	GND
CN113 (45/100)	45	GND
CN113 (53/100)	53	GND
CN113 (77/100)	77	GND
CN114 (1/148)	1	GND
CN114 (9/148)	9	GND
CN114 (17/148)	17	GND
CN114 (21/148)	21	GND
CN114 (25/148)	25	GND
CN114 (29/148)	29	GND
CN114 (33/148)	33	GND
CN114 (37/148)	37	GND
CN114 (41/148)	41	GND
CN114 (45/148)	45	GND
CN114 (49/148)	49	GND
CN114 (53/148)	53	GND
CN114 (57/148)	57	GND
CN114 (61/148)	61	GND
CN114 (65/148)	65	GND
CN114 (69/148)	69	GND
CN114 (73/148)	73	GND
CN114 (77/148)	77	GND
CN114 (81/148)	81	GND
CN114 (85/148)	85	GND
CN114 (89/148)	89	GND
CN114 (148/148)	148	GND
CN115 (1/100)	1	GND
CN114 (95/148)	95	GND_SV
CN114 (99/148)	99	GND_SV
CN114 (103/148)	103	GND_SV
CN114 (107/148)	107	GND_SV
CN114 (114/148)	114	GND_SV
CN114 (116/148)	116	GND_SV
CN114 (117/148)	117	GND_SV
CN114 (126/148)	126	GND_SV
CN114 (133/148)	133	GND_SV
CN114 (135/148)	135	GND_SV
CN114 (137/148)	137	GND_SV
CN115 (3/100)	3	GND_SV
CN115 (19/100)	19	GND_SV
CN115 (40/100)	40	GND_SV
CN115 (42/100)	42	GND_SV
CN115 (44/100)	44	GND_SV
CN115 (50/100)	50	GND_SV
CN115 (52/100)	52	GND_SV
CN115 (54/100)	54	GND_SV
CN115 (61/100)	61	GND_SV
CN115 (62/100)	62	GND_SV
CN115 (67/100)	67	GND_SV
CN115 (71/100)	71	GND_SV
CN115 (72/100)	72	GND_SV
CN115 (76/100)	76	GND_SV
CN115 (80/100)	80	GND_SV
CN115 (85/100)	85	+3.15V_GND
CN115 (86/100)	86	+3.15V_GND
CN115 (87/100)	87	+3.15V_GND
CN115 (88/100)	88	+3.15V_GND

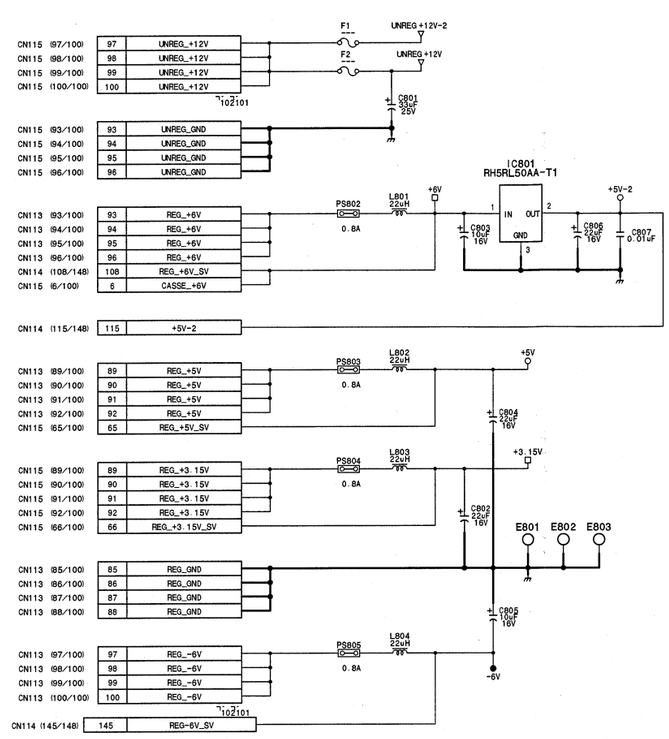

BOARD NO. SUFFIX	LOT NO.
11	907-909
12	910-

Servo/mechanism control

SV-212 (7/7)

BOARD NO. 1-675-528-11, 12
LOT NO. 907-
DSR-2000_SV-212_012_7

SW-11/11P (1/3)

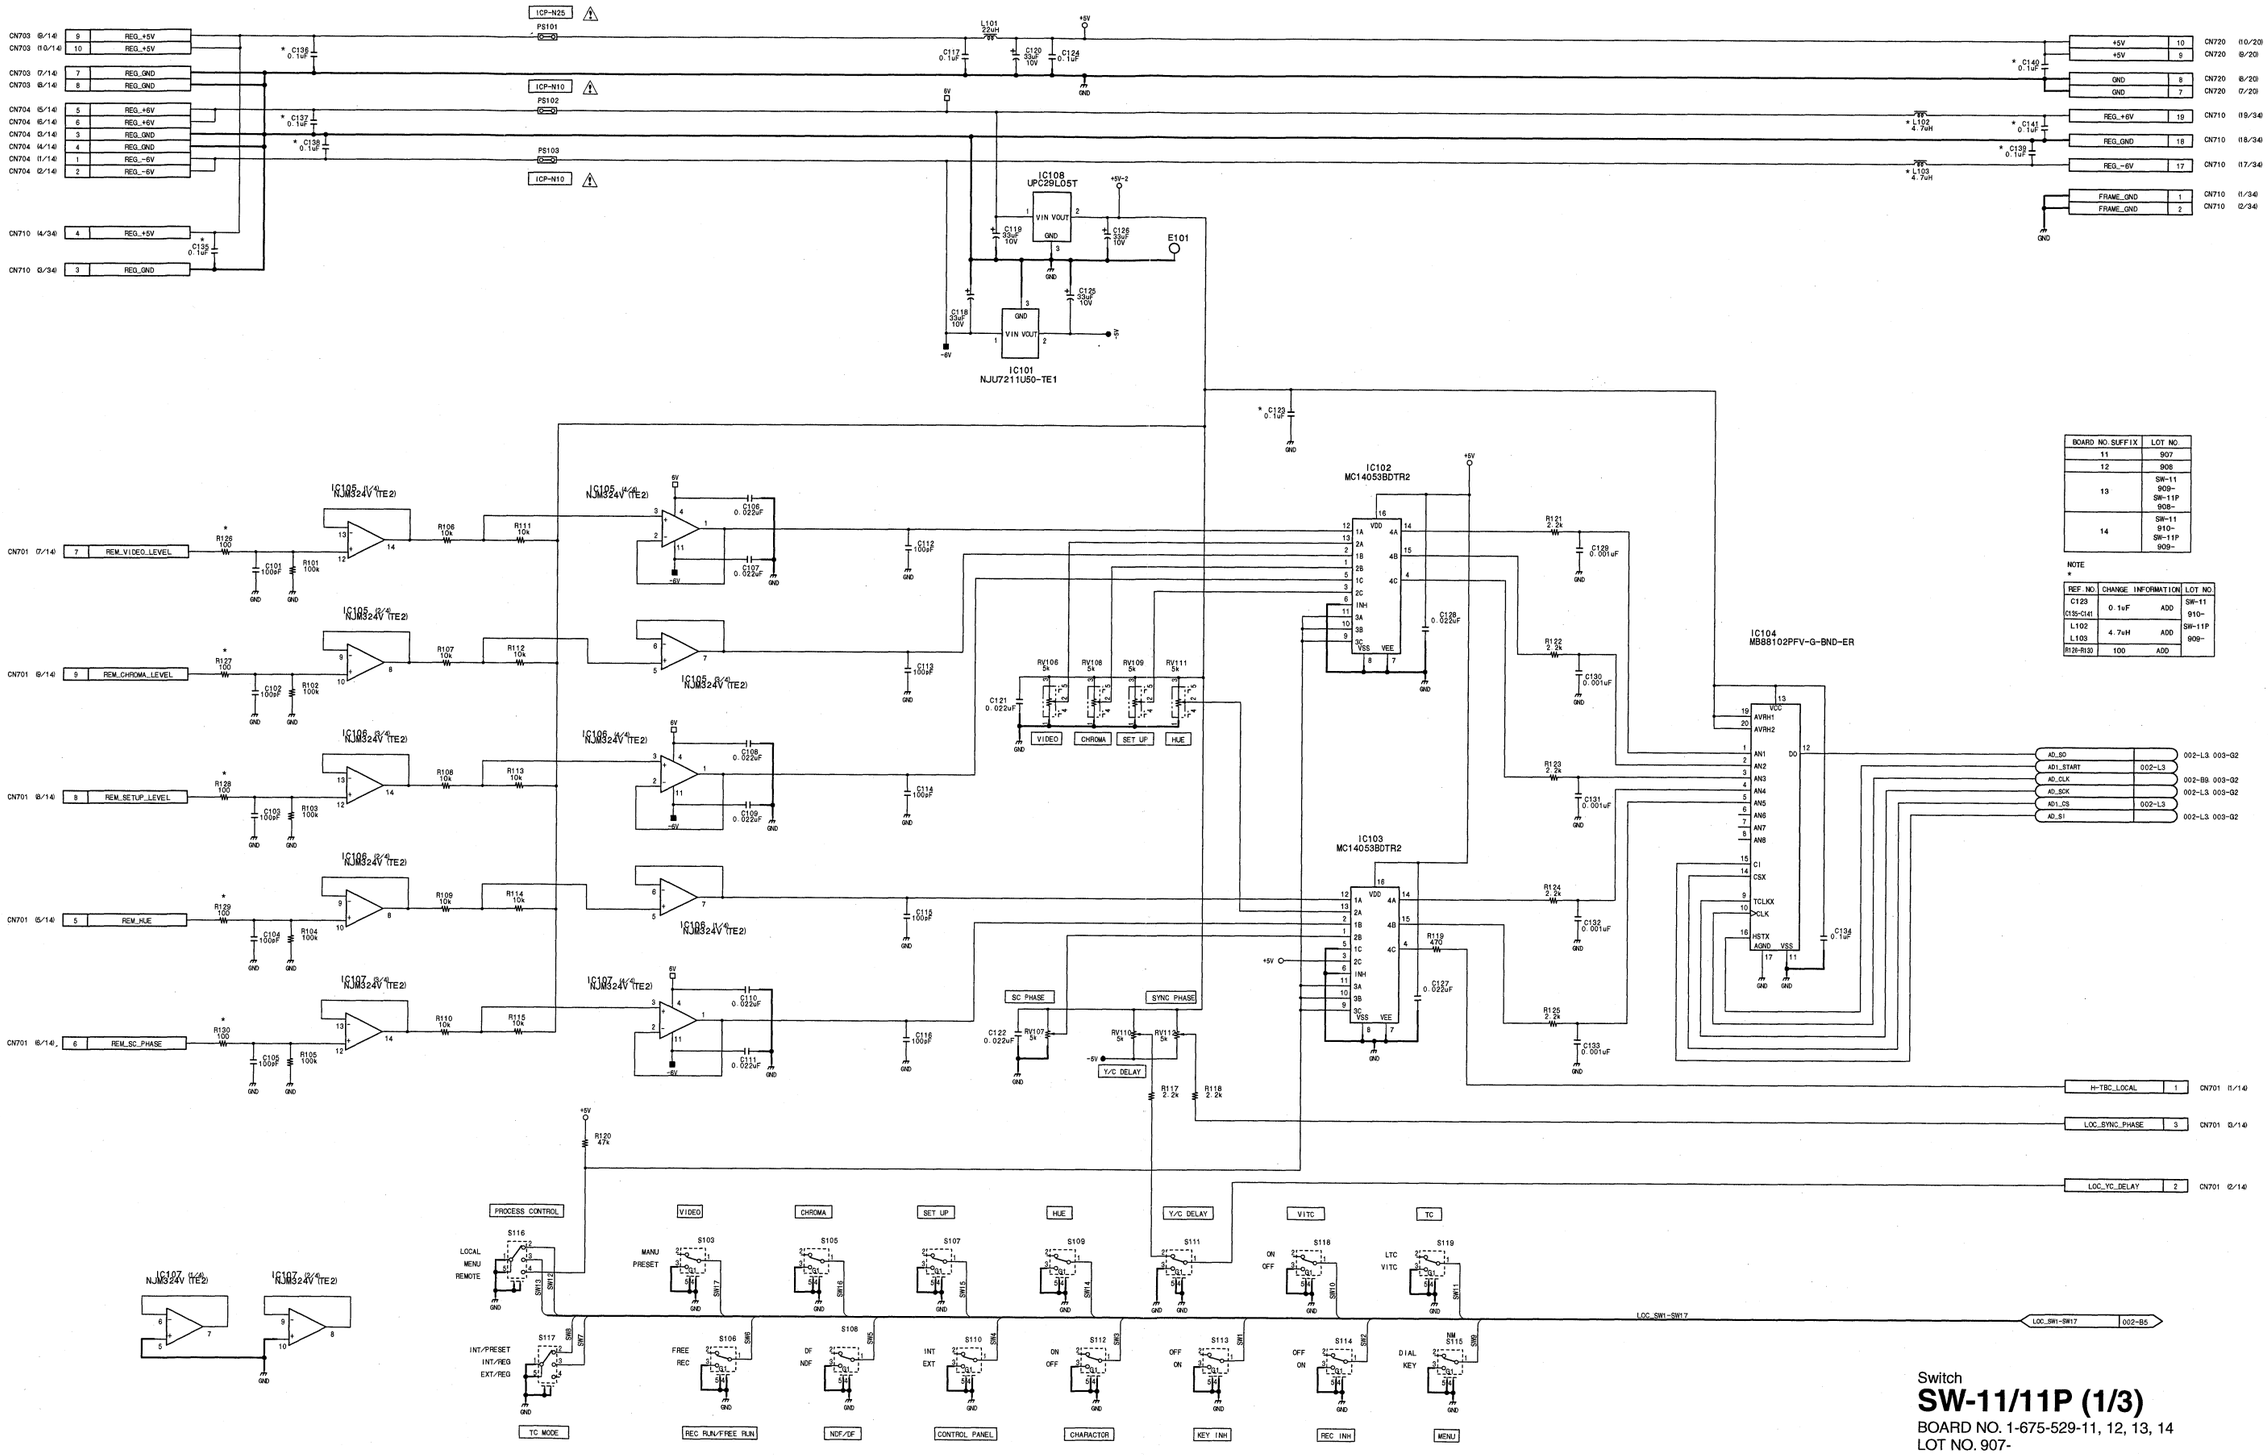

BOARD NO. SUFFIX	LOT NO.
11	907
12	908
13	SW-11 909- SW-11P 908-
14	SW-11 910- SW-11P 909-

NOTE

*

REF. NO.	CHANGE INFORMATION		LOT NO.
C123 C135-C141	0.1uF	ADD	SW-11 910- SW-11P 909-
L102 L103	4.7uH	ADD	
R126-R130	100	ADD	

Switch

SW-11/11P (1/3)

BOARD NO. 1-675-529-11, 12, 13, 14

LOT NO. 907-

DSR-2000_SW-11_014_1

15-138

SW-11/11P (2/3)

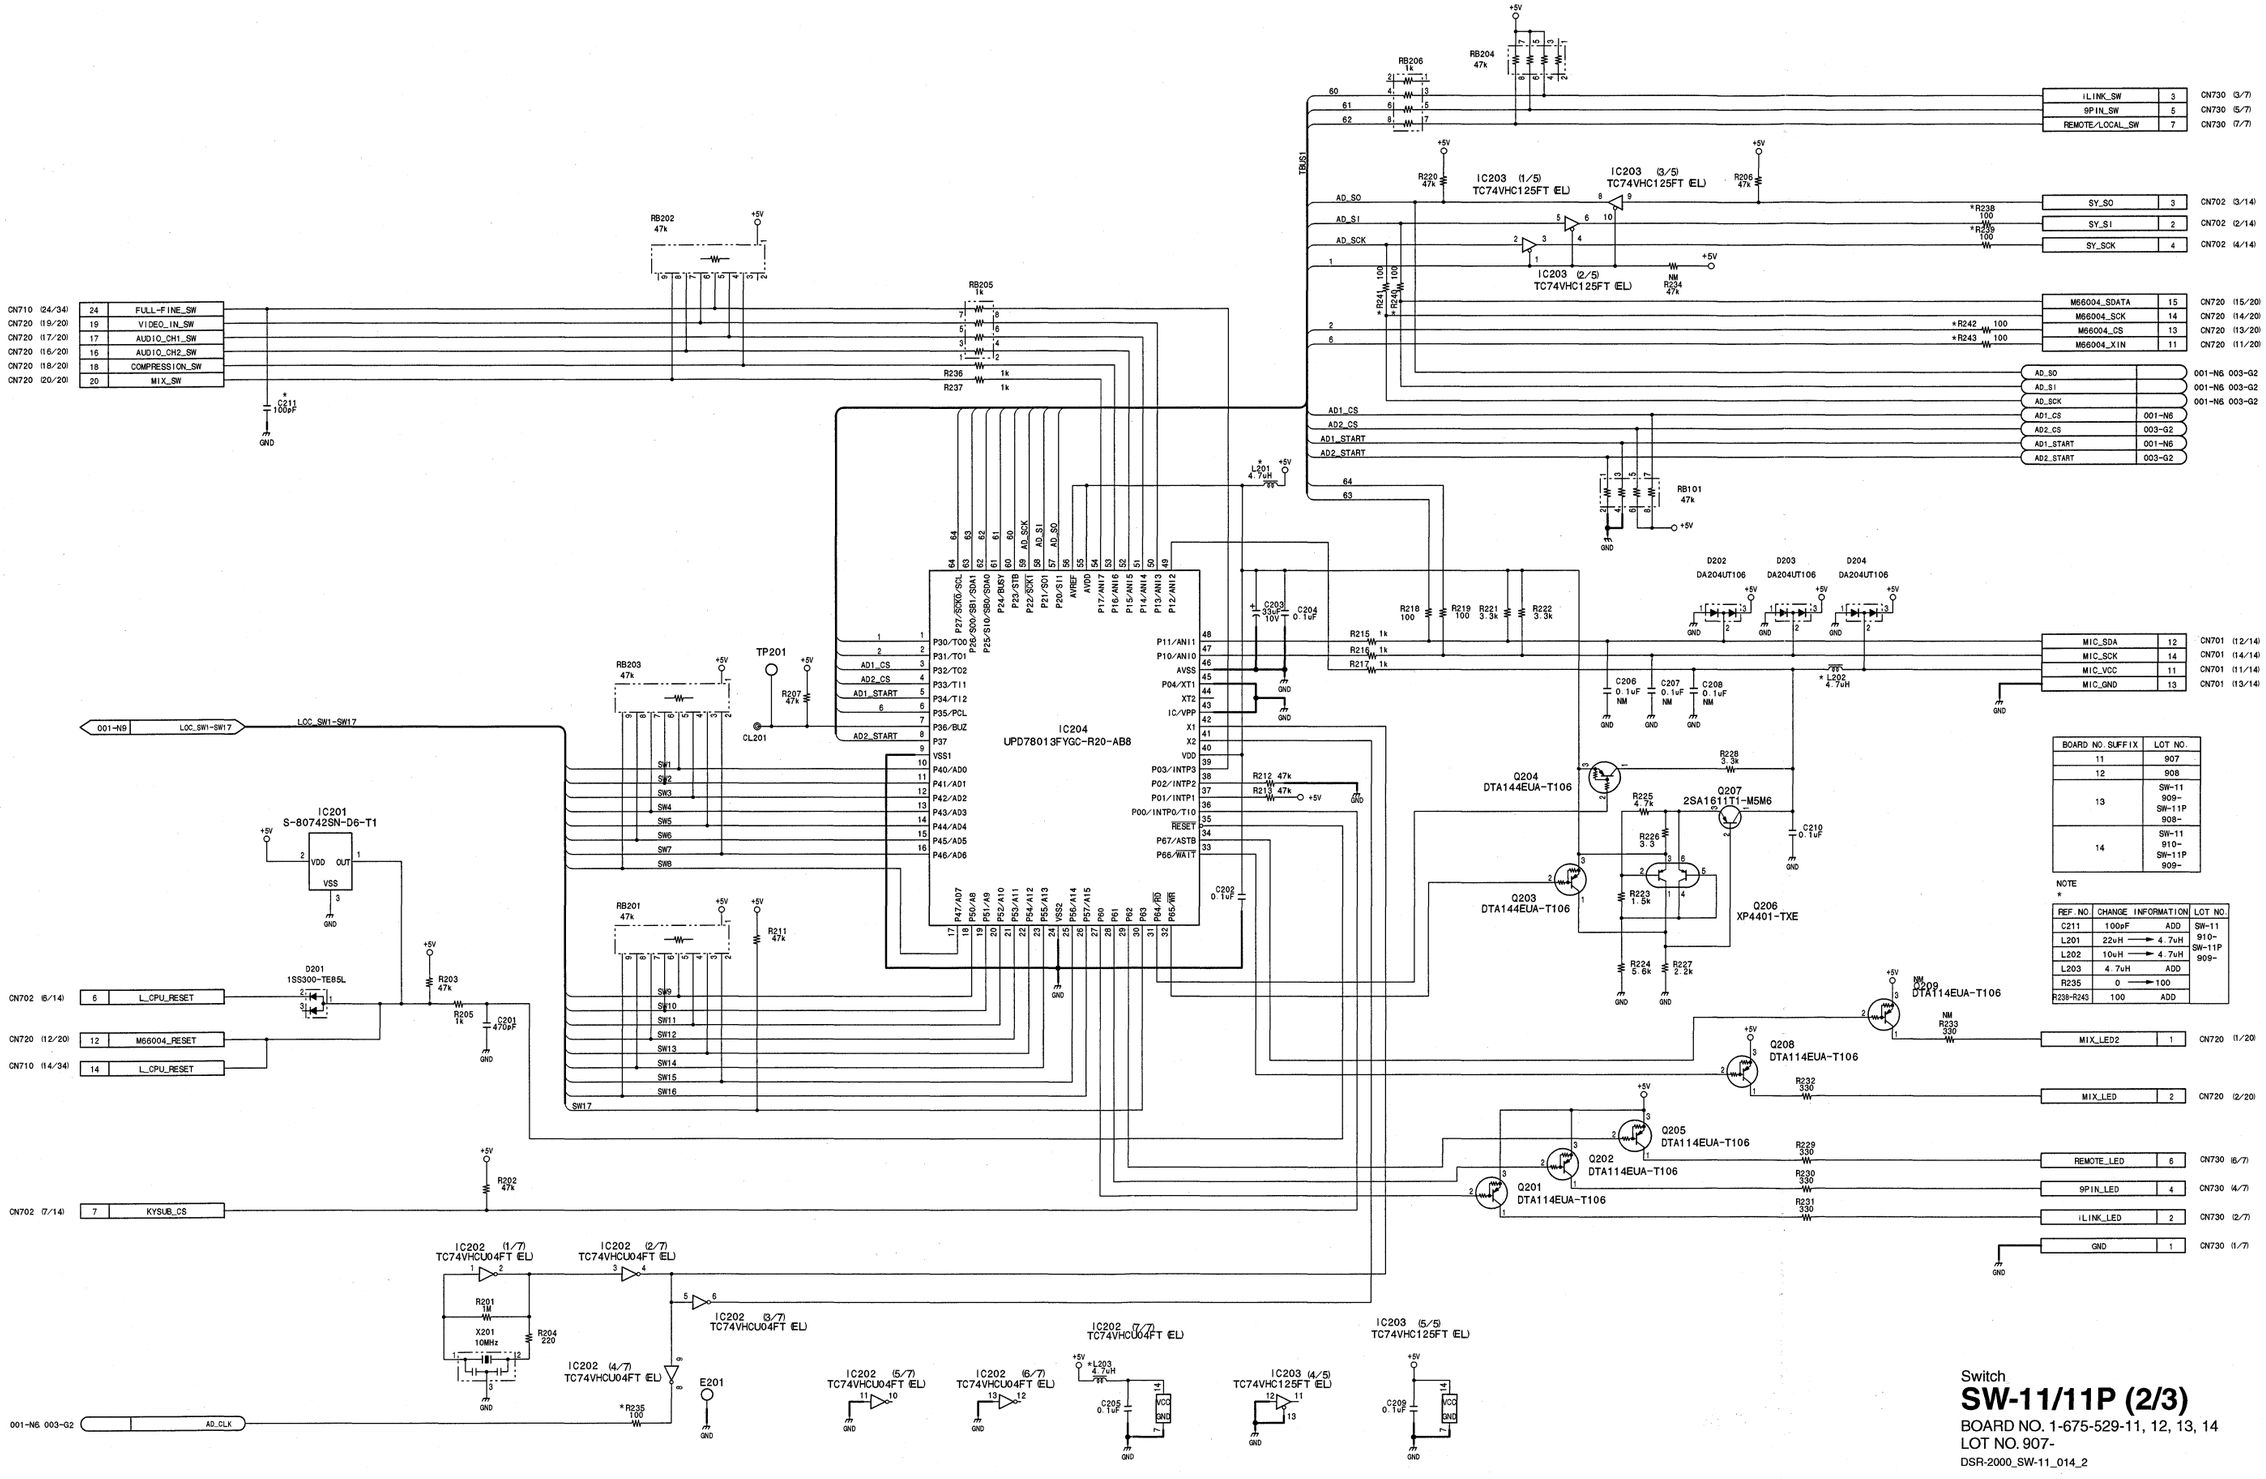

BOARD NO. SUFFIX	LOT NO.
11	907
12	908
13	SW-11 909- SW-11P 908-
14	SW-11 910- SW-11P 909-

NOTE

REF. NO.	CHANGE INFORMATION	LOT NO.
C211	100pF ADD	SW-11 910- SW-11P 909-
L201	22uH → 4.7uH	
L202	10uH → 4.7uH	
L203	4.7uH ADD	
R235	0 → 100	
R238-R243	100 ADD	

Switch
SW-11/11P (2/3)
BOARD NO. 1-675-529-11, 12, 13, 14
LOT NO. 907-
DSR-2000_SW-11_014_2

SW-11/11P (3/3)

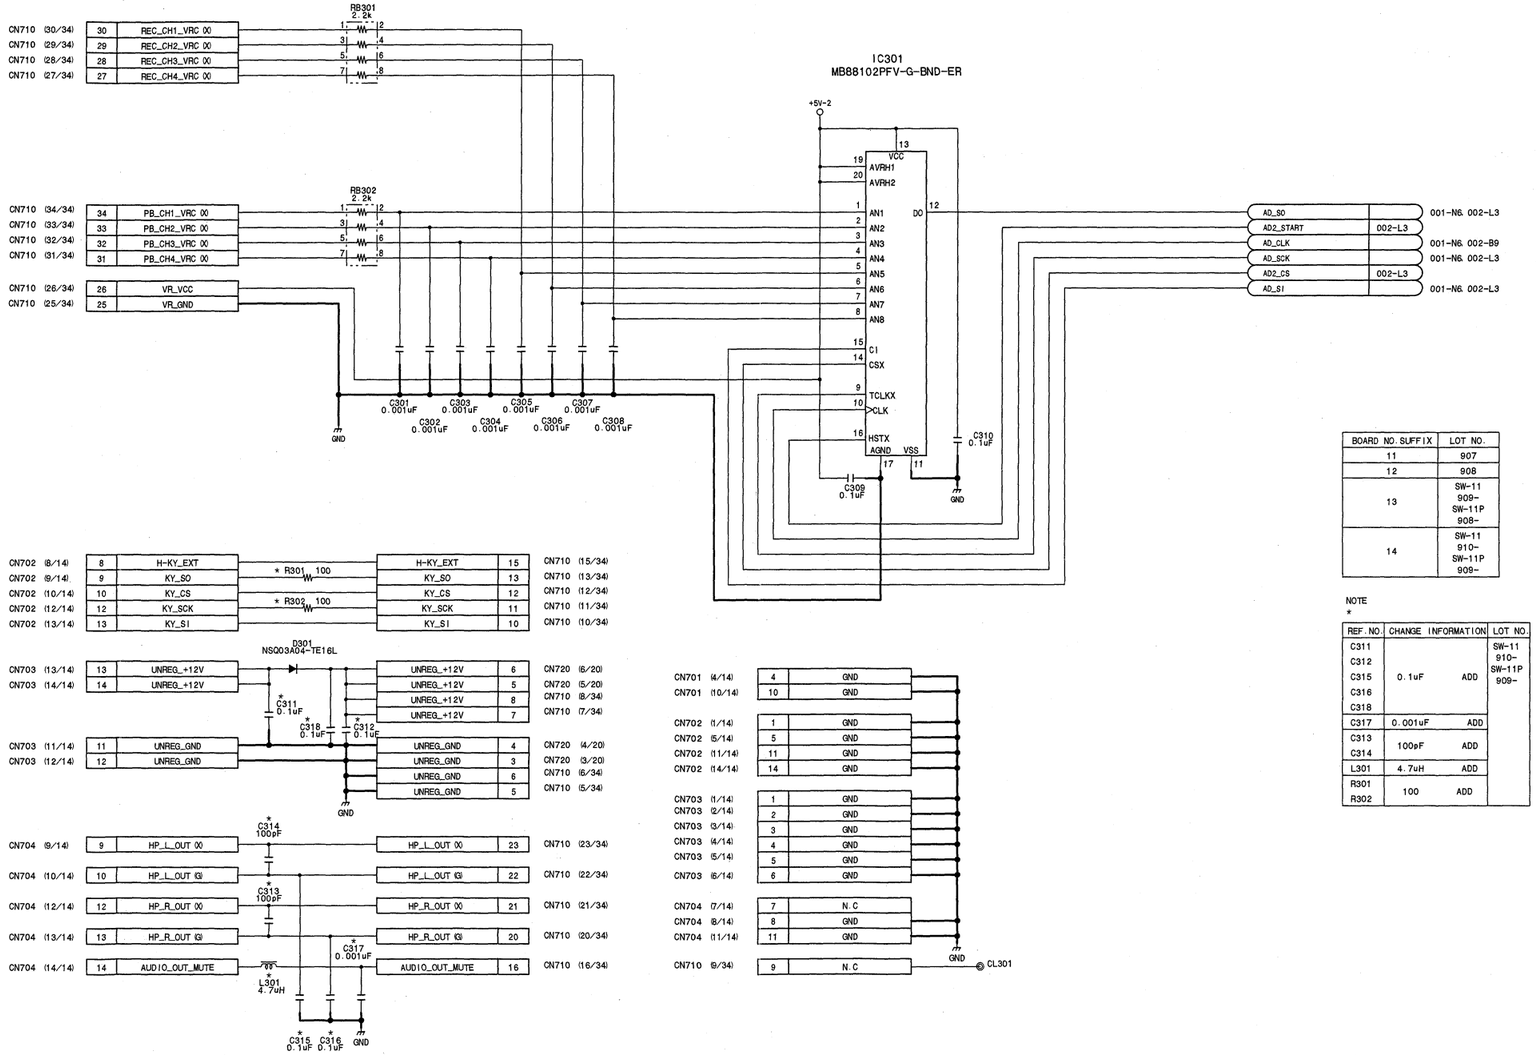

BOARD NO. SUFFIX	LOT NO.
11	907
12	908
13	SW-11 909- SW-11P 908-
14	SW-11 910- SW-11P 909-

NOTE
*

REF. NO.	CHANGE INFORMATION		LOT NO.
C311 C312 C315 C316 C318	0.1uF	ADD	SW-11 910- SW-11P 909-
C317	0.001uF	ADD	
C313 C314	100pF	ADD	
L301	4.7uH	ADD	
R301 R302	100	ADD	

Switch

SW-11/11P (3/3)

BOARD NO. 1-675-529-11, 12, 13, 14
LOT NO. 907-

DSR-2000_SW-11_014_3

15-140

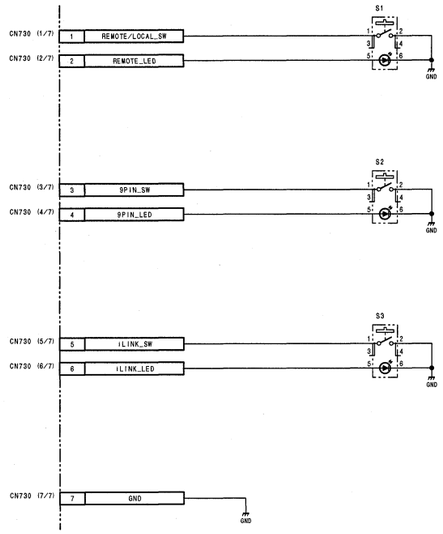

Remote switch

SW-17

BOARD NO. 1-675-557-11, 21
LOT NO. 907-
DSR-2000_SW-17_C11_1

SY-278 (1/5)

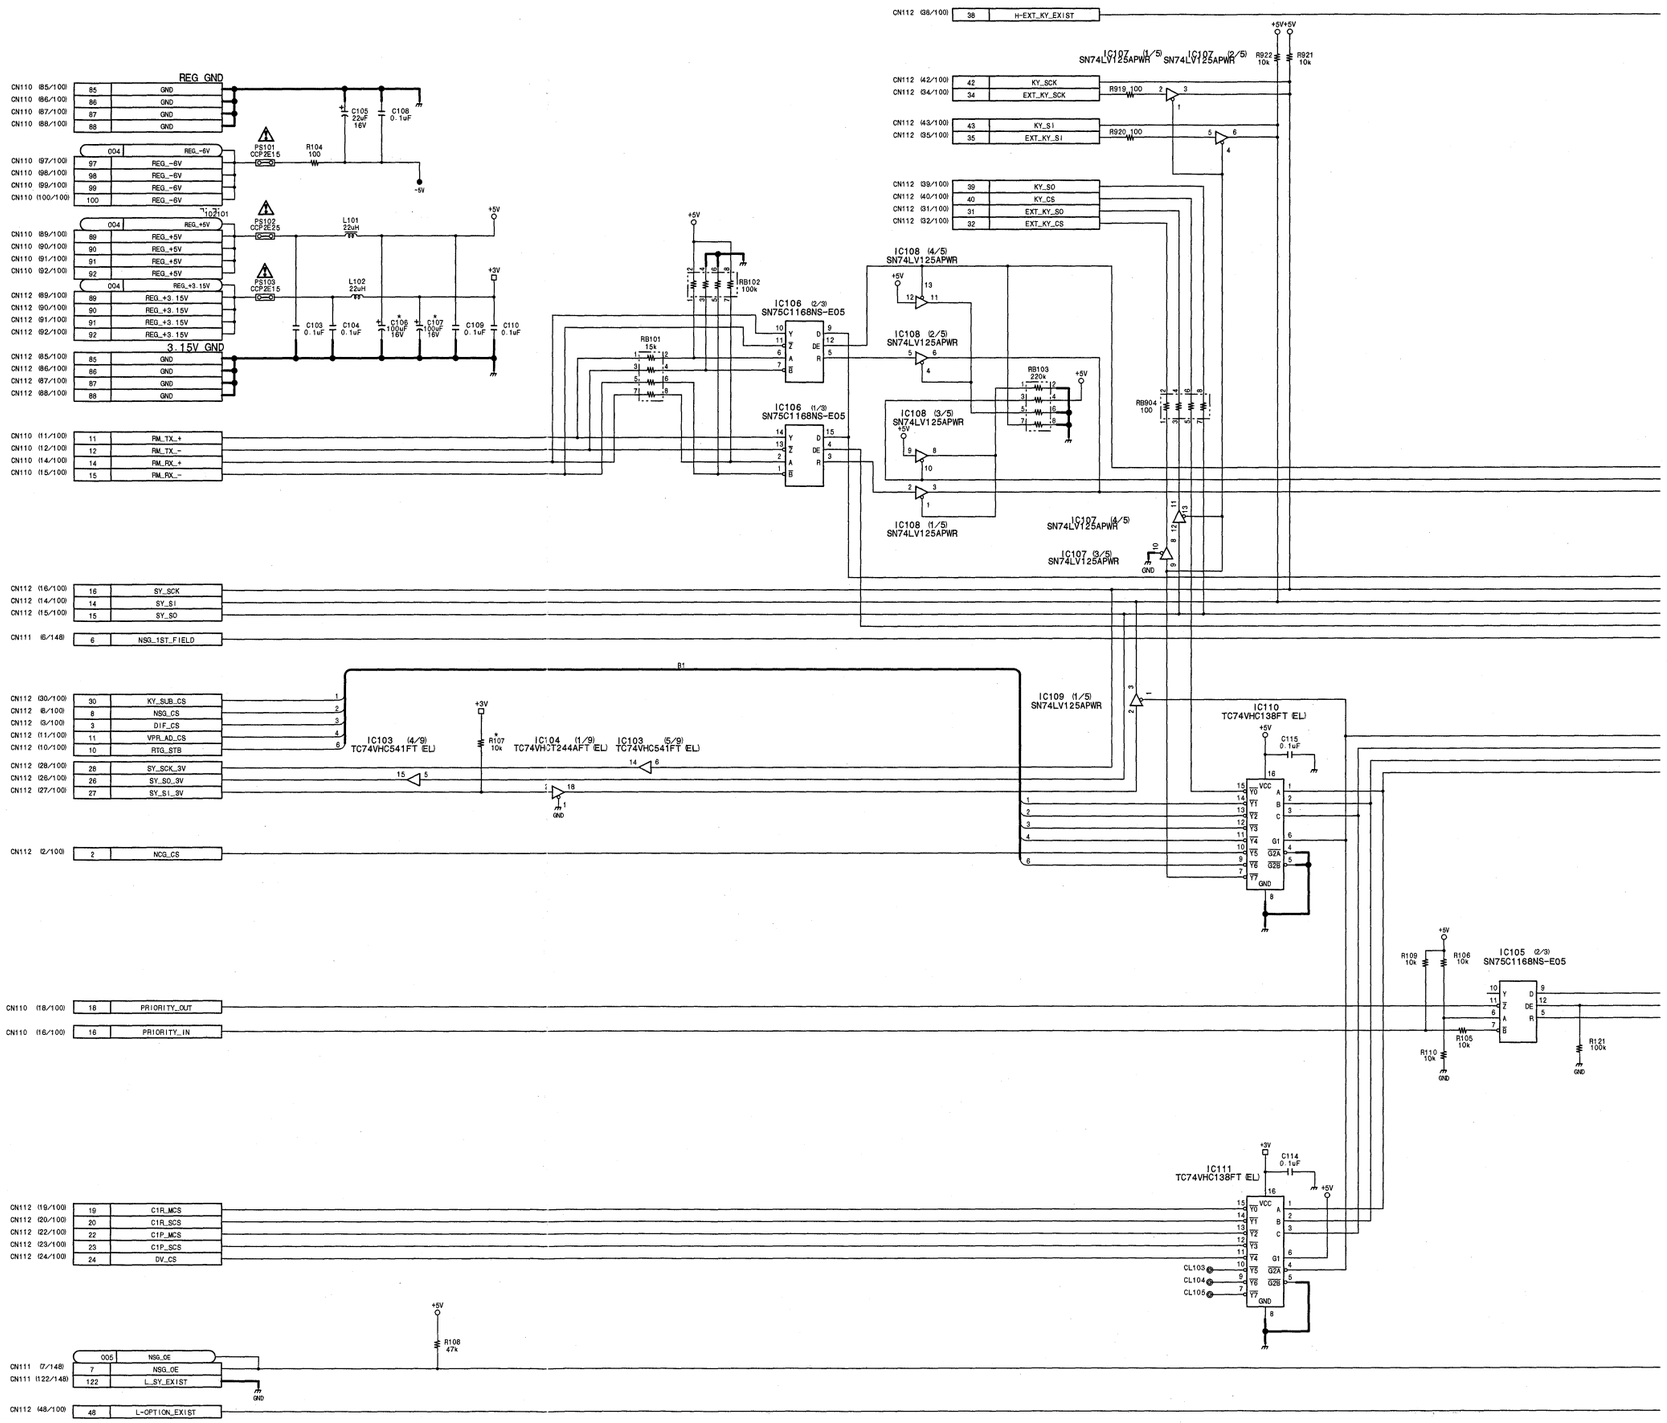

15-142

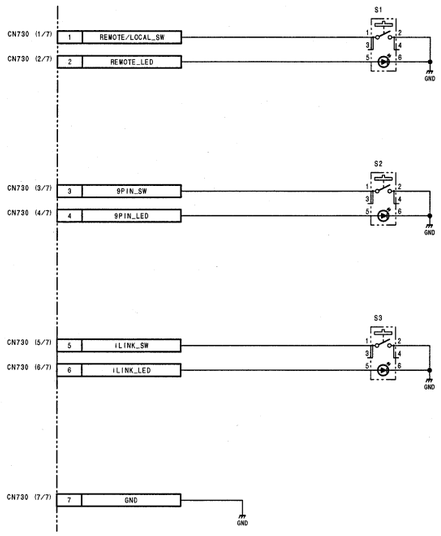

Remote switch

SW-17

BOARD NO. 1-675-557-11, 21
LOT NO. 907-
DSR-2000_SW-17_C11_1

SY-278 (1/5)

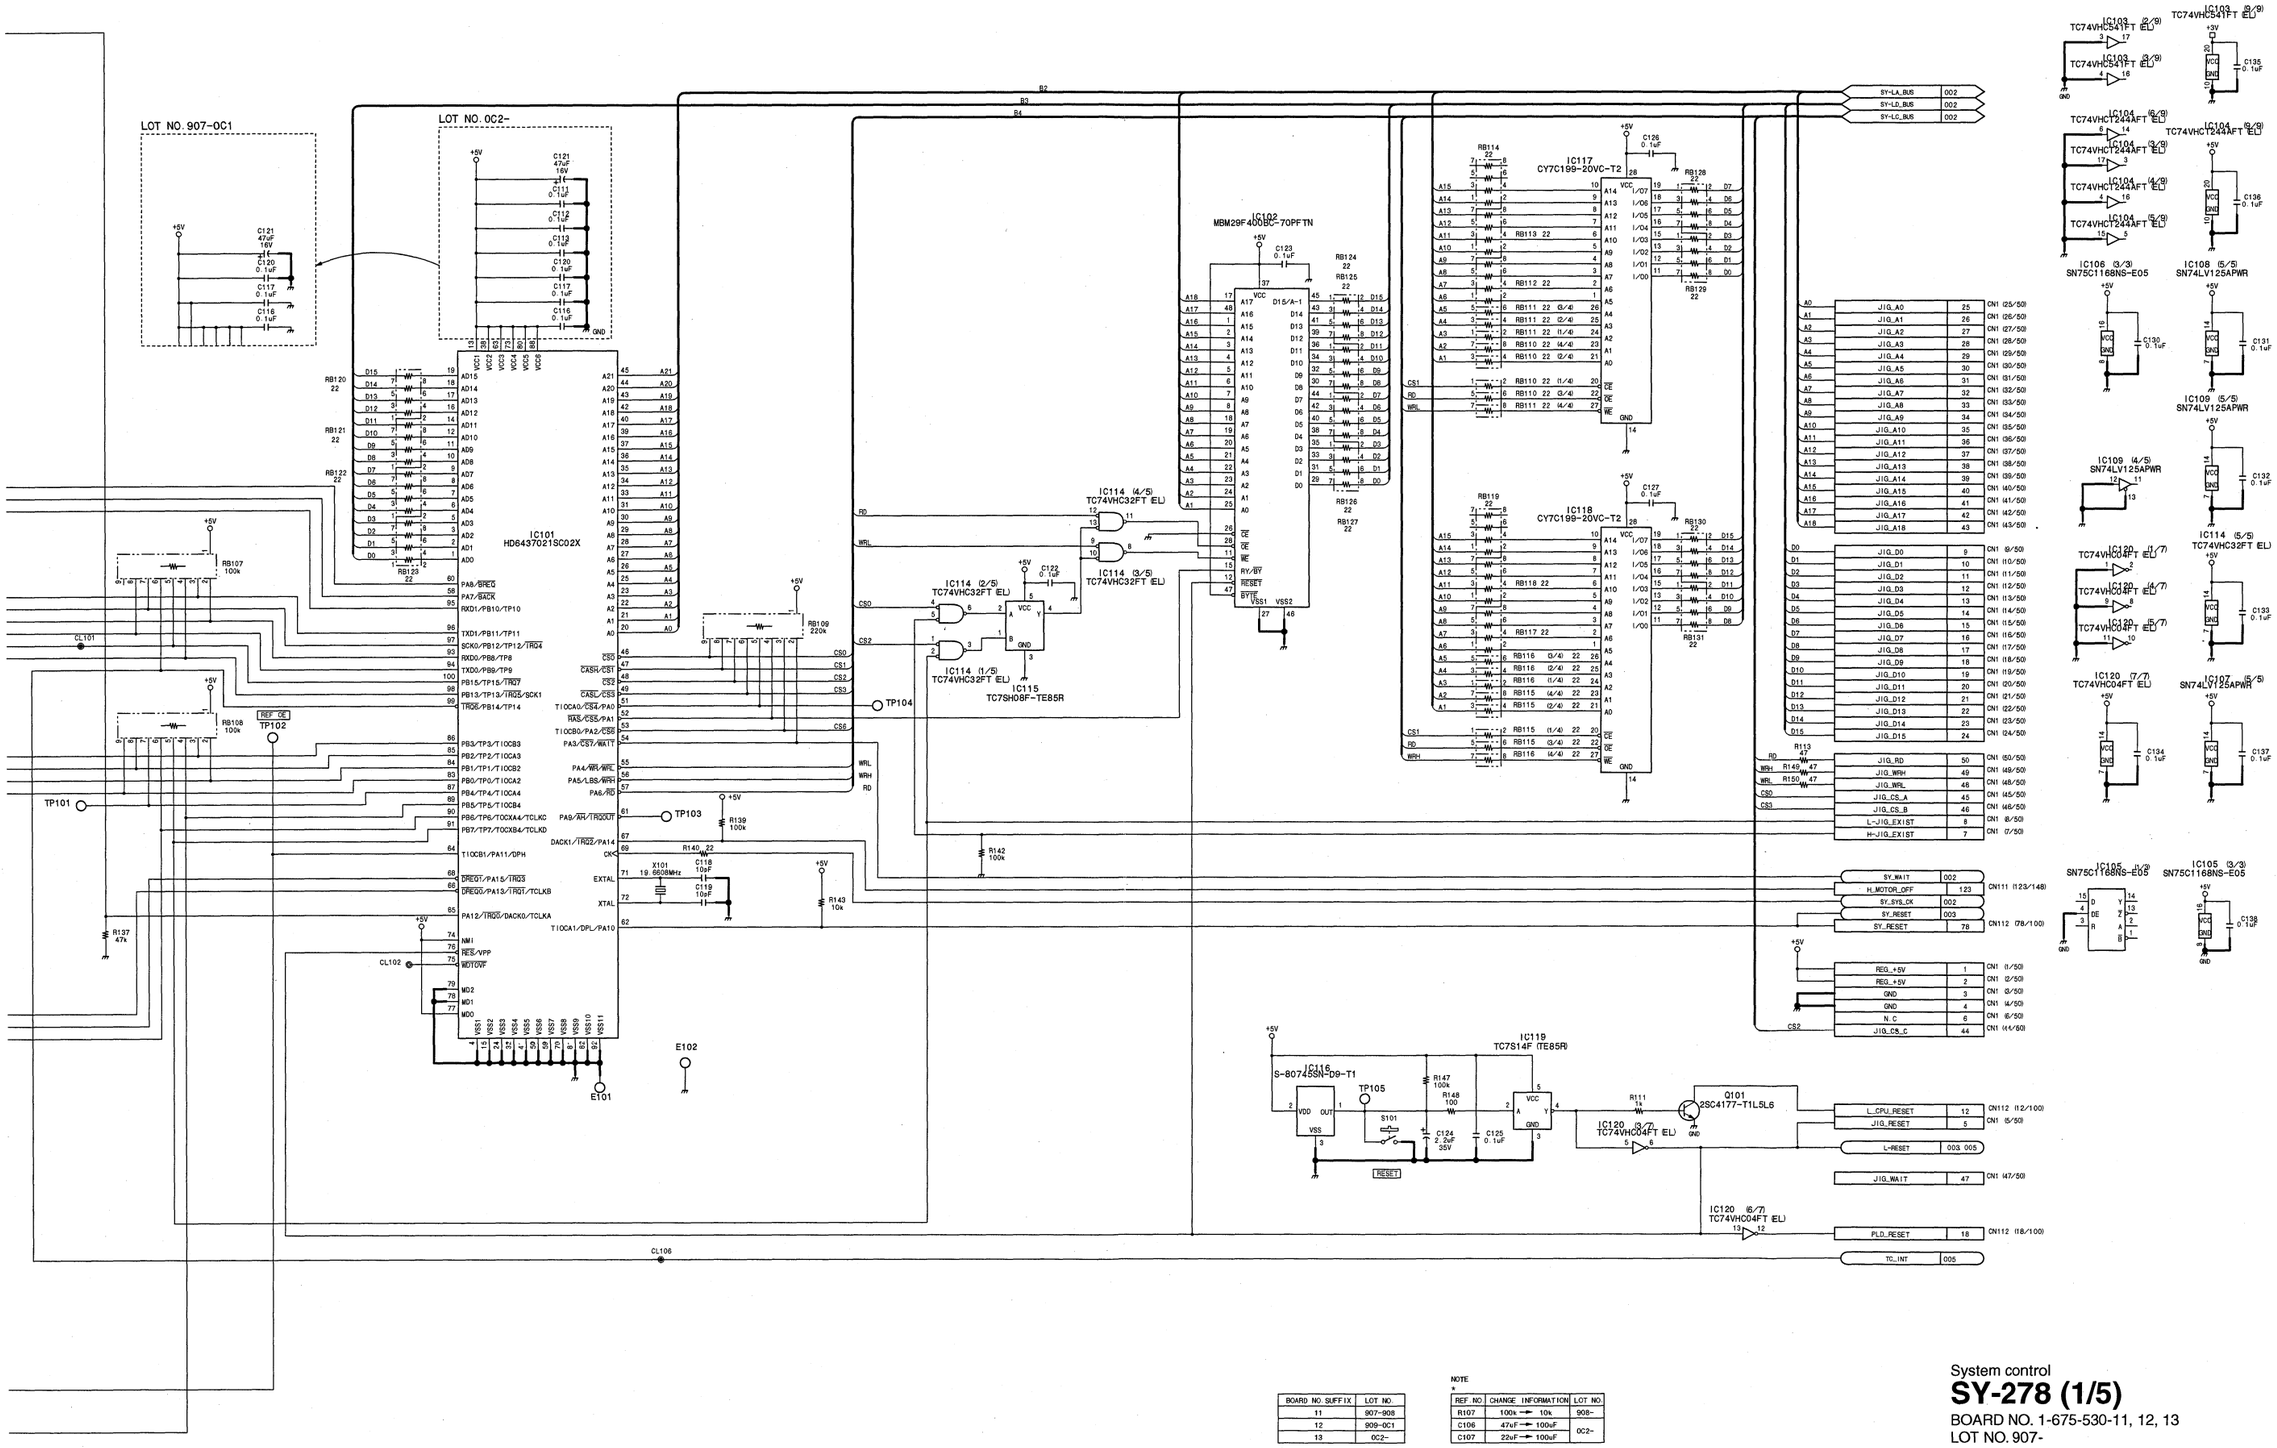

BOARD NO. SUFFIX	LOT NO.
11	907-908
12	909-0C1
13	0C2-

NOTE
*

REF. NO.	CHANGE INFORMATION	LOT NO.
R107	100k → 10k	908-
C106	47uF → 100uF	0C2-
C107	22uF → 100uF	

System control
SY-278 (1/5)
BOARD NO. 1-675-530-11, 12, 13
LOT NO. 907-
DSR-2000_SY-278_013_1

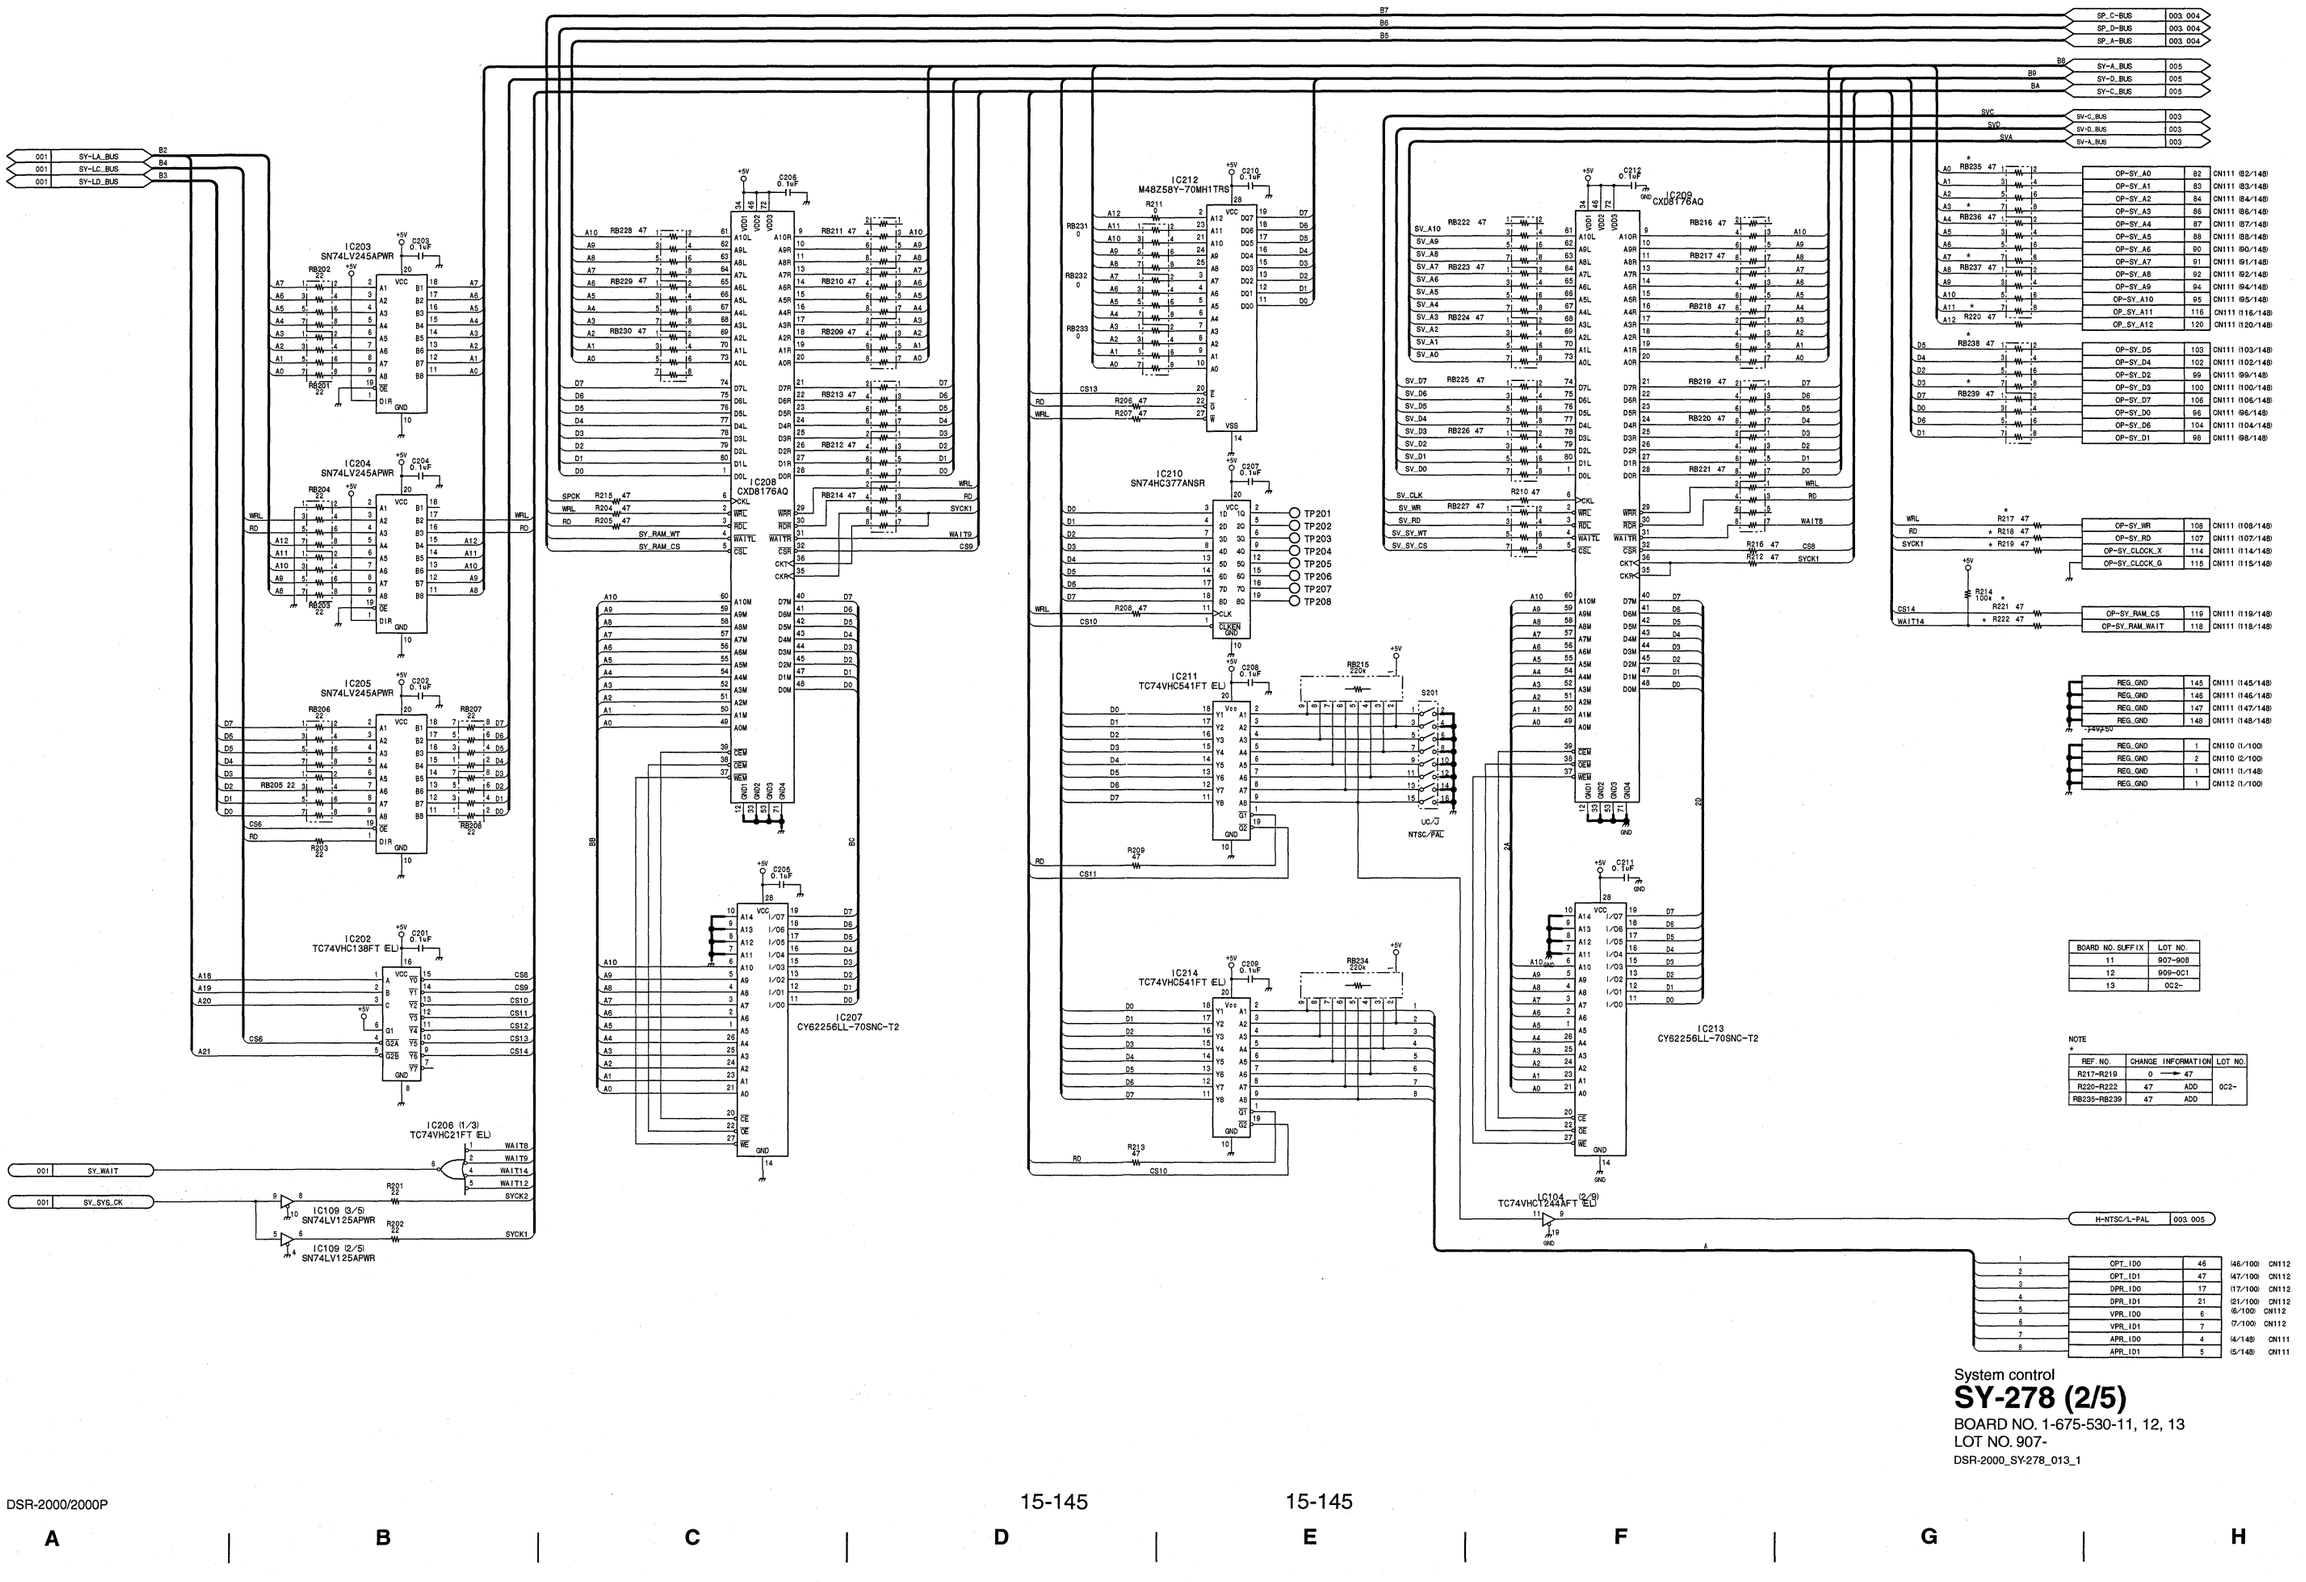

System control

SY-278 (2/5)

BOARD NO. 1-675-530-11, 12, 13
LOT NO. 907-

DSR-2000_SY-278_013_1

SY-278 (3/5)

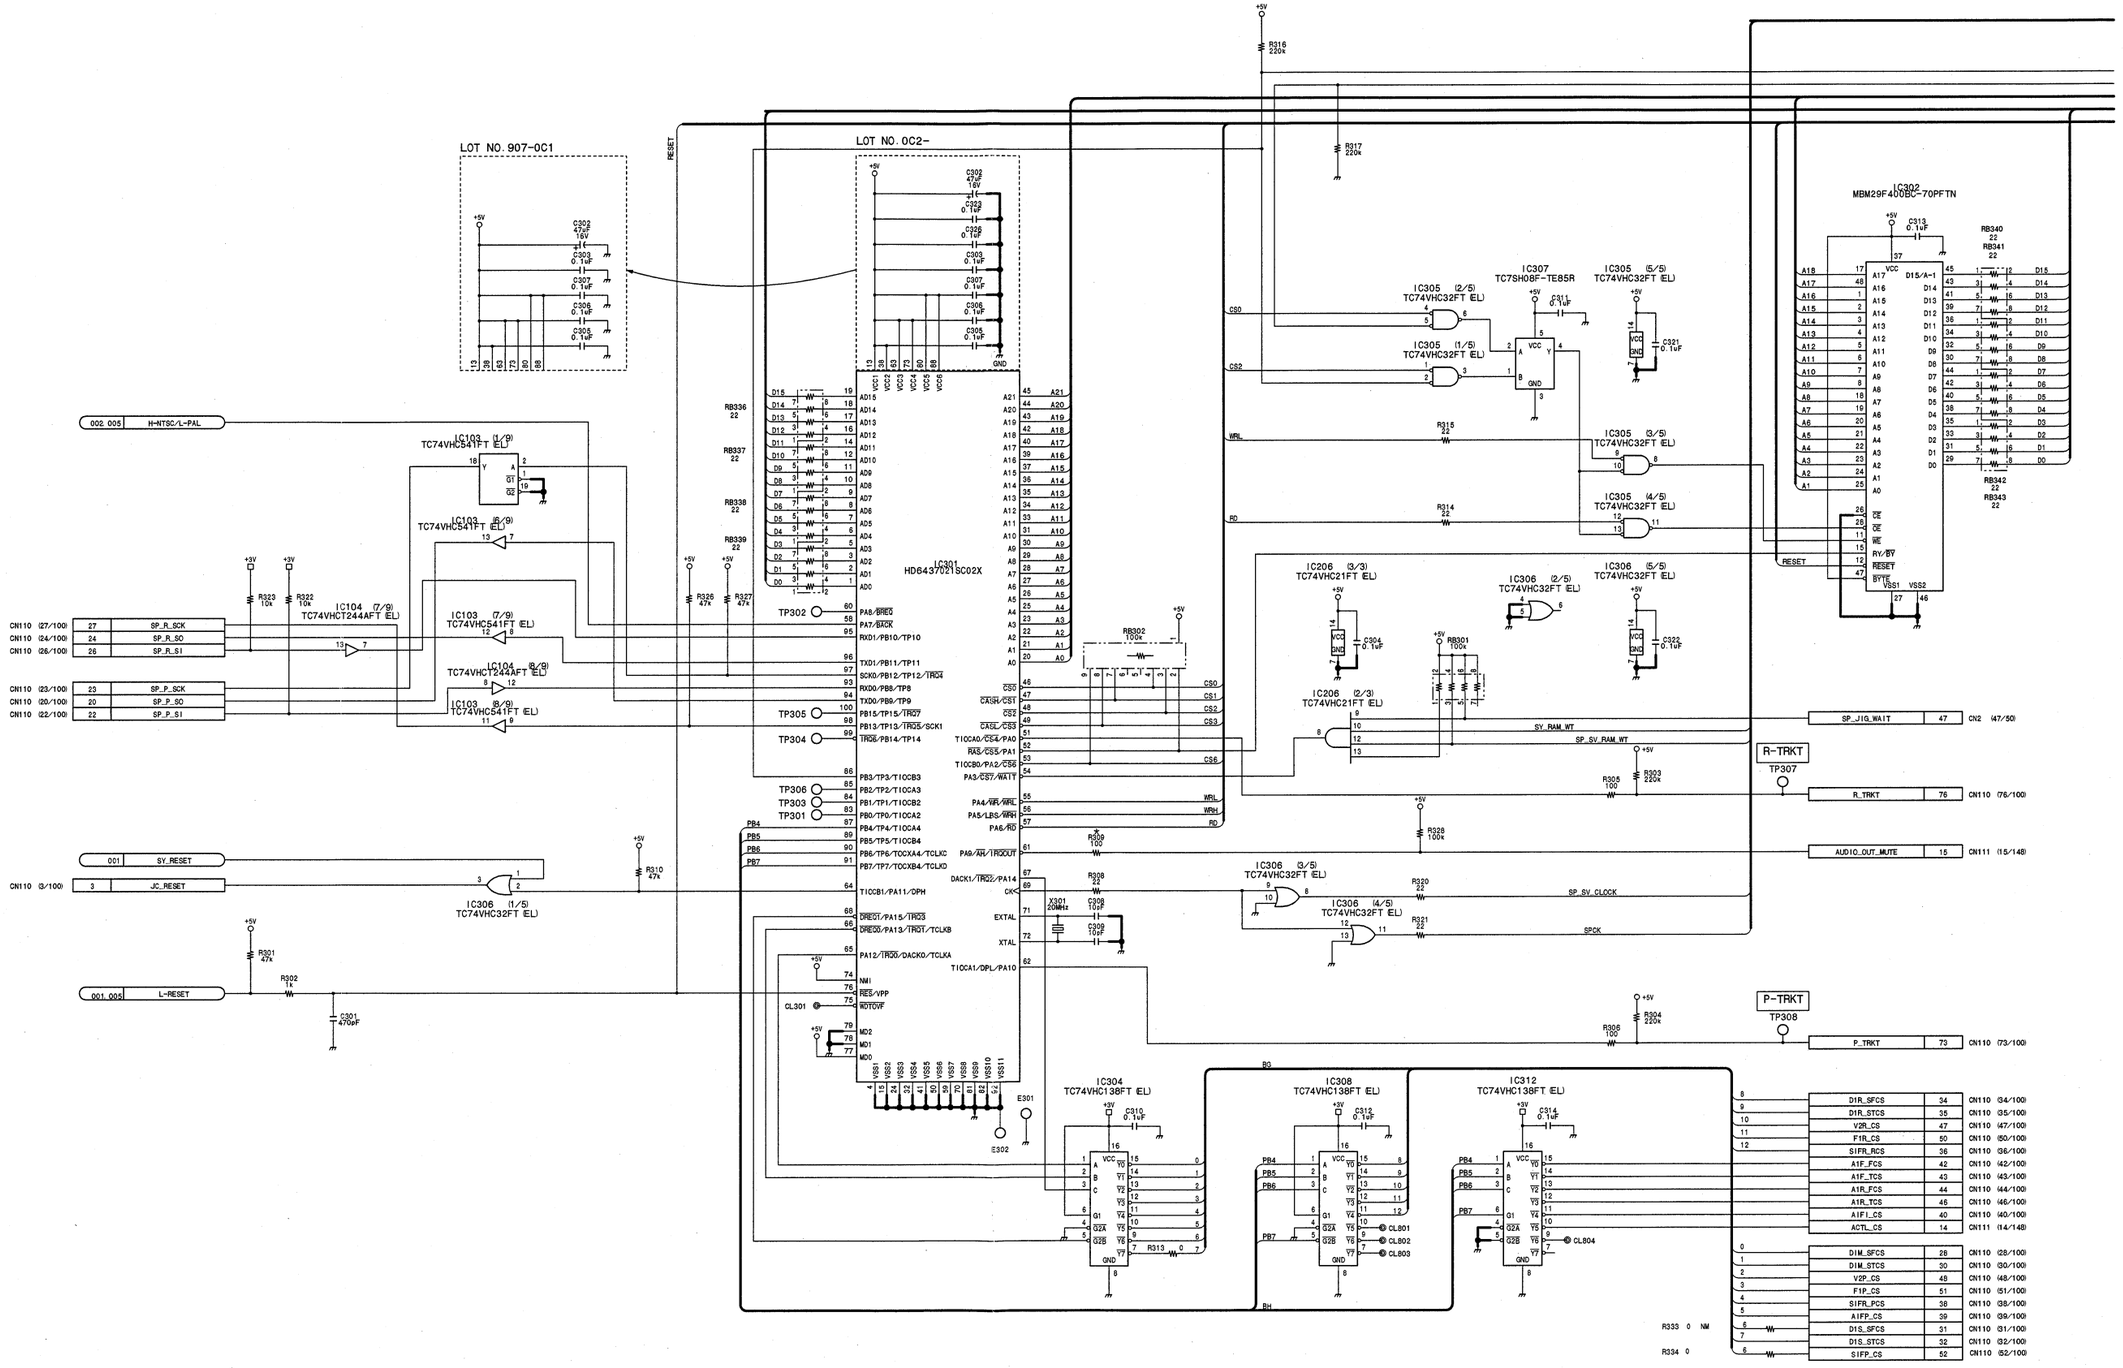

15-146

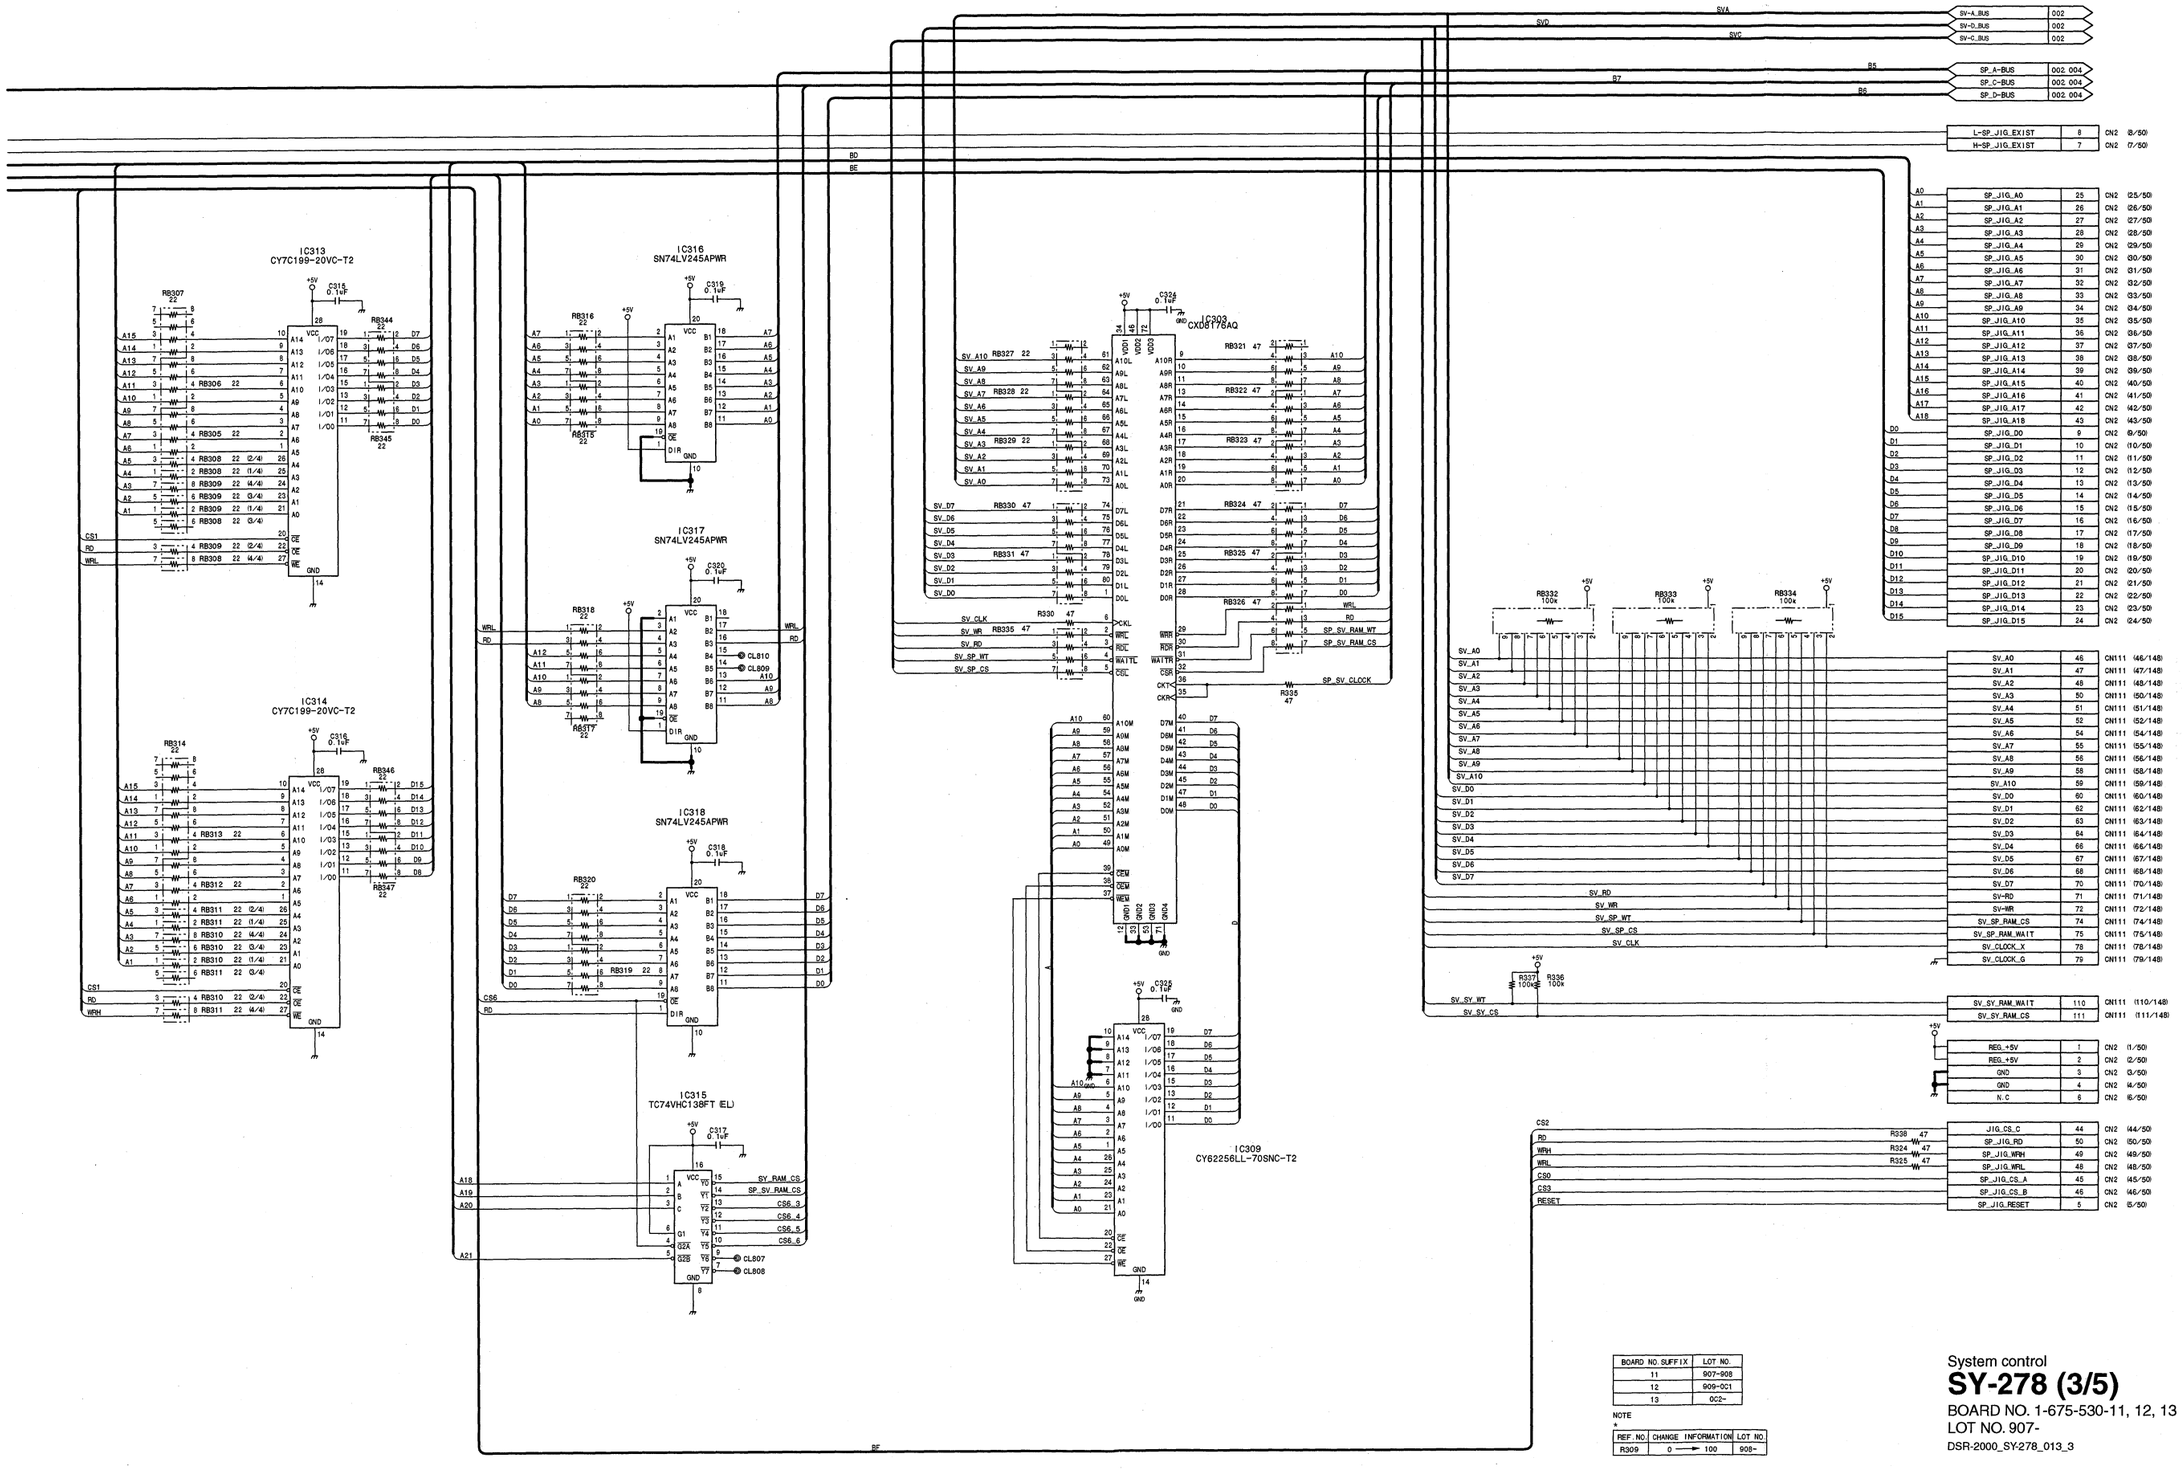

BOARD NO. SUFFIX	LOT NO.
11	907-908
12	909-001
13	002-

NOTE
*

REF. NO.	CHANGE INFORMATION	LOT NO.
R309	0 → 100	908-

System control
SY-278 (3/5)
BOARD NO. 1-675-530-11, 12, 13
LOT NO. 907-
DSR-2000_SY-278_013_3

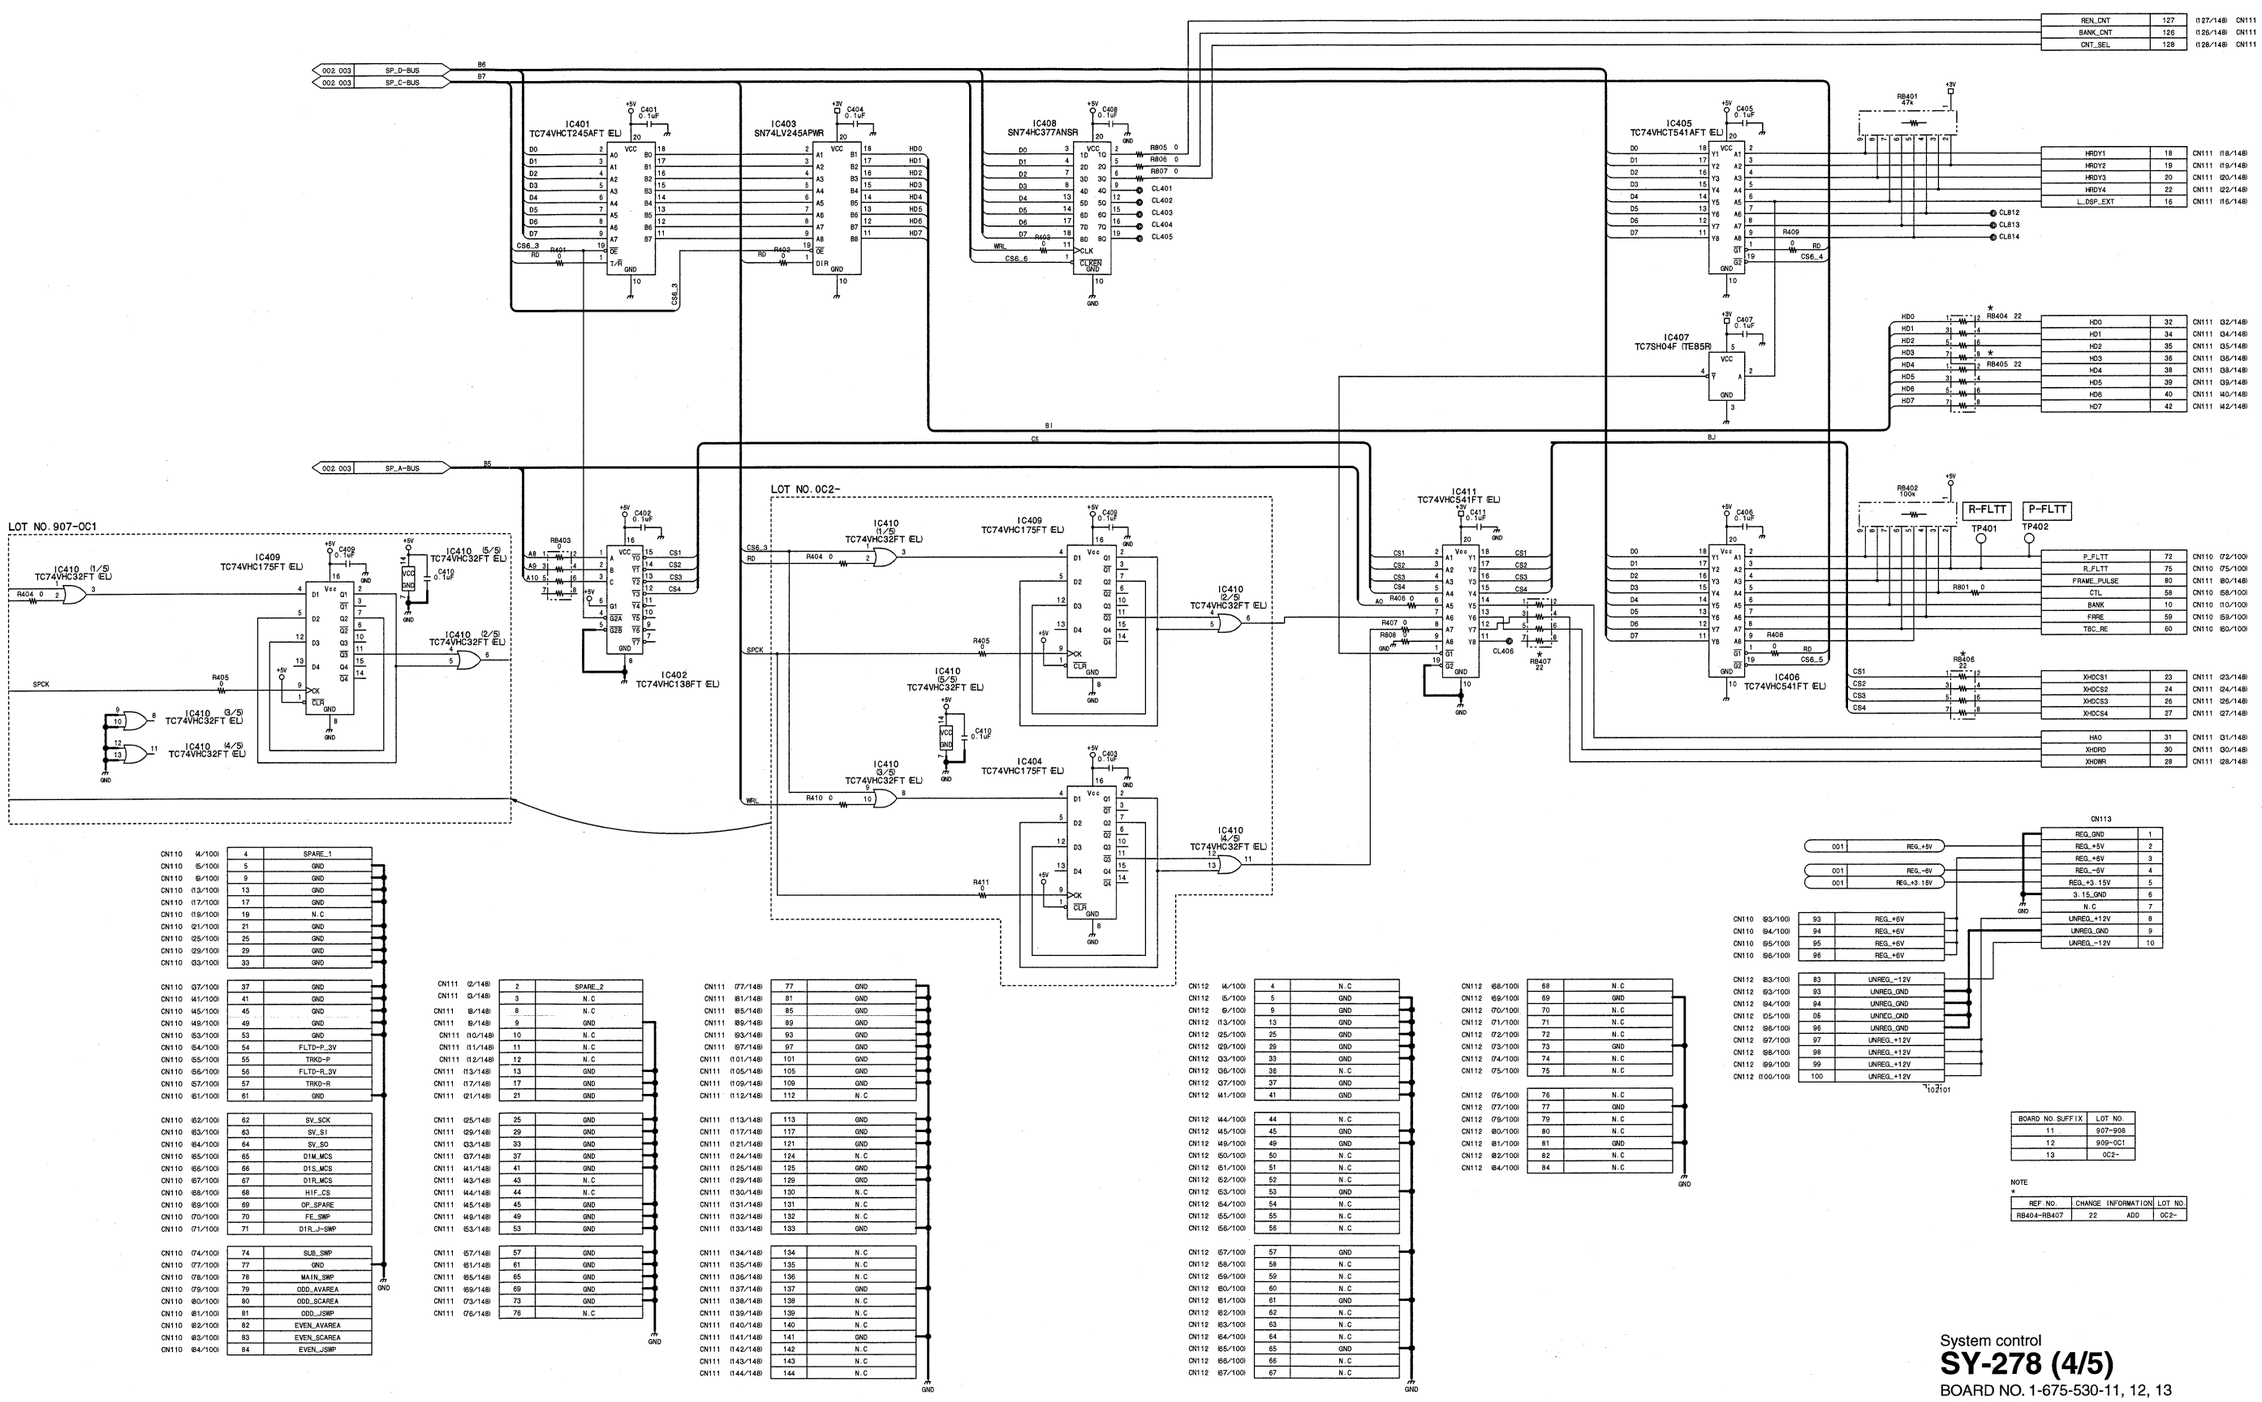

BOARD NO. SUFFIX	LOT NO.
11	907-908
12	909-0C1
13	0C2-

NOTE
*

REF. NO.	CHANGE INFORMATION	LOT NO.
RB404-RB407	22 ADD	0C2-

System control

SY-278 (4/5)

BOARD NO. 1-675-530-11, 12, 13
LOT NO. 907-

DSR-2000_SY-278_013_4

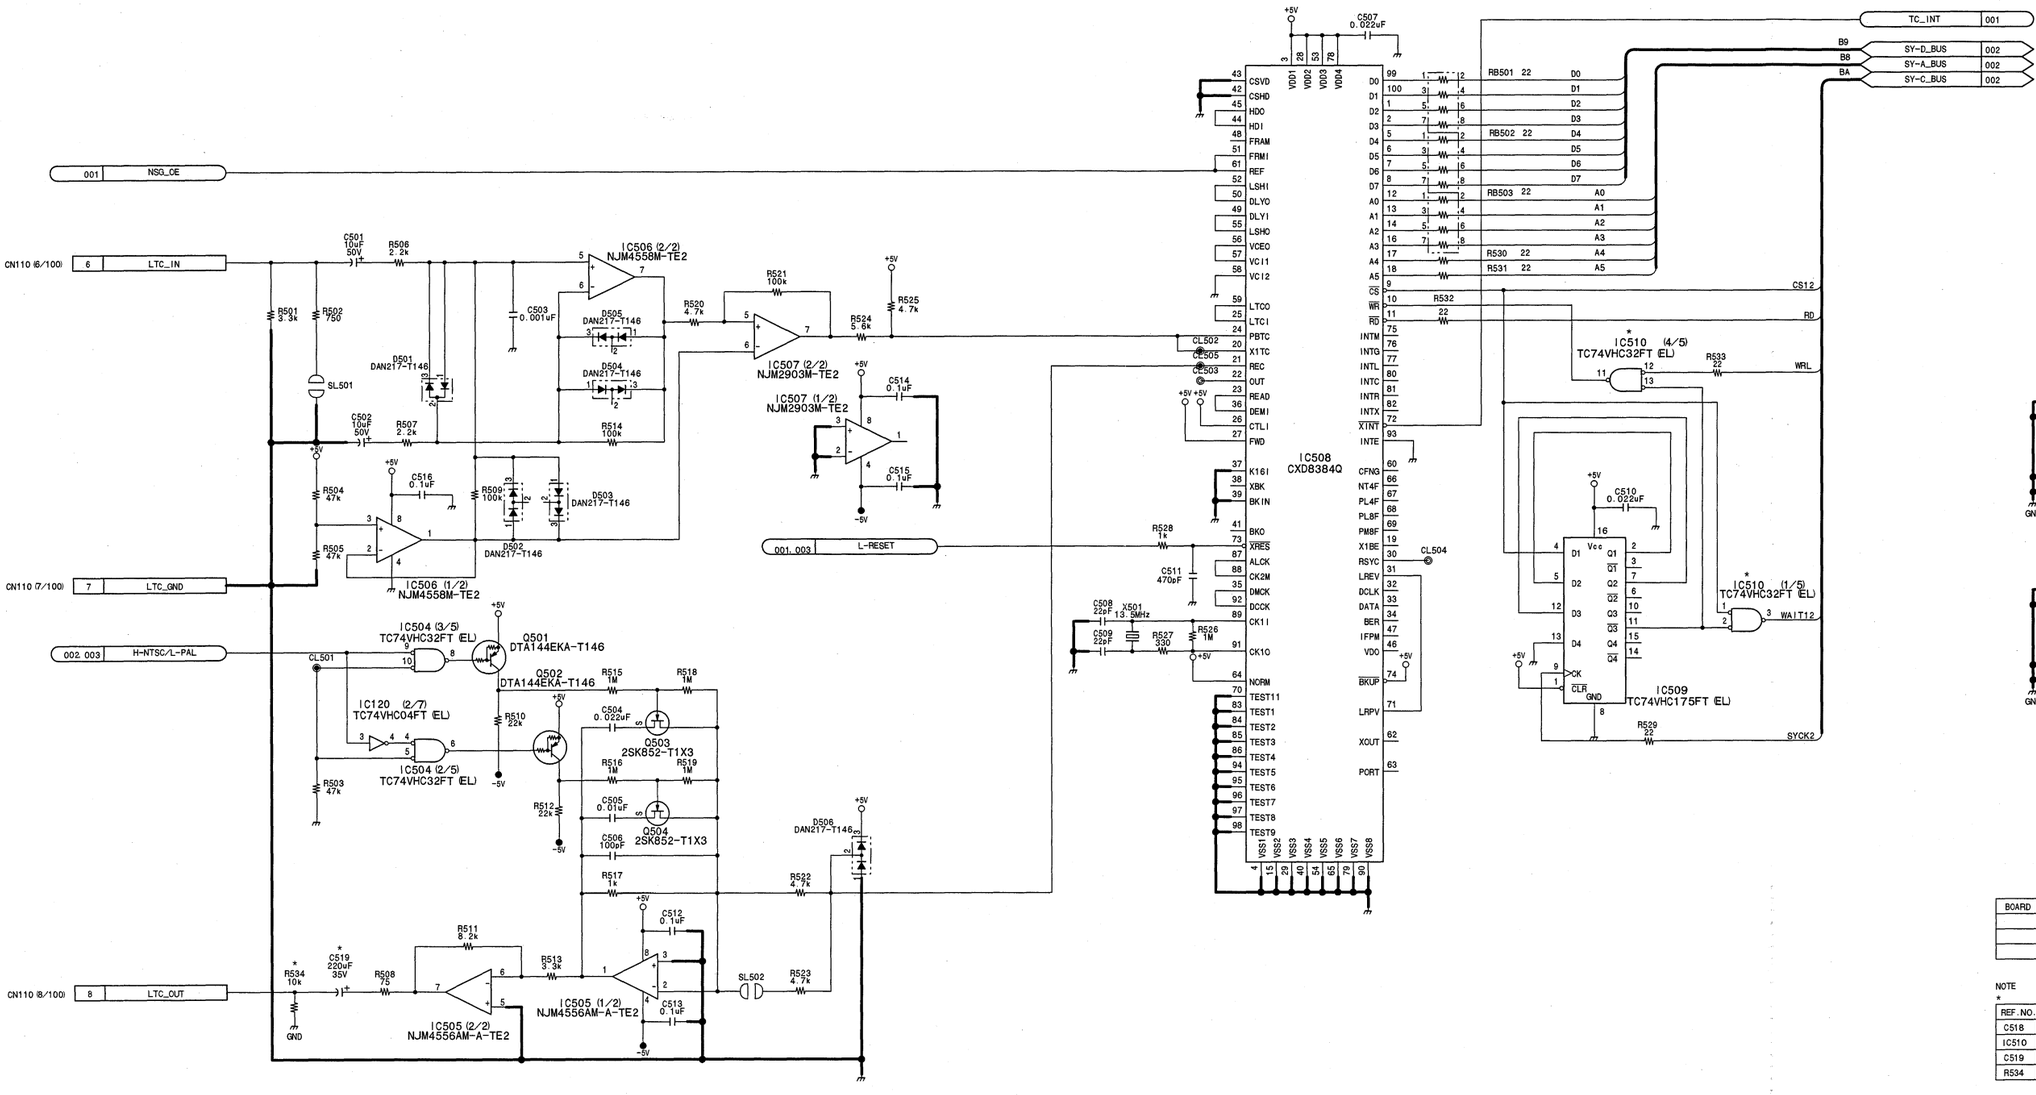

BOARD NO. SUFFIX	LOT NO.
11	907-908
12	909-0C1
13	0C2-

NOTE
*

REF. NO.	CHANGE INFORMATION	LOT NO.
C518	0.1uF ADD	909-
IC510	TC74DHC32FT (EL) ADD	
C519	220uF ADD	0C2-
R534	10k ADD	

System control
SY-278 (5/5)
BOARD NO. 1-675-530-11, 12, 13
LOT NO. 907-
DSR-2000_SY-278_013_5

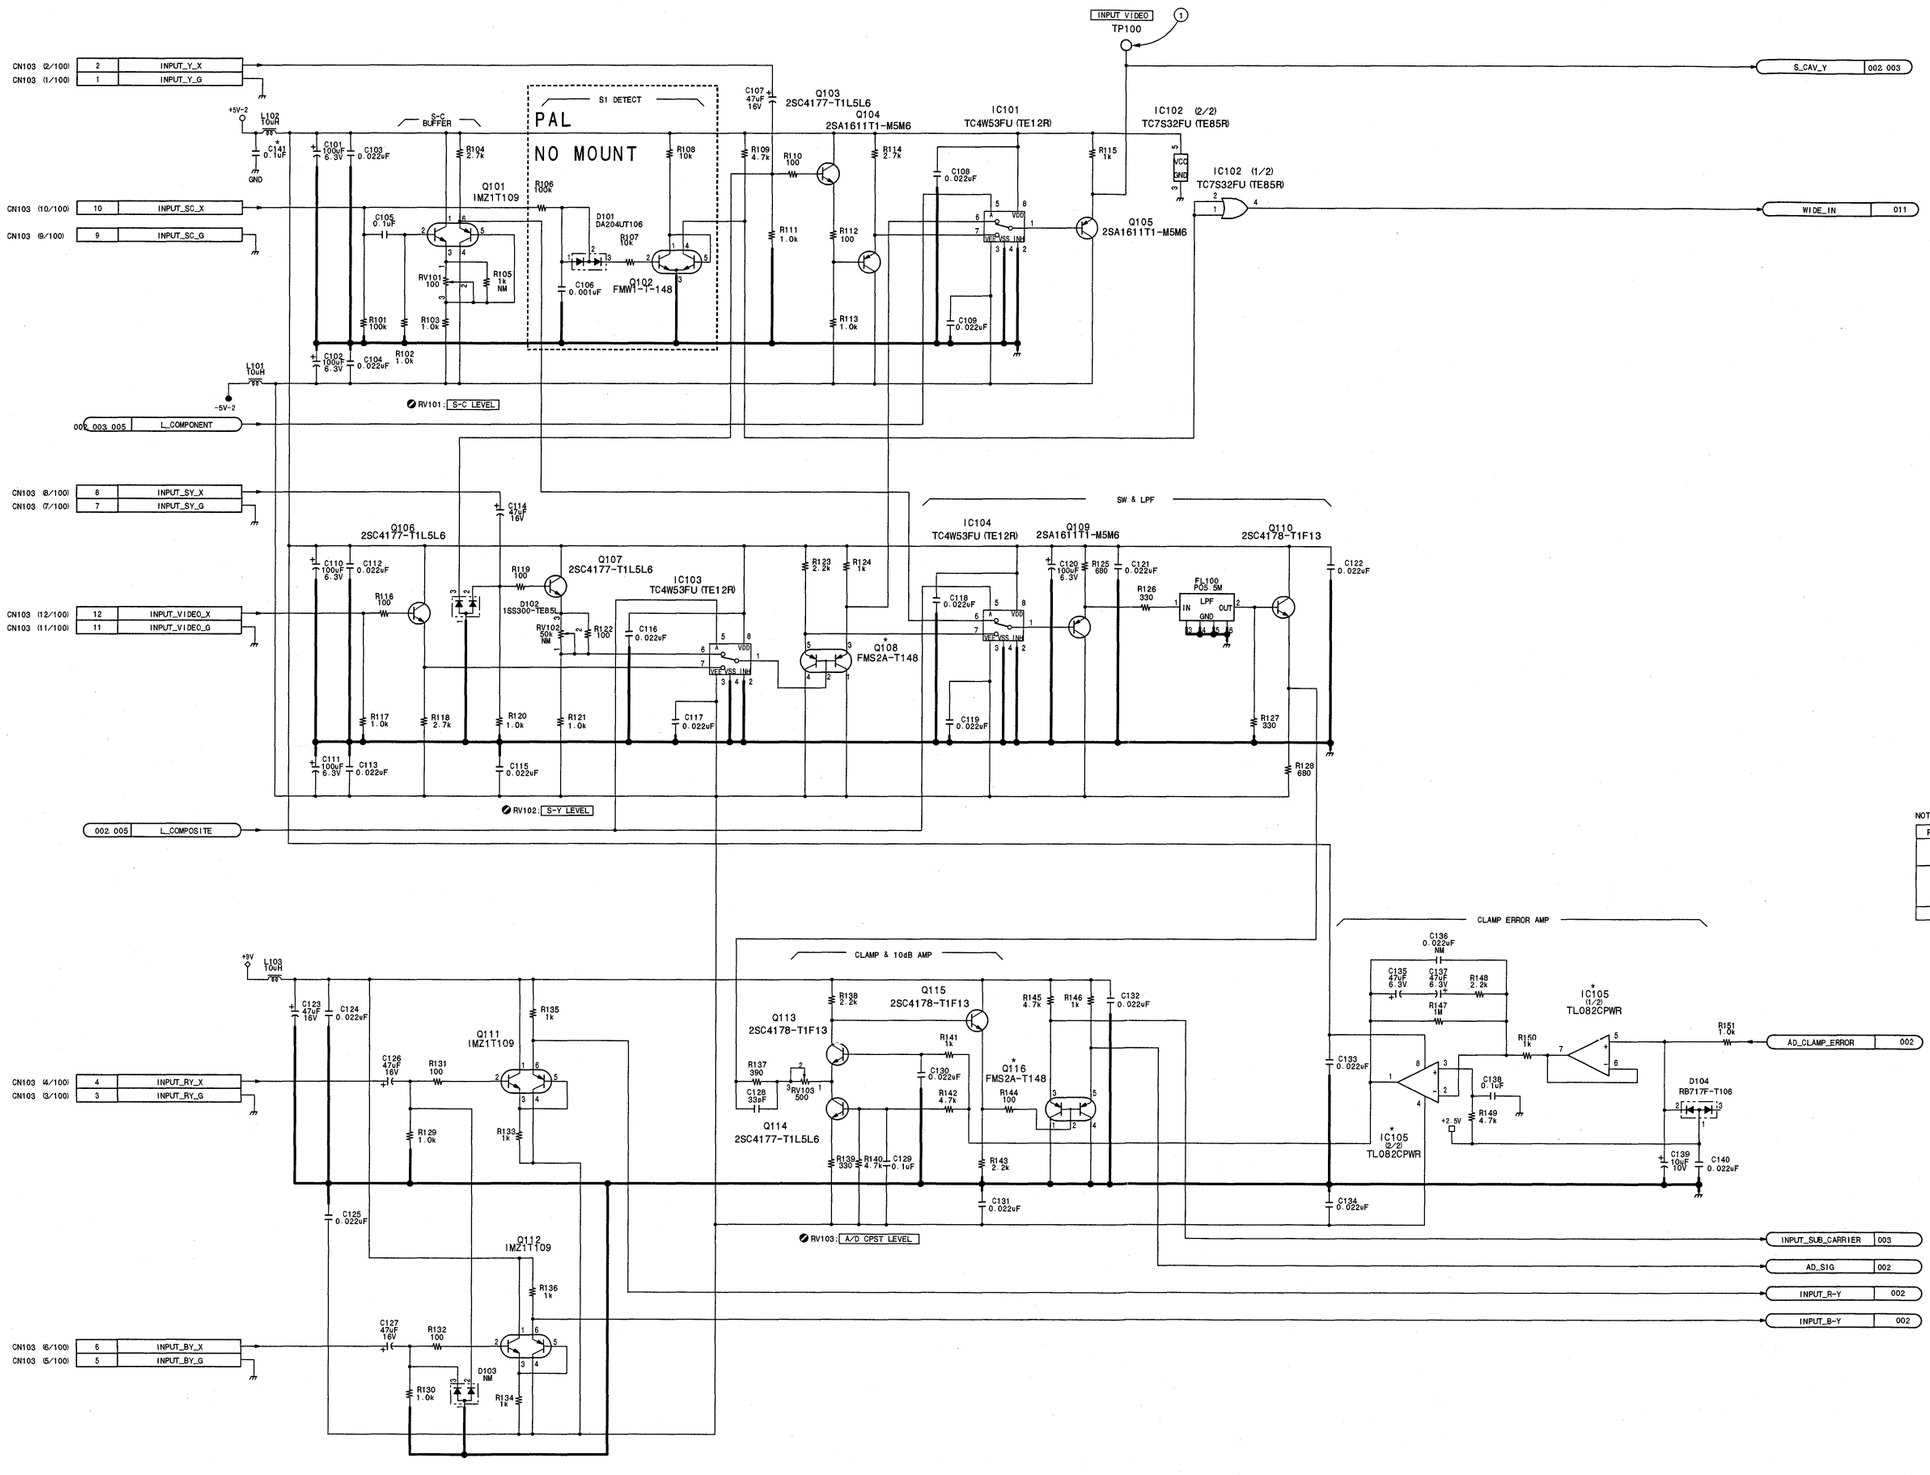

① TP100 INPUT VIDEO (NTSC)

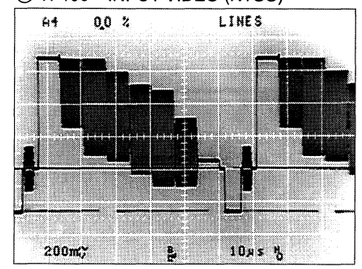

① TP100 INPUT VIDEO (PAL)

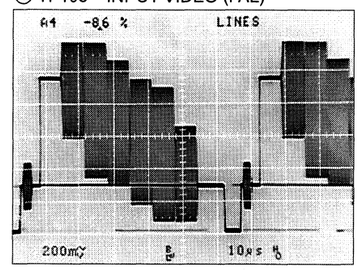

NOTE:*

REF. NO.	CHANGE INFORMATION	LOT NO.
IC105	TL082CPW-E05 ⟶ TL082CPWR	001-
Q108 Q116	FMS2-T-148 ⟶ FMS2A-T148	NTSC: 152- PAL: 143-
C141	0.1uf ADD	143-

	NTSC	PAL	J
C106	0.001uF 50V B	NM	0.001uF 50V B
D101	DA204UT106	NM	DA204UT106
Q102	FMW1-T-148	NM	FMW1-T-148
R106	100k 1/16W 5%	NM	100k 1/16W 5%
R107	10k 1/16W 5%	NM	10k 1/16W 5%
R108	10k 1/16W 5%	NM	10k 1/16W 5%

BOARD NO. SUFFIX	LOT NO.
11	907-908
12	909-
14	NTSC: 152- PAL: 143-

Analog video input • output process/reference

VPR-62/62P (1/12)

BOARD NO. 1-675-531-11, 12, 14
LOT NO. 907-
DSR-2000_VPR-62_014_1

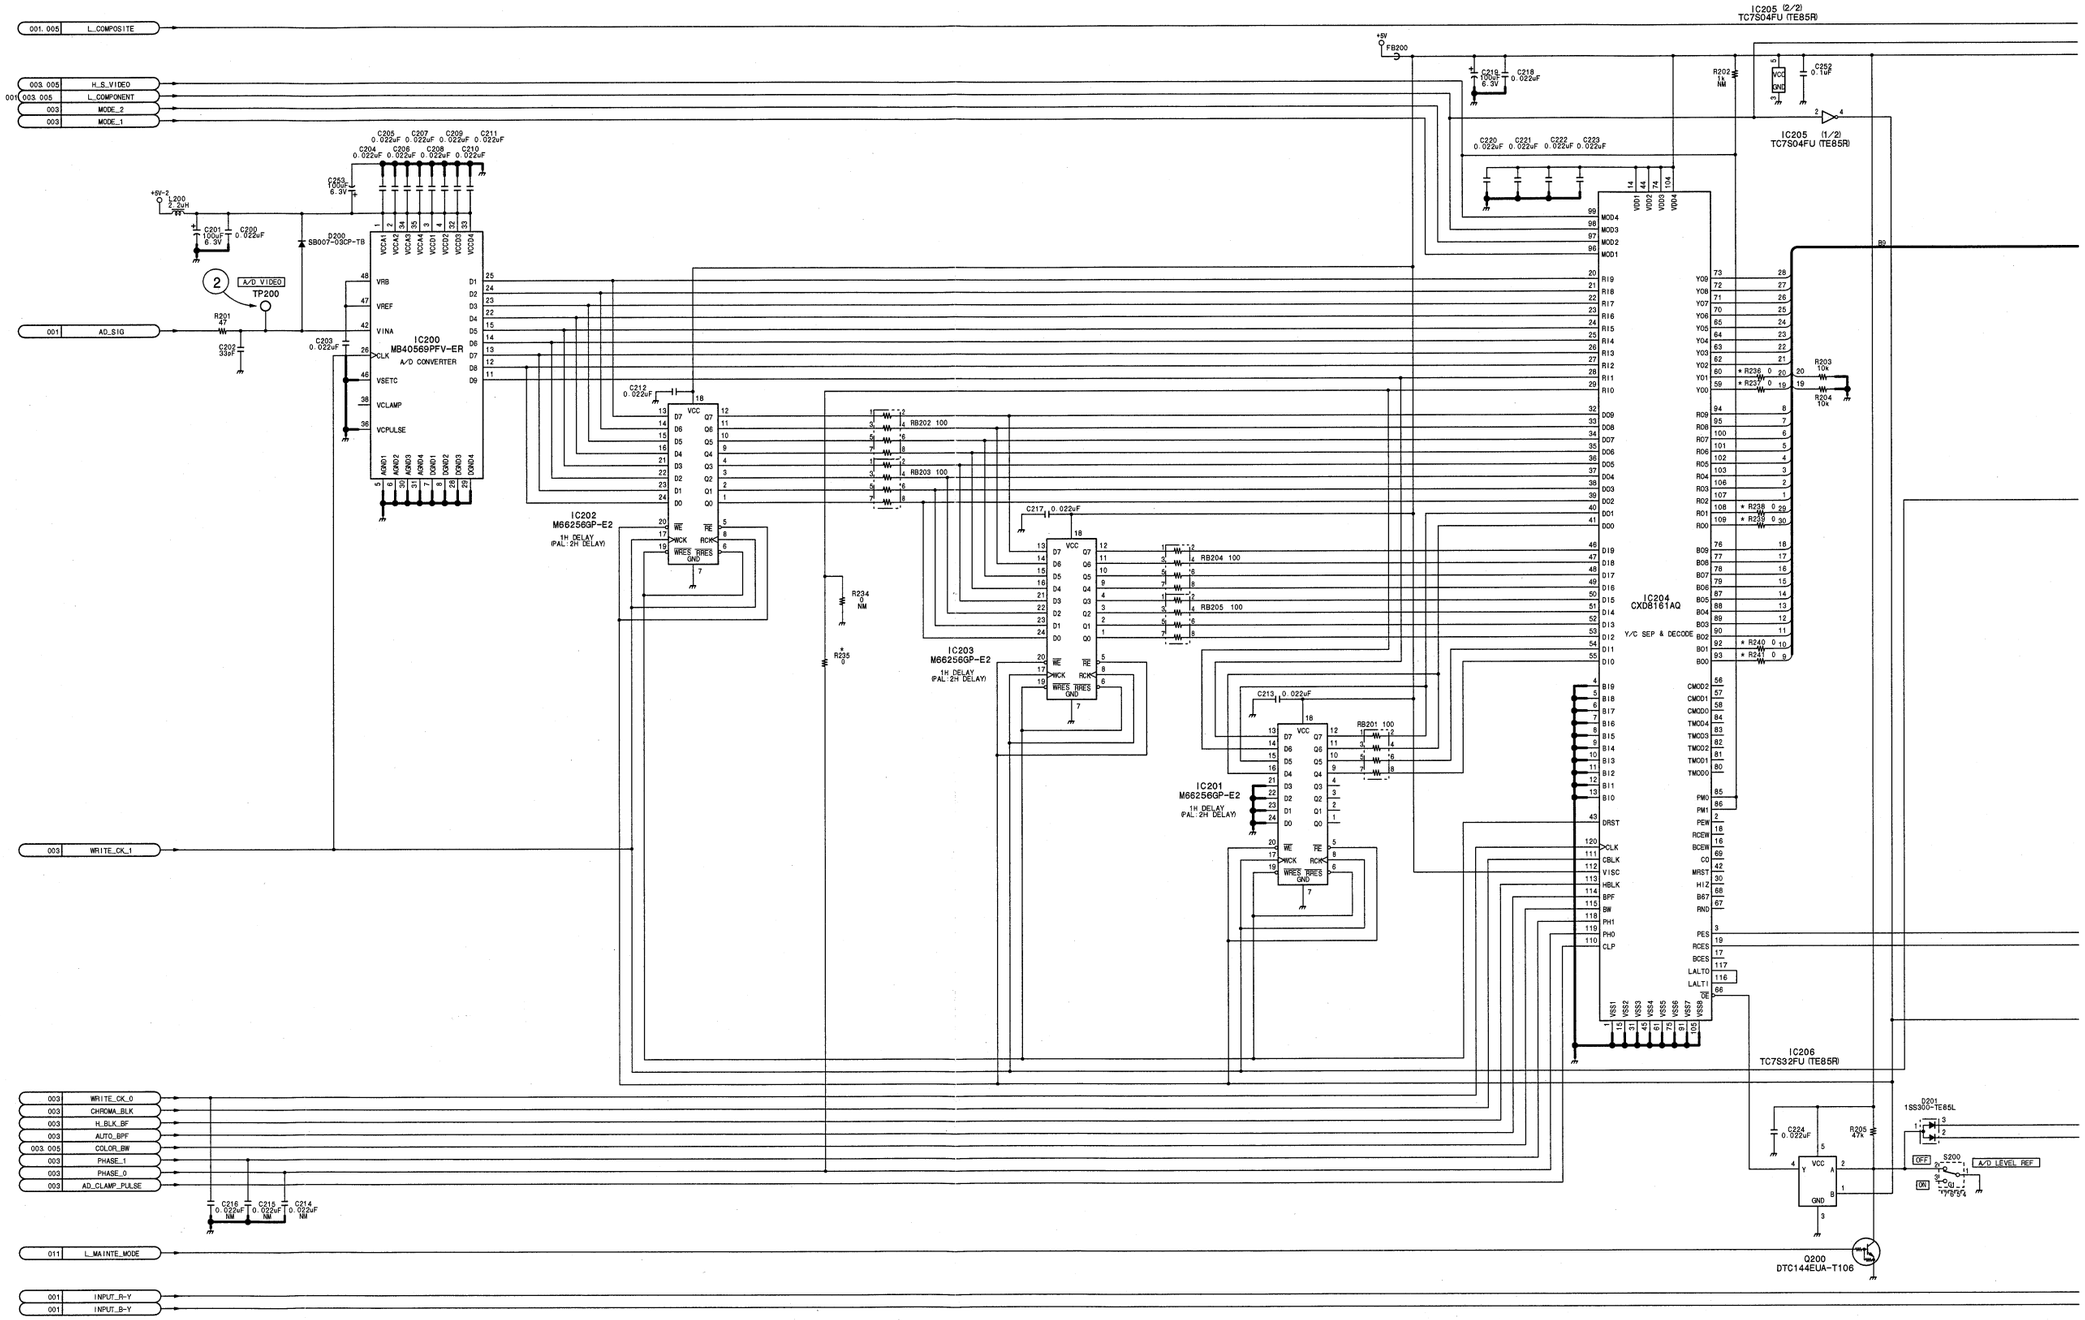
001 005 L_COMPOSITE
003 005 H_S_VIDEO
001 003 005 L_COMPONENT
003 MODE_2
003 MODE_1
001 AD_SIG
A/D VIDEO
TP200
IC200
MB40569PFV-ER
A/D CONVERTER
IC202
M66256GP-E2
1H DELAY
(PAL: 2H DELAY)
IC203
M66256GP-E2
1H DELAY
(PAL: 2H DELAY)
IC201
M66256GP-E2
1H DELAY
(PAL: 2H DELAY)
IC205 (2/2)
TC7S04FU (TE85R)
IC205 (1/2)
TC7S04FU (TE85R)
IC204
CXD8161AQ
Y/C SEP & DECODE
IC206
TC7S32FU (TE85R)
Q200
DTC144EUA-T106
D201
1SS310-TE85L
S200
A/D LEVEL REF
003 WRITE_CK_1
003 WRITE_CK_0
003 CHROMA_BLK
003 H_BLK_BF
003 AUTO_BPF
003 005 COLOR_BW
003 PHASE_1
003 PHASE_0
003 AD_CLAMP_PULSE
011 L_MAINTE_MODE
001 INPUT_R-Y
001 INPUT_B-Y

VPR-62/62P (2/12)

② TP200 A/D VIDEO (NTSC)

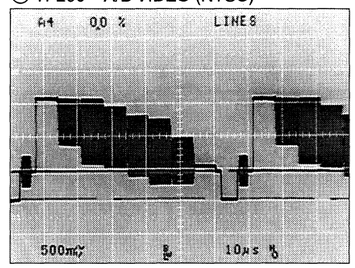

② TP200 A/D VIDEO (PAL)

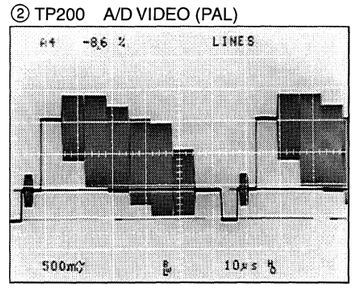

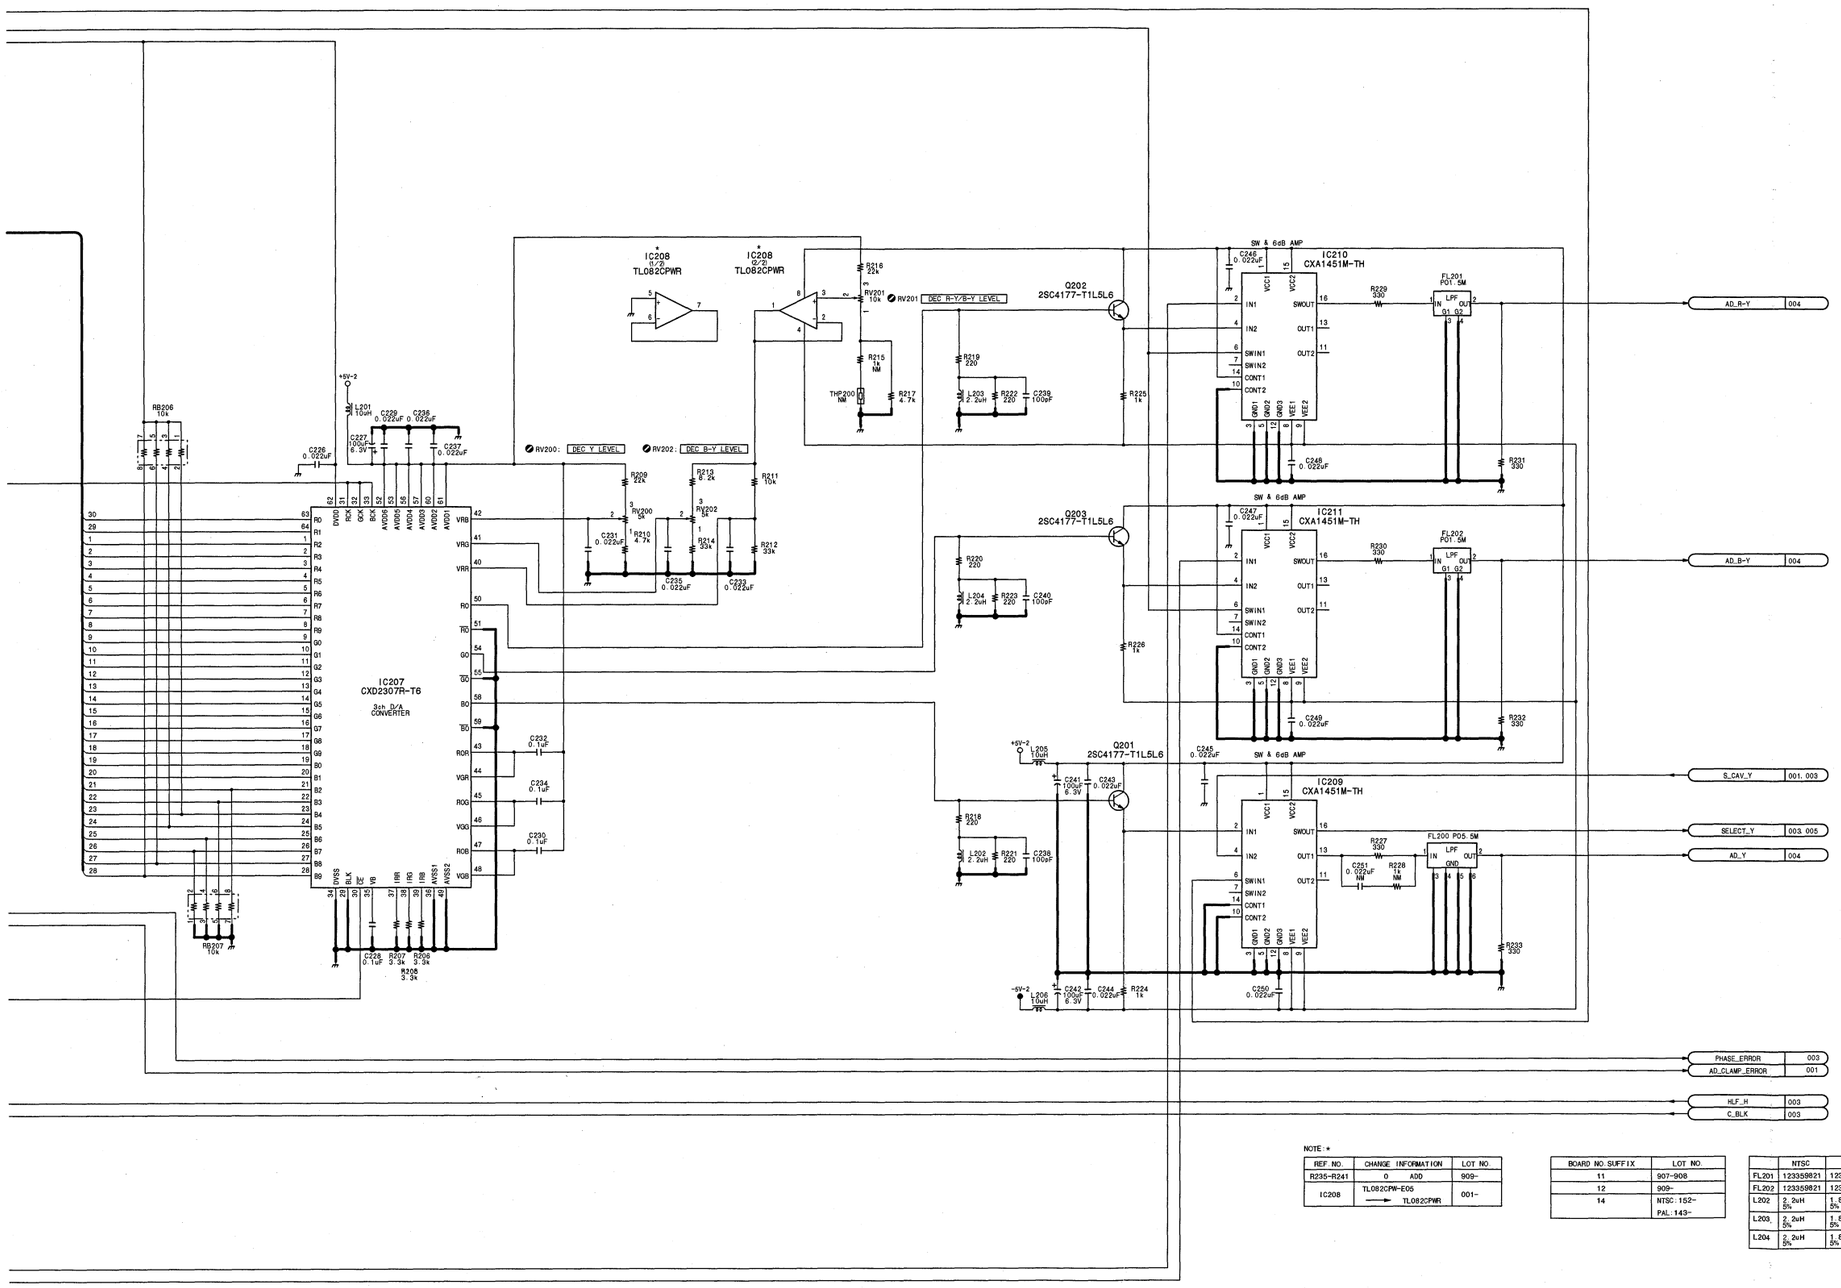

NOTE: *

REF. NO.	CHANGE INFORMATION	LOT NO.
R235-R241	0 ADD	909-
IC208	TL082CPW-E03 ⟶ TL082CPWR	001-

BOARD NO. SUFFIX	LOT NO.
11	907-908
12	909-
14	NTSC: 152- PAL: 143-

	NTSC	PAL	J
FL201	123359821	123359821	123359821
FL202	123359821	123359821	123359821
L202	2.2uH 5%	1.8uH 5%	2.2uH 5%
L203	2.2uH 5%	1.8uH 5%	2.2uH 5%
L204	2.2uH 5%	1.8uH 5%	2.2uH 5%

Analog video input • output process/reference

VPR-62/62P (2/12)

BOARD NO. 1-675-531-11, 12, 14
LOT NO. 907-
DSR-2000_VPR-62_014_2

VPR-62/62P (3/12)

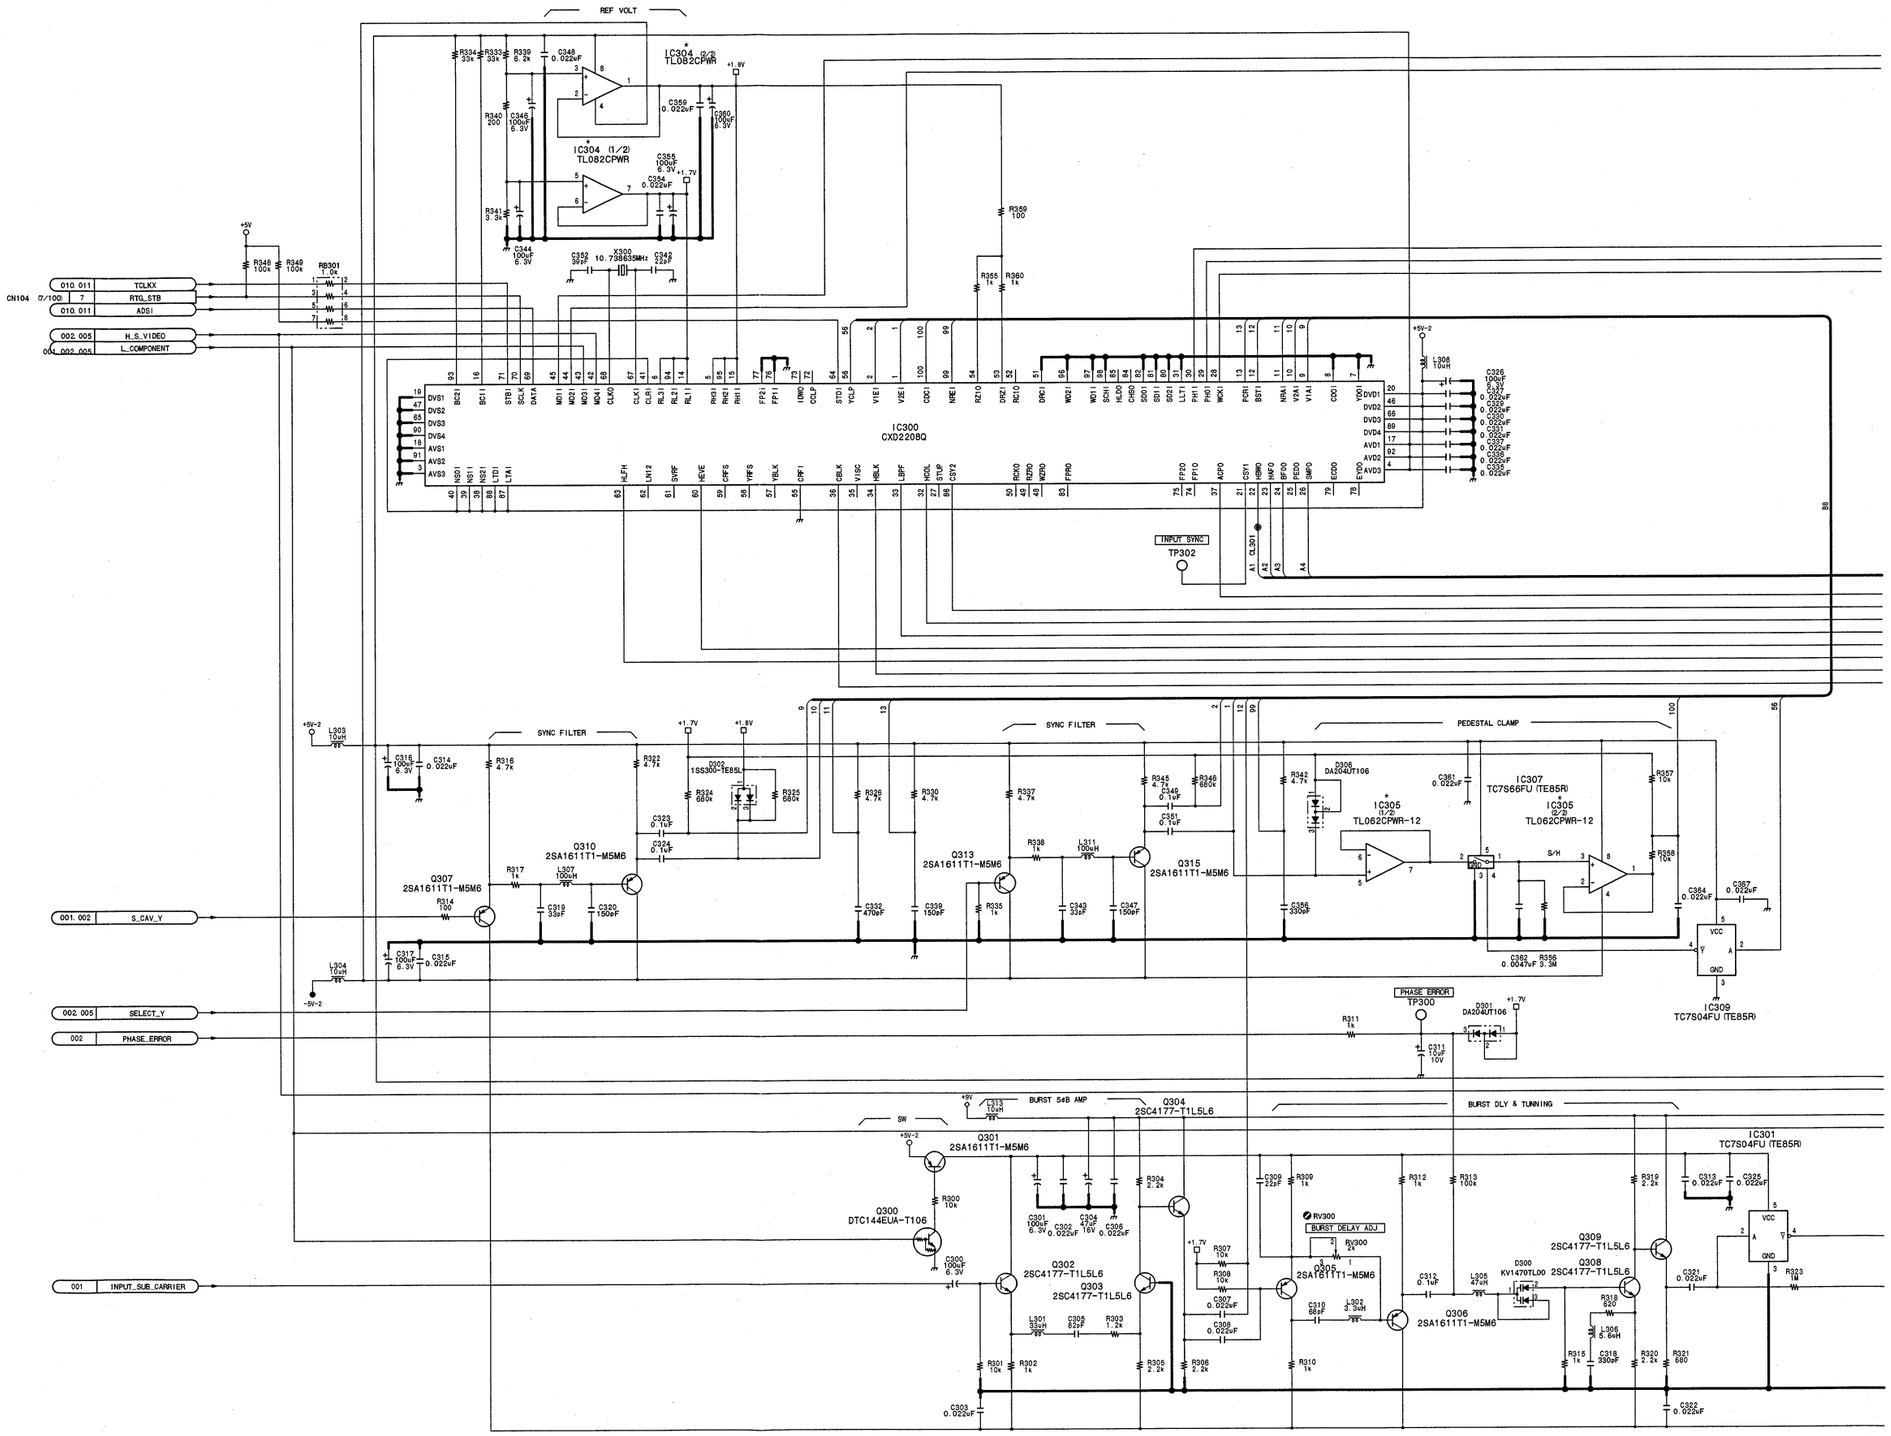

15-154

VPR-62/62P (3/12)

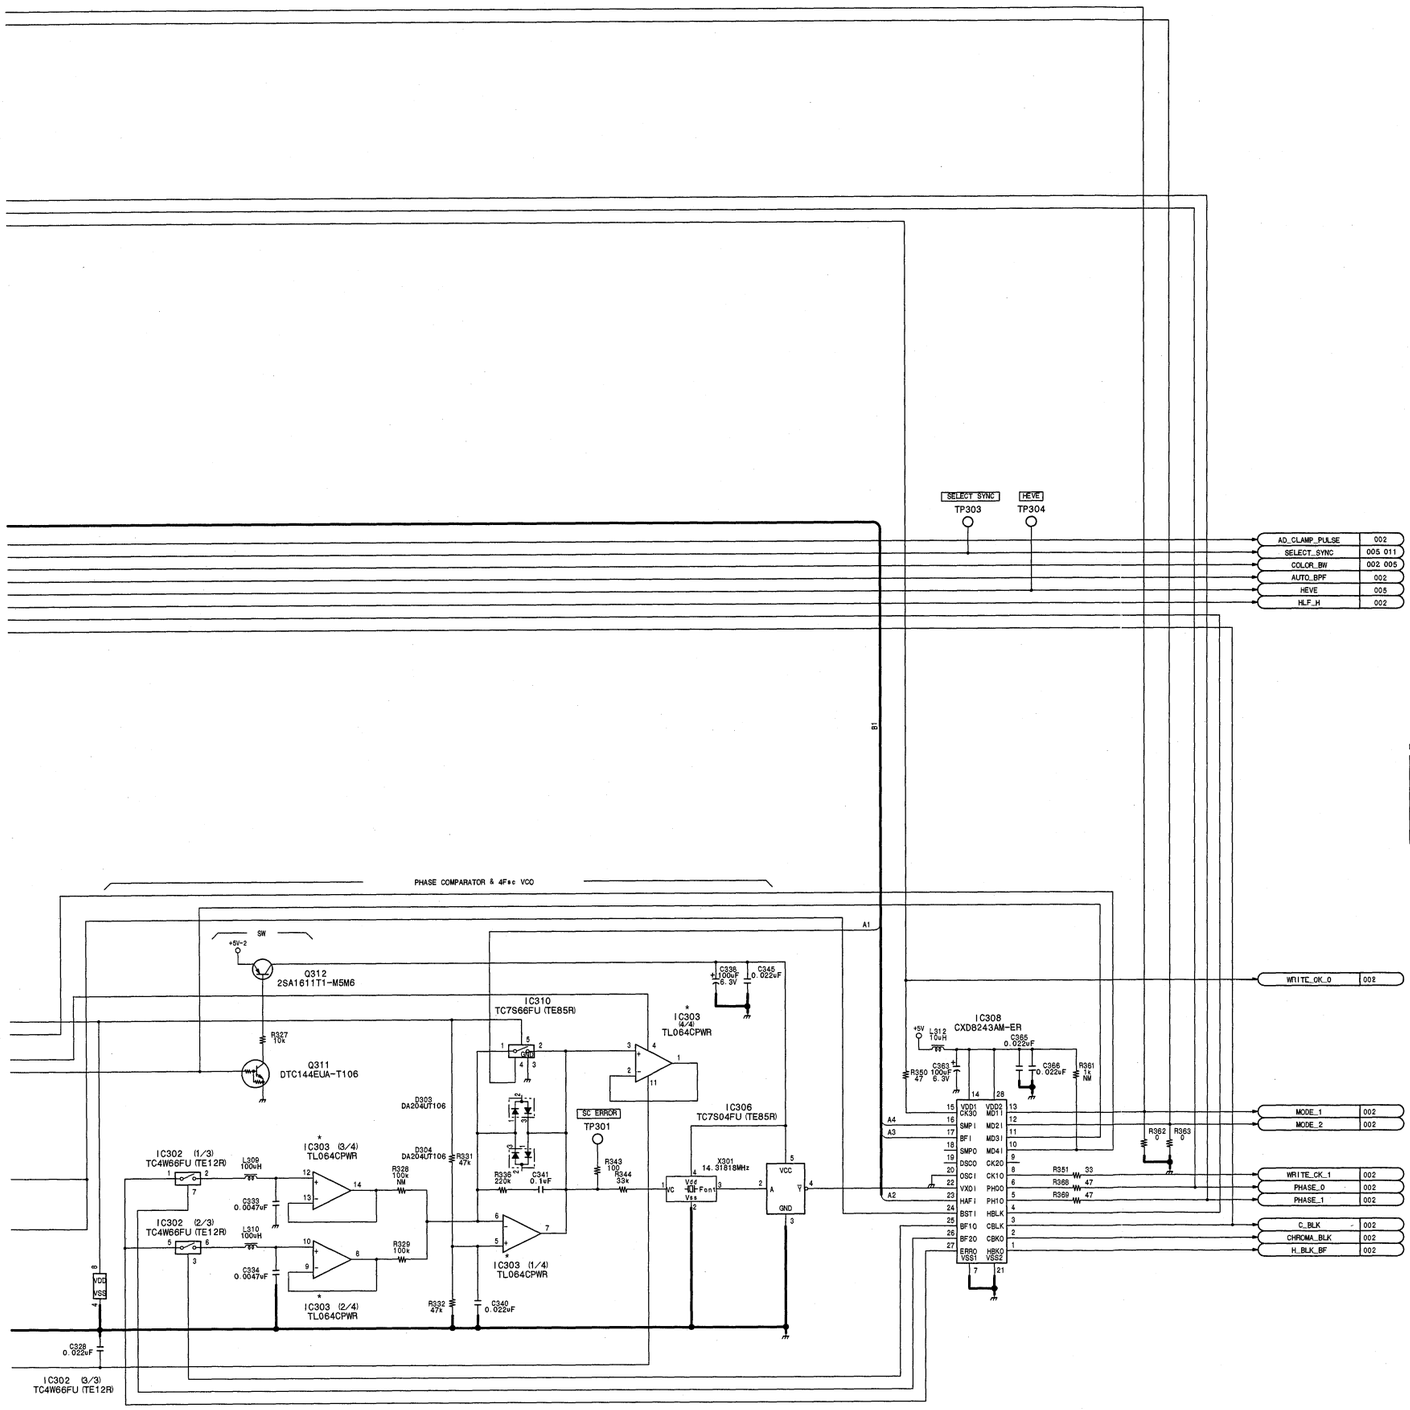

NOTE: *

REF. NO.	CHANGE INFORMATION	LOT NO.
IC303	TL064CPW-E05 → TL064CPWR	001-
IC304	TL082CPW-E05 → TL082CPWR	
IC305	TL062CPW → TL062CPWR-12	

	NTSC	PAL	J
C310	68pF 50V CH	22pF 50V CH	68pF 50V CH
C318	330pF 50V CH	220pF 50V CH	330pF 50V CH
D301	NM	DA204UT106	NM
L305	47uH 10%	33uH 10%	47uH 10%
R328	NM	330k 1/16W 0.5%	NM
R329	100k 1/16W 0.5%	330k 1/16W 0.5%	100k 1/16W 0.5%
R362	NM	0 0W	NM
R363	NM	0 0W	NM
X300	10.738635M	10.664135M	10.738635M
X301	14.31818MH	17.73447SM	14.31818MH

BOARD NO. SUFFIX	LOT NO.
11	907-908
12	909-
14	NTSC:152- PAL:143-

Analog video input • output process/reference

VPR-62/62P (3/12)

BOARD NO. 1-675-531-11, 12, 14
LOT NO. 907-
DSR-2000_VPR-62_014_3

VPR-62/62P (4/12)

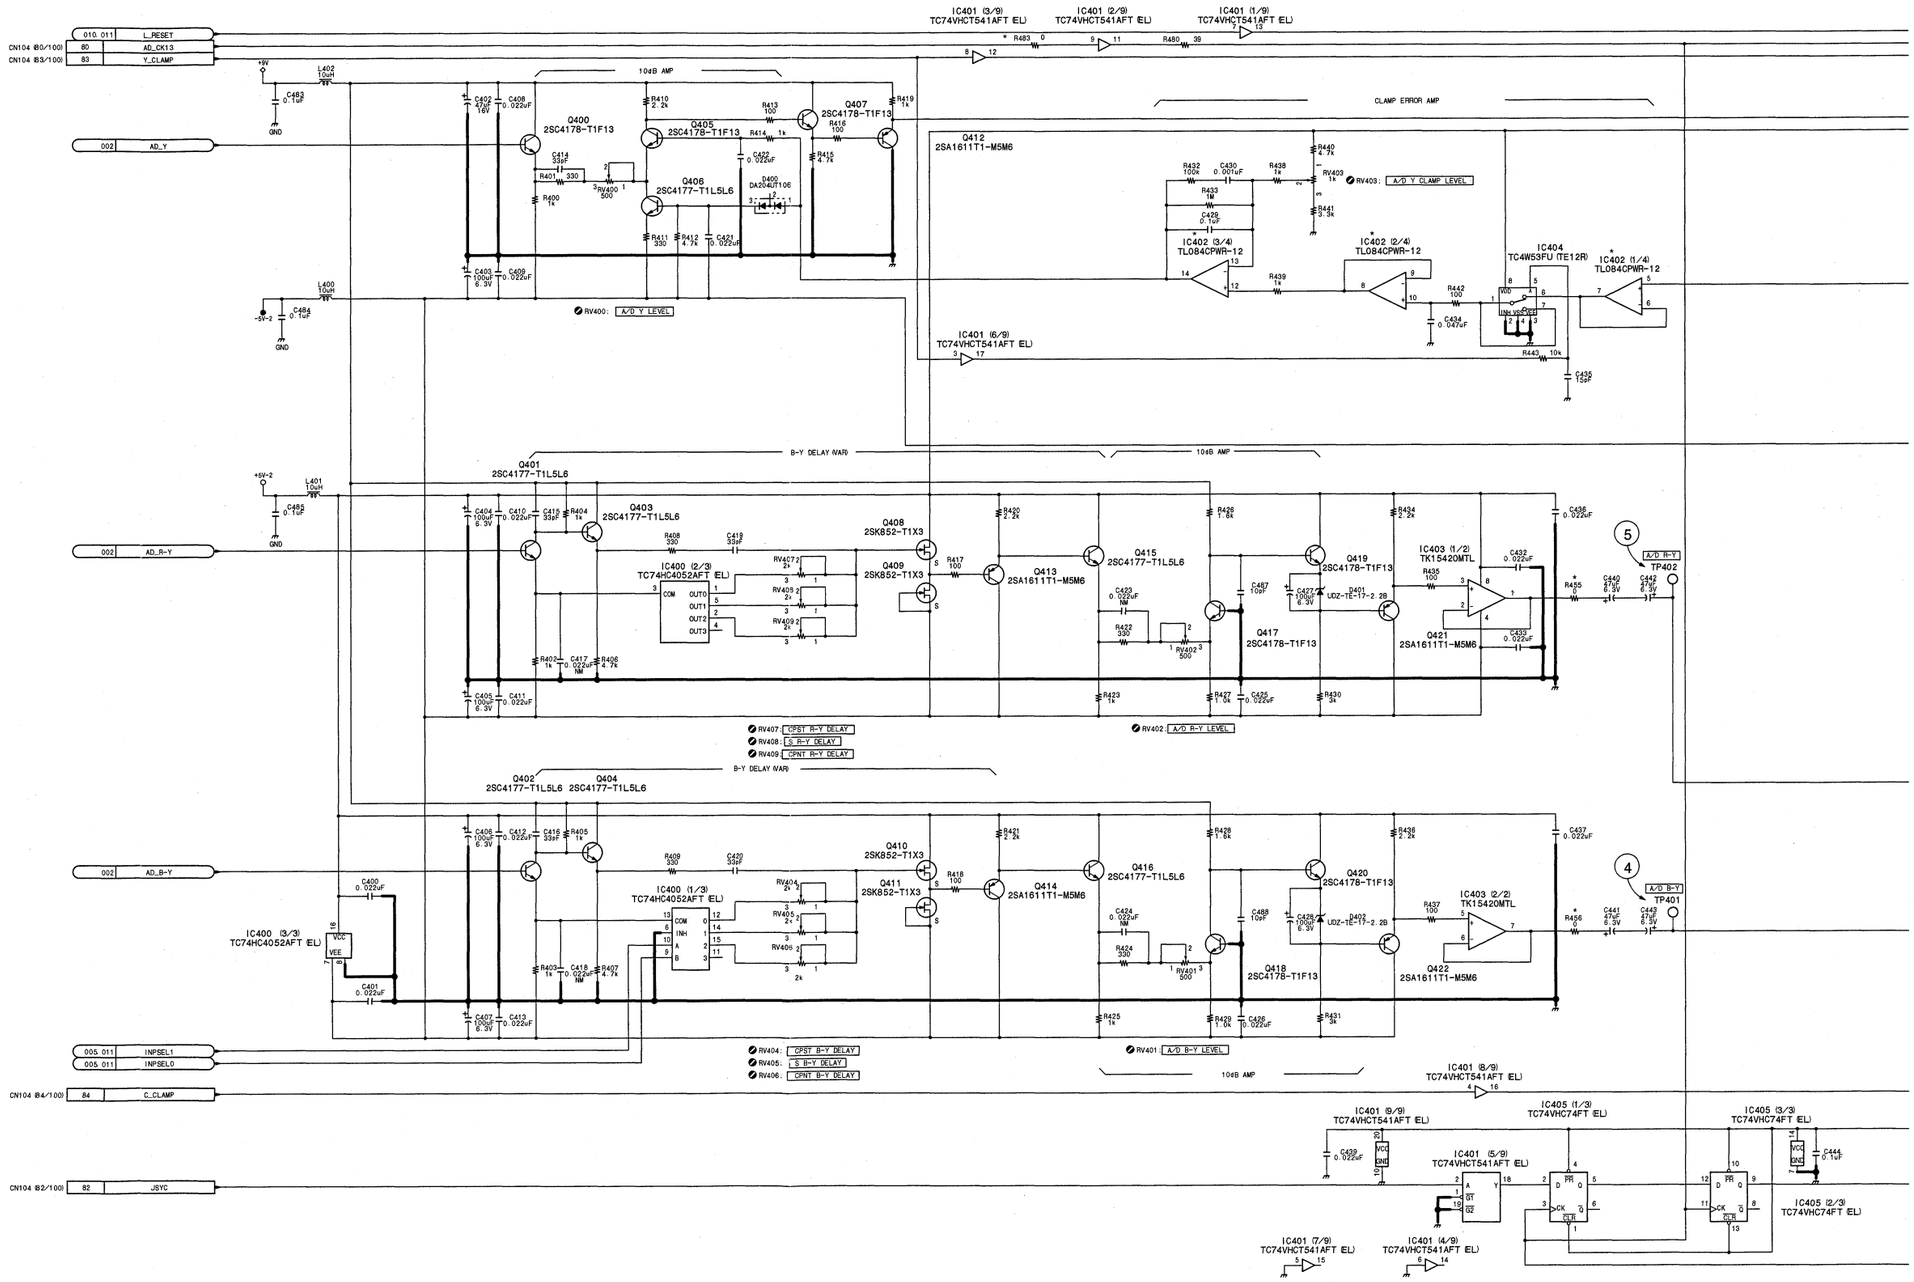

15-156

VPR-62/62P (4/12)

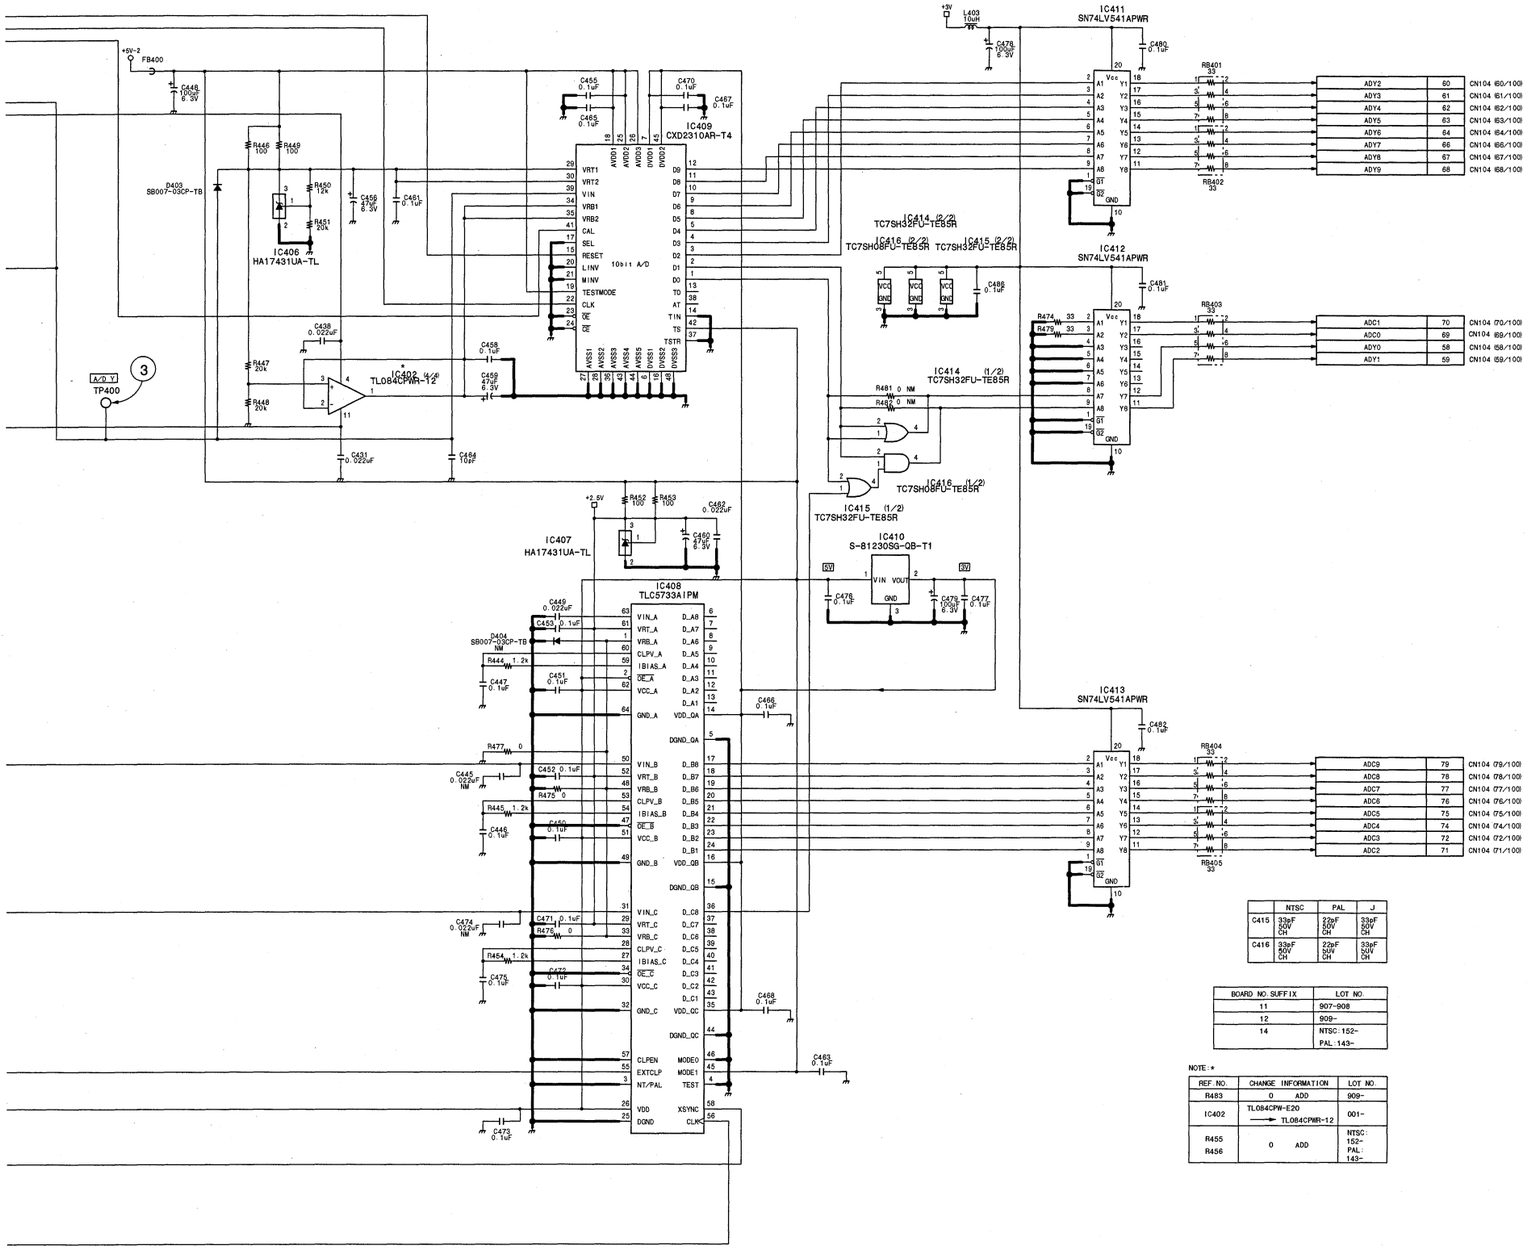

	NTSC	PAL	J
C415	33pF 50V CH	22pF 50V CH	33pF 50V CH
C416	33pF 50V CH	22pF 50V CH	33pF 50V CH

BOARD NO. SUFFIX	LOT NO.
11	907-908
12	909-
14	NTSC : 152- PAL : 143-

NOTE: *

REF. NO.	CHANGE INFORMATION	LOT NO.
R483	0 ADD	909-
IC402	TL084CPW-E20 → TL084CPWR-12	001-
R455 R456	0 ADD	NTSC : 152- PAL : 143-

③ TP400 A/D Y (NTSC)

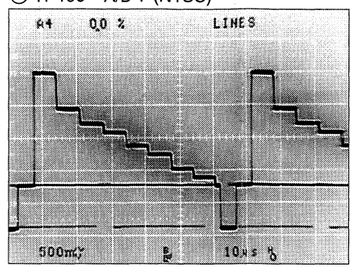

③ TP400 A/D Y (PAL)

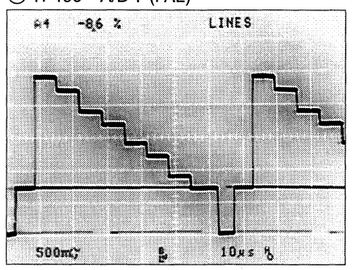

④ TP401 A/D B-Y (NTSC)

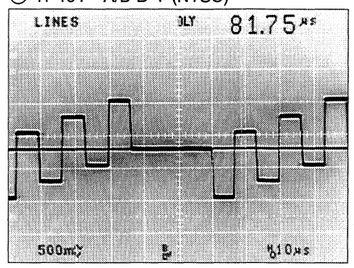

④ TP401 A/D B-Y (PAL)

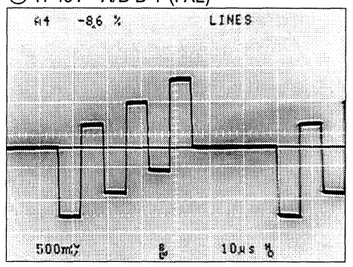

⑤ TP402 A/D R-Y (NTSC)

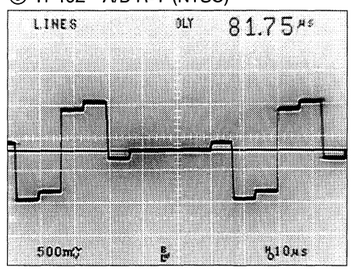

⑤ TP402 A/D R-Y (PAL)

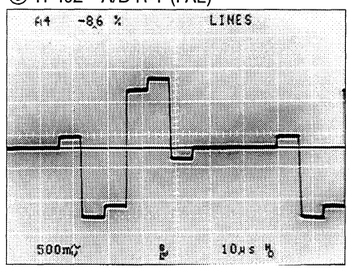

Analog video input • output process/reference

VPR-62/62P (4/12)

BOARD NO. 1-675-531-11, 12, 14
LOT NO. 907-
DSR-2000_VPR-62_014_4

VPR-62/62P (5/12)

	EXT	NPS2	NPS1	CAM
COMPOSITE	L	L	L	H
COMPONENT	L	L	H	H
S-VIDEO	L	H	L	H
RGB	L	H	H	H
SDI	H	L	L	H
QSDI	H	L	H	H
DV	H	H	L	H
NO-USE	H	H	H	H
RSG	X	X	X	L

15-158

VPR-62/62P (5/12)

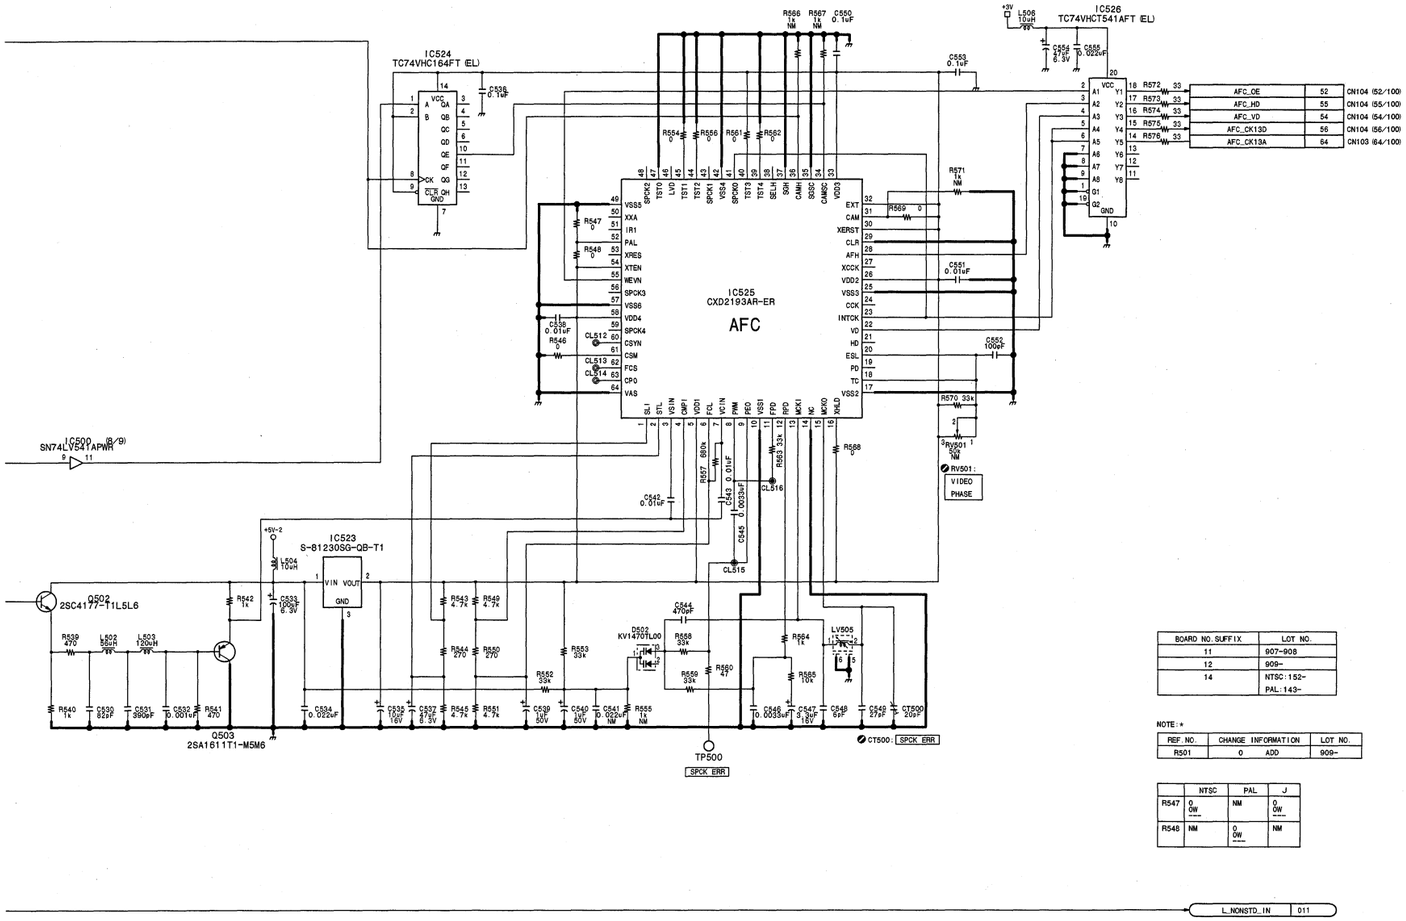

BOARD NO. SUFFIX	LOT NO.
11	907~908
12	909~
14	NTSC:152~ PAL:143~

NOTE:*

REF. NO.	CHANGE INFORMATION	LOT NO.
R501	0 ADD	909~

	NTSC	PAL	J
R547	0 0W	NM	0 0W
R548	NM	0 0W	NM

Analog video input • output process/reference

VPR-62/62P (5/12)

BOARD NO. 1-675-531-11, 12, 14
LOT NO. 907-
DSR-2000_VPR-62_014_5

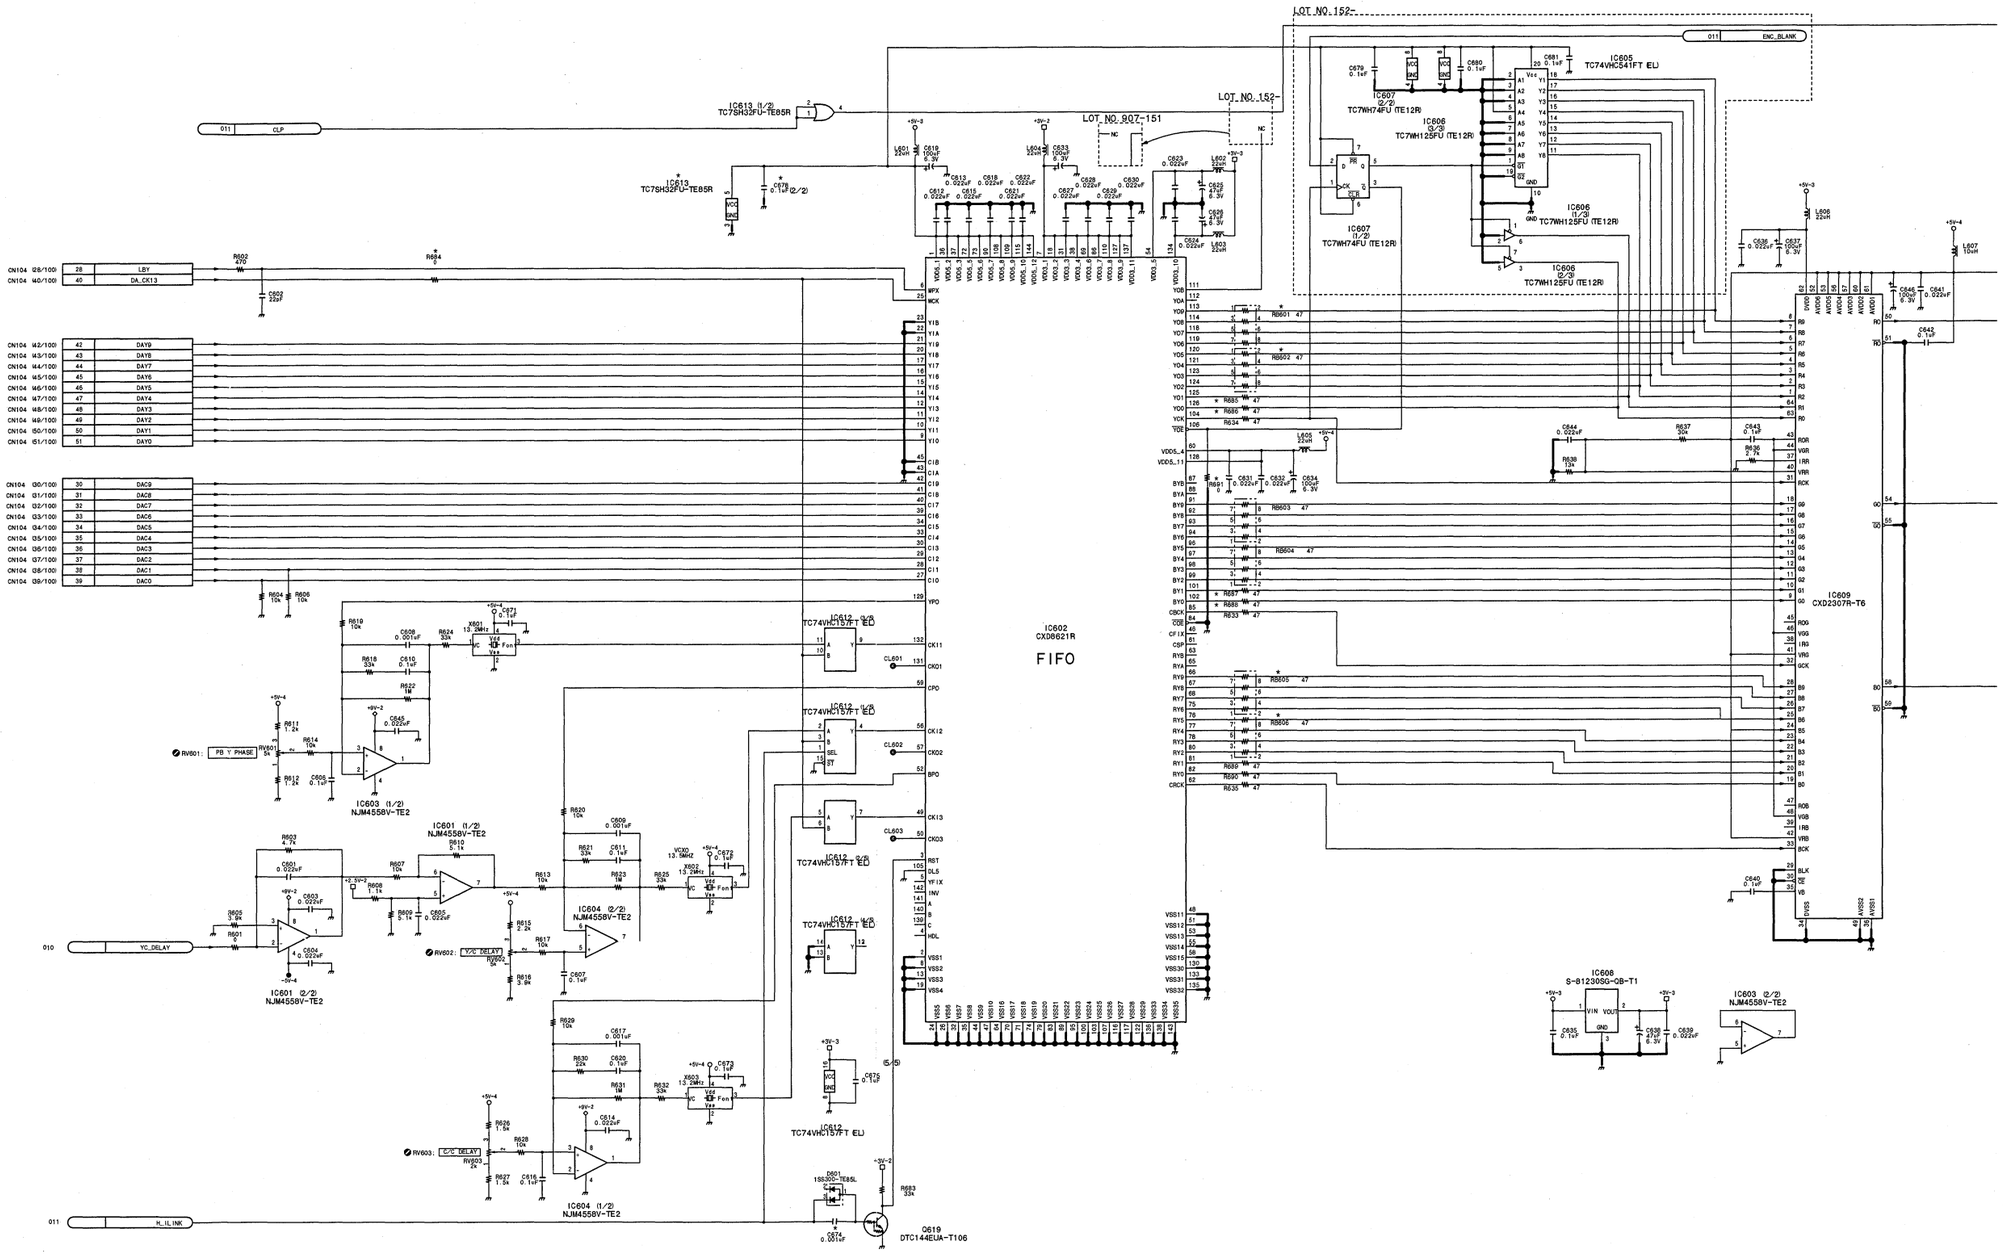
LOT NO.152-
LOT NO.907-151
LOT NO.152
011 CLP
011 ENC_BLANK
IC613 (1/2) TC7SH32FU-TE85R
IC613 TC7SH32FU-TE85R
IC605 TC74VHC541FT (EL)
IC607 (1/2) TC7WH74FU (TE12R)
IC606 (1/2) TC7WH125FU (TE12R)
IC607 TC7WH74FU (TE12R)
IC606 (2/2) TC7WH125FU (TE12R)
IC606 (1/2) TC7WH125FU (TE12R)
IC602 CXD9621R FIFO
IC609 CXD2307R-T6
IC608 S-81230SG-QB-T1
IC603 (2/2) NJM4558V-TE2
IC601 (1/2) NJM4558V-TE2
IC601 (2/2) NJM4558V-TE2
IC604 (2/2) NJM4558V-TE2
IC604 (1/2) NJM4558V-TE2
IC612 TC74VHC157FT (EL)
CN104 28/100 LBY
CN104 40/100 DA_CK13
CN104 42/100 DAY9
CN104 43/100 DAY8
CN104 44/100 DAY7
CN104 45/100 DAY6
CN104 46/100 DAY5
CN104 47/100 DAY4
CN104 48/100 DAY3
CN104 49/100 DAY2
CN104 50/100 DAY1
CN104 51/100 DAY0
CN104 30/100 DAC9
CN104 31/100 DAC8
CN104 32/100 DAC7
CN104 33/100 DAC6
CN104 34/100 DAC5
CN104 35/100 DAC4
CN104 36/100 DAC3
CN104 37/100 DAC2
CN104 38/100 DAC1
CN104 39/100 DAC0
010 YC_DELAY
011 H_IL INK
RV601: PB Y PHASE
RV602: Y/C DELAY
RV603: C/C DELAY
Q619 DTC144EUA-T106
D601 1SS307-TE85L
(5/5)

VPR-62/62P (6/12)

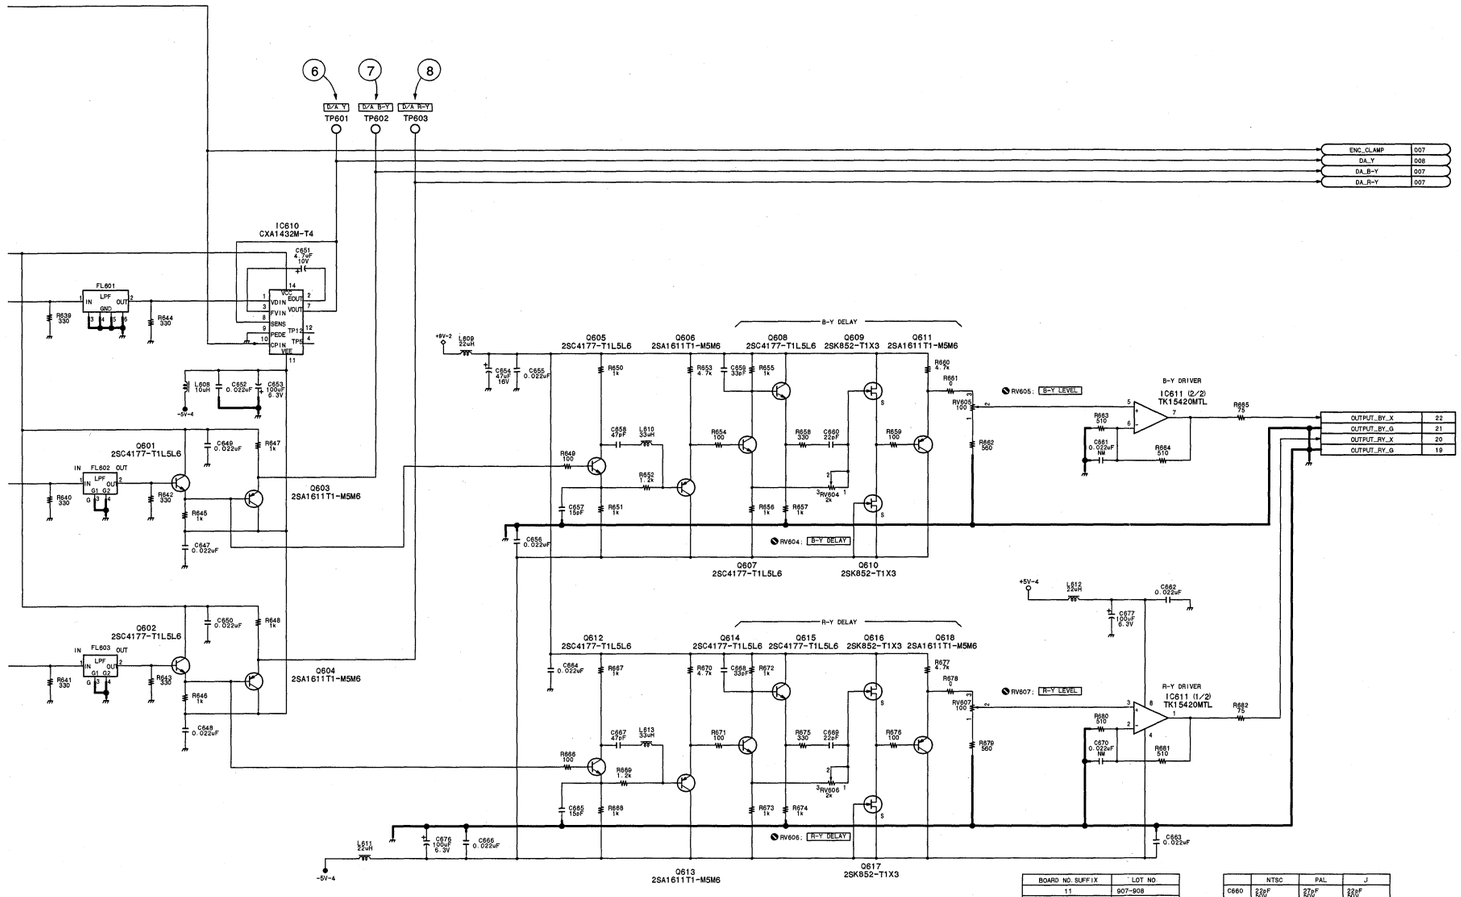

BOARD NO. SUFFIX	LOT NO.
11	907~908
12	909~
14	NTSC:152~ PAL:143~

NOTE : ★

REF. NO.	CHANGE INFORMATION	LOT NO.
C674	0.1u1 ⟶ 0.001u1	909~
C678	0.1u1 ADD	
IC613	TC79H33FU-TE85R ADD	
R684	0 ADD	
R685~R690	47 ADD	
R8501~R8506	47 ADD	
R691	0 ADD	PAL 143~

	NTSC	PAL	J
C660	22pF 50V CH	27pF 50V CH	22pF 50V CH
C669	22pF 50V CH	27pF 50V CH	22pF 50V CH
C679	0.1uF 16V B	NM	0.1uF 16V B
C680	0.1uF 16V B	NM	0.1uF 16V B
C681	0.1uF 16V B	NM	0.1uF 16V B
FL602	123359821	123359921	123359821
FL603	123359821	123359921	123359821
IC605	TC74VHC541	NM	TC74VHC541
IC606	TC7WH125FU	NM	TC7WH125FU
IC607	TC7WH74FU (TE12R)	NM	TC7WH74FU (TE12R)
R661	0 OW ~~~	180 1/16W 0.5%	0 OW ~~~
R662	560 1/16W 0.5%	360 1/16W 0.5%	560 1/16W 0.5%
R678	0 OW ~~~	180 1/16W 0.5%	0 OW ~~~
R679	560 1/16W 0.5%	360 1/16W 0.5%	560 1/16W 0.5%
R691	NM	0 ~~~ ~~~	NM

⑥ TP601 D/A Y (NTSC)

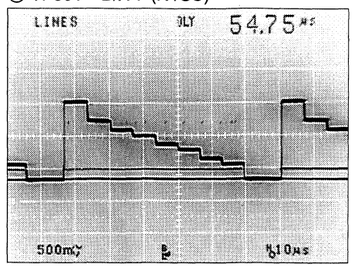

⑥ TP601 D/A Y (PAL)

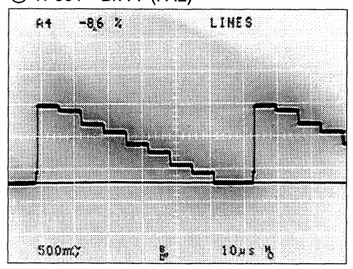

⑦ TP602 D/A B-Y (NTSC)

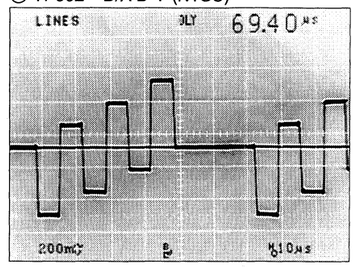

⑦ TP602 D/A B-Y (PAL)

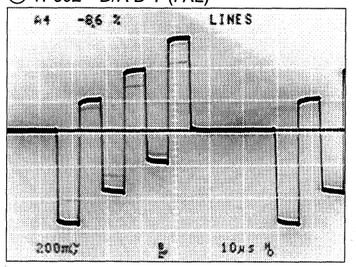

⑧ TP603 D/A R-Y (NTSC)

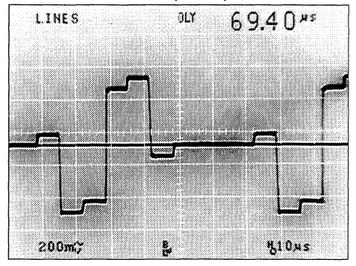

⑧ TP603 D/A R-Y (PAL)

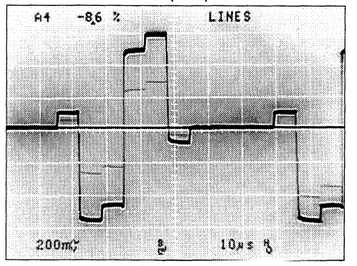

Analog video input • output process/reference

VPR-62/62P (6/12)

BOARD NO. 1-675-531-11, 12, 14
LOT NO. 907-
DSR-2000_VPR-62_014_6

VPR-62/62P (7/12)

BOARD NO. SUFFIX	LOT NO.
11	907-908
12	909-
14	NTSC:152- PAL:143-

NOTE:*

REF.NO.	CHANGE INFORMATION	LOT NO.
IC704	TL084CPWR-E20 ⟶ TL084CPWR-12	001-
IC707	TL082CPWR-E05 ⟶ TL082CPWR	

	NTSC	PAL	J
C714	110pF 50V CH	150pF 50V CH	110pF 50V CH
C742	27pF 50V CH	33pF 50V CH	27pF 50V CH
C743	27pF 50V CH	33pF 50V CH	27pF 50V CH
C745	56pF 50V CH	68pF 50V CH	56pF 50V CH
C746	56pF 50V CH	68pF 50V CH	56pF 50V CH
C747	27pF 50V CH	33pF 50V CH	27pF 50V CH
C748	27pF 50V CH	33pF 50V CH	27pF 50V CH
C753	7pF 50V CH	4pF 50V CH	7pF 50V CH
C754	NM	10pF 50V CH	NM
L705	47uH 10%	27uH 5%	47uH 10%
L706	47uH 10%	27uH 5%	47uH 10%
L707	47uH 10%	27uH 5%	47uH 10%
L708	47uH 10%	27uH 5%	47uH 10%
L710	NM	22uH 10%	NM
R706	5.1k 1/16W 0.5%	10k 1/16W 0.5%	5.1k 1/16W 0.5%
R716	33k 1/16W 0.5%	20k 1/16W 0.5%	33k 1/16W 0.5%
R752	NM	1k 1/16W 5%	NM

Analog video input • output process/reference

VPR-62/62P (7/12)

BOARD NO. 1-675-531-11, 12, 14
LOT NO. 907-
DSR-2000_VPR-62_014_7

VPR-62/62P (8/12)

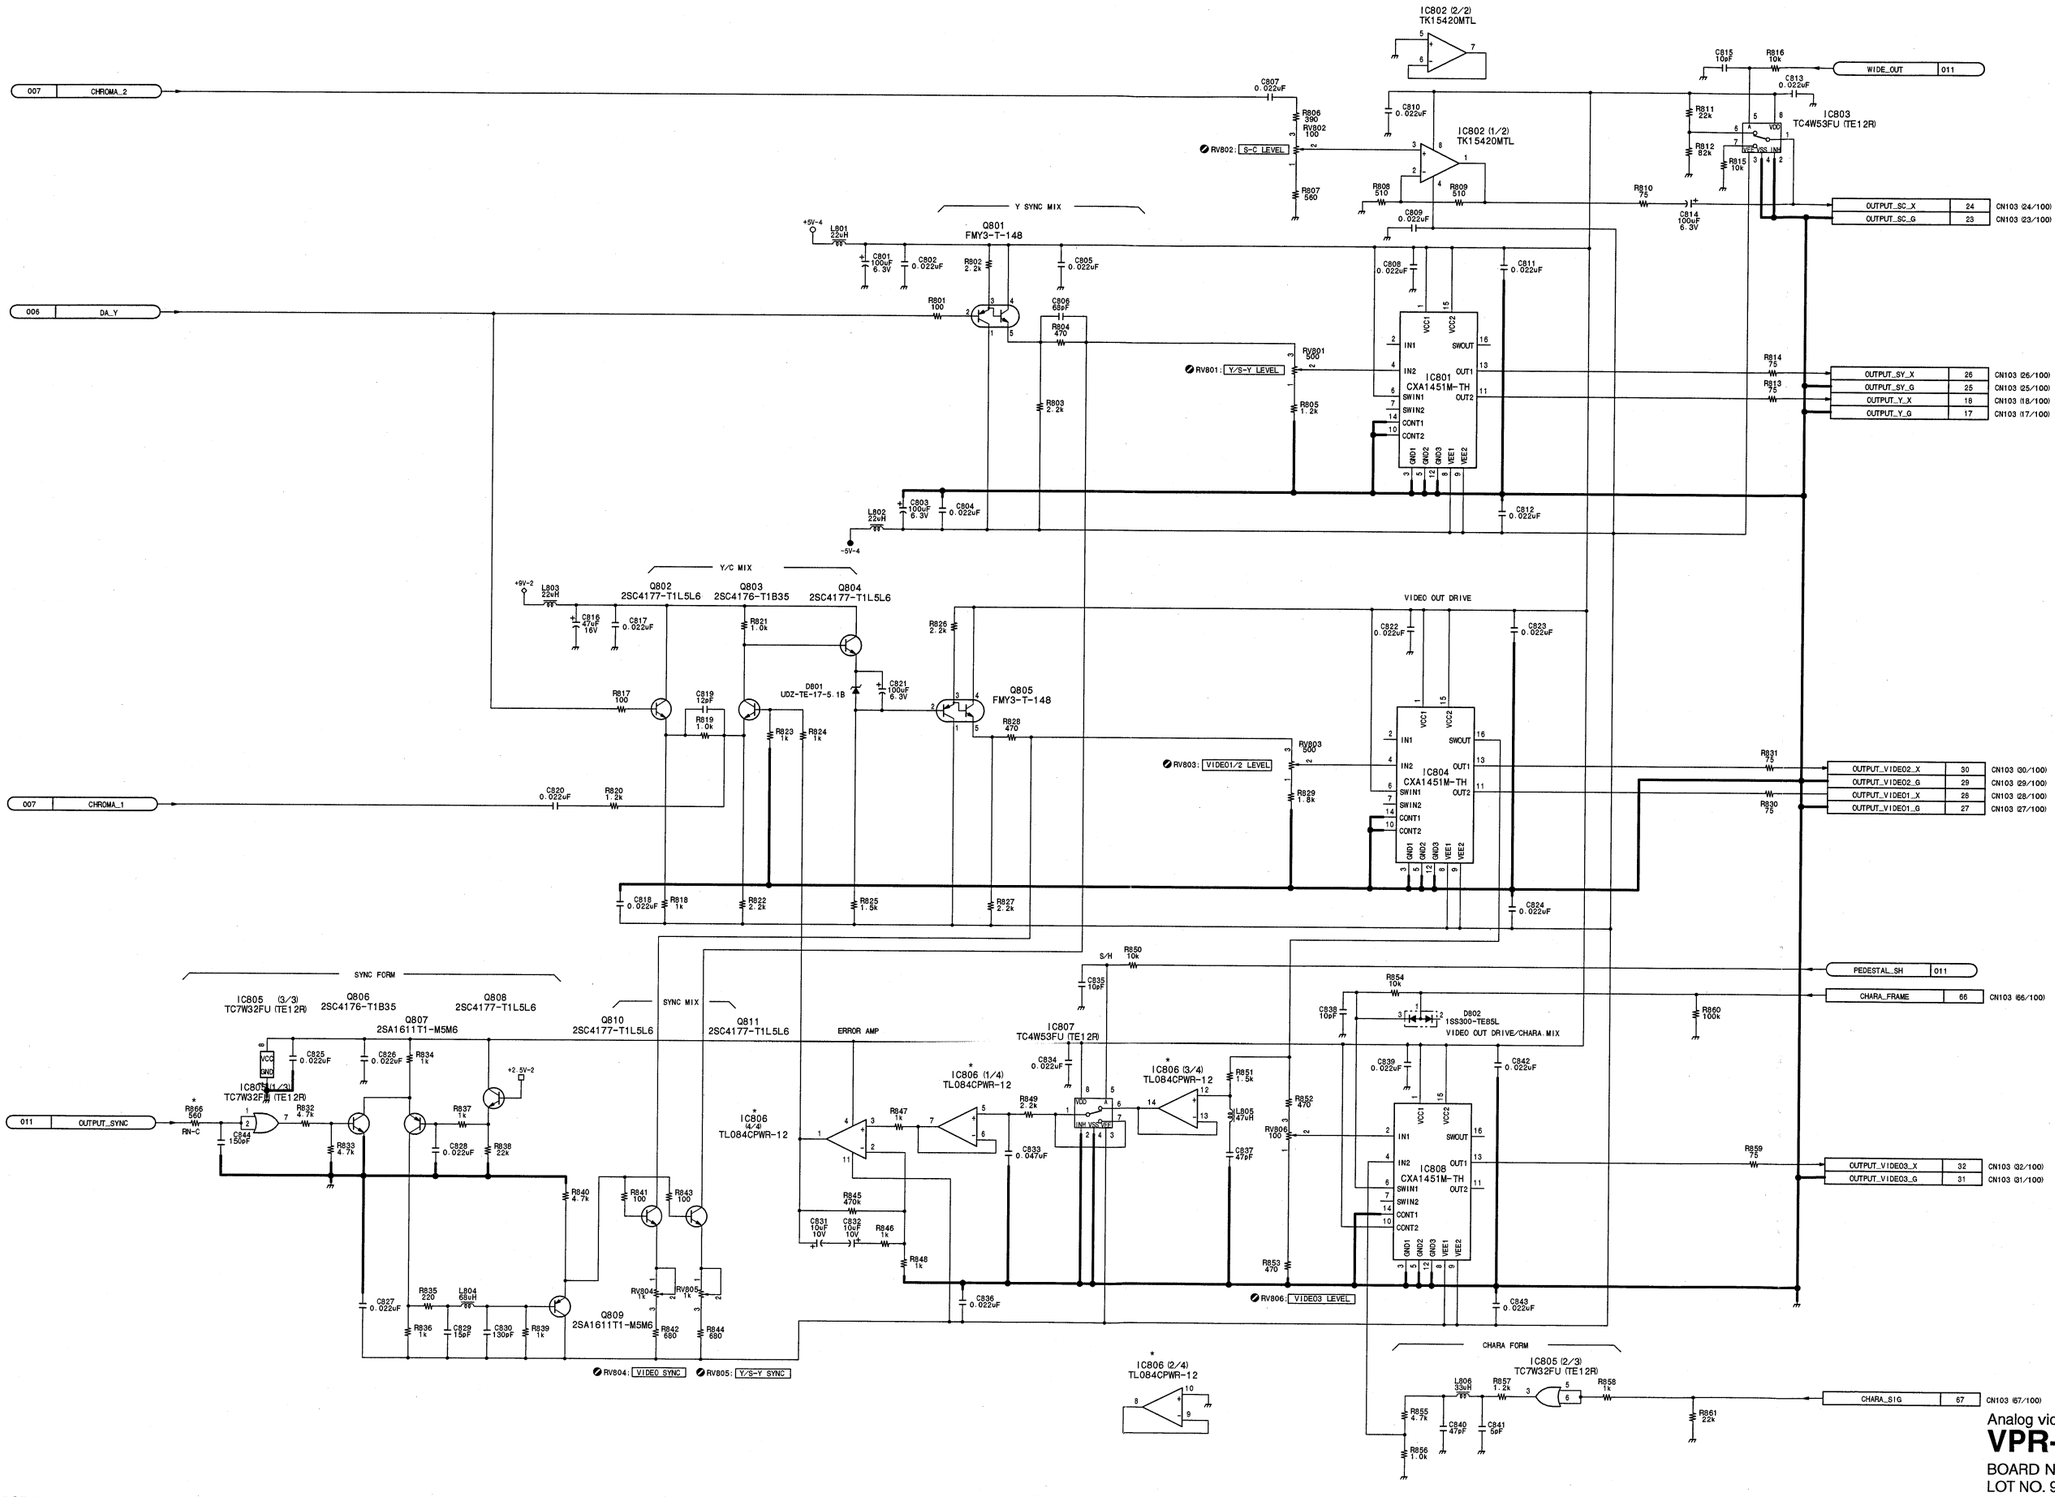

NOTE: *

REF. NO.	CHANGE INFORMATION	LOT NO.
R866	1K-560	909-
IC806	TL084CPW-E20 ⟵ TL084CPWR-12	001-

	NTSC	PAL	J
C830	130pF 50V CH	220pF 50V CH	130pF 50V CH
C837	47pF 50V CH	27pF 50V CH	47pF 50V CH
L804	68uH 10%	100uH 10%	68uH 10%

BOARD NO. SUFFIX	LOT NO.
11	907-908
12	909-
14	NTSC: 152- PAL: 143-

Analog video input • output process/reference

VPR-62/62P (8/12)

BOARD NO. 1-675-531-11, 12, 14
LOT NO. 907-
DSR-2000_VPR-62_014_8

DSR-2000/2000P

15-163

15-163

A B C D E F G H

1 2 3 4 5

VPR-62/62P (9/12)

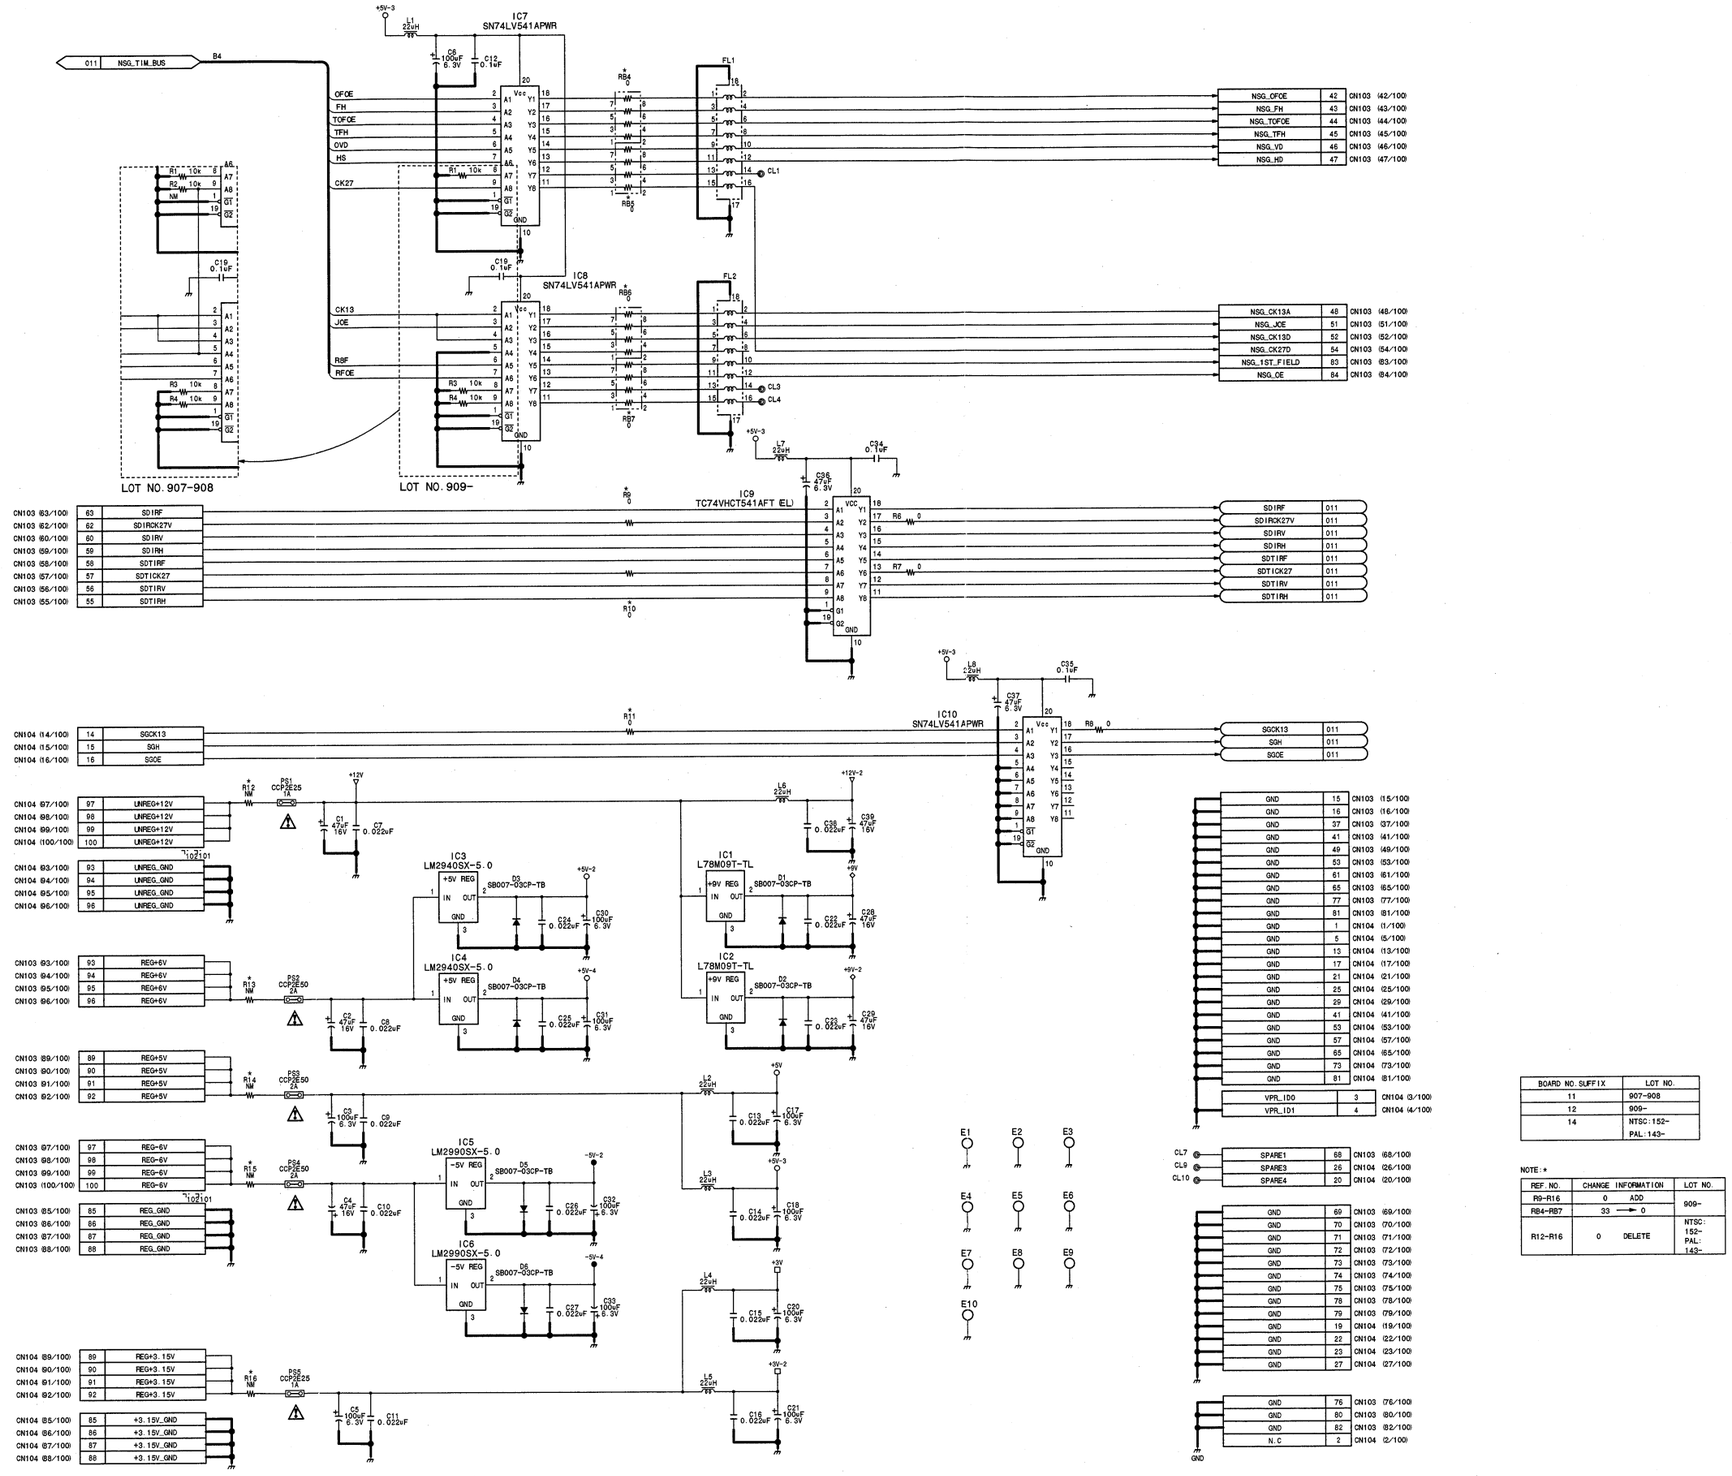

BOARD NO. SUFFIX	LOT NO.
11	907-908
12	909-
14	NTSC:152- PAL:143-

NOTE:*

REF. NO.	CHANGE INFORMATION	LOT NO.
R9-R16	0 ADD	909-
RB4-RB7	33 → 0	
R12-R16	0 DELETE	NTSC:152- PAL:143-

Analog video input • output process/reference

VPR-62/62P (9/12)

BOARD NO. 1-675-531-11, 12, 14
LOT NO. 907-
DSR-2000_VPR-62_014_9

15-164

VPR-62/62P (10/12)

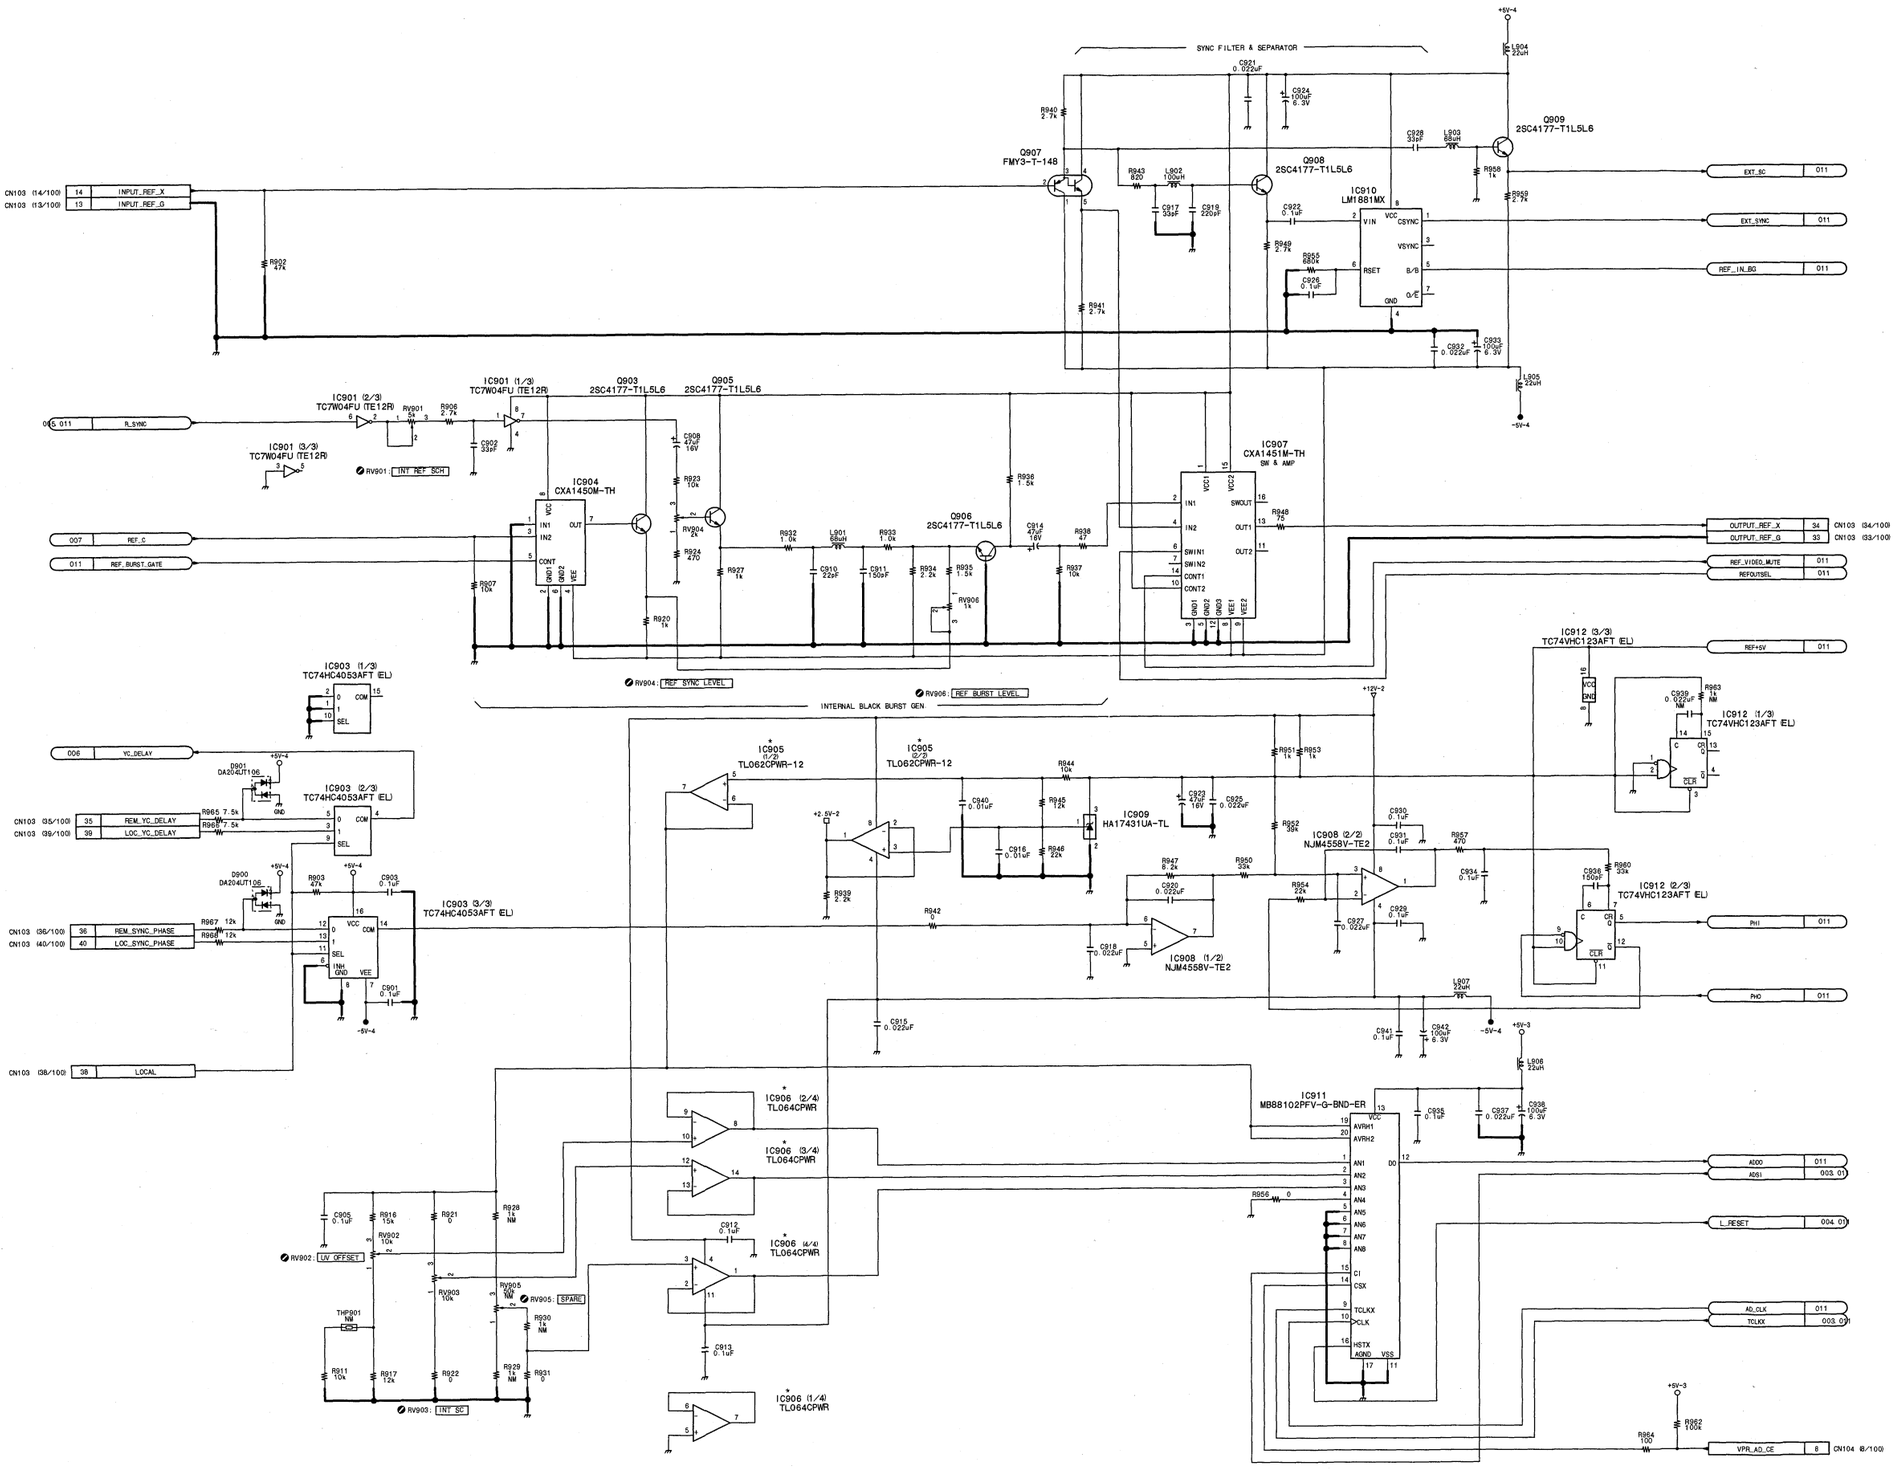

NOTE : *

REF. NO.	CHANGE INFORMATION	LOT NO.
IC905	TL062CPW ——→TL062CPWR-12	001-
IC906	TL064CPW-E05 ——→TL064CPWR	

	NTSC	PAL	J
C911	150pF 50V CH	220pF 50V CH	150pF 50V CH
C928	33pF 50V CH	22pF 50V CH	33pF 50V CH
L901	68uH 10%	82uH 5%	68uH 10%
R906	2.7k 1/16W 0.5%	1.5k 1/16W 0.5%	2.7k 1/16W 0.5%
R911	NM	10k 1/16W 2%	NM
R916	15k 1/16W 0.5%	6.8k 1/16W 0.5%	15k 1/16W 0.5%
R917	12k 1/16W 0.5%	12k 1/16W 0.5%	12k 1/16W 0.5%
THP901	NM	180935222	NM

BOARD NO. SUFFIX	LOT NO.
11	907-908
12	909-
14	NTSC: 152- PAL: 143-

Analog video input • output process/reference

VPR-62/62P (10/12)

BOARD NO. 1-675-531-11, 12, 14
LOT NO. 907-
DSR-2000_VPR-62_014_10

VPR-62/62P (11/12)

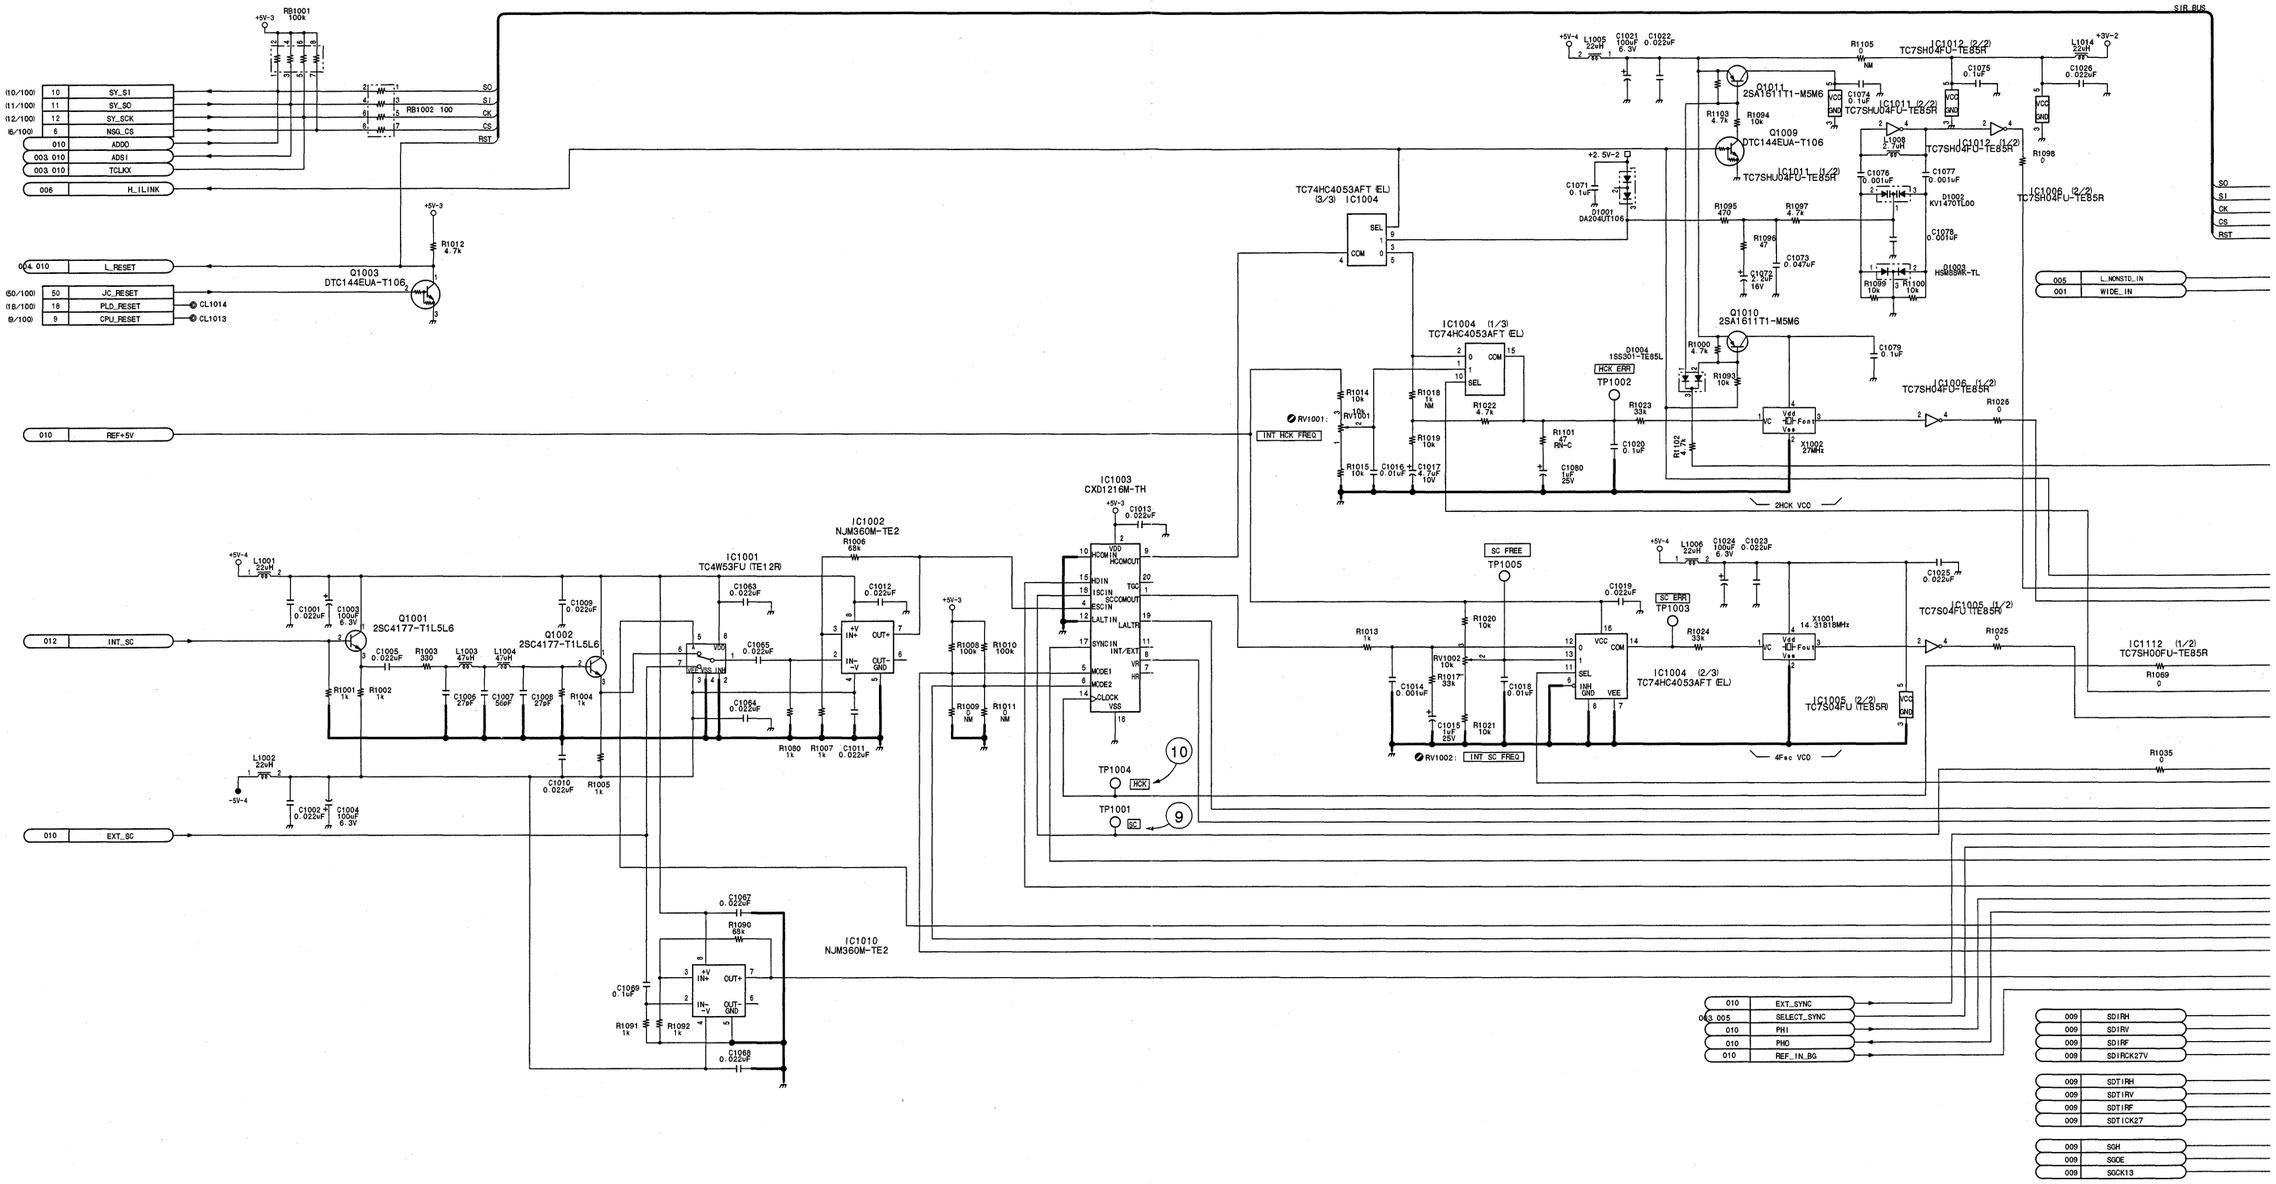

VPR-62/62P (11/12)

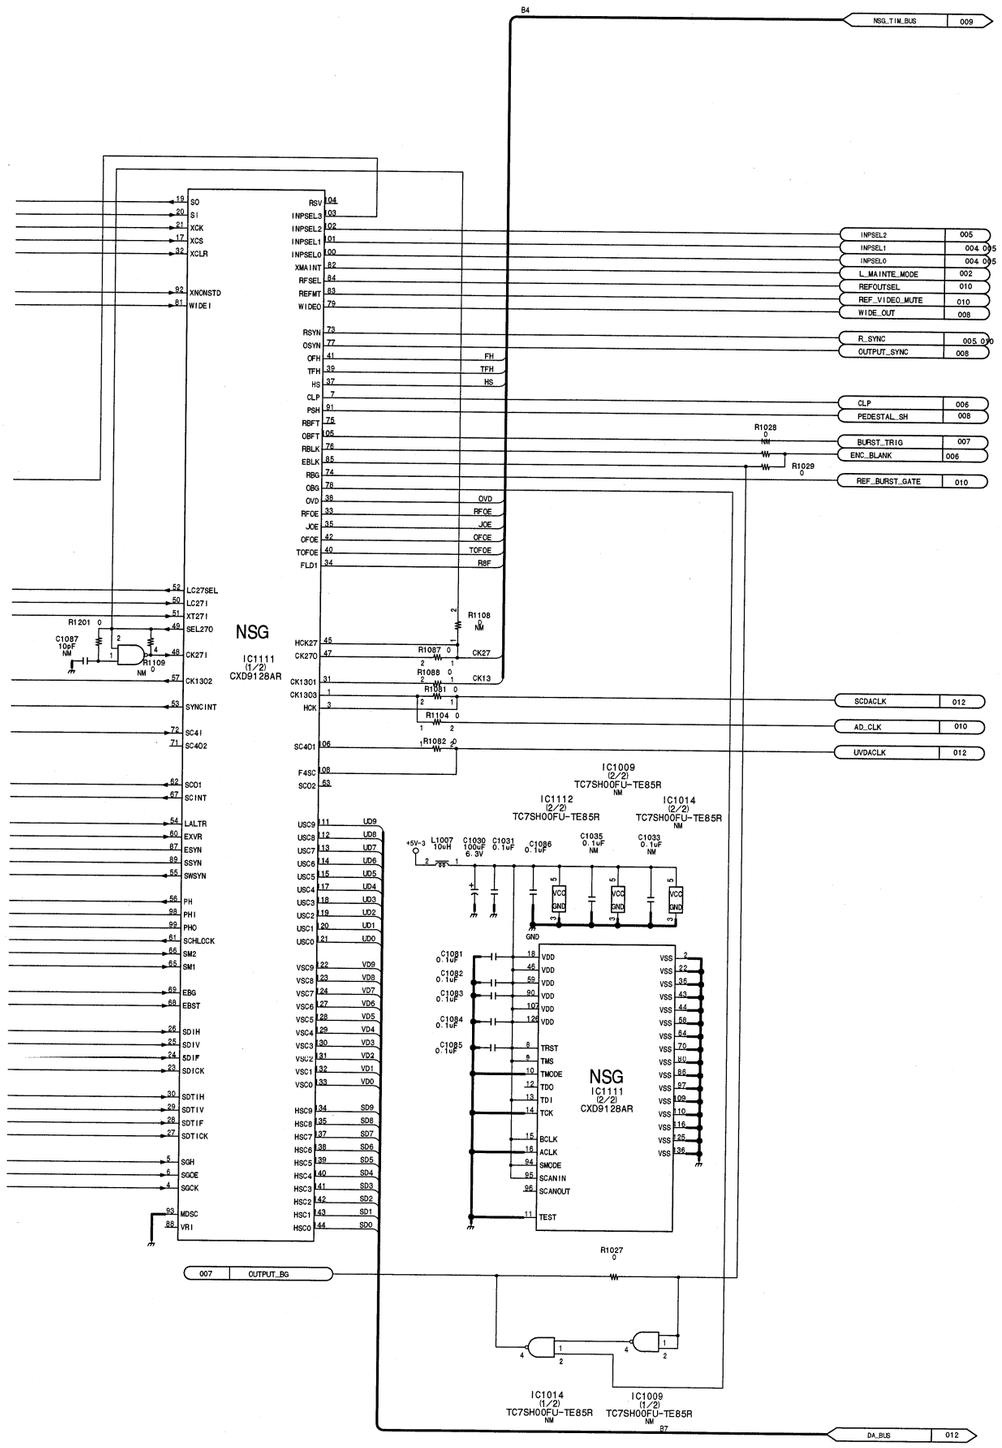

	NTSC	PAL	J
C1006	27pF 50V CH	33pF 50V CH	27pF 50V CH
C1007	56pF 50V CH	68pF 50V CH	56pF 50V CH
C1008	27pF 50V CH	33pF 50V CH	27pF 50V CH
C1033	NM	0.1uF 16V B	NM
C1035	NM	0.1uF 16V B	NM
IC1009	NM	TC7SH00FU-	NM
IC1014	NM	TC7SH00FU-	NM
L1003	47uH 10%	27uH 5%	47uH 10%
L1004	47uH 10%	27uH 5%	47uH 10%
R1008	100k 1/16W 5%	NM	100k 1/16W 5%
R1009	NM	0 0W ---	NM
R1010	100k 1/16W 5%	NM	100k 1/16W 5%
R1011	NM	0 0W ---	NM
R1027	0 --- ---	NM	0 --- ---
X1001	14.31818MH	17.734475M	14.31818MH

⑨ TP1001 SC (NTSC)

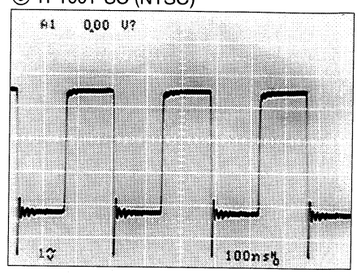

⑨ TP1001 SC (PAL)

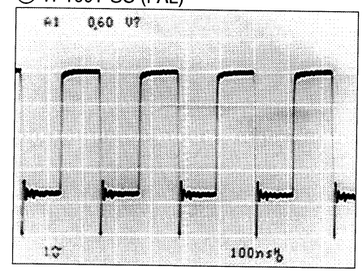

⑩ TP1004 HCK (NTSC)

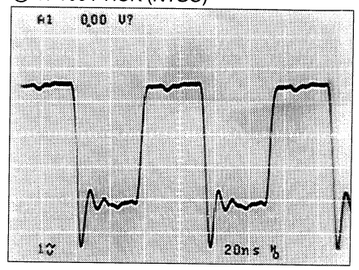

⑩ TP1004 HCK (PAL)

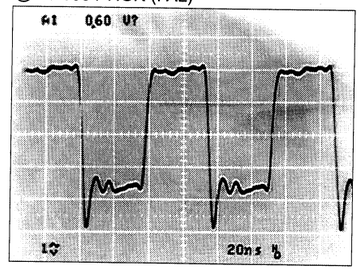

Analog video input • output process/reference

VPR-62/62P (11/12)

BOARD NO. 1-675-531-14
LOT NO. 152- : NTSC
LOT NO. 143- : PAL
DSR-2000_VPR-62_014_11

VPR-62/62P (11/12)

⑨ TP1001 SC (NTSC)

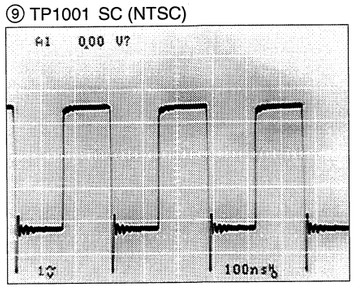

⑩ TP1004 HCK (NTSC)

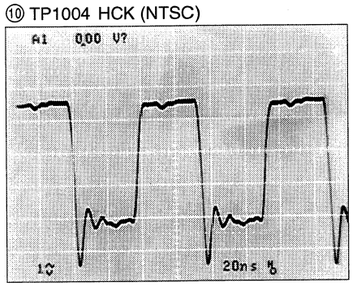

⑨ TP1001 SC (PAL)

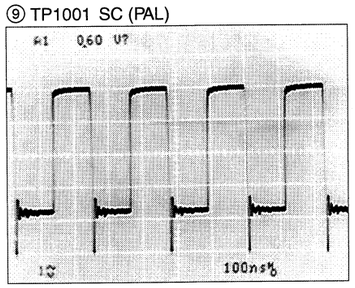

⑩ TP1004 HCK (PAL)

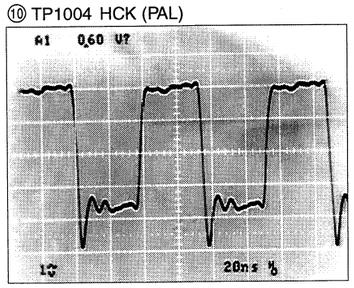

15-166 (b)

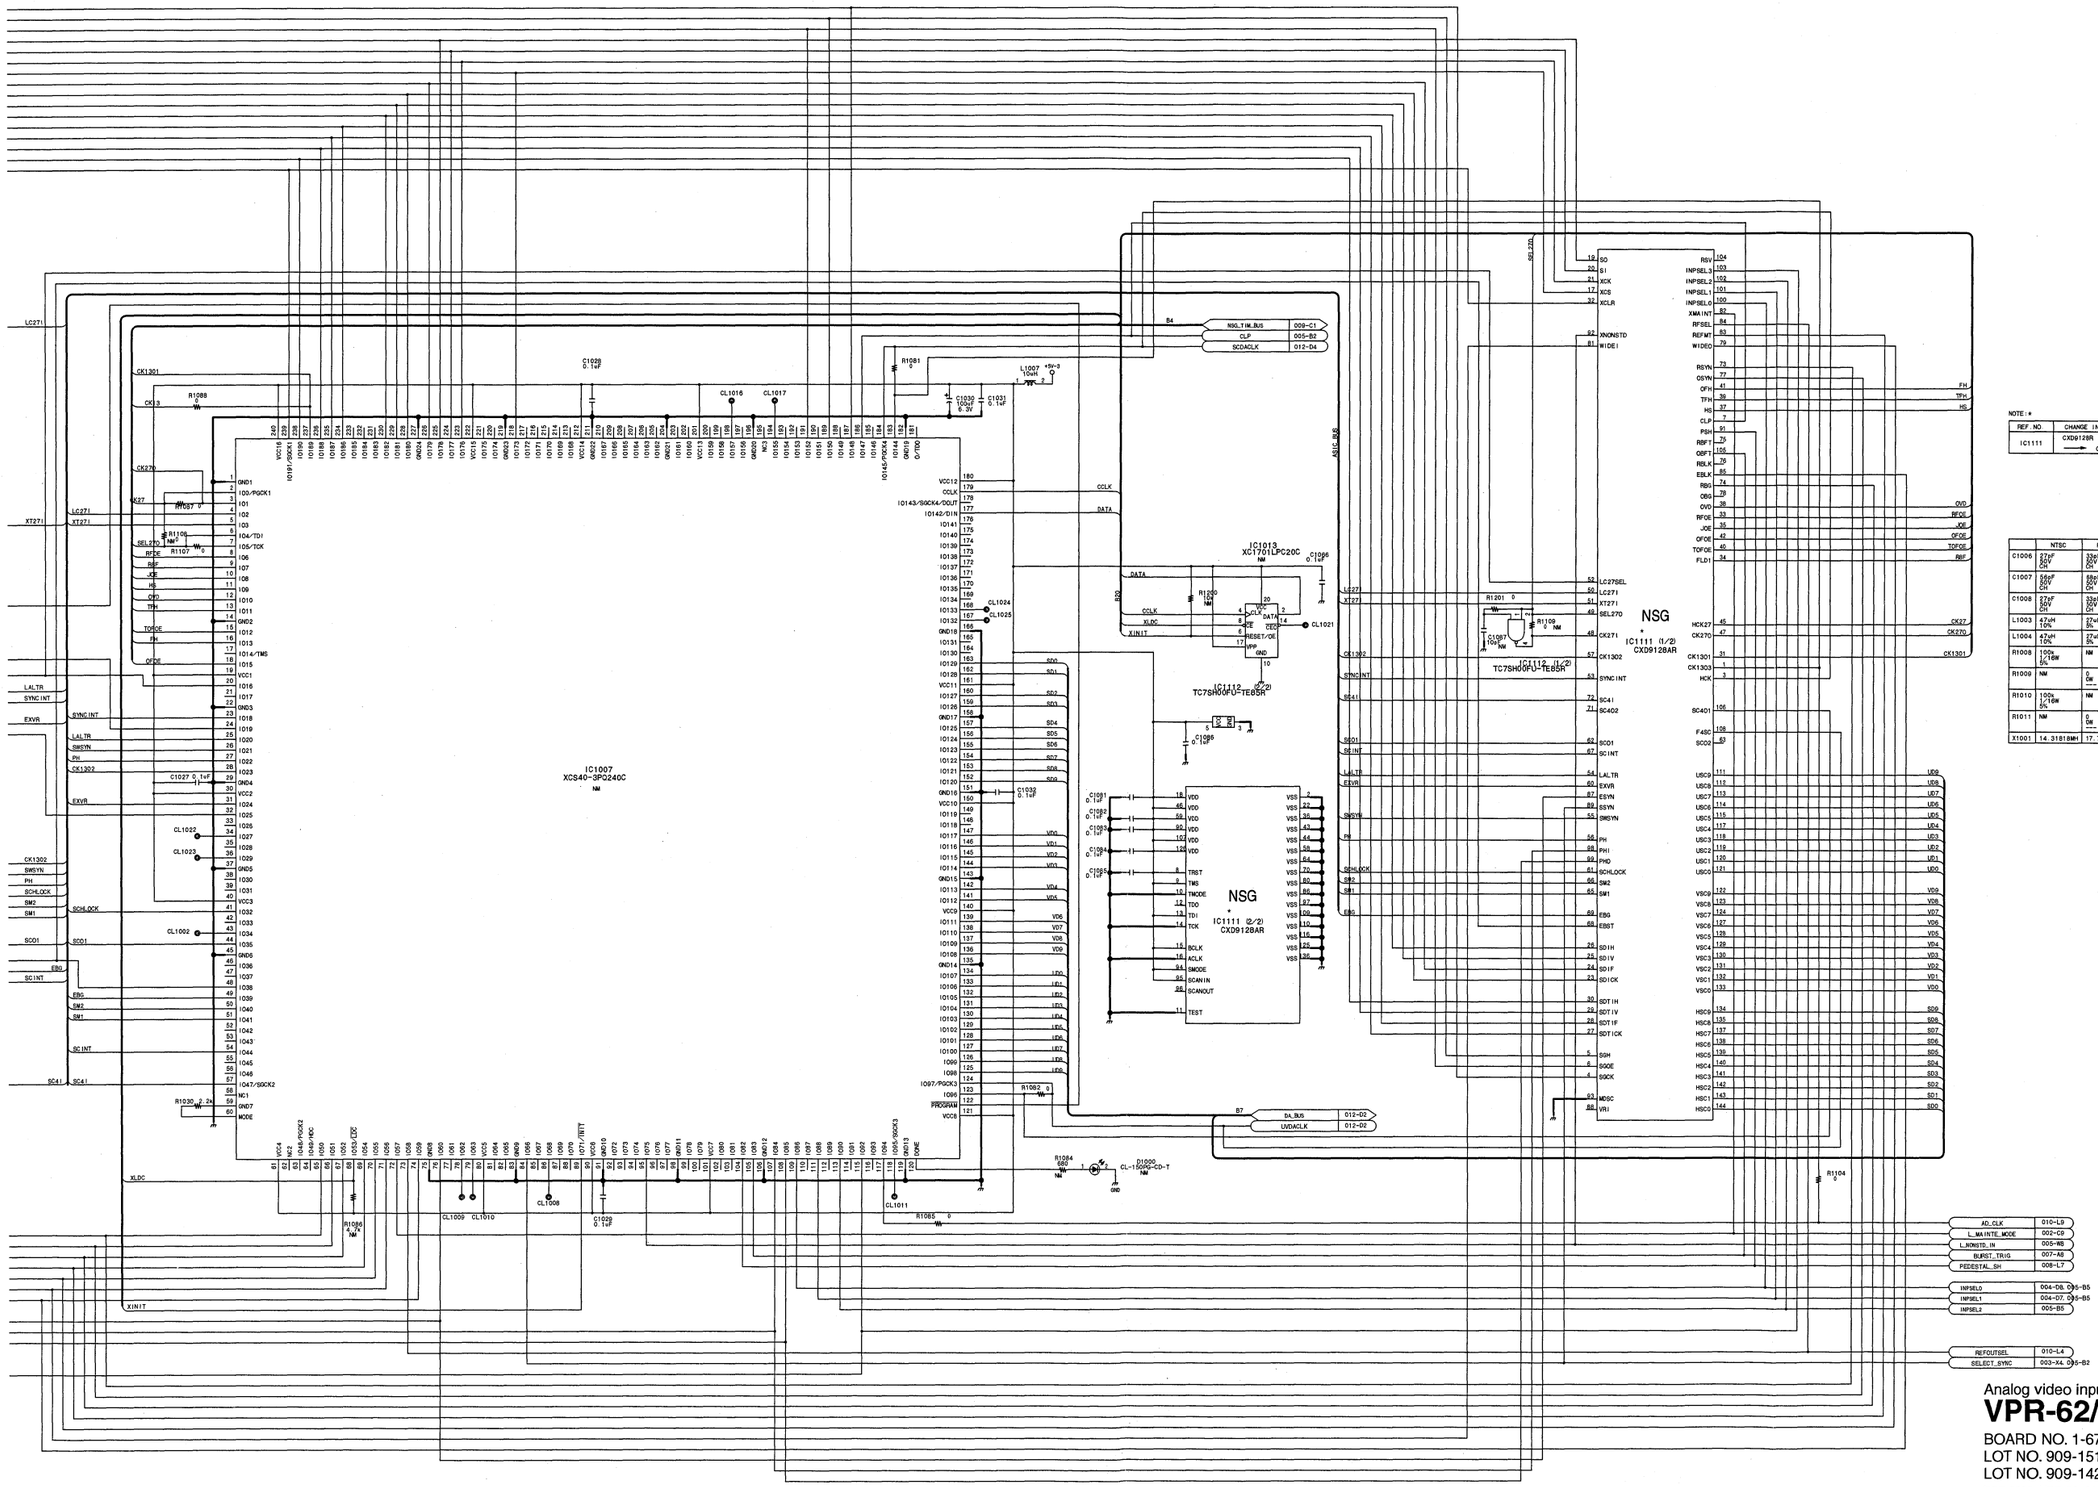

NOTE : *

REF. NO.	CHANGE INFOMATION	LOT NO.
IC1111	CXD9128R → CXD9128AR	002-

		NTSC	PAL	J
C1006		27pF 50V CH	33pF 50V CH	27pF 50V CH
C1007		56pF 50V CH	68pF 50V CH	56pF 50V CH
C1008		27pF 50V CH	33pF 50V CH	27pF 50V CH
L1003		47μH 10%	47μH 5%	47μH 10%
L1004		47μH 10%	47μH 5%	47μH 10%
R1008		100k 1/16W 5%	NM	100k 1/16W 5%
R1009		NM	0 5W	NM
R1010		100k 1/16W 5%	NM	100k 1/16W 5%
R1011		NM	0 5W	NM
X1001		14.31818MH	17.734475M	14.31818MH

Analog video input • output process/reference

VPR-62/62P (11/12)

BOARD NO. 1-675-531-12
LOT NO. 909-151: NTSC
LOT NO. 909-142: PAL
DSR-2000_VPR-62_012_11

VPR-62/62P (11/12)

⑨ TP1001 SC (NTSC)

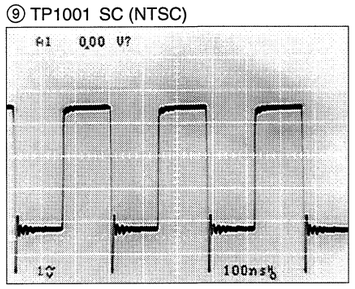

⑨ TP1001 SC (PAL)

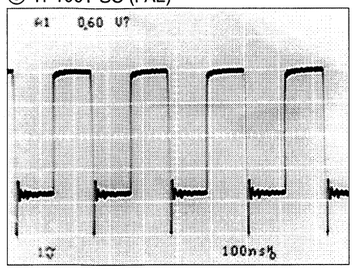

⑩ TP1004 HCK (NTSC)

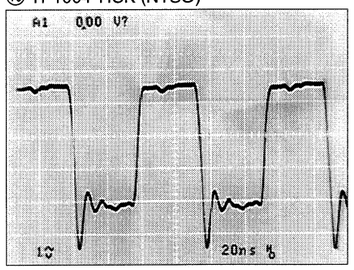

⑩ TP1004 HCK (PAL)

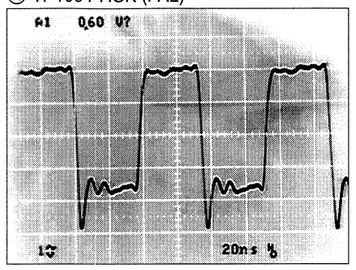

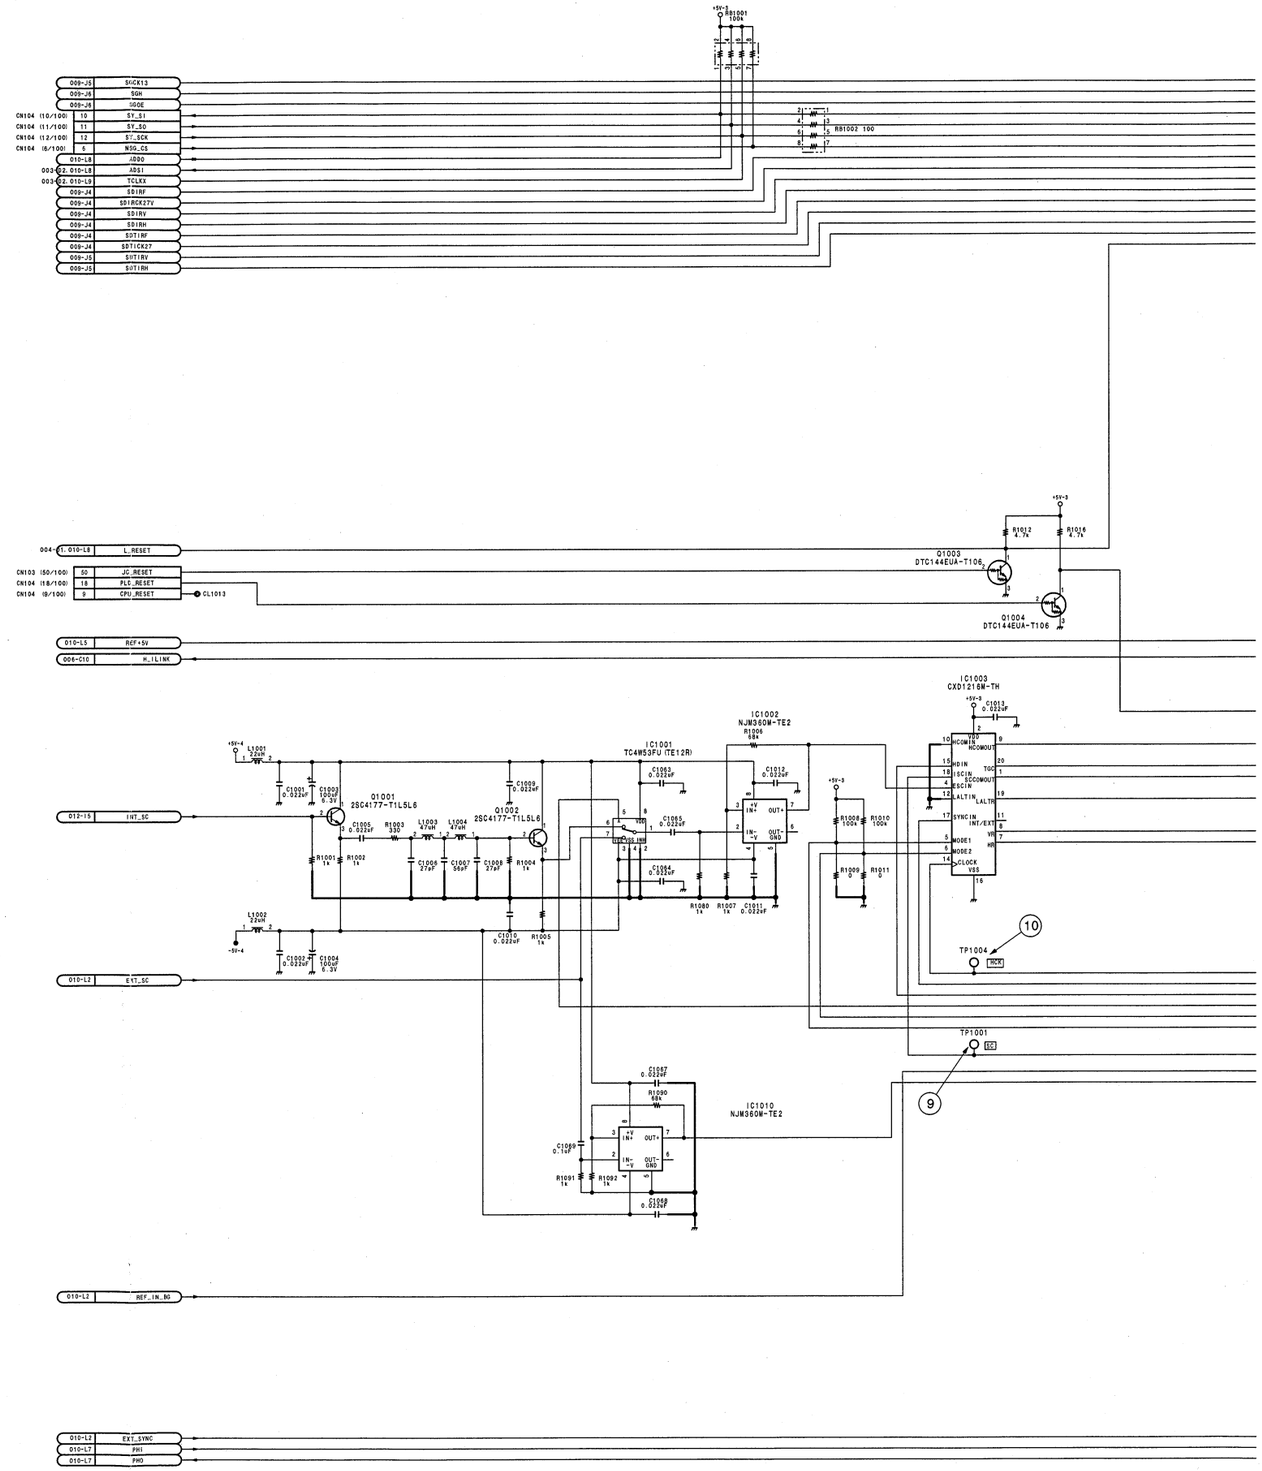

15-166 (a)

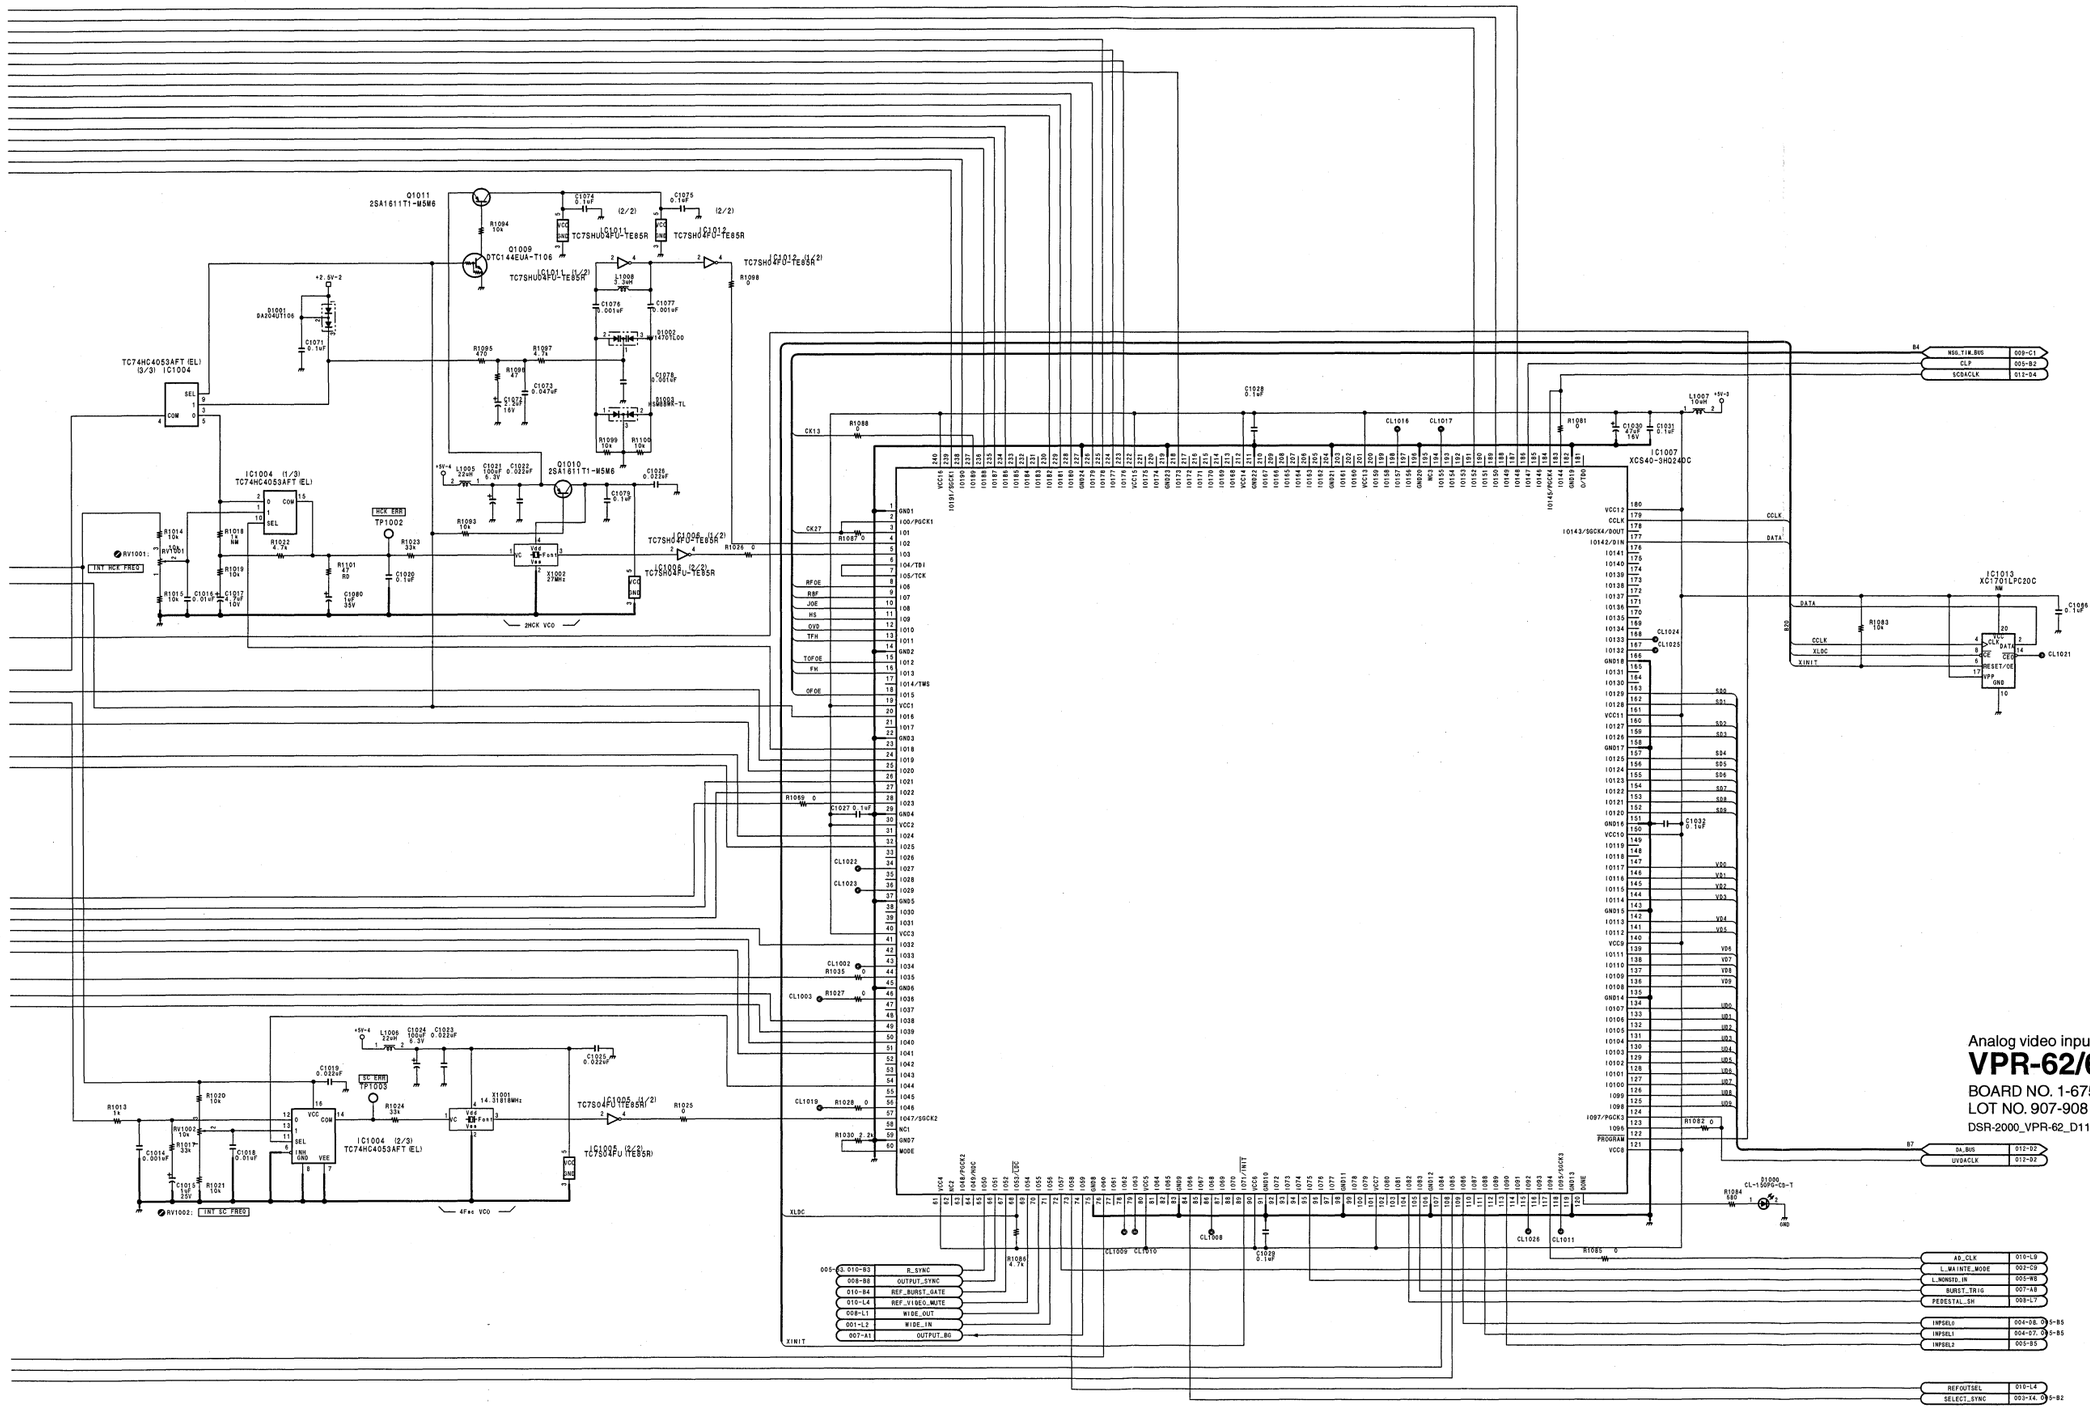

Analog video input・output process/reference

VPR-62/62P (11/12)

BOARD NO. 1-675-531-11
LOT NO. 907-908
DSR-2000_VPR-62_D11_11

VPR-62/62P (12/12)

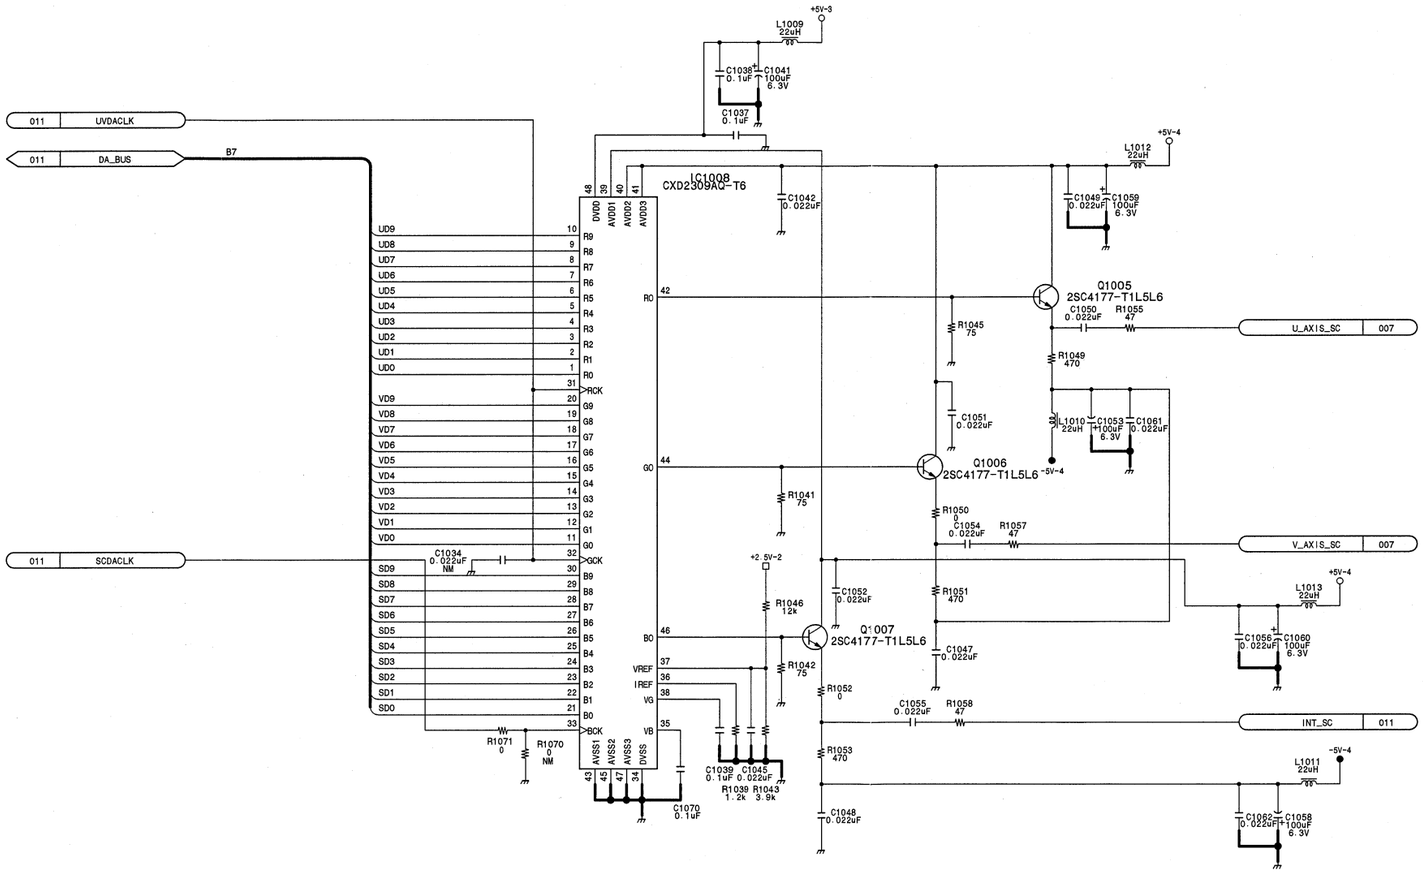

BOARD NO. SUFFIX	LOT NO.
12	909-
14	NTSC : 152- PAL : 143-

	NTSC	PAL	J
R1039	1.2k 1/16W 0.5%	1.1k 1/16W 0.5%	1.2k 1/16W 0.5%
R1050	0 0W ---	100 1/16W 5%	0 0W ---

Analog video input • output process/reference

VPR-62/62P (12/12)

BOARD NO. 1-675-531-12, 14
LOT NO. 909-
DSR-2000_VPR-62_014_12

VPR-62/62P (12/12)

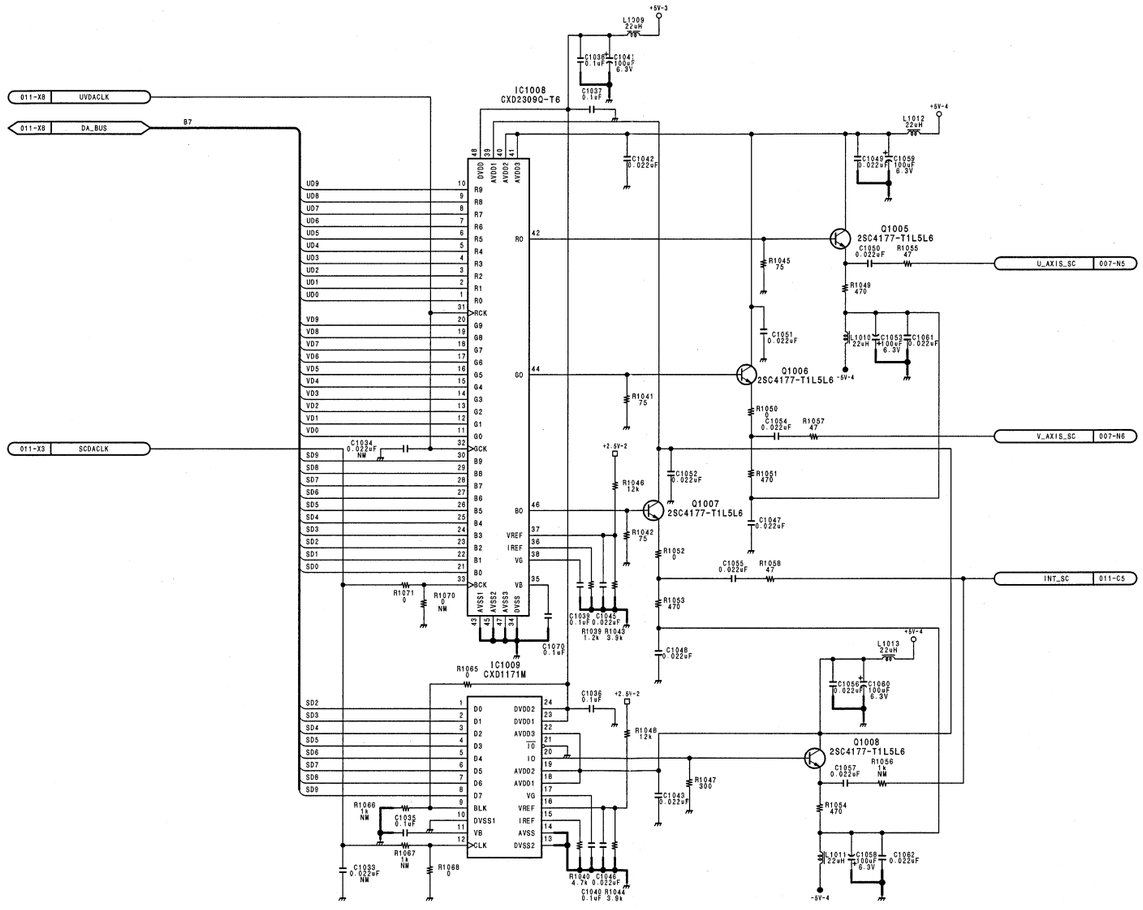

Analog video input • output process/reference

VPR-62/62P (12/12)

BOARD NO. 1-675-531-11
LOT NO. 907-908
DSR-2000_VPR-62_D11_12

15-168 (a) 15-168 (a)

DSR-2000/2000P

VR-259, VR-260

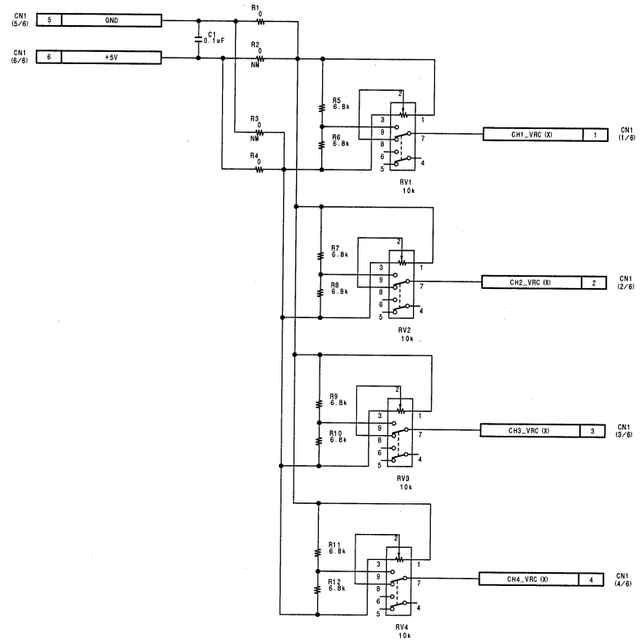

Audio PB volume control

VR-259

BOARD NO. 1-675-553-12, 13
LOT NO. 907-

DSR-2000_VR-259_C13_1

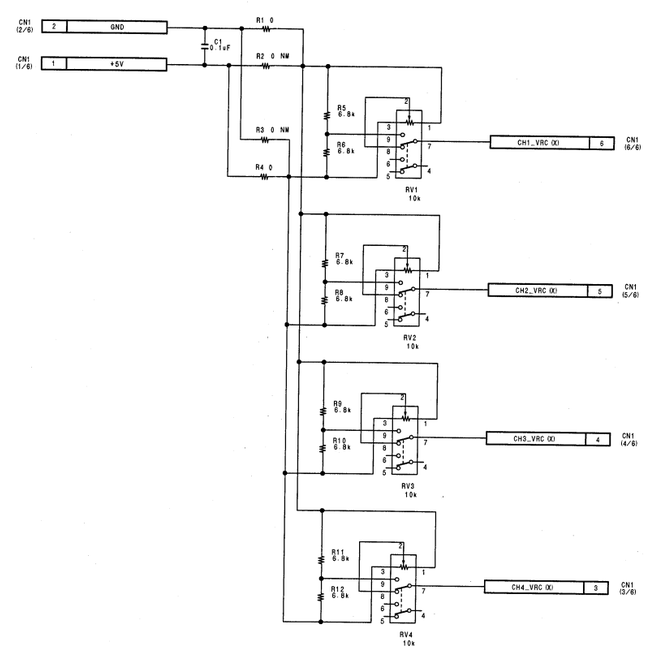

Audio REC volume control

VR-260

BOARD NO. 1-675-554-12, 13
LOT NO. 907-

DSR-2000_VR-260_C13_1

Frame Wiring (1/3)

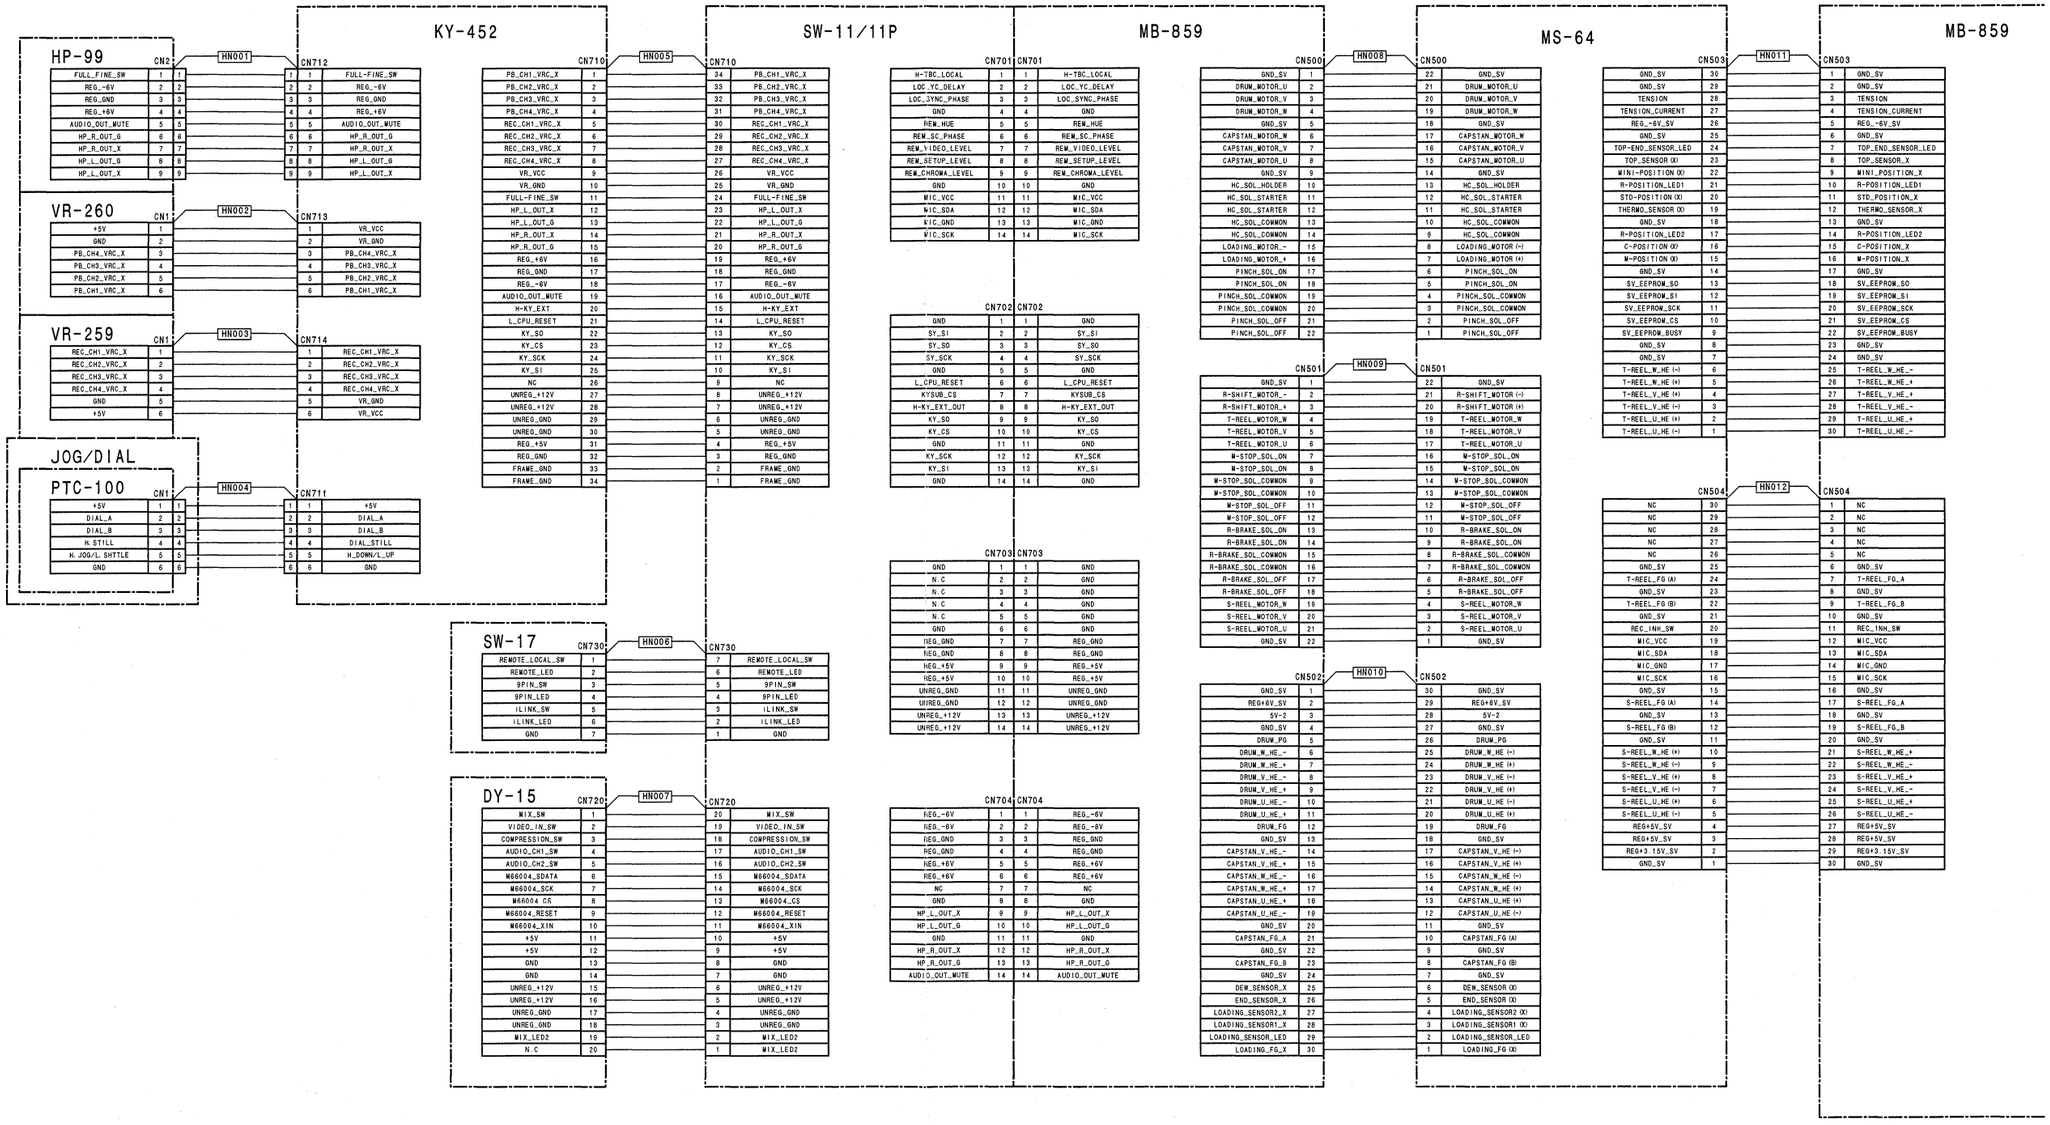

Frame Wiring (1/3)

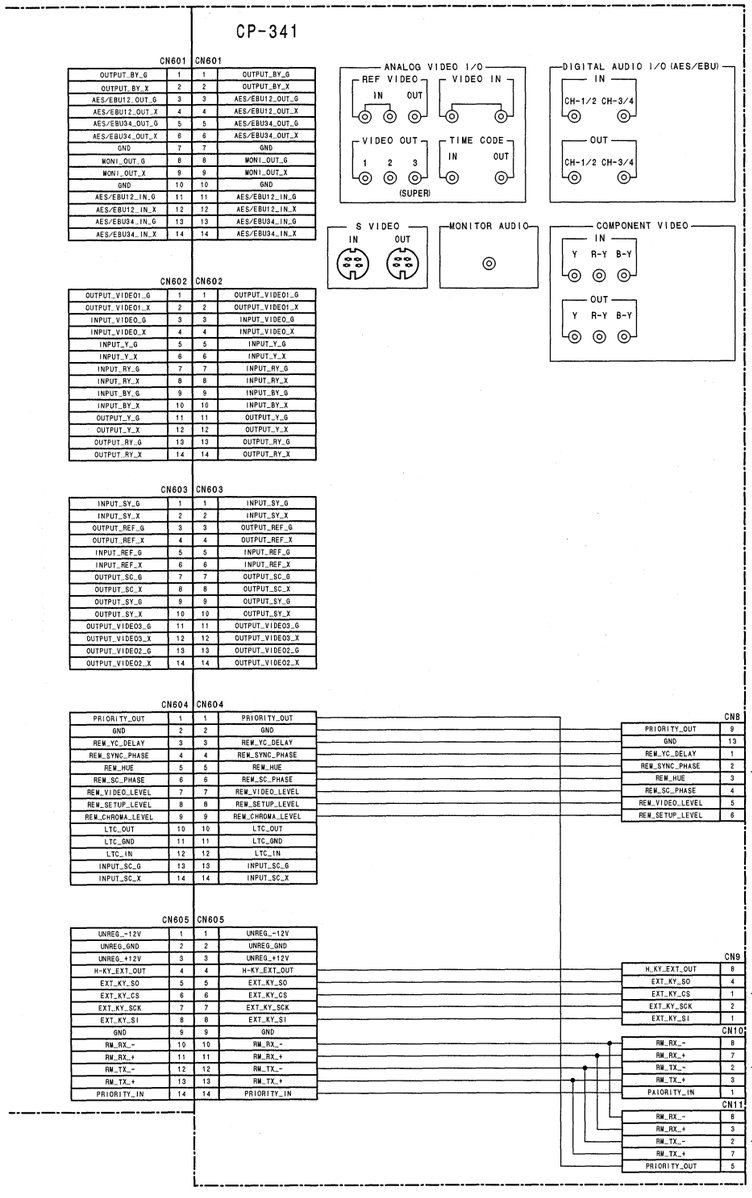

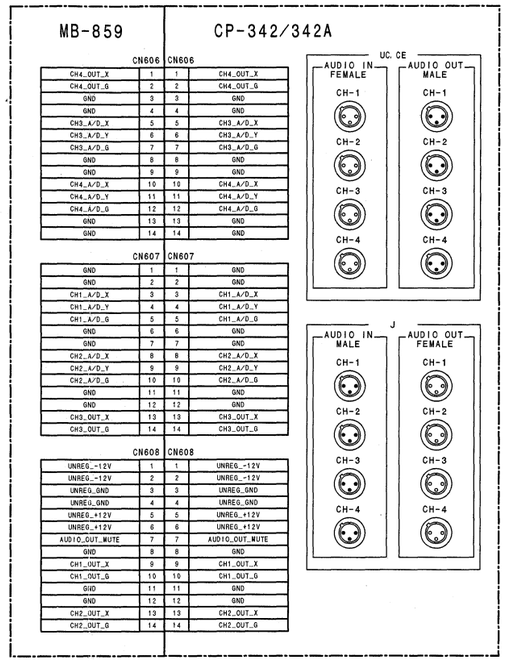

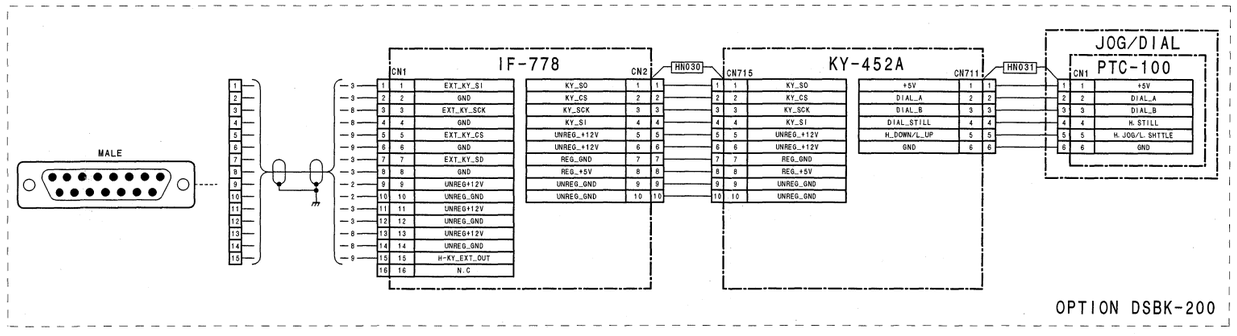

Frame Wiring (1/3)

LOT NO. 907-

PR-111

EX-752

MB-859

IF-763

DSBK-190

Frame Wiring (2/3)

	CN303
REG_GND	1
REG_GND	2
REG_GND	3
REG_GND	4
REG_+6V	5
REG_+6V	6
REG_+5V	7
REG_+5V	8
GND	9
EVEN_RF_MONITOR	10
EVEN_RF_GND	11
EVEN_JSWP	12
L_IT1_CENTER	13
L_SUB_LOCK	14
OOO_RF_MONITOR	15
OOO_RF_GND	16
OOO_JSWP	17
L_NARROW_IT1_CENTER	18
L_TEST_MODE	19
GND	20
SUB_RF_MONITOR	21
SUB_RF_GND	22
SUB_JSWP	23
TEST_FREQ_SEL_1	24
TEST_FREQ_SEL_2	25
GND	26
MAIN_RF_MONITOR	27
MAIN_RF_GND	28
MAIN_JSWP	29
RESERV_01	30

CN1001		CN1002
1	GND	1
2	PB_SD010	2
3	PB_SD011	3
4	PB_SD012	4
5	PB_SD013	5
6	PB_SD014	6
7	PB_SD015	7
8	PB_SD016	8
9	PB_SD017	9
10	REFF	10
11	REFA	11
12	L_CPU_RESET	12
13	GND	13
14	SY_XI	14
15	SY_SO	15
16	SY_SCK	16
17	GND	17
18	PLO_RESET	18
19	CIA_MOS	19
20	CIA_SCS	20
21	GND	21
22	CIP_MOS	22
23	CIP_SCS	23
24	DV_CS	24
25	GND	25
26	SY_SO_3V	26
27	SY_XI_3V	27
28	SY_SCK_3V	28
29	GND	29
30	NC	30
31	NC	31
32	NC	32
33	GND	33
34	NC	34
35	NC	35
36	NC	36
37	GND	37
38	NC	38
39	NC	39
40	NC	40
41	GND	41
42	NC	42
43	NC	43
44	NC	44
45	GND	45
46	OPT_LED	46
47	OPT_IN	47
48	L_OPTION_EXIST	48
49	GND	49
50	NC	50
51	NC	51
52	NC	52
53	GND	53
54	NC	54
55	NC	55
56	NC	56
57	GND	57
58	NC	58
59	NC	59
60	NC	60
61	GND	61
62	NC	62
63	NC	63
64	NC	64
65	GND	65
66	NC	66
67	NC	67
68	NC	68
69	GND	69
70	NC	70
71	NC	71
72	NC	72
73	GND	73
74	NC	74
75	NC	75
76	NC	76
77	GND	77
78	SY_RESET	78
79	NC	79
80	NC	80
81	REG_GND	81
82	REG_GND	82
83	REG_+5V	83
84	REG_+5V	84
85	3.15V_GND	85
86	3.15V_GND	86
87	3.15V_GND	87
88	REG_+3.15V	88
89	REG_+3.15V	89
90	REG_+3.15V	90
91	UNREG_GND	91
92	UNREG_GND	92
93	UNREG_GND	93
94	UNREG_GND	94
95	UNREG_GND	95
96	UNREG_GND	96
97	UNREG_+12V	97
98	UNREG_+12V	98
99	UNREG_+12V	99
100	UNREG_+12V	100

CN401		HN029	CN2		CN1		
NTPB	1	2	1	NTPB	VP	1	ILINK
TPB	2	9	2	TPB	VG	2	
GND	3	0	3	GND	NTPB	3	
NTPA	4	2	4	NTPA	TPB	4	
TPA	5	9	5	TPA	NTPA	5	
GND	6	0	6	GND	TPA	6	

CN-1968

OPTION DSBK-190

Frame Wiring (2/3)
LOT NO. 907-

Frame Wiring (3/3)

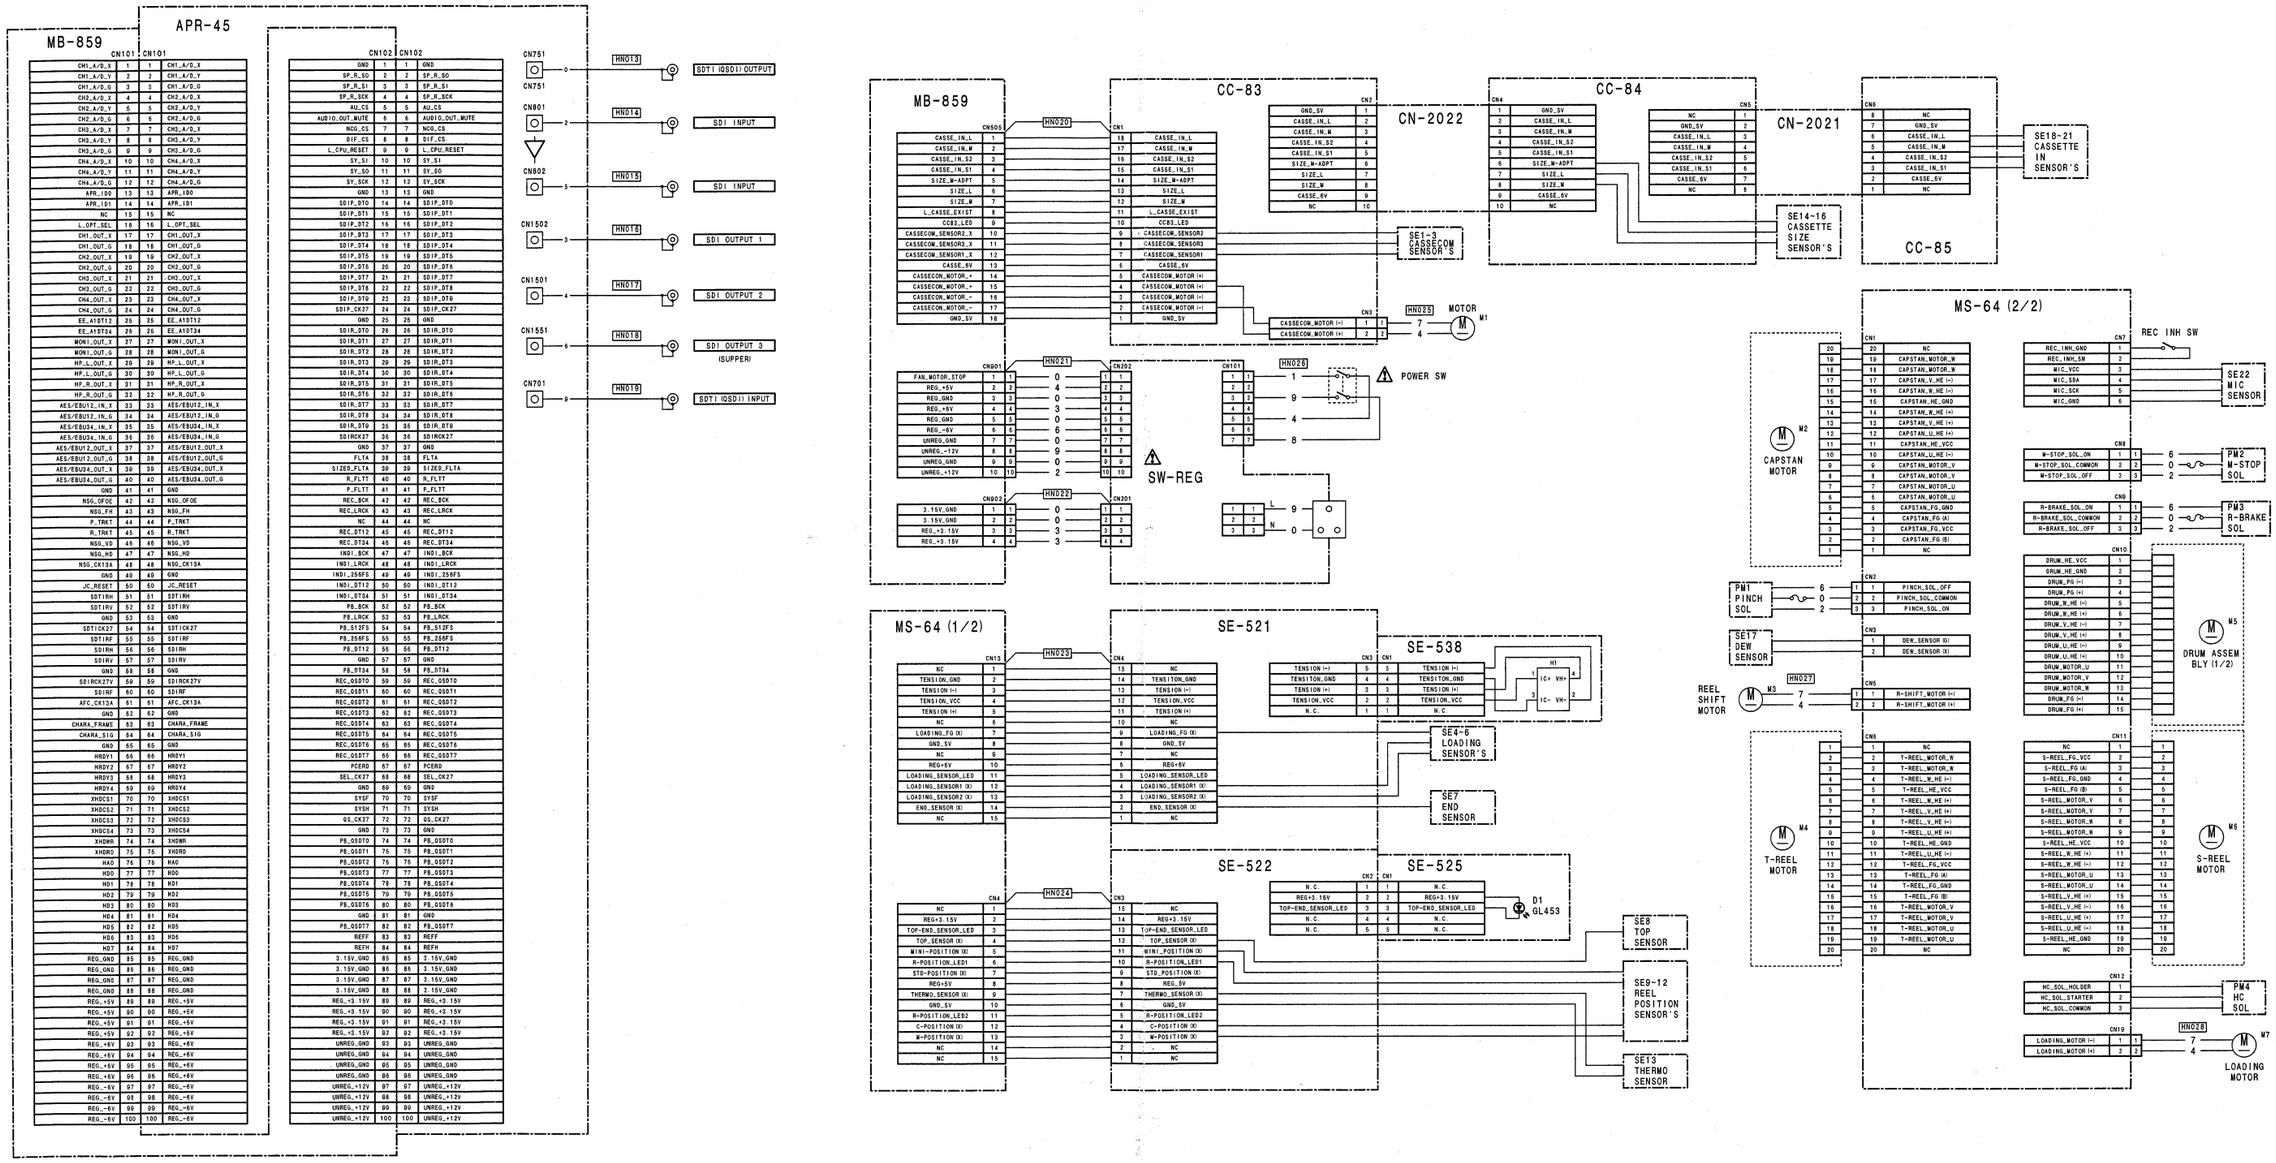

Frame Wiring (3/3)

LOT NO. 907-